



Contents	Pages
Section Overview	1/2 - 1/3
Motor Starter Protectors	
3RV20 MSP, Class 10/20	1/4 - 1/5
3RV10 MSP, Class 10/20	1/5
Circuit Breakers	
3RV17 Circuit Breaker UL 489	1/6
3RV27, 3RV28 Circuit Breaker UL 489	1/6
Accessories	
Auxiliary Switches	1/7
Auxiliary Releases	1/7
Busbars	1/8
Mounting Accessories	1/9 - 1/12
Rotary Operating Mechanisms	1/13
Enclosures & Front Plates	1/13
3RV29 Infeed System	1/14 - 1/17
General Data for Motor Starter Protectors	
Manual Motor Starter Ratings	1/18
Group Installation Ratings	1/19
Combination Motor Controller Ratings	1/20
3RV27 and 3RV28 Circuit Breaker Ratings	1/21
Export Application Ratings	1/22 - 1/23
Rules for Mounting	1/24
Technical Data	1/25 - 1/28
Overview of MSP Functions & Applications	1/29
Application as a Combination Motor Controller	1/30
Application in DC Switching	1/31
Design	1/31
Characteristics	1/32
Circuit Diagrams	1/32
Dimensions	1/33 - 1/34
General Data for Accessories	
Mountable Accessories	
Overview	1/35 - 1/36
Circuit Diagrams	1/37 - 1/35
Dimensions	1/38
Busbar Accessories	
Overview	1/39
Dimensions	1/40 - 1/41
Operating Mechanisms	
Overview	1/42
Circuit Diagrams	1/43
Dimensions	1/43 - 1/44
Enclosures & Front Plates	
Overview	1/45
Dimensions	1/46
Spring Terminal Infeed System	
Design	1/47
Technical Data	1/47
Dimensions	1/48

SIRIUS 3RV motor starter protectors up to 100 A



Size S00, S0



For motor protection
CLASS 10

Selection and ordering data

Size	Rated Current	Page
S00	up to 16 A	1/4
S0	up to 40 A	1/4
S2	up to 65 A	1/5
S3	up to 100 A	1/5



For motor protection
CLASS 20

Selection and ordering data


Size	Rated Current	Page
S2	up to 65 A	1/5
S3	up to 100 A	1/5



General data for SIRIUS
motor starter protectors

	Page
Technical data	1/18
Overview	1/28
Characteristics	1/32
Circuit diagrams	1/32
Dimension drawings	1/33

Circuit Breakers 3RV17, 3RV27, 3RV28

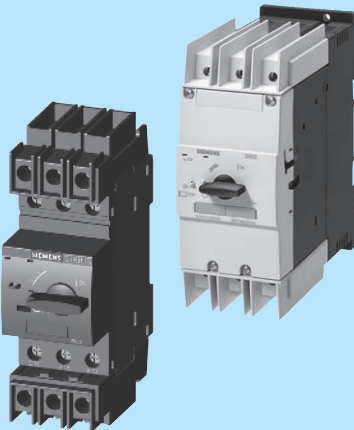


Page

Selection and ordering data 1/6

Dimension drawings	1/34
--------------------	------

SIRIUS 3RV29 infeed system

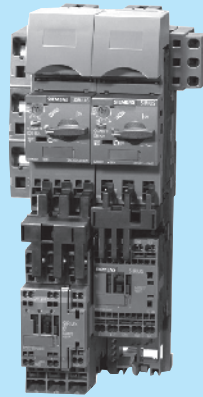


Page

Selection and ordering data 1/16-1/17

Technical data	1/47
Overview	1/14-1/15
Dimension drawings	1/48

3RV MSP auxiliaries and accessories

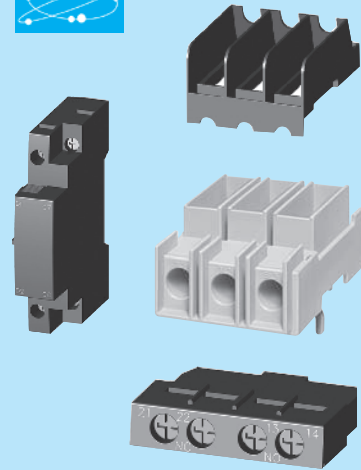


Page

Selection and ordering data 1/7-1/8

Technical data	1/27
Overview	1/35
Circuit diagrams	1/37
Dimension drawings	1/38

3RV busbar and accessories

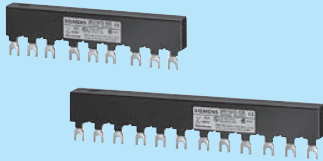

[Selection and ordering data](#)

Page

1/8


Overview

1/39

Technical data

1/40

Accessories for motor starter protectors with Spring-Type terminals

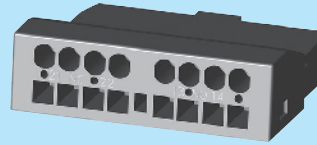

[Selection and ordering data](#)

Page

1/7

Technical data

1/28

Mounting Accessories



[Selection and ordering data](#)

Page

1/9 -1/12

Overview

1/36

Technical data

1/38

Rotary operating mechanisms



[Selection and ordering data](#)

Page

1/13

Technical data

1/28

Overview

1/42

Circuit diagrams

1/43

Dimension drawings

1/43

Enclosures and front plates



[Selection and ordering data](#)

Page

1/13

Overview

1/45

Dimension drawings

1/46

3RV Motor Starter Protectors

For Motor Protection


SIRIUS



**3RV20 Class 10
up to 40A**

Description	Ordering Information
<p>The 3RV20x MSP's are UL approved as Self Protected Combination Motor Controllers which are also called Type E. In this application, all the required functions for a motor branch are provided in one device: disconnect, short circuit protection, motor control and overload protection. A type E terminal adaptor is required. The 3RV20x MSP's are also approved for use as follows:</p> <ul style="list-style-type: none"> – Manual Motor Controller: Motor starter, motor disconnect, control and overload—protection. – Group Installation: Motor starter only, motor disconnect, control and overload protection. – Tap conductor Protection in Group Installation acc. NEC: Motor starter only; motor disconnect, control and overload protection. <p>When the 3RV20x is used with one of the 3 above mentioned approvals, the 3RV20x can be installed downstream of one circuit breaker or fuse set.</p> <p>For more detailed application information and rules how to apply, size and rate the 3RV20x in control panels in general, in group installations or in accordance to international IEC standards visit our website: www.usa.siemens.com/controlpaneldesign</p>	<ul style="list-style-type: none"> ▶ ON/OFF rotary handle with lockout and visible trip indication. ▶ Adjustment dial for setting to motor FLA. ▶ Class 10 overload trip characteristics. ▶ Short circuit trip at 13 times the maximum setting of the FLA adjustment dial. ▶ Short circuit current rating: ▶ Ambient compensated up to 140° F (applies to side by side mounting). ▶ Phase loss sensitivity. ▶ Test trip function. ▶ Terminal versions: screw, spring, ring lug. ▶ Auxiliaries and Accessories see pages 1/7–1/17. ▶ General Information see pages 1/29–1/32. ▶ Technical Data see pages 1/18–1/28. ▶ Dimensions see page 1/33.

Note: Select MSP by motor Full Load Amperes. Horsepower ratings are for reference only.

Illustration	FLA Adjustment Range [A]	Single-Phase HP Ratings		Three-Phase HP Ratings ¹⁾				Instantaneous short circuit release [A]	UL short-circuit breaking capacity @ 480V [kA]	Size S00 ^{2) 4)}	
		115V	230V	200V	230V	460V	575V			Order Number	Order Number
	0.11-0.16	—	—	—	—	—	—	2.1	65	3RV2011-0AA●●	—
	0.14-0.2	—	—	—	—	—	—	2.6	65	3RV2011-0BA●●	—
	0.18-0.25	—	—	—	—	—	—	3.3	65	3RV2011-0CA●●	—
	0.22-0.32	—	—	—	—	—	—	4.2	65	3RV2011-0DA●●	—
	0.28-0.4	—	—	—	—	—	—	5.2	65	3RV2011-0EA●●	—
	0.35-0.5	—	—	—	—	—	—	6.5	65	3RV2011-0FA●●	—
	0.45-0.63	—	—	—	—	—	—	8.2	65	3RV2011-0GA●●	3RV2021-0GA●●
	0.55-0.8	—	—	—	—	—	—	10	65	3RV2011-0HA●●	3RV2021-0HA●●
	0.7-1	—	—	—	—	—	1/2	13	65	3RV2011-0JA●●	3RV2021-0JA●●
	0.9-1.25	—	—	—	—	1/2	1/2	16	65	3RV2011-0KA●●	3RV2021-0KA●●
	1.1-1.6	—	1/10	—	—	3/4	3/4	21	65	3RV2011-1AA●●	3RV2021-1AA●●
	1.4-2	—	1/8	—	—	3/4	1	26	65	3RV2011-1BA●●	3RV2021-1BA●●
	1.8-2.5	—	1/8	1/2	1/2	1	1 1/2	33	65	3RV2011-1CA●●	3RV2021-1CA●●
	2.2-3.2	1/10	1/4	1/2	3/4	1 1/2	2	42	65	3RV2011-1DA●●	3RV2021-1DA●●
	2.8-4	1/8	1/8	3/4	3/4	2	3	52	65	3RV2011-1EA●●	3RV2021-1EA●●
	3.5-5	1/8	1/2	1	1	3	3	65	65	3RV2011-1FA●●	3RV2021-1FA●●
	4.5-6.3	1/4	1/2	1	1 1/2	3	5	82	65	3RV2011-1GA●●	3RV2021-1GA●●
	5.5-8	1/3	1	2	2	5	5	104	65	3RV2011-1HA●●	3RV2021-1HA●●
	7-10	1/2	1 1/2	2	3	5	7 1/2	130	65	3RV2011-1JA●●	3RV2021-1JA●●
	9-12.5	1/2	2	3	3	7 1/2	10	163	65	3RV2011-1KA●●	3RV2021-1KA●●
	11-16	1	2	3	5	10	—	208	65	3RV2011-4AA●●	3RV2021-4AA●●
	14-20	1 1/2	3	5	5	10	—	260	65	—	3RV2021-4BA●●
	17-22	1 1/2	3	5	7 1/2	15	—	286	65	—	3RV2021-4CA●●
	20-25	2	3	5	7 1/2	15	—	325	65	—	3RV2021-4DA●●
23-28	2	5	7 1/2	10	20	—	364	50	—	3RV2021-4NA●●	
27-32	2	5	7 1/2	10	20	—	400	50	—	3RV2021-4EA●●	
30-36 ³⁾	3	5	10	10	25	—	432	12	—	3RV2021-4PA●●	
34-40 ³⁾	3	7 1/2	10	10	30	—	480	12	—	3RV2021-4FA●●	

Screw terminals, no auxiliary: ●● = 10
 Screw Terminals, with 1NO/1NC Aux: ●● = 15
 Spring terminals, no auxiliary: ●● = 20
 Spring Terminals, with 1NO/1NC Aux: ●● = 25
 Ring Lug Terminals, no Auxiliary: ●● = 40

1) Select motor starter protector by motor full load amps. Horse power ratings for reference only.

2) The motor starter protectors rated up to 32 A can be used as manual motor controllers or as Type E combination motor controllers. For use as a Type E combination motor controller, a Type E terminal is required. See accessories page 1/10.

3) These products are NOT certified as Type E combination motor controllers. They can only be used as manual motor controllers.

4) 3RV2 MSP's can only be used with Innovations contactors and accessories



Description	Ordering Information
<p>The 3RV203 / 104 MSP's are UL approved as Self Protected Combination Motor Controllers which are also called Type E. In this application, all the required functions for a motor branch are provided in one device: disconnect, short circuit protection, motor control and overload protection. A type E terminal adaptor is required for all S2 frame 3RV2031 above 45A and all S2 frame 3RV2032 as well as for all S3 frame motor starter protectors.</p> <p>The 3RV203 / 104 MSP's are also approved for use as follows:</p> <ul style="list-style-type: none"> – Manual Motor Controller: Motor starter, motor disconnect, control and overload protection. – Group Installation: Motor starter only, motor disconnect, control and overload protection. – Tap conductor Protection in Group Installation acc. NEC: Motor starter only; motor disconnect, control and overload protection. <p>When the 3RV203 /104 is used with one of the 3 above mentioned approvals, they can be installed downstream of one circuit breaker or fuse set.</p> <p>For more detailed application information and rules how to apply, size and rate these MSP's in control panels in general, in group installations or in accordance to international IEC standards visit our website: www.usa.siemens.com/controlpaneldesign</p>	<ul style="list-style-type: none"> ▶ ON/OFF rotary handle with lockout and visible trip indication. ▶ Adjustment dial for setting to motor FLA. ▶ Class 10 overload trip characteristics. ▶ Short circuit trip at 13 times the maximum setting of the FLA adjustment dial. ▶ Short circuit current rating: ▶ Ambient compensated up to 140° F (applies to side by side mounting). ▶ Phase loss sensitivity. ▶ Test trip function. ▶ Auxiliaries and Accessories see pages 1/7–1/17. ▶ General Information see pages 1/29–1/32. ▶ Technical Data see pages 1/18–1/28. ▶ Dimensions see page 1/33.

Note: Select MSP by motor Full Load Amperes. Horsepower ratings are for reference only.

Illustration	FLA Adjustment Range [A]	Single Phase HP rating ¹⁾		3 Phase HP Rating ¹⁾				Inst. Short-Circuit Release [A]	UL AIC (480V) [kA] ⁶⁾	Trip Class 10	Trip Class 20
		115V	240V	200V	230V	460V	575V			Order Number ⁴⁾	Order Number ⁴⁾
3RV203 Frame Size S2											
	9.5 - 14	1.5	3	5	5	10	15	208	65	3RV2031-4SA10	3RV2031-4SB10
	12 - 17	1.5	3	5	7.5	15	15	260	65	3RV2031-4TA10	3RV2031-4TB10
	14 - 20	1.5	3	7.5	7.5	15	20	260	65	3RV2031-4BA10	3RV2031-4BB10
	18 - 25	2	5	7.5	10	20	25	325	65	3RV2031-4DA10	3RV2031-4DB10
	22 - 32	3	5	10	10	25	30	416	65	3RV2031-4EA10	3RV2031-4EB10
	28 - 36	3	7.5	15	15	30	40	520	65	3RV2031-4PA10	3RV2031-4PB10
	32 - 40	3	7.5	15	15	30	40	585	65	3RV2031-4UA10	3RV2031-4UB10
	35 - 45	3	10	15	15	40	50	650	65	3RV2031-4VA10	3RV2031-4VB10
	42 - 52	5	10	15	20	40	50	741	65	3RV2031-4WA10	3RV2031-4WB10
	49 - 59	5	15	20	25	50	60	845	30	3RV2031-4XA10	3RV2031-4XB10
54 - 65	5	15	20	25	50	60	845	30	3RV2031-4JA10	3RV2031-4JB10	
3RV104 Frame Size S3											
	28 - 40	3	7.5	15	15	30	40	520A	65	3RV1041-4FA10	3RV1042-4FB10
	36 - 50	5	10	15	20	40	50	650A	65	3RV1041-4HA10	3RV1042-4HB10
	45 - 63	5	15	20	25	50	60	819A	65	3RV1041-4JA10	3RV1042-4JB10
	57 - 75	7.5	15	25	25	60	75	975A	65	3RV1041-4KA10	3RV1042-4KB10
	70 - 90	10	20	30	30	75	100 ³⁾	1170A	65	3RV1041-4LA10	3RV1042-4LB10
	80 - 100	10	25	40	40	75	100 ³⁾	1235A	65	3RV1041-4MA10	3RV1042-4MB10

1) Select motor starter protector by motor full load amps. Horse power ratings for reference only.

2) Size S2 and S3 are listed as type E combination motor controllers. For required Type E terminals see page 1/10. 3RV2031 MSP's with a current setting limit of 45A or less do not require a type E terminal and fulfill the spacing requirements of UL508.

3) Shaded ratings apply for group installation only. These ratings do not apply as UL listed manual combination starters.

4) Pre-assembled motor starter protector and transverse auxiliary switch with 1NO + 1NC is available. Replace the last digit of the order no. with a "5".

5) 3RV1 MSP's can only be used with 3RT1 contactors and accessories. 3RV2 MSP's can only be used with 3RT2 contactors and accessories.

6) For 100kA SCCR rated MSP's, change the part number from 3RV2031 to 3RV2032. (applies to S2 frame only through 65A).

Refer to pages 1/18 to 1/20 when using an MSP in a Manual Motor Starter or a Manual Self-Protected Combination Motor Controller.

3RV Circuit Breakers


UL 489

3RV
up to 70 A

SIRIUS



Selection and ordering data



Rated Current ¹⁾ [A]	Thermal overload release (non-adjustable) [A]	Short Circuit breaking capacity [kA]			For Motor Protection ²⁾			For Transformer Protection ³⁾		
		480 VAC	480Y/277VAC	600Y/347VAC	Instantaneous Over Current Release [A]	Order Number (Screw Terminals)	Weight [kg]	Instantaneous Over Current Release [A]	Order Number (Screw Terminals)	Weight [kg]
Innovations Frame Size S00⁴⁾										
0.16	0.16	—	65	10	2.1	3RV2711-0AD10	0.390	3.3	3RV2811-0AD10	0.390
0.2	0.2	—	65	10	2.6	3RV2711-0BD10	0.390	4.2	3RV2811-0BD10	0.390
0.25	0.25	—	65	10	3.3	3RV2711-0CD10	0.390	5.2	3RV2811-0CD10	0.390
0.32	0.32	—	65	10	4.2	3RV2711-0DD10	0.390	6.5	3RV2811-0DD10	0.390
0.4	0.4	—	65	10	5.2	3RV2711-0ED10	0.390	8.2	3RV2811-0ED10	0.390
0.5	0.5	—	65	10	6.5	3RV2711-0FD10	0.390	10	3RV2811-0FD10	0.390
0.63	0.63	—	65	10	8.2	3RV2711-0GD10	0.390	13	3RV2811-0GD10	0.400
0.8	0.8	—	65	10	10	3RV2711-0HD10	0.390	16	3RV2811-0HD10	0.450
1	1	—	65	10	13	3RV2711-0JD10	0.450	21	3RV2811-0JD10	0.450
1.25	1.25	—	65	10	16	3RV2711-0KD10	0.450	26	3RV2811-0KD10	0.460
1.6	1.6	—	65	10	21	3RV2711-1AD10	0.460	33	3RV2811-1AD10	0.460
2	2	—	65	10	26	3RV2711-1BD10	0.460	42	3RV2811-1BD10	0.460
2.5	2.5	—	65	10	33	3RV2711-1CD10	0.460	52	3RV2811-1CD10	0.460
3.2	3.2	—	65	10	42	3RV2711-1DD10	0.460	65	3RV2811-1DD10	0.460
4	4	—	65	10	52	3RV2711-1ED10	0.450	82	3RV2811-1ED10	0.460
5	5	—	65	10	65	3RV2711-1FD10	0.460	104	3RV2811-1FD10	0.460
6.3	6.3	—	65	10	82	3RV2711-1GD10	0.460	130	3RV2811-1GD10	0.460
8	8	—	65	10	104	3RV2711-1HD10	0.460	163	3RV2811-1HD10	0.460
10	10	—	65	10	130	3RV2711-1JD10	0.460	208	3RV2811-1JD10	0.460
12.5	12.5	—	65	10	163	3RV2711-1KD10	0.460	260	3RV2811-1KD10	0.460
15	15	—	65	—	208	3RV2711-4AD10	0.470	286	3RV2811-4AD10	0.470



Innovations Frame Size S0⁴⁾										
20	20	—	50	—	260	3RV2721-4BD10	0.514	325	3RV2821-4BD10	0.516
22	22	—	50	—	286	3RV2721-4CD10	0.516	364	3RV2821-4CD10	0.528

Classic Frame Size S3⁵⁾										
10	10	65	—	20	150	3RV1742-5AD10	0.460	—	—	—
15	15	65	—	20	225	3RV1742-5BD10	0.460	—	—	—
20	20	65	—	20	260	3RV1742-5CD10	0.460	—	—	—
25	25	65	—	20	325	3RV1742-5DD10	0.460	—	—	—
30	30	65	—	20	390	3RV1742-5ED10	0.460	—	—	—
35	35	—	65	20	455	3RV1742-5FD10	0.460	—	—	—
40	40	—	65	20	520	3RV1742-5GD10	0.460	—	—	—
45	45	—	65	20	585	3RV1742-5HD10	0.460	—	—	—
50	50	—	65	20	650	3RV1742-5JD10	0.460	—	—	—
60	60	—	65	20	780	3RV1742-5LD10	0.460	—	—	—
70	70	—	65	10	910	3RV1742-5QD10	0.460	—	—	—



1) 100 % rated value acc. to UL 489 and IEC 60947-2 (100 % rated breaker).

2) Circuit breakers for system protection of motor and non-motor loads. Requires use of separate overload protection for motor applications.

3) Circuit breakers for system and transformer protection according to UL/CSA. Specially designed for transformers with high inrush current.

4) Transverse and lateral auxiliary switches can be ordered separately (see "Mountable accessories").

5) Transverse auxiliary switches must not be mounted. Lateral auxiliary switches can be ordered separately (see "Mountable accessories").

Refer to page 1/21 when using as upstream protection of a Manual Motor Controller or a Manual Motor Controller Suitable for Tap Conductor Protection in Group Installations.

Selection and ordering data

		Type	Version	Width	Height	Classic		Innovations	
					Fits 3RV1 Frame Size	Screw Connection Order No.	Fits 3RV2 Frame Size	Screw Connection Order No.	
Auxiliary switches³⁾									
					mm	Classic	Innovations		
		Transverse auxiliary switches	1 CO 1 NO + 1 NC 2 NO		S3	3RV1901-1D 1) 3RV1901-1E 1) 3RV1901-1F	S00, S0, S2	1), 2) 3RV2901-1D 1) 3RV2901-1E 1) 3RV2901-1F	
		Solid-state compatible, transverse auxiliary switches for use in dusty atmosphere and in electronic circuits with low operating currents	1 CO		S3	3RV1901-1G	S00, S0, S2	3RV2901-1G	
		Covering caps for transverse auxiliary switch slots (pack of 10)			S3	3RV1901-0H	S00, S0, S2	3RV2901-0H	
		Lateral auxiliary switches (side mount)	1 NO + 1 NC 2 NO 2 NC 2 NO + 2 NC	9 9 9 18	S3	1) 3RV1901-1A 1) 3RV1901-1B 1) 3RV1901-1C 3RV1901-1J	S00, S0, S2	1), 2) 3RV2901-1A 1) 3RV2901-1B 1) 3RV2901-1C 3RV2901-1J	
		Width = 9 mm							
Signaling switch⁴⁾									
					mm	Classic	Innovations		
		Signaling switch (side mount) Individual tripped and short-circuit signaling	1 NO + 1 NC each	18	S3	3RV1921-1M	S00, S0, S2	1), 2) 3RV2921-1M	
		Width = 18 mm							
Auxiliary releases⁵⁾									
					mm	Classic	Innovations		
		Undervoltage releases (side mount)	DC 24 V		S3	3RV1902-1AB4	S00, S0, S2	3RV2902-1AB4	
		Width = 18 mm	AC 50 Hz 24 V 110 V — 230 V 400 V 415 V 500 V	AC 60 Hz — 120 V 208 V 240 V 440 V 480 V 600 V	S3	3RV1902-1AB0 3RV1902-1AF0 3RV1902-1AM1 3RV1902-1AP0 3RV1902-1AV0 3RV1902-1AV1 3RV1902-1AS0	S00, S0, S2	1), 2) 3RV2902-1AB0 3RV2902-1AF0 3RV2902-1AM1 1), 2) 3RV2902-1AP0 3RV2902-1AV0 3RV2902-1AV1 3RV2902-1AS0	
		Undervoltage releases with leading	230 V 400 V 415 V	240 V 440 V 480 V			S00, S0, S2	1) 3RV2922-1CP0 1) 3RV2922-1CV0 1), 2) 3RV2922-1CV1	
		auxiliary contacts 2 NO (side mount)	230 V 400 V 415 V	240 V 440 V 480 V	S3	3RV1922-1CP0 3RV1922-1CV0 3RV1922-1CV1	S00, S0, S2	1) 3RV2922-1CP0 1) 3RV2922-1CV0 1), 2) 3RV2922-1CV1	
		Width = 18 mm							
		Shunt releases (side mount)	AC 50/60 Hz 100% ON⁶⁾	AC 50/60 Hz 5 sec ON⁷⁾	S3	3RV1902-1DB0 3RV1902-1DF0 3RV1902-1DP0 3RV1902-1DV0 3RV1902-1DS0	S00, S0, S2	1), 2) 3RV2902-1DB0 1), 2) 3RV2902-1DF0 1) 3RV2902-1DP0 3RV2902-1DV0 3RV2902-1DS0	
		Width = 18 mm	20-24 V 90-110 V 210-240 V 350-415 V 500 V	20-70 V 70-190 V 190-330 V 330-500 V 500 V					

1) This product is also available with spring terminals. The order no. must be changed in the 8th position to a "2": e.g. 3RV1901-2E or 3RV2901-2E

2) This product is also available with ring lug terminals. The order no. must be changed in the 8th position to a "4": e.g. 3RV2901-4E

3) Each motor starter protector can be fitted with one transverse and one lateral auxiliary switch. The lateral auxiliary switch 2 NO + 2 NC is used without transverse auxiliary switch.

4) One signaling switch can be mounted at the left of the motor starter protector. This accessory cannot be used on the 3RV27 and 3RV28 circuit breakers.

5) One auxiliary release can be mounted at the right of each MSP: motor starter protector.

6) The response voltage at the lower limit of the voltage range at 0.85 (Tu=60°C) is valid for 100% (infinite)

7) The response voltage at the lower limit of the voltage range at 0.9 (Tu=60°C) applies for a duty cycle of 5 seconds at AC 50/60 Hz and DC.

3RV Motor Starter Protectors

Accessories

• Revised •
04/20/15

SIRIUS



Accessories for Busbar

Selection and ordering data

Modular spacing	Number of motor starter protectors that can be connected			Rated current I_n at 690 V	For motor starter protectors Size	Order No.	Order quantity	Weight approx.
	Without lateral accessories	Incl. lateral auxiliary switch	With auxiliary trip unit					
mm				A				kg

Three-phase busbar systems for Classic and Innovations

 3RV19 15-1AB	For feeding several motor starter protectors with screw terminals, mounted side-by-side on standard mounting rails, insulated, with touch protection.								
	45	2	--	--	63	S00, S0 ¹⁾²⁾	3RV19 15-1AB	1 unit	0.044
		3				S00, S0 ¹⁾²⁾	3RV19 15-1BB	1 unit	0.071
		4				S00, S0 ¹⁾²⁾	3RV19 15-1CB	1 unit	0.099
 3RV19 15-1BB	55	--	2	--	63	S00, S0 ¹⁾²⁾	3RV19 15-2AB	1 unit	0.048
			3			S00, S0 ¹⁾²⁾	3RV19 15-2BB	1 unit	0.079
 3RV19 15-1CB	63	--	--	2	63	S00, S0 ¹⁾²⁾	3RV19 15-2CB	1 unit	0.111
				4		S00, S0 ¹⁾²⁾	3RV19 15-2DB	1 unit	0.140
 3RV19 15-1DB	55	2	--	--	108	S2 ³⁾	3RV19 35-1A	1 unit	0.150
		3				S2 ³⁾	3RV19 35-1B	1 unit	0.214
		4				S2 ³⁾	3RV19 35-1C	1 unit	0.295
 3RV19 15-1DB	75	--	2	2	108	S2	3RV19 35-3A	1 unit	0.161
			3	3		S2	3RV19 35-3B	1 unit	0.262
			4	4		S2	3RV19 35-3C	1 unit	0.369

1) Not suitable for 3RV11 motor starter protectors with overload relay function. The 3RV1915-5DB connecting piece is available for connecting motor starter protectors from size S0 to size S00.

2) Not suitable for 3RV UL 489 circuit breakers.

3) Auxiliary trip units and lateral auxiliary switches cannot be used in combination.

Version	Modular spacing	For motor starter protectors Size	Order No.	Order quantity	Weight approx.
	mm				kg

Connecting pieces for three-phase busbars

 3RV19 15-5DB	For connecting three-phase busbars for motor starter protectors of size S0 (left) to size S00 (right)		45	S00, S0	3RV19 15-5DB	1 unit	0.042
------------------	---	--	----	---------	---------------------	--------	-------

Conductor cross-section, AWG cables, solid or stranded		Tightening torque	For motor starter protector size	Order No.	Order No.
For 3RV1 MSP	For 3RV2 MSP				
AWG	AWG	Nm		3RV1 Classic¹⁾	3RV2 Innovations²⁾

Three-phase feeder terminals

 3RV29 25-5AB	Connection from top						
	--	10...4	3...4	S00	--	3RV2925-5AB	
 3RV2915-5B	Connection from below³⁾						
	--	10...4	Input: 4, Output: 2 ... 2.5	S00, S0	--	3RV2915-5B	
 3RV2935-5A	Connection from top	14...0	--	4-6	S2	3RV1935-5A	3RV2935-5A

Three-phase feeder terminals for constructing "Type E Starters"

		Classic			Innovations	
 3RV2935-5E	Connection from top					
	--	10...4	3-4	S00	--	3RV2925-5EB
	--	10...4	3-4	S0	--	3RV2925-5EB
	8...0	10...2/0	4.5-6	S2	--	3RV2935-5E

1) Do not mix 3RV1 Classic Accessories with 3RV2 Innovations MSP's

2) Do not mix 3RV2 Innovations Accessories with 3RV1 Classic MSP's


3) This terminal is connected in place of a switch, please take the space requirement into account.

Overview


Accessories for "Self-Protected Combination Motor Controllers (Type E)" according to UL 508/UL 60947-4-1

The 3RV20 motor starter protectors with screw terminals are approved according to UL 508/UL 60947-4-1 as "Self-Protected Combination Motor Controllers (Type E)".

This requires increased clearance and creepage distances (1 inch and 2 inches respectively) at the input side of the device, which are achieved by mounting a terminal block or a phase barrier.

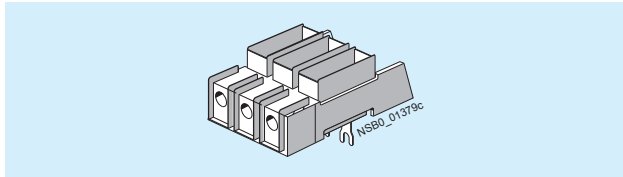

SIRIUS 3RV2928-1H terminal block

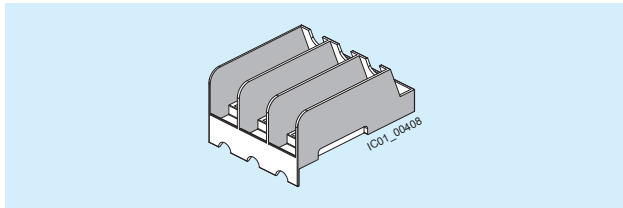

SIRIUS 3RV2938-1K phase barrier

Motor starter protectors/circuit breakers	Size	Essential accessories for "Self-Protected Combination Motor Controllers (Type E)" according to UL 508/UL 60947-4-1
3RV201., 3RV202.	S00/S0	3RV2928-1H terminal block or 3RV2928-1K phase barrier
3RV2031-4B1., 3RV2031-4D.1., 3RV2031-4E1., 3RV2031-4P.1., 3RV2031-4S.1., 3RV2031-4T.1., 3RV2031-4U.1., 3RV2031-4V.1.	S2	--
3RV2031-4J.1., 3RV2031-4K.1., 3RV2031-4R.1., 3RV2031-4W.1., 3RV2031-4X.1., 3RV2032	S2	3RV2938-1K phase barrier

-- No accessories needed

Special threephase infeed terminals are required for constructing "Type E Starters" with an insulated threephase busbar system (see page 1/8).

The 3RV29 infeed system also enables the assembly of "Type E Starters", see page 1/14 onwards.

Note:

According to CSA, these terminal blocks and the phase barriers can be omitted when the device is used as a "Self-Protected Combination Motor Controller (Type E)".

Link modules

Feeders can be easily assembled from single devices with the help of the link modules. The following table shows the different combination options for devices with screw or spring-type terminals.

Combination devices	3RV2 motor starter protectors/circuit breakers	3RT2 contactors; 3RW30, 3RW40 soft starters; 3RF34 solid-state contactors	Link modules	
	Size	Size	Screw terminals	Spring-type terminals

Link modules for connecting switching devices to 3RV2 motor starter protectors/circuit breakers¹⁾

3RT2 contactors with AC or DC coil	S00	S00	3RA1921-1DA00	3RA2911-2AA00
	S0	S00		--
	S2	S2	3RA2931-1AA00	--
3RT2 contactors with AC coil	S0	S0	3RA2921-1AA00	3RA2921-2AA00
	S00	S0		--
3RT2 contactors with DC coil	S0	S0	3RA2921-1BA00	3RA2921-2AA00
	S00	S0		--
3RW30 soft starters	S00	S00	3RA2921-1BA00	3RA2911-2GA00
	S0	S00		--
3RW30/3RW40 soft starters	S0	S0	3RA2921-1BA00	3RA2921-2GA00
	S00	S0		--
	S2 ²⁾	S2 ²⁾	3RA2931-1AA00	--
3RF34 solid-state contactors	S00/S0	S00	3RA2921-1BA00	--

Hybrid link modules for connecting contactors with spring-type terminals to 3RV2 motor starter protectors/circuit breakers with screw terminals³⁾

3RT2 contactors with AC or DC coil	S00	S00	3RA2911-2FA00	--
	S0	S0	3RA2921-2FA00	--

-- Version not possible

¹⁾ The link modules cannot be used for the 3RV2.21-4PA1., 3RV2.21-4FA1., 3RV2.31-4K.1., 3RV2.31-4R.1., 3RV2.32-4K.1., 3RV2.32-4R.1., 3RV27 and 3RV28 motor starter protectors/circuit breakers.

²⁾ To assemble the feeder between a motor starter protector and a soft starter in size S2, the 3RA2932-1AC00 standard mounting rail adapter must be used.

³⁾ The motor starter protector to contactor hybrid link modules cannot be used for the 3RV2.21-4PA1., 3RV2.21-4FA1., 3RV27 and 3RV28 motor starter protectors/circuit breakers. They are only suitable for constructing direct-on-line starters.

Note:

- Link modules can be used in
 - Sizes S00 and S0: up to max. 32 A
 - Size S2: up to max. 65 A
- Hybrid link modules can be used in
 - Sizes S00 and S0: up to max. 32 A

3RV Motor Starter Protectors







Accessories

• Revised •
04/20/15



Mounting accessories

Selection and ordering data

Version	For motor starter protector size	Classic 3RV1/3RT1 Order No.	Innovations 3RV2/3RT2 Order No.	Order Quantity		
Terminal blocks and phase barriers for "Self-Protected Combination Motor Controllers (Type E)" according to UL 508 / UL 60947-4-1						
<p>Note: <i>UL 508 / UL 60947-4-1 demands 1-inch clearance and 2-inch creepage distance at line side for "Combination Motor Controller Type E".</i> The following terminal blocks or phase barriers must be used on 3RV motor starter protectors. The terminal blocks or phase barriers cannot be used in combination with the 3RV19 .5 three-phase busbars. <i>For construction with three-phase busbars, see "Accessories for busbar"</i></p>						
 3RV29 28-1H	Terminal blocks type E					
 3RV29 28-1K	For extended clearance and creepage distances (1 and 2 inch)	S00, S0 S0 S2 S3	— — — 3RT19 46-4GA07	3RV29 28-1H — 3RV29 35-5E —	1 unit 1 unit 1 unit 1 unit	
 3RV29 28-1K	Phase barriers					
 3RT1946-4GA07	For extended clearance and creepage distances (1 and 2 inch)	S00, S0 S2	— —	3RV29 28-1K 3RV29 38-1K	1 unit 1 unit	
Actuating voltage of contactor	Size 3RT contactor	3RV motor starter protector	Classic 3RV1/3RT1 Order No.	Innovations 3RV2/3RT2 Order No.	Order Quantity	
Link modules for motor starter protector to contactor ¹⁾			Screw Terminals			
For mechanical and electrical connection between motor starter protector and contactor with screw terminals.						
Single-unit packaging						
 3RA29 21-1AA00	AC/DC	S00	S00/S0	—	3RA19 21-1DA00	1 unit
	AC	S0	S00/S0	—	3RA29 21-1AA00	1 unit
	AC	S2	S2	3RA19 31-1AA00	3RA29 31-1AA00	1 unit
	AC	S3	S3	3RA19 41-1AA00	—	1 unit
	DC	S0	S00/S0	—	3RA29 21-1BA00	1 unit
	DC	S2	S2	3RA19 31-1BA00	3RA29 31-1AA00	1 unit
	DC	S3	S3	3RA19 41-1BA00	—	1 unit
Multi-unit packaging						
	AC/DC	S00	S00/S0	—	3RA19 21-1D	10 units
	AC	S0	S00/S0	—	3RA29 21-1A	10 units
	DC	S0	S00/S0	—	3RA29 21-1B	10 units
	AC/DC	S2	S2	—	3RA29 31-1A	5 units
For mechanical and electrical connection between motor starter protector and contactor with spring-type terminals.			Spring-type Terminals			
Single-unit packaging						
 3RA29 11-2AA00	AC/DC	S00	S00	—	3RA29 11-2AA00	1 unit
	AC ²⁾	S0	S0	—	3RA29 21-2AA00	1 unit
	DC	S0	S0	—	3RA29 21-2AA00	1 unit
Multi-unit packaging						
	AC/DC	S00	S00	—	3RA29 11-2A	10 units
	AC ²⁾	S0	S0	—	3RA29 21-2A	10 units
	DC	S0	S0	—	3RA29 21-2A	10 units
Spacers						
For compensating height on AC contactors						
	Single-unit packaging	S0	S0	—	3RA29 11-1CA00	1 unit
	Multi-unit packaging	S0	S0	—	3RA29 11-1C	5 units

1) The link modules for motor starter protector to contactor cannot be used for the 3RV2. 21-4PA1., 3RV2. 21-4FA1., 3RV27 and 3RV28 motor starter protectors

2) A spacer for height compensation on AC contactors size S0 is optionally available





Note
 Size S0 link modules can be used up to max. 32 A.
 Size S2 link modules can be used up to 65A max.



Selection and ordering data

Size	Order No.	PU (UNIT, SET, M)	PS*	Weight approx. kg
3RW30, 3RW40 soft starters; 3RF34 solid-state contactors	3RV2 motor starter protectors			

Link modules for motor starter protector to soft starter^{1) 3)} and motor starter protector to solid-state contactor

Connection between motor starter protector and soft starter / solid-state contactor with screw terminals	Order No.	PU (UNIT, SET, M)	PS*	Weight approx. kg																																				
 <p>Single-unit packaging</p> <table border="1"> <tr><td>S00</td><td>S00/S0</td><td>3RA29 21-1BA00</td><td>1</td><td>1 unit</td><td>0.068</td></tr> <tr><td>S0</td><td>S00/S0</td><td>3RA29 21-1BA00</td><td>1</td><td>1 unit</td><td>0.068</td></tr> <tr><td>S2³⁾</td><td>S2</td><td>3RA29 31-1AA00</td><td>1</td><td>1 unit</td><td>0.104</td></tr> </table> <p>Multi-unit packaging</p> <table border="1"> <tr><td>S00</td><td>S00/S0</td><td>3RA29 21-1B</td><td>1</td><td>10 units</td><td>0.068</td></tr> <tr><td>S0</td><td>S00/S0</td><td>3RA29 21-1B</td><td>1</td><td>10 units</td><td>0.068</td></tr> <tr><td>S2³⁾</td><td>S2</td><td>3RA29 31-1A</td><td>1</td><td>5 units</td><td>0.104</td></tr> </table>	S00	S00/S0	3RA29 21-1BA00	1	1 unit	0.068	S0	S00/S0	3RA29 21-1BA00	1	1 unit	0.068	S2 ³⁾	S2	3RA29 31-1AA00	1	1 unit	0.104	S00	S00/S0	3RA29 21-1B	1	10 units	0.068	S0	S00/S0	3RA29 21-1B	1	10 units	0.068	S2 ³⁾	S2	3RA29 31-1A	1	5 units	0.104	Screw terminals 			
S00	S00/S0	3RA29 21-1BA00	1	1 unit	0.068																																			
S0	S00/S0	3RA29 21-1BA00	1	1 unit	0.068																																			
S2 ³⁾	S2	3RA29 31-1AA00	1	1 unit	0.104																																			
S00	S00/S0	3RA29 21-1B	1	10 units	0.068																																			
S0	S00/S0	3RA29 21-1B	1	10 units	0.068																																			
S2 ³⁾	S2	3RA29 31-1A	1	5 units	0.104																																			
 <p>Single-unit packaging</p> <table border="1"> <tr><td>S00</td><td>S00</td><td>3RA29 11-2GA00</td><td>1</td><td>1 unit</td><td>0.038</td></tr> <tr><td>S0</td><td>S0</td><td>3RA29 21-2GA00</td><td>1</td><td>1 unit</td><td>0.072</td></tr> </table> <p>Multi-unit packaging</p> <table border="1"> <tr><td>S00</td><td>S00</td><td>3RA29 11-2G</td><td>1</td><td>10 units</td><td>0.380</td></tr> <tr><td>S0</td><td>S0</td><td>3RA29 21-2G</td><td>1</td><td>10 units</td><td>0.720</td></tr> </table>	S00	S00	3RA29 11-2GA00	1	1 unit	0.038	S0	S0	3RA29 21-2GA00	1	1 unit	0.072	S00	S00	3RA29 11-2G	1	10 units	0.380	S0	S0	3RA29 21-2G	1	10 units	0.720	Spring-type terminals 															
S00	S00	3RA29 11-2GA00	1	1 unit	0.038																																			
S0	S0	3RA29 21-2GA00	1	1 unit	0.072																																			
S00	S00	3RA29 11-2G	1	10 units	0.380																																			
S0	S0	3RA29 21-2G	1	10 units	0.720																																			



¹⁾ The link modules for motor starter protector to soft starter and for motor starter protector to solid-state contactor cannot be used for the 3RV2. 21-4PA1., 3RV2. 21-4FA1., 3RV27 and 3RV28 motor starter protectors.

Note:

*S0 link modules can be used up to max. 32 A.
S2 link modules can be used up to max. 65 A.*

Actuating voltage of contactor	Size	Order No.	PU (UNIT, SET, M)	PS*	Weight approx. kg
	3RT2 contactors	3RV2 motor starter protectors			

Hybrid link modules for motor starter protector to contactor¹⁾

For mechanical and electrical connection between motor starter protector with screw terminals and contactor with spring-type terminals	Order No.	PU (UNIT, SET, M)	PS*	Weight approx. kg																												
 <p>Single-unit packaging</p> <table border="1"> <tr><td>AC/DC</td><td>S00</td><td>S00</td><td>3RA29 11-2FA00</td><td>1</td><td>1 unit</td><td>0.029</td></tr> <tr><td>AC²⁾/DC</td><td>S0</td><td>S0</td><td>3RA29 21-2FA00</td><td>1</td><td>1 unit</td><td>0.056</td></tr> </table> <p>Multi-unit packaging</p> <table border="1"> <tr><td>AC/DC</td><td>S00</td><td>S00</td><td>3RA29 11-2F</td><td>1</td><td>10 units</td><td>0.290</td></tr> <tr><td>AC²⁾/DC</td><td>S0</td><td>S0</td><td>3RA29 21-2F</td><td>1</td><td>10 units</td><td>0.560</td></tr> </table>	AC/DC	S00	S00	3RA29 11-2FA00	1	1 unit	0.029	AC ²⁾ /DC	S0	S0	3RA29 21-2FA00	1	1 unit	0.056	AC/DC	S00	S00	3RA29 11-2F	1	10 units	0.290	AC ²⁾ /DC	S0	S0	3RA29 21-2F	1	10 units	0.560				
AC/DC	S00	S00	3RA29 11-2FA00	1	1 unit	0.029																										
AC ²⁾ /DC	S0	S0	3RA29 21-2FA00	1	1 unit	0.056																										
AC/DC	S00	S00	3RA29 11-2F	1	10 units	0.290																										
AC ²⁾ /DC	S0	S0	3RA29 21-2F	1	10 units	0.560																										
 <p>Spacers²⁾ for compensating the height on AC contactors</p> <table border="1"> <tr><td>Single-unit packaging</td><td>S0</td><td>S0</td><td>3RA29 11-1CA00</td><td>1</td><td>1 unit</td><td>0.001</td></tr> <tr><td>Multi-unit packaging</td><td>S0</td><td>S0</td><td>3RA29 11-1C</td><td>1</td><td>5 units</td><td>0.001</td></tr> </table>	Single-unit packaging	S0	S0	3RA29 11-1CA00	1	1 unit	0.001	Multi-unit packaging	S0	S0	3RA29 11-1C	1	5 units	0.001																		
Single-unit packaging	S0	S0	3RA29 11-1CA00	1	1 unit	0.001																										
Multi-unit packaging	S0	S0	3RA29 11-1C	1	5 units	0.001																										

¹⁾ The hybrid link modules for motor starter protector to contactor cannot be used for the 3RV2. 21-4PA1., 3RV2. 21-4FA1., 3RV27 and 3RV28 motor starter protectors or reversing starters.

²⁾ A spacer for height compensation on AC contactors size S0 is optionally available. See 3RA2911-1CA00

³⁾ To assemble the starter between a motor starter protector and a soft starter in size S2, the 3RA2932-1AC00 standard mounting rail adapter must be used.

Note:

Hybrid link modules can be used up to max. 32 A.



Mounting accessories

Selection and ordering data

Type	Design	For SIRIUS MSP size	Order No.	Order Quantity	Weight approx. (kg)
Isolator module ¹⁾					
3RV2938-1A without padlock 3RV29 28-1A without padlock 	Visible isolating distance for isolating individual motor starter protectors from the network, lockable in isolating position.	S00, S0	3RV29 28-1A	1 unit	0.132
		S2	3RV29 38-1A	1 unit	0.368
Auxiliary terminal, 3 pole					
3RT19 46-4F 	For connection of auxiliary and control cables to the main conductor connections	S3	3RT19 46-4F	1 unit	0.10
Covers					
3RV1 (size S3) with 3RT19 46-4EA1 	Terminal cover for box terminals	Additional touch guard to be fitted at the box terminals (2 units can be mounted per MSP)	S2	3RT29 36-4EA2	1 unit 0.014
			S3	3RT19 46-4EA2	1 unit 0.019
3RV29 28-4AA00 	Terminal cover for cable lug and bar connection	For maintaining the required voltage clearance and as protection against the equipment being touched if distant box terminals are used (2 units can be mounted per MSP)	S3	3RT19 46-4EA1	1 unit 0.03
3RV29 08-4AA10 	Terminal cover for devices with ring lug terminal connection	• Main current level	S00, S0 ²⁾	3RV29 28-4AA00	1 unit 0.01
		• For transverse auxiliary switches	S00, S0 ²⁾	3RV29 08-4AA10	1 unit 0.01
3RV29 08-0P 	Scale cover	For covering the current setting scale. Packing unit: Bag with 10 scale covers.	S00, S0, S2 ³⁾ S3	3RV29 08-0P 3RV19 08-0P	10 units 10 units
Fixing Material					
3RV29 28-0B 	Push-in lugs For screwing the motor starter protector onto mounting plates.	Two units are required for each motor starter protector.	S00, S0	3RV29 28-0B	10 units 0.10
Tools for opening spring-type terminals by hand					
3RA29 08-1A 	Screwdriver For all SIRIUS devices with spring terminals	Length approx. 200 mm, 3.0 mm x 0.5 mm, titanium gray/black partially insulated	S00, S0, S2	3RA29 08-1A	1 unit 0.045


1) The isolator module for size S2 can be used only with 3RV2 motor starter protectors/circuit breakers up to max. 65 A. Similarly, it cannot be used with the transverse auxiliary switch or three-phase busbars.

2) Compatible with 3RV20 motor starter protectors.


3) Compatible with 3RV20, 3RV21, and 3RV24 motor starter protectors.




Selection and ordering data

Type	Details	For SIRIUS MSP size	Order No.	Approx. Wt. (kg)	
Door-coupling rotary operating mechanisms for Classic and Innovations					
3RV29 26-0B 	The door-coupling rotary operating mechanisms consist of a knob, a coupling driver and a 130/330 mm long extension shaft (6 mm x 6 mm). The door-coupling rotary operating mechanisms are designed to degree of protection IP65. The door locking device prevents accidental opening of the control cabinet door in the ON position of the motor starter protector. The OFF position can be locked with up to 3 padlocks.	Extension shaft 130 mm	S00, S0	3RV29 26-0B	0.111
			S2, S3	3RV29 26-0B	0.1
	Door-coupling rotary operating mechanisms (black)	Extension shaft 330 mm	S00, S0	3RV29 26-0K	0.324
			S2, S3	3RV29 26-0K	0.3
	EMERGENCY STOP door-coupling rotary operating mechanisms (red/yellow)	Extension shaft 130 mm	S00, S0	3RV29 26-0C	0.110
			S2, S3	3RV29 26-0C	0.1
	Extension shaft 330 mm	S00, S0	3RV29 26-0L	0.316	
		S2, S3	3RV29 26-0L	0.3	



Door-coupling rotary operating mechanisms for arduous conditions

Type	Details	For SIRIUS MSP size	Order No.	Approx. Wt. (kg)	
Door-coupling rotary operating mechanisms for arduous conditions					
3RV29 26-2C 	The door-coupling rotary operating mechanisms consist of a knob, a coupling driver, an extension shaft of 300 mm length (8 mm x 8 mm), a spacer and two metal brackets, into which the MSP is inserted. The door-coupling rotary operating mechanisms are designed for degree of protection IP 65. The door locking device reliably prevents accidental opening of the control cabinet door in the ON position of the MSP. The OFF position can be locked with up to 3 padlocks. Laterally mountable auxiliary releases and two-pole auxiliary switches can be used. The door-coupling rotary operating mechanisms thus meet the requirements for isolating functions according to IEC 60 947-2.	Extension shaft 300 mm	S00, S0	3RV29 26-2B	1.2
			S2	3RV29 36-2B	1.6
	Door-coupling rotary operating mechanisms (gray)		S3	3RV29 46-2B	1.7
		EMERGENCY STOP door-coupling rotary operating mechanisms (red/yellow)	S00, S0	3RV29 26-2C	1.2
			S2	3RV29 36-2C	1.5
			S3	3RV29 46-2C	1.7

Enclosures and front plates

Type	Details	For SIRIUS MSP size	Order No.	Approx. Wt. (kg)	
Front Plates					
3RV19 23-4B + 3RV19 23-4G 	Molded-plastic front plate with rotary operating mechanism, lockable. For actuation of 3RV motor starter protectors in any enclosure	For actuation of 3RV MSP's in any enclosure, degree of protection IP 55 (front plate)	S00, S0 S2, S3	3RV19 23-4B	0.08
	Molded-plastic front plate with EMERGENCY STOP door-coupling rotary operating mechanisms (red/yellow)	EMERGENCY-STOP operation of 3RV MSP's in any enclosure, degree of protection IP 55	S00, S0 S2, S3	3RV19 23-4E	0.08
	Holders for front plates	Holder is mounted on front plate, MSP size S00 or S0 with or without accessories is snapped in	S00, S0	3RV19 23-4G	0.19

Enclosures for wall mounting ²⁾

Type	Details	For SIRIUS MSP size	Order No.	Approx. Wt. (kg)	
3RV19 23-1CA00 	Molded-plastic enclosure for wall mounting with rotary operating mechanism, lockable, with metric cable gland	Degree of protection IP 55, with N and PE terminals, lockable in 0 position overall width: 54 mm (for switch + lateral auxiliary switch)	S00, S0	3RV19 23-1CA00	0.26
		72 mm (for switch + lateral auxiliary switch + auxiliary release)	S00, S0	3RV19 23-1DA00	0.30
	3RV19 23-1DA01 	Cast aluminum surface-mount enclosure with rotary operating mechanism, lockable, with metric cable gland	Degree of protection IP 65, with PE terminals, ¹⁾ lockable in 0 position overall width: 72 mm (for MSP + lateral auxiliary switch + auxiliary release)	S00, S0	3RV19 23-1DA01
Degree of protection IP 65, with PE terminals, ¹⁾ lockable in 0 position overall width: 72 mm (for MSP + lateral auxiliary switch + auxiliary release)			S00, S0	3RV19 23-1GA01	1.01

1) If required, an additional N terminal can be mounted (e.g. 8WA10 11-1BG11).

2) For S2 versions, see 3RV1933-1DA00 (black) or 3RV1933-1GA00 (red/yellow)

3RV Motor Starter Protectors Accessories

• Revised •
04/2015



3RV29 infeed system

Overview


The 3RV29 infeed system is a convenient means of energy supply and distribution for a group of several motor starter protectors or complete motor starters with a screw or spring-type connection in sizes S00 and S0 (exception: this system cannot be used for the 3RV21, 3RV27 and 3RV28 motor starter protectors/circuit breakers).

The 3RV29 infeed system is approved in accordance with IEC to 500V. It is also UL approved and authorized for "Self-Protected Combination Motor Controller" (Type E starter) as well as for Type F starter (Type E starter + contactor). The system is based on a basic module complete with a lateral incoming unit (three-phase busbar with infeed). This infeed with spring-type terminals is mounted on the right or left depending on the version and can be supplied with a maximum conductor cross-section of 4 AWG (with end sleeve). A basic module has two sockets onto each of which a motor starter protector can be snapped.

Expansion modules are available for extending the system (three-phase busbars for system expansion). The individual modules are connected through an expansion plug.

The electrical connection between the three-phase busbars and the motor starter protectors is implemented through plug-in connectors. The complete system can be mounted on a TH 35 standard mounting rail to EN 60715 and can be expanded as required up to a maximum current carrying capacity of 63 A.

The system is mounted extremely quickly and easily thanks to the simple plug-in technique. Thanks to the lateral infeed, the system also saves space in the control cabinet. The additional overall height required for the infeed unit is only 30 mm. The alternative infeed possibilities on each side offer a high degree of flexibility for configuring the control cabinet: Infeed on left-hand or right-hand side as well as infeed on one side and out-feed on the other side to supply further loads are all possible. A terminal block with spring-type connections in combination with a standard mounting rail enables the integration of not only SIRIUS motor starter protectors but also single-phase, 2-phase and 3-phase components such as 5SY miniature circuit breakers or SIRIUS relay components.

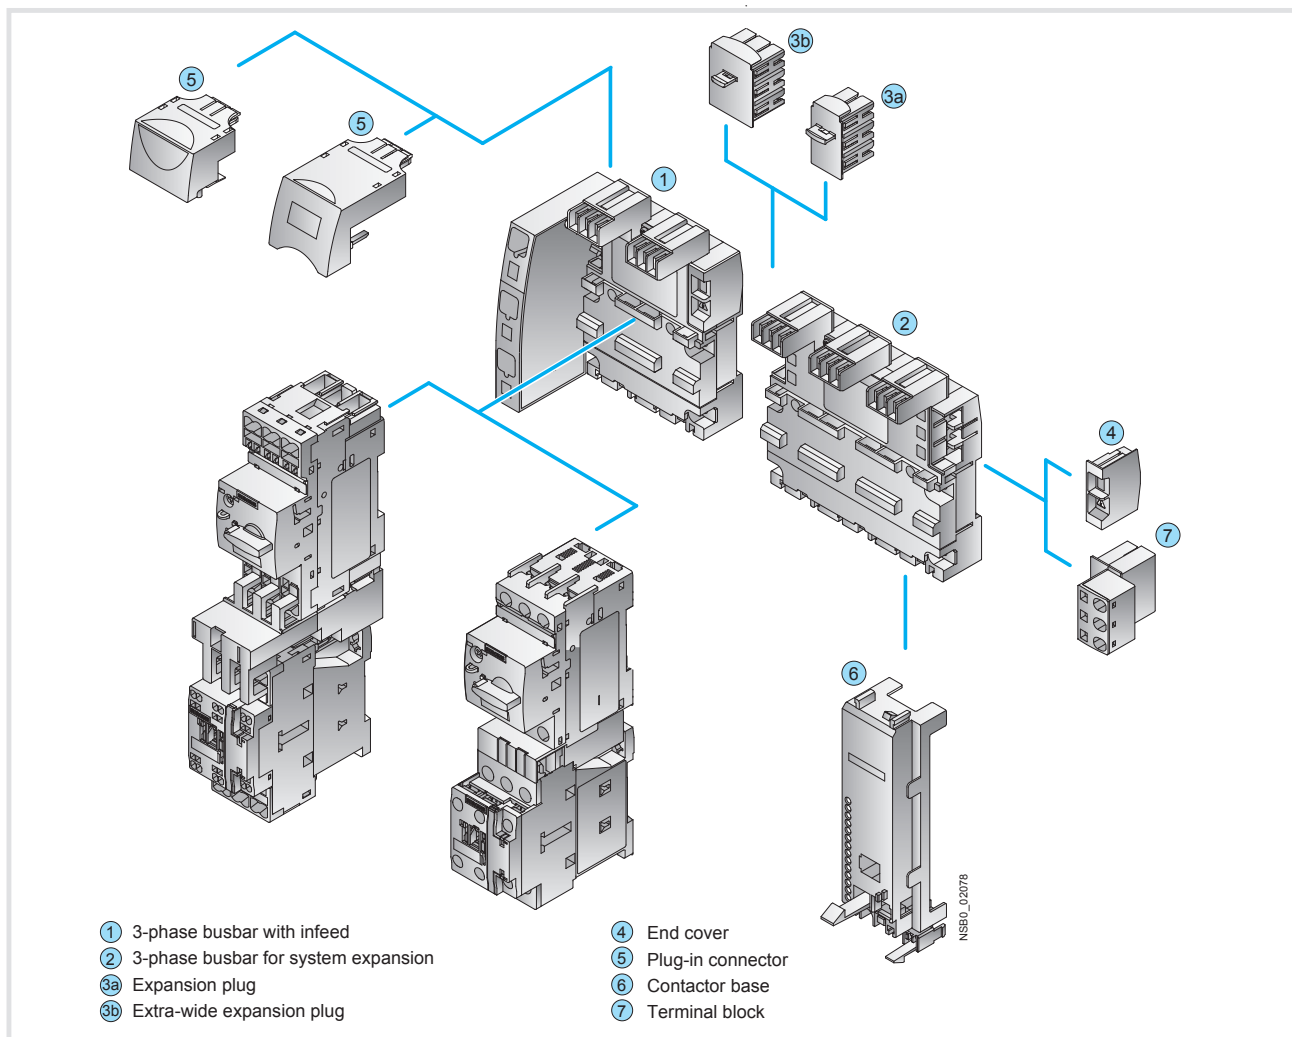

3RV29 infeed system



① Three-phase busbars with infeed

A three-phase busbar with infeed unit is required for connecting the energy supply. This module comprises one infeed module and 2 sockets which each accept one motor starter protector. A choice of two versions with infeed on the left or right is available. The infeed is connected using spring-type terminals. The spring-type terminals permit conductor cross-sections of up to 25 mm² with end sleeves. An end cover is supplied with each module.

② Three-phase busbars for system expansion

The three-phase busbars for system expansion allow the system to be expanded. There is a choice of modules with 2 or 3 sockets. The system can be expanded as required up to a maximum current carrying capacity of 63 A. An expansion plug is supplied with each module.

③^a Expansion plug

The expansion plug is used for electrical connection of adjacent three-phase busbars. The current carrying capacity of this plug equals 63 A. One expansion plug is supplied with each three-phase busbar for system expansion. Additional expansion plugs are therefore only required as spare parts.

③^b Extra-wide expansion plug

The wide expansion plug makes the electrical connection between two three-phase busbars, thus performing the same function as the 3RV29 17-5BA00 expansion plug; the electrical characteristics (e.g. a current carrying capacity of 63 A) are identical.

The 3RV29 17-5E expansion plug is 10 mm wider than the 3RV29 17-5BA00 expansion plug, hence in the plugged state there is a distance of 10 mm between the connected three-phase busbars. This distance can be used to lay the auxiliary current and control current wiring ("wiring duct"). The motor starter protector and contactor can be wired from underneath, which means that the complete cable duct above the system can be omitted.

④ End cover

The end cover is used to cover the three-phase busbar at the open end of the system. This cover is therefore only required once for each system. An end cover is supplied with each three-phase busbar system with infeed. Further end covers are therefore only required as spare parts.

⑤ Plug-in connector

The plug-in connector is used for the electrical connection between the three-phase busbar and the 3RV2 motor starter protector. These plug-in connectors are available in versions for screw or spring-type terminals.

⑥ Contactor base

Motor starters can be assembled in the system using the contactor base. The contactor bases are suitable for contactors sizes S00 and S0 with spring-type and screw terminals and are simply snapped onto the three-phase busbars. Direct-on-line starters and reversing starters are possible. One contactor base is required for direct-on-line starters and two are required for reversing starters.

To assemble motor starters for reversing starters, the contactor bases can be arranged alongside each other (90 mm overall width). In this case the mechanical interlocking of the contactors is possible. The contactor bases are also suitable for soft starters size S00 and S0 with screw connection.

The infeed system is designed for mounting on a 35 mm standard mounting rail with 7.5 mm overall depth. This standard mounting rail gives the contactor base a stable mounting surface to sit on. If standard mounting rails with a depth of 15 mm are used, the spacer connected to the bottom of the contactor base must be knocked out and plugged into the mating piece that is also on the underside. Then the contactor base also has a stable mounting surface. When standard mounting rails with a depth of 7.5 mm are used, the spacer has no function and can be removed.

The link modules are used for direct start motor starters, in which case the use of a contactor base is not absolutely necessary. Motor starter protector and contactor assemblies can then be directly snapped onto the sockets of the three-phase busbars. For starters of size S00 and S0, the corresponding 3RA19 21-1...., 3RA29 11-2...., 3RA29 21-1.... or 3RA29 21-2.... link modules should generally be used.

⑦ Terminal block

The 3RV29 17-5D terminal block enables the integration of not only SIRIUS motor starter protectors but also single-phase, 2-phase and 3-phase components. Using the terminal block the 3 phases can be fed out of the system; which means that single-phase loads can also be integrated in the system. The terminal block is plugged into the slot of the expansion plug and thus enables outfeeding from the middle or end of the infeed system. The terminal block can be rotated through 180° and be locked to the support modules of the infeed system. The 3RV19 17-7B 45 mm standard mounting rail for screwing onto the support plate is available in addition in order to be able to plug the single-phase, 2-phase and 3-phase components onto the infeed system.

3RV Motor Starter Protectors

Accessories

SIRIUS




3RV29 infeed system

Selection and ordering data

Type	Version	For 3RV20, 3RV23, 3RV24 motor starter protectors	Order No.	Standard Pack Quantity	Weight approx.
		Size			kg

Three-phase busbars with infeed



3RV29 17-1A

3-phase busbars with infeed
incl. end cover
3RV29 17-6A

For 2 motor starter protectors with screw connection or spring-type terminals

- With infeed on the left S00, S0
- With infeed on the right S00, S0

3RV29 17-1A

1 unit

0.369

3RV29 17-1E

1 unit

0.369

Three-phase busbars for system expansion



3RV29 17-4A

Three-phase busbars
incl. 3RV29 17-5BA00 expansion plug

For motor starter protectors with screw connection or spring-type terminals

- For 2 motor starter protectors S00, S0
- For 3 motor starter protectors S00, S0

3RV29 17-4A

1 unit

0.229

3RV29 17-4B

1 unit

0.328

Plug-in connectors



3RV29 17-5AA00

Plug-in connectors
to make contact with the motor starter protectors

- For spring-type terminals
 - Single-unit packaging S00¹⁾ S0²⁾
 - Multi-unit packaging S00¹⁾ S0²⁾

Spring-type terminals



3RV29 17-5AA00
3RV29 27-5AA00

1 unit
1 unit

0.046
0.059

3RV29 17-5A
3RV29 27-5A

10 units
10 units

0.046
0.059



3RV29 17-5CA00

- For screw terminals
 - Single-unit packaging S00¹⁾ S0²⁾
 - Multi-unit packaging S00¹⁾ S0²⁾

Screw terminals



3RV29 17-5CA00
3RV19 27-5AA00

1 unit
1 unit

0.029
0.040

3RV29 17-5C
3RV19 27-5A

10 units
10 units

0.029
0.036

Type	Version	For contactors	Order No.	Standard Pack Quantity	Weight approx.
		Size			kg

Contactor bases



3RV29 27-7AA00

Contactor bases
for mounting
direct-on-line or
reversing starters

- Single-unit packaging S00
- S0

3RV29 17-7AA00

1 unit

0.042

3RV29 27-7AA00






1 unit

0.050

¹⁾ I > 14 A, note derating; see the system manual "SIRIUS Innovations", Chapter "Motor Starter Protectors".

²⁾ I > 16 A, note derating; see the system manual "SIRIUS Innovations", Chapter "Motor Starter Protectors".



Type	Version	Order No.	Standard Pack Quantity	Weight approx. kg
Terminal blocks				
 3RV29 17-5D	Terminal blocks For integration of single-phase, two-phase and three-phase components	Single-unit packaging	3RV29 17-5D	1 unit 0.049
45 mm standard mounting rails				
 3RV19 17-7B	45 mm standard mounting rails for mounting onto bus bar adapters	Single-unit packaging	3RV19 17-7B	1 unit 0.261
Extra-wide expansion plugs				
 3RV29 17-5E	Extra-wide expansion plugs as accessory	Single-unit packaging	3RV29 17-5E	1 unit 0.037
Expansion plugs				
 3RV29 17-5BA00	Expansion plugs¹⁾ as spare part	Single-unit packaging	3RV29 17-5BA00	1 unit 0.026
End covers				
 3RV29 17-6A	End covers²⁾ as spare part	Multi-unit packaging	3RV29 17-6A	10 units 0.005

¹⁾ The expansion plug is included in the scope of supply of the 3RV29 17-4 three-phase busbars for system expansion.

²⁾ The end cover is included in the scope of supply of the 3RV29 17-1 three-phase busbars with infeed system.

3RV Motor Starter Protectors

General Data

**3RV up to 100 A
(Domestic applications)**

• Revised •
04/2015



Permissible rated data of devices approved for North America (UL/CSA)

Motor starter protectors of the 3RV2 series are approved for UL/CSA, and according to UL508/UL 60947-4-1 and CSA C22.2 No. 14/CSA C22.2 No. 60947-4-1 they can be used on their own or as load feeders in combination with a contactor.

These motor starter protectors can be used as "Manual Motor Controllers" for "Group Installations", as "Manual Motor Controllers Suitable for Tap Conductor Protection in Group Installations" and as "Self-Protected Combination Motor Controllers" (Type E).

3RV motor starter protectors as "Manual Motor Controllers"

If used as a "Manual Motor Controller", the motor starter protector is always operated in combination with an upstream short-circuit protection device. Approved fuses or a circuit breaker according to UL 489/CSA C22.2 No. 5-02 can be used. These devices must be dimensioned according to the National Electrical Code (UL) or Canadian Electrical Code (CSA).

Approval of the 3RV as a Manual Motor Controller can be found under the following file numbers:

- UL File No. 47705, CCN: NLRV,
- CSA Master Contract 165071, Product Class: 3211 05.

Motor starter protectors	hp rating ¹⁾ for FLA ²⁾ max.		Rated current I_n	240 V AC UL/CSA $I_{bc}^{(3)}$	480 V AC UL/CSA $I_{bc}^{(3)}$	600 V AC UL/CSA $I_{bc}^{(3)}$				
	1-phase	3-phase								
Type	V		A	kA	kA	kA				
Size S00										
3RV2011, 3RV2111, 3RV2311, 3RV2411			0.16 ... 2	65	65	10				
FLA ²⁾ max. 16 A, 600 V	115	1	2	2.5	65	10				
	200	2	3	3.2	65	10				
NEMA size 0	230	2	5	4	65	10				
	460	--	10	5	65	10				
	575/600	--	10	6.3	65	10				
				8	65	10				
			10	65	65	10				
			12.5	65	65	10				
			16	65	65	—				
Size S0										
3RV2021, 3RV2121, 3RV2321, 3RV2421			0.63 ... 3.2	65	65	30				
FLA ²⁾ max. 40 A, 600 V	115	3	5	4	65	30				
	200	5	10	5	65	30				
NEMA size 1	230	7 1/2	10	6.3	65	30				
	460	--	30	8	65	30				
	575/600	--	—	10	65	30				
				12.5	65	65	30			
			16	65	65	10				
			20	65	65	10				
			22	65	65	10				
			25	65	65	10				
Size S2										
3RV2031, 3RV2131, 3RV2331, 3RV2032, 3RV2332			14	3RV2031	3RV2032	3RV2031	3RV2032	3RV2031	3RV2032	
FLA ²⁾ MAX. 65A 600V	115/120	5	10	17	65	100	65	100	25	25
	200/208	10	20	20	65	100	65	100	25	25
NEMA size 2	230/240	15	25	25	65	100	65	100	25	25
	460/480	—	50	32	65	100	65	100	22	22
	575/600	—	60	36	65	100	65	100	22	22
				40	65	100	65	100	22	22
			45	65	100	65	100	22	22	
			52	65	100	65	100	22	22	
			59	65	100	65 ^{a)}	100 ^{a)}	20 ^{a)}	20	
			65	65	100	65 ^{b)}	100 ^{b)}	20 ^{a)}	20	
Size S3										
3RV10 41/3RV10 42, 3RV11 42, 3RV13 41/3RV13 42			16	65	65	30				
FLA ²⁾ max. 99 A, 600 V	115	7 1/2	--	20	65	30				
	200	20	30	25	65	30				
NEMA size 3	230	20	40	32	65	30				
	460	--	75	40	65	30				
	575/600	--	100	50	65	30				
				63	65	65	30			
			75	65	65	30				
			90	65	65	10				
			100	65	65	10				

¹⁾ hp rating = Power rating in horse power (maximum motor rating).
²⁾ FLA = Full Load Amps/Motor full load current.
³⁾ Complies with "short-circuit breaking capacity" according to UL/CSA.



3RV motor starter protectors as "Manual Motor Controllers Suitable for Tap Conductor Protection in Group Installations"

The application as "Manual Motor Controllers Suitable for Tap Conductor Protection in Group Installations" is only available from UL.

CSA does not recognize this approval! When the motor starter protector is used as a "Manual Motor Controller Suitable for Tap Conductor Protection in Group Installations", it must always be combined with upstream short-circuit protection. As short-circuit-protection device, approved fuses or a motor starter

protector according to UL 489 can be used.

These devices must be dimensioned according to the National Electrical Code.

The 3RV motor starter protectors are approved as "Manual Motor Controllers Suitable for Tap Conductor Protection in Group Installations" under the following file number:

- UL File No. 47705, CCN: NLRV.

Motor starter protectors	hp rating ¹⁾ for FLA ²⁾ max.		Rated current I_n A	240 V AC	Up to 480Y/277V AC	Up to 600Y/347V AC	
	1-phase	3-phase		UL I_{bc} ³⁾ kA	UL I_{bc} ³⁾ kA	UL I_{bc} ³⁾ kA	
Type	V		A	kA	kA	kA	
Size S00							
3RV20 11							
FLA ²⁾ max. 16 A, 480 Y / 277 V	115/120	1	2	0.16 ... 0.8	65	65	10
NEMA size 0	200/208	2	3	1	65	65	10
	230/240	2	5	1.25	65	65	10
	460/480	--	10	2	65	65	10
	575/600	--	10	2.5	65	65	10
				3.2	65	65	10
				4	65	65	10
				5	65	65	10
				6.3	65	65	10
				8	65	65	10
				16	65	65	—
Size S0							
3RV20 21							
FLA ²⁾ max. 25 A, 480 Y / 277 V 12.5 A, 600 V	115/120	2	5	0.63 ... 1.6	65	65	30
NEMA size 1	200/208	3	7.5	2	65	65	30
	230/240	3	10	2.5	65	65	30
	460/480	3	20	3.2	65	65	30
	575/600	—	—	4	65	65	30
				5	65	65	30
				6.3	65	65	30
				8	65	65	30
				10	65	65	30
				12.5	65	65	30
				25	65	65	—
				32	50	50	—
Size S2							
3RV2031, 3RV2032, 3RV2431							
FLA ²⁾ MAX. 65A 600V	115/120	5	10	14	65	100	25
NEMA size 2	200/208	10	20	17	65	100	25
	230/240	15	25	20	65	100	25
	460/480	—	50	25	65	100	25
	575/600	—	60	32	65	100	25
				36	65	100	25
				40	65	100	22
				45	65	100	22
				52	65	100	22
				59	65	100	20
				65	65	100	20
					30	42	25
					30	42	25
Size S3							
3RV10 4.							
FLA ²⁾ max. 100 A, 480 V 75 A, 600 V	115/120	7 1/2	--	16	65	65	30
NEMA size 3	200/208	20	30	20	65	65	30
	230/240	20	40	25	65	65	30
	460/480	--	75	32	65	65	30
	575/600	--	75	40	65	65	30
				50	65	65	30
				63	65	65	30
				75	65	65	30
				90	65	65	--
				100	65	65	--

¹⁾ hp rating = Power rating in horse power (maximum motor rating).

²⁾ FLA = Full Load Amps/Motor full load current.

³⁾ Complies with "short-circuit breaking capacity" according to UL.

3RV Motor Starter Protectors

General Data

**3RV up to 100 A
(Domestic applications)**

• Revised •
04/2015



3RV motor starter protectors as "Self-Protected Combination Motor Controllers (Type E)"

UL 508/UL 60947-4-1 approval demands 1-inch clearance and 2-inch creepage distance at line side for "Self-Protected Combination Motor Controller Type E".

Therefore, 3RV20 motor starter protectors of sizes S00 to S2 are approved according to UL 508/UL 60947-4-1 in combination with the terminal blocks listed below.

CSA does not require these extended clearances and creepage distances. According to CSA, these terminal blocks can be omitted

when the device is used as a "Self-Protected Combination Motor Controller".

The 3RV20 motor starter protectors are approved as "Self-Protected Combination Motor Controllers" under the following file numbers:

- UL File No. E156943, CCN: NKJH
- CSA Master Contract 165071, Product Class: 3211 08

Motor starter protectors		hp rating ¹⁾ for FLA ²⁾ max.		Rated current I _n A	Up to 240 V AC	Up to 480 Y/277 V AC	Up to 600 Y/347 V AC
Type	V	1-phase	3-phase		UL/CSA I _{bc} ³⁾ kA	UL/CSA I _{bc} ³⁾ kA	UL/CSA I _{bc} ³⁾ kA
Size S00							
3RV2011 + 3RV29 28-1H⁴⁾							
FLA ²⁾ max. 16 A	115	1	2	0.16 ... 2	65	65	10
480 V	200	2	3	2.5	65	65	10
NEMA size 0	230	2	5	3.2	65	65	10
	230	—	10	4	65	65	10
	575/600	—	10	5	65	65	10
				6.3	65	65	10
				8	65	65	10
				10	65	65	10
				12.5	65	65	10
				16	65	65	—
Size S0							
3RV2021 + 3RV29 28-1H⁴⁾							
FLA ²⁾ max.	115	2	5	0.63 ... 1.6	65	65	30
25 A, 480 V	200	3	7.5	2	65	65	30
12.5 A, 600 V	230	3	10	2.5	65	65	30
NEMA size 1	460	—	20	3.2	65	65	30
	575/600	—	—	4	65	65	30
				5	65	65	30
				6.3	65	65	30
				8	65	65	30
				10	65	65	30
				12.5	65	65	30
				16	65	65	—
				20	65	65	—
				22	65	65	—
				25	65	65	—
				32	50	50	—
Size S2							
3RV2031 + 3RV2938-1K⁴⁾, 3RV2032 + 3RV2938-1K⁴⁾							
FLA ²⁾ MAX. 65A	115/120	5	10	14	65	100	25
600V	200/208	10	20	17	65	100	25
NEMA size 2	230/240	15	25	20	65	100	25
	460/480	—	50	25	65	100	25
	575/600	—	60	32	65	100	25
				36	65	100	25
				40	65	100	22
				45	65	100	22
				52	65	100	22
				59	Inquire for data	Inquire for data	Inquire for data
				65	Inquire for data	Inquire for data	Inquire for data
Size S3							
3RV1041 + 3RT1946-4GA07⁴⁾							
FLA ²⁾ max.	115	10	—	16	65	65	30
100 A, 480 V	200	20	30	20	65	65	30
75 A, 600 V	230	20	40	25	65	65	30
NEMA size 3	460	—	75	32	65	65	30
	575/600	—	75	40	65	65	30
				50	65	65	30
				63	65	65	30
				75	65	65	30
				90	65	65	—
				100	65	65	—
Ratings of the auxiliary switches and alarm switches					Lateral auxiliary switch with 1 NO + 1 NC, 2 NO, 2 NC, 2 NO + 2 NC and signalling switch	Transverse auxiliary switch with 1 changeover contact	Transverse auxiliary switch with 1 NO + 1 NC, 2 NO
Max. rated voltage	• to NEMA Ⓞ • to NEMA Ⓢ	AC V	600	600		250	250
Uninterrupted current		A	10	10	5	2.5	2.5
Breaking capacity			A600 Q300	A600 Q300	B600 R300	C300 R300	C300 R300

1) hp rating = Power rating in horse power (maximum motor rating).

2) FLA = Full Load Amps/Motor full load current.

3) Complies with "short-circuit breaking capacity" according to UL/CSA.

4) Not required for CSA.



3RV17/27 and 3RV18/28 circuit breakers

These circuit breakers are approved according to UL 489 and CSA C22.2 No. 5-02 for 100 % rated current (100 % rated breaker). They can be used therefore as upstream short-circuit protective devices for "Manual Motor Controllers" and "Manual Motor Controllers Suitable for Tap Conductor Protection in Group Installations".

The 3RV17/27 and 3RV18/28 circuit breakers are approved under the following file numbers:

- UL File No. E235044, CCN: DIVQ,
- CSA Master Contract 165071, Product Class: 1432 01.

Circuit breakers	Rated current I_n	240 V AC UL/CSA $I_{bc}^{1)}$ kA	480 Y/277 V AC UL/CSA $I_{bc}^{1)}$ kA	480 V AC UL/CSA $I_{bc}^{1)}$ kA	600 Y/347 V AC UL/CSA $I_{bc}^{1)}$ kA
Type	A				
Size S00/S0					
3RV27 11 / 3RV28 11	0.16 ... 1.25	65	65	--	10
3RV27 21 / 3RV28 21	1.6	65	65	--	10
	2	65	65	--	10
	2.5	65	65	--	10
	3.2	65	65	--	10
	4	65	65	--	10
	5	65	65	--	10
	6.3	65	65	--	10
	8	65	65	--	10
	10	65	65	--	10
	12.5	65	65	--	10
	15	65	65	--	--
	20	50	50	--	--
	22	50	50	--	--
Size S3					
3RV17 42	10	65	65	65	20
	15	65	65	65	20
	20	65	65	65	20
	25	65	65	65	20
	30	65	65	65	20
	35	65	65	--	20
	40	65	65	--	20
	45	65	65	--	20
	50	65	65	--	20
	60	65	65	--	20
	70	65	65	--	10

1) Complies with "short-circuit breaking capacity" according to UL.

3RV Motor Starter Protectors

General Data

3RV up to 100 A
(Export applications)

SIRIUS



Technical specifications

Short-circuit breaking capacity I_{cu} , I_{cs} acc. to IEC 60947-2

This table shows the rated ultimate short-circuit breaking capacity I_{cu} and the rated service short-circuit breaking capacity I_{cs} of the 3RV motor starter protectors with different inception voltages dependent of the rated current I_n of the motor starter protectors.

Motor starter protector infeed is permissible at the upper or lower terminals without restricting the rated data. If the short-circuit current at the place of installation exceeds the rated short-circuit breaking capacity of the motor starter protector as specified in the table, a back-up fuse is required. Alternatively, a

motor starter protector with a limiter function can be connected upstream.

The maximum rated current for the back-up fuse is specified in the tables. The rated ultimate short-circuit breaking capacity then applies as specified on the fuse.

Fuseless construction

Motor starter protector contactor combinations for short-circuit currents up to 50 kA can be ordered in the form of fuseless load feeders according to Chapter 6.

Motor starter protectors/circuit breakers	Rated current I_n	Up to 240 V AC ¹⁾			Up to 400 V ¹⁾ /415 V AC ²⁾			Up to 440 V ¹⁾ /460 V AC ²⁾			Up to 500 V ¹⁾ /525 V AC ²⁾			Up to 690 V AC ¹⁾		
		I_{cu}	I_{cs}	Max. fuse (gL/gG)	I_{cu}	I_{cs}	Max. fuse (gL/gG) ³⁾	I_{cu}	I_{cs}	Max. fuse (gL/gG) ³⁾	I_{cu}	I_{cs}	Max. fuse (gL/gG) ³⁾	I_{cu}	I_{cs}	Max. fuse (gL/gG) ³⁾⁴⁾
Type	A	kA	kA	A	kA	kA	A	kA	kA	A	kA	kA	A	kA	kA	A
Size S00																
3RV2.1	0.16 ... 1	100	100	°	100	100	°	100	100	°	100	100	°	100	100	°
	1.25; 1.6	100	100	°	100	100	°	100	100	°	100	100	°	100	100	°
	2; 2.5	100	100	°	100	100	°	100	100	°	100	100	°	10	10	25
	3.2; 4	100	100	°	100	100	°	50	10	°	100	100	°	10; 6	10; 4	32
	5; 6.3	100	100	°	100	100	°	50	10	°	100	100	°	6	4	32
	8	100	100	°	50	12.5	°	50	50	63	42	42	63	6	4	50
	10	100	100	°	50	12.5	°	50	50	80	42	42	63	6	4	50
	12	100	100	°	50	12.5	°	50	50	80	42	42	80	4	4	63
	16	100	100	°	55	30	100	50	10	80	10	5	80	4	4	63
Size S0																
3RV2.2, 3RV27 11, 3RV28 11	16	100	100	°	55	25	100	50	10	80	10	5	80	4	2	63
	20	100	100	°	55	25	125	50	10	80	10	5	80	4	2	63
	22	100	100	°	55	25	125	50	10	100	10	5	80	4	2	63
	25	100	100	°	55	25	125	50	10	100	10	5	80	4	2	63
	28	100	100	°	55	25	125	30	10	125	10	5	100	4	2	100
	32	100	100	°	55	25	125	30	10	125	10	5	100	4	2	100
	36	100	100	°	20	10	125	12	8	125	6	3	100	3	2	100
	40	100	100	°	20	10	125	12	8	125	6	3	100	3	2	100
Size S2																
3RV1.3	16	100	100	°	50	25	100	50	25	100	12	6	63	5	3	63
	20	100	100	°	50	25	100	50	25	100	12	6	80	5	3	63
	25	100	100	°	50	25	100	50	15	100	12	6	80	5	3	63
	32	100	100	°	50	25	125	50	15	125	10	5	100	4	2	63
	40; 45	100	100	°	50	25	160	50	15	125	10	5	100	4	2	63
	50	100	100	°	50	25	160	50	15	125	10	5	100	4	2	80
Size S3																
3RV1.41	40	100	100	°	50	25	125	50	20	125	12	6	100	6	3	63
	50	100	100	°	50	25	125	50	20	125	12	6	100	6	3	80
	63	100	100	°	50	25	160	50	20	160	12	6	100	6	3	80
	75	100	100	°	50	25	160	50	20	160	8	4	125	5	3	100
	90; 100	100	100	°	50	25	160	50	20	160	8	4	125	5	3	125
Size S3, with increased switching capacity																
3RV1.42 / 3RV17 42⁵⁾	16/10	100	100	°	100	50	°	100	50	°	30	15	80	12	7	63
	20/15	100	100	°	100	50	°	100	50	°	30	15	80	12	7	63
	25/20	100	100	°	100	50	°	100	50	°	30	15	80	12	7	63
	32/25	100	100	°	100	50	°	100	50	°	22	11	100	12	7	63
	40/30	100	100	°	100	50	°	100	50	°	18	9	160	12	6	80
	50/35 ... 40	100	100	°	100	50	°	100	50	°	15	7.5	160	10	5	100
	63/45 ... 50	100	100	°	100	50	°	70	50	200	15	7.5	160	7.5	4	100
	75/60	100	100	°	100	50	°	70	50	200	10	5	160	6	3	125
	90/70	100	100	°	100	50	°	70	50	200	10	5	160	6	3	160
	100/--	100	100	°	100	50	°	70	50	200	10	5	160	6	3	160

Short-circuit resistant up to at least 50 kA

° No back-up fuse required, since short-circuit resistant up to 100 kA

1) 10 % overvoltage.

2) 5 % overvoltage.

3) Back-up fuse only required if the short-circuit current at the place of installation > I_{cu} .

4) Alternatively, fuseless limiter combinations for 690 V AC can also be used.

5) The values for the 3RV17 42 circuit breakers have been tested only up to 400 V/415 V AC; values > 440 V AC on request.



Short-circuit breaking capacity I_{cuIT} in the IT system (IT network) according to IEC 60947-2

3RV motor starter protectors are suitable for operation in IT systems. Values valid for triple-pole short-circuit are I_{cu} up to I_{cs} . In case of double ground fault on different phases at the input and output side of a motor starter protector, the special short-circuit breaking capacity I_{cuIT} applies. The specifications in the table below apply to 3RV motor starter protectors.

In the colored areas, I_{cuIT} is 100 kA, or in some ranges it is 50 kA. Therefore the motor starter protectors are short-circuit resistant in these ranges.

If the short-circuit current at the place of installation exceeds the rated short-circuit breaking capacity of the motor starter protector as specified in the table, a back-up fuse is required. The maximum rated current for the back-up fuse is specified in the tables. The rated short-circuit breaking capacity then applies as specified on the fuse.

Motor starter protectors	Rated current I_n	Up to 240 V AC ¹⁾		Up to 400 V ¹⁾ /415 V AC ²⁾		Up to 500 V ¹⁾ /525 V AC ²⁾		Up to 690 V AC ¹⁾	
		I_{cuIT}	Max. fuse (gL/gG) ³⁾	I_{cuIT}	Max. fuse (gL/gG) ³⁾⁴⁾	I_{cuIT}	Max. fuse (gL/gG) ³⁾	I_{cuIT}	Max. fuse (gL/gG) ³⁾
Type	A	kA	A	kA	A	kA	A	kA	A
Size S00									
3RV20, 3RV26 11-0BD10	0.16 ... 0.63 0.8; 1 1.25; 1.6 2; 2.5 3.2; 4 5; 6.3 8; 10 12.5 16	100 100 100 100 100 100 100 100 55	° ° ° ° ° ° ° ° 80	100 100 100 8;4 4 4 4 4	° ° ° 25 32 32:50 50 63 63	On request	On request	On request	On request
Size S0									
3RV2. 2	16 20 22 25 28 32 36 40	55 55 55 55 55 55 20 20	80 80 80 80 80 80 80 80	4 4 4 4 2 2 2 2	63 63 63 63 63 63 63 63	On request	On request	On request	On request
Size S2									
3RV1. 3	16 20 25 32 40 ... 50	50 50 50 50 50	100 125 125 125 160	8 8 8 6 6	100 100 100 125 125	6 6 6 4 4	80 80 80 100 100	5 5 5 3 3	63 63 63 80 80
Size S3									
3RV1. 41	40 50 63 75 90; 100	50 50 50 50 50	125 125 160 160 160	10 8 6 5 5	63 80 80 100 125	5 3 3 2 2	50 63 63 80 100	5 3 3 2 2	50 63 63 80 100
Size S3, with increased switching capacity									
3RV1. 42	16 20 25 32 40 50 63 75 90 100	100 100 100 100 100 100 100 100 100 100	° ° ° ° ° ° ° ° ° °	12 12 12 12 12 10 7.5 6 6 6	63 63 63 63 80 100 100 125 160 160	6 6 6 6 6 4 4 3 3 3	50 50 50 50 63 80 80 100 125 125	6 6 6 6 6 4 4 3 3 3	50 50 50 50 63 80 80 100 125 125

Short-circuit resistant up to at least 50 kA

° No back-up fuse required, since short-circuit resistant up to 100 kA

1) 10 % overvoltage.

2) 5 % overvoltage.

3) Back-up fuse only required, if short-circuit current at the place of installation > I_{cuIT} .

4) Alternatively, fuseless limiter combinations for 690 V AC can also be used.

3RV Motor Starter Protectors

General Data

3RV
up to 100 A

• Revised •
04/2015

SIRIUS




Technical data

Rules for mounting motor starter protectors/circuit breakers

When mounting MSP's, the following clearance must be maintained to grounded or live parts.


SIRIUS MSP			Clearance to grounded or live parts		
Type	size		Y mm	X mm	at the side Z mm
3RV2.1	S00	up to 690 V	30	70	9
3RV2. 2	S0	up to 500 V up to 690 V	30 50 ¹⁾	90 90	9 30
3RV2. 3	S2	up to 690 V	50	140	10
3RV1. 4	S3	up to 240 V	50	167	10
		up to 440 V	70	167	10
		up to 500 V	110	167	10
		up to 690 V	150	167	30
3RV17 42	S3	up to 240 V up to 400 V	90 90	167 167	10 10

Minimum clearance between MSP's and grounded or live parts

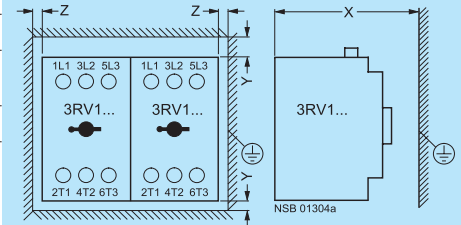

1) Up to and including the setting range of 32 A. For the 36/40 A setting range the clearance is 70 mm.

Standard mounting for S0, S2 and S3

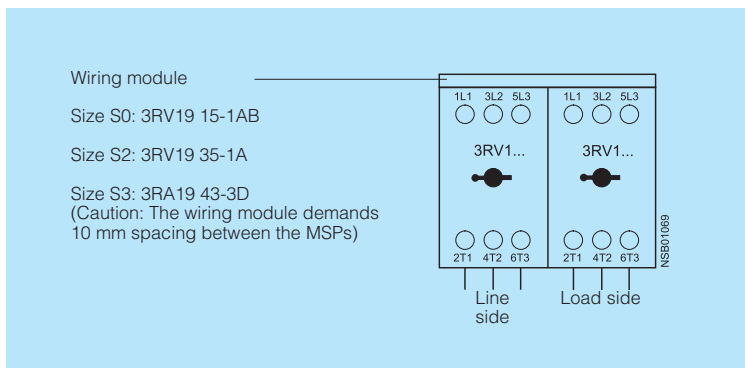



General technical specifications

Type		3RV2. 1	3RV2. 2	3RV1. 3	3RV1. 4	3RV27	3RV17 42	3RV28
Standards		Yes						
• IEC 60947-1, EN 60947-1 (VDE 0660 Part 100)		Yes						
• IEC 60947-2, EN 60947-2 (VDE 0660 Part 101)		Yes						
• IEC 60947-4-1, EN 60947-4-1 (VDE 0660 Part 102)		No						
• UL 489, CSA C22.2-No.5-02		Yes						
Size		S00	S0	S2	S3	S00 / S0	S3	S00 / S0
Number of poles		3						
Max. rated current $I_{n \max}$ (= max. rated operational current I_{θ})	A	16	40	50	100	22	70	22
Permissible ambient temperature		-50 ... +80						
• Storage/transport	I_n : 0.16 ... 32 A °C	-20 ... +70 ³⁾						
• Operation	I_n : 36 ... 40 A °C	-20 ... +40						
Permissible rated current at inside temperature of control cabinet		100						
• +60 °C	%	87						
• +70 °C	%	87						
Motor starter protectors/circuit breakers inside enclosure		100						
Permissible rated current at ambient temperature of enclosure		87						
• +35 °C	%	100						
• +60 °C	%	87						
Rated operational voltage U_e		690 ⁴⁾						
• Acc. to IEC	V AC	600						
• Acc. to UL/CSA	V AC	600						
Rated frequency	Hz	50/60						
Rated insulation voltage U_i	V	690						
Rated impulse withstand voltage U_{imp}	kV	6						
Utilization categories		A						
• IEC 60947-2 (motor starter protector/circuit breaker)		AC -3						
• IEC 60947-4-1 (motor starter)		--						
Trip classes CLASS	Acc. to IEC 60947-4-1	10		10/20		--		--
DC short-circuit breaking capacity (time constant $t = 5$ ms)		10						
• 1 conducting path 150 V DC	kA	10						
• 2 conducting paths in series 300 V DC	kA	10						
• 3 conducting paths in series 450 V DC	kA	10						
Power loss P_v per motor starter protector/circuit breaker		5	--	--	--	--	--	--
I_n : ... 1.25 A	W	6	--	--	--	--	--	--
I_n : 1.6 ... 6.3 A	W	7	--	--	--	--	--	--
I_n : 8 ... 12 A	W	--	7	--	--	--	--	--
I_n : ... 16 A	W	--	11	--	--	--	--	--
I_n : 20 ... 25 A	W	--	14	--	--	--	--	--
I_n : 28 ... 32 A	W	--	--	12	--	--	--	--
I_n : 36 ... 40 A	W	--	--	15	--	--	--	--
I_n : ... 25 A	W	--	--	20	--	--	--	--
I_n : 32 A	W	--	--	--	20	--	--	--
I_n : 40 ... 50 A	W	--	--	--	--	--	--	--
I_n : ... 63 A	W	--	--	--	20	--	--	--
I_n : 75 and 90 A	W	--	--	--	30	--	--	--
I_n : ... 100 A	W	--	--	--	38	--	--	--
I_n : ... 10 A	W	--	--	--	--	--	8	--
I_n : ... 35 A	W	--	--	--	--	--	12	--
I_n : ... 70 A	W	--	--	--	--	--	21	--
Shock resistance	Acc. to IEC 60068-2-27	g/ms						
		25/11 (square and sine pulse)						
Degree of protection	Acc. to IEC 60529	IP20 ⁵⁾						
Touch protection	Acc. to EN 50274	Finger-saf						
Temperature compensation	Acc. to IEC 60947-4-1	°C						
		-20 ... +60						
Phase failure sensitivity	Acc. to IEC 60947-4-1	Yes						
		No						
Explosion protection – safe operation of motors with "increased safety" type of protection		Yes, for 3RV10/20						
		No						
EC type test certificate number acc. to directive 94/9/EC (ATEX)		On request						
Isolating function	Acc. to IEC 60947-2	Yes						
Main and EMERGENCY-STOP switch characteristics⁵⁾	Acc. to IEC 60204-1 (VDE 0113)	Yes						
Protective separation between main and auxiliary circuits, required for PELV applications	Acc. to EN 60947-1	Yes						
• Up to 400 V + 10 %		Yes						
• Up to 415 V + 5 % (higher voltages on request)		Yes						
Permissible mounting positions		Any, acc. to IEC 60447 start command "I" right-hand side or top						
Mechanical endurance	Operating cycles	100 000	50 000	50 000	100 000	50 000	100 000	100 000
Electrical endurance	Operating cycles	100 000	25 000	25 000	100 000	25 000	100 000	100 000
Max. switching frequency per hour (motor starts)	1/h	15						

For footnotes see page 1/26

For short-circuit breaking capacity I_{cu} , I_{cs} see table of same name.

3RV Motor Starter Protectors

General Data

3RV
up to 100 A

SIRIUS



Conductor cross-sections of main circuit

Type		3RV2.	3RV2. 2	3RV1. 3	3RV1. 4/ 3RV17 42	3RV27 11 3RV28 11
Connection type		⊕ Screw terminals		⊕ Screw terminals with box terminal		
Terminal screw		M3, Pozidriv size 2	M4, Pozidriv size 2	Pozidriv size 2	4 mm Allen screw	M4, Pozidriv size 2
Operating devices	mm	5 ... 6	5 ... 6	--	--	5 ... 6
Prescribed tightening torque	Nm	0.8 ... 1.2	2 ... 2.5	3 ... 4.5	4 ... 6	2.5 ... 3
Conductor cross-sections (1 or 2 conductors connectable)						
• Solid	mm ²	2 x (0.75 ... 2.5) ⁴⁾ , 2 x 4	2 x (1 ... 2.5) ⁴⁾ , 2 x (2.5 ... 10) ⁴⁾	2 x (0.75 ... 16)	2 x (2.5 ... 16)	1 ... 10 max. 2 x 10
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5) ⁴⁾ , 2 x (0.75 ... 2.5) ⁴⁾	2 x (1 ... 2.5) ⁴⁾ , 2 x (2.5 ... 6) ⁴⁾	2 x (0.75 ... 16) 1 x (0.75 ... 25)	2 x (2.5 ... 35) 1 x (2.5 ... 50)	1 ... 16, max. 6 + 16
• Stranded	mm ²	2 x (0.75 ... 2.5) ⁴⁾ 2 x 4	2 x (1 ... 2.5) ⁴⁾ , 2 x (2.5 ... 10) ⁴⁾	2 x (0.75 ... 25) 1 x (0.75 ... 35)	2 x (10 ... 50) 1 x (10 ... 70)	1.5 ... 25 max. 10 + 25
• AWG cables, solid or stranded	AWG	2 x (18 ... 14) 2 x 12 ⁴⁾	2 x (14 ... 10) 2 x (14 ... 8) ⁴⁾	2 x (18 ... 2) 1 x (18 ... 2)	2 x (10 ... 1/0) 1 x (10 ... 2/0)	2 x (14 ... 10)
Ribbon cable conductors (number x width x thickness) mm		--	--	2 x (6 x 9 x 0.8)		--
Removable box terminals ¹⁾						
• With copper bars ²⁾		--	--		18 x 10	--
• With cable lugs ³⁾		--	--		Up to 2 x 70	--
Connection type		⊕ Spring-type terminals ⁵⁾⁶⁾				
Conductor cross-sections (1 or 2 conductors connectable)						
• Solid	mm ²	2 x (0.5 ... 4)	2 x (1 ... 10)			
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 2.5)	2 x (1 ... 6)			
• Finely stranded without end sleeve	mm ²	2 x (0.5 ... 2.5)	2 x (1 ... 6)			
• AWG cables, solid or stranded	AWG	2 x (20 ... 12)	2 x (18 ... 8)			
Max. external diameter of the conductor insulation	mm	3.6	3.6			
Connection type		⊕ Ring terminal lug connections				
Terminal screw		M3, Pozidriv size 2	M4, Pozidriv size 2			
Operating devices	mm	5 ... 6	5 ... 6			
Prescribed tightening torque	Nm	0.8 ... 1.2	2 ... 2.5			
Usable ring terminal lugs	mm	d ₂ = min. 3.2 d ₂ = min. 7.5	d ₂ = min. 4.3 d ₂ = min. 12.2			
• DIN 46234 without insulation sleeve						
• DIN 46225 without insulation sleeve						
• DIN 46237 with insulation sleeve						
• JIS C2805 Type R without insulation sleeve						
• JIS C2805 Type RAV with insulation sleeve						
• JIS C2805 Type RAP with insulation sleeve						

Footnotes for page 1/25:

- ¹⁾ Above +60 °C current reduction.
- ²⁾ The devices must not be mounted side-by-side and they must not be assembled with link modules with contactors. A lateral clearance of 9 mm is required)
- ³⁾ 500 V with molded-plastic enclosure.
- ⁴⁾ Terminal compartment IP00 (exception: 3RV10 11-.2. motor starter protectors with Spring-type terminals degree of protection IP20).
- ⁵⁾ With appropriate accessories.

Footnotes for page 1/26:

- ¹⁾ Cable lug and busbar connection possible after removing the box terminals.
- ²⁾ If bars larger than 12 mm x 10 mm are connected, a 3RT19 46-4EA1 terminal cover is needed to comply with the phase clearance.
- ³⁾ If conductors larger than 25 mm² are connected, a 3RT19 46-4EA1 terminal cover is needed to comply with the phase clearance.
- ⁴⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in the range specified. If identical cross-sections are used, this restriction does not apply.
For corresponding 3RA29 08-1A opening tool see 1/12.
- ⁵⁾ With conductor cross-sections of ≤ 1 mm² an "insulation stop" must be used (see Chapter 2 Contactors).



Technical specifications

Front transverse auxiliary switches

		Switching capacity for different voltages	
		1 CO	1 NO + 1 NC, 2 NO
Rated operational current I_e			
• At AC-15, alternating voltage			
- 24 V	A	4	2
- 230 V	A	3	0.5
- 400 V	A	1.5	--
- 690 V	A	0.5	--
• At AC-12 = I_{th} , alternating voltage			
- 24 V	A	10	2.5
- 230 V	A	10	2.5
- 400 V	A	10	--
- 690 V	A	10	--
• At DC-13, direct voltage L/R 200 ms			
- 24 V	A	1	1
- 48 V	A	--	0.3
- 60 V	A	--	0.15
- 110 V	A	0.22	--
- 220 V	A	0.1	--
Minimum load capacity	V	17	
	mA	1	

Front transverse solid-state compatible auxiliary switches

			Switching capacity for different voltages	
			1 CO	
• Rated operational voltage U_e	Alternating voltage	V	125	
• Rated operational current $I_e/AC-14$	at $U_e = 125$ V	A	0.1	
• Rated operational voltage U_e	Direct voltage L/R 200 ms	V	60	
• Rated operational current $I_e/DC-13$	at $U_e = 60$ V	A	0.3	
Minimum load capacity	V	5		
	mA	1		

Lateral auxiliary switches with signal switch

			Switching capacity for different voltages: Lateral auxiliary switch with 1 NO + 1 NC, 2 NO, 2 NC, 2 NO + 2 NC; signal switch	
Rated operational current I_e				
• At AC-15, alternating voltage				
- 24 V	A	6		
- 230 V	A	4		
- 400 V	A	3		
- 690 V	A	1		
• At AC-12 = I_{th} , alternating voltage				
- 24 V	A	10		
- 230 V	A	10		
- 400 V	A	10		
- 690 V	A	10		
• At DC-13, direct voltage L/R 200 ms				
- 24 V	A	2		
- 110 V	A	0.5		
- 220 V	A	0.25		
- 440 V	A	0.1		
Minimum load capacity	V	17		
	mA	1		

Auxiliary releases

			Undervoltage trip units	Shunt trip units
Power consumption				
• During pick-up				
- AC voltages	VA/W	20.2/13		20.2/13
- DC voltages	W	20		13 ... 80
• During uninterrupted duty				
- AC voltages	VA/W	7.2/2.4		--
- DC voltages	W	2.1		--
Response voltage				
• Tripping	V	0.35 ... 0.7 × U_s		0.7 ... 1.1 × U_s
• Pickup	V	0.85 ... 1.1 × U_s		--
Maximum opening time	ms	20		

3RV Motor Starter Protectors

General Data

SIRIUS



3RV
up to 100 A

Technical data

Short-circuit protection for auxiliary and control circuits

Melting fuses operational class gG	A	10
Miniature circuit breaker , C characteristic	A	6 ¹⁾

¹⁾ Prospective short-circuit current < 0,4 kA.

Conductor cross-sections for auxiliary and control circuits

Connection type

Screw terminals

Terminal screw		M3, Pozidriv size 2
Operating devices	mm	5 ... 6
Prescribed tightening torque	Nm	0.8 ... 1.2
Conductor cross-sections (1 or 2 conductors can be connected)		
• Solid or Stranded	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾
• AWG Cables, solid or stranded	AWG	2 x (18 ... 14) ¹⁾ , 2 x (20 ... 16) ¹⁾

Connection type

Spring-type terminals ²⁾³⁾

Conductor cross-sections (1 or 2 conductors connectable)		
• Solid	mm ²	2 x (0.5 ... 2.5)
• Finely stranded with end sleeve	mm ²	2 x (0.5 ... 1.5)
• Finely stranded without end sleeve (DIN 46228 T1)	mm ²	2 x (0.5 ... 1.5)
• AWG cables, solid or stranded	AWG	2 x (20 ... 14)
Max. external diameter of the conductor insulation	mm	3.6

Connection type

Ring terminal lug connections

Terminal screw		M3, Pozidriv size 2
Operating devices	mm	5 ... 6
Prescribed tightening torque	Nm	0.8 ... 1.2
Usable ring terminal lugs	mm	d ₂ = min. 3.2 d ₃ = min. 7.5
• DIN 46234 without insulation sleeve		
• DIN 46225 without insulation sleeve		
• DIN 46237 with insulation sleeve		
• JIS C2805 Type R without insulation sleeve		
• JIS C2805 Type RAV with insulation sleeve		
• JIS C2805 Type RAP with insulation sleeve		

Terminal block type E

Conductor cross sections
3RT29 28-1H

			Front clamping point connected	Rear clamping point connected	Both clamping points connected	
			Front clamping point	Rear clamping point		
solid	mm ²	1 ... 10	NSB00479	1 ... 10	NSB00480	1 ... 10
finely stranded with end sleeve	mm ²	1 ... 16		1 ... 16		1 ... 10
stranded	mm ²	2.5 ... 25		1.5 ... 25		5 ... 25
AWG cables,	AW	14 ... 3		16 ... 3		16 ... 3
solid and stranded wire	G					
Prescribed tightening torque	Nm	2.5 ... 3				
Terminal screw		M 4		M 4		M 4

Conductor cross sections
3RT19 46-4GA07

4)

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in the range specified. If identical cross-sections are used, this restriction does not apply.

²⁾ With conductor cross-sections of ≤ 1 mm² an "insulation stop" must be used; see "Accessories", "Contactors and Contactor Assemblies".

³⁾ For corresponding 3RA29 08-1A opening tool see page 1/13.

⁴⁾ See MSP 3RV1.4 on page 1/24.

Overview

S00 MSP with laterally mounted undervoltage release with leading auxiliary switch



3RV Motor Starter Protectors (MSP's) are built for a world of applications while meeting the requirements of control users worldwide. Each MSP features a manual ON/OFF switch, a Class 10 adjustable bimetallic overload relay (Class 20 available in the two largest frame sizes), and magnetic trip elements for short circuit protection.

Construction

The motor starter protectors are available in four sizes:

- Size S00 - 3RV201
 Maximum rated current is 16 Amps. Suitable for motors up to 10 hp at 600V. Available in both screw terminal and spring-type terminal versions.
- Size S0 - 3RV202
 Maximum rated current is 40 Amps. Suitable for motors up to 20 hp at 600V. Available in both screw terminal and spring-type terminal versions.

- Size S2 - 3RV103
 Maximum rated current is 50 Amps. Suitable for motors up to 50 hp at 600V.
- Size S3 - 3RV104
 Maximum rated current is 100 Amps. Suitable for motors up to 100 hp at 600V.

Functions

Releases

3RV motor starter protectors are equipped with bimetallic-based, inverse-time delayed overload releases - electromagnetic short-circuit releases.

The overload releases can be set in accordance with the load current. The overcurrent releases are permanently set to a value 13 times the rated current and thus enable trouble-free start-up of motors.

The scale cover can be sealed to prevent unauthorized adjustments to the set current.

Release classes

The release classes of thermally delayed releases are based on the tripping time (t_A) at 7.2 times the operational current in cold state (excerpt from IEC 60 947-4):

- CLASS 10 $2 s < t_A < 10 s$
- CLASS 10 $4 s < t_A < 10 s$
- CLASS 20 $6 s < t_A < 20 s$
- CLASS 30 $9 s < t_A < 30 s$

The release must trip within this time!

Operating mechanisms

S00, S0, S2 and S3 MSP's are actuated via a rotary operating mechanism. If the MSP trips, the rotary operating mechanism switches to the tripped position to indicate this. Before the MSP is reclosed, the rotary operating mechanism must be reset manually to 0 position, in order to prevent the former from closing by mistake before the fault has been cleared.

In the case of MSP's with rotary operating mechanisms, an electrical signal can be output via a signalling switch to indicate that the MSP has tripped.

All operating mechanisms can be locked in 0 position with a padlock (shackle diameter 3.5 to 4.5 mm).

Application

Operating conditions

3RV MSP's are suitable for use in any climate. They are designed for operation in closed rooms under normal conditions (e.g. no dust, corrosive vapours or harmful gases). Suitable enclosures must be provided for installation in dusty or damp rooms.

Motor Protection

3RV MSP's use bimetallic heater elements to provide class 10 or 20 overcurrent protection for both AC and DC motors. The bimetallic heaters sense the motor current directly, so the overloads are insensitive to high frequencies, harmonic waves and sinusoidal currents and voltages.

Each MSP has a fourth bimetallic strip that reacts only to the ambient temperature inside the control panel. This ambient compensation prevents the MSP from nuisance tripping when the panel temperature is higher than the ambient temperature of the motor.

A built-in differential trip bar causes the MSP to trip faster on a phase loss condition, to help reduce motor damage from phase loss.

Magnetic trip elements in each MSP take the device off line when it senses currents of 13 times the maximum FLA dial setting.

3RT1	0	1	1	-	0	A	A	1	0
SIRIUS MSP or Circuit Breaker	Application 0 = Motor Protection 7 = UL 489	Frame Size 3 = S2 4 = S3	Standard		Amperage Range Possible choices listed below see page 1/4-1/7 for an entire listing 0, 1, 4	B through K	Class A = 10	Terminal Type 1 = Screw 2 = Spring Loaded 4 = Ring Lug	Auxiliary Switch
3RV2	0	1	1	-	0	A	A	1	0
SIRIUS Innovations MSP or Circuit Breaker	Application 0 = Motor Protection 7 = UL 489	Frame Size 1 = S00 2 = S0	Standard		Amperage Range Possible choices listed below see page 1/4-1/7 for an entire listing 0, 1, 4	B through K	Class A = 10	Terminal Type 1 = Screw 2 = Spring Loaded 4 = Ring Lug	Auxiliary Switch
3RV1	0	1	1	-	0	A	A	1	0
SIRIUS MSP or Circuit Breaker	Application 0 = Motor Protection 7 = UL 489	Frame Size 3 = S2 4 = S3	Standard		Amperage Range Possible choices listed below see page 1/4-1/7 for an entire listing 0, 1, 4	B through K	Class A = 10 B = 20	Terminal Type 1 = Screw 2 = Spring Loaded	Auxiliary Switch

Note: MPS's and Contactors of the same frame size are made to easily fit together with the use of a link module.



Mounting accessories

Applications:

The 3RV MSP's can be used in a variety of applications:

As a manual starter

All 3RV MSP's are UL listed as Manual Motor Controllers per UL508. This makes them ideal for applications requiring simple manual starting and stopping of motors. A separate short circuit protective device, such as a circuit breaker or fuses, is still required ahead of the MSP. This up-stream protective device should be sized per NEC code, not to exceed 400% of the maximum FLA adjustment dial setting.

As a component in a group installation

A group motor installation indicates multiple motor controllers under one short circuit protective device, such as a circuit breaker. 3RV MSP's have a group installation short-circuit current rating of 65 kA at 480V and up to 30kA at 600V. By using a link module, a 3RT contactor can be directly mounted to the load side of the MSP.

3RV MSP's have been UL tested with and without 3RT contactors for group installation.

As a Self-protected manual combination starter, Type E.

Most 3RV MSP's have also been UL listed as UL508 Type E, Self-protected Manual Combination Starters. This UL listing allows the MSP to be mounted in a manually operated machine without having to add separate short circuit protection upstream.

These devices have a short circuit current rating of 65 kA @ 240V, 480Y/277V and up to 30kA @ 600Y/347V.

Terminals for "Combination Motor Controller Type E" to UL 508

The 3RV MSP for motor protection is approved according to UL 508 as "Combination Motor Controller Type E".

As of July, 2001, UL 508 demands at line-side of the device used for this purpose an increased clearance and creepage distance (1" or 2").

Here, the terminal block 3RV19 28-1H must be used for size S0. The block is simply screwed to the basic unit.

Basic units of size S2 are already compliant with new clearance and creepage distance requirements.

As part of a Combination Motor Controller, Type F

When a 3RT contactor is connected to the load side of a 3RV device that is rated as a "Manual Self-protected Combination Motor Controller, Type E", the assembly can be applied as a "Combination Motor Controller, Type F". This version allows for remote starting and stopping of the motor load.

These assemblies have a short circuit current rating of 65 kA @ 240V, 480Y/277V and up to 30 kA @ 600Y/347V.


As a circuit breaker for export

When exporting to many countries outside of the U.S. and North America, the 3RV can be applied as a thermal magnetic circuit breaker for use in motor branch circuits.


3RV29 28-1K



3RV29 28-1H




3RT19 46-4GA07


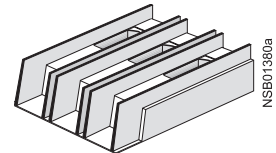


Terminals for "Combination Motor Controller Type E" to UL 508

3RV29 28-1H

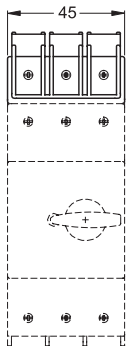

3RT19 46-4GA07

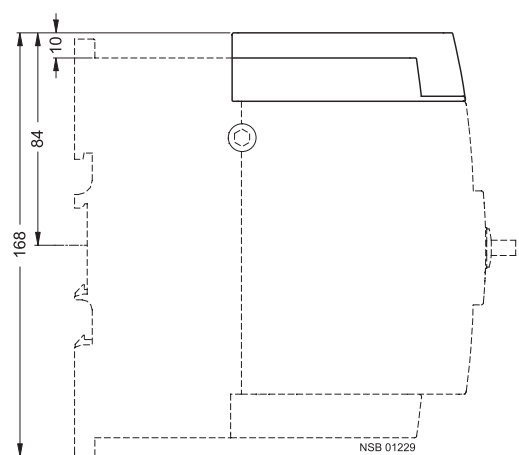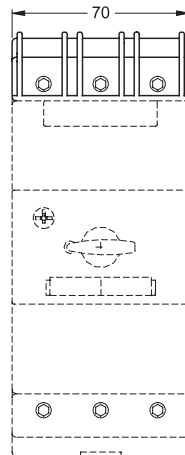



Switching of direct current

3RV motor starter protectors for alternating currents are also suitable for DC switching.

The maximum permissible DC voltage per conducting path must, however, be adhered to. Higher voltages require a series connection with 2 or 3 conducting paths.

Example circuit for size S00 to S3 3RV motor starter protectors

The response values of the overload release remain unchanged; the response values of a short-circuit release increase by approximately 30 % for DC. The example circuits for DC switching can be seen in the table below.

Example circuit for size S00 to S3 3RV motor starter protectors	Maximum permitted DC voltage U_e	Notes
	150 V DC	Three-pole switching, non-grounded system ¹⁾ If there is no possibility of a ground fault, or if every ground fault is rectified immediately (ground-fault monitoring), then the maximum permitted DC voltage can be tripled.
	300 V DC	Two-pole switching, grounded system The grounded pole is always assigned to the individual conducting path, so that there are always 2 conducting paths in series in the event of a ground fault.
	450 V DC	Single-pole switching, grounded system 3 conducting paths in series. The grounded pole is assigned to the unconnected conducting path.

¹⁾ It is assumed that this circuit always provides safe disconnection even in the event of a double ground fault that bridges two contacts.


Design

Mounting

The motor starter protectors are secured in position by snapping them onto 35 mm standard mounting rails according to DIN EN 50 022. A mounting rail with a height of 15 mm is required for S3 MSP's. A 75-mm mounting rail can be used as an alternative here.

S2 and S3 MSP's can also be screwed directly onto a base-plate.

The push-in lugs 3RV29 28-0B are available for screw mounting of S00 and S0 MSP's.

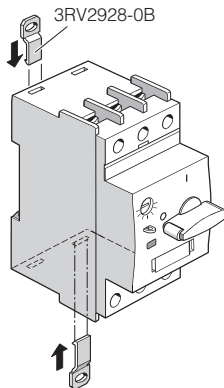

Screw connection

3RV MSP's of sizes S00 and S0 are fitted with terminals with captive screws and clamping pieces, allowing the connection of 2 conductors with different cross-sections.

The box terminals of the S2 and S3 MSP's also enable 2 conductors with different cross-sections to be connected. With the exception of S3 MSP's which are equipped with 4 mm hexagon socket terminal screws, all terminal screws are tightened with a Pozidriv screwdriver size 2.

The box terminals of the S3 MSP's can be removed in order to connect conductors with cable lugs or connecting bars. A terminal cover is available to help prevent contact with shock protection and to ensure that the required clearances and creepage distances are maintained if the box terminals are removed.


Spring-type connection ²⁾

As an alternative to screw terminals, S00 and S0 devices are also available with Spring-type terminal connection.

This screwless Spring-type terminal technique, as known for modular terminal blocks, offers shock-proof and vibration proof connection of conductors.

Devices with Spring-type connection allow independent connection of two conductors per terminal.

MSP with Spring-type terminal connection

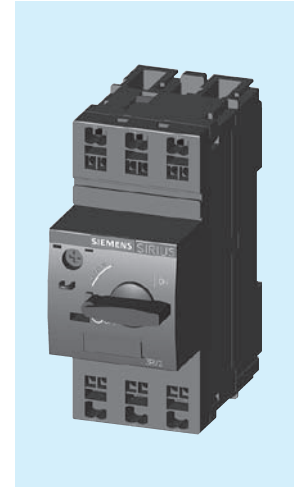

¹⁾ It is assumed that this circuit always provides safe cut-out, even in the event of a double earth fault that bridges two contacts.
²⁾ For notes on Spring-type terminal connection, see section 19.

Characteristics

The time/current characteristic, the current limiting characteristics and the I^2t characteristics were determined in accordance with DIN VDE 0660 or IEC 60 947.

The tripping characteristic of the **inverse-time delayed overload releases** (thermal overload releases or 'a' releases) for DC and AC with a frequency of 0 to 400 Hz also apply to the time/current characteristic.

The characteristics apply to the cold state. At operating temperature, the tripping times of the thermal releases are reduced to approximately 25 %.

Under normal operating conditions, all three poles of the device must be loaded. The three main conducting paths must be connected in series in order to protect single-phase or DC loads.

With 2-pole and 3-pole loading, the maximum deviation in the tripping time for 3 times the setting current and upwards is $\pm 20\%$ and thus in accordance with DIN VDE 0165.


The tripping characteristics for the instantaneous, electromagnetic overcurrent releases

(short-circuit releases, 'n' releases) are based on the rated current I_n that represents the maximum value of the setting range for MSP's with adjustable overload releases. If the current is set to a lower value, the tripping current of the 'n' release is increased by a corresponding factor.

The characteristics of the electromagnetic overcurrent releases apply to frequencies of 50/60 Hz. Appropriate correction factors must be used for lower frequencies up to $16 \frac{2}{3}$ Hz, for higher frequencies up to 400 Hz and for DC.

The printed characteristic curve determined for the MSP relates to a specific setting range. It is, however, also valid as a schematic representation of MSP's with other current ranges.


Typical time/current characteristic of 3RV

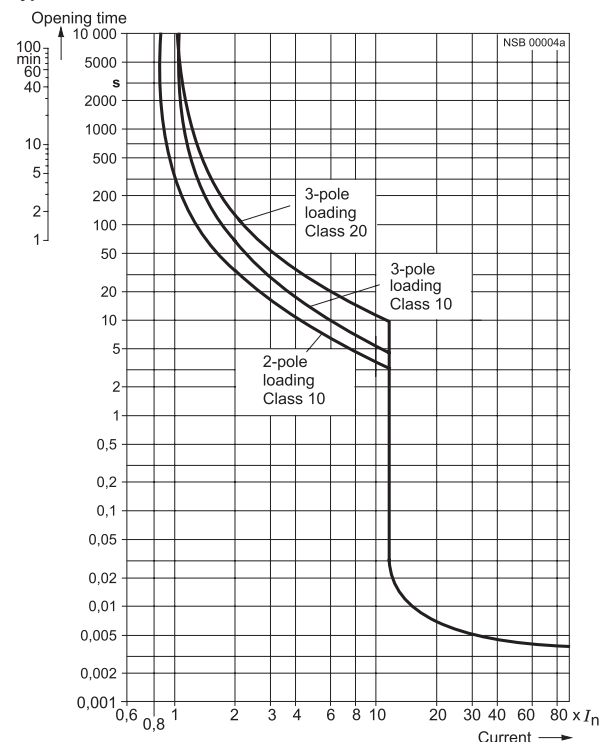

Circuit diagrams

Internal connections

Motor starter protectors 3RV.






Dimension drawings


3RV2 MSP, size S00

3RV20 11

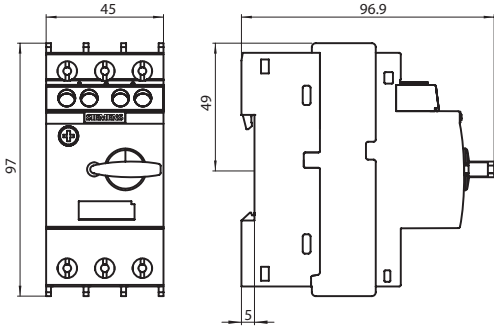


3RV2 MSP, size S0

3RV20 21

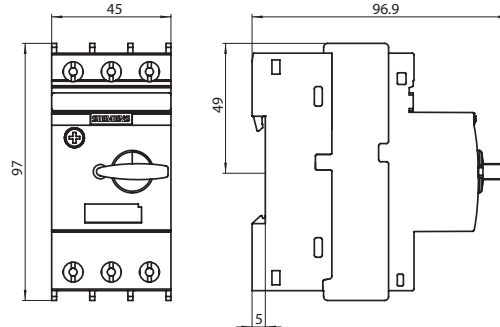


3RV1 MSP, size S2

3RV10 31

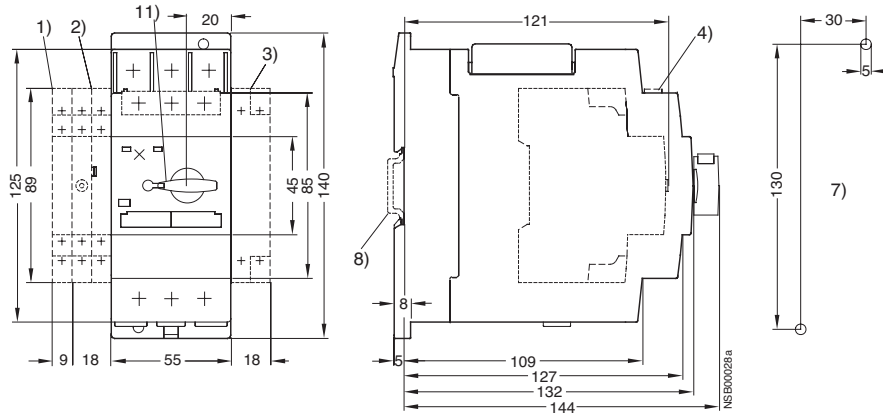

3RV1 MSP, size S3

3RV10 4

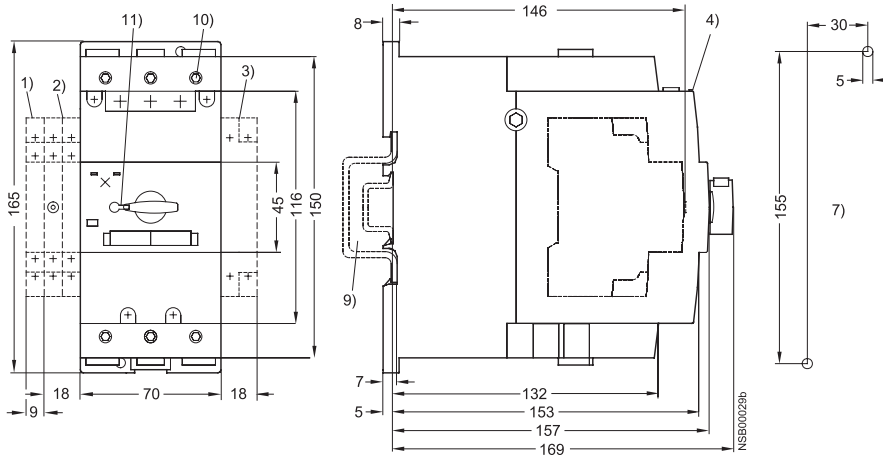

- 1) 2-pole lateral auxiliary switch
- 2) Signalling switch (S0-S3) or lateral auxiliary switch, 4-pole (S00-S3)
- 3) Auxiliary releases
- 4) Transverse auxiliary switch
- 5) Push-in lugs for screw mounting
- 6) Only for undervoltage release with leading auxiliary switch
- 7) Drilling template
- 8) 35 mm standard mounting rail acc. to EN 50 022
- 9) Mounting on 35 mm standard mounting rail, 15 mm high, acc. to EN 50 022 or on 75 mm standard mounting rail acc. to EN 50 023
- 10) 4 mm hexagon socket screw
- 11) Lockable in 0 position with shackle diameter 3.5 to 4.5 mm

3RV Motor Starter Protectors


General Data

3RV
up to 100 A




3RV27 and 3RV28 circuit breakers, size S00, S0 and S3

3RV27 21, 3RV28 21

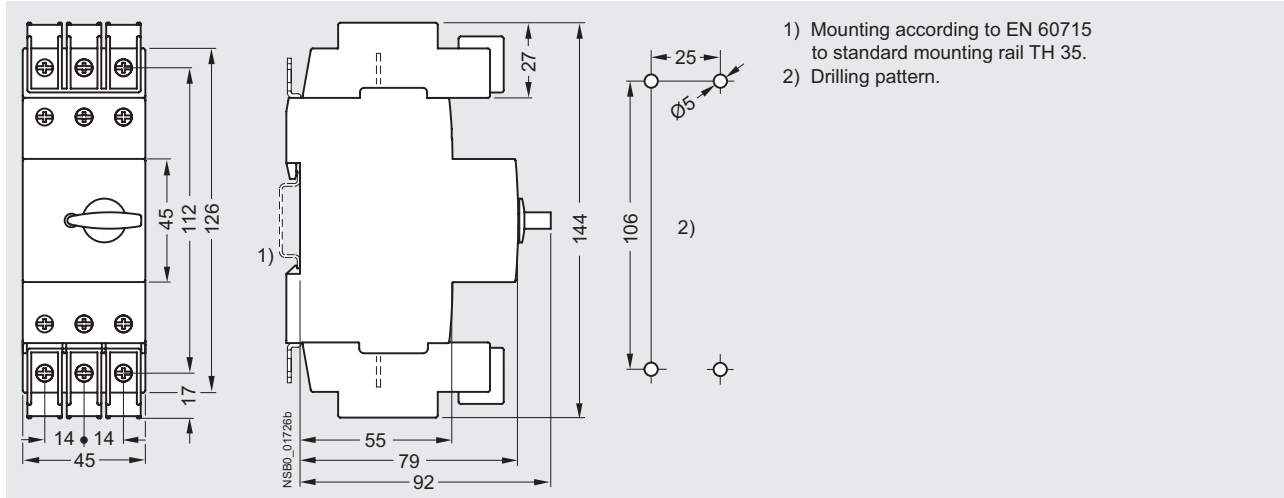

3RV17 circuit breakers, size S3

3RV17 42

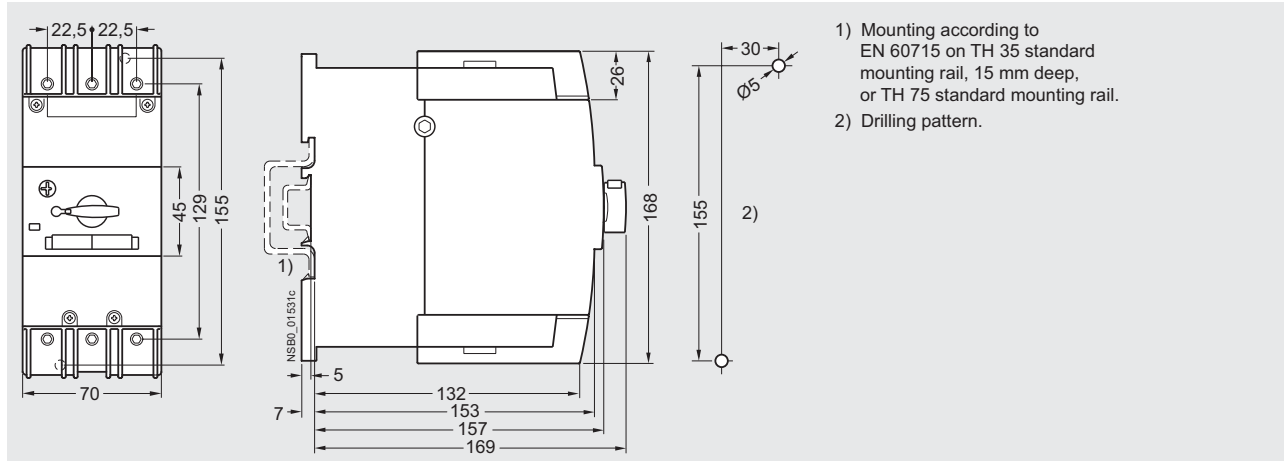



Overview

Mounting location and function

The 3RV MSP's have three main contact elements. In order to achieve maximum

flexibility, auxiliary switches, signalling switches, auxiliary releases and isolator modules

can be supplied separately. These components can be fitted as required on the switches

without using tools.

Front A maximum of 4 auxiliary contacts with auxiliary switches can be attached to each motor starter protector.	Transverse auxiliary switches, solid-state compatible transverse auxiliary switches 1 NO + 1 NC or 2 NO or 1 CO	An auxiliary contact block can be inserted transversely on the front. The overall width of the MSP's remains unchanged.
Left-hand side	Lateral auxiliary switch (2 contacts) 1 NO + 1 NC or 2 NO or 2 NC	One of the three auxiliary switches can be mounted laterally for each MSP. The contacts of the auxiliary switch close and open together with the main contacts of the MSP. The overall width of the lateral auxiliary switch with 2 contacts is 9 mm.
	Lateral auxiliary switch (4 contacts) 2 NO + 2 NC	One auxiliary switch can be mounted laterally for each MSP. The contacts of the auxiliary switch close and open together with the main contacts of the MSP. The overall width of the lateral auxiliary switch with 4 contacts is 18 mm.
	Signaling switch Tripping 1 NO + 1 NC Short-circuit 1 NO + 1 NC	One signalling switch can be mounted at the side of each MSP. The signalling switch has two contact systems. One contact system always signals tripping , irrespective of whether this was caused by a short circuit, an overload or an auxiliary release. The other contact system only switches in the event of a short circuit. There is no signalling as a result of switching off with the handle. In order to be able to switch on the MSP again after a short-circuit, the signaling switch must be reset manually after the error cause has been eliminated. The overall width of the signaling switch is 18 mm.
Right-hand side	Shunt release or Undervoltage release or	For remote-controlled tripping of the MSP. The release coil should only be energized for short periods. ¹⁾ Trips the MSP when the voltage is interrupted and prevents the motor from being restarted accidentally when the voltage is restored. Used for remote-controlled tripping of the MSP. Particularly suitable for EMERGENCY-STOP disconnection via the appropriate EMERGENCY-STOP button in accordance with IEC 60204-1.
	Undervoltage release with leading auxiliary contacts (2 NO)	Function and use as for the undervoltage release without leading auxiliary contacts, but with the following additional function: The auxiliary contact will open in switch position OFF to deenergize the coil of the undervoltage release, thus interrupting power consumption. In the "tripped" position of the MSP, these auxiliary contacts are not guaranteed to open. The leading contacts permit the MSP to reclose. The overall width of the auxiliary releases is 18 mm.
Top	Isolator module	Isolator modules can be mounted to the upper connection of the MSP's. The supply cable is connected to the MSP via the isolator module. The plug can only be unplugged when the MSP is open and isolates all 3 poles of the MSP from the network. The shock-protected dividing point is clearly visible and secured with a padlock to prevent reinsertion of the plug.

Notes:

- A maximum of 4 auxiliary contacts with auxiliary switches can be attached to each MSP.
- The signaling switch cannot be used for the 3RV27 and 3RV28 circuit breakers.
- Auxiliary switches (2 contacts) and signaling switches can be mounted separately or together.

Notes:

- One auxiliary release can be mounted per MSP.
- Accessories cannot be mounted at the right-hand side of the 3RV21 MSP's for motor protection with overload relay function.

1) Note the wiring diagrams on Page 1/33

3RV Motor Starter Protectors

General Data


SIRIUS




Mountable accessories

Overview

S00 and S0 motor starter protectors with mountable accessories

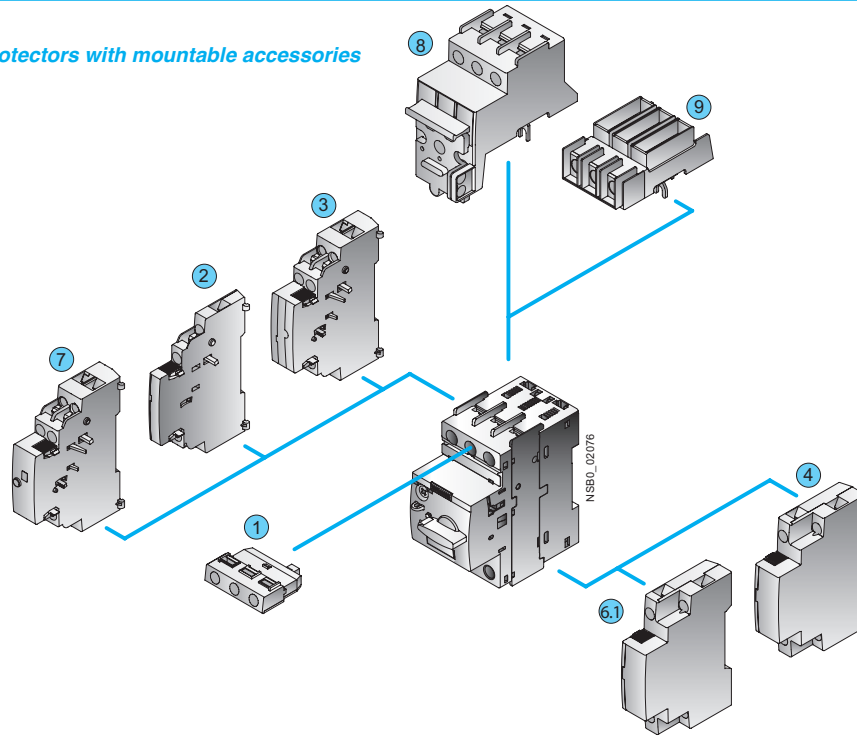

Motor starter protectors, sizes S2 or S3, with mountable accessories

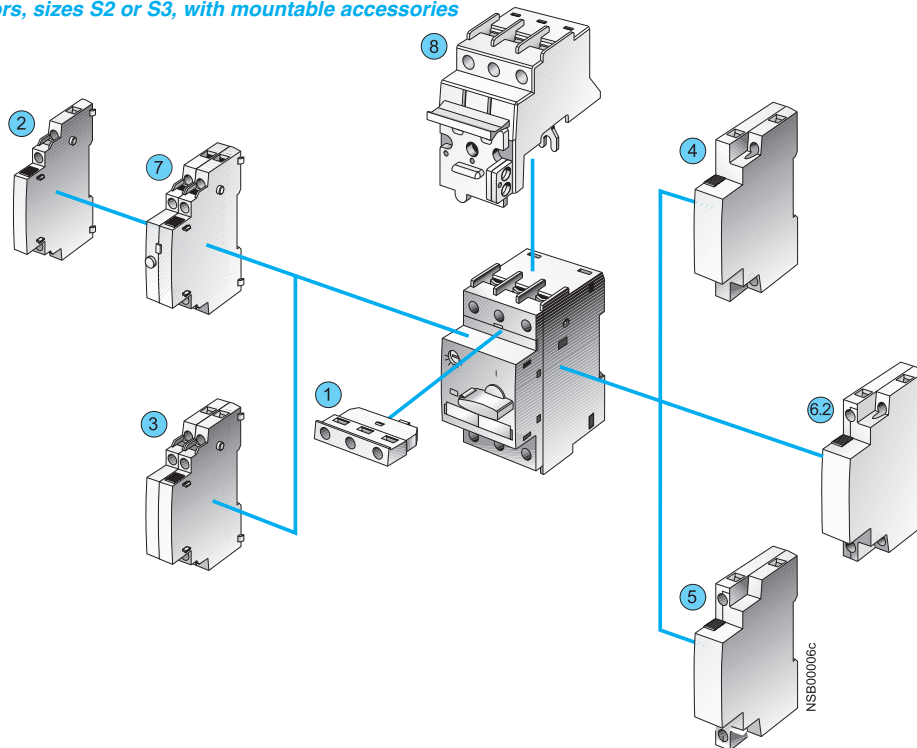

Mountable accessories for all sizes S00 ... S3

- ① Transverse auxiliary switch
- ② Lateral auxiliary switch with 2 contacts
- ③ Lateral auxiliary switch with 4 contacts
- ④ Shunt release
- ⑤ Undervoltage release

Mountable accessories

- ⑥.1 Undervoltage release with leading auxiliary contacts (can not be used with 3RV21 circuit breakers)
- ⑥.2 Undervoltage release with leading auxiliary contacts

for sizes

S00, S0
S2, S3

Mountable accessories

- ⑦ Signaling switch (can not be used with 3RV27 and 3RV28 circuit breakers)
- ⑧ Isolator module (can not be used with 3RV27 and 3RV28 circuit breakers)
- ⑨ Terminal block E

for sizes

S00 ... S3
S0 and S2




Circuit diagrams

Internal connections


Shunt release

3RV19 02-1D / 3RV29 02-1D




Undervoltage release

3RV19 02-1A / 3RV29 02-1A




Undervoltage release with leading auxiliary contacts

3RV19 12-1C / 3RV29 12-1C
3RV19 22-1C / 3RV29 22-1C




Lateral auxiliary switch with 4 contacts

3RV19 01-1J / 3RV29 01-1J




Transverse auxiliary switch


3RV19 01-1D
3RV29 01-1D
3RV19 01-1G
3RV29 01-1G



3RV19 01-1E
3RV29 01-1E
3RV19 01-2E
3RV29 01-2E




3RV19 01-1F
3RV29 01-1F



Lateral auxiliary switch with 2 contacts

3RV19 01-1A
3RV29 01-1A
3RV19 01-2A
3RV29 01-2A



3RV19 01-1B
3RV29 01-1B
3RV19 01-2B
3RV29 01-2B




3RV19 01-1C
3RV29 01-1C
3RV19 01-2C
3RV29 01-2C




Signaling switch

3RV19 21-1M / 3RV29 21-1M

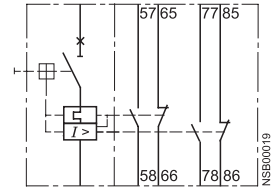


External connections

Shunt release

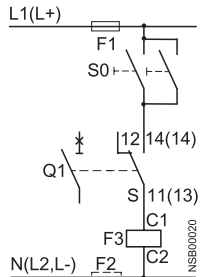

Undervoltage release

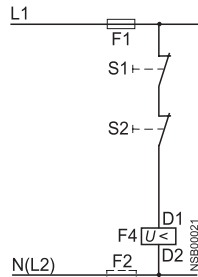


S0; S1; S2
Q1
S
F1; F2
F3
F4

OFF pushbuttons in system
Motor starter protectors
Auxiliary switch of MSP Q1
Fuses (gL/gG) max. 10 A
Shunt release
Undervoltage release

Circuit diagrams

Typical circuits


3RV2 MSP's with 3RV29 21-1M signalling switch

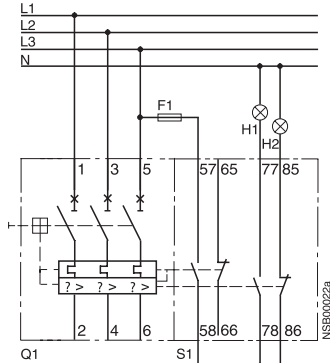

H1: "Short circuit" signal	H1; H2	Indicator lights
H2: "Overload" or "Tripped by auxiliary release" signal	F1	Fuses (gL/gG) max. 10 A
	Q1	MSP
	S1	Signalling switch

Separate "Tripped" and "Short circuit" signals

Motor starter protectors tripped by means of pushbutton or EMERGENCY STOP button in the system

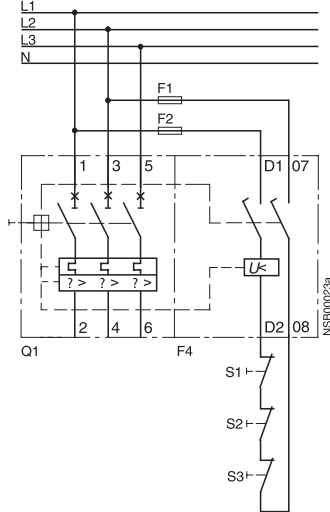


The leading auxiliary contacts open in "OFF" position of the MSP to switch off the coil voltage of the undervoltage release, thus avoiding power consumption in switched off state.	F1; F2	Fuses (gL/gG) max. 10 A
In the "tripped" position of the MSP, these contacts are not guaranteed to open.	Q1	MSP
	F4	Undervoltage release
	S1; S2, S3	OFF pushbuttons in system


Dimension drawings

Isolator modules

3RV29 28-1A
for MSP's size S00, S0

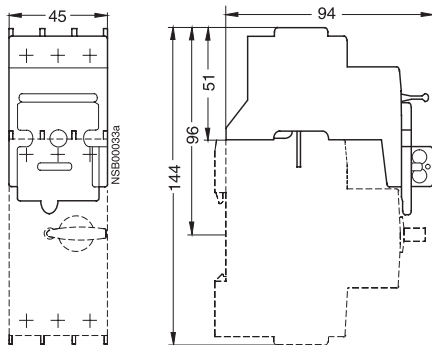

3RV19 38-1A
for MSP's size S2

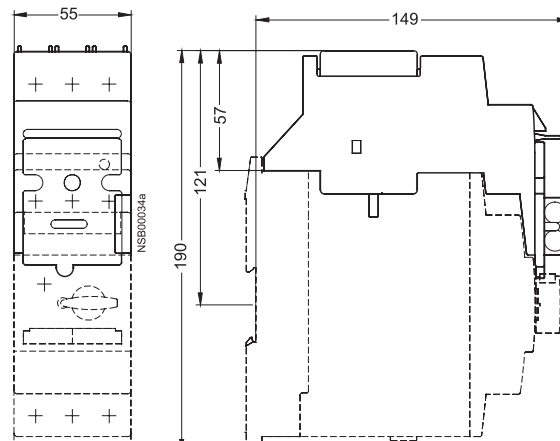

For dimension drawings of auxiliary switches, signalling switches and auxiliary releases, see page 1/33 and 1/34.



Overview

Busbar adapters

The MSP's are mounted directly with the aid of busbar adapters on fastbus-busbar systems with 40 mm and 60 mm centerline spacing, in order to save space and to reduce wiring times and costs.

Fastbus-busbar adapters for busbar systems with 40 mm centerline spacing are suitable for copper busbars with a width of 12 mm to 15 mm, while those with 60 mm centerline spacing are suitable for widths of 12 mm to 30 mm. The busbars can be 4 to 5 mm or 10 mm thick.

The MSP's are snapped onto the adapter and connected on the line side. This prepared unit is then plugged directly onto the busbar system, and is thus connected both mechanically and electrically at the same time.

Refer to page 1/10 for busbar adapters for specific MSP's and accessories.


Further busbar adapters for snap-mounting direct-on-line starters and reversing starters, as well as additional accessories such as line terminals and outgoing terminals, busbar copper, etc., can be found in Section 5.

Insulated three-phase busbar system

Three-phase busbar systems provide an easy, time-saving and clearly arranged means of feeding 3RV2 motor starter protectors with screw terminals. They can be used for the different types of motor starter protector up to 32 A. The 3RV19 15 three-phase busbar systems are generally unsuitable for the 3RV21 motor starter protectors for motor protection with overload relay function and for the 3RV27 and 3RV28 circuit breakers according to UL 489 / CSA C22.2 No. 5-02.

The busbars are suitable for between 2 and 5 circuit breakers/motor starter protectors. However, any kind of extension is possible by clamping the tags of an additional busbar (rotated by 180°) underneath the terminals of the respective last motor starter protector.


A combination of motor starter protectors of different sizes is possible. The motor starter protectors are supplied by appropriate feeder terminals.

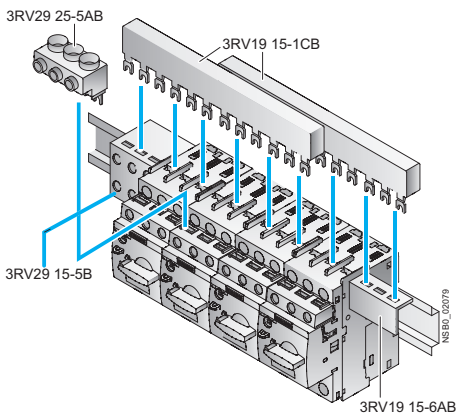

SIRIUS three-phase busbar system size S00/S0

The three-phase busbar systems are finger-safe. They are designed for any short-circuit stress which can occur at the output side of connected motor starter protectors.

SIRIUS MSP's and combination starters with fastbus-busbar adapters snapped onto busbars

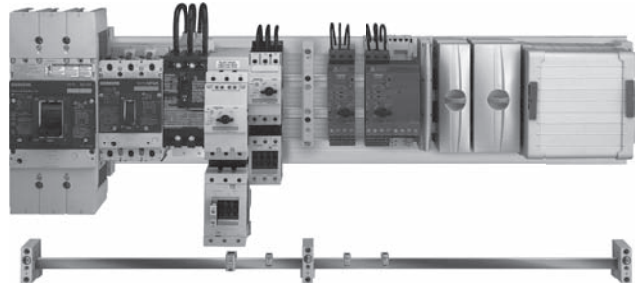


8US busbar adapters for 60 mm systems

The motor starter protectors are mounted directly with the aid of busbar adapters on busbar systems with 60 mm center-to-center clearance in order to save space and to reduce infeed times and costs.

The busbar adapters for busbar systems with 60 mm center-to-center clearance are suitable for copper busbars with a width of 12 mm to 30 mm. The busbars can be 5 mm or 10 mm thick.

The motor starter protectors are snapped onto the adapter and connected on the line side. This prepared unit is then plugged directly onto the busbar system, and is thus connected both mechanically and electrically at the same time.

For further busbar adapters for snap-mounting direct-on-line starters and reversing starters as well as additional accessories such as line terminals and outgoing terminals, flat copper profile, etc., can be found in Section 5.

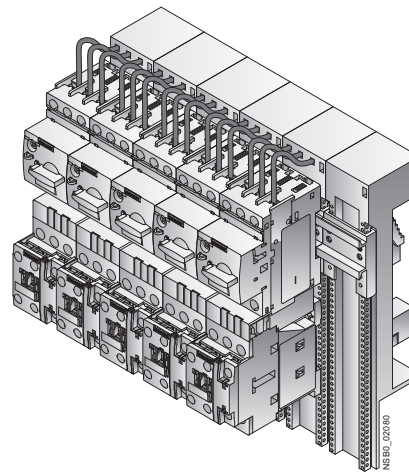

SIRIUS load feeders with busbar adapters snapped onto busbars

The three-phase busbar systems can also be used to construct "Type E Starters" according to UL/CSA. Special feeder terminals must be used for this purpose however (see "Selection and Ordering Data" on page 1/8).




Busbar accessories

Dimension drawings


3RV19 15-1.. 3-phase busbar

for S00 and S0 MSP's, modular spacing 45 mm
 for 2 MSP's 3RV19 15-1AB
 for 3 MSP's 3RV19 15-1BB
 for 4 MSP's 3RV19 15-1CB
 for 5 MSP's 3RV19 15-1DB

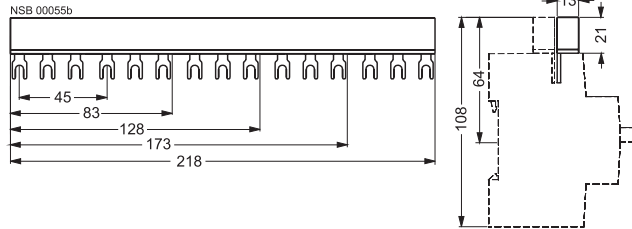


3RV19 15-2.. 3-phase busbar

for S00 and S0 circuit-breakers, modular spacing 55 mm
 for 2 MSP's with accessories 3RV19 15-2AB
 for 3 MSP's with accessories 3RV19 15-2BB
 for 4 MSP's with accessories 3RV19 15-2CB
 for 5 MSP's with accessories 3RV19 15-2DB

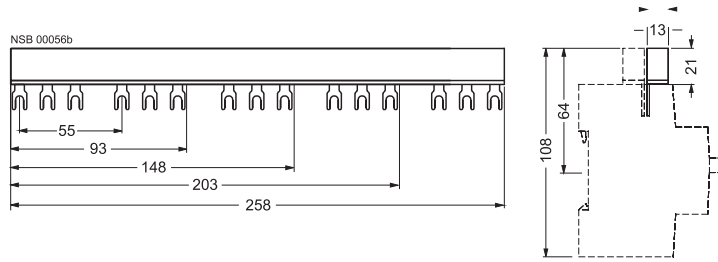


3RV19 15-3.. 3-phase busbar

for S00 and S0 MSP's, modular spacing 63 mm
 for 2 MSP's with accessories 3RV19 15-3A
 for 3 MSP's with accessories 3RV19 15-3B
 for 4 MSP's with accessories 3RV19 15-3C

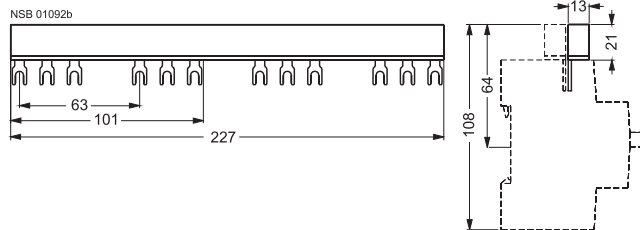

3RV19 35-1.. 3-phase busbar

for S2 MSP, modular spacing 55 mm
 for 2 MSP's 3RV19 35-1A
 for 3 MSP's 3RV19 35-1B
 for 4 MSP's 3RV19 35-1C

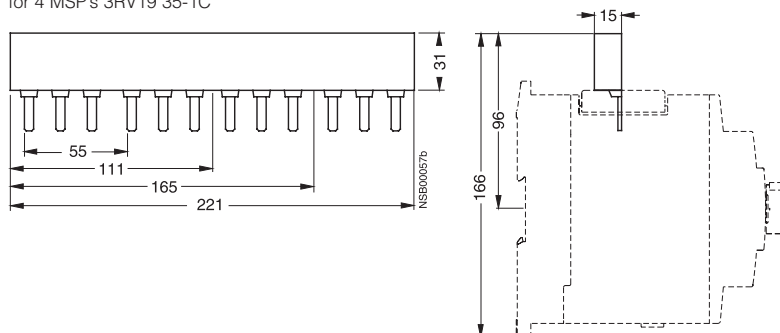




Dimension drawings

3RV19 35-3.. 3-phase busbar

for S2 MSP, modular spacing 75 mm
 for 2 MSP's with accessories 3RV19 35-3A
 for 3 MSP's with accessories 3RV19 35-3B
 for 4 MSP's with accessories 3RV19 35-3C

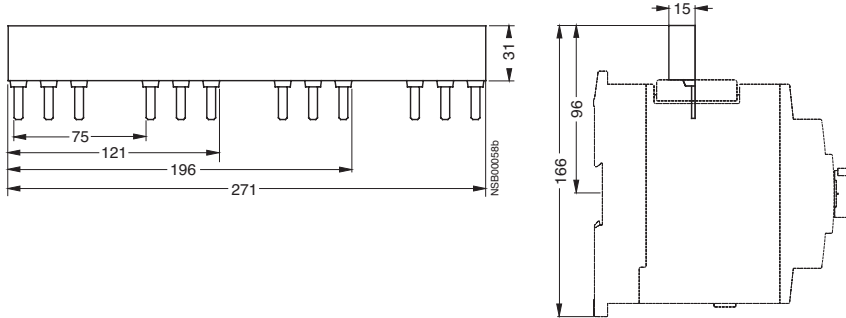

3RV29 25-5AB. 3-phase line-side terminals


connection from above,
 size S00 and S0

3RV29 35-5B
 connection from above,
 size S00 and S0

a) 3RV1. 1 19 mm
 3RV1. 2 23 mm

3RV29 25-5EB 3-phase line-side terminal

connection from above,
 size S0

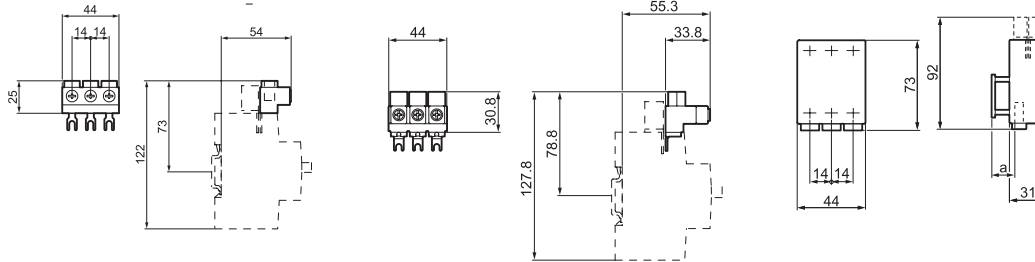


3RV19 35-5A 3-phase line-side terminal

for MSP size S2

3RV19 15-5DB Connector

For connecting a 3-phase busbar for
 MSP's of the size S0
 (left) to size S00 (right)

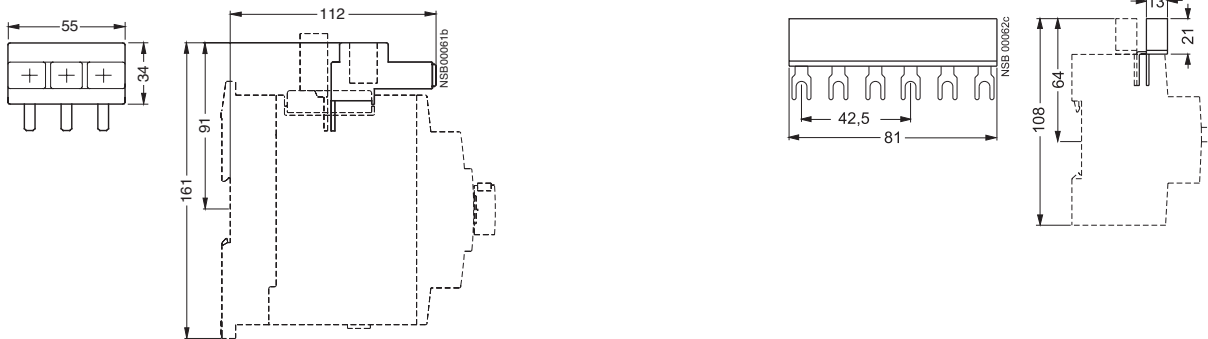

3RV19 25-5EB to construct "Type E Starters"

Connected from top, for motor starter protector size S0

3RV19 35-5E


Connected from top, for motor starter protector size S2




Overview

Door-coupling rotary operating mechanisms

Motor starter protectors with a rotary operating mechanism can be mounted in a control cabinet and operated externally by means of a door-coupling rotary operating mechanism. When the cabinet door with motor starter protector is closed, the operating mechanism is coupled. When the motor starter protector closes, the coupling is locked which prevents the door from being opened unintentionally. This interlock can be defeated by the maintenance personnel. In the OPEN position, the rotary operating mechanism can be secured against reclosing with up to 3 padlocks. Inadvertent opening of the door is not possible in this case either.

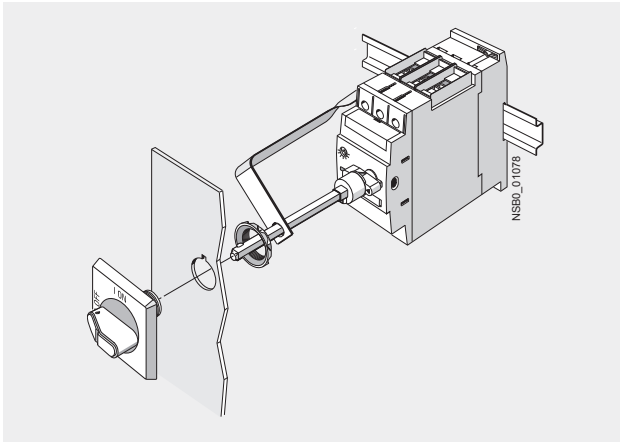

SIRIUS 3RV29 26-0K door-coupling rotary operating mechanism

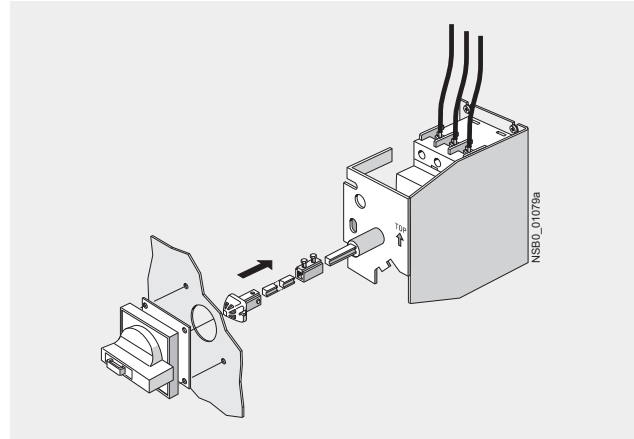


SIRIUS 3RV29 26-2B door-coupling rotary operating mechanism for arduous conditions

Circuit diagrams

Typical circuits


3RV1 MSP with 3RV19 36/3RV19 46 remote-controlled motorized operating mechanism

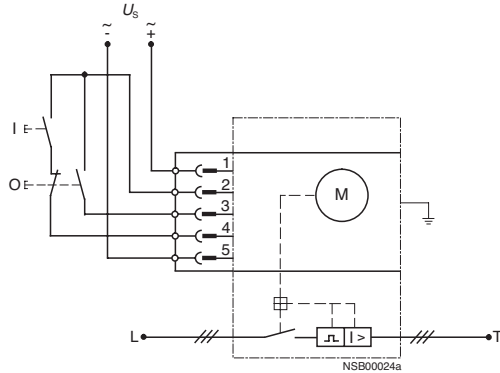

Dimensional drawings


Door coupling rotary mechanism

3RV29 26-0B/3RV29 26-0C short shaft⁴⁾, for MSP sizes S00, S0, S2 and S3

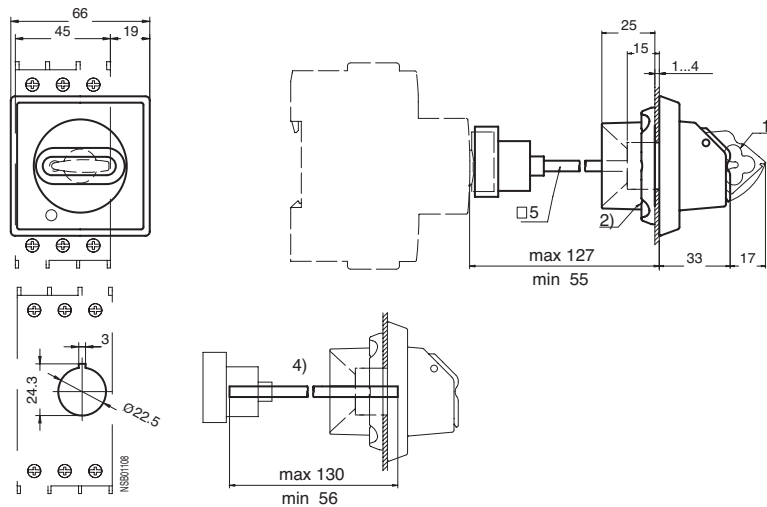

- 1) Lockable in 0 position, with shackle diameter max. 8 mm
- 2) Mounting with screw cap
- 3) Supplied with a shaft length of 330 mm; adaptable by shortening of the shaft.
- 4) Supplied with a shaft length of 130 mm; adaptable by shortening of the shaft.
- 5) Grounding terminal 35 mm² and bracket for 330 mm shaft.

3RV29 26-0K/3RV29 26-0L long shaft (with bracket)³⁾, for MSP sizes S00, S0, S2 and S3

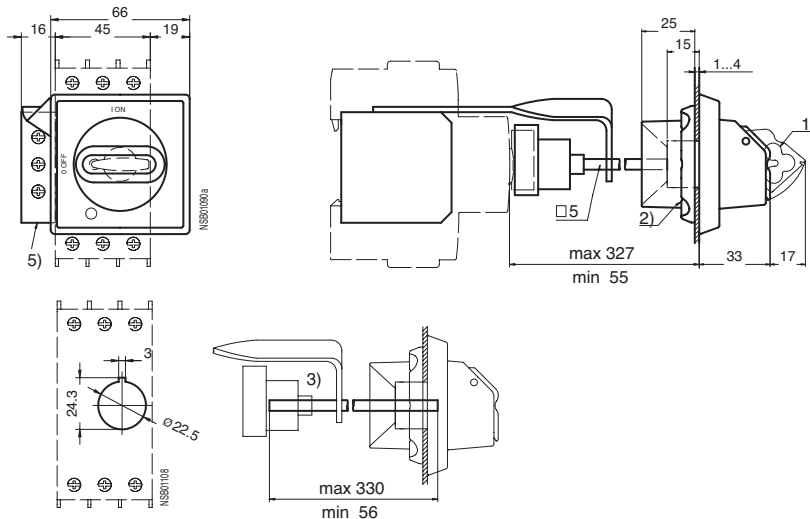

3RV Motor Starter Protectors

General Data

SIRIUS




Rotary operating mechanisms

Dimension drawings

3RV29 .6-2. Door coupling rotary mechanism for heavy duty

3RV29 26-2., 3RV29 36-2., 3RV29 46-2.
for sizes S00, S0, S2 and S3

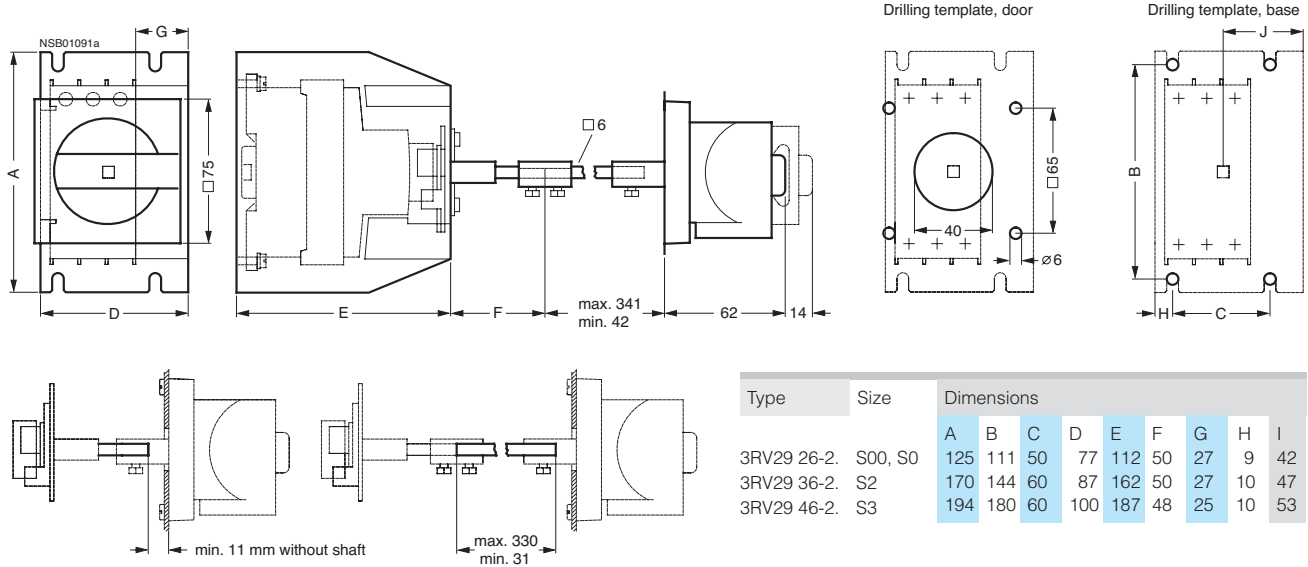




Overview

Enclosure

For stand-alone installation of motor starter protector size S2 ($I_{n\ max} = 50\ A$), molded-plastic enclosures for surface mounting are available.

When installed in a molded-plastic enclosure the motor starter protectors have a rated operational voltage U_e of 500 V.

The molded-plastic enclosures are designed to degree of protection IP55.

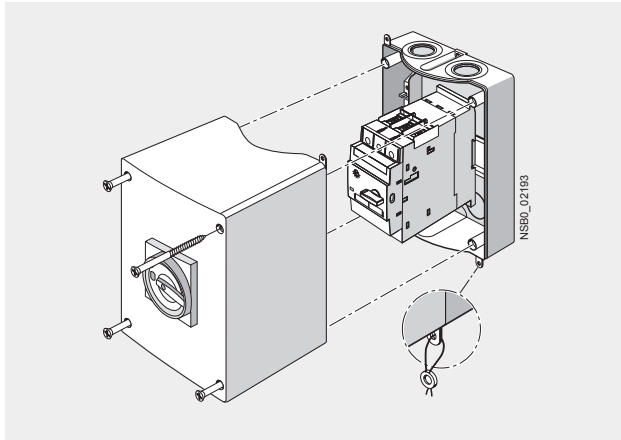

Enclosures for surface mounting

All enclosures are equipped with N and PE terminals. There are two knock-out cable entries for cable glands at the top and two at the bottom; also on the rear corresponding cable entries are scored. There is a knockout on the top of the enclosure for indicator lights that are available as accessories.

In the enclosure for motor starter protector size S2 there is also room for the laterally mounted auxiliary release. There is no provision for installing a motor starter protector with a signaling switch.


The molded-plastic enclosures of the size S2 motor starter protectors are fitted with a rotary operating mechanism.

The enclosures can be supplied with either a black rotary operating mechanism or with an EMERGENCY-STOP rotary operating mechanism with a red/yellow knob.

The rotary operating mechanisms can be locked in the Open position with up to 3 padlocks.

Front plates

Motor starter protectors are frequently required to be actuated in any enclosure. Front plates equipped with a rotary operating mechanism for motor starter protector sizes S2 and S3 are available for this purpose.

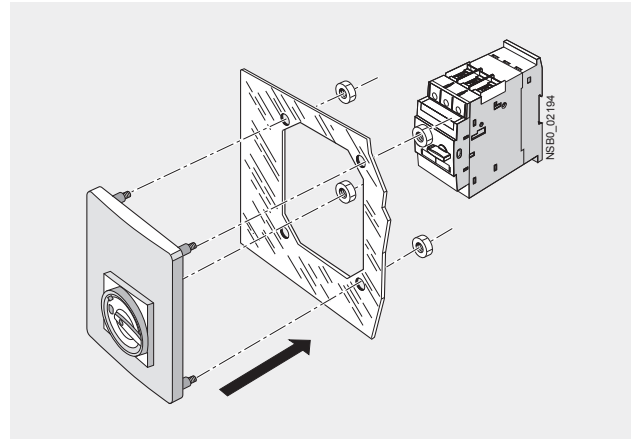

Front plate for size S2

3RV Motor Starter Protectors

General Data

SIRIUS




Mounting accessories

Dimension drawings

3RV19 . 3-1... Cast aluminum enclosure for wall mounting


for MSP's of size S2
3RV19 33-1....

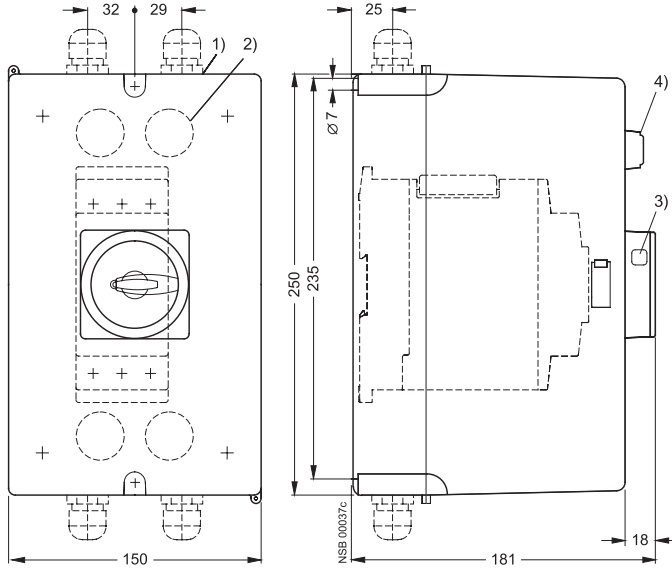

- 1) Knock-outs for M32 (left) and M40 (right).
- 2) M32 knock-outs for rear-side cable entry.
- 3) Opening for padlock with shackle diameter max. 8 mm.
- 4) Indicator light 3RV19 03-5.

Molded-plastic front plate 3RV19 23-4.

for MSP sizes S0, S2, S3
3RV19 23-4B
3RV19 23-4E
3RV19 23-4G (only for size S0)

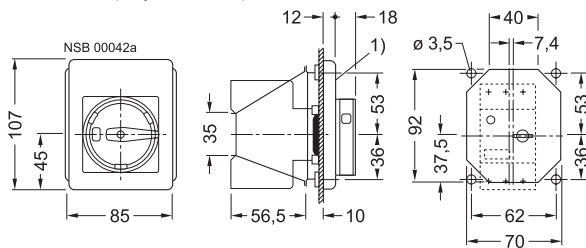




Design

Installation guidelines

Distance in Y direction from live, earthed or insulated parts according to IEC 60947-4: 10 mm.

In addition, the installation guidelines for motor starter protectors or fuseless load feeders including the clearances must be complied with.

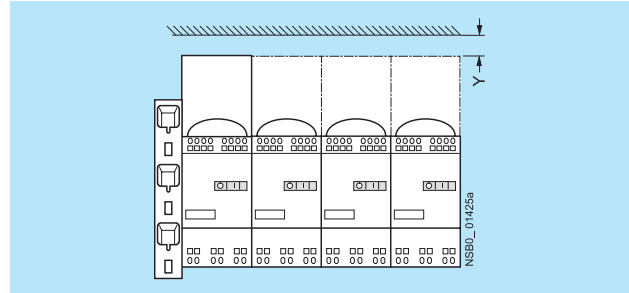

Technical specifications

Type	3RV29 .7	
Rated operational voltage U_e		
• IEC		
- 10 % overvoltage	V	500
- 5 % overvoltage	V	525
• UL/CSA	V	600
Rated frequency	Hz	50/60
Rated current I_n	A	63
Permissible ambient temperature		
• During storage/transport	°C	-50 ... +80
• During operation	°C	-20 ... +60
Permissible rated current of the 3RV10 11 motor starter protectors (size S00) at control cabinet internal temperature		
• +60 °C	%	100
Permissible rated current of the 3RV10 21 motor starter protectors (size S0) up to 16 A at control cabinet internal temperature		
• +60 °C	%	100
Permissible rated current for 3RV1. 21 motor starter protectors (size S0) from 16 A at control cabinet internal temperature		
• +40 °C	%	100
• +60 °C	%	87
Degree of protection acc. to IEC 60529		IP20 ¹⁾
Touch protection acc. to IEC 61140		Finger-safe
Conductor cross-sections for main circuit infeed		
• Solid, stranded:	mm ²	4 ... 25
• Finely stranded with end sleeve	mm ²	4 ... 25
• Finely stranded without end sleeve	mm ²	6 ... 25
• AWG cables, solid or stranded	AWG	10 ... 3
Conductor cross-sections of terminal block		
• Solid	mm ²	1.5 ... 6
• Finely stranded with end sleeve	mm ²	1.5 ... 4
• Finely stranded without end sleeve	mm ²	1.5 ... 6
• AWG cables, solid or stranded	AWG	15 ... 10

¹⁾ In infeed terminal compartment without a conductor connected: IP00.

3RV Motor Starter Protectors



General Data

3RV Cage clamp infeed system





Cage Clamp infeed system

3-phase busbars with line-side terminals
for 2 circuit-breakers of sizes S00 and S0
3RV29 17-1.

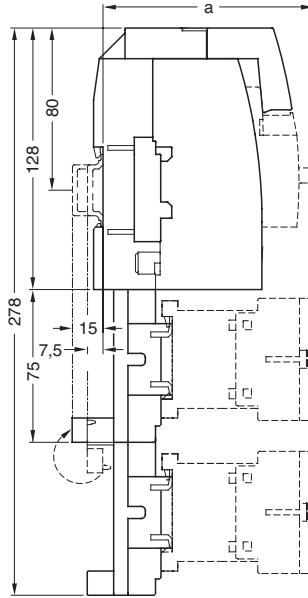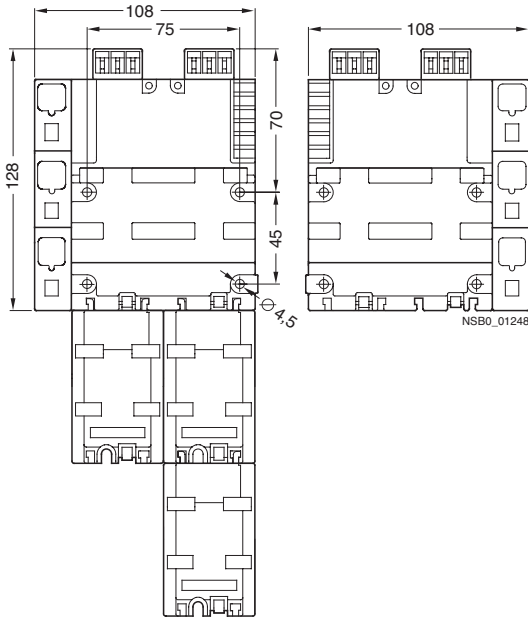

	S00	S0
a	104	125

3-phase busbars for system expansion
for 2 and 3 circuit-breakers of sizes S00 and S0
3RV29 17-4.

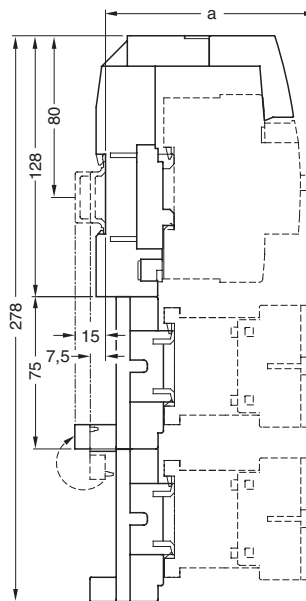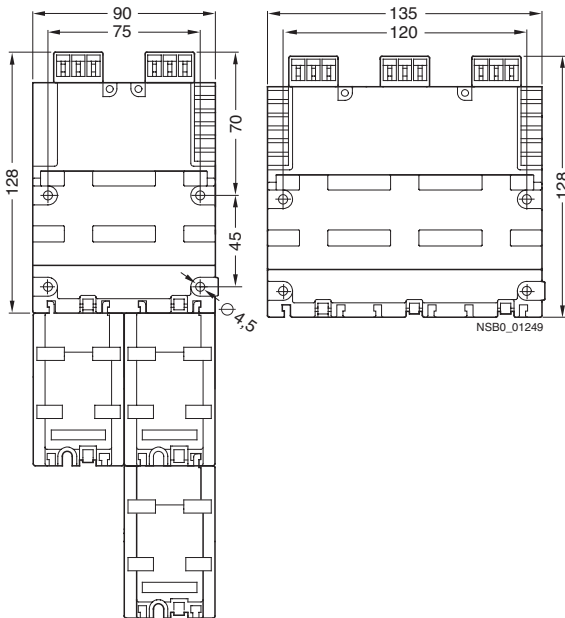

	S00	S0
a	104	125