

SIMATIC

Products for Totally Integrated Automation

[siemens.com/tia](https://www.siemens.com/tia)

Catalog
ST 70

Edition
2024



Related catalogs

SIMATIC HMI / PC-based Automation ST 80/ST PC
Human Machine Interface Systems
PC-based Automation
PDF (E86060-K4680-A101-D1-7600)



SIMATIC ST PCS 7
SIMATIC PCS 7 Process Control System
Vol. 1: System components
E86060-K4678-A111-C8-7600



Industrial Communication
SCALANCE network components and
SIMATIC CPs
www.siemens.com/industrial-communication/mall



SIMATIC ST 400
SIMATIC S7-400 advanced controller
PDF (E86060-K4678-A151-A1-7600)



SITOP KT 10.1
SITOP
Power Supply
PDF (E86060-D4001-A510-E0)



SITRAIN
Digital Industry Academy
www.siemens.com/sitrain



Siemens TIA Selection Tool
for the selection, configuration and ordering of
TIA products and devices
www.siemens.com/tst



SiePortal
Information and Ordering Platform
on the Internet
sieportal.siemens.com



Contact
Your personal contact can be found in our
Contacts Database at:
www.siemens.com/automation-contact





TIA Selection Tool – quick, easy, smart configuration


For you to get the most out of our portfolio quickly and easily.

Do you always need the optimum configuration for planning your project?

For your application we offer the TIA Selection Tool to support all project planners, beginners and experts alike.

No detailed portfolio knowledge is necessary.

TIA Selection Tool is available for download as a free desktop version or a cloud variant.

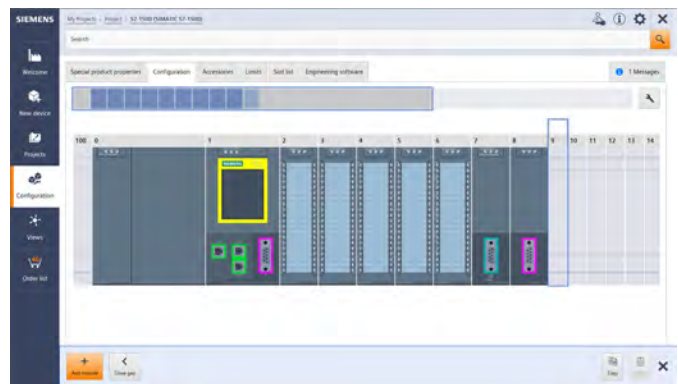

Your Advantages

Quick

- Configure a complete project with just a few entries – without a manual, without special knowledge
- Import and export of hardware configuration to TIA Portal or other systems
- Ideal visualization of the projects to be configured

Easy

- Tool download either as desktop version or web-based cloud version
- Technically always up-to-date about product portfolio and innovative approaches
- Highly flexible, secure, cross-team work in the cloud
- Direct ordering in SiePortal

Smart

- Smart selection wizard for error-free configuration and ordering
- Configuration options can be tested and simulated in advance
- Library for archiving sample configurations

The TIA Selection Tool is a completely paperless solution.

Download it now:

www.siemens.com/tst

For more
information,
scan the
QR code



Products for Totally Integrated Automation

SIMATIC



Catalog ST 70 · 2024

Supersedes:
Catalog ST 70 · 2023

Refer to the SiePortal for current updates of this catalog:
sieportal.siemens.com

© Siemens AG 2024

Introduction	1
LOGO! logic module	2
SIMATIC S7-1200 Basic Controllers	3
SIMATIC S7-1500 Advanced Controllers	4
SIMATIC S7-300 Advanced Controllers	5
SIMATIC S7-400 Advanced Controllers	6
Distributed Controllers	7
Software Controllers	8
Drive Controllers	9
I/O systems	10
SIMATIC control systems	11
Software for SIMATIC Controllers	12
SIMATIC programming devices	13
Products for specific requirements	14
Overviews	15
Supplementary components	16
Appendix	17



The products and systems described in this catalog are manufactured/distributed under application of a certified quality management system in accordance with DIN EN ISO 9001 (Certified Registration No. 1323QM-15). The certificate is recognized by all IQNet countries.

Introduction



1/2

Totally Integrated Automation

1/4

Sustainability@Siemens


Totally Integrated Automation



Totally Integrated Automation (TIA) offers smart automation development, flexible machine concepts, transparent operation, and sustainable solutions that enable access to data to calculate and optimize the product carbon footprint. We are constantly improving and expanding TIA to be future-proof and adaptive to existing and upcoming challenges.

A comprehensive portfolio for the challenges of today and tomorrow

The TIA offering is integrated seamlessly and it's so comprehensive that it provides the right automation solutions for every industry. We will continue to improve and expand our proven automation portfolio and are constantly including innovative technologies and solutions that pave the way towards the factory of the future.

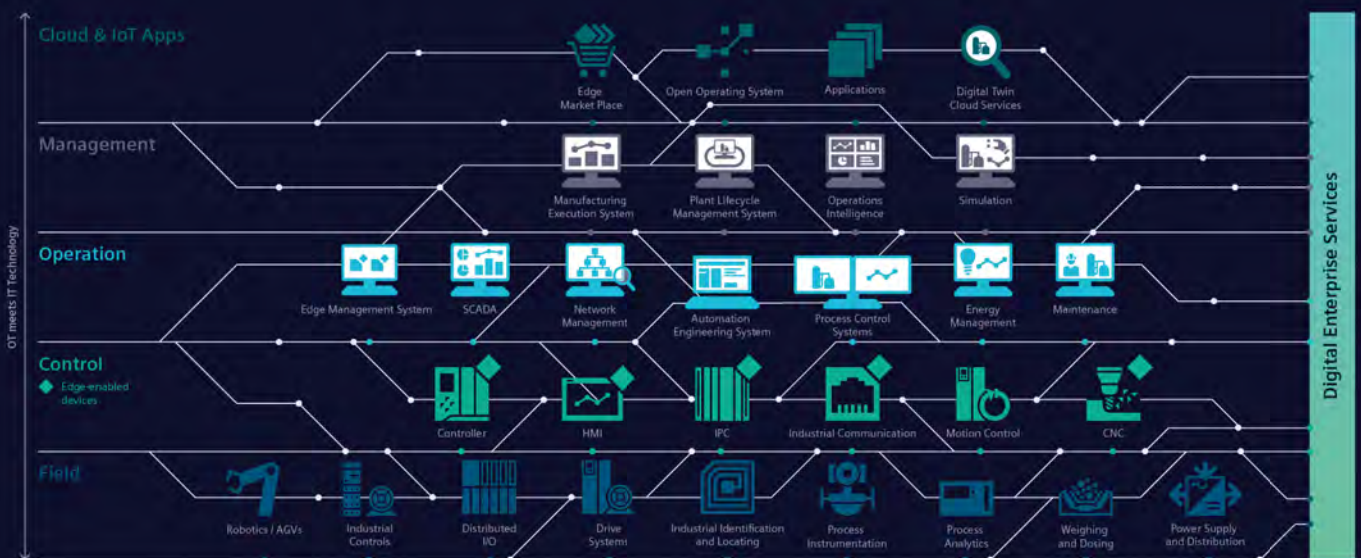

Real added value for the automation of your production

From the development of innovative machine concepts to engineering and optimized production:

TIA offers real added value along the entire value chain.

Smart Automation Development



Innovative machine concepts made easy: When you use standardized library concepts and preconfigured expertise, you can count on efficient engineering. Thanks to the integration of safety features, diagnostic functions, and cybersecurity, you also save valuable time.

Flexible Machine Concepts



No matter what new requirements emerge in the market, TIA supports modular machine concepts and the simple integration of new machines into existing lines – thanks to standardized hardware interfaces and engineering libraries. As a machine builder, this enables you to meet any challenge quickly and reliably.

Transparent Operations



Integrated interfaces let you achieve a new level of transparency for the essential performance indicators in your processes and plants. The connection between IT and OT along with efficient data management lay the foundation for new service models such as predictive maintenance.

Future-proof Automation



Our TIA portfolio is constantly being refined with a view to integrating automation technologies more and more efficiently. The components can then interact with modern IT capabilities, which are becoming increasingly important for specific applications in automation. TIA provides a solid foundation, whether for working with our Industrial Operations X portfolio or for everything the future has in store.

Sustainable Solutions

Sustainability starts with the acquisition of data. With the TIA portfolio, you can measure energy and resource data and make it transparent, providing a solid foundation for calculating the Product Carbon Footprint. This is crucial for drawing the right conclusions and responding to sudden changes in order to lastingly reduce CO₂ emissions and save more resources in production.



www.siemens.com/tia



Sustainability @Siemens

Transforming the everyday to create a better tomorrow.



- Decarbonization**
- Ethics**
- Governance**
- Resource Efficiency**
- Equity**
- Employability**

For more information, see www.siemens.com/sustainability/figures

As a company, Siemens considers environmental, social and governance (ESG) criteria from all angles with its DEGREE framework (decarbonization, ethics, governance, resource efficiency, equity and employability). We are not only committed to reducing the carbon footprint in our own operations to net zero by 2030, but also helping our customers achieve their decarbonization and sustainability goals.

Mission & strategy

As a focused technology company, Siemens is committed to addressing the world's most profound challenges by leveraging the synergies between digitalization and sustainability.

Technology with aim and purpose

We develop technologies that connect the real and digital worlds and enable our customers to positively transform the industries that form the backbone of our economy: industry, infrastructure, transportation and healthcare.

Our contribution

Siemens makes an impact every day by providing innovative solutions in response to challenges relating to environmental protection, decarbonization, health and safety. Innovative solutions that have a clear goal: to make the world more sustainable, more integrative and a better place to live.

Sustainability facts

For almost 175 years, Siemens has been driven by the desire to improve the lives of people around the world with our technologies.

LOGO! logic module



2/2	Introduction
2/3	LOGO! basic and expansion modules
2/3	LOGO! basic modules with display
2/5	LOGO! basic modules without display
2/7	LOGO! expansion modules
2/13	SIPLUS LOGO! basic modules with display
2/16	SIPLUS LOGO! basic modules without display
2/19	SIPLUS LOGO! expansion modules
2/24	LOGO! communications modules
2/25	LOGO! CMK2000 communications module
2/26	LOGO! CIM (Communication Interface Module)
2/27	LOGO! CSM unmanaged
2/29	LOGO! CMR (wireless communication)
2/33	LOGO!Power
2/33	Introduction
2/34	1-phase, 5 V DC
2/38	1-phase, 12 V DC
2/42	1-phase, 15 V DC
2/46	1-phase, 24 V DC
2/51	SIPLUS LOGO!Power
2/53	LOGO! software
2/54	LOGO! Starter Kits
2/55	LOGO! accessories
2/55	LOGO!Contact switching module
2/56	LOGO! mounting kit
2/57	System cabling for SIMATIC S7-1500 IO (25 mm), ET 200SP, S7-1200 and LOGO!

LOGO! logic module

Introduction

LOGO! logic module

Overview



LOGO! logic module

- The compact, easy-to-use and low-cost solution for simple control tasks
- Compact, easy to operate, universally applicable without accessories
- "All in one": Integrated display and operator panel
- 43 different functions can be connected at the press of a button or by means of PC software; up to 400 times
- Functions are easy to change at the press of a button. No more time-consuming rewiring

SIPLUS LOGO!

- The controller for use in the toughest ambient conditions
- With extended temperature range from -40/-25 °C to +70 °C
- Suitable for exposure to environmental substances (harmful gas atmosphere)
- Condensation permissible
- With the proven PLC technology of LOGO!
- Easy to handle, program, maintain, and service
- Ideal for use in automotive engineering, environmental engineering, mining, chemical plants, conveyor technology, food industry, etc.

Accessories:

- The front panel mounting kit also allows simple and reliable installation of the logic modules in front panels; degree of protection IP65 is thus possible.
- In order to ensure dependable operation of devices supplied by the battery in conjunction with combustion engines, it is necessary to put in a SIPLUS upmiter upstream device between the battery and the SIPLUS LOGO!.

More information is available at:

<http://www.siemens.com/siplus-extreme>

General technical specifications of the SIPLUS LOGO!

Range of ambient temperature	-40/-25 ... +70 °C
Conformal coating	Coating of the printed-circuit boards and the electronic components
Technical specifications	The technical data of the standard product applies except for the ambient conditions.

Ambient conditions

Extended range of ambient conditions	
<ul style="list-style-type: none"> • With reference to ambient temperature, air pressure and installation altitude 	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m) 0 °C
<ul style="list-style-type: none"> • At cold restart, min. 	0 °C
Relative humidity	
<ul style="list-style-type: none"> • With condensation, max. 	100%; RH incl. condensation/frost (no commissioning in bedewed state)
Resistance	
<ul style="list-style-type: none"> • To biologically active substances/ compliance with EN 60721-3-3 	Yes; Class 3B2 mold and fungal spores (except fauna); the supplied plug covers must remain in place on the unused interfaces during operation.
<ul style="list-style-type: none"> • To chemically active substances/ compliance with EN 60721-3-3 	Yes; Class 3C4 (RH < 75%) incl. salt spray in accordance with EN 60068-2-52 (severity 3); the supplied plug covers must remain in place on the unused interfaces during operation.
<ul style="list-style-type: none"> • To mechanically active substances, compliance with EN 60721-3-3 	Yes; Class 3S4 incl. sand, dust; the supplied plug covers must remain in place on unused interfaces during operation.

Overview



- The space-saving basic versions
- Interface for the connection of expansion modules, up to 24 digital inputs, 20 digital outputs, 8 analog inputs and 8 analog outputs can be addressed
- All basic devices with integrated web server for TD-based web pages and/or user-defined web pages
- Enclosure width 72 mm (4 U)
- All basic units with Ethernet interface for communication with LOGO! 8, LOGO! TDE, SIMATIC Controllers, SIMATIC Panels and PCs
- Use of standard micro SD cards

Ordering data

Ordering data	Article No.	Ordering data	Article No.
LOGO! 8 logic module		Accessories	
LOGO! 24CE Logic module, display PS/I/O: 24 V/24 V/24 V trans., 8 DI (4 AI)/4 DO, SP, 400 blocks, modularly expandable, Ethernet, integrated web server, data log, user-defined web pages, standard microSD card for LOGO! Soft Comfort from V8.4, older projects executable, cloud connection, MQTT in all LOGO! 8.4 basic devices	6ED1052-1CC08-0BA2	LOGO! TD text display 6 lines, 3 background colors, 2 Ethernet ports, mounting accessories for LOGO! 8	6ED1055-4MH08-0BA1
LOGO! 12/24RCE Logic module, display PS/I/O: 12/24 V DC/relay, 8 DI (4 AI)/4 DO, SP, 400 blocks, modularly expandable, Ethernet, integrated web server, data log, user-defined web pages, standard microSD card for LOGO! Soft Comfort from V8.4, older projects executable, cloud connection, MQTT in all LOGO! 8.4 basic devices	6ED1052-1MD08-0BA2	LOGO! SOFT Comfort V8 Single license for 1 installation E-SW, LWEE, Integrity Test Tool, SW and documentation on DVD, 6 languages, executable under Windows XP, 7, 8, 10 (32 and 64-bit) and Windows 11, Mac OSx 10.14 Mojave, Mac OS 10.15 Big Sur, Mac OS12.1 Monterey, Linux SUSE 15 (64-bit)	6ED1058-0BA08-0YA1
LOGO! 24RCE Logic module, display PS/I/O: 24 V AC/24 V DC/relay, 8 DI/4 DO, SP, 400 blocks, modularly expandable, Ethernet, integrated web server, data log, user-defined web pages, standard microSD card for LOGO! Soft Comfort from V8.4, older projects executable, cloud connection, MQTT in all LOGO! 8.4 basic devices	6ED1052-1HB08-0BA2	LOGO! Starter Kits	
LOGO! 230RCE Logic module, display PS/I/O: 115 V/230 V/relay, 8 DI/4 DO, SP, 400 blocks, modularly expandable, Ethernet, integrated web server, data log, user-defined web pages, standard microSD card for LOGO! Soft Comfort from V8.4, older projects executable, cloud connection, MQTT in all LOGO! 8.4 basic devices	6ED1052-1FB08-0BA2	LOGO! Starter Kit 12/24RCE V8.3 With LOGO! 12/24RCE, LOGO! Soft Comfort, WinCC Basic, power supply, screwdriver, in Systainer	6ED1057-3BA01-0AA8
		LOGO! Starter Kit 230RCE V8.3 With LOGO! 230RCE, LOGO! Soft Comfort, WinCC Basic, screwdriver in Systainer	6ED1057-3BA03-0AA8
		LOGO! TD Starter Kit 12/24 V8.3 With LOGO! TD, LOGO! 12/24RCEo, LOGO! Soft Comfort, power supply, WinCC Basic, screwdriver in Systainer	6ED1057-3BA11-0AA8
		Front panel mounting kit	
		SIPLUS LOGO! front panel mounting kit 4 U	6AG1057-1AA00-0AA3
		For LOGO!+SIPLUS extreme with buttons, -40...+70 °C,	
		SIPLUS LOGO! front panel mounting kit 8 U	6AG1057-1AA00-0AA2
		For LOGO!+SIPLUS extreme with buttons, -40...+70 °C,	
		LOGO! ICL230 Inrush current limiter	6EP4683-6LB00-0AY0
		Input: 100-240 V AC Output: 100-240 V AC/5 A	

LOGO! logic module

LOGO! basic and expansion modules

LOGO! basic modules with display**Technical specifications**

Article number	6ED1052-1CC08-0BA2 LOGO! 24CE, 8DI(4AI)/4DO, 400 Blocks	6ED1052-1MD08-0BA2 LOGO!12/24RCE, 8DI(4AI)/4DO, 400 Blocks	6ED1052-1HB08-0BA2 LOGO! 24RCE, 8DI/4DO, 400 Blocks	6ED1052-1FB08-0BA2 LOGO!230RCE, 8DI/4DO, 400 Blocks
Display				
with display	Yes	Yes	Yes	Yes
Installation type/mounting				
Mounting	on 35 mm DIN rail, 4 spacing units wide	on 35 mm DIN rail, 4 spacing units wide	on 35 mm DIN rail, 4 spacing units wide	on 35 mm DIN rail, 4 spacing units wide
Supply voltage				
Rated value (DC)				
• 12 V DC		Yes		
• 24 V DC	Yes	Yes	Yes	
• 115 V DC				Yes
• 230 V DC				Yes; 240 V DC
Rated value (AC)				
• 24 V AC			Yes	
• 115 V AC				Yes
• 230 V AC				Yes; 240 V AC
Time of day				
Time switching clocks				
• Number	400; Max. 400, function-specific	400; Max. 400, function-specific	400; Max. 400, function-specific	400; Max. 400, function-specific
• Power reserve	480 h	480 h	480 h	480 h
Digital inputs				
Number of digital inputs	8; Of which 4 can be used in analog mode (0 to 10 V)	8; Of which 4 can be used in analog mode (0 to 10 V)	8	8
Digital outputs				
Number of digital outputs	4; Transistor	4; Relays	4; Relays	4; Relays
Short-circuit protection	Yes; electrical (1 A)	No; external fusing necessary	No; external fusing necessary	No; external fusing necessary
Output current				
• for signal "I" permissible range for 0 to 55 °C, max.	0.3 A	10 A		
Relay outputs				
Switching capacity of contacts				
- with inductive load, max.		3 A	3 A	3 A
- with resistive load, max.		10 A	10 A	10 A
EMC				
Emission of radio interference acc. to EN 55 011				
• Limit class B, for use in residential areas	Yes; Radio interference suppression according to EN55011, Limit Value Class B	Yes; Radio interference suppression according to EN55011, Limit Value Class B	Yes; Radio interference suppression according to EN55011, Limit Value Class B	Yes; Radio interference suppression according to EN55011, Limit Value Class B
Standards, approvals, certificates				
CE mark	Yes	Yes	Yes	Yes
CSA approval	No; covered by UL cert	No; covered by UL cert	No; covered by UL cert	No; covered by UL cert
UL approval	Yes	Yes	Yes	Yes
FM approval	Yes	Yes	Yes	Yes
developed in accordance with IEC 61131	Yes	Yes	Yes	Yes
according to VDE 0631	Yes	Yes	Yes	Yes
Marine approval	Yes; Available soon	Yes; Available soon	Yes; Available soon	Yes; Available soon
Ambient conditions				
Ambient temperature during operation				
• min.	-20 °C; No condensation	-20 °C; No condensation	-20 °C; No condensation	-20 °C; No condensation
• max.	55 °C	55 °C	55 °C	55 °C
Altitude during operation relating to sea level				
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Dimensions				
Width	71.5 mm	71.5 mm	71.5 mm	71.5 mm
Height	90 mm	90 mm	90 mm	90 mm
Depth	60 mm	60 mm	60 mm	60 mm

Overview



- Basic versions optimized for costs
- Interface for the connection of expansion modules, up to 24 digital inputs, 20 digital outputs, 8 analog inputs and 8 analog outputs can be addressed
- With connection option for LOGO! TDE text display
- All basic devices with integrated web server for TD-based web pages and/or user-defined web pages
- Enclosure width 72 mm (4 U)
- All basic units with Ethernet interface for communication with LOGO! 8, LOGO! TDE, SIMATIC Controllers, SIMATIC Panels and PCs
- Use of standard micro SD cards

2

Ordering data

LOGO! 8 logic module

LOGO! 24CEo

Logic module, without display, PS/I/O: 24 V/24 V/24 V trans., 8 DI (4 AI)/4 DO, memory 400 blocks, modularly expandable, Ethernet, integrated web server, data log, user-defined web pages, standard microSD card for LOGO! Soft Comfort from V8.4, older projects executable, cloud connection, MQTT in all LOGO! 8.4 basic devices

LOGO! 12/24RCEO

Logic module, without display, PS/I/O: 12/24 V DC/relay, 8 DI (4 AI)/4 DO, memory 400 blocks, modularly expandable, Ethernet, integrated web server, data log, user-defined web pages, standard microSD card for LOGO! Soft Comfort from V8.4, older projects executable, cloud connection, MQTT in all LOGO! 8.4 basic devices

LOGO! 24RCEO (AC)

Logic module, without display, PS/I/O: 24 V DC/24 V AC/relay, 8 DI/4 DO, memory 400 blocks, modularly expandable, Ethernet, integrated web server, data log, user-defined web pages, standard microSD card for LOGO! Soft Comfort from V8.4, older projects executable, cloud connection, MQTT in all LOGO! 8.4 basic devices

LOGO! 230RCEo

Logic module, without display, PS/I/O: 115 V/230 V/relay, 8 DI/4 DO, memory 400 blocks, modularly expandable, Ethernet, integrated web server, data log, user-defined web pages, standard microSD card for LOGO! Soft Comfort from V8.4, older projects executable, cloud connection, MQTT in all LOGO! 8.4 basic devices

Article No.

6ED1052-2CC08-0BA2

6ED1052-2MD08-0BA2

6ED1052-2HB08-0BA2

6ED1052-2FB08-0BA2

Article No.

Accessories

LOGO! TD text display

6 lines, 3 background colors, 2 Ethernet ports, mounting accessories for LOGO! 8

LOGO! SOFT Comfort V8

Single license for 1 installation E-SW, LWEE, Integrity Test Tool, SW and documentation on DVD, 6 languages, executable under Windows XP, 7, 8, 10 (32 and 64-bit) and Windows 11, Mac OSx 10.14 Mojave, Mac OS 10.15 Big Sur, Mac OS 12.1 Monterey, Linux SUSE 15 (64-bit)

LOGO! Starter Kits

LOGO! Starter Kit 12/24RCE V8.3

With LOGO! 12/24RCE, LOGO! Soft Comfort, WinCC Basic, power supply, screwdriver, in Systainer

LOGO! Starter Kit 230RCE V8.3

With LOGO! 230RCE, LOGO! Soft Comfort, WinCC Basic, screwdriver in Systainer

LOGO! TD Starter Kit 12/24 V8.3

With LOGO! TD, LOGO! 12/24RCEo, LOGO! Soft Comfort, power supply, WinCC Basic, screwdriver in Systainer

LOGO! ICL230 Inrush current limiter

Input: 100-240 V AC
Output: 100-240 V AC/5 A

6ED1055-4MH08-0BA1

6ED1058-0BA08-0YA1

6ED1057-3BA01-0AA8

6ED1057-3BA03-0AA8

6ED1057-3BA11-0AA8

6EP4683-6LB00-0AY0

LOGO! logic module

LOGO! basic and expansion modules

LOGO! basic modules without display**Technical specifications**

Article number	6ED1052-2CC08-0BA2 LOGO! 24CEo, 8DI(4AI)/4DO, 400 Blocks	6ED1052-2MD08-0BA2 LOGO!12/24RCEO, 8DI(4AI)/4DO,400 Blocks	6ED1052-2HB08-0BA2 LOGO! 24RCEO, 8DI/4DO, 400 Blocks	6ED1052-2FB08-0BA2 LOGO!230RCEO, 8DI/4DO,400 Blocks
Installation type/mounting				
Mounting	on 35 mm DIN rail, 4 spacing units wide	on 35 mm DIN rail, 4 spacing units wide	on 35 mm DIN rail, 4 spacing units wide	on 35 mm DIN rail, 4 spacing units wide
Supply voltage				
Rated value (DC)		Yes	Yes	Yes
• 12 V DC	Yes	Yes	Yes	Yes
• 24 V DC				Yes
• 115 V DC				Yes; 240 V DC
• 230 V DC				
Rated value (AC)			Yes	
• 24 V AC				Yes
• 115 V AC				Yes
• 230 V AC				Yes; 240 V AC
Time of day				
Time switching clocks				
• Number	400; Max. 400, function-specific	400; Max. 400, function-specific	400; Max. 400, function-specific	400; Max. 400, function-specific
• Power reserve	480 h	480 h	480 h	480 h
Digital inputs				
Number of digital inputs	8; Of which 4 can be used in analog mode (0 to 10 V)	8; Of which 4 can be used in analog mode (0 to 10 V)	8	8
Digital outputs				
Number of digital outputs	4; Transistor	4; Relays	4; Relays	4; Relays
Short-circuit protection	Yes; electrical (1 A)	No; external fusing necessary	No; external fusing necessary	No; external fusing necessary
Output current				
• for signal ** permissible range for 0 to 55 °C, max.	0.3 A	10 A		
Relay outputs				
Switching capacity of contacts				
- with inductive load, max.		3 A	3 A	3 A
- with resistive load, max.		10 A	10 A	10 A
EMC				
Emission of radio interference acc. to EN 55 011				
• Limit class B, for use in residential areas	Yes; Radio interference suppression according to EN55011, Limit Value Class B	Yes; Radio interference suppression according to EN55011, Limit Value Class B	Yes; Radio interference suppression according to EN55011, Limit Value Class B	Yes; Radio interference suppression according to EN55011, Limit Value Class B
Standards, approvals, certificates				
CE mark	Yes	Yes	Yes	Yes
CSA approval	No; covered by UL cert	No; covered by UL cert	No; covered by UL cert	No; covered by UL cert
UL approval	Yes	Yes	Yes	Yes
FM approval	Yes	Yes	Yes	Yes
developed in accordance with IEC 61131	Yes	Yes	Yes	Yes
according to VDE 0631	Yes	Yes	Yes	Yes
Marine approval	Yes; Available soon	Yes; Available soon	Yes; Available soon	Yes; Available soon
Ambient conditions				
Ambient temperature during operation				
• min.	-20 °C; No condensation	-20 °C; No condensation	-20 °C; No condensation	-20 °C; No condensation
• max.	55 °C	55 °C	55 °C	55 °C
Altitude during operation relating to sea level				
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Dimensions				
Width	71.5 mm	71.5 mm	71.5 mm	71.5 mm
Height	90 mm	90 mm	90 mm	90 mm
Depth	58 mm	58 mm	58 mm	58 mm

Overview



- Expansion modules for connection to LOGO! Modular
- With digital inputs and outputs, analog inputs, or analog outputs

2

Ordering data

Ordering data	Article No.	Ordering data	Article No.
LOGO! 8 expansion modules		LOGO! AM2	6ED1055-1MA00-0BA2
LOGO! DM8 24 Expansion module, PS/I/O: 24 V/24 V/trans., 4 DI/4 DO for LOGO! 8	6ED1055-1CB00-0BA2	Expansion module, PS/: 12/24 V DC, 2 AI, 0-10 V or 0/4-20 mA for LOGO! 8	
LOGO! DM16 24 Expansion module, PS/I/O: 24 V DC/24 V DC/trans., 8 DI/8 DO, 4 U for LOGO! 8	6ED1055-1CB10-0BA2	LOGO! AM2 RTD Expansion module, PS: 12/24 V DC, 2 AI -50...+200 °C Pt100/1000 for LOGO! 8	6ED1055-1MD00-0BA2
LOGO! DM8 12/24R Expansion module, PS/I/O: 12, 24 V/12 V/24 V/relay, 2 U, 4 DI/4 DO for LOGO! 8	6ED1055-1MB00-0BA2	LOGO! AM2 AQ Expansion module, PS: 24 V DC, 2 AO, 0-10 V, 0/4-20 mA for LOGO! 8	6ED1055-1MM00-0BA2
LOGO! DM8 24R Expansion module, PS/I/O: 24 V/24 V/relay, 2 U 4 DI/4 DO, AC/DC/NPN input for LOGO! 8	6ED1055-1HB00-0BA2	Accessories for LOGO! 8	
LOGO! DM16 24R Expansion module, PS/I/O: 24 V DC/24 V DC/relay, 8 DI/8 DO, 4 U for LOGO! 8	6ED1055-1NB10-0BA2	LOGO! SOFT Comfort V8 Single license for 1 installation E-SW, LWE, Integrity Test Tool, SW and documentation on DVD, 6 languages, executable under Windows XP, 7, 8, 10 (32 and 64-bit) and Windows 11, Mac OSx 10.14 Mojave, Mac OS 10.15 Big Sur, Mac OS12:1 Monterey, Linux SUSE 15 (64-bit)	6ED1058-0BA08-0YA1
LOGO! DM8 230R Expansion module, PS/I/O: 230 V/230 V/relay, 2 U, 4 DI/4 DO for LOGO! 8	6ED1055-1FB00-0BA2	LOGO! ICL230 Inrush current limiter Input: 100-240 V AC Output: 100-240 V AC/5 A	6EP4683-6LB00-0AY0
LOGO! DM16 230R Expansion module, PS/I/O: 230 V/230 V/relay, 4 U, 8 DI/8 DO for LOGO! 8	6ED1055-1FB10-0BA2		

LOGO! logic module

LOGO! basic and expansion modules

LOGO! expansion modules**Technical specifications**

Article number	6ED1055-1CB00-0BA2 LOGO! DM8 24 Exp. mod., 4DI/4DO	6ED1055-1HB00-0BA2 LOGO! DM8 24R Exp. mod. 2 MW, 4DI/4DO	6ED1055-1MB00-0BA2 LOGO! DM8 12/24R Exp. mod. 2 MW, 4DI/DO	6ED1055-1FB00-0BA2 LOGO! DM8 230R Exp. mod. 2 MW, 4DI/4DO
Installation type/mounting	on 35 mm DIN rail, 2 spacing units wide			
Mounting	on 35 mm DIN rail, 2 spacing units wide	on 35 mm DIN rail, 2 spacing units wide	on 35 mm DIN rail, 2 spacing units wide	on 35 mm DIN rail, 2 spacing units wide
Supply voltage				
Rated value (DC)				
• 12 V DC	Yes	Yes	Yes	Yes
• 24 V DC			Yes	
• 115 V DC				
• 230 V DC				
Rated value (AC)				
• 24 V AC	Yes	Yes		Yes
• 115 V AC				Yes
• 230 V AC				Yes
Line frequency				
• permissible range, lower limit		47 Hz		47 Hz
• permissible range, upper limit		63 Hz		63 Hz
Digital inputs				
Number of digital inputs	4	4	4	4
Input voltage				
• Type of input voltage	DC	AC/DC	DC	AC/DC
• for signal "0"	< 5 V DC	< 5 V AC/DC	< 5 V DC	< 40 V AC, < 30 V DC
• for signal "1"	> 12 V DC	> 12 V AC/DC	> 8.5 V	> 79 V AC, > 79 V DC
Input current				
• for signal "0", max. (permissible quiescent current)	0.88 mA	1.1 mA	0.88 mA	0.06 mA; 0.05 mA with AC, 0.06 mA with DC
• for signal "1", typ.	2.1 mA	2.63 mA	1.5 mA	0.13 mA
Input delay (for rated value of input voltage)				
for standard inputs				
- at "0" to "1", max.	1.5 ms	1.5 ms	1.5 ms	40 ms
- at "1" to "0", max.	1.5 ms	15 ms	1.5 ms	75 ms
Digital outputs				
Number of digital outputs	4	4; Relays	4; Relays	4; Relays
Short-circuit protection	Yes	No	No	No
Controlling a digital input		Yes	Yes	Yes
Switching capacity of the outputs				
• on lamp load, max.		1 000 W	1 000 W	1 000 W; 500 W at 115V AC
Parallel switching of two outputs				
• for uprating	No	No	No	No
Switching frequency				
• with resistive load, max.	10 Hz	2 Hz	2 Hz	2 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz
• mechanical, max.		10 Hz	10 Hz	10 Hz
Relay outputs				
Switching capacity of contacts				
- with inductive load, max.		3 A	3 A	3 A
- with resistive load, max.		5 A	5 A	5 A
EMC				
Emission of radio interference acc. to EN 55 011				
• Limit class B, for use in residential areas	Yes	Yes	Yes	Yes
Degree and class of protection				
IP degree of protection	IP20	IP20	IP20	IP20

Technical specifications

Article number	6ED1055-1CB00-0BA2 LOGO! DM8 24 Exp. mod., 4DI/4DO	6ED1055-1HB00-0BA2 LOGO! DM8 24R Exp. mod. 2 MW, 4DI/4DO	6ED1055-1MB00-0BA2 LOGO! DM8 12/24R Exp. mod. 2 MW, 4DI/DO	6ED1055-1FB00-0BA2 LOGO! DM8 230R Exp. mod. 2 MW, 4DI/4DO
Standards, approvals, certificates				
CE mark	Yes	Yes	Yes	Yes
CSA approval	Yes	Yes	Yes	Yes
UL approval	Yes	Yes	Yes	Yes
FM approval	Yes	Yes	Yes	Yes
developed in accordance with IEC 61131	Yes	Yes	Yes	Yes
according to VDE 0631	Yes	Yes		Yes
Marine approval	Yes	Yes	Yes	Yes
Ambient conditions				
Ambient temperature during operation				
• min.	0 °C; ES03 and higher: -20 °C	0 °C; ES03 and higher: -20 °C	0 °C; ES03 and higher: -20 °C	0 °C; ES03 and higher: -20 °C
• max.	55 °C	55 °C	55 °C	55 °C
Dimensions				
Width	35.5 mm	35.5 mm	35.5 mm	35.5 mm
Height	90 mm	90 mm	90 mm	90 mm
Depth	58 mm	58 mm	58 mm	58 mm
<hr/>				
Article number	6ED1055-1CB10-0BA2 LOGO! DM16 24 Exp. mod., 4 MW, 8DI/8DO	6ED1055-1NB10-0BA2 LOGO! DM16 24R Exp. mod. 4 MW, 8DI/8DO	6ED1055-1FB10-0BA2 LOGO! DM16 230R Exp. mod. 4 MW, 8DI/8DO	
Installation type/mounting				
Mounting	on 35 mm DIN rail, 4 spacing units wide	on 35 mm DIN rail, 4 spacing units wide	on 35 mm DIN rail, 4 spacing units wide	
Supply voltage				
Rated value (DC)	Yes	Yes	Yes Yes	
• 24 V DC				
• 115 V DC				
Rated value (AC)	No	No	Yes Yes	
• 24 V AC				
• 115 V AC				
• 230 V AC			Yes Yes	
Line frequency				
• permissible range, lower limit			47 Hz	
• permissible range, upper limit			63 Hz	
Digital inputs				
Number of digital inputs	8	8	8	
Input voltage				
• Type of input voltage	DC	DC	AC/DC	
• for signal "0"	< 5 V DC	< 5 V DC	< 40 V AC, < 30 V DC	
• for signal "1"	> 12 V DC	> 12 V DC	> 79 V AC, > 79 V DC	
Input current				
• for signal "0", max. (permissible quiescent current)	0.85 mA	0.85 mA	0.06 mA; 0.05 mA with AC, 0.06 mA with DC	
• for signal "1", typ.	2 mA	2 mA	0.13 mA	
Input delay (for rated value of input voltage)				
for standard inputs				
- at "0" to "1", max.	1.5 ms	1.5 ms	40 ms	
- at "1" to "0", max.	1.5 ms	1.5 ms	75 ms	

LOGO! logic module

LOGO! basic and expansion modules

LOGO! expansion modules**Technical specifications**

Article number	6ED1055-1CB10-0BA2 LOGO! DM16 24 Exp. mod., 4 MW, 8DI/8DO	6ED1055-1NB10-0BA2 LOGO! DM16 24R Exp. mod. 4 MW, 8DI/8DO	6ED1055-1FB10-0BA2 LOGO! DM16 230R Exp. mod. 4 MW, 8DI/8DO
Digital outputs			
Number of digital outputs	8	8; Relays	8; Relays
Short-circuit protection	Yes	No	No
Controlling a digital input		Yes	Yes
Switching capacity of the outputs			
• on lamp load, max.		1 000 W	1 000 W; 500 W at 115V AC
Parallel switching of two outputs			
• for uprating	No	No	No
Switching frequency			
• with resistive load, max.	10 Hz	2 Hz	2 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz	0.5 Hz
• mechanical, max.		10 Hz	10 Hz
Relay outputs			
Switching capacity of contacts			
- with inductive load, max.		3 A	3 A
- with resistive load, max.		5 A	5 A
EMC			
Emission of radio interference acc. to EN 55 011			
• Limit class B, for use in residential areas	Yes	Yes	Yes
Degree and class of protection			
IP degree of protection	IP20	IP20	IP20
Standards, approvals, certificates			
CE mark	Yes	Yes	Yes
CSA approval	Yes	Yes	Yes
UL approval	Yes	Yes	Yes
FM approval	Yes	Yes	Yes
developed in accordance with IEC 61131	Yes	Yes	Yes
according to VDE 0631	Yes	Yes	Yes
Marine approval	Yes	Yes	Yes
Ambient conditions			
Ambient temperature during operation			
• min.	0 °C; ES03 and higher: -20 °C	0 °C; ES03 and higher: -20 °C	0 °C; ES03 and higher: -20 °C
• max.	55 °C	55 °C	55 °C
Dimensions			
Width	71.5 mm	71.5 mm	71.5 mm
Height	90 mm	90 mm	90 mm
Depth	58 mm	58 mm	58 mm

Technical specifications

Article number	6ED1055-1MA00-0BA2 LOGO! AM2 Exp. mod., 12/24V, 2AI	6ED1055-1MD00-0BA2 LOGO! AM2 RDT, 2AI, -50..+200DECR/C
Installation type/mounting		
Mounting	on 35 mm DIN rail, 2 spacing units wide	on 35 mm DIN rail, 2 spacing units wide
Supply voltage		
Rated value (DC)		
• 12 V DC	Yes; 10.8 V DC to 28.8 V DC	Yes; 10.8 V DC to 28.8 V DC
• 24 V DC	Yes; 10.8 V DC to 28.8 V DC	Yes; 10.8 V DC to 28.8 V DC
Analog inputs		
Number of analog inputs	2	2; 2 or 3 wire connection
Input ranges		
• Voltage	Yes	No
• Current	Yes	No
• Resistance thermometer	No	Yes; For PT100/PT1000 sensors
Input ranges (rated values), voltages		
• 0 to +10 V	Yes	No
Input ranges (rated values), currents		
• 0 to 20 mA	Yes; 0 mA or 4 mA to 20 mA	No
Input ranges (rated values), resistance thermometer		
• Pt 100	No	Yes
EMC		
Emission of radio interference acc. to EN 55 011		
• Limit class B, for use in residential areas	Yes	Yes
Degree and class of protection		
IP degree of protection	IP20	IP20
Standards, approvals, certificates		
CE mark	Yes	Yes
CSA approval	Yes	Yes
UL approval	Yes	Yes
FM approval	Yes	Yes
developed in accordance with IEC 61131	Yes	Yes
according to VDE 0631	Yes	
Marine approval	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	0 °C; ES03 and higher: -20 °C	0 °C; ES03 and higher: -20 °C
• max.	55 °C	55 °C
Dimensions		
Width	35.5 mm	35.5 mm
Height	90 mm	90 mm
Depth	58 mm	58 mm

LOGO! logic module

LOGO! basic and expansion modules

LOGO! expansion modules**Technical specifications**

Article number	6ED1055-1MM00-0BA2 LOGO! AM2 AQ, 2AQ, 0-10V, 0/4-20mA
Installation type/mounting	
Mounting	on 35 mm DIN rail, 2 spacing units wide
Supply voltage	
Rated value (DC)	24 V
Analog outputs	
Number of analog outputs	2
Output ranges, voltage	
• 0 to 10 V	Yes
Output ranges, current	
• 0 to 20 mA	Yes
• 4 mA to 20 mA	Yes
EMC	
Emission of radio interference acc. to EN 55 011	
• Limit class B, for use in residential areas	Yes
Degree and class of protection	
IP degree of protection	IP20

Article number	6ED1055-1MM00-0BA2 LOGO! AM2 AQ, 2AQ, 0-10V, 0/4-20mA
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
FM approval	Yes
developed in accordance with IEC 61131	Yes
according to VDE 0631	Yes
Marine approval	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C; ES03 and higher: -20 °C
• max.	55 °C
Dimensions	
Width	35.5 mm
Height	90 mm
Depth	58 mm

2

Overview



- The space-saving basic versions
- Interface for connecting expansion modules, up to 24 digital inputs, 20 (16) digital outputs, 8 analog inputs and 8 (2) analog outputs can be addressed
- With connection option for LOGO! TD text display (can be connected to all LOGO! 0BA6 and 0BA7 basic variants); LOGO! TDE can be connected to LOGO! 8 or higher

New for LOGO! 8

- All basic units with integrated web server
- Same enclosure width as LOGO! 0BA6 (4 U)
- All basic units with Ethernet interface for communication with LOGO!, SIMATIC Controllers, SIMATIC Panel and PC
- Use of standard micro SD cards

LOGO! 0BA7 versions:

- Ethernet interface for communication with SIMATIC Controllers, SIMATIC Panel and PC
- Networking of max. 8 LOGO! devices
- Use of standard SD card or SIMATIC Memory Card

Note:

SIPLUS LOGO! 6/7 versions are not compatible with SIPLUS LOGO! 8.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS LOGO! 8 logic module

SIPLUS LOGO! 24CE

24 V DC supply voltage, 8 digital inputs 24 V DC, of which 4 can be used in analog mode (0 to 10 V), 4 digital outputs 24 V DC, 0.3 A, integrated time switch, Ethernet interface; 400 function blocks can be inter-linked, modular expansion capability

Extended temperature range and exposure to environmental substances

6AG1052-1CC08-7BA1

SIPLUS LOGO! 12/24RCE

12...24 V DC supply voltage, 8 digital inputs 12/24 V DC, of which 4 can be used in analog mode (0 to 10 V), 4 relay outputs 10 A, integrated time switch, Ethernet interface; 400 function blocks can be inter-linked, modular expansion capability

Extended temperature range and exposure to environmental substances

6AG1052-1MD08-7BA1

SIPLUS LOGO! 24RCE

24 V AC/DC supply voltage, 8 digital inputs 24 V AC/DC, 4 relay outputs 10 A, integrated time switch, Ethernet interface; 400 function blocks can be inter-linked, modular expansion capability

Extended temperature range and exposure to environmental substances

6AG1052-1HB08-7BA1

SIPLUS LOGO! 230RCE

115...230 V AC/DC supply voltage, 8 digital inputs 115...230 V AC/DC, 4 relay outputs 10 A, integrated time switch, Ethernet interface; 400 function blocks can be inter-linked, modular expansion capability

Extended temperature range and exposure to environmental substances

6AG1052-1FB08-7BA1

Accessories

SIPLUS LOGO! TDE

(Extended temperature range -25 ... +60 °C (start-up -20 °C) and exposure to environmental substances)

6-line text display, can be connected to all LOGO! 8 variants with and without display, with 2 Ethernet interfaces; incl. installation accessories. Requires additional 12 V DC or 24 V AC/DC power supply

6AG1055-4MH08-2BA1

LOGO!Soft Comfort V8

For programming on the PC in LAD/FBD; executes on Windows 8, 7, XP, Linux and Mac OSX; on DVD

6ED1058-0BA08-0YA1

Front panel mounting kit

Width 8 U, with keys

6AG1057-1AA00-0AA2

LOGO! logic module

LOGO! basic and expansion modules

SIPLUS LOGO! basic modules with display

Technical specifications

Article number	6AG1052-1CC08-7BA1	6AG1052-1MD08-7BA1	6AG1052-1FB08-7BA1	6AG1052-1HB08-7BA1
Based on	6ED1052-1CC08-0BA1	6ED1052-1MD08-0BA1	6ED1052-1FB08-0BA1	6ED1052-1HB08-0BA1
	SIPLUS LOGO! 24CE	SIPLUS LOGO! 12/24RCE	SIPLUS LOGO! 230RCE	SIPLUS LOGO! 24RCE
Ambient conditions				
Ambient temperature during operation				
• min.	-25 °C; = Tmin; Startup @ -20 °C	-25 °C; = Tmin; Startup @ -20 °C	-25 °C; = Tmin; Startup @ -20 °C	-25 °C; = Tmin; Startup @ -20 °C
• max.	60 °C; = Tmax	60 °C; Tmax; Tmax > +55 °C max. load 1 A per relay or max. load 3 A per relay and half the number of DIs (no adjacent points)	60 °C; Tmax; Tmax > +55 °C max. load 1 A per relay	70 °C; Tmax; Tmax > +55 °C max. load 1 A per relay or max. load 3 A per relay and half the number of DIs (no adjacent points)
• At cold restart, min.	-20 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)	-20 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)	-20 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)	-20 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	2 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

Technical specifications

Article number	6AG1052-1CC08-7BA1	6AG1052-1MD08-7BA1	6AG1052-1FB08-7BA1	6AG1052-1HB08-7BA1
Based on	6ED1052-1CC08-0BA1	6ED1052-1MD08-0BA1	6ED1052-1FB08-0BA1	6ED1052-1HB08-0BA1
	SIPLUS LOGO! 24CE	SIPLUS LOGO! 12/24RCE	SIPLUS LOGO! 230RCE	SIPLUS LOGO! 24RCE
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

LOGO! logic module

LOGO! basic and expansion modules

SIPLUS LOGO! basic modules without display

Overview



- Basic versions optimized for costs
- Interface for connecting expansion modules, up to 24 digital inputs, 16 (20) digital outputs, 8 analog inputs and 2 (8) analog outputs can be addressed
- With connection option for LOGO! TD text display (can be connected to all LOGO! 0BA6 basic variants)

New for SIPLUS LOGO! 8

- All basic units with integrated web server
- Same enclosure width as SIPLUS LOGO! 0BA6 (4 U)
- All basic units with Ethernet interface for communication with LOGO!, SIMATIC Controllers, SIMATIC Panel and PC
- Use of standard micro SD cards

Note:

SIPLUS LOGO! 6 versions are not compatible with SIPLUS LOGO! 8.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS LOGO! 8 logic module

SIPLUS LOGO! 24CEo

24 V DC supply voltage
8 digital inputs 24 V DC,
of which 4 can be used in
analog mode (0 to 10 V)
4 digital outputs 24 V DC, 0.3 A,
Integrated time switch
Ethernet interface;
without display and keyboard
400 function blocks can be interlinked,
modular expansion capability

Extended temperature range and
exposure to environmental
substances

6AG1052-2CC08-7BA1

SIPLUS LOGO! 230RCEo

115...230 V AC/DC supply voltage
8 digital inputs 115...230 V AC/DC
4 relay outputs 10 A
Integrated time switch
Ethernet interface;
without display or keyboard
400 function blocks can be interlinked,
modular expansion capability

Extended temperature range and
exposure to environmental
substances

6AG1052-2FB08-7BA1

SIPLUS LOGO! 24RCEo

24 V AC/DC supply voltage,
8 digital inputs 24 V AC/DC,
4 relay outputs 10 A,
integrated time switch,
Ethernet interface;
without display or keyboard;
400 function blocks can be interlinked,
modular expansion capability

Extended temperature range and
exposure to environmental
substances

6AG1052-2HB08-7BA1

SIPLUS LOGO! 12/24RCEo

12...24 V DC supply voltage
8 digital inputs 12...24 V DC,
of which 4 can be used in
analog mode (0 to 10 V)
4 relay outputs 10 A
Integrated time switch
Ethernet interface;
without display and keyboard
400 function blocks can be interlinked,
modular expansion capability

Extended temperature range and
exposure to environmental
substances

6AG1052-2MD08-7BA1

Accessories

SIPLUS LOGO! TDE

(Extended temperature range
-25 ... +60 °C (start-up -20 °C) and
exposure to environmental
substances)

6-line text display, can be
connected to all LOGO! 8
variants with and without display,
with 2 Ethernet interfaces; incl.
installation accessories.
Requires additional 12 V DC or
24 V AC/DC power supply

6AG1055-4MH08-2BA1

LOGO!Soft Comfort V8

For programming on the PC in
LAD/FBD; executes on
Windows 8, 7, XP, Linux and
Mac OSX; on DVD

6ED1058-0BA08-0YA1

Front panel mounting kit

Width 8 U, with keys

6AG1057-1AA00-0AA2

Technical specifications

Article number	6AG1052-2CC08-7BA1	6AG1052-2MD08-7BA1	6AG1052-2HB08-7BA1	6AG1052-2FB08-7BA1
Based on	6ED1052-2CC08-0BA1 SIPLUS LOGO! 24CEO	6ED1052-2MD08-0BA1 SIPLUS LOGO! 12/24RCEO	6ED1052-2HB08-0BA1 SIPLUS LOGO! 24RCEO (AC)	6ED1052-2FB08-0BA1 SIPLUS LOGO! 230RCEO
Ambient conditions				
Ambient temperature during operation				
• min.	-40 °C; = Tmin; Startup @ -25 °C	-40 °C; = Tmin; Startup @ -25 °C	-40 °C; = Tmin; Startup @ -25 °C	-40 °C; = Tmin; Startup @ -25 °C
• max.	70 °C; Tmax; Tmax > +55 °C max. load 0.2 A per output	70 °C; Tmax; Tmax > +55 °C max. load 1 A per relay or max. load 3 A per relay and half the number of DIs (no adjacent points)	70 °C; Tmax; Tmax > +55 °C max. load 1 A per relay or max. load 3 A per relay and half the number of DIs (no adjacent points)	70 °C; Tmax; Tmax > +55 °C max. load 1 A per relay
• At cold restart, min.	-25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)	-25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)	-25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)	-25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

LOGO! logic module

LOGO! basic and expansion modules

SIPLUS LOGO! basic modules without display**Technical specifications**

Article number	6AG1052-2CC08-7BA1	6AG1052-2MD08-7BA1	6AG1052-2HB08-7BA1	6AG1052-2FB08-7BA1
Based on	6ED1052-2CC08-0BA1 SIPLUS LOGO! 24CEO	6ED1052-2MD08-0BA1 SIPLUS LOGO! 12/24RCEO	6ED1052-2HB08-0BA1 SIPLUS LOGO! 24RCEO (AC)	6ED1052-2FB08-0BA1 SIPLUS LOGO! 230RCEO
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview


- Expansion modules for connection to LOGO! Modular
- With digital inputs and outputs, analog inputs, or analog outputs

Note:

SIPLUS LOGO! 6 versions are not compatible with SIPLUS LOGO! 8.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data
Article No.

SIPLUS LOGO! 8 expansion modules	
SIPLUS LOGO! DM8 24 24 V DC supply voltage, 4 digital inputs 24 V DC, 4 digital outputs 24 V DC, 0.3 A Extended temperature range and exposure to environmental substances	6AG1055-1CB00-7BA2
SIPLUS LOGO! DM8 230R 115...230 V AC/DC supply voltage, 4 digital inputs 115...230 V AC/DC, 4 relay outputs 5 A Extended temperature range and exposure to environmental substances	6AG1055-1FB00-7BA2
SIPLUS LOGO! DM8 24R 24 V AC/DC supply voltage, 4 digital inputs 24 V AC/DC, 4 relay outputs 5 A Extended temperature range and exposure to environmental substances	6AG1055-1HB00-7BA2
SIPLUS LOGO! AM2 12...24 V DC supply voltage, 2 analog inputs 0 to 10 V or 0 to 20 mA, 10-bit resolution Extended temperature range and exposure to environmental substances	6AG1055-1MA00-7BA2
SIPLUS LOGO! DM8 12/24R 12...24 V DC supply voltage, 4 digital inputs 12...24 V DC, 4 relay outputs 5 A Extended temperature range and exposure to environmental substances	6AG1055-1MB00-7BA2
LOGO! AM2 RTD 12...24 V DC supply voltage, 2 analog inputs Pt100, temperature range -50 °C to 200 °C Extended temperature range and exposure to environmental substances	6AG1055-1MD00-7BA2
SIPLUS LOGO! AM2 AQ 24 V DC supply voltage, 2 analog outputs 0 to 10 V, 0/4 to 20 mA Extended temperature range and exposure to environmental substances	6AG1055-1MM00-7BA2
SIPLUS LOGO! DM16 24R 24 V DC supply voltage, 8 digital inputs 24 V DC, 8 relay outputs 5 A Extended temperature range and exposure to environmental substances	6AG1055-1NB10-7BA2
Accessories	
LOGO!Soft Comfort V8 For programming on the PC in LAD/FBD; executes on Windows 8, 7, XP, Linux and Mac OSX; on DVD	6ED1058-0BA08-0YA1
Front panel mounting kit Width 8 U, with keys	6AG1057-1AA00-0AA2

LOGO! logic module

LOGO! basic and expansion modules

SIPLUS LOGO! expansion modules

Technical specifications

Article number	6AG1055-1CB00-7BA2	6AG1055-1HB00-7BA2	6AG1055-1MB00-7BA2
Based on	6ED1055-1CB00-0BA2 SIPLUS LOGO! DM8 24 V8	6ED1055-1HB00-0BA2 SIPLUS LOGO! DM8 24R V8	6ED1055-1MB00-0BA2 SIPLUS LOGO! DM8 12/24R V8
Ambient conditions			
Ambient temperature during operation			
<ul style="list-style-type: none"> min. max. 	-40 °C; = Tmin; Startup @ -25 °C 70 °C; Tmax; Tmax > +55 °C max. load 0.2 A per output	-40 °C; = Tmin; Startup @ -25 °C 70 °C; = Tmax; Tmax > +55 °C max. load 3 A per relay or max. total current 10 A	-40 °C; = Tmin; Startup @ -25 °C 70 °C; = Tmax; Tmax > +55 °C max. load 3 A per relay or max. total current 10 A
<ul style="list-style-type: none"> At cold restart, min. 	-25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)	-25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)	-25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)
Altitude during operation relating to sea level			
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance			
Coolants and lubricants			
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

Technical specifications

Article number	6AG1055-1CB00-7BA2	6AG1055-1HB00-7BA2	6AG1055-1MB00-7BA2
Based on	6ED1055-1CB00-0BA2 SIPLUS LOGO! DM8 24 V8	6ED1055-1HB00-0BA2 SIPLUS LOGO! DM8 24R V8	6ED1055-1MB00-0BA2 SIPLUS LOGO! DM8 12/24R V8
Conformal coating			
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1055-1FB00-7BA2	6AG1055-1NB10-7BA2	
Based on	6ED1055-1FB00-0BA2 SIPLUS LOGO! DM8 230R V8	6ED1055-1NB10-0BA2 SIPLUS LOGO! DM16 24R V8	
Ambient conditions			
Ambient temperature during operation			
<ul style="list-style-type: none"> min. max. At cold restart, min. 	-40 °C; = Tmin; Startup @ -25 °C 70 °C; = Tmax; Tmax > +55 °C max. load 3 A per relay or max. total current 10 A -25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)	-40 °C; = Tmin; Startup @ -25 °C 70 °C; = Tmax; Tmax > +55 °C max. load 3 A per relay -25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)	
Altitude during operation relating to sea level			
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	
Relative humidity			
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	
Resistance			
Coolants and lubricants			
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	
Use in stationary industrial systems			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	
Use on ships/at sea			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	
Usage in industrial process technology			
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
Remark			
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	

LOGO! logic module

LOGO! basic and expansion modules

SIPLUS LOGO! expansion modules**Technical specifications**

Article number	6AG1055-1FB00-7BA2	6AG1055-1NB10-7BA2
Based on	6ED1055-1FB00-0BA2 SIPLUS LOGO! DM8 230R V8	6ED1055-1NB10-0BA2 SIPLUS LOGO! DM16 24R V8
Conformal coating		
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	<ul style="list-style-type: none"> Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A 	<ul style="list-style-type: none"> Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A
Article number	6AG1055-1MA00-7BA2	6AG1055-1MD00-7BA2
Based on	6ED1055-1MA00-0BA2 SIPLUS LOGO! AM2 V8	6ED1055-1MD00-0BA2 SIPLUS LOGO! AM2 RTD
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> min. max. At cold restart, min. 	<ul style="list-style-type: none"> -40 °C; = Tmin; Startup @ -25 °C 70 °C; = Tmax -25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions) 	<ul style="list-style-type: none"> -40 °C; = Tmin; Startup @ -25 °C 70 °C; = Tmax -25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions)
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	<ul style="list-style-type: none"> 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) 	<ul style="list-style-type: none"> 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance		
Coolants and lubricants		
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	<ul style="list-style-type: none"> Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * 	<ul style="list-style-type: none"> Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	<ul style="list-style-type: none"> Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * 	<ul style="list-style-type: none"> Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	<ul style="list-style-type: none"> Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil) 	<ul style="list-style-type: none"> Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

Technical specifications

Article number	6AG1055-1MA00-7BA2	6AG1055-1MD00-7BA2
Based on	6ED1055-1MA00-0BA2 SIPLUS LOGO! AM2 V8	6ED1055-1MD00-0BA2 SIPLUS LOGO! AM2 RTD
Conformal coating		
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	<ul style="list-style-type: none"> Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A 	<ul style="list-style-type: none"> Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A
Article number	6AG1055-1MM00-7BA2	6AG1055-1MM00-7BA2
Based on	6ED1055-1MM00-0BA2 SIPLUS LOGO! AM2 AQ V8	6ED1055-1MM00-0BA2 SIPLUS LOGO! AM2 AQ V8
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> min. max. At cold restart, min. 	<ul style="list-style-type: none"> -40 °C; = Tmin; Startup @ -25 °C 70 °C; = Tmax -25 °C; incl. condensation / frost permitted (no commissioning under condensation conditions) 	<ul style="list-style-type: none"> Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	<ul style="list-style-type: none"> 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) 	<ul style="list-style-type: none"> * The supplied plug covers must remain in place over the unused interfaces during operation!
Relative humidity		
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	<ul style="list-style-type: none"> 100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation 	
Resistance		
Coolants and lubricants		
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	<ul style="list-style-type: none"> Yes; Incl. diesel and oil droplets in the air 	
Use in stationary industrial systems		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	<ul style="list-style-type: none"> Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * 	
Use on ships/at sea		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	<ul style="list-style-type: none"> Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * 	
Article number	6AG1055-1MM00-7BA2	6AG1055-1MM00-7BA2
Based on	6ED1055-1MM00-0BA2	6ED1055-1MM00-0BA2
Usage in industrial process technology		
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 		<ul style="list-style-type: none"> Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A
Remark		
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 		
Conformal coating		
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 		

LOGO! logic module

LOGO! communications modules

LOGO! communications modules

Overview

2



- Communications modules for connecting LOGO! Modular to different bus systems.

Note on compatibility:

Communications module	Can be used with:
LOGO! CMK2000 communications module	LOGO! 8
LOGO! CIM	LOGO! 8
LOGO! CSM 12/24	LOGO! 7/8
LOGO! CMR2040	LOGO! 8

Overview


- Expansion module for LOGO! 8 basic versions
- For integrating LOGO! 8 in KNX installations
- With 24 digital inputs, 20 digital outputs as well as 8 analog inputs and outputs for processing process signals via KNX

Ordering data

LOGO! CMK2000
 Communications module to integrate the LOGO! 8 in the building system bus KNX; connection 24 V DC 0.04 A
 1 RJ45 port for Ethernet 50 communication objects time synchronization configuration/ diagnostics via web interface

Article No.
6BK1700-0BA20-0AA0
Technical specifications

Article number	6BK1700-0BA20-0AA0 LOGO! CMK2000
General information	
Firmware version	
• FW update possible	Yes
Installation type/mounting	
Mounting	on 35 mm DIN rail, 4 spacing units wide
Supply voltage	
Rated value (DC)	24 V
Input current	
Current consumption, max.	0.04 A
Power loss	
Power loss, max.	1.1 W
Memory	
Flash	Yes
Time of day	
Clock synchronization	
• supported	Yes

Article number	6BK1700-0BA20-0AA0 LOGO! CMK2000
Interfaces	
Number of industrial Ethernet interfaces	1; Ethernet, 1 port, RJ45
Number of other interfaces	1; EIB/KNX
Transmission rate, max.	100 Mbit/s over Ethernet, 9 600 bit/s over KNX
Design of plug-in connection	KNX terminal 0.6 mm ² - 1.0 mm ²
Protocols	
EIB/KNX	Yes
Web server	
• supported	Yes
communication functions / header	
S7 basic communication	
• communication function / S7 basic communication	No
LOGO! communication	
• supported	Yes
Interrupts/diagnostics/status information	
Diagnostics indication LED	
• RUN/STOP LED	Yes
EMC	
Emission of radio interference acc. to EN 55 011	
• Limit class B, for use in residential areas	Yes; In accordance with EN 61000-6-3
Degree and class of protection	
IP degree of protection	IP20
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
cULus	Yes
FM approval	No
RCM (formerly C-TICK)	No
KC approval	Yes
EAC (formerly Gost-R)	Yes
according to VDE 0631	No
Marine approval	No
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	55 °C
Relative humidity	
• Operation, max.	95 %
connection method	
Design of electrical connection for supply voltage	2 screw-type terminals: L+, M 0.5 mm ² - 2.5 mm ² Screw-type terminal: FE 0.5 mm ² ... 6.0 mm ²
Dimensions	
Width	71.5 mm; 4TE
Height	90 mm
Depth	58.5 mm
Weights	
Weight, approx.	0.14 kg

LOGO! logic module

LOGO! communications modules

LOGO! CIM (Communication Interface Module)

Overview

2



- Expansion module for LOGO! 8 basic versions
- For transmitting and receiving SMS and transmission of data from LOGO! 8.3 basic units to the AWS Cloud
- The built-in ModbusRTU interface supports ModbusRTU participants with RS232, RS485 and RS422 interface
- With an integrated GNSS receiver for tracking and transmitting the position

Note

For wireless operation, the following additional components are required (not included in the scope of delivery of LOGO! CIM):

- Wireless engine
- Antennas
- Antenna connecting cable between wireless engine and antenna port (the corresponding products are recommended in the documentation)
- SIM card with activated data transmission

Ordering data

Article No.

LOGO! CIM Communication Interface Module

For LOGO! 8 Modbus RTU interface (RS232/485) 4-port switch; without 4G/LTE/GPS engine; without antennas; web configurator

6ED1055-5MC08-0BA1

Technical specifications

Article number	6ED1055-5MC08-0BA1 LOGO! CIM
General information	
Firmware version	V1.0.0
• FW update possible	Yes
Installation type/mounting	
Mounting	on 35 mm DIN rail, 4 spacing units wide
Supply voltage	
Rated value (DC)	24 V; 12 V DC, 12/24 V AC/DC
• 12 V DC	Yes
• 24 V DC	Yes
Rated value (AC)	
• 24 V AC	No
Input current	
Current consumption, max.	1 A

Article number	6ED1055-5MC08-0BA1 LOGO! CIM
Memory	
Flash	Yes; 2 MB NOR flash
Time of day	
Clock synchronization	
• supported	Yes
Interfaces	
Number of industrial Ethernet interfaces	4; 4 ports (switch)
Number of other interfaces	1; mini PCIe interface for 4G module
Protocols	
Web server	
• supported	Yes
communication functions / header	
S7 basic communication	
• communication function / S7 basic communication	Yes
LOGO! communication	
• supported	Yes
Interrupts/diagnostics/status information	
Diagnostics indication LED	
• RUN/STOP LED	Yes
EMC	
Emission of radio interference acc. to EN 55 011	
• Limit class B, for use in residential areas	Yes
Standards, approvals, certificates	
CE mark	Yes
UL approval	Yes
cULus	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
developed in accordance with IEC 61131	Yes
according to VDE 0631	No
Marine approval	No
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	55 °C
Relative humidity	
• Operation, max.	95 %; no condensation
Dimensions	
Width	71.5 mm
Height	90 mm
Depth	58.5 mm; without antenna sockets
Weights	
Weight, approx.	200 g

Overview


The module is used to connect a LOGO! and up to three other nodes to an Industrial Ethernet network with 10/100 Mbps in an electrical linear, tree or star topology.

The essential features of the LOGO! CSM are:

- Unmanaged 4-port switch, of which one port is on the front for easy diagnostics access
- Power supply: 12/24 V DC
- Problem-free connection using four RJ45 standard connectors
- Space-saving, optimized for connection to LOGO!
- Low-cost solution for implementing small, local Ethernet networks
- Stand-alone use for networking any Ethernet devices

Ordering data
Article No.
LOGO! CSM compact switch module

Unmanaged switch for connection of one LOGO! and up to three further stations on Industrial Ethernet with 10/100 Mbps; 4 x RJ45 ports; LED diagnostics, LOGO! module

- **LOGO! CSM12/24**
external 12 V DC or 24 V DC power supply, for LOGO! ... 0BA7/... 0BA8

6GK7177-1MA20-0AA0
Accessories
IE TP cord RJ45/RJ45

TP cable 4 x 2 with 2 RJ45 plugs

- 0.5 m
- 1 m
- 2 m
- 6 m
- 10 m

6XV1870-3QE50
6XV1870-3QH10
6XV1870-3QH20
6XV1870-3QH60
6XV1870-3QN10
IE FC RJ45 outlet

For connecting Industrial Ethernet FC cables and TP cords; graduated prices for 10 and 50 units or more

6GK1901-1FC00-0AA0

LOGO! logic module

LOGO! communications modules

LOGO! CSM unmanaged**Technical specifications**

2

Article number	6GK7177-1MA20-0AA0
product type designation	LOGO! CSM 12/24
transfer rate	
transfer rate	10 Mbit/s, 100 Mbit/s
interfaces for communication maximum configuration for modular devices	
number of electrical ports maximum	4
interfaces for communication integrated	
number of electrical connections	4
• for network components or terminal equipment	
number of 100 Mbit/s SC ports	0
• for multimode	
number of 1000 Mbit/s LC ports	0
• for multimode	
• for single mode (LD)	0
interfaces other	
number of electrical connections	1
• for power supply	
type of electrical connection	3-pole terminal block
• for power supply	
supply voltage, current consumption, power loss	
type of voltage 1 of the supply voltage	DC
• supply voltage 1 rated value	24 V
• power loss [W] 1 rated value	1.5 W
• supply voltage 1 rated value	10.2 ... 30.2 V
• consumed current 1 maximum	0.15 A
• type of electrical connection 1 for power supply	3-pole terminal block
• product component 1 fusing at power supply input	Yes
ambient conditions	
ambient temperature	0 ... 55 °C
• during operation	
• during storage	
• during transport	-40 ... +70 °C
relative humidity	90 %
• at 25 °C without condensation during operation maximum	
protection class IP	IP20
design, dimensions and weights	
design	LOGO! module
width	71.5 mm
height	90 mm
depth	58.2 mm
net weight	0.15 kg
fastening method	Yes
• 35 mm top hat DIN rail mounting	
• wall mounting	
• S7-300 rail mounting	
• S7-1500 rail mounting	
	No

Article number	6GK7177-1MA20-0AA0
product type designation	LOGO! CSM 12/24
product functions management, configuration, engineering	
product function	No
• multiport mirroring	
product function switch-managed	No
standards, specifications, approvals	
standard	UL 508, CSA C22.2 No. 142
• for safety from CSA and UL	
reference code	
• according to IEC 81346-2	KF
• according to IEC 81346-2:2019	KFE
standards, specifications, approvals CE	
certificate of suitability CE marking	Yes
standards, specifications, approvals hazardous environments	
standard for hazardous zone	ATEX: EN 60079-0 : 2009, EN 60079-15 :2010 (Directive 94/9/EC), IECEx: IEC 60079-0 :2011, IEC 60079-15 :2010
standard for hazardous zone from CSA and UL	Haz-Loc ANSI/ISA 12.12.01: CL 1, Div2, Group A,B,C,D T4, CL 1, Zone 2, Group IIC, T4, Ta=55°C
certificate of suitability	Yes; GB3836.1, GB3836.8
• CCC for hazardous zone according to GB standard	
• CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals other	
certificate of suitability	Yes
• C-Tick	
• KC approval	No
standards, specifications, approvals marine classification	
Marine classification association	No
• American Bureau of Shipping Europe Ltd. (ABS)	
• French marine classification society (BV)	
• Det Norske Veritas (DNV)	
• Germanische Lloyd (GL)	
• Lloyds Register of Shipping (LRS)	
• Nippon Kaiji Kyokai (NK)	
• Polski Rejestr Statkow (PRS)	

Overview



LOGO! CMR in combination with the LOGO! logic module is a cost-efficient communication system suitable for monitoring and controlling distributed plants and systems via text message or email.

LOGO! CMR can send text messages or emails to predefined mobile network numbers as well as receive text messages from predefined mobile network numbers.

Sending a text message/email can be initiated by events in the LOGO! basic module as well as by the two digital alarm inputs of the LOGO! CMR. The values in the LOGO! logic module can be directly influenced by receiving a text message.

The LOGO! CMR offers convenient commissioning and diagnostics in web-based management via local and/or secure remote access.

The two digital outputs can also be switched remotely by incoming text messages/emails.

LOGO! CMR determines the current position of the module based on the GPS signal received by the GPS antenna. In addition, the LOGO! 8 logic module can be time-synchronized by means of the time included in the GPS signal. Determination of time by means of an NTP server or from the data of the mobile network provider offers more options for synchronization of the LOGO! BM with the current time of day.

Product version:

- LOGO! CMR2040 for use in LTE mobile wireless networks

Warning! The country-specific mobile network approvals must be observed:

DE: <http://www.siemens.de/mobilfunkzulassungen>

EN: <http://www.siemens.com/mobilenetwork-approvals>

Ordering data

Article No.

Radio LOGO! CMR Communications Module

Communications modules for connection of LOGO! 8 to LTE network; 1x RJ45 port for Industrial Ethernet connection; 2x digital input; 2x digital output; read/write access to LOGO! tags; possible to send/receive text messages; GPS position detection; time-of-day synchronization/forwarding with real-time clock; configuration and diagnostics via web interface; Please note country approvals under: <http://www.siemens.com/mobilenetwork-approvals>

LOGO! CMR2040

6GK7142-7EX00-0AX0

For connecting LOGO! 8 to an LTE network

Accessories

Mobile wireless antennas

ANT794-4MR

For indoor and outdoor use; 5 m connecting cable permanently connected to antenna; SMA plug; incl. mounting bracket, screws, wall plugs

6NH9860-1AA00

ANT896-4M

Rod antenna for direct mounting on device; SMA male connector

6GK5896-4MA00-0AA3

ANT896-4ME

Cylindrical antenna for remote installation, e.g. on a control cabinet; N-Connect female connector

6GK5896-4ME00-0AA0

GPS antenna

ANT895-6ML

GPS/Glonass antenna for remote indoor and outdoor installation, magnet or screw mounting, 30 cm cable with N-Connect female connector

6GK5895-6ML00-0AA0

Antenna adapter cable

N-Connect/SMA male/male flexible connecting cable, pre-assembled, connecting cable; suitable for 0 ... 6 GHz, IP68

- 0,3 m
- 1 m
- 2 m
- 5 m

6XV1875-5LE30
6XV1875-5LH10
6XV1875-5LH20
6XV1875-5LH50

LOGO! logic module

LOGO! communications modules

LOGO! CMR (wireless communication)

2

Ordering data**Article No.****Article No.****IWLAN RCoax/antenna
N-Connect male/male
flexible connection cable**

Flexible connecting cable for connecting an RCoax cable or antenna to a SCALANCE W700 access point with N-Connect connectors; pre-assembled with two N-Connect male connectors; suitable from 0 ... 6 GHz, IP68

- 1 m
- 2 m
- 5 m
- 10 m

6XV1875-5AH10
6XV1875-5AH20
6XV1875-5AH50
6XV1875-5AN10

Cabinet bushing

IWLAN RCOAX N-Connect/ N-Connect female/female panel feedthrough; Control cabinet feedthrough for wall thickness max. 4.5 mm; 2.4 GHz and 5 GHz, suitable from 0 ... 6 GHz, IP67

6GK5798-2PP00-2AA6

LP798-2N lightning protector

Lightning protector with N/N female/female connector for ANT 790 antennas, IP67 (-40 to +85 °C), frequency range: 0 ... 6 GHz

6GK5798-2LP00-2AA6

Patch cable**IE TP cord RJ45/RJ45**

TP cable 4 x 2 with 2 RJ45 plugs

- 0.5 m
- 1 m
- 2 m
- 6 m
- 10 m

6XV1870-3QE50
6XV1870-3QH10
6XV1870-3QH20
6XV1870-3QH60
6XV1870-3QN10

IE FC RJ45 outlet

For connection of Industrial Ethernet FC cables and TP cords; graded prices from 10 and 50 units

6GK1901-1FC00-0AA0

LOGO! CSM12/24

Compact switch module for connecting a LOGO! (...0BA7/...0BA8) and up to 3 additional nodes to Industrial Ethernet; 12/24 V DC power supply

6GK7177-1MA20-0AA0

**Stainless steel enclosure
in IP68 degree of protection**

Stainless steel enclosure in IP68 degree of protection; suitable for SIMATIC RTU3030C; temperature range -60 to +135 °C; matte surface; cover with Pin Torx screws and padlock, 7 cable openings and opening for mobile wireless antenna prepared; please order the required quantity of cable glands and blanking plugs separately

6NH3112-3BA00-1XX1

**Aluminum enclosure
in IP68 degree of protection**

Aluminum enclosure in IP68 degree of protection; suitable for SIMATIC RTU3030C; temperature range -40 to +80 °C; cover with Pin Torx screws; 7 cable openings and opening for mobile wireless antenna prepared; please order the required quantity of cable glands and blanking plugs separately

6NH3112-3BA00-1XX3

**Cable gland PG16 F for IP68
enclosure**

Cable gland, M16, IP68, -40 to +100 °C; nickel-plated brass; suitable for enclosure with article numbers 6NH3112-3BA00-1x X1 and 6NH3112-3BA00-1x X3 pack quantity = 2 units

6NH3112-3BA00-1XX4

**Blanking plug M16
for IP68 enclosure**

Blanking plug, M16, IP68, -40 to +100 °C; nickel-plated brass; suitable for enclosure with article numbers 6NH3112-3BA00-1x X1 and 6NH3112-3BA00-1x X3, pack quantity = 2 units

6NH3112-3BA00-1XX5

Technical specifications

Article number	6GK7142-7EX00-0AX0
Product type designation	CMR2040
transfer rate	
transfer rate	
• at the 1st interface	10 ... 100 Mbit/s
• for GPRS transmission	
- with downlink maximum	85.6 kbit/s
- with uplink maximum	85.6 kbit/s
• for LTE transmission	
- with downlink maximum	100 Mbit/s
- with uplink maximum	50 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	1
number of electrical connections	
• at the 1st interface according to Industrial Ethernet	1
• for external antenna(s)	2
• for power supply	1
number of slots	
• for SIM cards	1
• for memory cards	1
type of electrical connection	
• at the 1st interface according to Industrial Ethernet	RJ45 port
type of electrical connection	
• for external antenna(s)	SMA socket (50 ohms)
• for power supply	3-pole terminal block
type of antenna	
• at connection 1 connectable	GPS Antenna
• at connection 2 connectable	Mobile radio antenna (GPRS/GSM, UMTS, LTE)
wire length of antenna cable maximum	15 m
slot version	
• for SIM card	Standard
• of the memory card	microSD
storage capacity of the memory card maximum	32 Gbyte
performance class of the memory card minimum necessary	Class 6
type of file system	FAT32

Article number	6GK7142-7EX00-0AX0
Product type designation	CMR2040
signal inputs/outputs	
number of electrical connections for digital input signals	2
type of electrical connection for digital input signals	3 pole terminal block
digital input version	not galvanically isolated, not debounced
input voltage at digital input	
• with signal <0> at DC	0 ... 5 V
• for signal <1> at DC	8.5 ... 24 V
input current at digital input for signal <1> maximum	5.5 mA
number of electrical connections for digital output signals	2
type of electrical connection for digital output signals	3 pole terminal block
digital output version	transistor, not potential separated
output voltage at digital output	
• for signal <1>	12 ... 24 V; Value of the actual supply voltage
• for signal <0>	0 ... 5 V
output current at digital output for signal <1> maximum	0.3 A
wireless technology	
type of mobile wireless service is supported	
• SMS	Yes
• GPRS	Yes
•	LTE
type of wireless network is supported	
• GSM	Yes
• UMTS	Yes
• LTE	Yes
operating frequency for GSM transmission	operating frequency for GSM transmission 900 MHz, operating frequency for GSM transmission 1800 MHz
operating frequency with UMTS transmission	operating frequency with UMTS transmission 850 MHz, operating frequency with UMTS transmission 900 MHz, operating frequency with UMTS transmission 2100 MHz
operating frequency for LTE transmission	operating frequency for LTE transmission 800 MHz, operating frequency for LTE transmission 1800 MHz, operating frequency for LTE transmission 2600 MHz
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage external	12 ... 24 V
supply voltage external at DC	12 ... 24 V
supply voltage for GPS antenna maximum	3.8 V; at 5 mA: 3,575 V / at 10 mA: 3,35 V / at 15 mA: 3,125 V
relative positive tolerance at DC at 24 V	20 %
relative negative tolerance at DC at 12 V	10 %
consumed current	
• from external supply voltage at DC at 12 V maximum	0.25 A
• from external supply voltage at DC at 24 V maximum	0.125 A
output current for GPS antenna maximum	15 mA
power loss [W]	3 W

LOGO! logic module

LOGO! communications modules


LOGO! CMR (wireless communication)**Technical specifications**

2

Article number	6GK7142-7EX00-0AX0
Product type designation	CMR2040
ambient conditions	
ambient temperature	
• during operation	-20 ... +70 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module, for rail mounting
width	71.5 mm
height	90 mm
depth	58.2 mm
net weight	0.16 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes
• wall mounting	Yes
product features, product functions, product components general	
product function	
• DynDNS client	Yes
• no-ip.com client	Yes
performance data	
number of possible connections to the LOGO! logic module	1
number of users/telephone numbers/email addresses definable maximum	20
number of user groups definable maximum	10
number of signals for monitoring or device control definable maximum	32
number of events for monitoring definable maximum	32
number of actions definable maximum	32
number of assignments definable maximum	32
number of alias SMS commands definable maximum	20
number of constants definable maximum	10
performance data IT functions	
number of possible connections	
• as server by means of HTTP maximum	2
• as server by means of HTTPS maximum	2; http and https can be combined (max. number of 2 connections cannot be exceeded). Max. one connection via https is possible on the mobile wireless interface.
• as email client maximum	1
number of free texts for emails and SMS maximum	20
number of characters per free text for emails or SMS maximum	160

Article number	6GK7142-7EX00-0AX0
Product type designation	CMR2040
performance data teleservice	
product function	
• remote firmware update	Yes
• remote configuration	Yes
product functions management, configuration, engineering	
configuration software	
• required	Web interface
product functions diagnostics	
product function web-based diagnostics	Yes
product functions security	
operating mode Virtual Private Network (VPN)	Yes; Open VPN Server in PSK mode
product function with VPN connection	OpenVPN PSK
type of encryption algorithms with VPN connection	AES-128 CBC
type of authentication with Virtual Private Network PSK	Yes
type of hashing algorithms with VPN connection	SHA-256
number of possible connections with VPN connection	1
product function	
• password protection for Web applications	Yes
• password protection for VPN	Yes
• encrypted data transmission	Yes
• switch-off of non-required services	Yes
• log file for unauthorized access	Yes
product functions time	
product function pass on time synchronization	Yes
accuracy of the hardware real time clock per day maximum	7.5 s
time synchronization	
• from NTP-server	Yes
• from GPS-signal	Yes
• from mobile network provider	Yes
• PC	Yes
• manual setting	Yes
product functions position detection	
product function	
• position detection with GPS	Yes
• pass on position data	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc

Overview

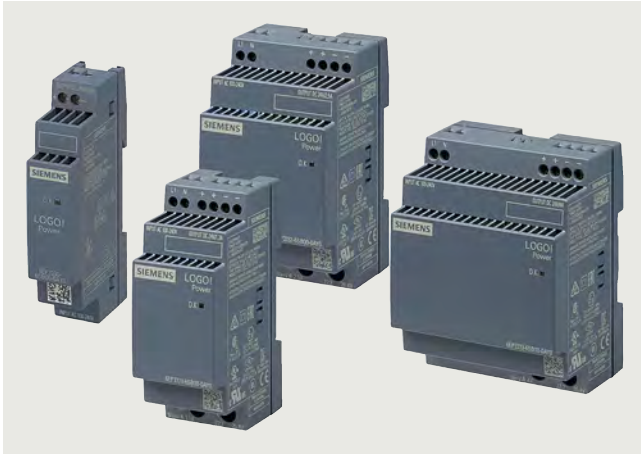

The flat power supply unit for distribution boards

Small. Clever. LOGO!Power: Thanks to its stepped profile design, the LOGO! 8 product line is ideally suited for installation in small distribution boards. The 12 V and 24 V versions are ideal for supplying LOGO! controllers with the corresponding voltage input. The high level of efficiency across the entire load range as well as the low no-load losses result in lower overall energy consumption. Greater convenience when commissioning and servicing thanks to the integrated current monitor. The extended ambient temperature range from -25 °C to +70 °C enables a host of additional applications.

To further increase 24 V availability, the 24 V LOGO!Power power supply units can be combined with the **BUF1200 buffer module**, **DC UPS**, **redundancy** and **selectivity modules**.

This powerhouse can be used in any industry: e.g. in building technology applications for light and heating controllers or for access control systems. LOGO!Power is also well-suited for use in industrial automation, such as in packaging machine, machine tool, conveyor belt or sorting system applications.

Product highlights of the product line

- Low width
with minimum of 18 mm to maximum of 72 mm, thus requiring very little space in the control cabinet or distribution board
- High energy efficiency
with efficiency levels of up to 90% over the entire performance range and ERP-compliant no-load losses of < 0.3 W
- Global use
due to operating temperature range from -25 °C to +70 °C and international certificates
- Supply
of NEC Class 2 electric circuits with limited output current (100 VA)
- Load monitoring via current monitor
using real-time measurement of the output current without disconnecting the cable, i.e. without interrupting the DC supply
- Flexible mounting
with top hat DIN rail or wall mounting in different installation positions
- Flexible operation
in all standard 1-phase supply networks thanks to wide-range input of 100 ... 240 V AC without switchover and operation on DC networks with 110 ... 300 V DC
- Reliability
due to problem-free connection of loads with high inrush currents thanks to power reserve during startup as well as constant current in the event of overload

Overall width	18 mm	36 mm	54 mm	72 mm
24 V	0.6 A	1.3 A	2.5 A	4.0 A
12 V	0.9 A	1.9 A	4.5 A	
5 V		3.0 A	6.3 A	
15 V		1.9 A	4.0 A	

LOGO! logic module

LOGO!Power

1-phase, 5 V DC**Overview**

2



Thanks to its stepped profile design, the LOGO!Power product line is ideally suited for installation in small distribution boards. The stabilized power supplies with wide-range input are available with an output voltage of 5 V in two performance classes.

Product highlights

- 1-phase, 5 V DC/ 3 A and 6.3 A
- Wide-range input, input voltage 100 ... 240 V AC (85 ... 264 V), 110 ... 300 V DC
- Narrow unit with 36 mm or 54 mm width and overall depth of 53 mm in LOGO! design
- Up to 80% efficiency
- Integrated current monitor: Actual output current measurement directly at the power supply unit
- cULus, cURus, NEC class 2, ABS, DNV GL certifications

Ordering data**Article No.****Article No.****LOGO!Power 1-phase, 5 V DC/3 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V AC)
Output: 5 V DC/3 A

6EP3310-6SB00-0AY0**LOGO!Power 1-phase, 5 V DC/6.3 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V AC)
Output: 5 V DC/6.3 A

6EP3311-6SB00-0AY0**Technical specifications**

Article number	6EP3310-6SB00-0AY0	6EP3311-6SB00-0AY0
product brand name	LOGO!Power	LOGO!Power
type of current supply	5 V/3 A	5 V/6.3 A
input		
type of the power supply network	1-phase AC or DC	1-phase AC or DC
supply voltage at AC minimum rated value	100 ... 240 V	100 ... 240 V
supply voltage at AC maximum rated value		
supply voltage at AC initial value	85 ... 264 V	85 ... 264 V
supply voltage at AC full-scale value		
input voltage at DC	110 ... 300 V	110 ... 300 V
wide range input	Yes	Yes
overvoltage overload capability	300 V AC for 1 s	300 V AC for 1 s
buffering time for rated value of the output current in the event of power failure minimum	40 ms	40 ms
operating condition of the mains buffering	at $V_{in} = 187 V$	at $V_{in} = 187 V$
line frequency	50 Hz/60 Hz	50 Hz/60 Hz
line frequency initial value	47 ... 63 Hz	47 ... 63 Hz
line frequency full-scale value		
input current		
• at rated input voltage 120 V	0.36 A	0.71 A
• at rated input voltage 230 V	0.22 A	0.37 A
current limitation of inrush current at 25 °C maximum	26 A	50 A
I ² t value maximum	0.8 A ² ·s	3 A ² ·s
fuse protection type	internal	internal
fuse protection type in the feeder	Recommended miniature circuit breaker: from 6 A characteristic B or from 2 A characteristic C	Recommended miniature circuit breaker: from 10 A characteristic B or from 6 A characteristic C

Technical specifications

Article number	6EP3310-6SB00-0AY0	6EP3311-6SB00-0AY0
product brand name	LOGO!Power	LOGO!Power
type of current supply	5 V/3 A	5 V/6.3 A
output		
voltage curve at output	Controlled, isolated DC voltage	Controlled, isolated DC voltage
output voltage at DC rated value	5 V	5 V
output voltage		
• at output 1 at DC rated value	5 V	5 V
output voltage adjustable	Yes; via potentiometer	Yes; via potentiometer
adjustable output voltage initial value	4.6 V	4.6 V
adjustable output voltage full-scale value	5.4 V	5.4 V
relative overall tolerance of the voltage	3 %	3 %
relative control precision of the output voltage		
• on slow fluctuation of input voltage	0.1 %	0.1 %
• on slow fluctuation of ohm loading	0.1 %	0.1 %
residual ripple		
• maximum	100 mV	100 mV
• typical	30 mV	30 mV
voltage peak		
• maximum	100 mV	100 mV
• typical	50 mV	50 mV
display version for normal operation	Green LED for output voltage OK	Green LED for output voltage OK
behavior of the output voltage when switching on	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)
response delay maximum	0.5 s	0.5 s
voltage increase time of the output voltage		
• typical	100 ms	100 ms
output current		
• rated value	3 A	6.3 A
• rated range	0 ... 3 A; +55 ... +70 °C: Derating 2%/K	0 ... 6.3 A; +55 ... +70 °C: Derating 2%/K
supplied active power typical	15 W	31.5 W
bridging of equipment	Yes	Yes
number of parallel-switched equipment resources	2	2
efficiency in percent	76 %	79.8 %
power loss [W]		
• at rated output voltage for rated value of the output current typical	4.7 W	8 W
• during no-load operation maximum	0.3 W	0.3 W
closed-loop control		
relative control precision of the output voltage with rapid fluctuation of the input voltage by +/- 15% typical	0.2 %	0.2 %
relative control precision of the output voltage at load step of resistive load 10/90/10 % typical	5 %	7 %
setting time		
• load step 10 to 90% typical	1 ms	1 ms
• load step 90 to 10% typical	1 ms	1 ms

LOGO! logic module

LOGO!Power

1-phase, 5 V DC

Technical specifications

Article number	6EP3310-6SB00-0AY0	6EP3311-6SB00-0AY0
product brand name	LOGO!Power	LOGO!Power
type of current supply	5 V/3 A	5 V/6.3 A
protection and monitoring		
design of the overvoltage protection	Yes, according to EN 60950-1	Yes, according to EN 60950-1
property of the output short-circuit proof	Yes	Yes
design of short-circuit protection	Constant current characteristic	Constant current characteristic
<ul style="list-style-type: none"> response value current limitation typical 	3.8 A	8.2 A
overcurrent overload capability		
<ul style="list-style-type: none"> when switching on in normal operation 	150% I_{out} rated typ. 200 ms overload capability 150% I_{out} rated typ. 200 ms	150% I_{out} rated typ. 200 ms overload capability 150% I_{out} rated typ. 200 ms
enduring short circuit current RMS value		
<ul style="list-style-type: none"> maximum 	3.8 A	8.2 A
measuring point for output current	Yes; 50 mV = \wedge 3 A	Yes; 50 mV = \wedge 6.3 A
safety		
galvanic isolation between input and output	Yes	Yes
galvanic isolation	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178
operating resource protection class	Class II (without protective conductor)	Class II (without protective conductor)
protection class IP standard	IP20	IP20
<ul style="list-style-type: none"> for emitted interference for mains harmonics limitation for interference immunity 	EN 55022 Class B not applicable EN 61000-6-2	EN 55022 Class B not applicable EN 61000-6-2
standards, specifications, approvals		
certificate of suitability		
<ul style="list-style-type: none"> CE marking UL approval CSA approval EAC approval NEC Class 2 SEMI F47 	Yes Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310) Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310) Yes Yes; according to UL1310, File E151273 Yes	Yes Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273 Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273 Yes No Yes
type of certification		
<ul style="list-style-type: none"> CB-certificate 	Yes	Yes
MTBF at 40 °C	2 931 709 h	2 654 280 h
standards, specifications, approvals hazardous environments		
certificate of suitability		
<ul style="list-style-type: none"> IECEX ATEX ULhazloc approval cCSAus, Class 1, Division 2 FM registration 	No No No No No	No No No No No
standards, specifications, approvals marine classification		
shipbuilding approval	Yes	Yes
Marine classification association		
<ul style="list-style-type: none"> American Bureau of Shipping Europe Ltd. (ABS) French marine classification society (BV) Det Norske Veritas (DNV) Lloyds Register of Shipping (LRS) 	Yes Yes Yes Yes	Yes Yes Yes Yes

Technical specifications

	6EP3310-6SB00-0AY0	6EP3311-6SB00-0AY0
Article number	6EP3310-6SB00-0AY0	6EP3311-6SB00-0AY0
product brand name	LOGO!Power	LOGO!Power
type of current supply	5 V/3 A	5 V/6.3 A
standards, specifications, approvals		
Environmental Product Declaration		
Environmental Product Declaration	Yes	Yes
Global Warming Potential [CO ₂ eq]		
• total	149.6 kg	254.5 kg
• during manufacturing	2.4 kg	3.9 kg
• during operation	147.1 kg	250.3 kg
• after end of life	0.08 kg	0.13 kg
ambient conditions		
ambient temperature		
• during operation	-25 ... +70 °C; with natural convection	-25 ... +70 °C; with natural convection
• during transport	-40 ... +85 °C	-40 ... +85 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C
environmental category according to IEC 60721	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K3, 5 ... 95% no condensation
connection method		
type of electrical connection	screw-type terminals	screw-type terminals
• at input	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded
• at output	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²
• for auxiliary contacts	-	-
mechanical data		
width × height × depth of the enclosure	36 mm × 90 mm × 53 mm	54 mm × 90 mm × 53 mm
installation width × mounting height	36 mm × 130 mm	54 mm × 130 mm
required spacing		
• top	20 mm	20 mm
• bottom	20 mm	20 mm
• left	0 mm	0 mm
• right	0 mm	0 mm
fastening method	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions
• standard rail mounting	Yes	Yes
• S7 rail mounting	No	No
• wall mounting	Yes	Yes
housing can be lined up	Yes	Yes
net weight	0.12 kg	0.2 kg
additional information		
other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

LOGO! logic module

LOGO!Power

1-phase, 12 V DC**Overview**

2



Thanks to its stepped profile design, the LOGO!Power product line is ideally suited for installation in small distribution boards. The stabilized power supplies with wide-range input are available with an output voltage of 12 V in three performance classes. The 12 V versions are ideal for supplying LOGO! PLCs with the corresponding voltage input.

Product highlights

- 1-phase, 12 V DC/ 0.9 A, 1.9 A and 4.5 A
- Wide-range input, input voltage 100 ... 240 V AC (85 ... 264 V), 110 ... 300 V DC
- Narrow unit with width of 18 mm, 36 mm or 54 mm and overall depth of 53 mm in LOGO! design
- Up to 87.1% efficiency
- Integrated current monitor: actual output current measurement directly at the power supply unit (for devices at least 36 mm wide)
- cULus, cURus, NEC class 2, ABS, DNV GL certifications

Ordering data**LOGO!Power 1-phase, 12 V DC/0.9 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V DC)
Output: 12 V DC/0.9 A

Article No.**6EP3320-6SB00-0AY0****LOGO!Power 1-phase, 12 V DC/1.9 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V DC)
Output: 12 V DC/1.9 A

6EP3321-6SB00-0AY0**Article No.****LOGO!Power 1-phase, 12 V DC/4.5 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V DC)
Output: 12 V DC/4.5 A

6EP3322-6SB00-0AY0**Add-on modules****SITOP RED1200 redundancy modules**

For more information, visit
<https://www.siemens.com/sitop-redundancy/mall>

Technical specifications

Article number	6EP3320-6SB00-0AY0	6EP3321-6SB00-0AY0	6EP3322-6SB00-0AY0
product brand name	LOGO!Power	LOGO!Power	LOGO!Power
type of current supply	12 V/0.9 A	12 V/1.9 A	12 V/4.5 A
input			
type of the power supply network	1-phase AC or DC	1-phase AC or DC	1-phase AC or DC
supply voltage at AC minimum rated value	100 ... 240 V	100 ... 240 V	100 ... 240 V
supply voltage at AC maximum rated value			
supply voltage at AC initial value	85 ... 264 V	85 ... 264 V	85 ... 264 V
supply voltage at AC full-scale value			
input voltage at DC	110 ... 300 V	110 ... 300 V	110 ... 300 V
wide range input	Yes	Yes	Yes
overvoltage overload capability	300 V AC for 1 s	300 V AC for 1 s	300 V AC for 1 s
buffering time for rated value of the output current in the event of power failure minimum	40 ms	40 ms	40 ms
operating condition of the mains buffering	at $V_{in} = 187$ V	at $V_{in} = 187$ V	at $V_{in} = 187$ V
line frequency	50 Hz/60 Hz	50 Hz/60 Hz	50 Hz/60 Hz
line frequency initial value	47 ... 63 Hz	47 ... 63 Hz	47 ... 63 Hz
line frequency full-scale value			
input current			
• at rated input voltage 120 V	0.3 A	0.53 A	1.13 A
• at rated input voltage 230 V	0.2 A	0.3 A	0.61 A
current limitation of inrush current at 25 °C maximum	20 A	25 A	50 A
I ² t value maximum	0.8 A ² ·s	0.8 A ² ·s	3 A ² ·s
fuse protection type	internal	internal	internal
fuse protection type in the feeder	Recommended miniature circuit breaker: from 6 A characteristic B or from 2 A characteristic C	Recommended miniature circuit breaker: from 6 A characteristic B or from 2 A characteristic C	Recommended miniature circuit breaker: from 10 A characteristic B or from 6 A characteristic C

Technical specifications

Article number	6EP3320-6SB00-0AY0	6EP3321-6SB00-0AY0	6EP3322-6SB00-0AY0
product brand name	LOGO!Power	LOGO!Power	LOGO!Power
type of current supply	12 V/0.9 A	12 V/1.9 A	12 V/4.5 A
output			
voltage curve at output	Controlled, isolated DC voltage	Controlled, isolated DC voltage	Controlled, isolated DC voltage
output voltage at DC rated value	12 V	12 V	12 V
output voltage			
• at output 1 at DC rated value	12 V	12 V	12 V
output voltage adjustable	No	Yes; via potentiometer	Yes; via potentiometer
adjustable output voltage initial value		10.5 V	10.5 V
adjustable output voltage full-scale value		16.1 V	16.1 V
relative overall tolerance of the voltage	3 %	3 %	3 %
relative control precision of the output voltage			
• on slow fluctuation of input voltage	0.1 %	0.1 %	0.1 %
• on slow fluctuation of ohm loading	0.1 %	0.1 %	0.1 %
residual ripple			
• maximum	200 mV	200 mV	200 mV
• typical	30 mV	30 mV	30 mV
voltage peak			
• maximum	300 mV	300 mV	300 mV
• typical	50 mV	50 mV	50 mV
display version for normal operation	Green LED for output voltage OK	Green LED for output voltage OK	Green LED for output voltage OK
behavior of the output voltage when switching on	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)
response delay maximum	0.5 s	0.5 s	0.5 s
voltage increase time of the output voltage			
• typical	100 ms	100 ms	100 ms
output current			
• rated value	0.9 A	1.9 A	4.5 A
• rated range	0 ... 0.9 A; +55 ... +70 °C: Derating 2%/K	0 ... 1.9 A; +55 ... +70 °C: Derating 2%/K	0 ... 4.5 A; +55 ... +70 °C: Derating 2%/K
supplied active power typical	10.8 W	22.8 W	54 W
bridging of equipment	No	Yes	Yes
number of parallel-switched equipment resources		2	2
efficiency in percent	78 %	81 %	87.1 %
power loss [W]			
• at rated output voltage for rated value of the output current typical	3 W	5.3 W	8 W
• during no-load operation maximum	0.3 W	0.3 W	0.3 W
closed-loop control			
relative control precision of the output voltage with rapid fluctuation of the input voltage by +/- 15% typical	0.2 %	0.2 %	0.2 %
relative control precision of the output voltage at load step of resistive load 10/90/10 % typical	3 %	2 %	4 %
setting time			
• load step 10 to 90% typical	1 ms	1 ms	1 ms
• load step 90 to 10% typical	1 ms	1 ms	1 ms
protection and monitoring			
design of the overvoltage protection	Yes, according to EN 60950-1	Yes, according to EN 60950-1	Yes, according to EN 60950-1
property of the output short-circuit proof	Yes	Yes	Yes
design of short-circuit protection	Constant current characteristic	Constant current characteristic	Constant current characteristic
• response value current limitation typical	1.3 A	2.5 A	5 A
overcurrent overload capability			
• when switching on	150% I_{out} rated typ. 200 ms	150% I_{out} rated typ. 200 ms	150% I_{out} rated typ. 200 ms
• in normal operation	overload capability 150% I_{out} rated typ. 200 ms	overload capability 150% I_{out} rated typ. 200 ms	overload capability 150% I_{out} rated typ. 200 ms
enduring short circuit current RMS value			
• maximum	1.3 A	2.5 A	5 A
measuring point for output current	No	Yes; 50 mV = ^ 1.9 A	Yes; 50 mV = ^ 4.5 A

LOGO! logic module

LOGO!Power

1-phase, 12 V DC

Technical specifications

Article number	6EP3320-6SB00-0AY0	6EP3321-6SB00-0AY0	6EP3322-6SB00-0AY0
product brand name	LOGO!Power	LOGO!Power	LOGO!Power
type of current supply	12 V/0.9 A	12 V/1.9 A	12 V/4.5 A
safety			
galvanic isolation between input and output	Yes	Yes	Yes
galvanic isolation	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178
operating resource protection class	Class II (without protective conductor)	Class II (without protective conductor)	Class II (without protective conductor)
protection class IP standard	IP20	IP20	IP20
• for emitted interference	EN 55022 Class B	EN 55022 Class B	EN 55022 Class B
• for mains harmonics limitation	not applicable	not applicable	not applicable
• for interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2
standards, specifications, approvals			
certificate of suitability	Yes	Yes	Yes
• CE marking	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259;	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259;	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259;
• UL approval	cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)
• CSA approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259;	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259;	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259;
	cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)
• EAC approval	Yes	Yes	Yes
• NEC Class 2	Yes; according to UL1310, File E151273	Yes; according to UL1310, File E151273	Yes; according to UL1310, File E151273
• SEMI F47	Yes	Yes	Yes
type of certification	Yes	Yes	Yes
• CB-certificate	Yes	Yes	Yes
MTBF at 40 °C	3 793 080 h	2 938 542 h	2 566 680 h
standards, specifications, approvals hazardous environments			
certificate of suitability	No	No	No
• IECEx	No	No	No
• ATEX	No	No	No
• ULhazloc approval	No	No	No
• cCSAus, Class 1, Division 2	No	No	No
• FM registration	No	No	No
standards, specifications, approvals marine classification			
shipbuilding approval	Yes	Yes	Yes
Marine classification association			
• American Bureau of Shipping Europe Ltd. (ABS)	Yes	Yes	Yes
• French marine classification society (BV)	Yes	Yes	Yes
• Det Norske Veritas (DNV)	Yes	Yes	Yes
• Lloyds Register of Shipping (LRS)	Yes	Yes	Yes
standards, specifications, approvals Environmental Product Declaration			
Environmental Product Declaration	Yes	Yes	Yes
Global Warming Potential [CO2 eq]			
• total	95.1 kg	168.3 kg	254.5 kg
• during manufacturing	1.4 kg	2.4 kg	3.9 kg
• during operation	93.7 kg	165.8 kg	250.3 kg
• after end of life	0.04 kg	0.08 kg	0.13 kg
ambient conditions			
ambient temperature			
• during operation	-25 ... +70 °C; with natural convection	-25 ... +70 °C; with natural convection	-25 ... +70 °C; with natural convection
• during transport	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
environmental category according to IEC 60721	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K3, 5 ... 95% no condensation

Technical specifications

	6EP3320-6SB00-0AY0	6EP3321-6SB00-0AY0	6EP3322-6SB00-0AY0
Article number	6EP3320-6SB00-0AY0	6EP3321-6SB00-0AY0	6EP3322-6SB00-0AY0
product brand name	LOGO!Power	LOGO!Power	LOGO!Power
type of current supply	12 V/0.9 A	12 V/1.9 A	12 V/4.5 A
connection method			
type of electrical connection	screw-type terminals	screw-type terminals	screw-type terminals
• at input	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded
• at output	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²
• for auxiliary contacts	-	-	-
mechanical data			
width × height × depth of the enclosure	18 mm × 90 mm × 53 mm	36 mm × 90 mm × 53 mm	54 mm × 90 mm × 53 mm
installation width × mounting height	18 mm × 130 mm	36 mm × 130 mm	54 mm × 130 mm
required spacing			
• top	20 mm	20 mm	20 mm
• bottom	20 mm	20 mm	20 mm
• left	0 mm	0 mm	0 mm
• right	0 mm	0 mm	0 mm
fastening method	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions
• standard rail mounting	Yes	Yes	Yes
• S7 rail mounting	No	No	No
• wall mounting	Yes	Yes	Yes
housing can be lined up	Yes	Yes	Yes
net weight	0.07 kg	0.12 kg	0.2 kg
additional information			
other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

LOGO! logic module

LOGO!Power

1-phase, 15 V DC**Overview**

2



Thanks to its stepped profile design, the LOGO!Power product line is ideally suited for installation in small distribution boards. The stabilized power supplies with a wide-range input are available with an output voltage of 15 V in two performance classes.

Product highlights

- 1-phase, 15 V DC/ 1.9 A and 4.0 A
- Wide-range input, input voltage 100 ... 240 V AC (85 ... 264 V), 110 ... 300 V DC
- Narrow unit with 36 mm or 54 mm width and overall depth of 53 mm in LOGO! design
- Up to 88.4% efficiency
- Integrated current monitor: actual output current measurement directly at the power supply unit
- cULus, cURus, NEC class 2, ABS, BV, DNV GL, LRS certifications

Ordering data**Article No.****LOGO!Power 1-phase, 15 V DC/1.9 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V DC)
Output: 15 V DC/1.9 A

6EP3321-6SB10-0AY0**LOGO!Power 1-phase, 15 V DC/4 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V DC)
Output: 15 V DC/4 A

6EP3322-6SB10-0AY0**Article No.****Add-on modules****SITOP redundancy modules RED1200**

For more information, visit
<https://www.siemens.com/sitop-redundancy/mall>

Technical specifications

Article number	6EP3321-6SB10-0AY0	6EP3322-6SB10-0AY0
product brand name	LOGO!Power	LOGO!Power
type of current supply	15 V/1.9 A	15 V/4 A
input		
type of the power supply network	1-phase AC or DC	1-phase AC or DC
supply voltage at AC minimum rated value	100 ... 240 V	100 ... 240 V
supply voltage at AC maximum rated value		
supply voltage at AC initial value	85 ... 264 V	85 ... 264 V
supply voltage at AC full-scale value		
input voltage at DC	110 ... 300 V	110 ... 300 V
wide range input	Yes	Yes
overvoltage overload capability	300 V AC for 1 s	300 V AC for 1 s
buffering time for rated value of the output current in the event of power failure minimum	40 ms	40 ms
operating condition of the mains buffering	at $V_{in} = 187$ V	at $V_{in} = 187$ V
line frequency	50 Hz/60 Hz	50 Hz/60 Hz
line frequency initial value	47 ... 63 Hz	47 ... 63 Hz
line frequency full-scale value		
input current		
• at rated input voltage 120 V	0.63 A	1.24 A
• at rated input voltage 230 V	0.33 A	0.68 A
current limitation of inrush current at 25 °C maximum	25 A	55 A
I ² t value maximum	0.8 A ² ·s	3 A ² ·s
fuse protection type	internal	internal
fuse protection type in the feeder	Recommended miniature circuit breaker: from 6 A characteristic B or from 2 A characteristic C	Recommended miniature circuit breaker: from 10 A characteristic B or from 6 A characteristic C

Technical specifications

Article number	6EP3321-6SB10-0AY0	6EP3322-6SB10-0AY0
product brand name	LOGO!Power	LOGO!Power
type of current supply	15 V/1.9 A	15 V/4 A
output		
voltage curve at output	Controlled, isolated DC voltage	Controlled, isolated DC voltage
output voltage at DC rated value	15 V	15 V
output voltage		
• at output 1 at DC rated value	15 V	15 V
output voltage adjustable	Yes; via potentiometer	Yes; via potentiometer
adjustable output voltage initial value	10.5 V	10.5 V
adjustable output voltage full-scale value	16.1 V	16.1 V
relative overall tolerance of the voltage	3 %	3 %
relative control precision of the output voltage		
• on slow fluctuation of input voltage	0.1 %	0.1 %
• on slow fluctuation of ohm loading	0.1 %	0.1 %
residual ripple		
• maximum	200 mV	200 mV
• typical	30 mV	30 mV
voltage peak		
• maximum	300 mV	300 mV
• typical	50 mV	50 mV
display version for normal operation	Green LED for output voltage OK	Green LED for output voltage OK
behavior of the output voltage when switching on	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)
response delay maximum	0.5 s	0.5 s
voltage increase time of the output voltage		
• typical	100 ms	100 ms
output current		
• rated value	1.9 A	4 A
• rated range	0 ... 1.9 A; +55 ... +70 °C: Derating 2%/K	0 ... 4 A; +55 ... +70 °C: Derating 2%/K
supplied active power typical	28.5 W	60 W
bridging of equipment	Yes	Yes
number of parallel-switched equipment resources	2	2
efficiency in percent	83.4 %	88.4 %
power loss [W]		
• at rated output voltage for rated value of the output current typical	5.7 W	7.9 W
• during no-load operation maximum	0.3 W	0.3 W
closed-loop control		
relative control precision of the output voltage with rapid fluctuation of the input voltage by +/- 15% typical	0.2 %	0.2 %
relative control precision of the output voltage at load step of resistive load 10/90/10 % typical	2 %	3 %
setting time		
• load step 10 to 90% typical	1 ms	1 ms
• load step 90 to 10% typical	1 ms	1 ms
protection and monitoring		
design of the overvoltage protection	Yes, according to EN 60950-1	Yes, according to EN 60950-1
property of the output short-circuit proof	Yes	Yes
design of short-circuit protection	Constant current characteristic	Constant current characteristic
• response value current limitation typical	2.5 A	5 A
overcurrent overload capability		
• when switching on	150% I_{out} rated typ. 200 ms	150% I_{out} rated typ. 200 ms
• in normal operation	overload capability 150% I_{out} rated typ. 200 ms	overload capability 150% I_{out} rated typ. 200 ms
enduring short circuit current RMS value		
• maximum	2.5 A	5 A
measuring point for output current	Yes; 50 mV = ^ 1.9 A	Yes; 45 mV = ^ 4 A

LOGO! logic module

LOGO!Power

1-phase, 15 V DC

Technical specifications

Article number	6EP3321-6SB10-0AY0	6EP3322-6SB10-0AY0
product brand name	LOGO!Power	LOGO!Power
type of current supply	15 V/1.9 A	15 V/4 A
safety		
galvanic isolation between input and output	Yes	Yes
galvanic isolation	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178
operating resource protection class	Class II (without protective conductor)	Class II (without protective conductor)
protection class IP standard	IP20	IP20
• for emitted interference	EN 55022 Class B	EN 55022 Class B
• for mains harmonics limitation	not applicable	not applicable
• for interference immunity	EN 61000-6-2	EN 61000-6-2
standards, specifications, approvals		
certificate of suitability	Yes	Yes
• CE marking	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)
• UL approval		
• CSA approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)
• EAC approval	Yes	Yes
• NEC Class 2	Yes; according to UL1310, File E151273	Yes; according to UL1310, File E151273
• SEMI F47	Yes	Yes
type of certification		
• CB-certificate	Yes	Yes
MTBF at 40 °C	2 938 542 h	2 566 680 h
standards, specifications, approvals hazardous environments		
certificate of suitability	No	No
• IECEx	No	No
• ATEX	No	No
• ULhazloc approval	No	No
• cCSAus, Class 1, Division 2	No	No
• FM registration	No	No
standards, specifications, approvals marine classification		
shipbuilding approval	Yes	Yes
Marine classification association		
• American Bureau of Shipping Europe Ltd. (ABS)	Yes	Yes
• French marine classification society (BV)	Yes	Yes
• Det Norske Veritas (DNV)	Yes	Yes
• Lloyds Register of Shipping (LRS)	Yes	Yes
standards, specifications, approvals Environmental Product Declaration		
Environmental Product Declaration	Yes	Yes
Global Warming Potential [CO2 eq]		
• total	180.7 kg	251.2 kg
• during manufacturing	2.4 kg	3.9 kg
• during operation	178.2 kg	247.1 kg
• after end of life	0.08 kg	0.13 kg
ambient conditions		
ambient temperature		
• during operation	-25 ... +70 °C; with natural convection	-25 ... +70 °C; with natural convection
• during transport	-40 ... +85 °C	-40 ... +85 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C
environmental category according to IEC 60721	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K3, 5 ... 95% no condensation

Technical specifications

	6EP3321-6SB10-0AY0	6EP3322-6SB10-0AY0
Article number	6EP3321-6SB10-0AY0	6EP3322-6SB10-0AY0
product brand name	LOGO!Power	LOGO!Power
type of current supply	15 V/1.9 A	15 V/4 A
connection method		
type of electrical connection	screw-type terminals	screw-type terminals
• at input	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded
• at output	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²
• for auxiliary contacts	-	-
mechanical data		
width × height × depth of the enclosure	36 mm × 90 mm × 53 mm	54 mm × 90 mm × 53 mm
installation width × mounting height	36 mm × 130 mm	54 mm × 130 mm
required spacing		
• top	20 mm	20 mm
• bottom	20 mm	20 mm
• left	0 mm	0 mm
• right	0 mm	0 mm
fastening method	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions
• standard rail mounting	Yes	Yes
• S7 rail mounting	No	No
• wall mounting	Yes	Yes
housing can be lined up	Yes	Yes
net weight	0.12 kg	0.2 kg
additional information		
other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

LOGO! logic module

LOGO!Power

1-phase, 24 V DC**Overview**

Thanks to its stepped profile design, the LOGO!Power product line is ideally suited for installation in small distribution boards. The stabilized power supplies with wide-range input are available with an output voltage of 24 V in four performance classes. The 24 V variants are ideal for supplying LOGO! PLCs with the corresponding voltage input.

To further increase the 24 V availability, the LOGO!Power power supply units can be combined with **DC UPS**, **redundancy** and **selectivity modules**.

Product highlights

- 1-phase, 24 V DC/ 0.6 A, 1.3 A, 2.5 A and 4.0 A
- Input voltage 100 ... 240 V AC (85 ... 264 V), 110 ... 300 V DC
- Narrow unit with width of 18 mm, 36 mm, 54 mm or 72 mm and overall depth of 53 mm in LOGO! design
- Up to 90% efficiency
- Integrated current monitor: Actual output current measurement directly at the power supply unit (for devices at least 36 mm wide)
- cULus, cURus, NEC class 2, ABS, BV, DNV GL, LRS certifications
- LOGO!Power Ex 24 V/4.0 A, for use in Zone 2 hazardous environments (gases, vapors or mists)

Ordering data**Article No.****LOGO!Power 1-phase, 24 V DC/0.6 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V DC)
Output: 24 V DC/0.6 A

6EP3330-6SB00-0AY0**LOGO!Power 1-phase, 24 V DC/1.3 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V DC)
Output: 24 V DC/1.3 A

6EP3331-6SB00-0AY0**LOGO!Power 1-phase, 24 V DC/2.5 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V DC)
Output: 24 V DC/2.5 A

6EP3332-6SB00-0AY0**LOGO!Power 1-phase, 24 V DC/4 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V DC)
Output: 24 V DC/4 A

6EP3333-6SB00-0AY0**LOGO!Power Ex 1-phase, 24 V DC/4 A**

Stabilized power supply
Input: 100 ... 240 V AC
(110 ... 300 V DC)
Output: 24 V DC/4 A

6EP3333-6SC00-0AY0**Add-on modules****SITOP redundancy modules**

For more information, visit:
<https://www.siemens.com/sitop-redundancy/mall>

SITOP selectivity modules

For more information, visit:
<https://www.siemens.com/sitop-selectivity/mall>

SITOP BUF1200 buffer module

For more information, visit:
<https://www.siemens.com/sitop-buffering/mall>

DC UPS modules**SITOP DC UPS**

For more information, visit:
<https://www.siemens.com/sitop-ups/mall>

Technical specifications

Article number	6EP3330-6SB00-0AY0	6EP3331-6SB00-0AY0	6EP3332-6SB00-0AY0	6EP3333-6SB00-0AY0	6EP3333-6SC00-0AY0
product brand name	LOGO!Power	LOGO!Power	LOGO!Power	LOGO!Power	LOGO!Power EX
type of current supply	24 V/0.6 A	24 V/1.3 A	24 V/2.5 A	24 V/4 A	24 V/4 A
input					
type of the power supply network	1-phase AC or DC	1-phase AC or DC	1-phase AC or DC	1-phase AC or DC	1-phase AC or DC
supply voltage at AC minimum rated value	100 ... 240 V	100 ... 240 V	100 ... 240 V	100 ... 240 V	100 ... 240 V
supply voltage at AC maximum rated value					
supply voltage at AC initial value	85 ... 264 V	85 ... 264 V	85 ... 264 V	85 ... 264 V	85 ... 264 V
supply voltage at AC full-scale value					
input voltage at DC	110 ... 300 V	110 ... 300 V	110 ... 300 V	110 ... 300 V	110 ... 300 V
wide range input	Yes	Yes	Yes	Yes	Yes
overvoltage overload capability	300 V AC for 1 s	300 V AC for 1 s	300 V AC for 1 s	300 V AC for 1 s	300 V AC for 1 s
buffering time for rated value of the output current in the event of power failure minimum	40 ms	40 ms	40 ms	40 ms	40 ms
operating condition of the mains buffering	at $V_{in} = 187$ V	at $V_{in} = 187$ V	at $V_{in} = 187$ V	at $V_{in} = 187$ V	at $V_{in} = 187$ V
line frequency	50 Hz/60 Hz	50 Hz/60 Hz	50 Hz/60 Hz	50 Hz/60 Hz	50 Hz/60 Hz
line frequency initial value	47 ... 63 Hz	47 ... 63 Hz	47 ... 63 Hz	47 ... 63 Hz	47 ... 63 Hz
line frequency full-scale value					
input current					
• at rated input voltage 120 V	0.3 A	0.7 A	1.22 A	1.95 A	1.95 A
• at rated input voltage 230 V	0.2 A	0.35 A	0.66 A	0.97 A	0.97 A
current limitation of inrush current at 25 °C maximum	20 A	25 A	52 A	31 A	31 A
I ² t value maximum	0.8 A ² ·s	0.8 A ² ·s	3 A ² ·s	2.5 A ² ·s	2.5 A ² ·s
fuse protection type	internal	internal	internal	internal	internal
fuse protection type in the feeder	Recommended miniature circuit breaker: from 6 A characteristic B or from 2 A characteristic C	Recommended miniature circuit breaker: from 6 A characteristic B or from 2 A characteristic C	Recommended miniature circuit breaker: from 10 A characteristic B or from 6 A characteristic C	Recommended miniature circuit breaker: from 10 A characteristic B or from 6 A characteristic C	Recommended miniature circuit breaker: from 10 A characteristic B or from 6 A characteristic C
output					
voltage curve at output	Controlled, isolated DC voltage	Controlled, isolated DC voltage	Controlled, isolated DC voltage	Controlled, isolated DC voltage	Controlled, isolated DC voltage
output voltage at DC rated value	24 V	24 V	24 V	24 V	24 V
output voltage					
• at output 1 at DC rated value	24 V	24 V	24 V	24 V	24 V
output voltage adjustable	No	Yes; via potentiometer	Yes; via potentiometer	Yes; via potentiometer	Yes; via potentiometer
adjustable output voltage initial value		22.2 V	22.2 V	22.2 V	22.2 V
adjustable output voltage full-scale value		26.4 V	26.4 V	26.4 V	26.4 V
relative overall tolerance of the voltage	3 %	3 %	3 %	3 %	3 %
relative control precision of the output voltage					
• on slow fluctuation of input voltage	0.1 %	0.1 %	0.1 %	0.1 %	0.1 %
• on slow fluctuation of ohm loading	0.1 %	0.1 %	0.1 %	0.1 %	0.1 %
residual ripple					
• maximum	200 mV	200 mV	200 mV	200 mV	200 mV
• typical	30 mV	30 mV	30 mV	30 mV	30 mV
voltage peak					
• maximum	300 mV	300 mV	300 mV	300 mV	300 mV
• typical	50 mV	50 mV	50 mV	50 mV	50 mV
display version for normal operation	Green LED for output voltage OK	Green LED for output voltage OK	Green LED for output voltage OK	Green LED for output voltage OK	Green LED for output voltage OK

LOGO! logic module

LOGO!Power

1-phase, 24 V DC

Technical specifications

Article number	6EP3330-6SB00-0AY0	6EP3331-6SB00-0AY0	6EP3332-6SB00-0AY0	6EP3333-6SB00-0AY0	6EP3333-6SC00-0AY0
product brand name	LOGO!Power	LOGO!Power	LOGO!Power	LOGO!Power	LOGO!Power EX
type of current supply	24 V/0.6 A	24 V/1.3 A	24 V/2.5 A	24 V/4 A	24 V/4 A
behavior of the output voltage when switching on	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)
response delay maximum	0.5 s	0.5 s	0.5 s	0.5 s	0.5 s
voltage increase time of the output voltage					
• typical	100 ms	100 ms	100 ms	100 ms	100 ms
output current					
• rated value	0.6 A	1.3 A	2.5 A	4 A	4 A
• rated range	0 ... 0.6 A; +55 ... +70 °C: Derating 2%/K	0 ... 1.3 A; +55 ... +70 °C: Derating 2%/K	0 ... 2.5 A; +55 ... +70 °C: Derating 2%/K	0 ... 4 A; +55 ... +70 °C: Derating 2%/K	0 ... 4 A; +55 ... +70 °C: Derating 2%/K
supplied active power typical	14.4 W	31.2 W	60 W	96 W	96 W
bridging of equipment	No	Yes	Yes	Yes	Yes
number of parallel-switched equipment resources		2	2	2	
efficiency in percent	81 %	86 %	89.6 %	89.1 %	89.1 %
power loss [W]					
• at rated output voltage for rated value of the output current typical	3.4 W	5.1 W	7 W	11.7 W	11.7 W
• during no-load operation maximum	0.3 W	0.3 W	0.3 W	0.3 W	0.3 W
closed-loop control					
relative control precision of the output voltage with rapid fluctuation of the input voltage by +/- 15% typical	0.2 %	0.2 %	0.2 %	0.2 %	0.2 %
relative control precision of the output voltage at load step of resistive load 10/90/10 % typical	2 %	1 %	2 %	2 %	2 %
setting time					
• load step 10 to 90% typical	1 ms	1 ms	1 ms	1 ms	1 ms
• load step 90 to 10% typical	1 ms	1 ms	1 ms	1 ms	1 ms
protection and monitoring					
design of the overvoltage protection	Yes, according to EN 60950-1	Yes, according to EN 60950-1	Yes, according to EN 60950-1	Yes, according to EN 60950-1	Yes, according to EN 60950-1
property of the output short-circuit proof	Yes	Yes	Yes	Yes	Yes
design of short-circuit protection	Constant current characteristic	Constant current characteristic	Constant current characteristic	Constant current characteristic	Constant current characteristic
• response value current limitation typical	0.8 A	1.7 A	3.2 A	5 A	5 A
overcurrent overload capability					
• when switching on	150% I_{out} rated typ. 200 ms	150% I_{out} rated typ. 200 ms	150% I_{out} rated typ. 200 ms	150% I_{out} rated typ. 200 ms	150% I_{out} rated typ. 200 ms
• in normal operation	overload capability 150% I_{out} rated typ. 200 ms	overload capability 150% I_{out} rated typ. 200 ms	overload capability 150% I_{out} rated typ. 200 ms	overload capability 150% I_{out} rated typ. 200 ms	overload capability 150% I_{out} rated typ. 200 ms
enduring short circuit current RMS value					
• maximum	0.8 A	1.7 A	3.2 A	5 A	5 A
measuring point for output current	No	Yes; 50 mV = ^ 1.3 A	Yes; 50 mV = ^ 2.5 A	Yes; 50 mV = ^ 4 A	Yes; 50 mV = ^ 4 A
safety					
galvanic isolation between input and output	Yes	Yes	Yes	Yes	Yes
galvanic isolation	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178
operating resource protection class	Class II (without protective conductor)	Class II (without protective conductor)	Class II (without protective conductor)	Class II (without protective conductor)	Class II (without protective conductor)
protection class IP standard	IP20	IP20	IP20	IP20	IP20
• for emitted interference	EN 55022 Class B	EN 55022 Class B	EN 55022 Class B	EN 55022 Class B	EN 55022 Class B
• for mains harmonics limitation	not applicable	not applicable	not applicable	EN 61000-3-2	EN 61000-3-2
• for interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2

Technical specifications

Article number	6EP3330-6SB00-0AY0	6EP3331-6SB00-0AY0	6EP3332-6SB00-0AY0	6EP3333-6SB00-0AY0	6EP3333-6SC00-0AY0
product brand name	LOGO!Power	LOGO!Power	LOGO!Power	LOGO!Power	LOGO!Power EX
type of current supply	24 V/0.6 A	24 V/1.3 A	24 V/2.5 A	24 V/4 A	24 V/4 A
standards, specifications, approvals					
certificate of suitability					
• CE marking	Yes	Yes	Yes	Yes	Yes
• UL approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273
• CSA approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273, NEC class 2 (acc. to UL 1310)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950, CSA C22.2 No. 60950), File E151273
• UKCA marking					Yes
• EAC approval	Yes	Yes	Yes	Yes	
• NEC Class 2	Yes; according to UL1310, File E151273	Yes; according to UL1310, File E151273	Yes; according to UL1310, File E151273	No	No
• SEMI F47	Yes	Yes	Yes	Yes	
type of certification					
• BIS		Yes; R-41188271	Yes; R-41188271	Yes; R-41188271	
• CB-certificate	Yes	Yes	Yes	Yes	Yes
MTBF at 40 °C	4 415 040 h	3 094 996 h	2 864 520 h	2 391 480 h	2 391 480 h
standards, specifications, approvals hazardous environments					
certificate of suitability					
• IECEx	No	No	No	No	Yes; IECEx Ex ec IIC T3 Gc
• ATEX	No	No	No	No	Yes; ATEX (EX) II 3G Ex ec IIC T3 Gc
• ULhazloc approval	No	No	No	No	Yes
• cCSAus, Class 1, Division 2	No	No	No	No	Yes
• FM registration	No	No	No	No	Yes; Class I, Div. 2, Group ABCD, T4
standards, specifications, approvals marine classification					
shipbuilding approval	Yes	Yes	Yes	Yes	No
Marine classification association					
• American Bureau of Shipping Europe Ltd. (ABS)	Yes	Yes	Yes	Yes	No
• French marine classification society (BV)	Yes	Yes	Yes	Yes	No
• Det Norske Veritas (DNV)	Yes	Yes	Yes	Yes	No; in preparation
• Lloyds Register of Shipping (LRS)	Yes	Yes	Yes	Yes	No
standards, specifications, approvals Environmental Product Declaration					
Environmental Product Declaration	Yes	Yes	Yes	Yes	Yes
Global Warming Potential [CO2 eq]					
• total	107.9 kg	162 kg	223 kg	372 kg	372 kg
• during manufacturing	1.4 kg	2.4 kg	3.9 kg	5.7 kg	5.7 kg
• during operation	106.5 kg	159.6 kg	218.9 kg	366 kg	366 kg
• after end of life	0.04 kg	0.08 kg	0.13 kg	0.18 kg	0.18 kg

LOGO! logic module

LOGO!Power

1-phase, 24 V DC

Technical specifications

Article number	6EP3330-6SB00-0AY0	6EP3331-6SB00-0AY0	6EP3332-6SB00-0AY0	6EP3333-6SB00-0AY0	6EP3333-6SC00-0AY0
product brand name	LOGO!Power	LOGO!Power	LOGO!Power	LOGO!Power	LOGO!Power EX
type of current supply	24 V/0.6 A	24 V/1.3 A	24 V/2.5 A	24 V/4 A	24 V/4 A
ambient conditions					
ambient temperature					
• during operation	-25 ... +70 °C; with natural convection	-25 ... +70 °C; with natural convection	-25 ... +70 °C; with natural convection	-25 ... +70 °C; with natural convection	-25 ... +70 °C; with natural convection
• during transport	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
environmental category according to IEC 60721	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K3, 5 ... 95% no condensation
connection method					
type of electrical connection	screw-type terminals	screw-type terminals	screw-type terminals	screw-type terminals	screw-type terminals
• at input	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L, N: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded
• at output	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²	+, -: 1 screw terminal each for 0.5 ... 2.5 mm ²
• for auxiliary contacts	-	-	-	-	-
mechanical data					
width × height × depth of the enclosure	18 mm × 90 mm × 53 mm	36 mm × 90 mm × 53 mm	54 mm × 90 mm × 53 mm	72 mm × 90 mm × 53 mm	72 mm × 90 mm × 53 mm
installation width × mounting height	18 mm × 130 mm	36 mm × 130 mm	54 mm × 130 mm	72 mm × 130 mm	72 mm × 130 mm
required spacing					
• top	20 mm	20 mm	20 mm	20 mm	20 mm
• bottom	20 mm	20 mm	20 mm	20 mm	20 mm
• left	0 mm	0 mm	0 mm	0 mm	0 mm
• right	0 mm	0 mm	0 mm	0 mm	0 mm
fastening method	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions	Snaps onto DIN rail EN 60715 35x7.5/15, direct mounting in different mounting positions
• standard rail mounting	Yes	Yes	Yes	Yes	Yes
• S7 rail mounting	No	No	No	No	No
• wall mounting	Yes	Yes	Yes	Yes	Yes
housing can be lined up	Yes	Yes	Yes	Yes	Yes
net weight	0.07 kg	0.12 kg	0.2 kg	0.29 kg	0.29 kg
additional information					
other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

Overview



Thanks to its stepped profile design, the SIPLUS LOGO!Power product family is ideally suited for low installation depths, such as in miniature distribution boards. The stabilized power supplies with a wide-range input of 100 ... 240 V AC (85 ... 264 V) and 110 ... 300 V DC are available with an output voltage of 24 V in four performance classes. The 24 V versions are ideal for supplying SIPLUS LOGO! PLCs with the corresponding voltage input. The high level of efficiency across the entire load range as well as the low no-load losses result in lower overall energy consumption. Greater convenience when commissioning and servicing thanks to integrated current monitor (for devices at least 36 mm wide). The extended temperature range enables a host of additional applications.

Main product highlights

- 24 V DC / 1.3 A, 2.5 A and 4.0 A
- Narrow unit with width of 36 mm, 54 mm or 72 mm and overall depth of 53 mm in LOGO! design
- Flexible mounting: top hat DIN rail or wall mounting in a range of installation positions
- Higher energy efficiency: up to 90% efficiency over the entire load range as well as no-load power losses of < 0.3 W
- Integrated current monitor: Actual output current measurement directly at the power supply unit (for devices at least 36 mm wide)
- Global use: International certifications such as UL, CSA, FM or ATEX

Ordering data

Article No.

SIPLUS LOGO!Power 24 V 1.3 A

Extended temperature range and exposure to environmental substances

Input 100 ... 240 V AC
Output 24 V DC, 1.3 A

6AG1331-6SB00-7AY0

SIPLUS LOGO!Power 24 V 2.5 A

Extended temperature range and exposure to environmental substances

Input 100 ... 240 V AC
Output 24 V DC, 2.5 A

6AG1332-6SB00-7AY0

SIPLUS LOGO!Power 24 V 4 A

Extended temperature range and exposure to environmental substances

Input 100 ... 240 V AC
Output 24 V DC, 4 A

6AG1333-6SB00-7AY0


LOGO! logic module

SIPLUS LOGO!Power

SIPLUS LOGO!Power

Technical specifications

Article number	6AG1331-6SB00-7AY0	6AG1332-6SB00-7AY0	6AG1333-6SB00-7AY0
Based on	6EP3331-6SB00-0AY0	6EP3332-6SB00-0AY0	6EP3333-6SB00-0AY0
product brand name	SIPLUS LOGO!Power	SIPLUS LOGO!Power	SIPLUS LOGO!Power
type of current supply	24 V/1.3 A	24 V/2.5 A	24 V/4 A
ambient conditions			
ambient temperature			
<ul style="list-style-type: none"> in horizontal mounting position during operation during transport during storage 	-40; Startup @ -25 °C ... +70 °C; with natural convection	-40; Startup @ -25 °C ... +70 °C; with natural convection	-40; Startup @ -25 °C ... +70 °C; with natural convection
installation altitude at height above sea level maximum	6 000 m	6 000 m	6 000 m
ambient condition relating to ambient temperature - air pressure - installation altitude	In case of operation at altitudes of 2000 - 6000 m above sea level: Output power derating of -7.5 %/1000 m or reduction of the ambient temperature by 5 K/1000 m	In case of operation at altitudes of 2000 - 6000 m above sea level: Output power derating of -7.5 %/1000 m or reduction of the ambient temperature by 5 K/1000 m	In case of operation at altitudes of 2000 - 6000 m above sea level: Output power derating of -7.5 %/1000 m or reduction of the ambient temperature by 5 K/1000 m
relative humidity with condensation according to IEC 60068-2-38 maximum	100 %; RH incl. condensation/frost (no commissioning if condensation is present), horizontal installation	100 %; RH incl. condensation/frost (no commissioning if condensation is present), horizontal installation	100 %; RH incl. condensation/frost (no commissioning if condensation is present), horizontal installation
chemical resistance to commercially available cooling lubricants	Yes; incl. diesel and oil droplets in the air	Yes; incl. diesel and oil droplets in the air	Yes; incl. diesel and oil droplets in the air
resistance to biologically active substances conformity according to EN 60721-3-3	Yes; Class 3B2 mold, fungal, sponge spores (except fauna); class 3B3 upon request	Yes; Class 3B2 mold, fungal, sponge spores (except fauna); class 3B3 upon request	Yes; Class 3B2 mold, fungal, sponge spores (except fauna); class 3B3 upon request
resistance to chemically active substances conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (severity level 3)	Yes; Class 3C4 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (severity level 3)	Yes; Class 3C4 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (severity level 3)
resistance to mechanically active substances conformity according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust	Yes; Class 3S4 incl. sand, dust	Yes; Class 3S4 incl. sand, dust
resistance to biologically active substances conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal, sponge spores (except fauna)	Yes; Class 6B2 mold, fungal, sponge spores (except fauna)	Yes; Class 6B2 mold, fungal, sponge spores (except fauna)
resistance to chemically active substances conformity according to EN 60721-3-6	Yes; Class 6C3 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (severity level 3)	Yes; Class 6C3 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (severity level 3)	Yes; Class 6C3 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (severity level 3)
resistance to mechanically active substances conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust	Yes; Class 6S3 incl. sand, dust	Yes; Class 6S3 incl. sand, dust
coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability	Yes; Class 2 for high availability	Yes; Class 2 for high availability
type of coating protection against pollution according to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
type of test of the coating according to MIL-I-46058C	Yes; Discoloration of the coating during service life possible	Yes; Discoloration of the coating during service life possible	Yes; Discoloration of the coating during service life possible
product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal Coating, Class A	Yes; Conformal Coating, Class A	Yes; Conformal Coating, Class A

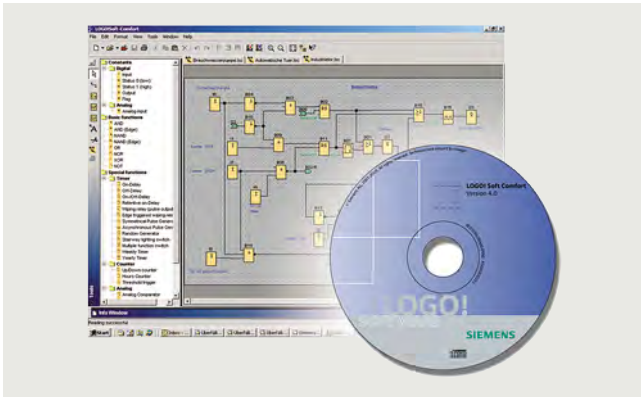Overview


- The user-friendly software for generating switching programs on the PC for single-user mode and network mode
- Generation of switching programs in a function block diagram (FBD) or ladder logic (LAD)
- Furthermore, testing, simulation, online testing and archiving of the switching programs
- Professional documentation with the help of various comment and print functions

Minimum system requirements
Windows XP (32-bit), 7 (32/64-bit) or 8 (32/64-bit)

- PC Pentium IV.
- 150 MB free disk capacity.
- 256 MB RAM.
- SVGA graphics card with minimum resolution 800 x 600 (256 colors).
- DVD-ROM

Mac OS X

- Mac OS X 10.4

Linux

- Tested with SUSE Linux 11.3 SP2, kernel 3.0.76
- Runs on all Linux distributions on which Java 2 runs.
- Please refer to your relevant Linux distribution for the necessary hardware requirements.

Ordering data
LOGO! SOFT Comfort V8

Single license for 1 installation
 E-SW, LWE, Integrity Test Tool,
 SW and documentation on DVD,
 6 languages, executable under
 Windows XP, 7, 8, 10 (32 and 64-bit)
 and Windows 11,
 Mac OSx 10.14 Mojave,
 Mac OS 10.15 Big Sur,
 Mac OS12.1 Monterey,
 Linux SUSE 15 (64-bit)

Article No.
6ED1058-0BA08-0YA1

Overview


- Switching module for the direct switching of resistive loads and motors

Ordering data
Article No.
LOGO! Contact 24 switching module
6ED1057-4CA00-0AA0

For direct switching of resistive loads up to 20 A and motors up to 4 kW, 24 V DC, 3 NO contacts+1 NC contact
 EAN: 4025515050742

LOGO! Contact 230 switching module
6ED1057-4EA00-0AA0

For direct switching of resistive loads up to 20 A and motors up to 4 kW, 230 V AC, 3 NO contacts+1 NC contact
 EAN: 4025515050759

Technical specifications

Article number	6ED1057-4CA00-0AA0	6ED1057-4EA00-0AA0
	LOGO! Contact Mod., DC 24V, 3NO/1NC	LOGO! Contact Mod., AC 230V,3NO/1NC
Supply voltage		
Rated value (DC)		
• 24 V DC	Yes	
Rated value (AC)		
• 230 V AC		Yes
Standards, approvals, certificates		
CE mark	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C	-25 °C
• max.	55 °C	55 °C
Dimensions		
Width	36 mm	36 mm
Height	72 mm	72 mm
Depth	55 mm	55 mm
Weights		
Weight, approx.	160 g	160 g

LOGO! logic module

LOGO! accessories

LOGO! mounting kit**Overview**

LOGO! and SIPLUS LOGO! are designed for quick and easy mounting on top hat DIN rails. With the mounting kit, these devices can also be easily and safely installed in front panels. If the supplied washer and seals are used, the devices are reliably protected against harsh environmental conditions up to the IP65 degree of protection.

Ordering data**Article No.****Front panel mounting kit**


Width 4 U, with keys

6AG1057-1AA00-0AA3

Width 8 U, with keys

6AG1057-1AA00-0AA2

Overview

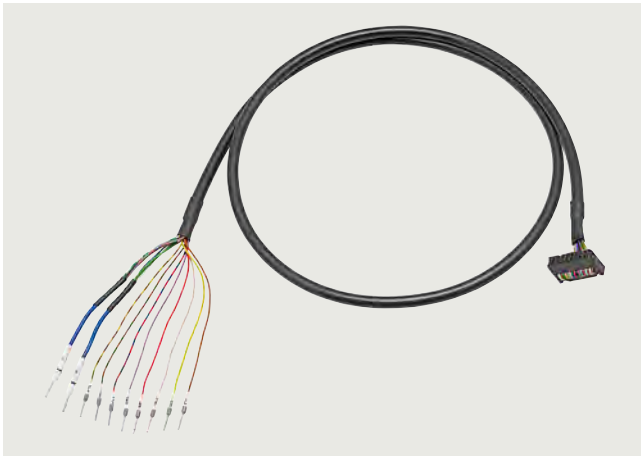

SIMATIC TOP connect universal connecting cable

The wiring of the

- SIMATIC S7-1500 IO (25 mm)
- SIMATIC ET 200SP
- SIMATIC S7-1200
- LOGO!


with the sensors/actuators is a significant factor with respect to time/cost overhead during configuration, control cabinet design, procurement and ease of servicing. The SIMATIC TOP connect system cabling makes connection easy, fast and secure.

Design

The unshielded universal connection cable is offered for a wide range of control cabinet concepts.

It comprises:

- 16-pin round cable with a core cross-section of 0.14 mm^2 , pre-assembled with wire end ferrules for connection to the controller:
 - Labeled with "0" ... "7" for the control inputs/outputs
 - Labeled with "M" for mass
 - Labeled with "L+" for 24 V DC potential
- 16-pin ID (insulation displacement) connector for connection to the SIMATIC TOP connect connection modules for 8 I/Os:
 - 3-wire connection using the appropriate connection module for quick, error-free wiring
 - Galvanic isolation and adaptation using a coupling relay for easy implementation of potential groups in the system
 - High output current (up to 4 A), even for higher switching frequencies, using an optocoupler module (overload and short-circuit proof)
 - Implementation of isolating terminals using switch modules enabling individual signals to be measured
 - Channel-wise protection of I/Os using a fuse module with a thermal fuse

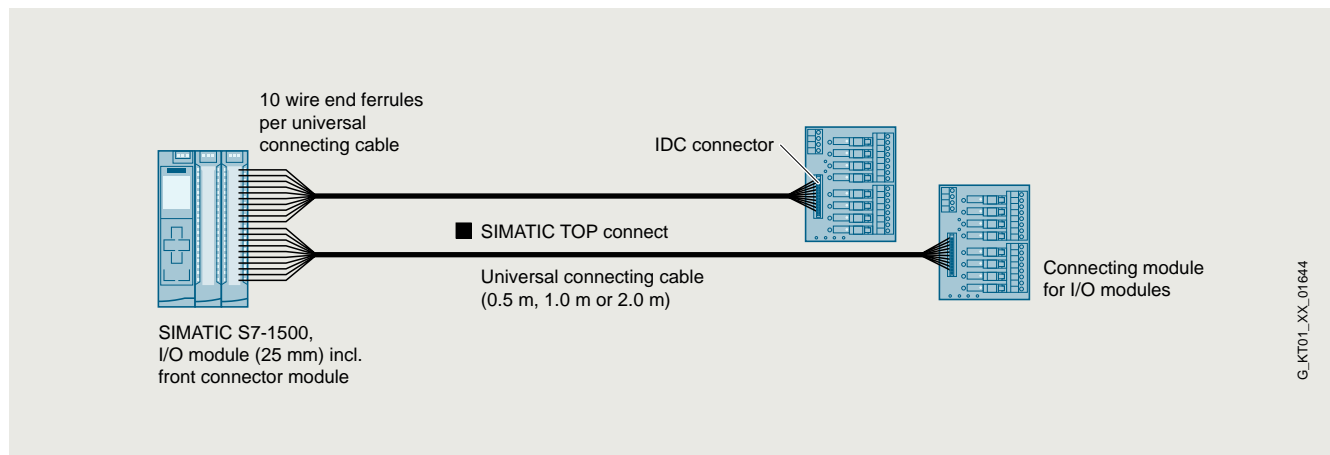


SIMATIC TOP connect universal connection cable

G_KT01_XX_01644

LOGO! logic module

LOGO! accessories

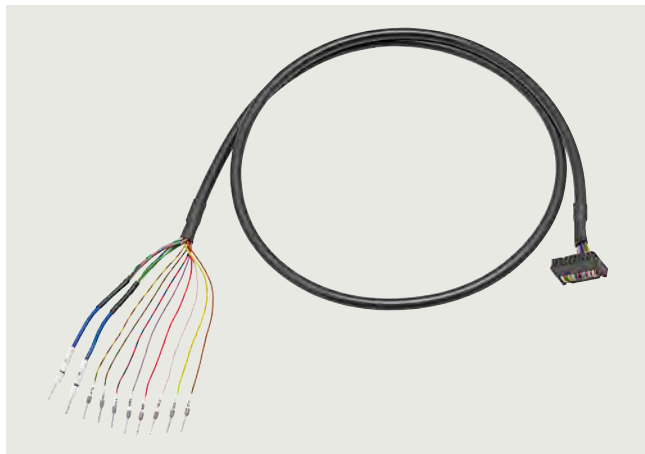System cabling for SIMATIC S7-1500 IO (25 mm), ET 200SP, S7-1200 and LOGO!**Overview universal connecting cable**

SIMATIC TOP connect universal connecting cable

The universal connecting cable constitutes the link between the standard connection of the SIMATIC S7-1500 IO (25 mm), SIMATIC ET 200SP, SIMATIC S7-1200 or LOGO! and the SIMATIC TOP connect terminal module. It transmits 8 signals and the supply voltage. The connecting cable is available in lengths of 0.5 m / 1.0 m / 2.0 m. the maximum technically feasible length is 30 m.

Ordering data**Article No.**

Universal connecting cables for SIMATIC S7-1500 IO (25 mm), SIMATIC ET 200SP, SIMATIC S7-1200 and LOGO!

16 x 0.14 mm² unshielded

- 0.5 m
- 1.0 m
- 2.0 m

6ES7923-0BA50-0FB0
6ES7923-0BB00-0FB0
6ES7923-0BC00-0FB0

Overview connection modules

The connection modules are used instead of conventional terminal blocks and act as the interface between the PLC and signals from the field. All digital modules with 8 I/Os can be used.

Ordering data**Article No.****TP1 connection module**

For 1-conductor connection, for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0AA20-0AC0
6ES7924-0AA20-0AA0
6ES7924-0AA20-0BC0
6ES7924-0AA20-0BA0

TP3 connection module

For 3-conductor connection, for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs
- Push-in terminals with LEDs and one isolating terminal per channel
- Screw-type terminals with LEDs and one isolating terminal per channel
- Push-in terminals with LEDs and fuse per channel
- Screw-type terminals with LEDs and fuse per channel

6ES7924-0CA20-0AC0
6ES7924-0CA20-0AA0
6ES7924-0CA20-0BC0
6ES7924-0CA20-0BA0
6ES7924-0CH20-0BC0
6ES7924-0CH20-0BA0
6ES7924-0CL20-0BC0
6ES7924-0CL20-0BA0

TPRo connection module

Relay module for 8 outputs, relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BD20-0BC0
6ES7924-0BD20-0BA0

TPRi connection module

Relay module for 8 inputs (230 V AC), relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BE20-0BC0
6ES7924-0BE20-0BA0

TPRi connection module

Relay module for 8 inputs (110 V AC), relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BG20-0BC0
6ES7924-0BG20-0BA0

TPOo connection module

Optocoupler module for 8 outputs (max. 24 V DC/4 A)

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BF20-0BC0
6ES7924-0BF20-0BA0

SIMATIC S7-1200 Basic Controllers



3/2	Introduction	3/126	SIPLUS CMS1200 SM 1281 Condition Monitoring
3/2	S7-1200	3/128	SIM 1274 simulator
3/4	Central processing units	3/129	BB 1297 battery board
3/4	<u>Standard CPUs</u>	3/130	SIWAREX WP231 weighing electronics
3/4	CPU 1211C	3/133	SIWAREX WP241 weighing electronics
3/9	CPU 1212C	3/135	SIWAREX WP251 weighing electronics
3/14	CPU 1214C	3/138	<u>Communication</u>
3/19	CPU 1215C	3/138	CM 1241 communications module
3/24	CPU 1217C	3/140	CB 1241 RS485 communication board
3/28	<u>SIPLUS standard CPUs</u>	3/141	CM 1242-5
3/28	SIPLUS CPU 1212C	3/143	CM 1243-2
3/33	SIPLUS CPU 1214C	3/145	DCM 1271 data decoupling module
3/40	SIPLUS CPU 1215C	3/147	CM 1243-5
3/47	SIPLUS CPU 1217C	3/149	CSM 1277 unmanaged
3/49	<u>Fail-safe CPUs</u>	3/152	CP 1243-1
3/55	<u>SIPLUS fail-safe CPUs</u>	3/154	CP 1243-7 LTE
3/58	I/O modules	3/157	CP 1243-8 IRC
3/58	<u>Digital modules</u>	3/160	SIMATIC RF120C
3/58	SM 1221 digital input modules	3/162	<u>SIPLUS communication</u>
3/60	SB 1221 digital input modules	3/162	SIPLUS CM 1241 communications modules
3/62	SM 1222 digital output modules	3/164	SIPLUS CB 1241 RS485 communication board
3/65	SB 1222 digital output modules	3/165	SIPLUS CM 1242-5 communications modules
3/67	SM 1223 digital input/output modules	3/166	SIPLUS CM 1243-2 communications modules
3/71	SB 1223 digital input/output modules	3/167	SIPLUS CM 1243-5 communications modules
3/73	<u>SIPLUS digital modules</u>	3/169	SIPLUS CP 1243-1 communications modules
3/73	SIPLUS SM 1221 digital input modules	3/171	SIPLUS CSM 1277
3/75	SIPLUS SB 1221 digital input modules	3/173	<u>Connection system</u>
3/77	SIPLUS SM 1222 digital output modules	3/173	System cabling for SIMATIC S7-1500 IO (25 mm), ET 200SP, S7-1200 and LOGO!
3/82	SIPLUS SB 1222 digital output modules	3/175	<u>Fail-safe I/O modules</u>
3/84	SIPLUS SM 1223 digital input/output modules	3/175	SM 1226 fail-safe digital input
3/89	SIPLUS SB 1223 digital input/output modules	3/178	SM 1226 fail-safe digital output
3/91	<u>Analog modules</u>	3/181	SM 1226 fail-safe relay output
3/91	SM 1231 analog input modules	3/184	<u>SIPLUS Fail-safe digital inputs and outputs</u>
3/94	SB 1231 analog input modules	3/184	SIPLUS SM 1226 fail-safe digital input
3/95	SM 1232 analog output modules	3/185	SIPLUS SM 1226 fail-safe digital output
3/97	SB 1232 analog output modules	3/186	SIPLUS SM 1226 fail-safe relay output
3/98	SM 1234 analog input/output modules	3/187	Power supplies
3/100	SM 1231 thermocouple module	3/187	1-phase, 24 V DC (for S7-1200)
3/103	SB 1231 thermocouple signal board	3/189	SIPLUS power supplies
3/104	SM 1231 RTD signal module	3/189	1-phase, 24 V DC (for SIPLUS S7-1200)
3/107	SB 1231 RTD signal board	3/191	Operator control and monitoring
3/108	SM 1238 Energy Meter 480 V AC analog input modules	3/191	Standard devices 2nd Generation
3/110	<u>SIPLUS analog modules</u>	3/192	Comfort Panels standard devices
3/110	SIPLUS SM 1231 analog input modules	3/193	SIPLUS operator control and monitoring
3/112	SIPLUS SM 1232 analog output modules	3/193	SIPLUS Basic Panels (2nd Generation)
3/114	SIPLUS SB 1232 analog output modules	3/196	SIPLUS Basic Panels (1st Generation)
3/116	SIPLUS SM 1234 analog input/output modules	3/197	SIPLUS Comfort Panels Standard
3/118	SIPLUS SM 1231 thermocouple module	3/202	Add-on products from third-party manufacturers
3/120	SIPLUS SM 1231 RTD signal module	3/202	SIMATIC S7-1200 CM CANopen
3/122	SIPLUS SB 1231 RTD signal board		
3/123	<u>Special modules</u>		
3/123	SM 1278 4xIO-Link Master		
3/124	SIPLUS SM 1278 4xIO-Link Master		

SIMATIC S7-1200 Basic Controllers

Introduction

S7-1200

Overview

3



SIMATIC S7-1200 Controllers are the intelligent choice for compact automation solutions with integrated I/Os, communication functions and technology functions for automation tasks in the lower to middle performance range. They are available in standard and fail-safe versions.

The scalable SIMATIC S7-1200 Controllers have integrated inputs and outputs as well as communication options and allow modular expansion. Digital and analog input and output modules as well as different communications and special modules enable flexible adaptation to the relevant automation task.

Technical specifications

General technical specifications SIMATIC S7-1200	
Degree of protection	IP20 acc. to IEC 529
Ambient temperature	
• Operation (95% humidity)	
- Horizontal installation	-20 ... +60 °C
- Vertical installation	-20 ... +50 °C
• Transportation and storage	
- With 95% humidity	-40 ... +70 °C 25 ... 55 °C
Insulation	
• 5/24 V DC circuits	500 V AC test voltage
• 115/230 V AC circuits to ground	1500 V AC test voltage
• 115/230 V AC circuits to 115/230 V AC circuits	1500 V AC test voltage
• 230 V AC circuits to 5/24 V DC circuits	1500 V AC test voltage
• 115 V AC circuits to 5/24 V DC circuits	1500 V AC test voltage
Electromagnetic compatibility	Requirements of the EMC directive
• Noise immunity acc. to EN 50082-2	Test acc. to: IEC 801-2, IEC 801-3, IEC 801-4, EN 50141, EN 50204, IEC 801-5, VDE 0160
• Emitted interference acc. to EN 50081-1 and EN 50081-2	Test according to EN 55011, Class A, Group 1
Mechanical strength	
• Vibrations, test acc. to / tested with	IEC 68, Part 2-6: 10 ... 57 Hz; constant amplitude 0.3 mm; 58 ... 150 Hz; constant acceleration 1 g (mounted on DIN rail) or 2 g (mounted in switchboard); mode of vibration: frequency sweeps with a sweep rate of 1 octave/minute; duration of vibration: 10 frequency sweeps per axis in each direction of the three mutually perpendicular axes
• Shocks, test acc. to / tested with	IEC 68, Part 2-27/half-sine: magnitude of shock 15 g (peak value), duration 11 ms, 6 shocks in each of the three mutually perpendicular axes

General technical specifications of SIPLUS S7-1200	
Ambient temperature range	-40/-25/-20 ... +55/+60/+70 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical specifications	The technical specifications of the standard product apply except for the ambient conditions.
Ambient conditions	
Extended range of ambient conditions	
• with reference to ambient temperature, air pressure and altitude	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m) 0° C
• At cold restart, min.	
Relative humidity	
• with condensation, max.	100 %; RH incl. condensation/frost (no commissioning in bedewed state)
Resistance	
• to biologically active substances/compliance with EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (except fauna); the supplied plug covers must remain in place on the unused interfaces during operation.
• to chemically active substances/compliance with EN 60721-3-3	Yes; Class 3C4 (RH < 75%) incl. salt spray in accordance with EN 60068-2-52 (severity 3); the supplied plug covers must remain in place on the unused interfaces during operation.
• to mechanically active substances, compliance with EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; the supplied plug covers must remain in place on unused interfaces during operation.

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1211C

Overview



- Controller for intro to S7
- Expandable by:
 - 1 signal board (SB), battery board (BB) or communication board (CB)
 - Max. 3 communications modules (CM)

Ordering data

CPU 1211C

SIMATIC S7-1200, CPU 1211C, compact CPU, AC/DC/relay

Onboard I/O: 6 DI 24 V DC;
4 DO relay 2 A; 2 AI 0-10 V DC,
power supply: 85-264 V AC
at 47-63 Hz, program/
data memory 50 KB

SIMATIC S7-1200, CPU 1211C, compact CPU, DC/DC/DC

Onboard I/O: 6 DI 24 V DC;
4 DO 24 V DC; 2 AI 0-10 V DC,
power supply: 20.4-28.8 V DC,
program/data memory 50 KB

SIMATIC S7-1200, CPU 1211C, compact CPU, DC/DC/relay

Onboard I/O: 6 DI 24 V DC;
4 DO relay 2 A; 2 AI 0-10 V DC,
power supply: 20.4-28.8 V DC,
program/data memory 50 KB

Accessories

SB 1221 signal board

SIMATIC S7-1200, SB 1221 digital input module

4 DI, 5 V DC 200 kHz,
sourcing input

SIMATIC S7-1200, SB 1221 digital input module

4 DI, 24 V DC 200 kHz,
sourcing input

SB 1222 signal board

SIMATIC S7-1200, SB 1222 digital output module

4 DQ, 5 V DC 200 kHz

SIMATIC S7-1200, SB 1222 digital output module

4 DQ, 24 V DC 200 kHz

SB 1223 signal board

SIMATIC S7-1200, SB 1223 digital input/output module

2 DI/2 DO, 2 DI 24 V DC/
2 DO 24 V DC

SIMATIC S7-1200, SB 1223 digital input/output module

2 DI/2 DQ, 5 V DC 200 kHz

SIMATIC S7-1200, SB 1223 digital input/output module

2 DI/2 DQ, 24 V DC 200 kHz

Article No.

6ES7211-1BE40-0XB0

6ES7211-1AE40-0XB0

6ES7211-1HE40-0XB0

6ES7221-3AD30-0XB0

6ES7221-3BD30-0XB0

6ES7222-1AD30-0XB0

6ES7222-1BD30-0XB0

6ES7223-0BD30-0XB0

6ES7223-3AD30-0XB0

6ES7223-3BD30-0XB0

Article No.

SB 1231 signal board

SIMATIC S7-1200, analog input, SB 1231

1 AI, +/-10 V DC (12-bit resolution)
or 0-20 mA

SIMATIC S7-1200, analog input, SB 1231 TC

1 AI type J or K thermocouples

SIMATIC S7-1200, analog input, SB 1231RTD

1 AI RTD, PT 100 and PT1000

SIMATIC S7-1200, analog output, SB 1232

1 AO, +/-10 V DC (12-bit resolution)
or 0-20 mA (11-bit resolution)

SIMATIC S7-1200, CB 1241 communication board

RS-485, terminal block,
supports Freeport

SIMATIC S7-1200, BB 1297 battery board

For long-term buffering of the
real-time clock, pluggable in the
signal board slot of the S7-12XX
(from FW3.0);
battery (CR1025) not included in
scope of supply

SIMATIC S7-1200, SIM 1274 simulator module

For CPU 1211/1212 8 input
switches 24 V DC

SIMATIC S7-1200, SIM 1274 simulator

2 potentiometer inputs

SIMATIC Memory Card (optional)

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU

3.3 V Flash, 256 MB

6ES7231-4HA30-0XB0

6ES7231-5QA30-0XB0

6ES7231-5PA30-0XB0

6ES7232-4HA30-0XB0

6ES7241-1CH30-1XB0

6ES7297-0AX30-0XA0

6ES7274-1XF30-0XA0

6ES7274-1XA30-0XA0

6ES7954-8LC03-0AA0

6ES7954-8LE03-0AA0

6ES7954-8LF03-0AA0

6ES7954-8LL03-0AA0

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for CPU 1211C/1212C on output side, (4 units with 8 pins each)	6ES7292-2AH30-0XA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0
Terminal block (spare part)		SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-2BC30-0XA0
For CPU 1211C AC/DC/relay		For CPU 1211C DC/DC/relay	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1211C/1212C on input side, (4 units with 14 screws each)	6ES7292-1AP40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1211C/1212C on input side (4 units with 14 screws each)	6ES7292-1AP30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, for CPU 1211C/1212C on input side, (4 units with 14 pins each)	6ES7292-2AP40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for CPU 1211C/1212C on input side, (4 units with 14 pins each)	6ES7292-2AP30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1211C/1212C on output side, (4 units with 8 screws each)	6ES7292-1AH40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1211C/1212C on output side, (4 units with 8 screws each)	6ES7292-1AH40-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, CPU 1211C/1212C on output side, (4 units with 8 pins each)	6ES7292-2AH40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, CPU 1211C/1212C on output side, (4 units with 8 pins each)	6ES7292-2AH40-0XA0
SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0
SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-2BC30-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-2BC30-0XA0
For CPU 1211C DC/DC/DC		SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-2BC30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1211C/1212C on input side (4 units with 14 screws each)	6ES7292-1AP30-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for CPU 1211C/1212C on input side, (4 units with 14 pins each)	6ES7292-2AP30-0XA0	SIMATIC S7-1200, RJ45 strain relief Single port 4 units per packing unit	6ES7290-3AA30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1211C/1212C on output side (4 units with 8 screws each)	6ES7292-1AH30-0XA0	SIMATIC S7-1200, spare part front flaps CPU 1211/1212 (CPU 1211/1212 front flap top/front flap bottom/signal board cover) 4 units each	6ES7291-1AA30-0XA0

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1211C**Ordering data****Article No.****Article No.****STEP 7 Professional / Basic V19**

Target system:

SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

Windows 10 (64-bit)

- Windows 10 Home Version 22H2
- Windows 10 Professional Version 22H2
- Windows 10 Enterprise Version 2009/20H2
- Windows 10 Enterprise Version 21H2
- Windows 10 Enterprise Version 22H2
- Windows 10 Enterprise 2016 LTSC
- Windows 10 Enterprise 2019 LTSC
- Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included,
fr, sp, it, ru, jp, kr as download

**SIMATIC STEP 7 Prof. V19;
floating license****6ES7822-1AA23-0YA5**

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download;
for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

**SIMATIC STEP 7 Prof. V19,
floating license download¹⁾****6ES7822-1AE23-0YA5**

Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download;
for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

The system requirements specification can be found at <https://www.siemens.com/compatool>

Consignee email address required for delivery

**SIMATIC STEP 7 Basic V19,
floating license****6ES7822-0AA23-0YA5**

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download;
for configuration of SIMATIC S7-1200; SIMATIC Basic Panels; SIMATIC Unified Basic Panels;

The system requirements specification can be found at <https://www.siemens.com/compatool>

**SIMATIC STEP 7 Basic V19,
floating license download¹⁾****6ES7822-0AE23-0YA5**

Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download;
for configuration of SIMATIC S7-1200; SIMATIC Basic Panels; SIMATIC Unified Basic Panels;

The system requirements specification can be found at <https://www.siemens.com/compatool>

Consignee email address required for delivery

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7211-1BE40-0XB0 CPU 1211C, AC/DC/Relay, 6DI/4DO/2AI	6ES7211-1AE40-0XB0 CPU 1211C, DC/DC/DC, 6DI/4DO/2AI	6ES7211-1HE40-0XB0 CPU 1211C, DC/DC/Relay, 6DI/4DO/2AI
General information			
Product type designation	CPU 1211C AC/DC/relay	CPU 1211C DC/DC/DC	CPU 1211C DC/DC/relay
Engineering with			
• Programming package	STEP 7 V18 or higher	STEP 7 V18 or higher	STEP 7 V18 or higher
Supply voltage			
Rated value (DC)		Yes	Yes
• 24 V DC			
Rated value (AC)	Yes		
• 120 V AC			
• 230 V AC	Yes		
Encoder supply			
24 V encoder supply			
• 24 V	20.4 to 28.8V	L+ minus 4 V DC min.	L+ minus 4 V DC min.
Memory			
Work memory			
• integrated	75 kbyte	75 kbyte	0.75 kbyte
Load memory			
• integrated	1 Mbyte	1 Mbyte	1 Mbyte
• Plug-in (SIMATIC Memory Card), max.	with SIMATIC memory card	with SIMATIC memory card	with SIMATIC memory card
Backup			
• without battery	Yes	Yes	Yes
CPU processing times			
for bit operations, typ.	0.08 µs; / instruction	0.08 µs; / instruction	0.08 µs; / instruction
for word operations, typ.	1.7 µs; / instruction	1.7 µs; / instruction	1.7 µs; / instruction
for floating point arithmetic, typ.	2.3 µs; / instruction	2.3 µs; / instruction	2.3 µs; / instruction
Data areas and their retentivity			
Flag			
• Size, max.	4 kbyte; Size of bit memory address area	4 kbyte; Size of bit memory address area	4 kbyte; Size of bit memory address area
Address area			
Process image			
• Inputs, adjustable	1 kbyte	1 kbyte	1 kbyte
• Outputs, adjustable	1 kbyte	1 kbyte	1 kbyte
Time of day			
Clock			
• Hardware clock (real-time)	Yes	Yes	Yes
Digital inputs			
Number of digital inputs	6; Integrated	6; Integrated	6; Integrated
• of which inputs usable for technological functions	6; HSC (High Speed Counting)	6; HSC (High Speed Counting)	6; HSC (High Speed Counting)
Digital outputs			
Number of digital outputs	4; Relays	4	4; Relays
• of which high-speed outputs		4; 100 kHz Pulse Train Output	
Analog inputs			
Number of analog inputs	2	2	2
Input ranges			
• Voltage	Yes	Yes	Yes
Analog outputs			
Number of analog outputs	0	0	0
1. Interface			
Interface type	PROFINET	PROFINET	PROFINET
Protocols			
• PROFINET IO Controller	Yes	Yes	Yes
• PROFINET IO Device	Yes	Yes	Yes
• SIMATIC communication	Yes	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes
• Media redundancy	No	No	No

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1211C

Technical specifications

Article number	6ES7211-1BE40-0XB0 CPU 1211C, AC/DC/Relay, 6DI/4DO/2AI	6ES7211-1AE40-0XB0 CPU 1211C, DC/DC/DC, 6DI/4DO/2AI	6ES7211-1HE40-0XB0 CPU 1211C, DC/DC/Relay, 6DI/4DO/2AI
Protocols			
Open IE communication			
• TCP/IP	Yes	Yes	Yes
• ISO-on-TCP (RFC1006)	Yes	Yes	Yes
• UDP	Yes	Yes	Yes
Web server			
• supported	Yes	Yes	Yes
OPC UA			
• OPC UA Server	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; Data access (read, write, subscribe), runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required
communication functions / header			
S7 communication			
• supported	Yes	Yes	Yes
Number of connections			
• overall	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max
Integrated Functions			
Counter			
• Number of counters	6	6	6
• Counting frequency, max.	100 kHz	100 kHz	100 kHz
Frequency measurement	Yes	Yes	Yes
controlled positioning	Yes	Yes	Yes
Number of position-controlled positioning axes, max.	8	8	8
Number of positioning axes via pulse-direction interface	Up to 4 with SB 1222	4; With integrated outputs	Up to 4 with SB 1222
PID controller	Yes	Yes	Yes
Number of alarm inputs	4	4	4
Number of pulse outputs		4	
Limit frequency (pulse)		100 kHz	
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C	-20 °C	-20 °C
• max.	60 °C	60 °C	60 °C
Pollutant concentrations			
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
configuration / header			
configuration / programming / header			
Programming language			
- LAD	Yes	Yes	Yes
- FBD	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
Dimensions			
Width	90 mm	90 mm	90 mm
Height	100 mm	100 mm	100 mm
Depth	75 mm	75 mm	75 mm
Weights			
Weight, approx.	420 g	370 g	380 g

Overview



- Controller for intro to S7 with basic expansion options
- Expandable by:
 - 1 signal board (SB), battery board (BB) or communication board (CB)
 - 2 signal modules (SM)
 - Max. 3 communications modules (CM)

3

Ordering data	Article No.	Ordering data	Article No.
CPU 1212C		SB 1231 signal board	
SIMATIC S7-1200, CPU 1212C, compact CPU, AC/DC/relay	6ES7212-1BE40-0XB0	SIMATIC S7-1200, analog input, SB 1231	6ES7231-4HA30-0XB0
Onboard I/O: 8 DI 24 V DC; 6 DO relay 2 A; 2 AI 0-10 V DC, power supply: 85-264 V AC at 47-63 Hz, program/ data memory 75 KB		1 AI, +/-10 V DC (12-bit resolution) or 0-20 mA	
SIMATIC S7-1200, CPU 1212C, compact CPU, DC/DC/DC	6ES7212-1AE40-0XB0	SIMATIC S7-1200, analog input, SB 1231 TC	6ES7231-5QA30-0XB0
Onboard I/O: 8 DI 24 V DC; 6 DO 24 V DC; 2 AI 0-10 V DC, power supply: 20.4-28.8 V DC, program/data memory 75 KB		1 AI type J or K thermocouples	
SIMATIC S7-1200, CPU 1212C, compact CPU, DC/DC/relay*	6ES7212-1HE40-0XB0	SIMATIC S7-1200, analog input, SB 1231RTD	6ES7231-5PA30-0XB0
Onboard I/O: 8 DI 24 V DC; 6 DO relay 2 A; 2 AI 0-10 V DC, power supply: 20.4-28.8 V DC, program/data memory 75 KB		1 AI RTD, PT 100 and PT1000	
Accessories		SIMATIC S7-1200, analog output, SB 1232	6ES7232-4HA30-0XB0
SB 1221 signal board		1 AO, +/-10 V DC (12-bit resolution) or 0-20 mA (11-bit resolution)	
SIMATIC S7-1200, SB 1221 digital input module	6ES7221-3AD30-0XB0	SIMATIC S7-1200, CB 1241 communication board	6ES7241-1CH30-1XB0
4 DI, 5 V DC 200 kHz, sourcing input		RS-485, terminal block, supports Freeport	
SIMATIC S7-1200, SB 1221 digital input module	6ES7221-3BD30-0XB0	SIMATIC S7-1200, BB 1297 battery board	6ES7297-0AX30-0XA0
4 DI, 24 V DC 200 kHz, sourcing input		For long-term buffering of the real-time clock, pluggable in the signal board slot of the S7-12XX (from FW3.0); battery (CR1025) not included in scope of supply	
SB 1222 signal board		SIMATIC S7-1200, SIM 1274 simulator module	6ES7274-1XF30-0XA0
SIMATIC S7-1200, SB 1222 digital output module	6ES7222-1AD30-0XB0	For CPU 1211/1212 8 input switches 24 V DC	
4 DQ, 5 V DC 200 kHz		SIMATIC S7-1200, SIM 1274 simulator	6ES7274-1XA30-0XA0
SIMATIC S7-1200, SB 1222 digital output module	6ES7222-1BD30-0XB0	2 potentiometer inputs	
4 DQ, 24 V DC 200 kHz		SIMATIC Memory Card (optional)	
SB 1223 signal board		SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS	6ES7954-8LC03-0AA0
SIMATIC S7-1200, SB 1223 digital input/output module	6ES7223-0BD30-0XB0	3.3 V Flash, 4 MB	
2 DI/2 DO, 2 DI 24 V DC/ 2 DO 24 V DC		SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS	6ES7954-8LE03-0AA0
SIMATIC S7-1200, SB 1223 digital input/output module	6ES7223-3AD30-0XB0	3.3 V Flash, 12 MB	
2 DI/2 DQ, 5 V DC 200 kHz		SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS	6ES7954-8LF03-0AA0
SIMATIC S7-1200, SB 1223 digital input/output module	6ES7223-3BD30-0XB0	3.3 V Flash, 24 MB	
2 DI/2 DQ, 24 V DC 200 kHz		SIMATIC S7, memory card for S7-1x00 CPU	6ES7954-8LL03-0AA0
		3.3 V Flash, 256 MB	

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1212C

3

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for CPU 1211C/1212C on output side, (4 units with 8 pins each)	6ES7292-2AH30-0XA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0
SIMATIC S7-1200, extension cable 2-tier setup for SM 12XX, 2.0 m	6ES7290-6AA30-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-2BC30-0XA0
Terminal block (spare part) For CPU 1212C AC/DC/relay		For CPU 1212C DC/DC/relay	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1211C/1212C on input side, (4 units with 14 screws each)	6ES7292-1AP40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1211C/1212C on input side (4 units with 14 screws each)	6ES7292-1AP30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, for CPU 1211C/1212C on input side, (4 units with 14 pins each)	6ES7292-2AP40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for CPU 1211C/1212C on input side, (4 units with 14 pins each)	6ES7292-2AP30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1211C/1212C on output side, (4 units with 8 screws each)	6ES7292-1AH40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1211C/1212C on output side, (4 units with 8 screws each)	6ES7292-1AH40-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, CPU 1211C/1212C on output side, (4 units with 8 pins each)	6ES7292-2AH40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, CPU 1211C/1212C on output side, (4 units with 8 pins each)	6ES7292-2AH40-0XA0
SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0
SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-2BC30-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-2BC30-0XA0
For CPU 1212C DC/DC/DC		SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-1BC30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1211C/1212C on input side (4 units with 14 screws each)	6ES7292-1AP30-0XA0	SIMATIC S7-1200, RJ45 strain relief Single port 4 units per packing unit	6ES7290-3AA30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for CPU 1211C/1212C on input side, (4 units with 14 pins each)	6ES7292-2AP30-0XA0	SIMATIC S7-1200, spare part front flaps CPU 1211/1212 (CPU 1211/1212 front flap top/front flap bottom/signal board cover) 4 units each	6ES7291-1AA30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1211C/1212C on output side (4 units with 8 screws each)	6ES7292-1AH30-0XA0		

Ordering data	Article No.	Article No.	Article No.
<p>STEP 7 Professional / Basic 19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement:</p> <p>Windows 10 (64-bit)</p> <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTS • Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>SIMATIC STEP 7 Prof. V19, floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.</p> <p>The system requirements specification can be found at https://www.siemens.com/compatool</p> <p>Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; executable under Win10; Win11; Windows Server 2016/2019/2022; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels</p> <p>Contents: Set (4x DVD + 1x USB)</p>	6ES7822-1AA23-0YA5	<p>SIMATIC STEP 7 Basic V19, floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200; SIMATIC Basic Panels; SIMATIC Unified Basic Panels;</p> <p>The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-0AA23-0YA5
		<p>SIMATIC STEP 7 Basic V19, floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200; SIMATIC Basic Panels; SIMATIC Unified Basic Panels;</p> <p>The system requirements specification can be found at https://www.siemens.com/compatool</p> <p>Consignee email address required for delivery</p>	6ES7822-0AE23-0YA5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1212C

Technical specifications

Article number	6ES7212-1BE40-0XB0 CPU 1212C, AC/DC/Relay, 8DI/6DO/2AI	6ES7212-1AE40-0XB0 CPU 1212C, DC/DC/DC, 8DI/6DO/2AI	6ES7212-1HE40-0XB0 CPU 1212C, DC/DC/Relay, 8DI/6DO/2AI
General information			
Product type designation	CPU 1212C AC/DC/relay	CPU 1212C DC/DC/DC	CPU 1212C DC/DC/relay
Engineering with			
• Programming package	STEP 7 V18 or higher	STEP 7 V18 or higher	STEP 7 V18 or higher
Supply voltage			
Rated value (DC)		Yes	Yes
• 24 V DC			
Rated value (AC)	Yes		
• 120 V AC			
• 230 V AC	Yes		
Encoder supply			
24 V encoder supply			
• 24 V	20.4 to 28.8V	L+ minus 4 V DC min.	L+ minus 4 V DC min.
Memory			
Work memory			
• integrated	100 kbyte	100 kbyte	100 kbyte
Load memory			
• integrated	2 Mbyte	2 Mbyte	2 Mbyte
• Plug-in (SIMATIC Memory Card), max.	with SIMATIC memory card	with SIMATIC memory card	with SIMATIC memory card
Backup			
• without battery	Yes	Yes	Yes
CPU processing times			
for bit operations, typ.	0.08 µs; / instruction	0.08 µs; / instruction	0.08 µs; / instruction
for word operations, typ.	1.7 µs; / instruction	1.7 µs; / instruction	1.7 µs; / instruction
for floating point arithmetic, typ.	2.3 µs; / instruction	2.3 µs; / instruction	2.3 µs; / instruction
Data areas and their retentivity			
Flag			
• Size, max.	4 kbyte; Size of bit memory address area	4 kbyte; Size of bit memory address area	4 kbyte; Size of bit memory address area
Address area			
Process image			
• Inputs, adjustable	1 kbyte	1 kbyte	1 kbyte
• Outputs, adjustable	1 kbyte	1 kbyte	1 kbyte
Time of day			
Clock			
• Hardware clock (real-time)	Yes	Yes	Yes
Digital inputs			
Number of digital inputs	8; Integrated	8; Integrated	8; Integrated
• of which inputs usable for technological functions	6; HSC (High Speed Counting)	6; HSC (High Speed Counting)	6; HSC (High Speed Counting)
Digital outputs			
Number of digital outputs	6; Relays	6	6; Relays
• of which high-speed outputs		4; 100 kHz Pulse Train Output	
Analog inputs			
Number of analog inputs	2	2	2
Input ranges			
• Voltage	Yes	Yes	Yes
Analog outputs			
Number of analog outputs	0	0	0
1. Interface			
Interface type	PROFINET	PROFINET	PROFINET
Protocols			
• PROFINET IO Controller	Yes	Yes	Yes
• PROFINET IO Device	Yes	Yes	Yes
• SIMATIC communication	Yes	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes
• Media redundancy	No	No	No

Technical specifications

Article number	6ES7212-1BE40-0XB0 CPU 1212C, AC/DC/Relay, 8DI/6DO/2AI	6ES7212-1AE40-0XB0 CPU 1212C, DC/DC/DC, 8DI/6DO/2AI	6ES7212-1HE40-0XB0 CPU 1212C, DC/DC/Relay, 8DI/6DO/2AI
Protocols			
Open IE communication			
• TCP/IP	Yes	Yes	Yes
• ISO-on-TCP (RFC1006)	Yes	Yes	Yes
• UDP	Yes	Yes	Yes
Web server			
• supported	Yes	Yes	Yes
OPC UA			
• OPC UA Server	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required
communication functions / header			
S7 communication			
• supported	Yes	Yes	Yes
Number of connections			
• overall	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max
Integrated Functions			
Counter			
• Number of counters	6	6	6
• Counting frequency, max.	100 kHz	100 kHz	100 kHz
Frequency measurement			
controlled positioning	Yes	Yes	Yes
Number of position-controlled positioning axes, max.	8	8	8
Number of positioning axes via pulse-direction interface	Up to 4 with SB 1222	4; With integrated outputs	Up to 4 with SB 1222
PID controller			
Number of alarm inputs	4	4	4
Number of pulse outputs		4	
Limit frequency (pulse)		100 kHz	
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C	-20 °C	-20 °C
• max.	60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical	60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical	60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical
Pollutant concentrations			
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
configuration / header			
configuration / programming / header			
Programming language			
- LAD	Yes	Yes	Yes
- FBD	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
Dimensions			
Width	90 mm	90 mm	90 mm
Height	100 mm	100 mm	100 mm
Depth	75 mm	75 mm	75 mm
Weights			
Weight, approx.	425 g	370 g	385 g

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1214C

Overview



- Controller for intro to S7 with flexible expansion options
- Expandable by:
 - 1 signal board (SB), battery board (BB) or communication board (CB)
 - 8 signal modules (SM)
 - Max. 3 communications modules (CM)

Ordering data

CPU 1214C

SIMATIC S7-1200, CPU 1214C, compact CPU, AC/DC/relay

Onboard I/O: 14 DI 24 V DC; 10 DO relay 2 A; 2 AI 0-10 V DC, power supply: 85-264 V AC at 47-63 Hz, program/data memory 100 KB

SIMATIC S7-1200, CPU 1214C, compact CPU, DC/DC/DC

Onboard I/O: 14 DI 24 V DC; 10 DO 24 V DC; 2 AI 0-10 V DC, power supply: 20.4-28.8 V DC, program/data memory 100 KB

SIMATIC S7-1200, CPU 1214C, compact CPU, DC/DC/relay

Onboard I/O: 14 DI 24 V DC; 10 DO relay 2 A; 2 AI 0-10 V DC, power supply: 20.4-28.8 V DC, program/data memory 100 KB

Accessories

SB 1221 signal board

SIMATIC S7-1200, SB 1221 digital input module

4 DI, 5 V DC 200 kHz, sourcing input

SIMATIC S7-1200, SB 1221 digital input module

4 DI, 24 V DC 200 kHz, sourcing input

SB 1222 signal board

SIMATIC S7-1200, SB 1222 digital output module

4 DQ, 5 V DC 200 kHz

SIMATIC S7-1200, SB 1222 digital output module

4 DQ, 24 V DC 200 kHz

SB 1223 signal board

SIMATIC S7-1200, SB 1223 digital input/output module

2 DI/2 DO, 2 DI 24 V DC/ 2 DO 24 V DC

SIMATIC S7-1200, SB 1223 digital input/output module

2 DI/2 DQ, 5 V DC 200 kHz

SIMATIC S7-1200, SB 1223 digital input/output module

2 DI/2 DQ, 24 V DC 200 kHz

Article No.

6ES7214-1BG40-0XB0

6ES7214-1AG40-0XB0

6ES7214-1HG40-0XB0

6ES7221-3AD30-0XB0

6ES7221-3BD30-0XB0

6ES7222-1AD30-0XB0

6ES7222-1BD30-0XB0

6ES7223-0BD30-0XB0

6ES7223-3AD30-0XB0

6ES7223-3BD30-0XB0

Article No.

SIMATIC S7-1200, analog input, SB 1231

1 AI, +/-10 V DC (12-bit resolution) or 0-20 mA

SIMATIC S7-1200, analog input, SB 1231 TC

1 AI type J or K thermocouples

SIMATIC S7-1200, analog input, SB 1231RTD

1 AI RTD, PT 100 and PT1000

SIMATIC S7-1200, analog output, SB 1232

1 AO, +/-10 V DC (12-bit resolution) or 0-20 mA (11-bit resolution)

SIMATIC S7-1200, CB 1241 communication board

RS-485, terminal block, supports Freeport

SIMATIC S7-1200, BB 1297 battery board

For long-term buffering of the real-time clock, pluggable in the signal board slot of the S7-12XX (from FW3.0); battery (CR1025) not included in scope of supply

SIMATIC S7-1200, SIM 1274 simulator module

For CPU 1214/1215 14 input switches 24 V DC

SIMATIC S7-1200, SIM 1274 simulator

2 potentiometer inputs

SIMATIC Memory Card (optional)

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU

3.3 V Flash, 256 MB

6ES7231-4HA30-0XB0

6ES7231-5QA30-0XB0

6ES7231-5PA30-0XB0

6ES7232-4HA30-0XB0

6ES7241-1CH30-1XB0

6ES7297-0AX30-0XA0

6ES7274-1XH30-0XA0

6ES7274-1XA30-0XA0

6ES7954-8LC03-0AA0

6ES7954-8LE03-0AA0

6ES7954-8LF03-0AA0

6ES7954-8LL03-0AA0

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for CPU 1214C/1215C on output side (4 units with 12 pins each)	6ES7292-2AM30-0XA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0
SIMATIC S7-1200, extension cable 2-tier configuration For SM 12XX, 2.0 m	6ES7290-6AA30-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-2BC30-0XA0
Terminal block (spare part) For CPU 1214C AC/DC/relay		For CPU 1214C DC/DC/relay	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1214C/1215C on input side, (4 units with 20 screws each)	6ES7292-1AV40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on input side (4 units with 20 screws each)	6ES7292-1AV30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, for CPU 1214C/1215C on input side, (4 units with 20 pins each)	6ES7292-2AV40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology for CPU 1214C/1215C on input side (4 units with 20 pins each)	6ES7292-2AV30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1214C/1215C on output side, (4 units with 12 screws each)	6ES7292-1AM40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1214C/1215C on output side, (4 units with 12 screws each)	6ES7292-1AM40-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, for CPU 1214C/1215C on output side, (4 units with 12 pins each)	6ES7292-2AM40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, for CPU 1214C/1215C on output side, (4 units with 12 pins each)	6ES7292-2AM40-0XA0
SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0
SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-2BC30-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-2BC30-0XA0
For CPU 1214C DC/DC/DC		SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-1AM40-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on input side (4 units with 20 screws each)	6ES7292-1AV30-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block For analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology for CPU 1214C/1215C on input side (4 units with 20 pins each)	6ES7292-2AV30-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology, for analog inputs CPU 1211C/1212C/1214C, (4 units with 3 pins each)	6ES7292-2BC30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on output side (4 units with 12 screws each)	6ES7292-1AM30-0XA0	SIMATIC S7-1200, RJ45 strain relief Single port 4 units per packing unit	6ES7290-3AA30-0XA0
		SIMATIC S7-1200, spare part front flaps CPU 1214 (CPU 1214 front flap top/front flap bottom/signal board cover) 4 units each	6ES7291-1AB30-0XA0

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1214C**Ordering data****Article No.****Article No.****STEP 7 Professional / Basic V18**

Target system:

SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

Windows 10 (64-bit)

- Windows 10 Home Version 22H2
- Windows 10 Professional Version 22H2
- Windows 10 Enterprise Version 2009/20H2
- Windows 10 Enterprise Version 21H2
- Windows 10 Enterprise Version 22H2
- Windows 10 Enterprise 2016 LTSC
- Windows 10 Enterprise 2019 LTSC
- Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included,
fr, sp, it, ru, jp, kr as download

**SIMATIC STEP 7 Prof. V19;
floating license**

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

6ES7822-1AA23-0YA5**SIMATIC STEP 7 Prof. V19,
floating license download¹⁾**

Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

The system requirements specification can be found at <https://www.siemens.com/compatool>

Consignee email address required for delivery

6ES7822-1AE23-0YA5**SIMATIC STEP 7 Basic V19,
floating license**

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200; SIMATIC Basic Panels; SIMATIC Unified Basic Panels;

The system requirements specification can be found at <https://www.siemens.com/compatool>

6ES7822-0AA23-0YA5**SIMATIC STEP 7 Basic V19,
floating license download¹⁾**

Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200; SIMATIC Basic Panels; SIMATIC Unified Basic Panels;

The system requirements specification can be found at <https://www.siemens.com/compatool>

Consignee email address required for delivery

6ES7822-0AE23-0YA5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7214-1BG40-0XB0 CPU 1214C, AC/DC/Relay, 14DI/10DO/2AI	6ES7214-1AG40-0XB0 CPU 1214C, DC/DC/DC, 14DI/10DO/2AI	6ES7214-1HG40-0XB0 CPU 1214C, DC/DC/Relay, 14DI/10DO/2AI
General information			
Product type designation	CPU 1214C AC/DC/relay	CPU 1214C DC/DC/DC	CPU 1214C DC/DC/relay
Engineering with			
• Programming package	STEP 7 V18 or higher	STEP 7 V18 or higher	STEP 7 V18 or higher
Supply voltage			
Rated value (DC)		Yes	Yes
• 24 V DC			
Rated value (AC)	Yes		
• 120 V AC			
• 230 V AC	Yes		
Encoder supply			
24 V encoder supply			
• 24 V	20.4 to 28.8V	L+ minus 4 V DC min.	L+ minus 4 V DC min.
Memory			
Work memory			
• integrated	150 kbyte	150 kbyte	150 kbyte
Load memory			
• integrated	4 Mbyte	4 Mbyte	4 Mbyte
• Plug-in (SIMATIC Memory Card), max.	with SIMATIC memory card	with SIMATIC memory card	with SIMATIC memory card
Backup			
• without battery	Yes	Yes	Yes
CPU processing times			
for bit operations, typ.	0.08 µs; / instruction	0.08 µs; / instruction	0.08 µs; / instruction
for word operations, typ.	1.7 µs; / instruction	1.7 µs; / instruction	1.7 µs; / instruction
for floating point arithmetic, typ.	2.3 µs; / instruction	2.3 µs; / instruction	2.3 µs; / instruction
Data areas and their retentivity			
Flag			
• Size, max.	8 kbyte; Size of bit memory address area	8 kbyte; Size of bit memory address area	8 kbyte; Size of bit memory address area
Address area			
Process image			
• Inputs, adjustable	1 kbyte	1 kbyte	1 kbyte
• Outputs, adjustable	1 kbyte	1 kbyte	1 kbyte
Time of day			
Clock			
• Hardware clock (real-time)	Yes	Yes	Yes
Digital inputs			
Number of digital inputs	14; Integrated	14; Integrated	14; Integrated
• of which inputs usable for technological functions	6; HSC (High Speed Counting)	6; HSC (High Speed Counting)	6; HSC (High Speed Counting)
Digital outputs			
Number of digital outputs	10; Relays	10	10; Relays
• of which high-speed outputs		4; 100 kHz Pulse Train Output	
Analog inputs			
Number of analog inputs	2	2	2
Input ranges			
• Voltage	Yes	Yes	Yes
Analog outputs			
Number of analog outputs	0	0	0
1. Interface			
Interface type	PROFINET	PROFINET	PROFINET
Protocols			
• PROFINET IO Controller	Yes	Yes	Yes
• PROFINET IO Device	Yes	Yes	Yes
• SIMATIC communication	Yes	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes
• Media redundancy	No	No	No

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1214C

Technical specifications

Article number	6ES7214-1BG40-0XB0 CPU 1214C, AC/DC/Relay, 14DI/10DO/2AI	6ES7214-1AG40-0XB0 CPU 1214C, DC/DC/DC, 14DI/10DO/2AI	6ES7214-1HG40-0XB0 CPU 1214C, DC/DC/Relay, 14DI/10DO/2AI
Protocols			
Open IE communication			
• TCP/IP	Yes	Yes	Yes
• ISO-on-TCP (RFC1006)	Yes	Yes	Yes
• UDP	Yes	Yes	Yes
Web server			
• supported	Yes	Yes	Yes
OPC UA			
• OPC UA Server	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required
communication functions / header			
S7 communication			
• supported	Yes	Yes	Yes
Number of connections			
• overall	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max
Integrated Functions			
Counter			
• Number of counters	6	6	6
• Counting frequency, max.	100 kHz	100 kHz	100 kHz
Frequency measurement			
controlled positioning	Yes	Yes	Yes
Number of position-controlled positioning axes, max.	8	8	8
Number of positioning axes via pulse-direction interface	Up to 4 with SB 1222	4; With integrated outputs	Up to 4 with SB 1222
PID controller			
Number of alarm inputs	4	4	4
Number of pulse outputs		4	
Limit frequency (pulse)		100 kHz	
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C	-20 °C	-20 °C
• max.	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical
Pollutant concentrations			
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
configuration / header			
configuration / programming / header			
Programming language			
- LAD	Yes	Yes	Yes
- FBD	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
Dimensions			
Width	110 mm	110 mm	110 mm
Height	100 mm	100 mm	100 mm
Depth	75 mm	75 mm	75 mm
Weights			
Weight, approx.	455 g	415 g	435 g

Overview

- Powerful controller with enhanced networking option
- Expandable by:
 - 1 signal board (SB), battery board (BB) or communication board (CB)
 - 8 signal modules (SM)
 - Max. 3 communications modules (CM)

3

Ordering data	Article No.	Ordering data	Article No.
CPU 1215C		SIMATIC S7-1200, SB 1223 digital input/output module	6ES7223-3BD30-0XB0
SIMATIC S7-1200, CPU 1215C, compact CPU, AC/DC/relay 2 PROFINET ports, onboard I/O: 14 DI 24 V DC; 10 DO relay 2 A, 2 AI 0-10 V DC, 2 AO 0-20 mA DC, power supply: 85-264 V AC at 47-63 Hz, program/ data memory 125 KB	6ES7215-1BG40-0XB0	2 DI/2 DQ, 24 V DC 200 kHz	
SIMATIC S7-1200, CPU 1215C, compact CPU, DC/DC/DC 2 PROFINET ports, onboard I/O: 14 DI 24 V DC; 10 DO relay 2 A; 2 AI 0-10 V DC, 2 AO 0-20 mA DC, power supply: 20.4-28.8 V DC, program/data memory 125 KB	6ES7215-1AG40-0XB0	SB 1231 signal board	
SIMATIC S7-1200, CPU 1215C, compact CPU, DC/DC/relay 2 PROFINET ports, onboard I/O: 14 DI 24 V DC; 10 DO relay 2 A, 2 AI 0-10 V DC, 2 AO 0-20 mA DC, power supply: 20.4-28.8 V DC, program/data memory 125 KB	6ES7215-1HG40-0XB0	SIMATIC S7-1200, analog input, SB 1231	6ES7231-4HA30-0XB0
Accessories		1 AI, +/-10 V DC (12-bit resolution) or 0-20 mA	
SB 1221 signal board		SIMATIC S7-1200, analog input, SB 1231	6ES7231-5QA30-0XB0
SIMATIC S7-1200, SB 1221 digital input module	6ES7221-3AD30-0XB0	TC, 1 AI type J or K thermocouples	
SIMATIC S7-1200, SB 1221 digital input module	6ES7221-3BD30-0XB0	SIMATIC S7-1200, analog input, SB 1231RTD	6ES7231-5PA30-0XB0
SB 1222 signal board		1 AI RTD, PT 100 and PT1000	
SIMATIC S7-1200, SB 1222 digital output module	6ES7222-1AD30-0XB0	SB 1232 signal board	
SIMATIC S7-1200, SB 1222 digital output module	6ES7222-1BD30-0XB0	SIMATIC S7-1200, analog output, SB 1232	6ES7232-4HA30-0XB0
SB 1223 signal board		1 AO, +/-10 V DC (12-bit resolution) or 0-20 mA (11-bit resolution)	
SIMATIC S7-1200, SB 1223 digital input/output module	6ES7223-0BD30-0XB0	SIMATIC S7-1200, CB 1241 communication board	6ES7241-1CH30-1XB0
SIMATIC S7-1200, SB 1223 digital input/output module	6ES7223-3AD30-0XB0	RS-485, terminal block, supports Freeport	
		SIMATIC S7-1200, BB 1297 battery board	6ES7297-0AX30-0XA0
		For long-term buffering of the real-time clock, pluggable in the signal board slot of the S7-12XX (from FW3.0); battery (CR1025) not included in scope of supply	
		SIMATIC S7-1200, SIM 1274 simulator module	6ES7274-1XH30-0XA0
		For CPU 1214/1215 14 input switches 24 V DC	
		SIMATIC S7-1200, SIM 1274 simulator	6ES7274-1XA30-0XA0
		2 potentiometer inputs	
		SIMATIC Memory Card (optional)	
		SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS	6ES7954-8LC03-0AA0
		3.3 V Flash, 4 MB	
		SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS	6ES7954-8LE03-0AA0
		3.3 V Flash, 12 MB	

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1215C

3

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on output side (4 units with 12 screws each)	6ES7292-1AM30-0XA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for CPU 1214C/1215C on output side (4 units with 12 pins each)	6ES7292-2AM30-0XA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block Analog signals CPU 1215C/1217C, (4 units with 6 screws each)	6ES7292-1BF30-0XB0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology for analog signals CPU 1215C/1217C, (4 units with 6 pins each)	6ES7292-2BF30-0XB0
SIMATIC S7-1200, extension cable 2-tier configuration For SM 12XX, 2.0 m	6ES7290-6AA30-0XA0	For CPU 1215C DC/DC/relay	
Terminal block (spare part)		SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on input side (4 units with 20 screws each)	6ES7292-1AV30-0XA0
For CPU 1215C AC/DC/relay		SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology for CPU 1214C/1215C on input side (4 units with 20 pins each)	6ES7292-2AV30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1214C/1215C on input side, (4 units with 20 screws each)	6ES7292-1AV40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1214C/1215C on output side, (4 units with 12 screws each)	6ES7292-1AM40-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, for CPU 1214C/1215C on input side, (4 units with 20 pins each)	6ES7292-2AV40-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, for CPU 1214C/1215C on output side, (4 units with 12 pins each)	6ES7292-2AM40-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1214C/1215C on output side, (4 units with 12 screws each)	6ES7292-1AM40-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block Analog signals CPU 1215C/1217C, (4 units with 6 screws each)	6ES7292-1BF30-0XB0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, for CPU 1214C/1215C on output side, (4 units with 12 pins each)	6ES7292-2AM40-0XA0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology for analog signals CPU 1215C/1217C, (4 units with 6 pins each)	6ES7292-2BF30-0XB0
SIMATIC S7-1200, spare part, gold-plated I/O terminal block Analog signals CPU 1215C/1217C, (4 units with 6 screws each)	6ES7292-1BF30-0XB0	For CPU 1215C DC/DC/DC	
SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology for analog signals CPU 1215C/1217C, (4 units with 6 pins each)	6ES7292-2BF30-0XB0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on input side (4 units with 20 screws each)	6ES7292-1AV30-0XA0
For CPU 1215C DC/DC/DC		SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology for CPU 1214C/1215C on input side (4 units with 20 pins each)	6ES7292-2AV30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on input side (4 units with 20 screws each)	6ES7292-1AV30-0XA0	SIMATIC S7-1200, spare part front flaps CPU 1215C (CPU 1215C front flap top/front flap bottom/signal board cover) 4 units each	6ES7291-1AC30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology for CPU 1214C/1215C on input side (4 units with 20 pins each)	6ES7292-2AV30-0XA0	SIMATIC S7-1200, RJ45 strain relief Dual port 4 units per packing unit	6ES7290-3AB30-0XA0

Ordering data	Article No.	Article No.	
<p>STEP 7 Professional / Basic V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement:</p> <p>Windows 10 (64-bit)</p> <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H2 • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC • Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>SIMATIC STEP 7 Prof. V19, floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.</p> <p>The system requirements specification can be found at https://www.siemens.com/compatool</p> <p>Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.</p>	6ES7822-1AA23-0YA5	<p>SIMATIC STEP 7 Basic V19, floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200; SIMATIC Basic Panels; SIMATIC Unified Basic Panels;</p> <p>The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-0AA23-0YA5
		<p>SIMATIC STEP 7 Basic V19, floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200; SIMATIC Basic Panels; SIMATIC Unified Basic Panels;</p> <p>The system requirements specification can be found at https://www.siemens.com/compatool</p> <p>Consignee email address required for delivery</p>	6ES7822-0AE23-0YA5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1215C

Technical specifications

Article number	6ES7215-1BG40-0XB0 CPU 1215C, AC/DC/RLY, 14DI/10DO/2AI/2AO	6ES7215-1AG40-0XB0 CPU 1215C, DC/DC/DC, 14DI/10DO/2AI/2AO	6ES7215-1HG40-0XB0 CPU 1215C, DC/DC/RLY, 14DI/10DO/2AI/2AO
General information			
Product type designation	CPU 1215C AC/DC/relay	CPU 1215C DC/DC/DC	CPU 1215C DC/DC/relay
Engineering with			
• Programming package	STEP 7 V18 or higher	STEP 7 V18 or higher	STEP 7 V18 or higher
Supply voltage			
Rated value (DC)		Yes	Yes
• 24 V DC			
Rated value (AC)	Yes		
• 120 V AC	Yes		
• 230 V AC	Yes		
Encoder supply			
24 V encoder supply			
• 24 V	20.4 to 28.8V	L+ minus 4 V DC min.	L+ minus 4 V DC min.
Memory			
Work memory			
• integrated	200 kbyte	200 kbyte	200 kbyte
Load memory			
• integrated	4 Mbyte	4 Mbyte	4 Mbyte
• Plug-in (SIMATIC Memory Card), max.	with SIMATIC memory card	with SIMATIC memory card	with SIMATIC memory card
Backup			
• without battery	Yes	Yes	Yes
CPU processing times			
for bit operations, typ.	0.08 µs; / instruction	0.08 µs; / instruction	0.08 µs; / instruction
for word operations, typ.	1.7 µs; / instruction	1.7 µs; / instruction	1.7 µs; / instruction
for floating point arithmetic, typ.	2.3 µs; / instruction	2.3 µs; / instruction	2.3 µs; / instruction
Data areas and their retentivity			
Flag			
• Size, max.	8 kbyte; Size of bit memory address area	8 kbyte; Size of bit memory address area	8 kbyte; Size of bit memory address area
Address area			
Process image			
• Inputs, adjustable	1 kbyte	1 kbyte	1 kbyte
• Outputs, adjustable	1 kbyte	1 kbyte	1 kbyte
Time of day			
Clock			
• Hardware clock (real-time)	Yes	Yes	Yes
Digital inputs			
Number of digital inputs	14; Integrated	14; Integrated	14; Integrated
• of which inputs usable for technological functions	6; HSC (High Speed Counting)	6; HSC (High Speed Counting)	6; HSC (High Speed Counting)
Digital outputs			
Number of digital outputs	10; Relays	10	10; Relays
• of which high-speed outputs		4; 100 kHz Pulse Train Output	
Analog inputs			
Number of analog inputs	2	2	2
Input ranges			
• Voltage	Yes	Yes	Yes
Analog outputs			
Number of analog outputs	2	2	2
Output ranges, current			
• 0 to 20 mA	Yes	Yes	Yes
1. Interface			
Interface type	PROFINET	PROFINET	PROFINET
Protocols			
• PROFINET IO Controller	Yes	Yes	Yes
• PROFINET IO Device	Yes	Yes	Yes
• SIMATIC communication	Yes	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes
• Media redundancy	Yes	Yes	Yes

Technical specifications

Article number	6ES7215-1BG40-0XB0 CPU 1215C, AC/DC/RLY, 14DI/10DO/2AI/2AO	6ES7215-1AG40-0XB0 CPU 1215C, DC/DC/DC, 14DI/10DO/2AI/2AO	6ES7215-1HG40-0XB0 CPU 1215C, DC/DC/RLY, 14DI/10DO/2AI/2AO
Protocols			
Open IE communication			
• TCP/IP	Yes	Yes	Yes
• ISO-on-TCP (RFC1006)	Yes	Yes	Yes
• UDP	Yes	Yes	Yes
Web server			
• supported	Yes	Yes	Yes
OPC UA			
• OPC UA Server	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required
communication functions / header			
S7 communication			
• supported	Yes	Yes	Yes
Number of connections			
• overall	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max
Integrated Functions			
Counter			
• Number of counters	6	6	6
• Counting frequency, max.	100 kHz	100 kHz	100 kHz
Frequency measurement			
controlled positioning	Yes	Yes	Yes
Number of position-controlled positioning axes, max.	8	8	8
Number of positioning axes via pulse-direction interface	Up to 4 with SB 1222	4; With integrated outputs	Up to 4 with SB 1222
PID controller			
Number of alarm inputs	4	4	4
Number of pulse outputs		4	
Limit frequency (pulse)		100 kHz	
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C	-20 °C	-20 °C
• max.	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical
Pollutant concentrations			
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
configuration / header			
configuration / programming / header			
Programming language			
- LAD	Yes	Yes	Yes
- FBD	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
Dimensions			
Width	130 mm	130 mm	130 mm
Height	100 mm	100 mm	100 mm
Depth	75 mm	75 mm	75 mm
Weights			
Weight, approx.	550 g	500 g	585 g

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1217C

Overview



- Powerful controller for extremely fast signal processing
- Expandable by:
 - 1 signal board (SB), battery board (BB) or communication board (CB)
 - 8 signal modules (SM)
 - Max. 3 communications modules (CM)

Ordering data

CPU 1217C

SIMATIC S7-1200, CPU 1217C, compact CPU, DC/DC/DC

2 PROFINET ports onboard I/O:
10 DI 24 V DC; 4 DI RS-422/485;
6 DO 24 V DC; 0.5 A;
4 DO RS-422/485; 2 AI 0-10 V DC,
2 AO 0-20 mA power supply:
20.4-28.8 V DC,
program/data memory 150 KB

Accessories

SB 1221 signal board

SIMATIC S7-1200, SB 1221 digital input module

4 DI, 5 V DC 200 kHz,
sourcing input

SIMATIC S7-1200, SB 1221 digital input module

4 DI, 24 V DC 200 kHz,
sourcing input

SB 1222 signal board

SIMATIC S7-1200, SB 1222 digital output module

4 DQ, 5 V DC 200 kHz

SIMATIC S7-1200, SB 1222 digital output module

4 DQ, 24 V DC 200 kHz

SB 1223 signal board

SIMATIC S7-1200, SB 1223 digital input/output module

2 DI/2 DO, 2 DI 24 V DC/
2 DO 24 V DC

SIMATIC S7-1200, SB 1223 digital input/output module

2 DI/2 DQ, 5 V DC 200 kHz

SIMATIC S7-1200, SB 1223 digital input/output module

2 DI/2 DQ, 24 V DC 200 kHz

SB 1231 signal board

SIMATIC S7-1200, analog input, SB 1231

1 AI, +/-10 V DC (12-bit resolution)
or 0-20 mA

SIMATIC S7-1200, analog input, SB 1231 TC

1 AI type J or K thermocouples

Article No.

6ES7217-1AG40-0XB0

6ES7221-3AD30-0XB0

6ES7221-3BD30-0XB0

6ES7222-1AD30-0XB0

6ES7222-1BD30-0XB0

6ES7223-0BD30-0XB0

6ES7223-3AD30-0XB0

6ES7223-3BD30-0XB0

6ES7231-4HA30-0XB0

6ES7231-5QA30-0XB0

Article No.

SIMATIC S7-1200, analog input, SB 1231RTD

1 AI RTD, PT 100 and PT1000

SIMATIC S7-1200, analog output, SB 1232

1 AO, +/-10 V DC (12-bit resolution)
or 0-20 mA (11-bit resolution)

SIMATIC S7-1200, CB 1241 communication board

RS-485, terminal block,
supports Freeport

SIMATIC S7-1200, BB 1297 battery board

For long-term buffering of the
real-time clock, pluggable in the
signal board slot of the S7-12XX
(from FW3.0); battery (CR1025)
not included in scope of supply

SIMATIC S7-1200, SIM 1274 simulator module

For CPU 1217C, 14 input switches,
10x 24 V DC inputs,
4x 1.5 V differential inputs

SIMATIC S7-1200, SIM 1274 simulator

2 potentiometer inputs

SIMATIC Memory Card (optional)

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU

3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU

3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU

3.3 V Flash, 32 GB

SIMATIC S7-1200, extension cable 2-tier configuration

For SM 12XX, 2.0 m

6ES7231-5PA30-0XB0

6ES7232-4HA30-0XB0

6ES7241-1CH30-1XB0

6ES7297-0AX30-0XA0

6ES7274-1XK30-0XA0

6ES7274-1XA30-0XA0

6ES7954-8LC03-0AA0

6ES7954-8LE03-0AA0

6ES7954-8LF03-0AA0

6ES7954-8LL03-0AA0

6ES7954-8LP04-0AA0

6ES7954-8LT03-0AA0

6ES7290-6AA30-0XA0

Ordering data	Article No.	Article No.
Terminal block (spare part)		
For CPU 1217C		
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1217C on input side (4 units with 10 screws each)	6ES7292-1AK30-0XA0	STEP 7 Professional / Basic V18 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H2 • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC • Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for CPU 1217C on input side (4 units with 10 pins each)	6ES7292-2AK30-0XA0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1217C on input side (4 units with 16 screws each)	6ES7292-1AR30-0XA0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for CPU 1217C on input side (4 units with 16 pins each)	6ES7292-2AR30-0XA0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1217C on output side (4 units with 18 screws each)	6ES7292-1AT30-0XA0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for CPU 1217C on output side (4 units with 18 pins each)	6ES7292-2AT30-0XA0	
SIMATIC S7-1200, spare part, gold-plated I/O terminal block Analog signals CPU 1215C/1217C, (4 units with 6 screws each)	6ES7292-1BF30-0XB0	
SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology for analog signals CPU 1215C/1217C, (4 units with 6 pins each)	6ES7292-2BF30-0XB0	
SIMATIC S7-1200, spare part front flaps CPU 1217C (CPU 1217C front flap top/front flap bottom/signal board cover) 4 units each	6ES7291-1AD30-0XA0	
SIMATIC S7-1200, RJ45 strain relief Dual port 4 units per packing unit	6ES7290-3AB30-0XA0	
		6ES7822-1AA23-0YA5
		SIMATIC STEP 7 Prof. V19, floating license download¹⁾ Engineering software in the TIA Portal; software, documentation and license key for downloading ¹⁾ ; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery
		6ES7822-1AE23-0YA5

SIMATIC S7-1200 Basic Controllers

Central processing units
Standard CPUs

CPU 1217C**Ordering data****Article No.****Article No.****SIMATIC STEP 7 Basic V19,
floating license****6ES7822-0AA23-0YA5**

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download;
for configuration of SIMATIC S7-1200; SIMATIC Basic Panels; SIMATIC Unified Basic Panels;
The system requirements specification can be found at <https://www.siemens.com/compatool>

**SIMATIC STEP 7 Basic V19,
floating license download¹⁾****6ES7822-0AE23-0YA5**

Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download;
for configuration of SIMATIC S7-1200; SIMATIC Basic Panels; SIMATIC Unified Basic Panels;
The system requirements specification can be found at <https://www.siemens.com/compatool>
Consignee email address required for delivery

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7217-1AG40-0XB0 CPU 1217C, DC/DC/DC, 14DI/10DQ/2AI/2AQ
General information	
Product type designation	CPU 1217C DC/DC/DC
Engineering with	
• Programming package	STEP 7 V18 or higher
Supply voltage	
Rated value (DC)	
• 24 V DC	Yes
Encoder supply	
24 V encoder supply	
• 24 V	L+ minus 4 V DC min.
Memory	
Work memory	
• integrated	250 kbyte
Load memory	
• integrated	4 Mbyte
• Plug-in (SIMATIC Memory Card), max.	with SIMATIC memory card
Backup	
• without battery	Yes
CPU processing times	
for bit operations, typ.	0.08 µs; / instruction
for word operations, typ.	1.7 µs; / instruction
for floating point arithmetic, typ.	2.3 µs; / Operation
Data areas and their retentivity	
Flag	
• Size, max.	8 kbyte; Size of bit memory address area
Address area	
Process image	
• Inputs, adjustable	1 kbyte
• Outputs, adjustable	1 kbyte
Time of day	
Clock	
• Hardware clock (real-time)	Yes
Digital inputs	
Number of digital inputs	14; Integrated
• of which inputs usable for technological functions	6; HSC (High Speed Counting)
Digital outputs	
Number of digital outputs	10
• of which high-speed outputs	4; 100 kHz Pulse Train Output
Analog inputs	
Number of analog inputs	2
Input ranges	
• Voltage	Yes
Analog outputs	
Number of analog outputs	2
Output ranges, current	
• 0 to 20 mA	Yes
1. Interface	
Interface type	PROFINET
Protocols	
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes

Article number	6ES7217-1AG40-0XB0 CPU 1217C, DC/DC/DC, 14DI/10DQ/2AI/2AQ
Protocols	
Open IE communication	
• TCP/IP	Yes
• ISO-on-TCP (RFC1006)	Yes
• UDP	Yes
Web server	
• supported	Yes
OPC UA	
• OPC UA Server	Yes; data access (read, write, subscribe), method call, runtime license required
communication functions / header	
S7 communication	
• supported	Yes
Number of connections	
• overall	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max
Integrated Functions	
Counter	
• Number of counters	6
• Counting frequency, max.	1 MHz
Frequency measurement	Yes
controlled positioning	Yes
Number of position-controlled positioning axes, max.	8
Number of positioning axes via pulse-direction interface	4; With integrated outputs
PID controller	Yes
Number of alarm inputs	4
Number of pulse outputs	4
Limit frequency (pulse)	1 MHz
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical
Pollutant concentrations	
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
configuration / header	
configuration / programming / header	
Programming language	
- LAD	Yes
- FBD	Yes
- SCL	Yes
Dimensions	
Width	150 mm
Height	100 mm
Depth	75 mm
Weights	
Weight, approx.	530 g

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1212C

Overview



- The superior compact solution
- With 14 integral input/outputs
- Expandable by:
 - 1 signal board (SB) or communication board (CB);
not possible with: 6AG1212-1AE40-2XB0, 6AG1212-1BE40-2XB0, 6AG1212-1HE40-2XB0
 - 2 signal modules (SM)
 - Max. 3 communications modules (CM)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

Article No.

SIPLUS CPU 1212C compact CPU, AC/DC/relay

(Extended temperature range and exposure to environmental substances)

Integrated program/
data memory 75 KB,
load memory 1 MB;
Wide-range power supply
85 ... 264 V AC;
Boolean execution times
0.1 µs per operation;
8 digital inputs,
6 digital outputs (relays),
2 analog inputs;
Expandable by up to
3 communications modules,
2 signal modules and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz

- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +70 °C

6AG1212-1BE40-4XB0

6AG1212-1BE40-2XB0

SIPLUS CPU 1212C compact CPU, DC/DC/DC

(Extended temperature range and exposure to environmental substances)

Integrated program/
data memory 75 KB,
load memory 1 MB;
Supply voltage 24 V DC;
Boolean execution times
0.1 µs per operation;
8 digital inputs,
6 digital outputs,
2 analog inputs;
Expandable by up to
3 communications modules,
2 signal modules, and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz,
24 V DC digital outputs can be
used as pulse outputs (PTO) or
pulse-width modulated outputs
(PWM) at 100 kHz

- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +70 °C

6AG1212-1AE40-4XB0

6AG1212-1AE40-2XB0

Ordering data	Article No.	Ordering data	Article No.
<p>SIPLUS CPU 1212C compact CPU, DC/DC/relay</p> <p>(Extended temperature range and exposure to environmental substances)</p> <p>Integrated program/ data memory 75 KB, load memory 1 MB; Supply voltage 24 V DC; Boolean execution times 0.1 µs per operation; 8 digital inputs, 6 digital outputs (relays), 2 analog inputs; Expandable by up to 3 communications modules, 2 signal modules, and 1 signal board/communication board; Digital inputs can be used as HSC at 100 kHz</p> <ul style="list-style-type: none"> For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +70 °C 	<p>6AG1212-1HE40-4XB0</p> <p>6AG1212-1HE40-2XB0</p>	<p>SIPLUS SB 1223 digital input/output signal board</p> <p>(Extended temperature range and exposure to environmental substances; cannot be used with 6AG1212-1....-2XB0)</p> <p>2 inputs, 24 V DC, IEC type 1 sinking input; 2 x 24 V DC transistor outputs, 0.5 A, 5 W; can be used as HSC at up to 30 kHz</p> <ul style="list-style-type: none"> For areas with exceptional exposure to environmental substances (conformal coating) Ambient temperature -25 ... +55 °C <p>2 inputs, 5 V DC, 200 kHz 2 outputs 5 V DC, 0.1 A, 200 kHz</p> <p>2 inputs, 24 V DC, 200 kHz 2 outputs 24 V DC, 0.1 A, 200 kHz</p>	<p>6AG1223-0BD30-4XB0</p> <p>6AG1223-0BD30-5XB0</p> <p>6AG1223-3AD30-5XB0</p> <p>6AG1223-3BD30-5XB0</p>
<p>Accessories</p> <p>SIPLUS SB 1221 digital input signal board</p> <p>(Extended temperature range and exposure to environmental substances; cannot be used with 6AG1212-1....-2XB0)</p> <p>4 inputs, 5 V DC, 200 kHz, sourcing</p> <p>4 inputs, 24 V DC, 200 kHz, sourcing</p>	<p>6AG1221-3AD30-5XB0</p> <p>6AG1221-3BD30-5XB0</p>	<p>SIPLUS SB 1222 analog output signal board</p> <p>(Extended temperature range and exposure to environmental substances; cannot be used with 6AG1212-1....-2XB0)</p> <p>Range of ambient temperature -25 ... +55 °C</p> <p>1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits</p> <p>Range of ambient temperature 0 ... +55 °C</p> <p>1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits</p>	<p>6AG1232-4HA30-5XB0</p> <p>6AG1232-4HA30-4XB0</p>
<p>SIPLUS SB 1222 digital output signal board</p> <p>(Extended temperature range and exposure to environmental substances; cannot be used with 6AG1212-1....-2XB0)</p> <p>4 outputs, 5 V DC, 0.1 A, 200 kHz</p> <p>4 outputs, 24 V DC, 0.1 A, 200 kHz</p>	<p>6AG1222-1AD30-5XB0</p> <p>6AG1222-1BD30-5XB0</p>	<p>SIPLUS CB 1241 RS 485 communication board</p> <p>(Extended temperature range and exposure to environmental substances; cannot be used with 6AG1212-1....-2XB0)</p> <p>For point-to-point connection, with 1 RS485 interface</p>	<p>6AG1241-1CH30-5XB1</p>
		<p>Other accessories</p>	<p>See SIMATIC S7-1200 CPU 1212C, page 3/9</p>

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1212C

Technical specifications

Article number	6AG1212-1AE40-4XB0	6AG1212-1AE40-2XB0
Based on	6ES7212-1AE40-0XB0	6ES7212-1AE40-0XB0
	SIPLUS S7-1200 CPU 1212C DC/DC/DC	SIPLUS S7-1200 CPU 1212C DC/DC/DC
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> min. max. 	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C 60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 4, digital outputs 3, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 3, digital outputs 2, analog inputs 0 (no adjacent points) with horizontal mounting position
<ul style="list-style-type: none"> At cold restart, min. 	0 °C	-25 °C
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Coolants and lubricants		
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

Technical specifications

Article number	6AG1212-1BE40-4XB0	6AG1212-1BE40-2XB0
Based on	6ES7212-1BE40-0XB0 SIPLUS S7-1200 CPU 1212C AC/DC/RLY	6ES7212-1BE40-0XB0 SIPLUS S7-1200 CPU 1212C AC/DC/RLY
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> min. max. 	-20 °C; = Tmin; Startup @ 0 °C 60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical	-40 °C; = Tmin; Startup @ -25 °C 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 4, digital outputs 3, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 3, digital outputs 2, analog inputs 0 (no adjacent points) with horizontal mounting position
<ul style="list-style-type: none"> At cold restart, min. 	0 °C	-25 °C
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC
Relative humidity		
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Coolants and lubricants		
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1212C

Technical specifications

Article number	6AG1212-1HE40-4XB0	6AG1212-1HE40-2XB0
Based on	6ES7212-1HE40-0XB0	6ES7212-1HE40-0XB0
	SIPLUS S7-1200 CPU 1212C DC/DC/RLY	SIPLUS S7-1200 CPU 1212C DC/DC/RLY
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> min. max. 	-20 °C; = Tmin; Startup @ 0 °C 60 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical	-40 °C; = Tmin; Startup @ -25 °C 70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 4, digital outputs 3, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 3, digital outputs 2, analog inputs 0 (no adjacent points) with horizontal mounting position
<ul style="list-style-type: none"> At cold restart, min. 	0 °C	-25 °C
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC
Relative humidity		
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Coolants and lubricants		
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

Overview

- The compact high-performance CPU
- With 24 integrated I/Os
- Expandable by:
 - 1 signal board (SB) or communication board (CB);
not possible with: 6AG1214-1AG40-2XB0, 6AG1214-1BG40-2XB0, 6AG1214-1HG40-2XB0
 - 8 signal modules (SM)
 - Max. 3 communications modules (CM)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****Article No.****SIPLUS CPU 1214C
compact CPU, AC/DC/relay**

(Extended temperature range and exposure to environmental substances)

Integrated program/
data memory 100 KB,
load memory 2 MB;
Wide-range power supply
85 ... 264 V AC;
Boolean execution times
0.1 µs per operation;
14 digital inputs,
10 digital outputs (relays),
2 analog inputs;
Expandable by up to
3 communications modules,
8 signal modules and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz

- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +70 °C

6AG1214-1BG40-4XB0**6AG1214-1BG40-5XB0****6AG1214-1BG40-2XB0****SIPLUS CPU 1214C
compact CPU, DC/DC/DC**

(Extended temperature range and exposure to environmental substances)

Integrated program/
data memory 100 KB,
load memory 2 MB;
Supply voltage 24 V DC;
Boolean execution times
0.1 µs per operation;
14 digital inputs,
10 digital outputs,
2 analog inputs;
expandable by up to
3 communications modules,
8 signal modules, and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz,
24 V DC digital outputs can be
used as pulse outputs (PTO) or
pulse-width modulated outputs
(PWM) at 100 kHz

- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +70 °C

6AG1214-1AG40-4XB0**6AG1214-1AG40-5XB0****6AG1214-1AG40-2XB0**

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1214C

3

Ordering data

Article No.

Article No.

SIPLUS CPU 1214C compact CPU, DC/DC/relay

(Extended temperature range and exposure to environmental substances)

Integrated program/
data memory 100 KB,
load memory 2 MB;
Supply voltage 24 V DC;
Boolean execution times
0.1 µs per operation;
14 digital inputs,
10 digital outputs (relays),
2 analog inputs;
Expandable by up to
3 communications modules,
8 signal modules, and 1 signal
board/communication board;
Digital inputs can be used as HSC
at 100 kHz

- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +70 °C

6AG1214-1HG40-4XB0

6AG1214-1HG40-5XB0

6AG1214-1HG40-2XB0

Accessories

SIPLUS SB 1221 digital input signal board

(Extended temperature range and exposure to environmental substances; cannot be used with 6AG1214-1....-2XB0)

4 inputs, 5 V DC, 200 kHz, sourcing

6AG1221-3AD30-5XB0

4 inputs, 24 V DC, 200 kHz,
sourcing

6AG1221-3BD30-5XB0

SIPLUS SB 1222 digital output signal board

(Extended temperature range and exposure to environmental substances; cannot be used with 6AG1214-1....-2XB0)

4 outputs, 5 V DC, 0.1 A, 200 kHz

6AG1222-1AD30-5XB0

4 outputs, 24 V DC, 0.1 A, 200 kHz

6AG1222-1BD30-5XB0

SIPLUS SB 1223 digital input/output signal board

(Extended temperature range and exposure to environmental substances; cannot be used with 6AG1214-1....-2XB0)

2 inputs, 24 V DC,
IEC type 1 sinking input;
2 x 24 V DC transistor outputs,
0.5 A, 5 W;
can be used as HSC at up to 30 kHz

- For areas with exceptional exposure to environmental substances (conformal coating)
- Ambient temperature -25 ... +55 °C

6AG1223-0BD30-4XB0

6AG1223-0BD30-5XB0

2 inputs, 5 V DC, 200 kHz
2 outputs 5 V DC, 0.1 A, 200 kHz

6AG1223-3AD30-5XB0

2 inputs, 24 V DC, 200 kHz
2 outputs 24 V DC, 0.1 A, 200 kHz

6AG1223-3BD30-5XB0

SIPLUS SB 1232 analog output signal board

(Extended temperature range and exposure to environmental substances; cannot be used with 6AG1214-1....-2XB0)

Range of ambient temperature
-25 ... +55 °C

1 analog output, ±10 V with
12 bits or 0 ... 20 mA with 11 bits

6AG1232-4HA30-5XB0

Range of ambient temperature
0 ... +55 °C

1 analog output, ±10 V with
12 bits or 0 ... 20 mA with 11 bits

6AG1232-4HA30-4XB0

SIPLUS CB 1241 RS 485 communication board

(Extended temperature range and exposure to environmental substances; cannot be used with 6AG1214-1....-2XB0)

For point-to-point connection,
with 1 RS485 interface

6AG1241-1CH30-5XB1

Other accessories

See SIMATIC S7-1200
CPU 1214C, page 3/14

Technical specifications

Article number	6AG1214-1AG40-4XB0	6AG1214-1AG40-5XB0	6AG1214-1AG40-2XB0
Based on	6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC	6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC	6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C; = Tmin; Startup @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical	60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position	70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 1 (no adjacent points) with horizontal mounting position
• At cold restart, min.	0 °C	-25 °C	-25 °C
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1214C

Technical specifications

Article number	6AG1214-1AG40-4XB0	6AG1214-1AG40-5XB0	6AG1214-1AG40-2XB0
Based on	6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC	6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC	6ES7214-1AG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/DC
Usage in industrial process technology			
<ul style="list-style-type: none"> - Against chemically active substances acc. to EN 60654-4 - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	<p>Yes; Class 3 (excluding trichlorethylene)</p> <p>Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)</p>	<p>Yes; Class 3 (excluding trichlorethylene)</p> <p>Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)</p>	<p>Yes; Class 3 (excluding trichlorethylene)</p> <p>Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)</p>
Remark			
<ul style="list-style-type: none"> - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
<ul style="list-style-type: none"> • Coatings for printed circuit board assemblies acc. to EN 61086 • Protection against fouling acc. to EN 60664-3 • Military testing according to MIL-I-46058C, Amendment 7 • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	<p>Yes; Class 2 for high reliability</p> <p>Yes; Type 1 protection</p> <p>Yes; Discoloration of coating possible during service life</p> <p>Yes; Conformal coating, Class A</p>	<p>Yes; Class 2 for high reliability</p> <p>Yes; Type 1 protection</p> <p>Yes; Discoloration of coating possible during service life</p> <p>Yes; Conformal coating, Class A</p>	<p>Yes; Class 2 for high reliability</p> <p>Yes; Type 1 protection</p> <p>Yes; Discoloration of coating possible during service life</p> <p>Yes; Conformal coating, Class A</p>
Article number	6AG1214-1BG40-4XB0	6AG1214-1BG40-5XB0	6AG1214-1BG40-2XB0
Based on	6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY	6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY	6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY
Ambient conditions			
Ambient temperature during operation			
<ul style="list-style-type: none"> • min. • max. 	<p>-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C</p> <p>60 °C; = Tmax</p>	<p>-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C</p> <p>60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position</p>	<p>-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C</p> <p>70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 1 (no adjacent points) with horizontal mounting position</p>
<ul style="list-style-type: none"> • At cold restart, min. 	0 °C	-25 °C	-25 °C
Altitude during operation relating to sea level			
<ul style="list-style-type: none"> • Installation altitude above sea level, max. • Ambient air temperature-barometric pressure-altitude 	<p>2 000 m</p> <p>Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC</p>	<p>2 000 m</p> <p>Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC</p>	<p>2 000 m</p> <p>Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC</p>
Relative humidity			
<ul style="list-style-type: none"> • With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

Technical specifications

Article number	6AG1214-1BG40-4XB0	6AG1214-1BG40-5XB0	6AG1214-1BG40-2XB0
Based on	6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY	6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY	6ES7214-1BG40-0XB0 SIPLUS S7-1200 CPU 1214C AC/DC/RLY
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1214C

Technical specifications

Article number	6AG1214-1HG40-4XB0	6AG1214-1HG40-5XB0	6AG1214-1HG40-2XB0
Based on	6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY	6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY	6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical	60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position	70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 1 (no adjacent points) with horizontal mounting position
• At cold restart, min.	0 °C	-25 °C	-25 °C
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

Technical specifications

Article number	6AG1214-1HG40-4XB0	6AG1214-1HG40-5XB0	6AG1214-1HG40-2XB0
Based on	6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY	6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY	6ES7214-1HG40-0XB0 SIPLUS S7-1200 CPU 1214C DC/DC/RLY
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1215C

Overview



- The compact high-performance CPU
- With 24 integrated I/Os
- Expandable by:
 - 1 signal board (SB) or communication board (CB);
not possible with: 6AG1215-1AG40-2XB0, 6AG1215-1BG40-2XB0, 6AG1215-1HG40-2XB0
 - 8 signal modules (SM)
 - Max. 3 communications modules (CM)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

Article No.

SIPLUS CPU 1215C compact CPU, AC/DC/relay

(Extended temperature range and exposure to environmental substances)

Integrated program and data memory 125 KB, load memory 4 MB; wide-range power supply 85 ... 264 V AC; Boolean execution times 0.085 µs per operation; 14 digital inputs, 10 digital outputs (relay), 2 analog inputs, 2 analog outputs; expandable by up to 3 communications modules, 8 signal modules and 1 signal board/communication board; digital inputs usable as HSC with 100 kHz

- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +70 °C

6AG1215-1BG40-4XB0

6AG1215-1BG40-5XB0

6AG1215-1BG40-2XB0

SIPLUS CPU 1215C compact CPU, DC/DC/DC

(Extended temperature range and exposure to environmental substances)

Integrated program and data memory 125 KB, load memory 4 MB; Supply voltage 24 V DC; Boolean execution times 0.085 µs per operation; 14 digital inputs, 10 digital outputs, 2 analog inputs, 2 analog outputs; expandable by up to 3 communications modules, 8 signal modules and 1 signal board/communication board; digital inputs usable as HSC with 100 kHz; 24 V DC digital outputs usable as pulse outputs (PTO) or pulse-width-modulated outputs (PWM) with 100 kHz

- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +70 °C

6AG1215-1AG40-4XB0

6AG1215-1AG40-5XB0

6AG1215-1AG40-2XB0

Ordering data	Article No.	Ordering data	Article No.
SIPLUS CPU 1215C compact CPU, DC/DC/relay (Extended temperature range and exposure to environmental substances) Integrated program and data memory 125 KB, load memory 4 MB; Supply voltage 24 V DC; Boolean execution times 0.085 µs per operation; 14 digital inputs, 10 digital outputs (relay), 2 analog inputs, 2 analog outputs; expandable by up to 3 communications modules, 8 signal modules and 1 signal board/communication board; digital inputs usable as HSC with 100 kHz <ul style="list-style-type: none"> For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +60 °C For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +70 °C 	6AG1215-1HG40-4XB0 6AG1215-1HG40-5XB0 6AG1215-1HG40-2XB0	SIPLUS SB 1223 digital input/output signal board (Extended temperature range and exposure to environmental substances; cannot be used with 6AG1215-1....-2XB0) 2 inputs, 24 V DC, IEC type 1 sinking input; 2 x 24 V DC transistor outputs, 0.5 A, 5 W; can be used as HSC at up to 30 kHz <ul style="list-style-type: none"> For areas with exceptional exposure to environmental substances (conformal coating) Ambient temperature -25 ... +55 °C 2 inputs, 5 V DC, 200 kHz 2 outputs 5 V DC, 0.1 A, 200 kHz 2 inputs, 24 V DC, 200 kHz 2 outputs 24 V DC, 0.1 A, 200 kHz	6AG1223-0BD30-4XB0 6AG1223-0BD30-5XB0 6AG1223-3AD30-5XB0 6AG1223-3BD30-5XB0
Accessories SIPLUS SB 1221 digital input signal board (Extended temperature range and exposure to environmental substances; cannot be used with 6AG1215-1....-2XB0) 4 inputs, 5 V DC, 200 kHz, sourcing 4 inputs, 24 V DC, 200 kHz, sourcing	6AG1221-3AD30-5XB0 6AG1221-3BD30-5XB0	SIPLUS SB 1232 analog output signal board (Extended temperature range and exposure to environmental substances; cannot be used with 6AG1215-1....-2XB0) <u>Range of ambient temperature -25 ... +55 °C</u> 1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits <u>Range of ambient temperature 0 ... +55 °C</u> 1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits	6AG1232-4HA30-5XB0 6AG1232-4HA30-4XB0
SIPLUS SB 1222 digital output signal board (Extended temperature range and exposure to environmental substances; cannot be used with 6AG1215-1....-2XB0) 4 outputs, 5 V DC, 0.1 A, 200 kHz 4 outputs, 24 V DC, 0.1 A, 200 kHz	6AG1222-1AD30-5XB0 6AG1222-1BD30-5XB0	SIPLUS CB 1241 RS 485 communication board (Extended temperature range and exposure to environmental substances; cannot be used with 6AG1215-1....-2XB0) For point-to-point connection, with 1 RS485 interface	6AG1241-1CH30-5XB1
		Other accessories	See SIMATIC S7-1200 CPU 1215C, page 3/19

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1215C

Technical specifications

Article number	6AG1215-1AG40-4XB0	6AG1215-1AG40-5XB0	6AG1215-1AG40-2XB0
Based on	6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC	6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC	6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical	60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting position	70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 1, analog outputs 1 (no adjacent points) with horizontal mounting position
• At cold restart, min.	0 °C	-25 °C	-25 °C
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

Technical specifications

Article number	6AG1215-1AG40-4XB0	6AG1215-1AG40-5XB0	6AG1215-1AG40-2XB0
Based on	6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC	6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC	6ES7215-1AG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/DC
Usage in industrial process technology	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Against chemically active substances acc. to EN 60654-4	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04			
Remark	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Protection against fouling acc. to EN 60664-3	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A			
Article number	6AG1215-1BG40-4XB0	6AG1215-1BG40-5XB0	6AG1215-1BG40-2XB0
Based on	6ES7215-1BG40-0XB0 SIPLUS S7-1200 CPU 1215C AC/DC/RLY	6ES7215-1BG40-0XB0 SIPLUS S7-1200 CPU 1215C AC/DC/RLY	6ES7215-1BG40-0XB0 SIPLUS S7-1200 CPU 1215C AC/DC/RLY
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical	60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting position	70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 1, analog outputs 1 (no adjacent points) with horizontal mounting position
• At cold restart, min.	0 °C	-25 °C	-25 °C
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1215C

Technical specifications

Article number	6AG1215-1BG40-4XB0	6AG1215-1BG40-5XB0	6AG1215-1BG40-2XB0
Based on	6ES7215-1BG40-0XB0 SIPLUS S7-1200 CPU 1215C AC/DC/RLY	6ES7215-1BG40-0XB0 SIPLUS S7-1200 CPU 1215C AC/DC/RLY	6ES7215-1BG40-0XB0 SIPLUS S7-1200 CPU 1215C AC/DC/RLY
Relative humidity			
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

Technical specifications

Article number	6AG1215-1HG40-4XB0	6AG1215-1HG40-5XB0	6AG1215-1HG40-2XB0
Based on	6ES7215-1HG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/RLY	6ES7215-1HG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/RLY	6ES7215-1HG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/RLY
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical	60 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting position	70 °C; = Tmax; Tmax > +55 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 2, analog outputs 2 (no adjacent points) with horizontal mounting position; Tmax > +60 °C number of simultaneously switched-on digital inputs 7, digital outputs 5, analog inputs 1, analog outputs 1 (no adjacent points) with horizontal mounting position
• At cold restart, min.	0 °C	-25 °C	-25 °C
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1215C

Technical specifications

Article number	6AG1215-1HG40-4XB0	6AG1215-1HG40-5XB0	6AG1215-1HG40-2XB0
Based on	6ES7215-1HG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/RLY	6ES7215-1HG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/RLY	6ES7215-1HG40-0XB0 SIPLUS S7-1200 CPU 1215C DC/DC/RLY
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview

- Powerful controller for extremely fast signal processing
Expandable by:
 - 1 signal board (SB), battery board (BB) or communication board (CB)
 - 8 signal modules (SM)
 - Max. 3 communications modules (CM)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**SIPLUS CPU 1217 compact CPU, DC/DC/DC**

(Extended temperature range and exposure to environmental substances)

2 PROFINET ports onboard I/O:
10 DI 24 V DC; 4 DI RS-422/485;
6 DO 24 V DC; 0.5 A;
4 DO RS-422/485;
6 DO 24 V DC; 0.5 A;
4 DO RS-422/485
2 AI 0-10 V DC; 2 AO 0 - 20 mA
power supply: 20.4 - 28.8 V DC,
program/data memory 150 KB,
20.4 - 28.8 V DC, program/data
memory 150 KB

- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +70 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +60 °C

Article No.**6AG1217-1AG40-2XB0****6AG1217-1AG40-5XB0****Technical specifications**

Article number	6AG1217-1AG40-2XB0	6AG1217-1AG40-5XB0
Based on	6ES7217-1AG40-0XB0 SIPLUS S7-1200 CPU 1217C DC/DC/DC	6ES7217-1AG40-0XB0 SIPLUS S7-1200 CPU 1217C DC/DC/DC
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C; = Tmin; Startup @ -25 °C	-40 °C; = Tmin; Startup @ -25 °C
• max.	70 °C; = Tmax; Tmax > 55 °C number of simultaneously switched-on digital inputs 5, current sinking/current sourcing (no adjacent points) and 4 differential inputs with horizontal mounting position; Tmax > 55 °C number of simultaneously switched-on digital inputs 3, current sinking (no adjacent points) and 4 differential outputs with horizontal mounting position	60 °C; = Tmax; Tmax > 55 °C number of simultaneously switched-on digital inputs 5, current sinking/current sourcing (no adjacent points) and 4 differential inputs with horizontal mounting position; Tmax > 55 °C number of simultaneously switched-on digital inputs 3, current sinking (no adjacent points) and 4 differential outputs with horizontal mounting position
Altitude during operation relating to sea level		
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

SIMATIC S7-1200 Basic Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1217C

Technical specifications

Article number	6AG1217-1AG40-2XB0	6AG1217-1AG40-5XB0
Based on	6ES7217-1AG40-0XB0	6ES7217-1AG40-0XB0
	SIPLUS S7-1200 CPU 1217C DC/DC/DC	SIPLUS S7-1200 CPU 1217C DC/DC/DC
Resistance		
Coolants and lubricants		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75%) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3C4 (RH < 75%) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Pollutant concentrations		
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview



The fail-safe SIMATIC S7-1200 Controllers are based on the S7-1200 standard CPUs and offer additional safety-related functions.

They can be used for safety-related tasks according to IEC 61508 up to SIL 3 and ISO 13849-1 up to PL e.

Safety-related programs are created in the TIA Portal. The STEP 7 Safety engineering tool offers commands, operations and blocks for safety-related programs in the LAD and FBD languages. To this end, there is a library with pre-configured blocks for safety-related functions certified by the German Technical Inspectorate (TÜV).

- Standard controller with integrated safety functions:
 - Standardized and convenient diagnostic functions for standard and safety
 - Uniform symbols, data consistency, ...
- Modular system with scalable range of CPUs and expandable I/O quantity structure:
 - One engineering for standard and fail-safe automation
 - Use of the standard I/O modules together with the fail-safe I/O modules in the central system
 - Integrated standard PROFINET functionalities for PROFINET controllers and PROFINET iDevice services
 - Connection of distributed standard I/O via fieldbus such as PROFINET or PROFIBUS
 - F-library certified by the German Technical Inspectorate (TÜV) for all common safety functions
 - Free programming of the safety logic using FBD and LAD
 - Standard-compliant printout of the F program
- One integrated engineering for both standard and safety from S7-1200 to S7-300/400/1500 and WinAC RTX F:
 - STEP 7 Safety Basic for easy engineering of the CPU 1200 FC
 - STEP 7 Safety Advanced for the entire fail-safe SIMATIC S7 portfolio
- Integrated system diagnostics of the CPUs, for standard and safety:
 - Consistent plain text display of system diagnostics information in the TIA Portal, HMI and web server
 - Messages are updated even if the CPU is in STOP state
 - System diagnostics integrated in the CPU firmware. Configuration by user not required
 - The diagnostics is automatically updated on configuration changes.
- 2 fail-safe compact controllers with graded performances in the versions DC/DC/DC and DC/DC/relay

Characteristics	CPU 1212 FC	CPU 1214 FC	CPU 1215 FC
Variants	DC/DC/DC, DC/DC/relay	DC/DC/DC, DC/DC/relay	DC/DC/DC, DC/DC/relay
Work memory, integrated	100 KB	125 KB	150 KB
Load memory, integrated	2 MB	4 MB	4 MB
Memory card	SIMATIC Memory Card (optional)	SIMATIC Memory Card (optional)	SIMATIC Memory Card (optional)
Standard digital inputs/outputs, integrated	8/6	14/10	14/10
Standard analog inputs, integrated	2	2	2
Standard analog outputs, integrated	-	-	2
Process image	1024 bytes for inputs, 1024 bytes for outputs	1024 bytes for inputs, 1024 bytes for outputs	1024 bytes for inputs, 1024 bytes for outputs
Expansion by signal board	Max. 1	Max. 1	Max. 1
Expansion by signal modules	Max. 2	Max. 8	Max. 8
Expansion by communications modules	Max. 3	Max. 3	Max. 3

SIMATIC S7-1200 Basic Controllers

Central processing units

Fail-safe CPUs

Ordering data	Article No.	Article No.
CPU 1212 FC		
SIMATIC S7-1200F, CPU 1212 FC, compact CPU, DC/DC/DC Onboard I/O: 8 DI 24 V DC; 6 DO 24 V DC; 2 AI 0-10 V DC, power supply: 20.4-28.8 V DC, program/data memory 100 KB	6ES7212-1AF40-0XB0	
SIMATIC S7-1200, CPU 1212FC, compact CPU, DC/DC/relay Onboard I/O: 8 DI 24 V DC; 6 DO relay 2 A; 2 AI 0-10 V DC, power supply: 20.4-28.8 V DC, program/data memory 100 KB	6ES7212-1HF40-0XB0	
CPU 1214 FC		
SIMATIC S7-1200F, CPU 1214 FC, compact CPU, DC/DC/DC Onboard I/O: 14 DI 24 V DC; 10 DO 24 V DC; 2 AI 0-10 V DC, power supply: 20.4-28.8 V DC, program/data memory 125 KB	6ES7214-1AF40-0XB0	
SIMATIC S7-1200F, CPU 1214 FC, compact CPU, DC/DC/relay Onboard I/O: 14 DI 24 V DC; 10 DO relay 2 A; 2 AI 0-10 V DC, power supply: 20.4-28.8 V DC, program/data memory 125 KB	6ES7214-1HF40-0XB0	
CPU 1215 FC		
SIMATIC S7-1200F, CPU 1215 FC, compact CPU, DC/DC/DC 2 PROFINET ports, onboard I/O: 14 DI 24 V DC; 10 DO 24 V DC; 0.5 A; 2 AI 0-10 V DC, 2 AO 0-20 mA DC, power supply: 20.4-28.8 V DC, program/data memory 150 KB	6ES7215-1AF40-0XB0	
SIMATIC S7-1200F, CPU 1215 FC, compact CPU, DC/DC/relay 2 PROFINET ports, onboard I/O: 14 DI 24 V DC; 10 DO relay 2 A, 2 AI 0-10 V DC, 2 AO 0-20 mA DC, power supply: 20.4-28.8 V DC, program/data memory 150 KB	6ES7215-1HF40-0XB0	
Accessories		
SIMATIC S7-1200, SIM 1274 simulator module For CPU 1214/1215 14 input switches 24 V DC	6ES7274-1XH30-0XA0	
SIMATIC Memory Card (optional)		
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0	
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0	
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0	
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0	
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0	
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0	
SIMATIC S7-1200, extension cable 2-tier configuration For SM 12XX, 2.0 m	6ES7290-6AA30-0XA0	
Terminal block (spare part)		
For CPU 1214 FC, DC/DC/DC		
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on input side (4 units with 20 screws each)	6ES7292-1AV30-0XA0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on output side (4 units with 12 screws each)	6ES7292-1AM30-0XA0	
SIMATIC S7-1200, spare part, gold-plated I/O terminal block Analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0	
For CPU 1214 FC, DC/DC/relay		
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on input side (4 units with 20 screws each)	6ES7292-1AV30-0XA0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1214C/1215C on output side, (4 units with 12 screws each)	6ES7292-1AM40-0XA0	
SIMATIC S7-1200, spare part, gold-plated I/O terminal block Analog inputs CPU 1211C/1212C/1214C (4 units with 3 screws each)	6ES7292-1BC30-0XA0	
For CPU 1215 FC, DC/DC/DC		
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on input side (4 units with 20 screws each)	6ES7292-1AV30-0XA0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on output side (4 units with 12 screws each)	6ES7292-1AM30-0XA0	
SIMATIC S7-1200, spare part, gold-plated I/O terminal block Analog signals CPU 1215C/1217C, (4 units with 6 screws each)	6ES7292-1BF30-0XB0	
For CPU 1215 FC, DC/DC/relay		
SIMATIC S7-1200, spare part, tin-coated I/O terminal block CPU 1214C/1215C on input side (4 units with 20 screws each)	6ES7292-1AV30-0XA0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, CPU 1214C/1215C on output side, (4 units with 12 screws each)	6ES7292-1AM40-0XA0	
SIMATIC S7-1200, spare part, gold-plated I/O terminal block Analog signals CPU 1215C/1217C, (4 units with 6 screws each))	6ES7292-1BF30-0XB0	
Front flap set (spare part)		
SIMATIC S7-1200, spare part front flaps CPU 1214 (CPU 1214 front flap top/front flap bottom/signal board cover) 4 units each	6ES7291-1AB30-0XA0	
SIMATIC S7-1200, spare part front flaps CPU 1215C (CPU 1215C front flap top/front flap bottom/signal board cover) 4 units each	6ES7291-1AC30-0XA0	

Ordering data	Article No.	Article No.
RJ45 strain relief SIMATIC S7-1200, RJ45 strain relief Single port 4 units per packing unit	6ES7290-3AA30-0XA0	6ES7833-1FA23-0YH5 SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾ Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery
SIMATIC S7-1200, RJ45 strain relief Dual port 4 units per packing unit	6ES7290-3AB30-0XA0	
STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.		STEP 7 Safety Basic V19 Task: Engineering tool for configuring fail-safe user programs for SIMATIC S7-1200 FC Requirement: STEP 7 Basic V19 or higher Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB	6ES7833-1FA23-0YA5	6ES7833-1FB23-0YA5 SIMATIC S7, F-programming tool; STEP 7 Safety Basic V19, Engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 as of STEP 7 Basic V19; for configuring SIMATIC S7-1200F Content: 1x USB
		6ES7833-1FB23-0YH5 SIMATIC S7, F-programming tool; STEP 7 Safety Basic V19, Engineering software; floating license for 1 user; license key for download¹⁾ Class A, 2 languages (en, de); runs with TIA Portal V19 as of STEP 7 Basic V19; for configuring SIMATIC S7-1200F Consignee email address required for delivery

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1200 Basic Controllers

Central processing units

Fail-safe CPUs

Technical specifications

Article number	6ES7212-1AF40-0XB0	6ES7212-1HF40-0XB0	6ES7215-1AF40-0XB0	6ES7214-1AF40-0XB0	6ES7214-1HF40-0XB0	6ES7215-1HF40-0XB0
	CPU 1212FC, DC/DC/DC, 8DI/6DO/2AI	CPU 1212FC, DC/DC/Relay, 8DI/6DO/2AI	CPU 1215 FC, DC/DC/DC, 14DI/10DO/2AI/2AO	CPU 1214 FC, DC/DC/DC, 14DI/10DO/2AI	CPU 1214 FC, DC/DC/Relay, 14DI/10DO/2AI	CPU 1215 FC, DC/DC/RLY, 14DI/10DO/2AI/2AO
General information						
Product type designation	CPU 1212FC DC/DC/DC	CPU 1212FC DC/DC/relay	CPU 1215FC DC/DC/DC	CPU 1214FC DC/DC/DC	CPU 1214FC DC/DC/Relay	CPU 1215FC DC/DC/relay
Engineering with						
• Programming package	STEP 7 V18 or higher	STEP 7 V18 or higher	STEP 7 V18 or higher	STEP 7 V18 or higher	STEP 7 V18 or higher	STEP 7 V18 or higher
Supply voltage						
Rated value (DC)						
• 24 V DC	Yes	Yes	Yes	Yes	Yes	Yes
Encoder supply						
24 V encoder supply						
• 24 V	L+ minus 4 V DC min.	L+ minus 4 V DC min.	L+ minus 4 V DC min.	L+ minus 4 V DC min.	L+ minus 4 V DC min.	L+ minus 4 V DC min.
Memory						
Work memory						
• integrated	150 kbyte	150 kbyte	250 kbyte	200 kbyte	200 kbyte	250 kbyte
Load memory						
• integrated	2 Mbyte	2 Mbyte	4 Mbyte	4 Mbyte	4 Mbyte	4 Mbyte
• Plug-in (SIMATIC Memory Card), max.	with SIMATIC memory card	with SIMATIC memory card	with SIMATIC memory card	with SIMATIC memory card	with SIMATIC memory card	with SIMATIC memory card
Backup						
• without battery	Yes	Yes	Yes	Yes	Yes	Yes
CPU processing times						
for bit operations, typ.	0.08 µs; / instruction	0.08 µs; / instruction	0.08 µs; / instruction	0.08 µs; / instruction	0.08 µs; / instruction	0.08 µs; / instruction
for word operations, typ.	1.7 µs; / instruction	1.7 µs; / instruction	1.7 µs; / instruction	1.7 µs; / instruction	1.7 µs; / instruction	1.7 µs; / instruction
for floating point arithmetic, typ.	2.3 µs; / instruction	2.3 µs; / instruction	2.3 µs; / instruction	2.3 µs; / instruction	2.3 µs; / instruction	2.3 µs; / instruction
Data areas and their retentivity						
Flag						
• Size, max.	4 kbyte; Size of bit memory address area	4 kbyte; Size of bit memory address area	8 kbyte; Size of bit memory address area	8 kbyte; Size of bit memory address area	8 kbyte; Size of bit memory address area	8 kbyte; Size of bit memory address area
Address area						
Process image						
• Inputs, adjustable	1 kbyte	1 kbyte	1 kbyte	1 kbyte	1 kbyte	1 kbyte
• Outputs, adjustable	1 kbyte	1 kbyte	1 kbyte	1 kbyte	1 kbyte	1 kbyte
Time of day						
Clock						
• Hardware clock (real-time)	Yes	Yes	Yes	Yes	Yes	Yes
Digital inputs						
Number of digital inputs	8; Integrated	8; Integrated	14; Integrated	14; Integrated	14; Integrated	14; Integrated
• of which inputs usable for technological functions	4; HSC (High Speed Counting)	4; HSC (High Speed Counting)	6; HSC (High Speed Counting)	6; HSC (High Speed Counting)	6; HSC (High Speed Counting)	6; HSC (High Speed Counting)
Digital outputs						
Number of digital outputs	6	6; Relays	10	10	10; Relays	10; Relays
• of which high-speed outputs	4; 100 kHz Pulse Train Output		4; 100 kHz Pulse Train Output	4; 100 kHz Pulse Train Output		
Analog inputs						
Number of analog inputs	2	2	2	2	2	2
Input ranges						
• Voltage	Yes	Yes	Yes	Yes	Yes	Yes
Analog outputs						
Number of analog outputs	0	0	2	0	0	2
Output ranges, current						
• 0 to 20 mA			Yes			Yes

Technical specifications

Article number	6ES7212-1AF40-0XB0	6ES7212-1HF40-0XB0	6ES7215-1AF40-0XB0	6ES7214-1AF40-0XB0	6ES7214-1HF40-0XB0	6ES7215-1HF40-0XB0
	CPU 1212FC, DC/DC/DC, 8DI/6DO/2AI	CPU 1212FC, DC/DC/Relay, 8DI/6DO/2AI	CPU 1215 FC, DC/DC/DC, 14DI/10DO/2AI/2AO	CPU 1214 FC, DC/DC/DC, 14DI/10DO/2AI	CPU 1214 FC, DC/DC/Relay, 14DI/10DO/2AI	CPU 1215 FC, DC/DC/RLY, 14DI/10DO/2AI/2AO
1. Interface						
Interface type	PROFINET	PROFINET	PROFINET	PROFINET	PROFINET	PROFINET
Protocols						
• PROFINET IO Controller	Yes	Yes	Yes	Yes	Yes	Yes
• PROFINET IO Device	Yes	Yes	Yes	Yes	Yes	Yes
• SIMATIC communication	Yes	Yes	Yes	Yes	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes	Yes	Yes	Yes
• Media redundancy	No	No	Yes; as MRP client	No	No	Yes
Protocols						
Open IE communication						
• TCP/IP	Yes	Yes	Yes	Yes	Yes	Yes
• ISO-on-TCP (RFC1006)	Yes	Yes	Yes	Yes	Yes	Yes
• UDP	Yes	Yes	Yes	Yes	Yes	Yes
Web server						
• supported	Yes	Yes	Yes	Yes	Yes	Yes
OPC UA						
• OPC UA Server	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required	Yes; data access (read, write, subscribe), method call, runtime license required
communication functions / header						
S7 communication						
• supported	Yes	Yes	Yes	Yes	Yes	Yes
Number of connections						
• overall	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max	PG Connections: 4 reserved / 4 max; HMI Connections: 12 reserved / 18 max; S7 Connections: 8 reserved / 14 max; Open User Connections: 8 reserved / 14 max; Web Connections: 2 reserved / 30 max; OPC UA Connections: 0 reserved / 10 max; Total Connections: 34 reserved / 64 max
Integrated Functions						
Counter						
• Number of counters	6	6	6	6	6	6
• Counting frequency, max.	100 kHz	100 kHz	100 kHz	100 kHz	100 kHz	100 kHz
Frequency measurement						
controlled positioning	Yes	Yes	Yes	Yes	Yes	Yes
Number of position-controlled positioning axes, max.	8	8	8	8	8	8
Number of positioning axes via pulse-direction interface	Up to 4 with SB 1222	Up to 4 with SB 1222	4; With integrated outputs	4; With integrated outputs	Up to 4 with SB 1222	Up to 4 with SB 1222
PID controller	Yes	Yes	Yes	Yes	Yes	Yes
Number of alarm inputs	4	4	4	4	4	4
Number of pulse outputs	4		4	4		
Limit frequency (pulse)	100 kHz		100 kHz	100 kHz		

SIMATIC S7-1200 Basic Controllers


Central processing units

Fail-safe CPUs

Technical specifications

Article number	6ES7212-1AF40-0XB0	6ES7212-1HF40-0XB0	6ES7215-1AF40-0XB0	6ES7214-1AF40-0XB0	6ES7214-1HF40-0XB0	6ES7215-1HF40-0XB0
	CPU 1212FC, DC/DC/DC, 8DI/6DO/2AI	CPU 1212FC, DC/DC/Relay, 8DI/6DO/2AI	CPU 1215 FC, DC/DC/DC, 14DI/10DO/2AI/2AO	CPU 1214 FC, DC/DC/DC, 14DI/10DO/2AI	CPU 1214 FC, DC/DC/Relay, 14DI/10DO/2AI	CPU 1215 FC, DC/DC/RLY, 14DI/10DO/2AI/2AO
Ambient conditions						
Ambient temperature during operation						
• min.	0 °C	0 °C	0 °C	0 °C	0 °C	0 °C
• max.	55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical	55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical	55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical	55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical	55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical	55 °C; Number of simultaneously activated inputs or outputs 4 or 3 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 or 6 at 55 °C horizontal or 45 °C vertical
Pollutant concentrations						
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
configuration / header						
configuration / programming / header						
Programming language						
- LAD	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe
- FBD	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe
- SCL	Yes	Yes	Yes	Yes	Yes	Yes
Dimensions						
Width	90 mm	90 mm	130 mm	110 mm	110 mm	130 mm
Height	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Depth	75 mm	75 mm	75 mm	75 mm	75 mm	75 mm
Weights						
Weight, approx.	370 g	385 g	500 g	415 g	435 g	585 g

Overview

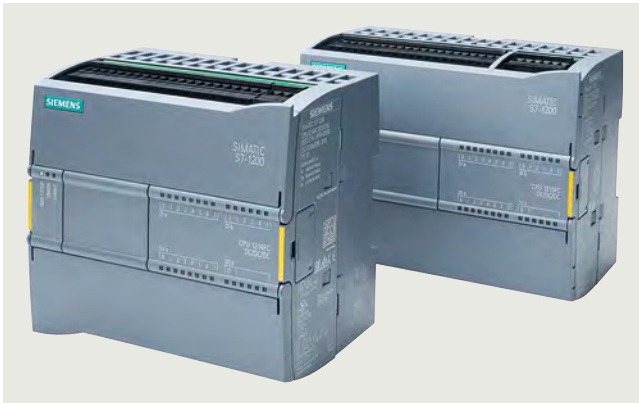

The fail-safe SIPLUS S7-1200 Controllers are based on the SIPLUS S7-1200 standard CPUs and offer additional safety-related functions.

They can be used for safety-oriented tasks according to IEC 61508 up to SIL 3 and ISO 13849-1 up to PL e.

Safety-related programs are created in the TIA Portal engineering framework. The STEP 7 Safety engineering tool offers commands, operations and blocks for safety-related programs in the LAD and FBD languages. To this end, there is a library with pre-configured blocks for safety-related functions certified by the German Technical Inspectorate (TÜV).

- Standard controller with integrated safety functions:
 - Standardized and convenient diagnostic functions for standard and safety
 - Uniform symbols, data consistency, ...
- Modular system with scalable range of CPUs and expandable I/O quantity structure:
 - One engineering for standard and fail-safe automation
 - Use of the standard I/O modules together with the fail-safe I/O modules in the central system
 - Integrated standard PROFINET functionalities for PROFINET controllers and PROFINET iDevice services
 - Connection of distributed standard I/O via fieldbus such as PROFINET or PROFIBUS
 - F-library certified by the German Technical Inspectorate (TÜV) for all common safety functions
 - Free programming of the safety logic using FBD and LAD
 - Standard-compliant printout of the F program
- One integrated engineering for both standard and safety from S7-1200 to S7-300/400/1500 and WinAC RTX F:
 - STEP 7 Safety Basic for easy engineering of the CPU 1200 FC
 - STEP 7 Safety Advanced for the entire fail-safe SIMATIC S7 portfolio
- Integrated system diagnostics of the CPUs, for standard and safety:
 - Consistent plain text display of system diagnostics information in the TIA Portal, HMI and web server
 - Messages are updated even if the CPU is in STOP state
 - System diagnostics integrated in the CPU firmware. Configuration by user not required
 - The diagnostics is automatically updated on configuration changes.
- 2 fail-safe compact controllers with graded performances in the versions DC/DC/DC and DC/DC/relay

Characteristics	SIPLUS CPU 1214 FC	SIPLUS CPU 1215 FC
Variants	DC/DC/DC, DC/DC/relay	DC/DC/DC
Work memory, integrated	125 KB	150 KB
Load memory, integrated	4 MB	4 MB
Memory card	SIMATIC Memory Card (optional)	SIMATIC Memory Card (optional)
Standard digital inputs/outputs, integrated	14/10	14/10
Standard analog inputs, integrated	2	2
Standard analog outputs, integrated	-	2
Process image	1024 bytes for inputs, 1024 bytes for outputs	1024 bytes for inputs, 1024 bytes for outputs
Expansion by signal board	Max. 1	Max. 1
Expansion by signal modules	Max. 8	Max. 8
Expansion by communications modules	Max. 3	Max. 3

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

SIMATIC S7-1200 Basic Controllers

Central processing units

SIPLUS fail-safe CPUs

Ordering data

Article No.

Article No.

CPU 1214 FC

(Extended temperature range and exposure to environmental substances)

Fail-safe compact CPU, DC/DC/DC;

Integrated program/ data memory 125 KB, load memory 4 MB; supply voltage 24 V DC; Boolean execution times 0.085 µs per operation; 14 digital inputs, 10 digital outputs, 2 analog inputs; expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board; digital inputs can be used as HSC at 100 kHz, 24 V DC digital outputs can be used as pulse outputs (PTO) or pulse-width modulated outputs (PWM) at 100 kHz

6AG1214-1AF40-5XB0

Fail-safe compact CPU, DC/DC/relay

Integrated program/ data memory 125 KB, load memory 4 MB; supply voltage 24 V DC Boolean execution times 0.085 µs per operation 14 digital inputs, 10 digital outputs (relays) 2 analog inputs Expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board Digital inputs can be used as HSC at 100 kHz

6AG1214-1HF40-5XB0

CPU 1215 FC

(Extended temperature range and exposure to environmental substances)

Fail-safe compact CPU, DC/DC/DC

Integrated program/ data memory 150 KB, load memory 4 MB Supply voltage 24 V DC Boolean execution times 0.085 µs per operation 14 digital inputs, 10 digital outputs 2 analog inputs; 2 analog outputs Expandable by up to 3 communications modules, 8 signal modules, and 1 signal board/communication board Digital inputs can be used as HSC at 100 kHz 24 V DC digital outputs can be used as pulse outputs (PTO) or pulse-width modulated outputs (PWM) at 100 kHz

6AG1215-1AF40-5XB0

Accessories

See SIMATIC CPU 121x FC, page 3/50

Technical specifications

Article number	6AG1214-1AF40-5XB0	6AG1214-1HF40-5XB0	6AG1215-1AF40-5XB0
Based on	6ES7214-1AF40-0XB0 SIPLUS S7-1200 CPU 1214FC DC/DC/DC	6ES7214-1HF40-0XB0 SIPLUS S7-1200 CPU 1214FC DC/DC/RLY	6ES7215-1AF40-0XB0 SIPLUS S7-1200 CPU 1215FC DC/DC/DC
Ambient conditions			
Ambient temperature during operation			
• min.	-25 °C; = Tmin	-25 °C; = Tmin	-25 °C; = Tmin
• max.	55 °C; = Tmax	55 °C; = Tmax	55 °C; = Tmax
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes	Yes	Yes
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SM 1221 digital input modules

Overview



- Digital inputs as supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the relevant task
- For subsequent expansion of the system with additional inputs

Ordering data

Article No.

SM 1221 digital input signal module	
SIMATIC S7-1200, SM 1221 digital input module 8 DI, 24 V DC, sink/source	6ES7221-1BF32-0XB0
SIMATIC S7-1200, SM 1221 digital input module 16 DI, 24 V DC, sink/source	6ES7221-1BH32-0XB0
Accessories	
SIMATIC S7-1200, extension cable 2-tier configuration For SM 12XX, 2.0 m	6ES7290-6AA30-0XA0
Terminal block (spare part) For 6ES7221-1BF32-0XB0, 6ES7221-1BH32-0XB0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Digital signal module 8CH/16CH (4 units with 7 screws each)	6ES7292-1AG30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for digital signal modules 8CH/16CH (4 units with 7 pins each)	6ES7292-2AG30-0XA0
Front flap set (spare part)	
SIMATIC S7-1200, spare part front flaps signal module 45 mm (signal module 45 mm wide front flap top & bottom) 6 units each	6ES7291-1BA30-0XA0

Technical specifications

Article number	6ES7221-1BF32-0XB0	6ES7221-1BH32-0XB0
	Digital Input SM 1221, 8DI, 24V DC	Digital Input SM 1221, 16DI, 24V DC
General information		
Product type designation	SM 1221, DI 8x24 V DC	SM 1221, DI 16x24 V DC
Supply voltage		
Rated value (DC)	24 V	24 V
Input current		
from backplane bus 5 V DC, max.	105 mA	130 mA
Digital inputs		
• from load voltage L+ (without load), max.	4 mA; per channel	4 mA; per channel
output voltage / header		
supply voltage of the transmitters / header		
• present	Yes	Yes
Digital inputs		
Number of digital inputs	8	16
• in groups of	2	4
Input characteristic curve in accordance with IEC 61131, type 1	Yes	Yes
Number of simultaneously controllable inputs		
all mounting positions		
- up to 40 °C, max.	8	16
horizontal installation		
- up to 40 °C, max.	8	16
- up to 50 °C, max.	8	16
vertical installation		
- up to 40 °C, max.	8	16

Technical specifications

Article number	6ES7221-1BF32-0XB0	6ES7221-1BH32-0XB0
	Digital Input SM 1221, 8DI, 24V DC	Digital Input SM 1221, 16DI, 24V DC
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal "0"	5 V DC at 1 mA	5 V DC at 1 mA
• for signal "1"	15 V DC at 2.5 mA	15 V DC at 2.5 mA
Input current		
• for signal "0", max. (permissible quiescent current)	1 mA	1 mA
• for signal "1", min.	2.5 mA	2.5 mA
• for signal "1", typ.	4 mA	4 mA
Input delay (for rated value of input voltage)		
for standard inputs		
- parameterizable	Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four	Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four
for interrupt inputs		
- parameterizable	Yes	Yes
Interrupts/diagnostics/status information		
Alarms		
• Diagnostic alarm	Yes	Yes
Diagnostics indication LED		
• for status of the inputs	Yes	Yes
Potential separation		
Potential separation digital inputs		
• between the channels, in groups of	2	4
Degree and class of protection		
IP degree of protection	IP20	IP20
Standards, approvals, certificates		
CE mark	Yes	Yes
CSA approval	Yes	Yes
UL approval	Yes	Yes
cULus	Yes	Yes
FM approval	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes
KC approval	Yes	Yes
Marine approval	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C	-20 °C
• max.	60 °C	60 °C
connection method		
required front connector	Yes	Yes
Mechanics/material		
Enclosure material (front)		
• Plastic	Yes	Yes
Dimensions		
Width	45 mm	45 mm
Height	100 mm	100 mm
Depth	75 mm	75 mm
Weights		
Weight, approx.	170 g	210 g

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SB 1221 digital input modules

Overview



- Digital inputs as a supplement to the integral I/O of SIMATIC S7-1200 CPUs
- Can be plugged directly into the CPU

Ordering data

Article No.

SB 1221 digital input signal board

SIMATIC S7-1200, SB 1221 digital input module

4 DI, 5 V DC 200 kHz, sourcing input

6ES7221-3AD30-0XB0

SIMATIC S7-1200, SB 1221 digital input module

4 DI, 24 V DC 200 kHz, sourcing input

6ES7221-3BD30-0XB0

Terminal block (spare part)

for signal board

SIMATIC S7-1200, spare part gold-plated I/O terminal block

Signal board (4 units with 6 screws each)

6ES7292-1BF30-0XA0

Technical specifications

Article number	6ES7221-3AD30-0XB0	6ES7221-3BD30-0XB0
	Signal Board SB 1221, 4 DI 5VDC 200KHz	Signal Board SB 1221, 4 DI 24VDC 200KHz
General information		
Product type designation	SB 1221, DI 4x5 V DC 200 kHz	SB 1221, DI 4x24 V DC 200 kHz
Input current		
from backplane bus 5 V DC, typ.	40 mA	40 mA
Digital inputs		
Number of digital inputs	4; Current-sourcing	4; Current-sourcing
• in groups of	4	4
Input voltage		
• Type of input voltage	DC	DC
• Rated value (DC)	5 V	24 V
• for signal *0*	(L+ minus 1.0 V DC) ... L+ (2.2 ... 0 mA)	(L+ minus 5.0 V DC) ... L+ (1.4 ... 0 mA)
• for signal *1*	0 V ... (L+ minus 2.0 V DC (20 ... 5.1 mA))	0 V ... (L+ minus 10 V DC (10 ... 2.9 mA))
Input current		
• for signal *0*, max. (permissible quiescent current)	2.2 mA	1.4 mA
• for signal *1*, min.	5.1 mA	2.9 mA
• for signal *1*, typ.	15 mA	7 mA
Input delay (for rated value of input voltage)		
for standard inputs		
- parameterizable	Yes; 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 μs; 0.05 / 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 ms	Yes; 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 μs; 0.05 / 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 ms
for interrupt inputs		
- parameterizable	Yes	Yes
for technological functions		
- parameterizable	Yes	Yes
Interrupts/diagnostics/status information		
Diagnostics indication LED		
• for status of the inputs	Yes	Yes

Technical specifications

Article number	6ES7221-3AD30-0XB0	6ES7221-3BD30-0XB0
	Signal Board SB 1221, 4 DI 5VDC 200KHz	Signal Board SB 1221, 4 DI 24VDC 200KHz
Standards, approvals, certificates		
CE mark	Yes	Yes
CSA approval	Yes	Yes
UL approval	Yes	Yes
cULus	Yes	Yes
FM approval	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes
KC approval	Yes	Yes
Marine approval	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C	-20 °C
• max.	60 °C	60 °C
Mechanics/material		
Enclosure material (front)		
• Plastic	Yes	Yes
Dimensions		
Width	38 mm	38 mm
Height	62 mm	62 mm
Depth	21 mm	21 mm
Weights		
Weight, approx.	35 g	35 g

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SM 1222 digital output modules

Overview



- Digital outputs as supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the relevant task
- For subsequent expansion of the system with additional outputs

Ordering data

Article No.

SM 1222 digital output signal module	
SIMATIC S7-1200, SM 1222 digital output module 8 DO, 24 V DC, transistor 0.5 A	6ES7222-1BF32-0XB0
SIMATIC S7-1200, SM 1222 digital output module 16 DO, 24 V DC, transistor 0.5 A	6ES7222-1BH32-0XB0
SIMATIC S7-1200, SM 1222 digital output module 16 DO, 24 V DC, sinking output, NPN transistor 0.5 A	6ES7222-1BH32-1XB0
SIMATIC S7-1200, SM 1222 digital output module 8 DO, relay 2 A	6ES7222-1HF32-0XB0
SIMATIC S7-1200, SM 1222 digital output module 8 DO, relay changeover contact	6ES7222-1XF32-0XB0
SIMATIC S7-1200, SM 1222 digital output module 16 DO, relay 2 A	6ES7222-1HH32-0XB0
SIMATIC S7-1200, extension cable 2-tier configuration For SM 12XX, 2.0 m	6ES7290-6AA30-0XA0
Terminal block (spare part)	
For 6ES7222-1BF32-0XB0, 6ES7222-1BH32-0XB0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Digital signal module 8CH/16CH (4 units with 7 screws each)	6ES7292-1AG30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for digital signal modules 8CH/16CH (4 units with 7 pins each)	6ES7292-2AG30-0XA0
For 6ES7222-1HF32-0XB0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded left, for digital signal modules 8CH/16CH, (4 units with 7 screws each)	6ES7292-1AG40-0XA1
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Push-in technology, encoded left, for digital signal modules 8CH/16CH, (4 units with 7 pins each)	6ES7292-2AG40-0XA1
For 6ES7222-1HH32-0XB0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded, for digital signal modules 8CH/16CH, (4 units with 7 screws each)	6ES7292-1AG40-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded, for digital signal modules 8CH/16CH, (4 units with 7 pins each)	6ES7292-2AG40-0XA0
For 6ES7222-1XF32-0XB0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, digital signal module 32CH (4 units with 11 screws each)	6ES7292-1AL40-0XA0

Ordering data	Article No.	Article No.	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, for digital signal modules 32CH (4 units with 11 pins each)	6ES7292-2AL40-0XA0	Front flap set (spare part)	
		SIMATIC S7-1200, spare part front flaps signal module 45 mm (signal module 45 mm wide front flap top & bottom) 6 units each	6ES7291-1BA30-0XA0
		SIMATIC S7-1200, spare part front flaps signal module 70 mm (signal module 70 mm wide front flap top & bottom) 6 units each	6ES7291-1BB30-0XA0

Technical specifications

Article number	6ES7222-1BF32-0XB0	6ES7222-1BH32-0XB0	6ES7222-1BH32-1XB0	6ES7222-1HF32-0XB0	6ES7222-1HH32-0XB0	6ES7222-1XF32-0XB0
	Digital Output SM1222, 8 DO, 24V DC	Digital Output SM1222, 16 DO, 24V DC	Digital Output SM1222, 16DO, 24V DC sink	Digital Output SM 1222, 8 DO, Relay	Digital Output SM1222, 16 DO, Relay	Digital Output SM 1222, 8 DO, Changeover
General information						
Product type designation	SM 1222, DQ 8x24 V DC/0.5 A	SM 1222, DQ 16x24 V DC/0.5 A	SM 1222, DO 16x 24 V DC/0.5 A Sink	SM 1222, DQ 8x relay/2 A	SM 1222, DQ 16x relay/2 A	SM 1222, DQ 8x relay/2 A
Input current						
from backplane bus 5 V DC, max.	120 mA	140 mA	140 mA	120 mA	135 mA	140 mA
Digital outputs						
• from load voltage L+, max.				11 mA/relay coil	11 mA/relay coil	16.7 mA/relay coil
Digital outputs						
Number of digital outputs	8	16	16	8	16	8
• in groups of	1	1	1	2	1	1
Current-sinking			Yes			
Short-circuit protection	No; to be provided externally	No; to be provided externally	No; to be provided externally	No; to be provided externally	No; to be provided externally	No; to be provided externally
Limitation of inductive shutdown voltage to	typ. (L+) -48 V	typ. (L+) -48 V	Typ 45 V			
Switching capacity of the outputs						
• with resistive load, max.	0.5 A	0.5 A	0.5 A	2 A	2 A	2 A
• on lamp load, max.	5 W	5 W	5 W	30 W with DC, 200 W with AC	30 W with DC, 200 W with AC	30 W with DC, 200 W with AC
Output voltage						
• Rated value (DC)	24 V	24 V	24 V	5 V DC to 30 V DC	5 V DC to 30 V DC	5 V DC to 30 V DC
• Rated value (AC)				5 V AC to 250 V AC	5 V AC to 250 V AC	5 V AC to 250 V AC
• for signal "0", max.	0.1 V; with 10 kOhm load	0.1 V; with 10 kOhm load	L+ minus 0.75 V DC with 10k Load			
• for signal "1", min.	20 V DC	20 V DC	0,5 V			
Output current						
• for signal "1" rated value	0.5 A	0.5 A	0.5 A	2 A	2 A	2 A
• for signal "0" residual current, max.	10 µA	10 µA	75 µA			
Output delay with resistive load						
• "0" to "1", max.	50 µs	50 µs	20 µs	10 ms	10 ms	10 ms
• "1" to "0", max.	200 µs	200 µs	350 µs	10 ms	10 ms	10 ms
Total current of the outputs (per group)						
horizontal installation						
- up to 50 °C, max.	4 A; Current per mass	8 A; Current per mass	8 A; Current per mass	10 A; Current per mass	10 A; Current per mass	2 A; Current per mass

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SM 1222 digital output modules

Technical specifications

Article number	6ES7222-1BF32-0XB0	6ES7222-1BH32-0XB0	6ES7222-1BH32-1XB0	6ES7222-1HF32-0XB0	6ES7222-1HH32-0XB0	6ES7222-1XF32-0XB0
	Digital Output SM1222, 8 DO, 24V DC	Digital Output SM1222, 16 DO, 24V DC	Digital Output SM1222, 16DO, 24V DC sink	Digital Output SM 1222, 8 DO, Relay	Digital Output SM1222, 16 DO, Relay	Digital Output SM 1222, 8 DO, Changeover
Relay outputs						
<ul style="list-style-type: none"> Number of relay outputs Rated supply voltage of relay coil L+ (DC) Number of operating cycles, max. 				8 24 V	16 24 V	8 24 V
				mechanically 10 million, at rated load voltage 100 000	mechanically 10 million, at rated load voltage 100 000	mechanically 10 million, at rated load voltage 100 000
Switching capacity of contacts						
<ul style="list-style-type: none"> with inductive load, max. on lamp load, max. with resistive load, max. 				2 A 30 W with DC, 200 W with AC 2 A	2 A 30 W with DC, 200 W with AC 2 A	2 A 30 W with DC, 200 W with AC 2 A
Interrupts/diagnostics/status information						
Alarms						
<ul style="list-style-type: none"> Diagnostic alarm 	Yes	Yes	Yes	Yes	Yes	Yes
Diagnostics indication LED						
<ul style="list-style-type: none"> for status of the outputs 	Yes	Yes	Yes	Yes	Yes	Yes
Potential separation						
Potential separation digital outputs						
<ul style="list-style-type: none"> between the channels between the channels, in groups of between the channels and backplane bus 	1 500 V AC	1 500 V AC	1 500 V AC	Relays 2 1 500 V AC for 1 minute	Relays 4 1 500 V AC for 1 minute	Relays 1 1 500 V AC for 1 minute
Degree and class of protection						
IP degree of protection	IP20	IP20	IP20	IP20	IP20	IP20
Standards, approvals, certificates						
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
CSA approval	Yes	Yes	Yes	Yes	Yes	Yes
UL approval	Yes	Yes	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes	Yes	Yes
FM approval	Yes	Yes	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes	Yes
KC approval	Yes	Yes	Yes	Yes	Yes	Yes
Marine approval	Yes	Yes	Yes	Yes	Yes	Yes
Ambient conditions						
Ambient temperature during operation						
<ul style="list-style-type: none"> min. max. 	-20 °C 60 °C	-20 °C 60 °C	-20 °C 60 °C	-20 °C 60 °C	-20 °C 60 °C; Number of simultaneously activated outputs: 8 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 16 at 55 °C horizontal or 45 °C vertical	-20 °C 60 °C; Number of simultaneously activated outputs: 4 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 at 55 °C horizontal or 45 °C vertical
connection method						
required front connector	Yes	Yes	Yes	Yes	Yes	Yes
Mechanics/material						
Enclosure material (front)						
<ul style="list-style-type: none"> Plastic 	Yes	Yes	Yes	Yes	Yes	Yes
Dimensions						
Width	45 mm	45 mm	45 mm	45 mm	45 mm	70 mm
Height	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Depth	75 mm	75 mm	75 mm	75 mm	75 mm	75 mm
Weights						
Weight, approx.	180 g	220 g	220 g	190 g	260 g	310 g

Overview



- Digital outputs as a supplement to the integral I/O of SIMATIC S7-1200 CPUs
- Can be plugged directly into the CPU

Ordering data

Article No.

SB 1222 digital output signal board**SIMATIC S7-1200, SB 1222 digital output module**

4 DQ, 5 V DC 200 kHz

SIMATIC S7-1200, SB 1222 digital output module

4 DQ, 24 V DC 200 kHz

Terminal block (spare part)**SIMATIC S7-1200, spare part gold-plated I/O terminal block**Signal board
(4 units with 6 screws each)

6ES7222-1AD30-0XB0

6ES7222-1BD30-0XB0

6ES7292-1BF30-0XA0

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SB 1222 digital output modules

Technical specifications

Article number	6ES7222-1AD30-0XB0 Signal Board SB1222, 4 DQ 5VDC 200KHz	6ES7222-1BD30-0XB0 Signal Board SB1222, 4 DQ 24VDC 200KHz
General information		
Product type designation	SB 1222, DQ 4x5 V DC 200 kHz	SB 1222, DQ 4x24 V DC 200 kHz
Input current		
from backplane bus 5 V DC, typ.	35 mA	35 mA
Digital outputs		
Number of digital outputs	4; MOSFET, solid-state (current-sinking/current-sourcing)	4; MOSFET, solid-state (current-sinking/current-sourcing)
• in groups of	4	4
Short-circuit protection	No	No
Switching capacity of the outputs		
• with resistive load, max.	0.1 A	0.1 A
Load resistance range		
• upper limit	7 Ω	11 Ω
Output voltage		
• Rated value (DC)	5 V	24 V
• for signal "0", max.	0.2 V	1 V; with 10 kOhm load
• for signal "1", min.	L+ minus 0.7 V DC	L+ (-1.5 V)
• for signal "1", max.	6 V	
Output current		
• for signal "1" permissible range, max.	0.1 A	0.1 A
Interrupts/diagnostics/status information		
Diagnostics indication LED		
• for status of the outputs	Yes	Yes
Standards, approvals, certificates		
CE mark	Yes	Yes
CSA approval	Yes	Yes
UL approval	Yes	Yes
cULus	Yes	Yes
FM approval	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes
KC approval	Yes	Yes
Marine approval	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C	-20 °C
• max.	60 °C	60 °C
Mechanics/material		
Enclosure material (front)		
• Plastic	Yes	Yes
Dimensions		
Width	38 mm	38 mm
Height	62 mm	62 mm
Depth	21 mm	21 mm
Weights		
Weight, approx.	35 g	35 g

Overview



- Digital inputs and outputs as supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the relevant task
- For subsequent expansion of the system with additional inputs and outputs

Ordering data

Article No.

SM 1223 digital input/output signal module	
SIMATIC S7-1200, SM 1223 digital input/output module 8 DI/8 DO, 8 DI 24 V DC, sink/source, 8 DO, transistor 0.5 A	6ES7223-1BH32-0XB0
SIMATIC S7-1200, SM 1223 digital input/output module 16 DI/16 DO, 16 DI 24 V DC, sink/source, 16 DO, transistor 0.5 A	6ES7223-1BL32-0XB0
SIMATIC S7-1200, SM 1223 digital input/output module 16 DI/16 DO, 16 DI 24 V DC, sourcing/sinking input, 16 DO, sinking output, NPN transistor 0.5 A	6ES7223-1BL32-1XB0
SIMATIC S7-1200, SM 1223 digital input/output module 8 DI/8 DO, 8 DI 24 V DC, sink/source, 8 DO, relay 2 A	6ES7223-1PH32-0XB0
SIMATIC S7-1200, SM 1223 digital input/output module 16 DI/16 DO, 16 DI 24 V DC, sink/source, 16 DO, relay 2 A	6ES7223-1PL32-0XB0
SIMATIC S7-1200, SM 1223 digital input/output module 8 DI AC/8 DO RLY, 8 DI 120/230 V AC, 8 DO relay 2 A	6ES7223-1QH32-0XB0
SIMATIC S7-1200, extension cable 2-tier configuration For SM 12XX, 2.0 m	6ES7290-6AA30-0XA0
Terminal block (spare part)	
For 6ES7223-1BH32-0XB0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Digital signal module 8CH/16CH (4 units with 7 screws each)	6ES7292-1AG30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for digital signal modules 8CH/16CH (4 units with 7 pins each)	6ES7292-2AG30-0XA0
For 6ES7223-1BL32-0XB0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Digital signal module 32CH (4 units with 11 screws each)	6ES7292-1AL30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for digital signal modules 32CH (4 units with 11 pins each)	6ES7292-2AL30-0XA0
For 6ES7223-1PH32-0XB0	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Digital signal module 8CH/16CH (4 units with 7 screws each)	6ES7292-1AG30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for digital signal modules 8CH/16CH (4 units with 7 pins each)	6ES7292-2AG30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded, for digital signal modules 8CH/16CH, (4 units with 7 screws each)	6ES7292-1AG40-0XA0

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SM 1223 digital input/output modules

Ordering data	Article No.	Article No.
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded, for digital signal modules 8CH/16CH, (4 units with 7 pins each) For 6ES7223-1PL32-0XB0	6ES7292-2AG40-0XA0	For 6ES7223-1QH32-0XB0 SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded, for digital signal modules 8CH/16CH, (4 units with 7 screws each)
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Digital signal module 32CH (4 units with 11 screws each)	6ES7292-1AL30-0XA0	SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded, for digital signal modules 8CH/16CH, (4 units with 7 pins each)
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for digital signal modules 32CH (4 units with 11 pins each)	6ES7292-2AL30-0XA0	Front flap set (spare part)
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, digital signal module 32CH (4 units with 11 screws each)	6ES7292-1AL40-0XA0	SIMATIC S7-1200, spare part front flaps signal module 45 mm (signal module 45 mm wide front flap top & bottom) 6 units each
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, encoded right, for digital signal modules 32CH (4 units with 11 pins each)	6ES7292-2AL40-0XA0	SIMATIC S7-1200, spare part front flaps signal module 70 mm (signal module 70 mm wide front flap top & bottom) 6 units each

Technical specifications

Article number	6ES7223-1BH32-0XB0	6ES7223-1BL32-0XB0	6ES7223-1BL32-1XB0	6ES7223-1PH32-0XB0	6ES7223-1PL32-0XB0	6ES7223-1QH32-0XB0
	Digital I/O SM 1223, 8 DI / 8 DO	Digital I/O SM 1223, 16DI/16DO	Digital I/O SM 1223, 16DI/16DO sink	Digital I/O SM 1223, 8DI/8DO	Digital I/O SM 1223, 16DI/16DO	Digital I/O SM 1223, 8DI AC/8DO Rly
General information						
Product type designation	SM 1223, DI 8x24 V DC, DQ 8x24 V DC	SM 1223, DI 16x24 V DC, DQ 16x24 V DC	SM 1223, DI 16x24 V DC, DO 16x 24 V DC Sink	SM 1223, DI 8x24 V DC, DQ 8x relay	SM 1223, DI 16x24 V DC, DQ 16x relay	SM 1223, DI 8x120/230 V AC, DQ 8x relay
Supply voltage						
Rated value (DC)	24 V	24 V	24 V	24 V	24 V	24 V
Input current						
from backplane bus 5 V DC, max.	145 mA	185 mA	185 mA	145 mA	180 mA	120 mA
Digital inputs						
• from load voltage L+ (without load), max.	4 mA; per channel	4 mA; per channel	4 mA; per channel	4 mA/input 11 mA/relay	4 mA/input 11 mA/relay	
output voltage / header						
supply voltage of the transmitters / header						
• present	Yes	Yes	Yes	Yes	Yes	Yes
Digital inputs						
Number of digital inputs	8	16	16	8	16	8
• in groups of	2	2	2	2	2	4
Input characteristic curve in accordance with IEC 61131, type 1	Yes	Yes	Yes	Yes	Yes	Yes
Number of simultaneously controllable inputs						
all mounting positions						
- up to 40 °C, max.	8	16	16	8	16	8
horizontal installation						
- up to 40 °C, max.	8	16	16	8	16	8
- up to 50 °C, max.	8	16	16	8	16	8
vertical installation						
- up to 40 °C, max.	8	16	16	8	16	8

Technical specifications

Article number	6ES7223-1BH32-0XB0	6ES7223-1BL32-0XB0	6ES7223-1BL32-1XB0	6ES7223-1PH32-0XB0	6ES7223-1PL32-0XB0	6ES7223-1QH32-0XB0
	Digital I/O SM 1223, 8 DI / 8 DO	Digital I/O SM 1223, 16DI/16DO	Digital I/O SM 1223, 16DI/16DO sink	Digital I/O SM 1223, 8DI/8DO	Digital I/O SM 1223, 16DI/16DO	Digital I/O SM 1223, 8DI AC/8DO Rly
Input voltage						
• Type of input voltage	DC	DC	DC	DC	DC	AC
• Rated value (DC)	24 V	24 V	24 V	24 V	24 V	
• Rated value (AC)						120/230 V AC
• for signal "0"	5 V DC at 1 mA	5 V DC at 1 mA	5 V DC at 1 mA	5 V DC at 1 mA	5 V DC at 1 mA	20 V AC at 1 mA
• for signal "1"	15 V DC at 2.5 mA	15 V DC at 2.5 mA	15 V DC at 2.5 mA	15 V DC at 2.5 mA	15 V DC at 2.5 mA	79 V AC at 2.5 mA
Input current						
• for signal "0", max. (permissible quiescent current)	1 mA	1 mA	1 mA	1 mA	1 mA	1 mA
• for signal "1", min.	2.5 mA	2.5 mA	2.5 mA	2.5 mA	2.5 mA	2.5 mA
• for signal "1", typ.	4 mA	4 mA	4 mA	4 mA	4 mA	9 mA
Input delay (for rated value of input voltage)						
for standard inputs						
- parameterizable	Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four	Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four	Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four	Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four	Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four	Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four
for interrupt inputs						
- parameterizable	Yes	Yes	Yes	Yes	Yes	Yes
Digital outputs						
Number of digital outputs	8	16	16; Transistor current sinking	8	16	8
• in groups of	1	1	1	2	4	4
Short-circuit protection	No; to be provided externally	No; to be provided externally	Yes; 1 to 3.5 A	No; to be provided externally	No; to be provided externally	No; to be provided externally
Limitation of inductive shutdown voltage to	L+ (-48 V)	L+ (-48 V)	Typ 45 V			
Switching capacity of the outputs						
• with resistive load, max.	0.5 A	0.5 A	0.5 A	2 A	2 A	2 A
• on lamp load, max.	5 W	5 W	5 W	30 W with DC, 200 W with AC	30 W with DC, 200 W with AC	30 W with DC, 200 W with AC
Output voltage						
• Rated value (DC)	24 V	24 V	24 V	5 V DC to 30 V DC	5 V DC to 30 V DC	5 V DC to 30 V DC
• Rated value (AC)				5 V AC to 250 V AC	5 V AC to 250 V AC	5 V AC to 250 V AC
• for signal "0", max.	0.1 V; with 10 kOhm load	0.1 V; with 10 kOhm load	L+ minus 0.75 V DC with 10k Load			
• for signal "1", min.	20 V DC	20 V DC	0.5 V			
Output current						
• for signal "1" rated value	0.5 A	0.5 A	0.5 A	2 A	2 A	2 A
• for signal "0" residual current, max.	10 µA	10 µA	75 µA			
Output delay with resistive load						
• "0" to "1", max.	50 µs	50 µs	20 µs	10 ms	10 ms	10 ms
• "1" to "0", max.	200 µs	200 µs	350 µs	10 ms	10 ms	10 ms
Total current of the outputs (per group)						
horizontal installation						
- up to 50 °C, max.	4 A; Current per mass	8 A; Current per mass	8 A; Current per mass	10 A; Current per mass	8 A; Current per mass	8 A; Current per mass
Relay outputs						
• Number of relay outputs				8	16	8
• Rated supply voltage of relay coil L+ (DC)				24 V	24 V	24 V
• Number of operating cycles, max.				mechanically 10 million, at rated load voltage 100 000	mechanically 10 million, at rated load voltage 100 000	mechanically 10 million, at rated load voltage 100 000

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SM 1223 digital input/output modules

Technical specifications

Article number	6ES7223-1BH32-0XB0	6ES7223-1BL32-0XB0	6ES7223-1BL32-1XB0	6ES7223-1PH32-0XB0	6ES7223-1PL32-0XB0	6ES7223-1QH32-0XB0
Digital I/O SM 1223, 8 DI / 8 DO	Digital I/O SM 1223, 16DI/16DO	Digital I/O SM 1223, 16DI/16DO	Digital I/O SM 1223, 16DI/16DO sink	Digital I/O SM 1223, 8DI/8DO	Digital I/O SM 1223, 16DI/16DO	Digital I/O SM 1223, 8DI AC/8DO Rly
Switching capacity of contacts						
- with inductive load, max.	0.5 A	0.5 A	0.5 A	2 A	2 A	2 A
- on lamp load, max.	5 W	5 W	5 W	30 W with DC, 200 W with AC	30 W with DC, 200 W with AC	30 W with DC, 200 W with AC
- with resistive load, max.	0.5 A	0.5 A	0.5 A	2 A	2 A	2 A
Interrupts/diagnostics/status information						
Alarms						
• Diagnostic alarm	Yes	Yes	Yes	Yes	Yes	Yes
Diagnostics indication LED						
• for status of the inputs	Yes	Yes	Yes	Yes	Yes	Yes
• for status of the outputs	Yes	Yes	Yes	Yes	Yes	Yes
Potential separation						
Potential separation digital inputs						
• between the channels, in groups of	2	2	2	2	2	2
Potential separation digital outputs						
• between the channels				Relays	Relays	Relays
• between the channels, in groups of	1	1	1	2	4	2
• between the channels and backplane bus	500 V AC	500 V AC	500 V AC	1 500 V AC for 1 minute	1 500 V AC for 1 minute	1 500 V AC for 1 minute
Degree and class of protection						
IP degree of protection	IP20	IP20	IP20	IP20	IP20	IP20
Standards, approvals, certificates						
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
CSA approval	Yes	Yes	Yes	Yes	Yes	Yes
UL approval	Yes	Yes	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes	Yes	Yes
FM approval	Yes	Yes	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes	Yes
KC approval	Yes	Yes	Yes	Yes	Yes	Yes
Marine approval	Yes	Yes	Yes	Yes	Yes	Yes
Ambient conditions						
Ambient temperature during operation						
• min.	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C
• max.	60 °C	60 °C	60 °C	60 °C	60 °C; Number of simultaneously activated outputs: 8 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 16 at 55 °C horizontal or 45 °C vertical	60 °C; Number of simultaneously activated outputs: 4 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 8 at 55 °C horizontal or 45 °C vertical
connection method						
required front connector	Yes	Yes	Yes	Yes	Yes	Yes
Mechanics/material						
Enclosure material (front)						
• Plastic	Yes	Yes	Yes	Yes	Yes	Yes
Dimensions						
Width	45 mm	70 mm	70 mm	45 mm	70 mm	45 mm
Height	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Depth	75 mm	75 mm	75 mm	75 mm	75 mm	75 mm
Weights						
Weight, approx.	210 g	310 g	310 g	230 g	350 g	230 g

Overview



- Digital inputs and outputs as supplement to the integral I/O of the SIMATIC S7-1200 CPUs
- Can be plugged direct into the CPU

Ordering data

Article No.

SB 1223 digital input/output signal board	
SIMATIC S7-1200, SB 1223 digital input/output module 2 DI/2 DO, 2 DI 24 V DC/ 2 DO 24 V DC	6ES7223-0BD30-0XB0
SIMATIC S7-1200, SB 1223 digital input/output module 2 DI/2 DQ, 5 V DC 200 kHz	6ES7223-3AD30-0XB0
SIMATIC S7-1200, SB 1223 digital input/output module 2 DI/2 DQ, 24 V DC 200 kHz	6ES7223-3BD30-0XB0
Terminal block (spare part)	
SIMATIC S7-1200, spare part gold-plated I/O terminal block Signal board (4 units with 6 screws each)	6ES7292-1BF30-0XA0

Technical specifications

Article number	6ES7223-0BD30-0XB0	6ES7223-3AD30-0XB0	6ES7223-3BD30-0XB0
	Signal Board SB1223, 2 DI/2 DO	Signal Board SB 1223, 2DI/2DQ 5V 200KHz	Signal Board SB 1223, 2DI/2DQ 24V 200KHz
General information			
Product type designation	SB 1223, DI 2x24 V DC/DQ 2x24 V DC	SB 1223, DI 2x5 V DC/ DQ 2x5 V DC 200 kHz	SB 1223, DI 2x24 V DC/ DQ 2x24 V DC 200 kHz
Input current			
from backplane bus 5 V DC, typ.	50 mA	35 mA	35 mA
output voltage / header			
supply voltage of the transmitters / header			
• Supply current, max.	4 mA; per channel		
Digital inputs			
Number of digital inputs	2; Current-sinking	2; Current-sourcing	2; Current-sourcing
• in groups of	1	2	2
Input characteristic curve in accordance with IEC 61131, type 1	Yes		
Number of simultaneously controllable inputs all mounting positions			
- up to 40 °C, max.	2		2
Input voltage			
• Type of input voltage	DC	DC	DC
• Rated value (DC)	24 V	5 V	24 V
• for signal "0"	0 to 5 V	(L+ minus 1.0 V DC) ... L+	(L+ minus 5.0 V DC) ... L+
• for signal "1"	+15 to +30 V	0 V ... (L+ minus 2.0 V DC)	0 V ... (L+ minus 10 V DC)
Input current			
• for signal "0", max. (permissible quiescent current)	1 mA	2.2 mA	1.4 mA
• for signal "1", min.		5.1 mA	2.9 mA
• for signal "1", typ.	7 mA	15 mA	7 mA
Input delay (for rated value of input voltage)			
for standard inputs			
- parameterizable	Yes; 0.2 ms, 0.4 ms, 0.8 ms, 1.6 ms, 3.2 ms, 6.4 ms and 12.8 ms, selectable in groups of four	Yes; 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 μs; 0.05 / 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 ms	Yes; 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 μs; 0.05 / 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 ms
for interrupt inputs			
- parameterizable	Yes	Yes	Yes
for technological functions			
- parameterizable	Yes	Yes	Yes

SIMATIC S7-1200 Basic Controllers

I/O modules

Digital modules

SB 1223 digital input/output modules

Technical specifications

Article number	6ES7223-0BD30-0XB0 Signal Board SB1223, 2 DI/2 DO	6ES7223-3AD30-0XB0 Signal Board SB 1223, 2DI/2DQ 5V 200KHz	6ES7223-3BD30-0XB0 Signal Board SB 1223, 2DI/2DQ 24V 200KHz
Digital outputs			
Number of digital outputs	2; MOSFET, solid-state (current-sinking/current-sourcing)	2; MOSFET, solid-state (current-sinking/current-sourcing)	2; MOSFET, solid-state (current-sinking/current-sourcing)
• in groups of	1	2	2
Short-circuit protection	No	No	No
Switching capacity of the outputs			
• with resistive load, max.	0.5 A	0.1 A	0.1 A
• on lamp load, max.	5 W		
Load resistance range			
• upper limit	0.6 Ω	7 Ω	
Output voltage			
• Rated value (DC)	24 V	5 V	24 V
• for signal "0", max.	0.1 V; with 10 kOhm load	0.2 V	1 V
• for signal "1", min.	20 V	L+ minus 0.7 V DC	L+ (-1.5 V)
• for signal "1", max.		6 V	
Output current			
• for signal "1" permissible range, max.	0.5 A	0.1 A	0.1 A
• for signal "0" residual current, max.	10 μA		
Interrupts/diagnostics/status information			
Alarms	Yes		
Diagnostics function	Yes		
Diagnostics indication LED			
• for status of the inputs	Yes	Yes	Yes
• for status of the outputs	Yes	Yes	Yes
Standards, approvals, certificates			
CE mark	Yes	Yes	Yes
CSA approval	Yes	Yes	Yes
UL approval	Yes	Yes	Yes
cULus	Yes	Yes	Yes
FM approval	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	Yes	Yes	Yes
Marine approval	Yes	Yes	Yes
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C	-20 °C	-20 °C
• max.	60 °C	60 °C	60 °C
Mechanics/material			
Enclosure material (front)			
• Plastic	Yes	Yes	Yes
Dimensions			
Width	38 mm	38 mm	38 mm
Height	62 mm	62 mm	62 mm
Depth	21 mm	21 mm	21 mm
Weights			
Weight, approx.	40 g	35 g	35 g

Overview



- Digital inputs as supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional inputs
- From +60 °C to +70 °C, max. 50% of the inputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SM 1221 digital input signal module

(Extended temperature range and exposure to environmental substances)

8 inputs, 24 V DC, isolated, sinking/sourcing output

- For areas with exceptional exposure to environmental substances (conformal coating)
- -25 ... +70 °C, from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50 %

16 inputs, 24 V DC, isolated, sinking/sourcing output

- For areas with exceptional exposure to environmental substances (conformal coating)
- -25 ... +70 °C, from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50%

Accessories**6AG1221-1BF32-4XB0****6AG1221-1BF32-2XB0****6AG1221-1BH32-4XB0****6AG1221-1BH32-2XB0**

See SIMATIC S7-1200 SM 1221 digital input modules, page 3/58

Technical specifications

Article number	6AG1221-1BF32-2XB0	6AG1221-1BF32-4XB0	6AG1221-1BH32-2XB0	6AG1221-1BH32-4XB0
Based on	6ES7221-1BF32-0XB0 SIPLUS S7-1200 SM 1221 8DI	6ES7221-1BF32-0XB0 SIPLUS S7-1200 SM 1221 8DI	6ES7221-1BH32-0XB0 SIPLUS S7-1200 SM 1221 16DI	6ES7221-1BH32-0XB0 SIPLUS S7-1200 SM 1221 16DI
Ambient conditions				
Ambient temperature during operation				
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C
• max.	70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated inputs 4 (no adjacent points) for horizontal mounting position	60 °C; = Tmax	70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated inputs 8 (no adjacent points) for horizontal mounting position	60 °C; = Tmax
• At cold restart, min.	-25 °C	0 °C	-25 °C	0 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1221 digital input modules

Technical specifications

Article number	6AG1221-1BF32-2XB0	6AG1221-1BF32-4XB0	6AG1221-1BH32-2XB0	6AG1221-1BH32-4XB0
Based on	6ES7221-1BF32-0XB0 SIPLUS S7-1200 SM 1221 8DI	6ES7221-1BF32-0XB0 SIPLUS S7-1200 SM 1221 8DI	6ES7221-1BH32-0XB0 SIPLUS S7-1200 SM 1221 16DI	6ES7221-1BH32-0XB0 SIPLUS S7-1200 SM 1221 16DI
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes	Yes	Yes	Yes
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview



- Digital inputs as a supplement to the integral I/O of SIMATIC S7-1200 CPUs
- Can be plugged directly into the CPU

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SB 1221 digital input signal board

(Extended temperature range and exposure to environmental substances)

4 inputs, 5 V DC, 200 kHz, sourcing

4 inputs, 24 V DC, 200 kHz, sourcing

Accessories**6AG1221-3AD30-5XB0****6AG1221-3BD30-5XB0**

See SIMATIC S7-1200 SB 1221 digital input modules, page 3/60

Technical specifications

Article number	6AG1221-3AD30-5XB0	6AG1221-3BD30-5XB0
Based on	6ES7221-3AD30-0XB0 SIPLUS S7-1200 SB 1221 4DI 5VDC	6ES7221-3BD30-0XB0 SIPLUS S7-1200 SB 1221 4DI 24VDC
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; = Tmax	60 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance		
Coolants and lubricants		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SB 1221 digital input modules**Technical specifications**

Article number	6AG1221-3AD30-5XB0	6AG1221-3BD30-5XB0
Based on	6ES7221-3AD30-0XB0 SIPLUS S7-1200 SB 1221 4DI 5VDC	6ES7221-3BD30-0XB0 SIPLUS S7-1200 SB 1221 4DI 24VDC
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview



- Digital outputs as a supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional outputs
- From +60 °C to +70 °C, max. 50% of the inputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SM 1222 digital output signal module

(Extended temperature range and exposure to environmental substances)

8 outputs, 24 V DC; 0.5 A, 5 W, isolated

- For areas with exceptional exposure to environmental substances (conformal coating)
- -25 ... +70 °C, from +60 ... +70°C number of simultaneously controllable inputs and outputs max. 50%

6AG1222-1BF32-4XB0**6AG1222-1BF32-2XB0**

16 outputs, 24 V DC; 0.5 A, 5 W, isolated

- For areas with exceptional exposure to environmental substances (conformal coating)
- -25 ... +70 °C, from +60 ... +70°C number of simultaneously controllable inputs and outputs max. 50%

6AG1222-1BH32-4XB0**6AG1222-1BH32-2XB0**

8 outputs, 5 ... 30 V DC / 5 ... 250 V AC, relay 2 A, 30 W DC/200 W AC

- For areas with exceptional exposure to environmental substances (conformal coating)
- -25 ... +70 °C, from +60 ... +70°C number of simultaneously controllable inputs and outputs max. 50%

6AG1222-1HF32-4XB0**6AG1222-1HF32-2XB0**

8 relay outputs, changeover contact, 5 ... 30 V DC / 5 ... 250 V AC, 2 A, 30 W DC / 200 W AC

- For areas with exceptional exposure to environmental substances (conformal coating)
- -40 ... +70 °C, from +60 ... +70°C number of simultaneously controllable inputs and outputs max. 50%

6AG1222-1XF32-4XB0**6AG1222-1XF32-2XB0**

16 outputs, 5 ... 30 V DC / 5 ... 250 V AC, relay 2 A, 30 W DC/200 W AC

- For areas with exceptional exposure to environmental substances (conformal coating)
- -25 ... +70 °C, from +60 ... +70°C number of simultaneously controllable inputs and outputs max. 50%

6AG1222-1HH32-4XB0**6AG1222-1HH32-2XB0****Accessories**

See SIMATIC S7-1200 SM 1222 digital output modules, page 3/62

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1222 digital output modules

Technical specifications

Article number	6AG1222-1BF32-2XB0	6AG1222-1BF32-4XB0	6AG1222-1BH32-2XB0	6AG1222-1BH32-4XB0
Based on	6ES7222-1BF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ	6ES7222-1BF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ	6ES7222-1BH32-0XB0 SIPLUS S7-1200 SM 1222 16DQ	6ES7222-1BH32-0XB0 SIPLUS S7-1200 SM 1222 16DQ
Ambient conditions				
Ambient temperature during operation				
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C
• max.	70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4 (no adjacent points) for horizontal mounting position	60 °C; = Tmax	70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 8 (no adjacent points) for horizontal mounting position	60 °C; = Tmax
• At cold restart, min.	-25 °C	0 °C	-25 °C	0 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

Technical specifications

Article number	6AG1222-1BF32-2XB0	6AG1222-1BF32-4XB0	6AG1222-1BH32-2XB0	6AG1222-1BH32-4XB0
Based on	6ES7222-1BF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ	6ES7222-1BF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ	6ES7222-1BH32-0XB0 SIPLUS S7-1200 SM 1222 16DQ	6ES7222-1BH32-0XB0 SIPLUS S7-1200 SM 1222 16DQ
Usage in industrial process technology	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1222-1HF32-2XB0	6AG1222-1HF32-4XB0	6AG1222-1XF32-2XB0	6AG1222-1XF32-4XB0
Based on	6ES7222-1HF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY	6ES7222-1HF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY	6ES7222-1XF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY	6ES7222-1XF32-0XB0 SIPLUS S7-1200 SM 1222 8DQ RLY
Ambient conditions				
Ambient temperature during operation				
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C
• max.	70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4 (no adjacent points) for horizontal mounting position	60 °C; = Tmax	70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4 (no adjacent points) for horizontal mounting position	60 °C; = Tmax
• At cold restart, min.	-25 °C	0 °C	-25 °C	0 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1222 digital output modules

Technical specifications

Article number	6AG1222-1HF32-2XB0	6AG1222-1HF32-4XB0	6AG1222-1XF32-2XB0	6AG1222-1XF32-4XB0
Based on	6ES7222-1HF32-0XB0	6ES7222-1HF32-0XB0	6ES7222-1XF32-0XB0	6ES7222-1XF32-0XB0
	SIPLUS S7-1200 SM 1222 8DQ RLY	SIPLUS S7-1200 SM 1222 8DQ RLY	SIPLUS S7-1200 SM 1222 8DQ RLY	SIPLUS S7-1200 SM 1222 8DQ RLY
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Technical specifications

Article number	6AG1222-1HH32-2XB0	6AG1222-1HH32-4XB0
Based on	6ES7222-1HH32-0XB0	6ES7222-1HH32-0XB0
	SIPLUS S7-1200 SM 1222 16DQ RLY	SIPLUS S7-1200 SM 1222 16DQ RLY
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> min. max. At cold restart, min. 	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 8 (no adjacent points) for horizontal mounting position -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C 60 °C; = Tmax 0 °C
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC
Relative humidity		
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Coolants and lubricants		
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SB 1222 digital output modules

Overview



- Digital outputs as a supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the respective task
- For subsequent expansion of the system with additional outputs
- Can be plugged directly into the CPU
- From +60 °C to +70 °C, max. 50% of the inputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

SIPLUS SB 1222 digital output signal board

(Extended temperature range and exposure to environmental substances)

4 outputs, 5 V DC, 0.1 A, 200 kHz

4 outputs, 24 V DC, 0.1 A, 200 kHz

Accessories

Article No.

6AG1222-1AD30-5XB0

6AG1222-1BD30-5XB0

See SIMATIC S7-1200 SB 1222 digital output modules, page 3/65

Technical specifications

Article number	6AG1222-1AD30-5XB0	6AG1222-1BD30-5XB0
Based on	6ES7222-1AD30-0XB0 SIPLUS S7-1200 SB 1222 4DQ 5VDC	6ES7222-1BD30-0XB0 SIPLUS S7-1200 SB 1222 4DQ 24VDC
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; = Tmax	60 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance		
Coolants and lubricants		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1223 digital input/output modules**Overview**

- Digital inputs and outputs as supplement to the integral I/O of the CPUs
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional inputs and outputs
- From +60 °C to +70 °C, max. 50% of the inputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS SM 1223 digital input/output signal module**

(Extended temperature range and exposure to environmental substances)

8 inputs, 24 V DC,
IEC type 1 sinking input;
8 x 24 V DC transistor outputs,
0.5 A, 5 W

- For areas with exceptional exposure to environmental substances (conformal coating)

6AG1223-1BH32-4XB0

- -25 ... +70 °C,
from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50%

6AG1223-1BH32-2XB0

16 inputs, 24 V DC,
IEC type 1 sinking input;
16 x 24 V DC transistor outputs,
0.5 A, 5 W

- For areas with exceptional exposure to environmental substances (conformal coating)

6AG1223-1BL32-4XB0

- -25 ... +70 °C,
from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50%

6AG1223-1BL32-2XB0

8 inputs, 24 V DC,
IEC type 1 sinking input;
8 relay outputs,
5 ... 30 V DC / 5 ... 250 V AC, 2 A,
30 W DC / 200 W AC

- For areas with exceptional exposure to environmental substances (conformal coating)

6AG1223-1PH32-4XB0

- -25 ... +70 °C,
from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50%

6AG1223-1PH32-2XB0

16 inputs, 24 V DC,
IEC type 1 sinking input;
16 relay outputs,
5 ... 30 V DC / 5 ... 250 V AC, 2 A,
30 W DC / 200 W AC

- For areas with exceptional exposure to environmental substances (conformal coating)

6AG1223-1PL32-4XB0

- -25 ... +70 °C,
from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50%

6AG1223-1PL32-2XB0

8 inputs, 120/230 V AC;
8 relay outputs,
5 ... 30 V DC/5 ... 250 V AC, 2 A,
30 W DC/200 W AC

- For areas with exceptional exposure to environmental substances (conformal coating)

6AG1223-1QH32-4XB0

- -40 ... +70 °C, from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50%

6AG1223-1QH32-2XB0**Accessories**

See SIMATIC S7-1200 SM 1223 digital input/output modules, page 3/67

Technical specifications

Article number	6AG1223-1BH32-2XB0	6AG1223-1BH32-4XB0	6AG1223-1PH32-2XB0	6AG1223-1PH32-4XB0
Based on	6ES7223-1BH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ	6ES7223-1BH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ	6ES7223-1PH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ RLY	6ES7223-1PH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ RLY
Ambient conditions				
Ambient temperature during operation				
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C
• max.	70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4, inputs 4 (no adjacent points) for horizontal mounting position	60 °C; = Tmax	70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4, inputs 4 (no adjacent points) for horizontal mounting position	60 °C; = Tmax
• At cold restart, min.	-25 °C	0 °C	-25 °C	0 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/ frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/ frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/ frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/ frost (no commissioning under condensation conditions)
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes	Yes	Yes	Yes
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1223 digital input/output modules

Technical specifications

Article number	6AG1223-1BH32-2XB0	6AG1223-1BH32-4XB0	6AG1223-1PH32-2XB0	6AG1223-1PH32-4XB0
Based on	6ES7223-1BH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ	6ES7223-1BH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ	6ES7223-1PH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ RLY	6ES7223-1PH32-0XB0 SIPLUS S7-1200 SM 1223 8DI/8DQ RLY
Usage in industrial process technology	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Against chemically active substances acc. to EN 60654-4	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04				
Remark	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04				
Conformal coating	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Protection against fouling acc. to EN 60664-3	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A				
Article number	6AG1223-1PL32-2XB0	6AG1223-1PL32-4XB0	6AG1223-1BL32-2XB0	6AG1223-1BL32-4XB0
Based on	6ES7223-1PL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ RLY	6ES7223-1PL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ RLY	6ES7223-1BL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ	6ES7223-1BL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ
Ambient conditions				
Ambient temperature during operation				
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C
• max.	70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 8, inputs 8 (no adjacent points) for horizontal mounting position	60 °C; = Tmax	70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 8, inputs 8 (no adjacent points) for horizontal mounting position	60 °C; = Tmax
• At cold restart, min.	-25 °C	0 °C	-25 °C	0 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	2 000 m	2 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 132 V AC	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes	Yes	Yes	Yes

Technical specifications

Article number	6AG1223-1PL32-2XB0	6AG1223-1PL32-4XB0	6AG1223-1BL32-2XB0	6AG1223-1BL32-4XB0
Based on	6ES7223-1PL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ RLY	6ES7223-1PL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ RLY	6ES7223-1BL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ	6ES7223-1BL32-0XB0 SIPLUS S7-1200 SM 1223 16DI/16DQ
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 1223 digital input/output modules

Technical specifications

Article number	6AG1223-1QH32-2XB0	6AG1223-1QH32-4XB0
Based on	6ES7223-1QH32-0XB0 SIPLUS S7-1200 SM 1223 8DI AC/8DQ RLY	6ES7223-1QH32-0XB0 SIPLUS S7-1200 SM 1223 8DI AC/8DQ RLY
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> min. max. 	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C 70 °C; = Tmax; Tmax > +60 °C number of simultaneously activated outputs 4, inputs 4 (no adjacent points) for horizontal mounting position	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C 60 °C; = Tmax
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Coolants and lubricants		
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

Overview



- Digital inputs and outputs as supplement to the integral I/O of the SIPLUS S7-1200 CPUs
- Can be plugged directly into the CPU (cannot be used for +70 °C version)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SB 1223 digital input/output signal board

(Extended temperature range and exposure to environmental substances)

2 inputs, 24 V DC,
IEC type 1 sinking input;
2 x 24 V DC transistor outputs,
0.5 A, 5 W;
can be used as HSC at up to 30 kHz

- For areas with exceptional exposure to environmental substances (conformal coating)
- Ambient temperature
-25 ... +55 °C

2 inputs, 5 V DC, 200 kHz
2 outputs 5 V DC, 0.1 A, 200 kHz

2 inputs, 24 V DC, 200 kHz
2 outputs 24 V DC, 0.1 A, 200 kHz

Accessories

6AG1223-0BD30-4XB0

6AG1223-0BD30-5XB0

6AG1223-3AD30-5XB0

6AG1223-3BD30-5XB0

See SIMATIC S7-1200 SB 1223 digital input/output modules, page 3/71

Technical specifications

Article number	6AG1223-0BD30-4XB0	6AG1223-0BD30-5XB0	6AG1223-3AD30-5XB0	6AG1223-3BD30-5XB0
Based on	6ES7223-0BD30-0XB0	6ES7223-0BD30-0XB0	6ES7223-3AD30-0XB0	6ES7223-3BD30-0XB0
	SIPLUS S7-1200 SB 1223 2DI/2DQ 24VDC	SIPLUS S7-1200 SB 1223 2DI/2DQ 24VDC	SIPLUS S7-1200 SB 1223 2DI/2DQ 5VDC	SIPLUS S7-1200 SB 1223 2DI/2DQ, 24VDC
Ambient conditions				
Ambient temperature during operation				
• min.	-20 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; = Tmax	60 °C; = Tmax	60 °C; = Tmax	60 °C; = Tmax
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost permitted (no commissioning in bedewed state)	100 %; RH incl. condensation/ frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/ frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/ frost (no commissioning in bedewed state), horizontal installation

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS digital modules

SIPLUS SB 1223 digital input/output modules

Technical specifications

Article number	6AG1223-0BD30-4XB0	6AG1223-0BD30-5XB0	6AG1223-3AD30-5XB0	6AG1223-3BD30-5XB0
Based on	6ES7223-0BD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ 24VDC	6ES7223-0BD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ 24VDC	6ES7223-3AD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ 5VDC	6ES7223-3BD30-0XB0 SIPLUS S7-1200 SB 1223 2DI/2DQ, 24VDC
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview



- Analog inputs for SIMATIC S7-1200
- Extremely short conversion times
- For the connection of analog sensors without additional amplifiers
- For solving even more complex automation tasks

Ordering data

Article No.

SM 1231 analog input signal module	
SIMATIC S7-1200, analog input, SM 1231 4 AI, +/-10 V, +/-5 V, +/-2.5 V, +/-1.25 or 0-20 mA/4-20 mA, 15-bit+sign bit	6ES7231-5ND32-0XB0
SIMATIC S7-1200, analog input, SM 1231 4 AI, +/-10 V, +/-5 V, +/-2.5 V, or 0-20 mA/4-20 mA, 12-bit+sign (13-bit ADC)	6ES7231-4HD32-0XB0
SIMATIC S7-1200, analog input, SM 1231 8 AI, +/-10 V, +/-5 V, +/-2.5 V, or 0-20 mA/4-20 mA, 12-bit+sign or (13-bit ADC)	6ES7231-4HF32-0XB0
Accessories	
SIMATIC S7-1200, extension cable 2-tier configuration For SM 12XX, 2.0 m	6ES7290-6AA30-0XA0
Terminal block (spare part) For 6ES7231-5ND32-0XB0, 6ES7231-4HD32-0XB0, 6ES7231-4HF32-0XB0	
SIMATIC S7-1200, spare part, gold-plated I/O terminal block 8CH/16CH analog signal module (4 units with 7 screws each)	6ES7292-1BG30-0XA0
SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology for 8CH/16CH analog signal module (4 units with 7 pins each)	6ES7292-2BG30-0XA0
Front flap set (spare part)	
SIMATIC S7-1200, spare part front flaps signal module 45 mm (signal module 45 mm wide front flap top & bottom) 6 units each	6ES7291-1BA30-0XA0

Technical specifications

Article number	6ES7231-4HD32-0XB0 Analog Input SM 1231, 4AI	6ES7231-4HF32-0XB0 Analog Input SM 1231, 8AI	6ES7231-5ND32-0XB0 Analog Input SM 1231, 4AI 16bit
General information			
Product type designation	SM 1231, AI 4x13 bit	SM 1231, AI 8x13 bit	SM 1231, AI 4x16 bit
Supply voltage			
Rated value (DC)	24 V	24 V	24 V
Input current			
Current consumption, typ.	45 mA	60 mA	65 mA
from backplane bus 5 V DC, typ.	80 mA	90 mA	80 mA
Analog inputs			
Number of analog inputs	4; Current or voltage differential inputs	8; Current or voltage differential inputs	4; Current or voltage differential inputs
permissible input voltage for voltage input (destruction limit), max.	35 V	35 V	±35 V
permissible input current for current input (destruction limit), max.	40 mA	40 mA	40 mA
Cycle time (all channels) max.	625 µs	625 µs	100 µs

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1231 analog input modules

Technical specifications

Article number	6ES7231-4HD32-0XB0 Analog Input SM 1231, 4AI	6ES7231-4HF32-0XB0 Analog Input SM 1231, 8AI	6ES7231-5ND32-0XB0 Analog Input SM 1231, 4AI 16bit
Input ranges			
• Voltage	Yes; $\pm 10V$, $\pm 5V$, $\pm 2.5V$	Yes; $\pm 10V$, $\pm 5V$, $\pm 2.5V$	Yes; $\pm 10V$, $\pm 5V$, $\pm 2.5V$ or $\pm 1.25V$
• Current	Yes; 4 to 20 mA, 0 to 20 mA	Yes; 4 to 20 mA, 0 to 20 mA	Yes; 4 to 20 mA, 0 to 20 mA
• Thermocouple	No	No	No
• Resistance thermometer	No	No	No
• Resistance	No	Yes	No
Input ranges (rated values), voltages			
• -1.25 V to +1.25 V			Yes
• -10 V to +10 V	Yes	Yes	Yes
• -2.5 V to +2.5 V	Yes	Yes	Yes
• -5 V to +5 V	Yes	Yes	Yes
Input ranges (rated values), currents			
• 0 to 20 mA	Yes	Yes	Yes
• 4 mA to 20 mA	Yes	Yes	Yes
Thermocouple (TC)			
Temperature compensation - parameterizable		No	
Analog value generation for the inputs			
Integration and conversion time/resolution per channel			
• Resolution with overrange (bit including sign), max.	12 bit; + sign	12 bit; + sign	15 bit; + sign
• Integration time, parameterizable	Yes	Yes	Yes
• Interference voltage suppression for interference frequency f_1 in Hz	40 dB, DC to 60 V for interference frequency 50 / 60 Hz	40 dB, DC to 60 V for interference frequency 50 / 60 Hz	40 dB, DC to 60 V for interference frequency 50 / 60 Hz
Smoothing of measured values			
• parameterizable	Yes	Yes	Yes
Errors/accuracies			
Temperature error (relative to input range), (+/-)	25 °C $\pm 0.1\%$, to 55 °C $\pm 0.2\%$ total measurement range	25 °C $\pm 0.1\%$, to 55 °C $\pm 0.2\%$ total measurement range	25 °C $\pm 0.1\%$ / $\pm 0.3\%$ total measurement range
Basic error limit (operational limit at 25 °C)			
• Voltage, relative to input range, (+/-)	0.1 %	0.1 %	0.1 %
• Current, relative to input range, (+/-)	0.1 %	0.1 %	0.1 %
Interference voltage suppression for $f = n \times (f_1 \pm 1 \%)$, $f_1 =$ interference frequency			
• Common mode voltage, max.	12 V	12 V	12 V
Interrupts/diagnostics/status information			
Alarms	Yes	Yes	Yes
Diagnostics function	Yes	Yes	Yes
Alarms			
• Diagnostic alarm	Yes	Yes	Yes
Diagnoses			
• Monitoring the supply voltage	Yes	Yes	Yes
• Wire-break	Yes	Yes	Yes
Diagnostics indication LED			
• for status of the inputs	Yes	Yes	Yes
• for maintenance	Yes	Yes	Yes
Degree and class of protection			
IP degree of protection	IP20	IP20	IP20

Technical specifications

Article number	6ES7231-4HD32-0XB0	6ES7231-4HF32-0XB0	6ES7231-5ND32-0XB0
	Analog Input SM 1231, 4AI	Analog Input SM 1231, 8AI	Analog Input SM 1231, 4AI 16bit
Standards, approvals, certificates			
CE mark	Yes	Yes	Yes
CSA approval	Yes	Yes	Yes
UL approval	Yes	Yes	Yes
cULus	Yes	Yes	Yes
FM approval	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	Yes	Yes	Yes
Marine approval	Yes	Yes	Yes
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C	-20 °C	-20 °C
• max.	60 °C	60 °C	60 °C
Pollutant concentrations			
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
connection method			
required front connector	Yes	Yes	Yes
Mechanics/material			
Enclosure material (front)			
• Plastic	Yes	Yes	Yes
Dimensions			
Width	45 mm	45 mm	45 mm
Height	100 mm	100 mm	100 mm
Depth	75 mm	75 mm	75 mm
Weights			
Weight, approx.	180 g	180 g	180 g

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SB 1231 analog input modules

Overview

- Analog input for SIMATIC S7-1200
- Extremely short conversion times
- For the connection of analog sensors without additional amplifiers
- For solving even more complex automation tasks
- Can be plugged directly into the CPU

Ordering data

Article No.

SB 1231 analog input signal board

SIMATIC S7-1200, analog input, SB 1231
1 AI, +/-10 V DC (12-bit resolution) or 0-20 mA

6ES7231-4HA30-0XB0

Accessories

Terminal block (spare part)

SIMATIC S7-1200, spare part, gold-plated I/O terminal block
For signal board
(4 units with 6 screws each)

6ES7292-1BF30-0XA0

Technical specifications

Article number	6ES7231-4HA30-0XB0 Signal Board SB 1231, 1 AI
General information	
Product type designation	SB 1231, AI 1x12 bit
Supply voltage	
Rated value (DC)	24 V
Input current	
from backplane bus 5 V DC, typ.	55 mA
Analog inputs	
Number of analog inputs	1; Current or voltage differential inputs
permissible input voltage for current input (destruction limit), max.	±35 V
permissible input voltage for voltage input (destruction limit), max.	35 V
permissible input current for voltage input (destruction limit), max.	40 mA
permissible input current for current input (destruction limit), max.	40 mA
Cycle time (all channels) max.	156.25 µs; 400 Hz suppression
Input ranges	
• Voltage	Yes; ±10V, ±5V, ±2.5V
• Current	Yes; 0 to 20 mA
• Thermocouple	No
• Resistance thermometer	No
• Resistance	No
Input ranges (rated values), voltages	
• -10 V to +10 V	Yes
• -2.5 V to +2.5 V	Yes
• -5 V to +5 V	Yes
Input ranges (rated values), currents	
• 0 to 20 mA	Yes
Analog outputs	
Number of analog outputs	0
Cable length	
• shielded, max.	100 m; shielded, twisted pair
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	11 bit; + sign
• Integration time, parameterizable	Yes
• Interference voltage suppression for interference frequency f1 in Hz	40 dB, DC to 60 Hz
Smoothing of measured values	
• parameterizable	Yes

Article number	6ES7231-4HA30-0XB0 Signal Board SB 1231, 1 AI
Errors/accuracies	
Temperature error (relative to input range), (+/-)	25 °C ±0.3%, to 55 °C ±0.6% total measurement range
Interrupts/diagnostics/status information	
Alarms	Yes
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Wire-break	No
Diagnostics indication LED	
• for status of the inputs	Yes
• for maintenance	Yes
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
cULus	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
Marine approval	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	60 °C
Pollutant concentrations	
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
connection method	
required front connector	Yes
Mechanics/material	
Enclosure material (front)	
• Plastic	Yes
Dimensions	
Width	38 mm
Height	62 mm
Depth	21 mm
Weights	
Weight, approx.	35 g

Overview



- Analog outputs for SIMATIC S7-1200
- Extremely short conversion times
- For connecting analog actuators without additional amplifiers
- For solving even more complex automation tasks

Ordering data

Article No.

SM 1232 analog output signal module	
SIMATIC S7-1200, analog output, SM 1232 2 AO, +/-10 V, 14-bit resolution, or 0-20 mA/4-20 mA, 13-bit resolution	6ES7232-4HB32-0XB0
SIMATIC S7-1200, analog output, SM 1232 4 AO, +/-10 V, 14-bit resolution, or 0-20 mA/4-20 mA, 13-bit resolution	6ES7232-4HD32-0XB0
Accessories	
Terminal block (spare part) For 6ES7232-4HB32-0XB0, 6ES7232-4HD32-0XB0	
SIMATIC S7-1200, spare part, gold-plated I/O terminal block 8CH/16CH analog signal module (4 units with 7 screws each)	6ES7292-1BG30-0XA0
SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology for 8CH/16CH analog signal module (4 units with 7 pins each)	6ES7292-2BG30-0XA0
SIMATIC S7-1200, extension cable 2-tier configuration For SM 12XX, 2.0 m	6ES7290-6AA30-0XA0
Front flap set (spare part)	
SIMATIC S7-1200, spare part front flaps signal module 45 mm (signal module 45 mm wide front flap top & bottom) 6 units each	6ES7291-1BA30-0XA0

Technical specifications

Article number	6ES7232-4HB32-0XB0 Analog Output SM 1232, 2AO	6ES7232-4HD32-0XB0 Analog Output SM 1232, 4AO
General information		
Product type designation	SM 1232, AQ 2x14 bit	SM 1232, AQ 4x14 bit
Supply voltage		
Rated value (DC)	24 V	24 V
Input current		
Current consumption, typ. from backplane bus 5 V DC, typ.	45 mA 80 mA	45 mA 80 mA
Analog outputs		
Number of analog outputs	2; Current or voltage	4; Current or voltage
Output ranges, voltage • -10 V to +10 V	Yes	Yes
Output ranges, current • 0 to 20 mA	Yes	Yes
Load impedance (in rated range of output) • with voltage outputs, min. • with current outputs, max.	1 000 Ω 600 Ω	1 000 Ω 600 Ω
Cable length • shielded, max.	100 m; shielded, twisted pair	100 m; shielded, twisted pair
Analog value generation for the outputs		
Integration and conversion time/resolution per channel • Resolution with overrange (bit including sign), max.	14 bit; Voltage: 14 bit; Current : 13 bit	14 bit; Voltage: 14 bit; Current : 13 bit

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1232 analog output modules

Technical specifications

Article number	6ES7232-4HB32-0XB0 Analog Output SM 1232, 2AO	6ES7232-4HD32-0XB0 Analog Output SM 1232, 4AO
Errors/accuracies		
Temperature error (relative to output range), (+/-)	25 °C ±0.3%, to 55 °C ±0.6% total measurement range	25 °C ±0.3%, to 55 °C ±0.6% total measurement range
Basic error limit (operational limit at 25 °C)		
• Voltage, relative to output range, (+/-)	0.3 %	0.3 %
• Current, relative to output range, (+/-)	0.3 %	0.3 %
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, $f1 =$ interference frequency		
• Common mode voltage, max.	12 V	12 V
Interrupts/diagnostics/status information		
Alarms	Yes	Yes
Diagnostics function	Yes	Yes
Alarms		
• Diagnostic alarm	Yes	Yes
Diagnoses		
• Monitoring the supply voltage	Yes	Yes
• Wire-break	Yes	Yes
• Short-circuit	Yes	Yes
Diagnostics indication LED		
• for status of the outputs	Yes	Yes
• for maintenance	Yes	Yes
Degree and class of protection		
IP degree of protection	IP20	IP20
Standards, approvals, certificates		
CE mark	Yes	Yes
CSA approval	Yes	Yes
UL approval	Yes	Yes
cULus	Yes	Yes
FM approval	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes
KC approval	Yes	Yes
Marine approval	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C	-20 °C
• max.	60 °C	60 °C
Pollutant concentrations		
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
connection method		
required front connector	Yes	Yes
Mechanics/material		
Enclosure material (front)		
• Plastic	Yes	Yes
Dimensions		
Width	45 mm	45 mm
Height	100 mm	100 mm
Depth	75 mm	75 mm
Weights		
Weight, approx.	180 g	180 g

Overview



- Analog output for SIMATIC S7-1200
- Can be plugged directly into the CPU

Ordering data

Article No.

SB 1232 analog output signal board**SIMATIC S7-1200, analog output, SB 1232**

1 AO, +/-10 V DC (12-bit resolution) or 0-20 mA (11-bit resolution)

Accessories**Terminal block (spare part)****SIMATIC S7-1200, spare part, gold-plated I/O terminal block**

For signal board
(4 units with 6 screws each)

6ES7232-4HA30-0XB0

6ES7292-1BF30-0XA0

Technical specifications

Article number	6ES7232-4HA30-0XB0 Signal Board SB 1232, 1 AO
General information	
Product type designation	SB 1232, AQ 1x12 bit
Input current	
from backplane bus 5 V DC, typ.	15 mA
output voltage / header	
supply voltage of the transmitters / header	
• Supply current, max.	25 mA
Analog inputs	
Number of analog inputs	0
Analog outputs	
Number of analog outputs	1
Cycle time (all channels) max.	Voltage: 300 μ S (R), 750 μ S (1 μ F) Current: 600 ms (1 mH); 2 ms (10 mH)
Output ranges, voltage	
• -10 V to +10 V	Yes
Output ranges, current	
• 0 to 20 mA	Yes
Load impedance (in rated range of output)	
• with voltage outputs, min.	1 000 Ω
• with current outputs, max.	600 Ω
Cable length	
• shielded, max.	100 m; shielded, twisted pair
Analog value generation for the outputs	
Conversion principle	Differential
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	12 bit
Errors/accuracies	
Temperature error (relative to output range), (+/-)	25 °C \pm 0.5%, to 55 °C \pm 1%

Article number	6ES7232-4HA30-0XB0 Signal Board SB 1232, 1 AO
Interrupts/diagnostics/status information	
Alarms	Yes
Diagnostics function	Yes
Diagnostics indication LED	
• for status of the outputs	Yes
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
cULus	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
Marine approval	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	60 °C
Pollutant concentrations	
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
Mechanics/material	
Enclosure material (front)	
• Plastic	Yes
Dimensions	
Width	38 mm
Height	62 mm
Depth	21 mm
Weights	
Weight, approx.	40 g

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1234 analog input/output modules

Overview



- Analog inputs and outputs for the SIMATIC S7-1200
- Extremely short conversion times
- For connecting analog actuators and sensors without additional amplifiers
- For solving even more complex automation tasks

Ordering data

Article No.

SM 1234 analog input/output signal module	
SIMATIC S7-1200, analog I/O SM 1234 4 AI/2 AO, +/-10 V, 14-bit resolution or 0 (4)-20 mA, 13-bit resolution	6ES7234-4HE32-0XB0
Accessories	
Terminal block (spare part) For 6ES7234-4HE32-0XB0	
SIMATIC S7-1200, spare part, gold-plated I/O terminal block 8CH/16CH analog signal module (4 units with 7 screws each)	6ES7292-1BG30-0XA0
SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology for 8CH/16CH analog signal module (4 units with 7 pins each)	6ES7292-2BG30-0XA0
SIMATIC S7-1200, extension cable 2-tier configuration For SM 12XX, 2.0 m	6ES7290-6AA30-0XA0
Front flap set (spare part)	
SIMATIC S7-1200, spare part front flaps signal module 45 mm (signal module 45 mm wide front flap top & bottom) 6 units each	6ES7291-1BA30-0XA0

Technical specifications

Article number	6ES7234-4HE32-0XB0 Analog I/O SM 1234, 4AI/2AO
General information	
Product type designation	SM 1234, AI 4x13 bit/AQ 2x14 bit
Supply voltage	
Rated value (DC)	24 V
Input current	
Current consumption, typ.	60 mA
from backplane bus 5 V DC, typ.	80 mA
Analog inputs	
Number of analog inputs	4; Current or voltage differential inputs
permissible input voltage for voltage input (destruction limit), max.	35 V
permissible input current for current input (destruction limit), max.	40 mA
Cycle time (all channels) max.	625 µs
Input ranges	
• Voltage	Yes; ±10V, ±5V, ±2.5V
• Current	Yes; 4 to 20 mA, 0 to 20 mA
Input ranges (rated values), voltages	
• -10 V to +10 V	Yes
• -2.5 V to +2.5 V	Yes
• -5 V to +5 V	Yes
Input ranges (rated values), currents	
• 0 to 20 mA	Yes
• 4 mA to 20 mA	Yes

Article number	6ES7234-4HE32-0XB0 Analog I/O SM 1234, 4AI/2AO
Analog outputs	
Number of analog outputs	2; Current or voltage
Output ranges, voltage	
• -10 V to +10 V	Yes
Output ranges, current	
• 0 to 20 mA	Yes
• 4 mA to 20 mA	Yes
Load impedance (in rated range of output)	
• with voltage outputs, min.	1 000 Ω
• with current outputs, max.	600 Ω
Cable length	
• shielded, max.	100 m; shielded, twisted pair
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	12 bit; + sign
• Integration time, parameterizable	Yes
• Interference voltage suppression for interference frequency f1 in Hz	40 dB, DC to 60 V for interference frequency 50 / 60 Hz
Smoothing of measured values	
• parameterizable	Yes
Analog value generation for the outputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	14 bit; Voltage: 14 bit; Current : 13 bit

Technical specifications

Article number	6ES7234-4HE32-0XB0 Analog I/O SM 1234, 4AI/2AO
Errors/accuracies	
Temperature error (relative to input range), (+/-)	25 °C ±0.1%, to 55 °C ±0.2% total measurement range
Temperature error (relative to output range), (+/-)	25 °C ±0.3%, to 55 °C ±0.6% total measurement range
Basic error limit (operational limit at 25 °C)	
• Voltage, relative to input range, (+/-)	0.1 %
• Current, relative to input range, (+/-)	0.1 %
• Voltage, relative to output range, (+/-)	0.3 %
• Current, relative to output range, (+/-)	0.3 %
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, $f1 =$ interference frequency	
• Common mode voltage, max.	12 V
Interrupts/diagnostics/status information	
Alarms	Yes
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• for status of the inputs	Yes
• for status of the outputs	Yes
• for maintenance	Yes
Potential separation	
Potential separation analog outputs	
• between the channels and the power supply of the electronics	No

Article number	6ES7234-4HE32-0XB0 Analog I/O SM 1234, 4AI/2AO
Degree and class of protection	
IP degree of protection	IP20
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
cULus	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
Marine approval	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	60 °C
Pollutant concentrations	
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
connection method	
required front connector	Yes
Mechanics/material	
Enclosure material (front)	
• Plastic	Yes
Dimensions	
Width	45 mm
Height	100 mm
Depth	75 mm
Weights	
Weight, approx.	220 g

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1231 thermocouple module

Overview

- For the convenient recording of temperatures with great accuracy
- 7 common thermocouple types can be used
- Also for the measurement of analog signals with a low level (± 80 mV)
- Can easily be retrofitted to existing plant

Ordering data

Ordering data	Article No.	Article No.
SM 1231 thermocouple module		
SIMATIC S7-1200, analog input, SM 1231 TC 4 AI thermocouples	6ES7231-5QD32-0XB0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology for 8CH/16CH analog signal module (4 units with 7 pins each)
SIMATIC S7-1200, analog input, SM 1231 TC 8 AI thermocouples	6ES7231-5QF32-0XB0	SIMATIC S7-1200, extension cable 2-tier configuration For SM 12XX, 2.0 m
Accessories		Front flap set (spare part)
Terminal block (spare part) For 6ES7231-5QD32-0XB0, 6ES7231-5QF32-0XB0		SIMATIC S7-1200, spare part front flaps signal module 45 mm (signal module 45 mm wide front flap top & bottom) 6 units each
SIMATIC S7-1200, spare part, gold-plated I/O terminal block 8CH/16CH analog signal module (4 units with 7 screws each)	6ES7292-1BG30-0XA0	6ES7292-2BG30-0XA0
		6ES7290-6AA30-0XA0
		6ES7291-1BA30-0XA0

Technical specifications

Article number	6ES7231-5QD32-0XB0	6ES7231-5QF32-0XB0
	S7-1200, analog Input SM 1231 TC, 4 AI	S7-1200, analog Input SM 1231 TC, 8 AI
General information		
Product type designation	SM 1231, AI 4x16 bit TC	SM 1231, AI 8x16 bit TC
Supply voltage		
Rated value (DC)	24 V	24 V
Input current		
Current consumption, typ.	40 mA	40 mA
from backplane bus 5 V DC, typ.	80 mA	80 mA
Analog inputs		
Number of analog inputs	4; Thermocouples	8; Thermocouples
permissible input voltage for voltage input (destruction limit), max.	± 35 V	± 35 V
Technical unit for temperature measurement adjustable	Degrees Celsius/degrees Fahrenheit	Degrees Celsius/degrees Fahrenheit
Input ranges		
• Voltage	Yes	Yes
• Current	No	No
• Thermocouple	Yes; J, K, T, E, R, S, N, C, TXK/XK(L); voltage range: ± 80 mV	Yes; J, K, T, E, R & S, B, N, C, TXK/XK(L); voltage range: ± 80 mV
• Resistance thermometer	No	No
• Resistance	No	No
Input ranges (rated values), voltages		
• -80 mV to +80 mV	Yes	Yes
Input ranges (rated values), thermocouples		
• Type B	Yes	Yes
• Type C	Yes	Yes
• Type E	Yes	Yes
• Type J	Yes	Yes
• Type K	Yes	Yes
• Type N	Yes	Yes
• Type R	Yes	Yes
• Type S	Yes	Yes
• Type T	Yes	Yes
• Type TXK/TXK(L) to GOST	Yes	Yes

Technical specifications

Article number	6ES7231-5QD32-0XB0	6ES7231-5QF32-0XB0
	S7-1200, analog Input SM 1231 TC, 4 AI	S7-1200, analog Input SM 1231 TC, 8 AI
Thermocouple (TC)		
Temperature compensation		
- parameterizable	No	No
Analog value generation for the inputs		
Integration and conversion time/resolution per channel		
• Resolution with overrange (bit including sign), max.	15 bit; + sign	15 bit; + sign
• Integration time, parameterizable	No	No
• Interference voltage suppression for interference frequency f1 in Hz	85 dB at 50 / 60 / 400 Hz	85 dB at 50 / 60 / 400 Hz
Smoothing of measured values		
• parameterizable	Yes	Yes
Errors/accuracies		
Temperature error (relative to input range), (+/-)	25 °C ±0.1%, to 55 °C ±0.2% total measurement range	25 °C ±0.1%, to 55 °C ±0.2% total measurement range
Repeat accuracy in steady state at 25 °C (relative to output range), (+/-)	0.5 %	0.5 %
Interference voltage suppression for f = n x (f1 +/- 1 %), f1 = interference frequency		
• Common mode interference, min.	120 dB	120 dB
Interrupts/diagnostics/status information		
Alarms	Yes	Yes
Diagnostics function	Yes; Can be read out	Yes; Can be read out
Alarms		
• Diagnostic alarm	Yes	Yes
Diagnoses		
• Monitoring the supply voltage	Yes	Yes
• Wire-break	Yes	Yes
Diagnostics indication LED		
• for status of the inputs	Yes	Yes
• for maintenance	Yes	Yes
Degree and class of protection		
IP degree of protection	IP20	IP20
Standards, approvals, certificates		
CE mark	Yes	Yes
CSA approval	Yes	Yes
UL approval	Yes	Yes
cULus	Yes	Yes
FM approval	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes
KC approval	Yes	Yes
Marine approval	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C	-20 °C
• max.	60 °C	60 °C
Pollutant concentrations		
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1231 thermocouple module**Technical specifications**

Article number	6ES7231-5QD32-0XB0	6ES7231-5QF32-0XB0
	S7-1200, analog Input SM 1231 TC, 4 AI	S7-1200, analog Input SM 1231 TC, 8 AI
connection method		
required front connector	Yes	Yes
Mechanics/material		
Enclosure material (front)		
• Plastic	Yes	Yes
Dimensions		
Width	45 mm	45 mm
Height	100 mm	100 mm
Depth	75 mm	75 mm
Weights		
Weight, approx.	180 g	220 g

3

Overview

- For the convenient recording of temperatures with great accuracy
- 1 input with 16-bit resolution
- Common thermocouple types can be used
- Also for the measurement of analog signals with a low level (± 80 mV)
- Can easily be retrofitted to existing plant
- Can be plugged directly into the CPU

Ordering data**Article No.**

SIMATIC S7-1200, analog input, SB 1231 TC
1 AI thermocouples type J or K

6ES7231-5QA30-0XB0

Accessories**Terminal block (spare part)**

SIMATIC S7-1200, spare part, gold-plated I/O terminal block

6ES7292-1BF30-0XA0

For signal board
(4 units with 6 screws each)

Technical specifications

Article number	6ES7231-5QA30-0XB0 Signal Board SB 1231 TC, 1 AI
General information	
Product type designation	SB 1231, AI 1x16 bit TC
Supply voltage	
Rated value (DC)	24 V
Input current	
Current consumption, typ.	5 mA
from backplane bus 5 V DC, typ.	20 mA
Analog inputs	
Number of analog inputs	1; Thermocouples
permissible input voltage for current input (destruction limit), max.	± 35 V
permissible input voltage for voltage input (destruction limit), max.	± 35 V
Technical unit for temperature measurement adjustable	Degrees Celsius/degrees Fahrenheit
Input ranges	
• Voltage	Yes
• Current	No
• Thermocouple	Yes; J, K, T, E, R & S, B, N, C, TXK/XK(L); voltage range: ± 80 mV
• Resistance thermometer	No
• Resistance	No
Input ranges (rated values), voltages	
• -80 mV to +80 mV	Yes
Input ranges (rated values), thermocouples	
• Type J	Yes
• Type K	Yes
Thermocouple (TC)	
Temperature compensation	
- parameterizable	No
Analog outputs	
Number of analog outputs	0
Cable length	
• shielded, max.	100 m; shielded, twisted pair
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	15 bit; + sign
• Integration time, parameterizable	No
• Interference voltage suppression for interference frequency f1 in Hz	85 dB at 10 / 50 / 60 / 400 Hz
Smoothing of measured values	
• parameterizable	Yes

Article number	6ES7231-5QA30-0XB0 Signal Board SB 1231 TC, 1 AI
Errors/accuracies	
Temperature error (relative to input range), (+/-)	25 °C $\pm 0.1\%$, to 55 °C $\pm 0.2\%$ total measurement range
Repeat accuracy in steady state at 25 °C (relative to output range), (+/-)	0.5 %
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, f1 = interference frequency	
• Common mode interference, min.	120 dB
Interrupts/diagnostics/status information	
Alarms	Yes
Diagnostics function	Yes; Can be read out
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Wire-break	Yes
Diagnostics indication LED	
• for status of the inputs	Yes
• for maintenance	Yes
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
cULus	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
Marine approval	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	60 °C
Pollutant concentrations	
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
connection method	
required front connector	Yes
Mechanics/material	
Enclosure material (front)	
• Plastic	Yes
Dimensions	
Width	38 mm
Height	62 mm
Depth	21 mm
Weights	
Weight, approx.	35 g

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1231 RTD signal module

Overview

- For the convenient recording of temperatures with great accuracy
- 4 inputs
- Most popular resistance temperature sensors can be used
- Can easily be retrofitted to existing installation

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SM 1231 RTD signal module		SIMATIC S7-1200, spare part, gold-plated I/O terminal block	6ES7292-1BL30-0XA0
SIMATIC S7-1200, analog input, SM 1231 RTD 4xAI RTD module	6ES7231-5PD32-0XB0	32CH analog signal module (4 units with 11 screws each)	
SIMATIC S7-1200, analog input, SM 1231 RTD 8xAI RTD module	6ES7231-5PF32-0XB0	SIMATIC S7-1200, spare part, gold-plated I/O terminal block	6ES7292-2BL30-0XA0
Accessories		In push-in technology, for 32CH analog signal module (4 units with 11 pins each)	
Terminal block (spare part) For 6ES7231-5PD32-0XB0		SIMATIC S7-1200, extension cable 2-tier configuration	6ES7290-6AA30-0XA0
SIMATIC S7-1200, spare part, gold-plated I/O terminal block 8CH/16CH analog signal module (4 units with 7 screws each)	6ES7292-1BG30-0XA0	For SM 12XX, 2.0 m	
SIMATIC S7-1200, spare part, gold-plated I/O terminal block In push-in technology for 8CH/16CH analog signal module (4 units with 7 pins each) For 6ES7231-5PF32-0XB0	6ES7292-2BG30-0XA0	Front flap set (spare part)	
		SIMATIC S7-1200, spare part front flaps signal module 45 mm	6ES7291-1BA30-0XA0
		(signal module 45 mm wide front flap top & bottom) 6 units each	
		SIMATIC S7-1200, spare part front flaps signal module 70 mm	6ES7291-1BB30-0XA0
		(signal module 70 mm wide front flap top & bottom) 6 units each	

Technical specifications

Article number	6ES7231-5PD32-0XB0	6ES7231-5PF32-0XB0
	S7-1200, analog Input SM 1231 RTD, 4 AI	S7-1200, analog Input SM 1231 RTD, 8 AI
General information		
Product type designation	SM 1231, AI 4x16 bit RTD	SM 1231, AI 8x16 bit RTD
Supply voltage		
Rated value (DC)	24 V	24 V
Input current		
Current consumption, typ.	40 mA	40 mA
from backplane bus 5 V DC, typ.	80 mA	80 mA
Analog inputs		
Number of analog inputs	4; Resistance thermometer	8; Resistance thermometer
permissible input voltage for voltage input (destruction limit), max.	±35 V	±35 V
Technical unit for temperature measurement adjustable	Degrees Celsius/degrees Fahrenheit	Degrees Celsius/degrees Fahrenheit
Input ranges		
• Voltage	No	No
• Current	No	No
• Thermocouple	No	No
• Resistance thermometer	Yes; Resistance-type transmitter: Pt10, Pt50, Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni200, Ni500, Ni1000, Cu10, Cu50, Cu100, LG-Ni1000	Yes; Resistance-type transmitter: Pt10, Pt50, Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni200, Ni500, Ni1000, Cu10, Cu50, Cu100, LG-Ni1000
• Resistance	Yes; 150 Ω, 300 Ω, 600 Ω	Yes; 150 Ω, 300 Ω, 600 Ω

Technical specifications

Article number	6ES7231-5PD32-0XB0	6ES7231-5PF32-0XB0
	S7-1200, analog Input SM 1231 RTD, 4 AI	S7-1200, analog Input SM 1231 RTD, 8 AI
Input ranges (rated values), resistance thermometer		
• Cu 10	Yes	Yes
• Ni 100	Yes	Yes
• Ni 1000	Yes	Yes
• LG-Ni 1000	Yes	Yes
• Ni 120	Yes	Yes
• Ni 200	Yes	Yes
• Ni 500	Yes	Yes
• Pt 100	Yes	Yes
• Pt 1000	Yes	Yes
• Pt 200	Yes	Yes
• Pt 500	Yes	Yes
Input ranges (rated values), resistors		
• 0 to 150 ohms	Yes	Yes
• 0 to 300 ohms	Yes	Yes
• 0 to 600 ohms	Yes	Yes
Thermocouple (TC)		
Temperature compensation		
- parameterizable	No	No
Analog value generation for the inputs		
Integration and conversion time/resolution per channel		
• Resolution with overrange (bit including sign), max.	15 bit; + sign	15 bit; + sign
• Integration time, parameterizable	No	No
• Interference voltage suppression for interference frequency f1 in Hz	85 dB at 50 / 60 / 400 Hz	85 dB at 50 / 60 / 400 Hz
Errors/accuracies		
Temperature error (relative to input range), (+/-)	25 °C ±0.1%, to 55 °C ±0.2% total measurement range	25 °C ±0.1%, to 55 °C ±0.2% total measurement range
Repeat accuracy in steady state at 25 °C (relative to output range), (+/-)	0.05 %	0.05 %
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, $f1 =$ interference frequency		
• Common mode interference, min.	120 dB	120 dB
Interrupts/diagnostics/status information		
Alarms	Yes	Yes
Diagnostics function	Yes; Can be read out	Yes; Can be read out
Alarms		
• Diagnostic alarm	Yes	Yes
Diagnoses		
• Monitoring the supply voltage	Yes	Yes
• Wire-break	Yes	Yes
Diagnostics indication LED		
• for status of the inputs	Yes	Yes
• for maintenance	Yes	Yes
Degree and class of protection		
IP degree of protection	IP20	IP20

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1231 RTD signal module**Technical specifications**

Article number	6ES7231-5PD32-0XB0	6ES7231-5PF32-0XB0
	S7-1200, analog Input SM 1231 RTD, 4 AI	S7-1200, analog Input SM 1231 RTD, 8 AI
Standards, approvals, certificates		
CE mark	Yes	Yes
CSA approval	Yes	Yes
UL approval	Yes	Yes
cULus	Yes	Yes
FM approval	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes
KC approval	Yes	Yes
Marine approval	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C	-20 °C
• max.	60 °C	60 °C
Pollutant concentrations		
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
connection method		
required front connector	Yes	Yes
Mechanics/material		
Enclosure material (front)		
• Plastic	Yes	Yes
Dimensions		
Width	45 mm	70 mm
Height	100 mm	100 mm
Depth	75 mm	75 mm
Weights		
Weight, approx.	220 g	220 g

Overview

- For the convenient recording of temperatures with great accuracy
- 1 input with 16-bit resolution
- Common resistance-type temperature sensors can be used
- Can easily be retrofitted to existing plant
- Can be plugged directly into the CPU

Ordering data**Article No.**

SIMATIC S7-1200, analog input, SB 1231RTD
1 AI RTD, PT 100 and PT1000

6ES7231-5PA30-0XB0**Accessories****Terminal block (spare part)**

SIMATIC S7-1200, spare part, gold-plated I/O terminal block
For signal board
(4 units with 6 screws each)

6ES7292-1BF30-0XA0**Technical specifications**

Article number	6ES7231-5PA30-0XB0 Signal Board SB 1231 RTD
General information	
Product type designation	SB 1231, AI 1x16 bit RTD
Supply voltage	
Rated value (DC)	24 V
Input current	
Current consumption, typ. from backplane bus 5 V DC, typ.	5 mA 20 mA
Analog inputs	
Number of analog inputs	1; Resistance thermometer
permissible input voltage for current input (destruction limit), max.	±35 V
Technical unit for temperature measurement adjustable	Degrees Celsius/degrees Fahrenheit
Input ranges	
• Voltage	Yes
• Current	No
• Thermocouple	No
• Resistance thermometer	Yes; Platinum (Pt)
• Resistance	Yes; 150 Ω, 300 Ω, 600 Ω
Input ranges (rated values), resistance thermometer	
• Pt 100	Yes
• Pt 1000	Yes
• Pt 200	Yes
• Pt 500	Yes
Input ranges (rated values), resistors	
• 0 to 150 ohms	Yes
• 0 to 300 ohms	Yes
• 0 to 600 ohms	Yes
Thermocouple (TC)	
Temperature compensation	
- parameterizable	No
Analog outputs	
Number of analog outputs	0
Cable length	
• shielded, max.	100 m; shielded, twisted pair
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	15 bit; + sign
• Integration time, parameterizable	No
• Interference voltage suppression for interference frequency f1 in Hz	85 dB at 10 / 50 / 60 / 400 Hz

Article number	6ES7231-5PA30-0XB0 Signal Board SB 1231 RTD
Errors/accuracies	
Temperature error (relative to input range), (+/-)	25 °C ±0.1%, to 55 °C ±0.2% total measurement range
Repeat accuracy in steady state at 25 °C (relative to output range), (+/-)	0.05 %
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, f1 = interference frequency	
• Common mode interference, min.	120 dB
Interrupts/diagnostics/status information	
Alarms	Yes
Diagnostics function	Yes; Can be read out
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Wire-break	Yes
Diagnostics indication LED	
• for status of the inputs	Yes
• for maintenance	Yes
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
cULus	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
Marine approval	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	60 °C
Pollutant concentrations	
• SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
connection method	
required front connector	Yes
Mechanics/material	
Enclosure material (front)	
• Plastic	Yes
Dimensions	
Width	38 mm
Height	62 mm
Depth	21 mm
Weights	
Weight, approx.	35 g

SIMATIC S7-1200 Basic Controllers

I/O modules

Analog modules

SM 1238 Energy Meter 480 V AC analog input modules

Overview

- Energy management based on SIMATIC S7-1200
- Data acquisition of electrical characteristics in 1 and 3-phase networks up to 480 V AC
- Direct connection of voltage inputs
- Current measurement performed by 1 A and 5 A current transformers
- Can be used in TN and TT networks
- Data backup of measurement data in the event of a power failure

Ordering data

Article No.

SM 1238 Energy Meter 480 V AC analog input modules

SIMATIC S7-1200, analog input, SM 1238 Energy Meter 480 V AC

6ES7238-5XA32-0XB0

Energy measurement module for data acquisition in 1 and 3-phase networks (TN, TT) up to 480 V AC; current range: 1 A, 5 A; recording of voltage, current, phase angles, power ratings, energy values, frequencies; channel diagnostics

Accessories

SIMATIC S7-1200, extension cable 2-tier configuration

6ES7290-6AA30-0XA0

For SM 12XX, 2.0 m

Terminal block (spare part)

SIMATIC S7-1200, spare part, tin-coated I/O terminal block

6ES7292-1AG40-0XA2

Coded center, 7 pins for voltage terminal SM 1238 Energy Meter (4 units with 7 screws each)

SIMATIC S7-1200, spare part, tin-coated I/O terminal block

6ES7292-2AG40-0XA2

In push-in technology, coded center, 7 pins for voltage terminal SM 1238 Energy Meter (4 units with 7 pins each)

SIMATIC S7-1200, spare part, tin-coated I/O terminal block

6ES7292-1AG30-0XA0

Digital signal module 8CH/16CH (4 units with 7 screws each)

SIMATIC S7-1200, spare part, tin-coated I/O terminal block

6ES7292-2AG30-0XA0

In push-in technology, for digital signal modules 8CH/16CH (4 units with 7 pins each)

Front flap set (spare part)

SIMATIC S7-1200, spare part front flaps signal module 45 mm

6ES7291-1BA30-0XA0

(signal module 45 mm wide front flap top & bottom) 6 units each

Technical specifications

Article number	6ES7238-5XA32-0XB0 SM 1238 Energy Meter 480V AC
General information	
Product type designation	SM 1238, AI energy meter 480 V AC
Product function	
• Voltage measurement	Yes
- with voltage transformer	Yes
• Current measurement	Yes
- without current transformer	No
- with current transformer	Yes
• Energy measurement	Yes
• Frequency measurement	Yes
• Power measurement	Yes
• Active power measurement	Yes
• Reactive power measurement	Yes
• I&M data	Yes; I&M 0
• Isochronous mode	No

Article number	6ES7238-5XA32-0XB0 SM 1238 Energy Meter 480V AC
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1
Operating mode	
• cyclic measurement	Yes
• acyclic measurement	Yes
• Acyclic measured value access	Yes
• Fixed measured value sets	Yes
• Freely definable measured value sets	No
Installation type/mounting	
Mounting position	Horizontal, vertical
Supply voltage	
Design of the power supply	from CPU
Type of supply voltage	DC

Technical specifications

Article number	6ES7238-5XA32-0XB0 SM 1238 Energy Meter 480V AC
Input current	
Current consumption, max.	180 mA
Analog inputs	
Cycle time (all channels), typ.	50 ms; Time for consistent update of all measured and calculated values (cyclic and acyclic data)
Interrupts/diagnostics/status information	
Alarms	
• Diagnostic alarm	Yes
• Limit value alarm	Yes
• Hardware interrupt	No
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red Fn LED
• for module diagnostics	Yes; green/red DIAG LED
Integrated Functions	
Measuring functions	
• Measuring procedure for voltage measurement	TRMS
• Measuring procedure for current measurement	TRMS
• Type of measured value acquisition	seamless
• Curve shape of voltage	Sinusoidal or distorted
• Buffering of measured variables	Yes
• Parameter length	74 byte
• Bandwidth of measured value acquisition	2 kHz; Harmonics: 39 / 50 Hz, 32 / 60 Hz
Measuring range	
- Frequency measurement, min.	45 Hz
- Frequency measurement, max.	65 Hz
Measuring inputs for voltage	
- Measurable line voltage between phase and neutral conductor	277 V
- Measurable line voltage between the line conductors	480 V
- Measurable line voltage between phase and neutral conductor, min.	0 V
- Measurable line voltage between phase and neutral conductor, max.	293 V
- Measurable line voltage between the line conductors, min.	0 V
- Measurable line voltage between the line conductors, max.	508 V
- Internal resistance line conductor and neutral conductor	3.4 MΩ
- Power consumption per phase	20 mW
- Impulse voltage resistance 1,2/50μs	1 kV
- Measurement category for voltage measurement in accordance with IEC 61010-2-030	CAT II; CAT III in case of guaranteed protection level of 1.5 kV

Article number	6ES7238-5XA32-0XB0 SM 1238 Energy Meter 480V AC
Measuring inputs for current	
- measurable relative current (AC), min.	1 %; Relative to the secondary rated current 5 A
- measurable relative current (AC), max.	100 %; Relative to the secondary rated current 5 A
- Continuous current with AC, maximum permissible	5 A
- Apparent power consumption per phase for measuring range 5 A	0.6 VA
- Rated value short-time withstand current restricted to 1 s	100 A
- Input resistance measuring range 0 to 5 A	25 mΩ; At the terminal
- Surge strength	10 A; for 1 minute
- Zero point suppression	Parameterizable: 2 ... 250 mA, default 50 mA
Accuracy class according to IEC 61557-12	
- Measured variable voltage	0.2
- Measured variable current	0.2
- Measured variable apparent power	0.5
- Measured variable active power	0.5
- Measured variable reactive power	1
- Measured variable power factor	0.5
- Measured variable active energy	0.5
- Measured variable reactive energy	1
- Measured variable neutral current	0.5; calculated
- Measured variable phase angle	±1 °; not covered by IEC 61557-12
- Measured variable frequency	0.05
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes; 3 700V AC (type test) CAT III
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
cULus	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
Marine approval	Yes
Dimensions	
Width	45 mm
Height	100 mm
Depth	75 mm
Weights	
Weight, approx.	165 g
Other	
Data for selecting a current transformer	
• Burden power current transformer x/1A, min.	As a function of cable length and cross section, see device manual
• Burden power current transformer x/5A, min.	As a function of cable length and cross section, see device manual

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SM 1231 analog input modules

Overview



- Analog inputs for SIPLUS S7-1200
- With extremely short conversion times
- For connecting analog actuators and sensors without additional amplifiers
- Even solves more complex automation tasks
- From +60 °C to +70 °C, max. 50% of the inputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SM 1231 analog input signal module

(Extended temperature range and exposure to environmental substances)

Range of ambient temperature
0 ... +55 °C

4 analog inputs, ±10 V, ±5 V, ±2.5 V, or 0 ... 20 mA, 16-bit

6AG1231-5ND32-4XB0

4 analog inputs ±10 V, ±5 V, ±2.5 V, or 0 ... 20 mA; 12-bit + sign

6AG1231-4HD32-4XB0

8 analog inputs, ±10 V, ±5 V, ±2.5 V, or 0 ... 20 mA, 12-bit + sign

6AG1231-4HF32-4XB0

Accessories

See SIMATIC S7-1200 SM 1231 analog input modules, page 3/91

Technical specifications

Article number	6AG1231-4HD32-4XB0	6AG1231-4HF32-4XB0	6AG1231-5ND32-4XB0
Based on	6ES7231-4HD32-0XB0	6ES7231-4HF32-0XB0	6ES7231-5ND32-0XB0
	SIPLUS S7-1200 SM 1231 4AI 13Bit	SIPLUS S7-1200 SM 1231 8AI 13Bit	SIPLUS S7-1200 SM 1231 4AI 16Bit
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C
• max.	60 °C; = Tmax	60 °C; = Tmax	60 °C; = Tmax
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

Technical specifications

Article number	6AG1231-4HD32-4XB0	6AG1231-4HF32-4XB0	6AG1231-5ND32-4XB0
Based on	6ES7231-4HD32-0XB0	6ES7231-4HF32-0XB0	6ES7231-5ND32-0XB0
	SIPLUS S7-1200 SM 1231 4AI 13Bit	SIPLUS S7-1200 SM 1231 8AI 13Bit	SIPLUS S7-1200 SM 1231 4AI 16Bit
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SM 1232 analog output modules**Overview**

- Analog outputs for SIPLUS S7-1200
- With extremely short conversion times
- For connecting analog actuators without additional amplifiers
- Even solves more complex automation tasks
- From +60 °C to +70 °C, max. 50% of the outputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS SM 1232 analog output signal module**

(Extended temperature range and exposure to environmental substances)

Range of ambient temperature
-20 ... +60 °C

2 analog outputs, ±10 V with 14-bit or 0 ... 20 mA with 13-bit

4 analog outputs, ±10 V with 14-bit or 0 ... 20 mA with 13-bit

Range of ambient temperature
-40 ... +70 °C

4 analog outputs, ±10 V with 14-bit or 0 ... 20 mA with 13-bit

Accessories**6AG1232-4HB32-4XB0****6AG1232-4HD32-4XB0****6AG1232-4HD32-2XB0**

See SIMATIC S7-1200 SM 1232 analog output modules, page 3/95

Technical specifications

Article number	6AG1232-4HB32-4XB0	6AG1232-4HD32-2XB0	6AG1232-4HD32-4XB0
Based on	6ES7232-4HB32-0XB0	6ES7232-4HD32-0XB0	6ES7232-4HD32-0XB0
	SIPLUS S7-1200 SM 1232 2AQ 13Bit	SIPLUS S7-1200 SM 1232 4AQ 14Bit	SIPLUS S7-1200 SM 1232 4AQ 14Bit
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C
• max.	60 °C; = Tmax	70 °C; = Tmax	60 °C; = Tmax
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

Technical specifications

Article number	6AG1232-4HB32-4XB0	6AG1232-4HD32-2XB0	6AG1232-4HD32-4XB0
Based on	6ES7232-4HB32-0XB0	6ES7232-4HD32-0XB0	6ES7232-4HD32-0XB0
	SIPLUS S7-1200 SM 1232 2AQ 13Bit	SIPLUS S7-1200 SM 1232 4AQ 14Bit	SIPLUS S7-1200 SM 1232 4AQ 14Bit
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SB 1232 analog output modules

Overview



- Analog output for SIPLUS S7-1200
- Can be plugged directly into the CPU (cannot be used for +70 °C version)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

SIPLUS SB 1232 analog output signal board

(Extended temperature range and exposure to environmental substances)

Range of ambient temperature
-25 ... +55 °C

1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits

Range of ambient temperature
0 ... +55 °C

1 analog output, ±10 V with 12 bits or 0 ... 20 mA with 11 bits

Accessories

Article No.

6AG1232-4HA30-5XB0

6AG1232-4HA30-4XB0

See SIMATIC S7-1200 SB 1232 analog output modules, page 3/97

Technical specifications

Article number	6AG1232-4HA30-4XB0	6AG1232-4HA30-5XB0
Based on	6ES7232-4HA30-0XB0 SIPLUS S7-1200 SB 1232 1AQ	6ES7232-4HA30-0XB0 SIPLUS S7-1200 SB 1232 1AQ
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; = Tmax	60 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Coolants and lubricants		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *

Technical specifications

Article number	6AG1232-4HA30-4XB0	6AG1232-4HA30-5XB0
Based on	6ES7232-4HA30-0XB0 SIPLUS S7-1200 SB 1232 1AQ	6ES7232-4HA30-0XB0 SIPLUS S7-1200 SB 1232 1AQ
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SM 1234 analog input/output modules**Overview**

- Analog inputs and outputs for SIPLUS S7-1200
- With extremely short conversion times
- For connecting analog actuators and sensors without additional amplifiers
- Even solves more complex automation tasks
- From +60 °C to +70 °C, max. 50% of the inputs and outputs can be controlled simultaneously

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**SIPLUS SM 1234 analog input/output signal module**

(Extended temperature range and exposure to environmental substances)

Range of ambient temperature
-25 ... +70 °C,

from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50%

4 analog inputs, ±10 V, ±5 V, ±2.5 V, or 0 ... 20 mA, 12-bit + sign;
2 analog outputs, ±10 V with 14-bit or 0 ... 20 mA with 13-bit

Range of ambient temperature
0 ... +55 °C

4 analog inputs, ±10 V, ±5 V, ±2.5 V, or 0 ... 20 mA, 12-bit + sign;
2 analog outputs, ±10 V with 14-bit or 0 ... 20 mA with 13-bit

Accessories**Article No.****6AG1234-4HE32-2XB0****6AG1234-4HE32-4XB0**

See SIMATIC S7-1200 SM 1234 analog input/output modules, page 3/98

Technical specifications

Article number	6AG1234-4HE32-2XB0	6AG1234-4HE32-4XB0
Based on	6ES7234-4HE32-0XB0 SIPLUS S7-1200 SM 1234 4AI/2AQ	6ES7234-4HE32-0XB0 SIPLUS S7-1200 SM 1234 4AI/2AQ 13Bit
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C
• max.	70 °C; = Tmax; Tmax > +60 °C number of simultaneously used outputs 1, inputs 2 (no adjacent points) for horizontal mounting position	60 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

Technical specifications

Article number	6AG1234-4HE32-2XB0	6AG1234-4HE32-4XB0
Based on	6ES7234-4HE32-0XB0	6ES7234-4HE32-0XB0
	SIPLUS S7-1200 SM 1234 4AI/2AQ	SIPLUS S7-1200 SM 1234 4AI/2AQ 13Bit
Resistance		
Coolants and lubricants		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SM 1231 thermocouple module

Overview

- For the convenient recording of temperatures with great accuracy
- 7 common thermocouple types can be used
- Also for the measurement of analog signals with a low level (± 80 mV)
- Can easily be retrofitted to existing plant

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

Article No.

SIPLUS SM 1231 thermocouple module

(Extended temperature range and exposure to environmental substances)

Range of ambient temperature
-40 ... +70 °C

8 inputs +/- 80 mV, resolution 15-bit + sign, thermocouple types J, K, T, E, R, S, N, C, TXK/XK(L)

4 inputs +/- 80 mV, resolution 15-bit + sign, thermocouple types J, K, T, E, R, S, N, C, TXK/XK(L)

Accessories

6AG1231-5QF32-4XB0

6AG1231-5QD32-4XB0

See SIMATIC S7-1200 SM 1231 thermocouple module, page 3/100

Technical specifications

Article number	6AG1231-5QF32-4XB0	6AG1231-5QD32-4XB0
Based on	6ES7231-5QF32-0XB0 SIPLUS S7-1200 SM 1231 8AI TC 16Bit	6ES7231-5QD32-0XB0 SIPLUS S7-1200 SM 1231 4AI TC 16Bit
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C
• max.	60 °C; = Tmax	60 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Coolants and lubricants		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

Technical specifications

Article number	6AG1231-5QF32-4XB0	6AG1231-5QD32-4XB0
Based on	6ES7231-5QF32-0XB0 SIPLUS S7-1200 SM 1231 8AI TC 16Bit	6ES7231-5QD32-0XB0 SIPLUS S7-1200 SM 1231 4AI TC 16Bit
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SM 1231 RTD signal module

Overview

- For the convenient recording of temperatures with great accuracy
- 4 inputs
- Most popular resistance temperature detectors can be used
- Can easily be retrofitted to existing plant

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

Article No.

SIPLUS SM 1231 RTD signal module

(Extended temperature range and exposure to environmental substances)

4 inputs for resistance temperature sensors
Pt10/50/100/200/500/1000,
Ni100/120/200/500/1000,
Cu10/50/100, LG-Ni1000;
resistance 150/300/600 Ohm,
resolution 15-bit + sign

- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +70 °C

8 inputs for resistance temperature sensors
Pt10/50/100/200/500/1000,
Ni100/120/200/500/1000,
Cu10/50/100, LG-Ni1000;
resistance 150/300/600 Ohm,
resolution 15-bit + sign

- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C
- For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -40 ... +70 °C

Accessories

6AG1231-5PD32-4XB0

6AG1231-5PD32-2XB0

6AG1231-5PF32-4XB0

6AG1231-5PF32-2XB0

See SIMATIC S7-1200 SM 1231 RTD signal module, page 3/104

Technical specifications

Article number	6AG1231-5PD32-4XB0	6AG1231-5PD32-2XB0	6AG1231-5PF32-4XB0	6AG1231-5PF32-2XB0
Based on	6ES7231-5PD32-0XB0	6ES7231-5PD32-0XB0	6ES7231-5PF32-0XB0	6ES7231-5PF32-0XB0
	SIPLUS S7-1200 SM 1231 4AI RTD 16Bit	SIPLUS S7-1200 SM 1231 4AI RTD 16Bit	SIPLUS S7-1200 SM 1231 8AI RTD 16Bit	SIPLUS S7-1200 SM 1231 8AI RTD 16Bit
Ambient conditions				
Ambient temperature during operation				
• min.	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; = Tmax	70 °C; = Tmax	60 °C; = Tmax	70 °C; = Tmax
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

Technical specifications

Article number	6AG1231-5PD32-4XB0	6AG1231-5PD32-2XB0	6AG1231-5PF32-4XB0	6AG1231-5PF32-2XB0
Based on	6ES7231-5PD32-0XB0	6ES7231-5PD32-0XB0	6ES7231-5PF32-0XB0	6ES7231-5PF32-0XB0
	SIPLUS S7-1200 SM 1231 4AI RTD 16Bit	SIPLUS S7-1200 SM 1231 4AI RTD 16Bit	SIPLUS S7-1200 SM 1231 8AI RTD 16Bit	SIPLUS S7-1200 SM 1231 8AI RTD 16Bit
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS analog modules

SIPLUS SB 1231 RTD signal board

Overview

- For the convenient recording of temperatures with great accuracy
- 1 input with 16-bit resolution
- Common resistance-type temperature detectors can be used
- Can easily be retrofitted to existing plant
- Can be plugged directly into the CPU

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

SIPLUS SB 1231 RTD signal board

(Extended temperature range and exposure to environmental substances)

1 input for resistance temperature sensors Pt 100, Pt 200, Pt 500, Pt 1000, resolution 15-bit + sign

Accessories

Article No.

6AG1231-5PA30-5XB0

See SIMATIC S7-1200 SB 1231 RTD signal board, page 3/107

Technical specifications

Article number	6AG1231-5PA30-5XB0
Based on	6ES7231-5PA30-0XB0 SIPLUS S7-1200 SB 1231 1AI RTD
Ambient conditions	
Ambient temperature during operation	
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *

Article number	6AG1231-5PA30-5XB0
Based on	6ES7231-5PA30-0XB0 SIPLUS S7-1200 SB 1231 1AI RTD
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Overview



- Module for connecting up to 4 IO-Link devices according to IO-Link Specification V1.1. The IO-Link parameters are configured using the Port Configuration Tool (PCT), Version V3.2 and higher.

Ordering data

Article No.

SIMATIC S7-1200, SM1278 IO-Link 4xIO-Link Master	6ES7278-4BD32-0XB0
Accessories	
Terminal block (spare part)	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Digital signal module 8CH/16CH (4 units with 7 screws each)	6ES7292-1AG30-0XA0
SIMATIC S7-1200, spare part, tin-coated I/O terminal block In push-in technology, for digital signal modules 8CH/16CH (4 units with 7 pins each)	6ES7292-2AG30-0XA0

3

Technical specifications

Article number	6ES7278-4BD32-0XB0 S7-1200, SM1278, 4 X IO-Link Master
General information	
Product type designation	SM 1278 4xIO-Link master
Supply voltage	
Rated value (DC)	24 V
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Degree and class of protection	
IP degree of protection	IP20
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
cULus	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
Marine approval	Yes

Article number	6ES7278-4BD32-0XB0 S7-1200, SM1278, 4 X IO-Link Master
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	60 °C
connection method	
required front connector	Yes
Mechanics/material	
Enclosure material (front)	
• Plastic	Yes
Dimensions	
Width	45 mm
Height	100 mm
Depth	75 mm
Weights	
Weight, approx.	150 g

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIPLUS SM 1278 4xIO-Link Master

Overview



- Module for connecting up to 4 IO-Link devices according to IO-Link Specification V1.1. The IO-Link parameters are configured using the Port Configuration Tool (PCT), Version V3.2 and higher.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

SIPLUS SM 1278 4xIO-Link Master signal module

(Extended temperature range and exposure to environmental substances)

- For areas with exceptional exposure to environmental substances (conformal coating)
- 25 ... +70 °C, from +60 ... +70 °C number of simultaneously controllable inputs and outputs max. 50%

Article No.

6AG1278-4BD32-4XB0

6AG1278-4BD32-2XB0

Technical specifications

Article number	6AG1278-4BD32-2XB0	6AG1278-4BD32-4XB0
Based on	6ES7278-4BD32-0XB0 SIPLUS S7-1200 SM 1278 IO-Link Master	6ES7278-4BD32-0XB0 SIPLUS S7-1200 SM 1278 IO-Link Master
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C
• max.	70 °C; = Tmax	60 °C; = Tmax
• At cold restart, min.	-25 °C	0 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Coolants and lubricants		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *

Technical specifications

Article number	6AG1278-4BD32-2XB0	6AG1278-4BD32-4XB0
Based on	6ES7278-4BD32-0XB0 SIPLUS S7-1200 SM 1278 IO-Link Master	6ES7278-4BD32-0XB0 SIPLUS S7-1200 SM 1278 IO-Link Master
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIPLUS CMS1200 SM 1281 Condition Monitoring

Overview



SIPLUS CMS1200 SM 1281 Condition Monitoring forms part of SIMATIC S7-1200 and is used for the:

- Monitoring of motors, generators, pumps, fans, wind mills or other mechanical components
- Recording and analysis of vibrations
- Expansion capability of up to 7 modules

Ordering data

Article No.

SIPLUS CMS1200 SM 1281 Condition Monitoring

6AT8007-1AA10-0AA0

Module for SIMATIC S7-1200 for monitoring vibrations in mechanical components based on characteristic values and frequency-selective analysis functions.

SIPLUS CMS1200 Ready to use Bundle

6AT8007-1AA30-0AA0

Consisting of:

- SM1281 Condition Monitoring
- SM1281 Shield clamp set
- S7-1214C CPU
- S7-1200 Battery Board
- Memory card with TIA project

Accessories

SIPLUS CMS1200 SM 1281 Shield clamp set

6AT8007-1AA20-0AA0

For EMC-compliant connection of signal and encoder cables to SIPLUS CMS1200 SM 1281 Condition Monitoring.

SIPLUS CMS VIB-SENSOR

Piezoelectric sensor for connection to SIPLUS CMS1200 SM 1281 Condition Monitoring.

SIPLUS CMS VIB-Sensor S01, frequency range 0,5 Hz to 15 kHz; measuring range 50G; sensitivity 100 mV/G (+/-10 %); MIL connector on top

6AT8002-4AB00

SIPLUS CMS VIB-Sensor S02, frequency range 1 Hz to 15 kHz; measuring range 500G; sensitivity 10 mV/G (+/-10 %); MIL connector on top

6AT8008-2AA00-0AA0

SIPLUS CMS VIB-Sensor S03, frequency range 0,2 Hz to 3 kHz; measuring range 10G; sensitivity 500 mV/G (+/-10 %); MIL connector on top

6AT8008-2AA02-0AA0

SIPLUS CMS CABLE-MIL

For connection of VIB-SENSOR S01, S02 and S03 vibration sensor to SIPLUS CMS1200 SM 1281 Condition Monitoring.

SIPLUS CMS CABLE-MIL-300; length 3 m

6AT8002-4AC03

SIPLUS CMS CABLE-MIL-1000; length 10 m

6AT8002-4AC10

SIPLUS CMS CABLE-MIL-3000; length 30 m

6AT8008-2BA12-0AA0

Technical specifications

Article number	6AT8007-1AA10-0AA0 SM1281_Condition_Monitoring
General information	
Product type designation	SM1281
Product description	S7-1200 module for the monitoring of vibrations on mechanical components based on parameters and frequency-selective analysis functions
Installation type/mounting	
Mounting type	Rail or wall mounting
Mounting position	Horizontal, vertical
Recommended mounting position	Horizontal
Supply voltage	
Rated value (DC)	24 V
Input current	
Current consumption, typ.	200 mA
Current consumption, max.	250 mA
from backplane bus 5 V DC, typ.	80 mA
from backplane bus 5 V DC, max.	85 mA
Memory	
Total memory capacity	1 Gbyte
Hardware configuration	
Design of hardware configuration	Modular, up to 7 modules per CPU
Digital inputs	
Number of speed inputs	1
Input voltage	
• Rated value (DC)	24 V
Sensor input	
Number of IEPE sensor inputs	4
Sampling frequency, max.	46 875 Hz
Interfaces	
Type of data transmission	Export of raw data as WAV file for further analysis (e.g. using CMS X-Tools) can be downloaded via browser/FTP, online data transfer to CMS X-Tools
Ethernet interface	Yes
Protocols	
Bus communication	Yes
OPC UA	Yes; OPC UA Server
Web server	
• HTTP	Yes
Interrupts/diagnostics/status information	
Alarms	
• Diagnostic alarm	Yes
Diagnostics indication LED	
• for status of the inputs	Yes
• for maintenance	Yes
• Status indicator digital input (green)	No

Article number	6AT8007-1AA10-0AA0 SM1281_Condition_Monitoring
Integrated Functions	
Monitoring functions	
• Monitoring of the sensor inputs	Yes; Cable break and short-circuit
• Vibration characteristic monitoring via RMS value of the vibration speed	Yes
• Vibration characteristic monitoring via RMS value of the vibration acceleration	Yes
• Vibration characteristic monitoring via diagnostic characteristic value	Yes
• Frequency-selective monitoring via vibration speed spectrum	Yes
• Frequency-selective monitoring via vibration acceleration spectrum	Yes
• Frequency-selective monitoring via envelope curve analysis	Yes
Measuring functions	
• Physical measuring principle	Vibration acceleration
Measuring range	
- Measurement range vibration frequency, min.	0.1 Hz
- Measurement range vibration frequency, max.	23 000 Hz
Standards, approvals, certificates	
Certificate of suitability	CE
CE mark	Yes
China RoHS compliance	Yes
Software	
Browser software required	Web browser Mozilla Firefox (ESR31) or Microsoft Internet Explorer (10/11)
connection method	
required front connector	Yes
Design of electrical connection	Screw connection
Mechanics/material	
Material of housing	Plastic: polycarbonate, abbreviation: PC- GF 10 FR
Dimensions	
Width	70 mm
Height	112 mm
Depth	75 mm
Weights	
Weight, approx.	260 g


SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIM 1274 simulator

Overview

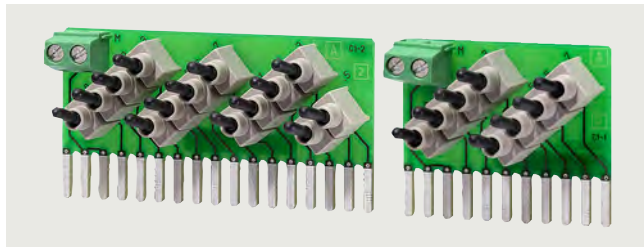

- Simulator module for program testing during commissioning and ongoing operation
- Simulation of 8 or 14 inputs

Ordering data

Article No.

Digital input simulator SIM 1274 simulator module	
SIMATIC S7-1200, SIM 1274 simulator module, for CPU 1211/1212 8 input switches 24 V DC	6ES7274-1XF30-0XA0
SIMATIC S7-1200, SIM 1274 simulator module, for CPU 1214/1215 14 input switches 24 V DC	6ES7274-1XH30-0XA0
SIMATIC S7-1200, SIM 1274 simulator module for CPU 1217C 14 input switches, 10x 24 V DC inputs, 4x 1.5 V differential inputs	6ES7274-1XK30-0XA0
Analog input simulator SIM 1274 simulator module	
SIMATIC S7-1200, SIM 1274 simulator 2 potentiometer inputs	6ES7274-1XA30-0XA0

Technical specifications

Article number	6ES7274-1XF30-0XA0	6ES7274-1XH30-0XA0	6ES7274-1XK30-0XA0	6ES7274-1XA30-0XA0
	S7-1200 Simulator Module SIM1274, 8 Inp	S7-1200 Simulator Module SIM1274, 14 Inp	S7-1200 Simulator S7-1217, 14 inputs	S7-1200 Potentiometer Module, 2 Pot Input
General information				
Product type designation	SIM 1274, 8DI	SIM 1274, 14 DI	SIM 1274, 14 DI	SIM 1274, 2 AI
Supply voltage				
Rated value (DC)	24 V	24 V		
Digital inputs				
Number of digital inputs	8	14	14	0
Digital outputs				
Number of digital outputs	0	0	0	0
Degree and class of protection				
IP degree of protection	IP20	IP20		
Dimensions				
Width	43 mm	67 mm	93 mm	20 mm
Height	35 mm	35 mm	40 mm	33 mm
Depth	23 mm	23 mm	23 mm	14 mm

Overview

- Battery board for extending the power reserve for the S7-1200 real-time clock

Ordering data**Article No.****SIMATIC S7-1200, BB 1297 battery board****6ES7297-0AX30-0XA0**

For long-term buffering of the real-time clock, pluggable in the signal board slot of the S7-12XX (from FW3.0); battery (CR1025) not included in scope of supply

Accessories**Terminal block (spare part)****SIMATIC S7-1200, spare part, gold-plated I/O terminal block****6ES7292-1BF30-0XA0**

For signal board (4 units with 6 screws each)

Technical specifications

Article number	6ES7297-0AX30-0XA0 Battery Board BB 1297 f. CPU 12xx
General information	
Product type designation	BB 1297
Interrupts/diagnostics/status information	
Alarms	Yes
Diagnostics function	Yes
Diagnostics indication LED	
• for maintenance	Yes; The maintenance LED (MAINT) of the PLC signals that the battery needs to be replaced.
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
Marine approval	Yes

Article number	6ES7297-0AX30-0XA0 Battery Board BB 1297 f. CPU 12xx
Ambient conditions	
Free fall	
• Fall height, max.	0.3 m; five times, in product package
Ambient temperature during operation	
• min.	-20 °C
• max.	60 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Air pressure acc. to IEC 60068-2-13	
• Operation, min.	795 hPa
• Operation, max.	1 080 hPa
• Storage/transport, min.	660 hPa
• Storage/transport, max.	1 080 hPa
Relative humidity	
• Operation at 25 °C without condensation, max.	95 %
Mechanics/material	
Enclosure material (front)	
• Plastic	Yes
Dimensions	
Width	38 mm
Height	62 mm
Depth	21 mm
Weights	
Weight, approx.	40 g

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIWAREX WP231 weighing electronics**Overview**

SIWAREX WP231 is a versatile, legal for trade weighing module for all simple weighing and force measuring tasks. The compact module is easy to install in the SIMATIC S7-1200 automation system. It can also be operated without a SIMATIC CPU.

3

Ordering data**Article No.****Article No.****SIWAREX WP231 weighing electronics****7MH4960-2AA01**

Single-channel, legal-for-trade, for NAWI non-automatic weighing instruments (e.g. platform scales or hopper scales) with analog load cells (1–4 mV/V), 1 × LC, 4 × DQ, 4 × DI, 1 × AQ, 1 RS 485, Ethernet port

SIWAREX S7-1200 Equipment Manual

Available in a range of languages

Free download on the Internet at: <http://www.siemens.com/weighing/documentation>

SIWAREX WP231 "Ready-for-use"

Complete software package for non-automatic weighing instrument (for S7-1200 and a directly connected operator panel)

Free download on the Internet at: <http://www.siemens.com/weighing/documentation>

SIWAREX WP231 "Ready-for-use - legal-for-trade"

Software package for non-automatic weighing instruments for S7-1200 requiring official calibration

Free download on the Internet at: <http://www.siemens.com/weighing/documentation>

Software SecureDisplay

Software for a legal trade display on Windows CE-based Panel. SIMATIC Basic and Key Panels are excluded

Free download on the Internet at: <http://www.siemens.com/weighing/documentation>

SIWATOOL V4 & V7

Service and commissioning software for SIWAREX weighing modules

7MH4900-1AK01**Calibration set for SIWAREX WP2xx****7MH4960-0AY10**

Valid for SIWAREX WP231 and SIWAREX WP251.

For verification of up to 3 scales, comprising:

- 3 × inscription foils for ID label
- 1 × protective film
- 3 × calibration protection plates
- Guidelines for verification, certificates and approvals, editable label, SIWAREX WP

Ethernet cable patch cord 2 m (7 ft)**6XV1850-2GH20**

For connecting SIWAREX WP231 to a PC (SIWATOOL), SIMATIC CPU, panel, etc.

Ordering data	Article No.	Article No.
Accessories		
SIWAREX EB extension box For extending sensor cables	7MH4710-2AA	
SIWAREX JB junction box, aluminum housing For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes	7MH5001-0AA20	
SIWAREX JB junction box, stainless steel housing For connecting up to 4 load cells in parallel	7MH5001-0AA00	
SIWAREX JB junction box, stainless steel housing (ATEX) For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate)	7MH5001-0AA01	
SIWAREX DB digital terminal box For enhanced diagnostic and monitoring options in conjunction with SIWAREX WP electronics	7MH5001-0AD20	
SIWAREX IS Ex interface For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately. • Short-circuit current < 199 mA DC • Short-circuit current < 137 mA DC	7MH4710-5BA 7MH4710-5CA	
		Cable (optional)
		Cable Li2Y 1 × 2 × 0.75 ST + 2 × (2 × 0.34 ST) – CY For connecting SIWAREX electronic to junction box (JB), extension box (EB), digital junction box (DB), Ex interface (IS) or between two extension boxes. For permanent installation. Occasional bending is possible. External diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F) Sold by the meter. • Sheath color: orange • Sheath color (for hazardous atmospheres): blue
		7MH4702-8AG 7MH4702-8AF
		Ground terminal for connecting the load cell cable shield to the grounded DIN rail
		6ES5728-8MA11
		Remote display (optional) The digital remote displays can be connected directly to the SIWAREX WP231 via the RS 485 interface. Suitable remote display: S102 Siebert Industrieelektronik GmbH PO Box 1180 D-66565 Eppelborn Tel.: +49 6806/980-0 Fax: +49 6806/980-999 http://www.siebert-group.com/en Detailed information is available from the manufacturer.

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIWAREX WP231 weighing electronics

Technical specifications

SIWAREX WP231	
Integration in automation systems	
S7-1200	SIMATIC S7-1200 system bus
Operator panel and/or automation systems from other vendors	Via Ethernet (Modbus TCP/IP) or RS 485 (Modbus RTU)
Communication interfaces	<ul style="list-style-type: none"> • SIMATIC S7-1200 backplane bus • RS 485 (Modbus RTU, Siebert remote display) • Ethernet (SIWATOOL V7, Modbus TCP/IP) • Analog output 0/4 ... 20 mA • 4 × digital outputs 24 V DC, floating, short-circuit proof • 4 × digital inputs 24 V DC, floating
Commissioning options	<ul style="list-style-type: none"> • Using SIWATOOL V7 • Using function block in SIMATIC S7-1200 CPU / Touch Panel • Using Modbus TCP/IP • Using Modbus RTU
Measuring accuracy	
EC type approval as non-automatic weighing instrument, trade class III	$3000 d \geq 0.5 \mu\text{V/e}$
Error limit according to DIN 1319-1 of full-scale value at $20^\circ\text{C} \pm 10\text{K}$ ($68^\circ\text{F} \pm 10\text{K}$)	0.05%
Internal resolution	Up to ± 4 million parts
Measuring frequency	100 / 120 Hz
Digital filter	Variable adjustable low-pass and average filter
Typical applications	<ul style="list-style-type: none"> • Non-automatic weighing instruments • Force measurements • Fill-level monitoring • Belt tension monitors
Weighing functions	
Weight values	<ul style="list-style-type: none"> • Gross • Net • Tare
Limit values	<ul style="list-style-type: none"> • $2 \times \text{min/max}$ • Empty
Zeroing	Per command
Tare	Per command
Tare specification	Per command

SIWAREX WP231	
Load cells	Full-bridge strain gauges in 4-wire or 6-wire system
Load cell powering	
Supply voltage (regulated via feedback)	4.85 V DC
Permissible load resistance	<ul style="list-style-type: none"> • $R_{L\text{min}}$ > 40 Ω • $R_{L\text{max}}$ < 4 100 Ω
With SIWAREX IS Ex interface	<ul style="list-style-type: none"> • $R_{L\text{min}}$ > 50 Ω • $R_{L\text{max}}$ < 4 100 Ω
Load cell characteristic	1 ... 4 mV/V
Permissible range of the measurement signal (with 4 mV/Vsensors)	-21.3 ... +21.3 mV
Max. distance of load cells	500 m (229.66 ft)
Connection to load cells in Ex zone 1	Optionally via SIWAREX IS Ex interface (compatibility of the load cells must be checked)
Approvals/certificates	<ul style="list-style-type: none"> • ATEX Zone 2 • UL • EAC • KCC • RCM • OIML R76 • Type approval 2009/23/EC (NAWI)
Calibration approval	EC type approval OIML R76
Auxiliary power supply	
Rated voltage	24 V DC
Max. power consumption	200 mA
Max. power consumption SIMATIC Bus	3 mA
IP degree of protection to EN 60529; IEC 60529	IP20
Climatic requirements	
$T_{\text{min(IND)}} \dots T_{\text{max(IND)}}$ (operating temperature)	
• Vertical installation	-10 ... +40 °C (14 ... 104 °F)
• Horizontal installation	-10 ... +55 °C (14 ... 131 °F)
EMC requirements	According to EN 45501
Dimensions	70 × 75 × 100 mm (2.76 × 2.95 × 3.94 inch)

Overview



SIWAREX WP241 is a flexible weighing module for belt scales. The compact module is easy to install in the SIMATIC S7-1200 automation system. It can also be operated as a stand-alone module, i.e. without a SIMATIC CPU.

3

Ordering data	Article No.	Ordering data	Article No.
SIWAREX WP241 weighing electronics Single-channel, for belt scales with analog load cells / full-bridge strain gauges (1 - 4 mV/V), 1 × LC, 4 × DQ, 4 × DI, 1 × AQ, 1 × RS 485, Ethernet port	7MH4960-4AA01	SIWAREX JB junction box, stainless steel housing For connecting up to 4 load cells in parallel	7MH5001-0AA00
SIWAREX S7-1200 Equipment Manual Available in a range of languages Free download on the Internet at: http://www.siemens.com/weighing/documentation		SIWAREX JB junction box, stainless steel housing (ATEX) For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate)	7MH5001-0AA01
SIWAREX WP241 "Ready-for-use" Complete software package for belt scale (for S7-1200 and a directly connected operator panel) Free download on the Internet at: http://www.siemens.com/weighing/documentation		SIWAREX IS Ex interface For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately. <ul style="list-style-type: none"> • Short-circuit current < 199 mA DC • Short-circuit current < 137 mA DC 	7MH4710-5BA 7MH4710-5CA
SIWATOOL V4 & V7 Service and commissioning software for SIWAREX weighing modules	7MH4900-1AK01	Cable (optional) Cable Li2Y 1 × 2 × 0.75 ST + 2 × (2 × 0.34 ST) – CY For connecting SIWAREX electronic to junction box (JB), extension box (EB), digital junction box (DB), Ex interface (IS) or between two extension boxes. For permanent installation. Occasional bending is possible. External diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F)	
Ethernet cable patch cord 2 m (7 ft) For connecting SIWAREX WP241 to a PC (SIWATOOL), SIMATIC CPU, panel, etc.	6XV1850-2GH20	Sold by the meter. <ul style="list-style-type: none"> • Sheath color: orange • Sheath color (for hazardous atmospheres): blue 	7MH4702-8AG 7MH4702-8AF
Accessories		Ground terminal for connecting the load cell cable shield to the grounded DIN rail	6ES5728-8MA11
SIWAREX EB extension box For extending sensor cables	7MH4710-2AA		
SIWAREX JB junction box, aluminum housing For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes	7MH5001-0AA20		

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIWAREX WP241 weighing electronics

Technical specifications

SIWAREX WP241	
Integration in automation systems	
S7-1200	SIMATIC S7-1200 system bus
Operator panel and/or automation systems from other vendors	Via Ethernet (Modbus TCP/IP) or RS 485 (Modbus RTU)
Communication interfaces	<ul style="list-style-type: none"> • SIMATIC S7-1200 backplane bus • RS 485 (Modbus RTU) • Ethernet (SIWATOOL V7, Modbus TCP/IP) • Analog output 0/4 - 20 mA • 4 × digital outputs, 24 V DC, floating, short-circuit proof • 4 × digital inputs 24 V DC, floating
Commissioning options	<ul style="list-style-type: none"> • Using SIWATOOL V7 • Using function block in SIMATIC S7-1200 CPU / Touch Panel • Using Modbus TCP/IP • Using Modbus RTU
Measuring accuracy	
Error limit according to DIN 1319-1 of full-scale value at 20 °C ± 10 K (68 °F ± 10 K)	0.05%
Internal resolution	Up to ± 4 million parts
Measuring frequency	100 / 120 Hz
Digital filter	Separate, variable adjustable low-pass and average filter for loading and speed
Filter for conveyor load	Low-pass filter (limit frequency 0.05 ... 50 Hz)
Filter for belt speed	Low-pass filter (limit frequency 0.05 ... 50 Hz)
Weighing functions	
Readout data	<ul style="list-style-type: none"> • Weight • Belt load • Material flow rate • Accumulated total • Main total • Free totals 1 ... 4 • Belt speed
Limits (min/max)	<ul style="list-style-type: none"> • Belt load • Material flow rate • Belt speed

SIWAREX WP241	
Load cells	Full-bridge strain gauges in 4-wire or 6-wire system
Load cell powering	
Supply voltage (regulated via feedback)	4.85 V DC
Permissible load resistance	
• R_{Lmin}	> 40 Ω
• R_{Lmax}	< 4 100 Ω
With SIWAREX IS Ex interface	
• R_{Lmin}	> 50 Ω
• R_{Lmax}	< 4 100 Ω
Load cell characteristic	1 ... 4 mV/V
Permissible measurement signal range	-21.3 ... +21.3 mV
Max. distance of load cells	500 m (229.66 ft)
Connection to load cells in Ex zone 1	Optionally via SIWAREX IS Ex interface (compatibility of the load cells must be checked)
Approvals/certificates	<ul style="list-style-type: none"> • ATEX Zone 2 • UL • EAC • KCC • RCM
Auxiliary power supply	
Rated voltage	24 V DC
Max. power consumption	200 mA
Max. power consumption SIMATIC Bus	3 mA
IP degree of protection to EN 60529; IEC 60529	IP20
Climatic requirements	
$T_{min(IND)}$... $T_{max(IND)}$ (operating temperature)	
• Vertical installation	-10 ... +40 °C (14 ... 104 °F)
• Horizontal installation	-10 ... +55 °C (14 ... 131 °F)
EMC requirements	According to EN 45501
Dimensions	70 × 75 × 100 mm (2.76 × 2.95 × 3.94 inch)

Overview



SIWAREX WP251 is a flexible weighing module for dosing and filling processes. The compact module can be installed seamlessly in the SIMATIC S7-1200 automation system. It can also be used without a SIMATIC CPU in stand-alone mode.

3

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SIWAREX WP251 weighing electronics Single-channel, legal-for-trade, for automatic dosing and filling scales (AGFI, ACI, NAWI) with analog load cells / full-bridge strain gauges (1 - 4 mV/V), 1 × LC, 4 × DQ, 4 × DI, 1 × AQ, 1 × RS 485, Ethernet port	7MH4960-6AA01	Ethernet cable patch cord 2 m (7 ft) For connecting SIWAREX WP251 to a PC (SIWATOOL), SIMATIC CPU, panel, etc.	6XV1850-2GH20
SIWAREX WP251 Equipment Manual Available in a range of languages Free download on the Internet at: http://www.siemens.com/weighing/documentation		Accessories SIWAREX EB extension box For extending sensor cables	7MH4710-2AA
SIWAREX WP251 "Ready-for-use" Free download on the Internet at: http://www.siemens.com/weighing/documentation		SIWAREX JB junction box, aluminum housing For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes	7MH5001-0AA20
SIWATOOL V4 & V7 Service and commissioning software for SIWAREX weighing modules	7MH4900-1AK01	SIWAREX JB junction box, stainless steel housing For connecting up to 4 load cells in parallel	7MH5001-0AA00
Calibration set for SIWAREX WP2xx Valid for SIWAREX WP231 and SIWAREX WP251. For verification of up to 3 scales, comprising: <ul style="list-style-type: none"> • 3 × inscription foils for ID label • 1 × protective film • 3 × calibration protection plates • Guidelines for verification, certificates and approvals, editable label, SIWAREX WP 	7MH4960-0AY10	SIWAREX JB junction box, stainless steel housing (ATEX) For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate)	7MH5001-0AA01
		SIWAREX IS Ex interface For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately <ul style="list-style-type: none"> • Short-circuit current < 199 mA DC • Short-circuit current < 137 mA DC 	7MH4710-5BA 7MH4710-5CA

SIMATIC S7-1200 Basic Controllers

I/O modules

Special modules

SIWAREX WP251 weighing electronics**Ordering data****Article No.****Article No.****Cable (optional)****Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) – CY**

For connecting SIWAREX electronic to junction box (JB), extension box (EB), digital junction box (DB), Ex interface (IS) or between two extension boxes.

For permanent installation. Occasional bending is possible.

External diameter: approx. 10.8 mm (0.43 inch)

Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F)

Sold by the meter.

- Sheath color: orange
- Sheath color (for hazardous atmospheres): blue

7MH4702-8AG**7MH4702-8AF****Ground terminal for connecting the load cell cable shield to the grounded DIN rail****6ES5728-8MA11****Remote display (optional)**

The digital remote displays can be connected directly to the SIWAREX WP251 via the RS 485 interface

Suitable remote display: S102

Siebert Industrieelektronik GmbH

PO Box 1180

D-66565 Eppelborn

Tel.: +49 6806/980-0

Fax: +49 6806/980-999

Internet:

<https://www.siebert-group.com/en/>

Detailed information is available from the manufacturer.

Technical specifications

SIWAREX WP251		SIWAREX WP251	
Weighing modes	<ul style="list-style-type: none"> Non automatic weighing instrument (NAWI) (filling + removal) (legal-for-trade in accordance with OIML R76) Catchweighing instrument (CWI) (filling + removal) (legal-for-trade in accordance with OIML R51) Gravimetric filling instrument (GFI) (legal-for-trade in accordance with OIML R61) Discontinuous totalizing automatic weighing instrument (DTI) - (legal-for-trade in accordance with OIML R107) 	Number of measurements/second	100 or 120 (selectable)
Integration in automation systems		Filter	<ul style="list-style-type: none"> Low-pass filter 0.1 ... 50 Hz Average value filter
S7-1200	SIMATIC S7-1200 system bus	Load cells	Strain gauges in 4-wire or 6-wire system
Operator panel and/or automation systems from other vendors	Via Ethernet (Modbus TCP/IP) or RS 485 (Modbus RTU)	Load cell powering	
Ports	<ul style="list-style-type: none"> 1 × SIMATIC S7-1200 system bus 1 × Ethernet (SIWATOOL and Modbus TCP/IP) 1 × RS 485 (Modbus RTU or remote display) 1 × analog output (0/4 - 20 mA) 4 × digital inputs (24 V DC, floating) 4 × digital outputs (24 V DC, floating, short-circuit proof) 	Supply voltage (regulated via feedback)	4.85 V DC
Functions	<ul style="list-style-type: none"> 3 limits Tare Tare specification Zeroing Zero adjustment Statistics Automatic correction of the shut-off points Internal protocol memory for 550 000 entries Trace function for signal analysis Internal restore point Stand-alone mode or SIMATIC S7-1200 integrated 	Permissible load resistance	<ul style="list-style-type: none"> R_{Lmin} > 40 Ω R_{Lmax} < 4 100 Ω
Parameter assignment	<ul style="list-style-type: none"> Full access using function block in SIMATIC S7-1200 Full access using Modbus TCP/IP Full access using Modbus RTU 	With SIWAREX IS Ex interface	<ul style="list-style-type: none"> R_{Lmin} > 50 Ω R_{Lmax} < 4 100 Ω
Remote display		Load cell characteristic	1 ... 4 mV/V
Connection	Via RS 485	Permissible range of the measurement signal (with 4 mV/V sensors)	-21.3 ... +21.3 mV
Scale adjustment	PC software SIWATOOL (Ethernet), S7-1200 function block and touch panel or directly connected operator panel (Modbus)	Max. distance of load cells	500 m (229.66 ft)
Measuring accuracy		Connection to load cells in Ex zone 1	Optionally via SIWAREX IS Ex interface
Error limit according to DIN 1319-1 of full-scale value at 20 °C ± 10 K (68 °F ± 10 K)	0.05%	Certificates	<ul style="list-style-type: none"> ATEX Zone 2 UL KCC EAC RCM
Internal resolution	Up to ± 4 million parts	Calibration approvals	<ul style="list-style-type: none"> EU type-examination certificate 2014/31/EU (NAWI) according to OIML R76 EU type-examination certificate 2014/32/EU (MID) according to OIML R61 and OIML R51 EU type-examination certificates 2014/32/EU (MID) according to OIML R107
		Auxiliary power supply	
		Rated voltage	24 V DC
		Max. power consumption	200 mA
		Max. power consumption SIMATIC Bus	3 mA
		IP degree of protection to EN 60529; IEC 60529	IP20
		Climatic requirements	
		$T_{min(IND)} \dots T_{max(IND)}$ (operating temperature)	
		• Vertical installation	-10 ... +40 °C (14 ... 104 °F)
		• Horizontal installation	-10 ... +55 °C (14 ... 131 °F)
		EMC requirements	According to EN 45501
		Dimensions	70 × 75 × 100 mm (2.76 × 2.95 × 3.94 inch)

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CM 1241 communications module

Overview



- For quick, high-performance serial data exchange via point-to-point connection
- Implemented protocols: ASCII, USS drive protocol, Modbus RTU, 3964(R)
- Additional protocols can also be loaded
- Simple parameterization with STEP 7 Basic

Ordering data

Article No.

CM 1241 communications module	
SIMATIC S7-1200, CM 1241 communications module, RS422/485	6ES7241-1CH32-0XB0
9-pin sub-D (female) supports Freeport	
SIMATIC S7-1200, CM 1241 communications module, RS-232	6ES7241-1AH32-0XB0
9-pin sub-D (pin), supports Freeport	
Accessories	
Front flap set (spare part)	
SIMATIC S7-1200, spare part front flaps communication modules	6ES7291-1CC30-0XA0
(Communications module front flap bottom & top) 4 units each	

Technical specifications

Article number	6ES7241-1CH32-0XB0	6ES7241-1AH32-0XB0
	Communication Module CM 1241, RS422/485	Communication Module CM 1241, RS232
General information		
Product type designation	CM 1241 RS 422 / 485	CM 1241 RS 232
Supply voltage		
Rated value (DC)	24 V	24 V
Input current		
Current consumption, max.	220 mA; From backplane bus 5 V DC	200 mA; From backplane bus 5 V DC
Interfaces		
Interfaces/bus type	RS 422 / 485 (X.27)	RS 232C (V.24)
Number of interfaces	1	1
Point-to-point connection		
• Cable length, max.	1 000 m	10 m
Integrated protocol driver		
- Freeport	Yes	Yes
- ASCII	Yes; Available as library function	Yes; Available as library function
- Modbus RTU master	Yes	Yes
- Modbus RTU slave	Yes	Yes
- USS	Yes; Available as library function	

Technical specifications

Article number	6ES7241-1CH32-0XB0 Communication Module CM 1241, RS422/485	6ES7241-1AH32-0XB0 Communication Module CM 1241, RS232
Protocols		
Integrated protocols		
Freeport		
- Telegram length, max.	1 kbyte	1 kbyte
- Bits per character	7 or 8	7 or 8
- Number of stop bits	1 (Standard), 2	1 (Standard), 2
- Parity	No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0)	No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0)
3964 (R)		
- Telegram length, max.	1 kbyte	1 kbyte
- Bits per character	7 or 8	7 or 8
- Number of stop bits	1 (Standard), 2	1 (Standard), 2
- Parity	No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0)	No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0)
Modbus RTU master		
- Address area	1 through 49 999 (Standard Modbus addressing)	1 through 49 999 (Standard Modbus addressing)
- Number of slaves, max.	247; slave numbers 1 through 247, per MODBUS network segment maximum 32 devices, additional repeaters needed to expand the network to maximum configuration	247; slave numbers 1 through 247, per MODBUS network segment maximum 32 devices, additional repeaters needed to expand the network to maximum configuration
MODBUS RTU slave		
- Address area	1 through 49 999 (Standard Modbus addressing)	1 through 49 999 (Standard Modbus addressing)
Interrupts/diagnostics/status information		
Diagnostics function	Yes	Yes
Diagnostics indication LED		
• for status of the outputs	Yes	Yes
Degree and class of protection		
IP degree of protection	IP20	IP20
Standards, approvals, certificates		
CE mark	Yes	Yes
CSA approval	Yes	Yes
UL approval	Yes	Yes
cULus	Yes	Yes
FM approval	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes
KC approval	Yes	Yes
Marine approval	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C	-20 °C
• max.	60 °C	60 °C
Dimensions		
Width	30 mm	30 mm
Height	100 mm	100 mm
Depth	75 mm	75 mm
Weights		
Weight, approx.	155 g	150 g

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CB 1241 RS485 communication board

Overview

- For fast, high-performance serial data exchange via point-to-point connection
- Implemented protocols: ASCII, USS drive protocol, Modbus RTU
- Additional protocols can be loaded later
- Simple parameterization with STEP 7 Basic
- Can be plugged directly into the CPU

Ordering data

Article No.

SIMATIC S7-1200, CB 1241 communication board

RS-485, terminal block, supports Freeport

6ES7241-1CH30-1XB0

Accessories

Terminal block (spare part)

SIMATIC S7-1200, spare part, gold-plated I/O terminal block

For signal board (4 units with 6 screws each)

6ES7292-1BF30-0XA0

Technical specifications

Article number	6ES7241-1CH30-1XB0 Communication Board CB 1241, RS485
General information	
Product type designation	CB 1241 RS 485
Input current	
from backplane bus 5 V DC, typ.	50 mA
Interfaces	
Point-to-point connection	
• Cable length, max.	1 000 m
Integrated protocol driver	
- Freeport	Yes
- ASCII	Yes; Available as library function
- Modbus RTU master	Yes
- MODBUS RTU slave	Yes
- USS	Yes; Available as library function
Protocols	
Integrated protocols	
Freeport	
- Telegram length, max.	1 kbyte
- Bits per character	7 or 8
- Number of stop bits	1 (Standard), 2
- Parity	No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0)
3964 (R)	
- Telegram length, max.	1 kbyte
- Bits per character	7 or 8
- Number of stop bits	1 (Standard), 2
- Parity	No parity (standard); even, uneven, mark (parity bit always 1); space (parity bit always 0)
Modbus RTU master	
- Address area	1 through 49 999 (Standard Modbus addressing)
- Number of slaves, max.	247; slave numbers 1 through 247, per MODBUS network segment maximum 32 devices, additional repeaters needed to expand the network to maximum configuration
MODBUS RTU slave	
- Address area	1 through 49 999 (Standard Modbus addressing)

Article number	6ES7241-1CH30-1XB0 Communication Board CB 1241, RS485
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Degree and class of protection	
IP degree of protection	IP20
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
cULus	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
Marine approval	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	60 °C
Mechanics/material	
Enclosure material (front)	
• Plastic	Yes
Dimensions	
Width	38 mm
Height	62 mm
Depth	21 mm
Weights	
Weight, approx.	40 g

Overview



DP-M	DP-S	FMS	PG/OP	S7
	●			

G. IRIKID_XX_10322

The CM 1242-5 communications module is used to connect a SIMATIC S7-1200 to PROFIBUS as a DP slave and has the following characteristics:

- PROFIBUS DPV1 slave in accordance with IEC 61158
- Module replacement without PG supported
- Power is supplied via the backplane bus so that no extra cabling is required
- Support of all standard baud rates from 9.6 kbps to 12 Mbps
- Compact industry-standard enclosure in S7-1200 design for mounting on a DIN rail
- Fast commissioning thanks to easy configuration using STEP 7 without additional programming overhead

The CM 1242-5 is intended for use in factory automation. Low-cost PROFIBUS-based automation solutions can be created on the basis of the SIMATIC S7-1200 for optimal production.

Ordering data

Article No.

CM 1242-5**communications module**

Communications module for electrical connection of SIMATIC S7-1200 to PROFIBUS as a DP slave module

6GK7242-5DX30-0XE0**PROFIBUS FastConnect RS485 connection plug**

With 90° cable outlet; with insulation displacement terminals, max. transfer rate 12 Mbps

- Without programming device interface
- With programming device interface

6ES7972-0BA52-0XA0**6ES7972-0BB52-0XA0****PROFIBUS FC standard cable**

2-core bus cable, shielded, special design for fast installation, sold by the meter; delivery unit: max. 1000 m, minimum order quantity 20 m

6XV1830-0EH10**PROFIBUS FastConnect stripping tool**

Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable

6GK1905-6AA00**PROFIBUS bus terminal 12M**

Bus terminal for connection of PROFIBUS stations up to 12 Mbps with connecting cable

6GK1500-0AA10

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication


CM 1242-5

Technical specifications

Article number	6GK7242-5DX30-0XE0
product type designation	CM 1242-5
transfer rate	
transfer rate	
• at the 1st interface according to PROFIBUS	9.6 kbit/s ... 12 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	0
number of electrical connections	
• at the 1st interface according to PROFIBUS	1
• for power supply	0
type of electrical connection	
• at the 1st interface according to PROFIBUS	9-pin Sub-D socket (RS485)
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	5 V
consumed current	
• from backplane bus at DC at 5 V typical	0.15 A
power loss [W]	0.75 W
ambient conditions	
ambient temperature	
• for vertical installation during operation	0 ... 45 °C
• for horizontally arranged busbars during operation	0 ... 55 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-1200 single width
width	30 mm
height	100 mm
depth	75 mm
net weight	0.115 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes
• S7-300 rail mounting	No
• wall mounting	Yes

Article number	6GK7242-5DX30-0XE0
product type designation	CM 1242-5
product features, product functions, product components general	
number of units	
• per CPU maximum	3
performance data PROFIBUS DP	
service as DP slave	
• DPV0	Yes
• DPV1	Yes
data volume	
• of the address range of the inputs as DP slave total	240 byte
• of the address range of the outputs as DP slave total	240 byte
performance data telecontrol	
protocol is supported	
• TCP/IP	No
product functions management, configuration, engineering	
configuration software	
• required	STEP 7 Basic/Professional
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
• total	89.58 kg
• during manufacturing	14.29 kg
• during operation	75.11 kg
• after end of life	0.18 kg
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

3

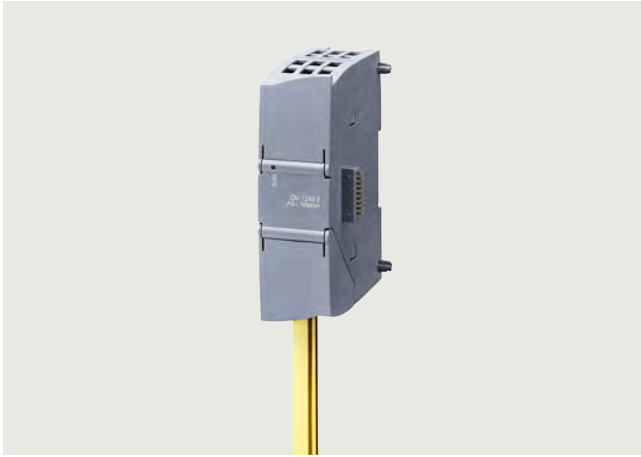Overview

CM 1243-2 communications module for S7-1200

More information

Equipment Manual for AS-i Master CM 1243-2 and AS-i DCM 1271 data decoupling module

see <https://support.industry.siemens.com/cs/ww/en/view/57358958>

AS-Interface I/O modules and other AS-Interface system components see catalog IC 10 <https://www.siemens.com/ic10>

More information see <https://www.siemens.com/as-interface>

The CM 1243-2 communications module is the AS-Interface master for the SIMATIC S7-1200 and has the following features:

- Connection of up to 62 AS-Interface slaves
- Integrated analog value transmission
- Supports all AS-Interface master functions in accordance with the AS-Interface specification V3.0
- Indication of the operating state on the front of the device displayed via LED
- Display of operating mode, AS-Interface voltage faults, configuration faults and peripheral faults via LED behind the front panel
- Compact enclosure in the design of the SIMATIC S7-1200
- Suitable for AS-Interface with 30 V voltage and for AS-i Power 24 V: A standard 24 V power supply unit can be used in combination with the optional DCM 1271 data decoupling module.
- Configuration and diagnostics via the TIA Portal
- Improved performance with current firmware version V1.2

Design

The CM 1243-2 communications module is positioned to the left of the S7-1200 CPU and linked to the S7-1200 via lateral contacts.

It has:

- Terminals for two AS-i cables (internally jumpered) via two screw terminals
- One terminal for connection to the functional ground
- LEDs for indication of the operating state and fault statuses of the connected slaves

The screw terminals (included in scope of supply) can be removed to facilitate installation.

Function

The CM 1243-2 supports all specified functions of the AS-Interface specification V3.0.

The values of the digital AS-i slaves can be activated via the process image of the S7-1200. During configuration of the slaves in the TIA Portal, the values of the analog AS-i slaves can also be accessed directly in the process image.

If required, master calls can be performed with the data record interface, e.g. read/write parameters, read/write configuration.

Changeover of the operating mode, automatic application of the slave configuration and the re-addressing of a connected AS-i slave can be implemented via the control panel of the CM 1243-2 in the TIA Portal.

The optional DCM 1271 data decoupling module (see page 3/144) has an integrated detection unit for detecting ground faults on the AS-Interface cable. The integrated overload protection also disconnects the AS-Interface cable if the drive current required exceeds 4 A. For more information on DCM 1271, see page 3/145.

Notes on security

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens products and solutions represent one component of such a concept.

For more information about the subject of industrial cybersecurity, see <https://www.siemens.com/cybersecurity-industry>.

Configuration

The TIA Portal enables user-friendly configuration and diagnostics of the AS-Interface master and any connected slaves.

When operated on a S7-1200 CPU with firmware version V4.0 or higher, the firmware version V1.1 (or higher) is required for the CM 1243-2.

Benefits

- More flexibility and versatility in the use of SIMATIC S7-1200 as the result of a significant increase in the number of digital and analog inputs/outputs available
- Very easy configuration and diagnostics of the AS-Interface via the TIA Portal
- Simple operation with AS-Interface power supply unit (see <https://mall.industry.siemens.com/mall/en/WWW/Catalog/Products/8200165?tree=CatalogTree>) possible without restrictions.
- Alternatively: No need for the AS-i power supply unit with AS-i Power24V. The AS-Interface cable is supplied through an existing 24 V DC PELV power supply unit. For decoupling, the AS-i DCM 1271 data decoupling module is required, see Accessories, page 3/144 and from page 3/145.
- LEDs for indication of fault statuses for fast diagnostics
- Monitoring of AS-Interface voltage facilitates diagnostics

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

AS-Interface communication > CM 1243-2 AS-i Master

Application

The CM 1243-2 is the AS-Interface master connection for the SIMATIC S7-1200. Through connection to AS-Interface, the number of digital inputs and outputs available for the S7-1200 is greatly increased (max. 496 DI/496 DQ on the AS-Interface per CM).

The integrated analog value processing also makes the analog values available at the AS-Interface for the S7-1200. Up to 31 analog slaves with a standard address (each with up to four channels) or up to 62 analog slaves with an A/B address (each with up to two channels) are possible per CM.

Operating conditions

- The CM 1243-2 communications module exchanges data with the S7-1200 CPU with a cycle time of 10 ms.
- The AS-i cycle time depends on the AS-i bus capacity and is up to 5 ms in the case of 31 slave addresses; for more information, see manual AS-i Master CM 1243-2 and AS-i DCM 1271 data decoupling module, <https://support.industry.siemens.com/cs/ww/en/view/57358958>.
- For calculation of the maximum switching frequency at inputs/outputs of AS-i slaves, these cycle times and the runtime of the user program must be added up.

Ordering data

Article No.

CM 1243-2 communications module 3RK7243-2AA30-0XB0

- AS-Interface master for SIMATIC S7-1200
- Corresponds to AS-Interface specification V3.0
- With screw terminals, removable terminals (included in the scope of supply)
- Dimensions (W x H x D) mm: 30 x 100 x 75

Note:

The CM 1243-2 communications module is available as a SIPLUS version under Article No. 6AG1243-2AA30-7XB0 in the extended temperature range (from -25 to +70 °C) and for use in harsh environmental conditions (coated according to environment standard IEC 60721).

For more information, see page 3/166.

Accessories

DCM 1271 data decoupling module 3RK7271-1AA30-0AA0

- Max. current: 1 x 4 A
- With screw terminals, removable terminals (included in the scope of supply)
- Dimensions (W x H x D) mm: 30 x 100 x 75

Screw terminals (spare part)

- With screw terminals, 5-pole
For AS-i Master CM 1243-2 and AS-i DCM 1271 data decoupling module
- With screw terminals, 3-pole
For AS-i DCM 1271 data decoupling module for connecting the power supply unit

3RK1901-3MA00

3RK1901-3MB00

AS-Interface addressing unit V3.0 3RK1904-2AB02

- For AS-Interface modules and sensors and actuators with integrated AS-Interface according to AS-i specification V3.0
- For setting the AS-i address of standard slaves, and slaves with extended addressing mode (A/B slaves)
- With input/output test function and many other commissioning functions
- Battery operation with four type AA batteries (IEC LR6, NEDA 15)
- Degree of protection IP40
- Dimensions (W x H x D) mm: 84 x 195 x 35
- Scope of supply:
 - Addressing unit with four batteries
 - Addressing cable, with M12 plug to addressing plug (hollow plug), length 1.5 m

3RK1904-2AB02

Overview

DCM 1271 data decoupling module for SIMATIC S7-1200

More information

Manual for AS-i Master CM 1243-2 and AS-i DCM 1271 data decoupling module, see <https://support.industry.siemens.com/cs/ww/en/view/57358958>

More information on AS-i Power24V, see <https://support.industry.siemens.com/cs/ww/en/view/26250840>

AS-Interface I/O modules and other AS-Interface system components see catalog IC 10, <https://www.siemens.com/ic10>

More information see <https://www.siemens.com/as-interface>

With the aid of the DCM 1271 data decoupling module, the AS-Interface network can also be supplied with 24 V DC or 30 V DC from a standard power supply unit and the transmission of data and power can be implemented on one cable.

The DCM 1271 data decoupling module has the same type of enclosure as an S7-1200 module and can therefore be perfectly combined with the AS-i Master CM 1243-2.

The DCM 1271 data decoupling module has no connection to the backplane bus of the SIMATIC S7-1200 and is therefore not counted as a communications module for the calculation of the maximum configuration.

Features of the DCM 1271 data decoupling module

- Design: S7-1200, width 30 mm, degree of protection IP20
- Detachable terminals (included in scope of supply)
- Single data decoupling
- Supply of several AS-i networks with a single power supply unit
- Operation with 24 V DC or 30 V DC, grounded or non-grounded
- Current limiting at 4 A
- Integrated ground-fault detection
- Diagnostic LEDs for ground faults and overloads
- Signaling contact for ground-fault detection

Ground-fault detection

The integrated ground-fault detection functions with grounded and non-grounded power supply: The connection of negative pole and ground (upstream from the data decoupling module) customary with 24 V DC power supplies is permitted. A ground fault to the negative or positive pole on the AS-Interface network (behind the data decoupling module) is identified and signaled via LED and a transistor output.

Benefits

- An existing standard power supply unit with 24 V DC or 30 V DC can be used for supplying AS-i networks
- The AS-Interface system can also be used in tightly budgeted applications because no AS-Interface power supply unit needs to be purchased
- Applications benefit in addition from the advantages of a modern bus system:
 - High level of standardization
 - Additional diagnostics and maintenance information
 - Faster commissioning

Application

The AS-Interface data decoupling module is designed for AS-Interface networks with 30 V or 24 V supply (AS-i Power24V).

Operation of an AS-i network with the data decoupling module and a 30 V standard power supply unit is technically equivalent to the use of an AS-Interface power supply unit and offers the service-proven features of AS-Interface for all applications.

AS-i Power24V uses a 24 V power supply unit in conjunction with a data decoupling module and is particularly suitable for

- Compact machines using AS-Interface input/output modules
- Applications in the control cabinet for AS-Interface integration of SIRIUS 3RT2 contactors using 3RA27 function modules

Note:

The power supply units must comply with the ES1 (IEC 62368-1) or PELV (Protective Extra Low Voltage)/SELV (Safety Extra Low Voltage) standards, have a residual ripple of < 250 mV_{pp}, and must limit the output voltage to a maximum of 40 V in the event of a fault.

We recommend

- SITOP power supplies, see [catalog KT 10.1, https://support.industry.siemens.com/cs/ww/en/view/109745655](https://support.industry.siemens.com/cs/ww/en/view/109745655)
- PSN130S 30 V power supply units, see <https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/10174512?tree=CatalogTree>.

Note on AS-i Power24V:

The length of an AS-i Power24V network is restricted to 50 m in order to limit the voltage drop along the cable.

AS-i masters, AS-i slaves and the sensors and actuators supplied through the AS-i cable must be designed for the reduced voltage. Sensors and actuators for the standard voltage range of 10 to 30 V can be supplied with sufficient voltage.

Please also observe the requirements specified in "AS-i Power24V" for the operation of an AS-i Power24V network, see <https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/10057530?tree=CatalogTree>.


More information on AS-i Power24V, see System Manual for AS-Interface, <https://support.industry.siemens.com/cs/ww/en/view/26250840>.

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

AS-Interface communication > DCM 1271 data decoupling module

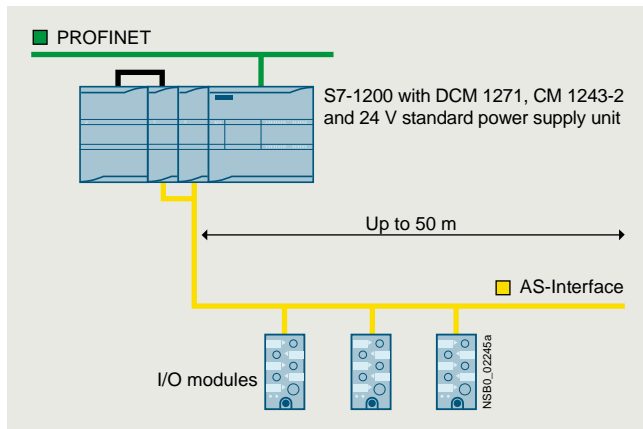

Configuration of an AS-i Power24V network with AS-Interface DCM 1271 data decoupling module

Ordering data	Article No.
DCM 1271 data decoupling module <ul style="list-style-type: none"> • Max. current: 1 x 4 A • With screw terminals, removable terminals (included in the scope of supply) • Dimensions (W x H x D) mm: 30 x 100 x 75 	3RK7271-1AA30-0AA0
Accessories	
Screw terminals (spare part) <ul style="list-style-type: none"> • With screw terminals, 5-pole For AS-i Master CM 1243-2 and AS-i DCM 1271 data decoupling module • With screw terminals, 3-pole For AS-i DCM 1271 data decoupling module for connecting the power supply unit 	3RK1901-3MA00 3RK1901-3MB00
CM 1243-2 communications module <ul style="list-style-type: none"> • AS-Interface master for SIMATIC S7-1200 • Corresponds to AS-Interface specification V3.0 • With screw terminals, removable terminals (included in the scope of supply) • Dimensions (W x H x D) mm: 30 x 100 x 75 <p>For more information, see page 3/143.</p>	3RK7243-2AA30-0XB0

Overview



DP-M	DP-S	FMS	PG/OP	S7
●			●	●

G_1K10_XX-1023

The CM 1243-5 communications module is used to connect a SIMATIC S7-1200 to PROFIBUS as a DP master and has the following characteristics:

- PROFIBUS DP-V1 master in accordance with IEC 61158
- Support of up to 16 PROFIBUS DP slaves
- Communication with other S7 controllers based on S7 communication
- Allows programming devices and operator panels with PROFIBUS interfaces to be connected to the SIMATIC S7-1200
- Module replacement without PG supported
- Support of all standard baud rates from 9.6 kbps to 12 Mbps
- Compact industrial enclosure in SIMATIC S7-1200 design for mounting on a standard DIN rail
- Fast commissioning thanks to easy configuration using STEP 7 without additional programming overhead

The CM 1243-5 is intended for use in factory automation. Low-cost PROFIBUS-based automation solutions can be created on the basis of the SIMATIC S7-1200 for optimal production.

Ordering data

Article No.

CM 1243-5**communications module**

Communications module for electrical connection of SIMATIC S7-1200 to PROFIBUS as a DPV1 master

6GK7243-5DX30-0XE0**PROFIBUS FastConnect RS485 connection plug**

With 90° cable outlet; with insulation displacement terminals, max. transfer rate 12 Mbps

- Without programming device interface
- With programming device interface

6ES7972-0BA52-0XA0**6ES7972-0BB52-0XA0****PROFIBUS FC standard cable**

2-core bus cable, shielded, special design for fast installation, sold by the meter; delivery unit: max. 1000 m, minimum order quantity 20 m

6XV1830-0EH10**PROFIBUS FastConnect stripping tool**

Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable

6GK1905-6AA00**PROFIBUS bus terminal 12M**

Bus terminal for connection of PROFIBUS stations up to 12 Mbps with connecting cable

6GK1500-0AA10

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CM 1243-5

Technical specifications

Article number	6GK7243-5DX30-0XE0
product type designation	CM 1243-5
transfer rate	
transfer rate	
• at the 1st interface according to PROFIBUS	9.6 kbit/s ... 12 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	0
number of electrical connections	
• at the 1st interface according to PROFIBUS	1
• for power supply	1
type of electrical connection	
• at the 1st interface according to PROFIBUS	9-pin Sub-D socket (RS485)
• for power supply	3-pole terminal block
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage external	24 V
supply voltage external at DC rated value	24 V
relative positive tolerance at DC at 24 V	20 %
relative negative tolerance at DC at 24 V	20 %
consumed current	
• from external supply voltage at DC at 24 V typical	0.1 A
power loss [W]	2.4 W
ambient conditions	
ambient temperature	
• for vertical installation during operation	0 ... 45 °C
• for horizontally arranged busbars during operation	0 ... 55 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-1200 single width
width	30 mm
height	100 mm
depth	75 mm
net weight	0.134 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes
• S7-300 rail mounting	No
• wall mounting	Yes
product features, product functions, product components general	
number of units	
• per CPU maximum	3

Article number	6GK7243-5DX30-0XE0
product type designation	CM 1243-5
performance data PROFIBUS DP	
service as DP master	
• DPV1	Yes
number of DP slaves	
• on DP master operable	32
data volume	
• of the address range of the inputs as DP master total	512 byte
• of the address range of the outputs as DP master total	512 byte
• of the address range of the inputs per DP slave	244 byte
• of the address range of the outputs per DP slave	244 byte
• of the address range of the diagnostic data per DP slave	240 byte
service as DP slave	
• DPV0	No
• DPV1	No
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	8; max. 4 connections to other S7 stations
• with PG connections maximum	1
• with PG/OP connections maximum	3
performance data multi-protocol mode	
number of active connections with multi-protocol mode	
• without DP maximum	8
• with DP maximum	8
performance data telecontrol	
protocol is supported	
• TCP/IP	No
product functions management, configuration, engineering	
configuration software	
• required	STEP 7 Basic/Professional
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
• total	89.58 kg
• during manufacturing	14.29 kg
• during operation	75.11 kg
• after end of life	0.18 kg
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

Overview



- Unmanaged switch for connecting a SIMATIC S7-1200 to an Industrial Ethernet network with a line, tree or star topology
- Multiplication of Ethernet interfaces on a SIMATIC S7-1200 for additional connection of up to three programming devices, operator controls, and further Ethernet nodes
- Simple, space-saving mounting on the SIMATIC S7-1200 DIN rail
- Low-cost solution for implementing small, local Ethernet networks
- Connection without any problems using RJ45 standard plug connectors
- Simple and fast status display via LEDs on the device
- Integral autocrossover function permits use of uncrossed connecting cables

Ordering data

Article No.

CSM 1277 compact switch module Unmanaged switch for connecting a SIMATIC S7-1200 and up to three further stations to Industrial Ethernet with 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, LED diagnostics, S7-1200 module including electronic Equipment Manual on CD-ROM	6GK7277-1AA10-0AA0
SIPLUS NET CSM 1277 compact switch module Unmanaged switch for connecting a SIPLUS S7-1200 and up to three further stations to Industrial Ethernet with 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, LED diagnostics, S7-1200 module including electronic Equipment Manual on CD-ROMv	6AG1277-1AA10-4AA0
IE FC TP trailing cable 2 x 2 (type C) 4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug 180/90 for use in cable carriers; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1840-3AH10
IE FC RJ45 plug 180 2 x 2 RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface <ul style="list-style-type: none"> • 1 pack = 1 unit • 1 pack = 10 units • 1 pack = 50 units 	6GK1901-1BB10-2AA0 6GK1901-1BB10-2AB0 6GK1901-1BB10-2AE0
IE FC RJ45 outlet For connection of Industrial Ethernet FC cables and TP cords; graded prices from 10 and 50 units	6GK1901-1FC00-0AA0
IE TP cord RJ45/RJ45 <ul style="list-style-type: none"> • TP cord pre-assembled with 2 RJ45 plugs; length: 0.5 m • TP cable 4 x 2 with 2 RJ45 plugs; length: 0.5 m 	6XV1850-2GE50 6XV1870-3QE50

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CSM 1277 unmanaged

Technical specifications

Article number	6GK7277-1AA10-0AA0
product type designation	SCALANCE CSM 1277
transfer rate	
transfer rate	10 Mbit/s, 100 Mbit/s
interfaces for communication maximum configuration for modular devices	
number of electrical ports maximum	4
interfaces for communication integrated	
number of electrical connections	
• for network components or terminal equipment	4
number of 100 Mbit/s SC ports	
• for multimode	0
number of 1000 Mbit/s LC ports	
• for multimode	0
• for single mode (LD)	0
interfaces other	
number of electrical connections	
• for power supply	1
type of electrical connection	
• for power supply	3-pole terminal block
supply voltage, current consumption, power loss	
type of voltage 1 of the supply voltage	DC
• supply voltage 1 rated value	24 V
• power loss [W] 1 rated value	1.6 W
• supply voltage 1 rated value	19.2 ... 28.8 V
• consumed current 1 maximum	0.07 A
• type of electrical connection 1 for power supply	3-pole terminal block
• product component 1 fusing at power supply input	Yes
• fuse protection type 1 at input for supply voltage	0.5 A / 60 V
ambient conditions	
ambient temperature	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
design	SIMATIC S7-1200 device design
width	45 mm
height	100 mm
depth	75 mm
net weight	0.15 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes
• wall mounting	Yes
• S7-300 rail mounting	No
• S7-1500 rail mounting	No

Article number	6GK7277-1AA10-0AA0
product functions management, configuration, engineering	
product function	
• multiport mirroring	No
product function switch-managed	No
product functions redundancy	
product function	
• Parallel Redundancy Protocol (PRP)/operation in the PRP-network	Yes
• Parallel Redundancy Protocol (PRP)/Redundant Network Access (RNA)	No
standards, specifications, approvals	
standard	
• for FM	FM3611: Class 1, Division 2, Group A, B, C, D / T..., CL.1, Zone 2, GP. IIC, T.. Ta
• for safety from CSA and UL	UL 508, CSA C22.2 No. 142
• for emitted interference	EN 61000-6-4 (Class A)
• for interference immunity	EN 61000-6-2
MTBF	273 a
reference code	
• according to IEC 81346-2	KF
• according to IEC 81346-2:2019	KFE
standards, specifications, approvals CE	
certificate of suitability CE marking	Yes
standards, specifications, approvals hazardous environments	
standard for hazardous zone	EN 600079-15:2005, EN 600079-0:2006, II 3 G Ex nA II T4, KEMA 08 ATEX 0003 X
certificate of suitability	
• CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
• CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals other	
certificate of suitability	EN 61000-6-2, EN 61000-6-4
• C-Tick	Yes
• KC approval	No
standards, specifications, approvals marine classification	
Marine classification association	
• American Bureau of Shipping Europe Ltd. (ABS)	Yes
• French marine classification society (BV)	Yes
• Det Norske Veritas (DNV)	Yes
• Germanische Lloyd (GL)	No
• Lloyds Register of Shipping (LRS)	Yes
• Nippon Kaiji Kyokai (NK)	Yes
• Polski Rejestr Statkow (PRS)	No
• Royal Institution of Naval Architects (RINA)	No

Technical specifications

Article number	6GK7277-1AA10-0AA0
product functions general	
Warranty period	5 a
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CP 1243-1

Overview



The CP 1243-1 communications processor is used for connecting the SIMATIC S7-1200 to telecontrol centers via remote networks and telecontrol protocols (DNP3, IEC 60870-5-104, TeleControl Basic), and for safe communication via IP-based networks.

The CP has the following features:

- Ethernet-based connection to TeleControl Server Basic, e.g. via internet
- Data transfer of measured values, control variables, or alarms optimized for telecontrol systems
- Automatic sending of alert emails
- Data buffering of up to 64 000 values ensures a secure database even with temporary connection failures
- Secure communication via VPN connections based on IPsec
- Access protection via stateful inspection firewall
- Support of SINEMA Remote Connect with autoconfiguration
- Clearly laid out LED signaling for fast and easy diagnostics
- Compact industrial enclosure in S7-1200 design for mounting on a DIN rail
- Fast commissioning thanks to easy configuration using STEP 7

Ordering data

Article No.

CP 1243-1 communications processor

CP 1243-1 communications processor for connecting SIMATIC S7-1200 as an additional Ethernet interface and for connection to control centers via telecontrol protocols (DNP3, IEC 60870, TeleControl Basic), security (firewall, VPN)

6GK7243-1BX30-0XE0

CSM 1277 compact switch module

Unmanaged switch for connecting a SIMATIC S7-1200 and up to three further nodes to Industrial Ethernet with 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, LED diagnostics, S7-1200 module including electronic Equipment Manual on CD-ROM

6GK7277-1AA10-0AA0

IE FC RJ45 plugs

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables

IE FC RJ45 plug 180

180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

IE FC TP standard cable GP 2 x 2 (type A)

4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/IE F RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10

IE FC stripping tool

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

Technical specifications

Article number	6GK7243-1BX30-0XE0
product type designation	CP 1243-1
transfer rate	
transfer rate	
• at the 1st interface	10 ... 100 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	1
number of electrical connections	
• at the 1st interface according to Industrial Ethernet	1
• for power supply	0
type of electrical connection	
• at the 1st interface according to Industrial Ethernet	RJ45 port

Article number	6GK7243-1BX30-0XE0
product type designation	CP 1243-1
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	5 V
consumed current	
• from backplane bus at DC at 5 V typical	0.25 A
power loss [W]	1.25 W

Technical specifications

Article number	6GK7243-1BX30-0XE0
product type designation	CP 1243-1
ambient conditions	
ambient temperature	
• for vertical installation during operation	-20 ... +60 °C
• for horizontally arranged busbars during operation	-20 ... +70 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-1200 single width
width	30 mm
height	110 mm
depth	75 mm
net weight	0.122 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes
• wall mounting	Yes
product features, product functions, product components general	
number of units	
• per CPU maximum	3
performance data open communication	
number of possible connections for open communication	
• by means of T blocks maximum	like CPU
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	like CPU
performance data IT functions	
number of possible connections	
• as email client maximum	1
performance data telecontrol	
suitability for use	
• node station	No
• substation	Yes
• TIM control center	No
control center connection	For use with TeleControl Server Basic, WinCC and PCS7 supported
• by means of a permanent connection	supported
• note	Connection to SCADA system via Telecontrol Server Basic and Standard Telecontrol protocols
protocol is supported	
• DNP3	Yes
• IEC 60870-5	Yes
product function data buffering if connection is aborted	Yes; 64,000 events
number of data points per station maximum	500
number of stations for direct communication with Telecontrol Server Basic	
• in send direction maximum	3
• in receive direction maximum	15

Article number	6GK7243-1BX30-0XE0
product type designation	CP 1243-1
performance data teleservice	
diagnostics function online diagnostics with SIMATIC STEP 7	Yes
product function	
• program download with SIMATIC STEP 7	Yes
• remote firmware update	Yes
product functions management, configuration, engineering	
configuration software	
• required	STEP 7 Basic/Professional
product functions diagnostics	
product function web-based diagnostics	Yes
product functions security	
firewall version	stateful inspection
product function with VPN connection	IPsec, SINEMA RC
type of encryption algorithms with VPN connection	AES-256, AES-192, AES-128, 3DES-168
type of authentication procedure with VPN connection	Preshared key (PSK), X.509v3 certificates
type of hashing algorithms with VPN connection	MD5, SHA-1, SHA-2
number of possible connections with VPN connection	8
product function	
• password protection for Web applications	No
• password protection for teleservice access	No
• encrypted data transmission	Yes
• ACL - IP-based	No
• ACL - IP-based for PLC/routing	No
• switch-off of non-required services	Yes
• blocking of communication via physical ports	No
• log file for unauthorized access	No
product functions time	
protocol is supported	
• NTP	Yes
• NTP (secure)	Yes
time synchronization	
• from NTP-server	Yes
• from control center	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
• total	89.58 kg
• during manufacturing	14.29 kg
• during operation	75.11 kg
• after end of life	0.18 kg
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CP 1243-7 LTE

Overview



CP 1243-7 LTE is used to connect the S7-1200 to a mobile wireless 4th Generation LTE (Long Term Evolution) network. The increased data transfer rates compared to GPRS and widespread introduction of LTE open up new areas of application. The CP1243-7 is characterized by the following properties:

- 1 connection to LTE (4G) mobile wireless network (various versions for EU and North America)
- Integration into telecontrol applications via IEC60870-5-104, DNP3 or Telecontrol Server Basic
- Data transfer of measured values, control variables or alarms optimized for telecontrol systems
- Operation with fixed IP addresses and dynamic IP addresses with standard cellular phone contract
- Time synchronization based on NTP (Network Time Protocol)
- "On-demand" connection setup via voice call or SMS
- Sending and receiving of SMS
- Teleservice access with STEP 7 to substations via mobile wireless networks
- Compact industrial enclosure in S7-1200 design for mounting on a DIN rail
- Temperature range in operation: -20 °C to +70 °C
- DIN rail mounting
- Diagnostics LEDs (overall status and details)
- Integrated security functions (VPN and firewall)
- Access to the CPU web server
- Fast commissioning thanks to easy configuration using STEP 7
- Data buffering of up to 64 000 values ensures a secure database even with temporary connection failures
- Support of SINEMA Remote Connect with autoconfiguration

Ordering data

Article No.

CP 1243-7 LTE communications processor

Communications processor for connecting SIMATIC S7-1200 to TeleControl Server Basic via LTE mobile wireless network

- **CP 1243-7 LTE EU**
Frequencies in European band: 700, 1700 MHz
- **CP 1243-7 LTE US**
Frequencies in North American band: 800, 1800, 2600 MHz

6GK7243-7KX30-0XE0

6GK7243-7SX30-0XE0

ANT794-4MR antenna

Omnidirectional antenna for GSM (2G), UMTS (3G) and LTE (4G) networks; omnidirectional; weatherproof for indoor and outdoor use; 5 m connecting cable with fixed connection to antenna; SMA plug; including mounting bracket, screws, wall plugs

6NH9860-1AA00

Technical specifications

Article number	6GK7243-7KX30-0XE0	6GK7243-7SX30-0XE0
product type designation	CP 1243-7 LTE EU	CP 1243-7 LTE US
transfer rate		
transfer rate		
• for LTE transmission		
- with downlink maximum	42 Mbit/s	42 Mbit/s
- with uplink maximum	5.76 Mbit/s	5.76 Mbit/s
interfaces		
number of interfaces according to Industrial Ethernet	0	0
number of electrical connections		
• for external antenna(s)	1	1
• for power supply	1	1
number of slots		
• for SIM cards	1	1
type of electrical connection		
• for external antenna(s)	SMA socket (50 ohms)	SMA socket (50 ohms)
• for power supply	3-pole terminal block	3-pole terminal block
slot version		
• for SIM card	Standard	Standard
wireless technology		
type of mobile wireless service is supported		
• SMS	Yes	Yes
• GPRS	Yes	Yes
•	GPRS (Multislot Class 10)	GPRS (Multislot Class 10)
type of wireless network is supported		
• GSM	Yes	Yes
• UMTS	Yes	Yes
• LTE	Yes	Yes
operating frequency		
• 850 MHz		Yes
• 1900 MHz		Yes
operating frequency for GSM transmission	operating frequency for GSM transmission 900 MHz, operating frequency for GSM transmission 1800 MHz	
operating frequency with UMTS transmission	operating frequency with UMTS transmission 900 MHz, operating frequency with UMTS transmission 2100 MHz	
operating frequency for LTE transmission	operating frequency for LTE transmission 800 MHz, operating frequency for LTE transmission 1800 MHz, operating frequency for LTE transmission 2600 MHz	operating frequency for LTE transmission 700 MHz, operating frequency for LTE transmission 1700 MHz

Article number	6GK7243-7KX30-0XE0	6GK7243-7SX30-0XE0
product type designation	CP 1243-7 LTE EU	CP 1243-7 LTE US
supply voltage, current consumption, power loss		
type of voltage of the supply voltage	DC	DC
supply voltage external	24 V	24 V
supply voltage external at DC rated value	24 V	24 V
relative positive tolerance at DC at 24 V	20 %	20 %
relative negative tolerance at DC at 24 V	20 %	20 %
consumed current		
• from external supply voltage at DC at 24 V typical	0.1 A	0.1 A
• from external supply voltage at DC at 24 V maximum	0.22 A	0.22 A
ambient conditions		
ambient temperature		
• for vertical installation during operation	-20 ... +60 °C	-20 ... +60 °C
• for horizontally arranged busbars during operation	-20 ... +70 °C	-20 ... +70 °C
• during storage	-40 ... +70 °C	-40 ... +70 °C
• during transport	-40 ... +70 °C	-40 ... +70 °C
relative humidity		
• at 25 °C without condensation during operation maximum	95 %	95 %
protection class IP	IP20	IP20
design, dimensions and weights		
module format	Compact module S7-1200 single width	Compact module S7-1200 single width
width	30 mm	30 mm
height	100 mm	100 mm
depth	75 mm	75 mm
net weight	0.133 kg	0.133 kg
fastening method		
• 35 mm top hat DIN rail mounting	Yes	Yes
• S7-300 rail mounting	No	No
• wall mounting	Yes	Yes
product features, product functions, product components general		
number of units		
• per CPU maximum	3	3

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CP 1243-7 LTE

Technical specifications

Article number	6GK7243-7KX30-0XE0	6GK7243-7SX30-0XE0
product type designation	CP 1243-7 LTE EU	CP 1243-7 LTE US
performance data		
number of users/telephone numbers definable maximum	10	10
performance data open communication		
number of possible connections for open communication		
<ul style="list-style-type: none"> by means of T blocks maximum 	like CPU	like CPU
performance data IT functions		
number of possible connections		
<ul style="list-style-type: none"> as email client maximum 	1	1
performance data telecontrol		
suitability for use		
<ul style="list-style-type: none"> substation 	Yes	Yes
control center connection	Telecontrol Server Basic	Telecontrol Server Basic
<ul style="list-style-type: none"> by means of a permanent connection 	supported	supported
<ul style="list-style-type: none"> by means of demand-oriented connection 	supported	supported
<ul style="list-style-type: none"> note 	Connection to SCADA system using OPC interface	Connection to SCADA system using OPC interface
protocol is supported		
<ul style="list-style-type: none"> DNP3 IEC 60870-5 	Yes Yes	Yes Yes
product function data buffering if connection is aborted	Yes; 64,000 events	Yes; 64,000 events
number of stations for direct communication with Telecontrol Server Basic		
<ul style="list-style-type: none"> in send direction maximum in receive direction maximum 	3 15	3 15
performance data teleservice		
diagnostics function online diagnostics with SIMATIC STEP 7	Yes	Yes
product function		
<ul style="list-style-type: none"> program download with SIMATIC STEP 7 	Yes	Yes
<ul style="list-style-type: none"> remote firmware update 	Yes	Yes

Article number	6GK7243-7KX30-0XE0	6GK7243-7SX30-0XE0
product type designation	CP 1243-7 LTE EU	CP 1243-7 LTE US
product functions management, configuration, engineering		
configuration software		
<ul style="list-style-type: none"> required 	STEP 7 Basic/Professional	STEP 7 Basic/Professional
product functions diagnostics		
product function web-based diagnostics	Yes	Yes
product functions security		
firewall version	stateful inspection	stateful inspection
product function with VPN connection	IPsec, SINEMA RC	IPsec, SINEMA RC
type of encryption algorithms with VPN connection	AES-256, AES-192, AES-128, 3DES-168, DES-56	AES-256, AES-192, AES-128, 3DES-168, DES-56
type of authentication procedure with VPN connection	Preshared key (PSK), X.509v3 certificates	Preshared key (PSK), X.509v3 certificates
type of hashing algorithms with VPN connection	MD5, SHA-1	MD5, SHA-1
number of possible connections with VPN connection	1	1
product function		
<ul style="list-style-type: none"> password protection for teleservice access encrypted data transmission 	Yes Yes	Yes Yes
product functions time		
protocol is supported		
<ul style="list-style-type: none"> NTP 	Yes	Yes
time synchronization		
<ul style="list-style-type: none"> from control center 	Yes	Yes
standards, specifications, approvals hazardous environments		
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc	Ex nA IIC T4 Gc
further information internet links		
internet link		
<ul style="list-style-type: none"> to website: Image database to website: Industry Online Support 	https://automation.siemens.com/bilddb https://support.industry.siemens.com	https://automation.siemens.com/bilddb https://support.industry.siemens.com

Overview



The CP 1243-8 IRC (Industrial Remote Communication) communications processor is used for connecting a SIMATIC S7-1200 via the SINAUT ST7 telecontrol protocol to higher-level ST7 stations or to an ST7 control center. The CP 1243-8 IRC (as of HW2 and firmware V3.0) also offers connection to a DNP3 or IEC-capable control center via a corresponding open DNP3 or IEC 60870-5-104 telecontrol protocol. The CP 1243-8 IRC (as of HW2 and firmware V3.0) also offers connection to a DNP3 or IEC-capable control center via a corresponding open DNP3 or IEC 60870-5-104 telecontrol protocol.

The CP has the following features:

- Support for telecontrol protocol SINAUT ST7, DNP3, IEC 60870-5-104
- Two WAN connections for selecting the communication paths:
 - Ethernet-based connection: RJ45 port on the module for connecting external routers, e.g. SCALANCE M
 - Additional connection configurable via plug-in TS modules
- Both WAN interfaces can also be operated simultaneously: Route redundancy
- Data transfer of measured values, control variables, or alarms optimized for telecontrol systems
- Automatic transmission of alarms per email or text message
- Time synchronization based on NTP (Network Time Protocol) or via the SINAUT system
- Data buffering of up to 16,000 data frames prevents data loss in the event of temporary connection failures
- Secure communication via VPN connections based on IPsec
- Access protection via Stateful Inspection Firewall
- Support of SINEMA Remote Connect with autoconfiguration
- Fast and simple diagnostics via clear LED indicators, STEP 7 and web browser
- Compact industrial enclosure in S7-1200 design for mounting on a DIN rail

The integrated Ethernet interface and the option of using the TS modules provide flexible connection options for the CP. The following TS modules are available:

- TS module RS232
- TS module MODEM
- TS module ISDN

Ordering data

Article No.

CP 1243-8 IRC communications processor
6GK7243-8RX30-0XE0

Communications processor for connecting a SIMATIC S7-1200 via the SINAUT ST7 telecontrol protocol to higher-level ST7 stations or to an ST7 control center, or a DNP3 or IEC-capable control center via corresponding DNP3 or IEC 60870-5-104 open telecontrol protocols

SINAUT engineering software V5.5 + SP3
6NH7997-0CA55-0AA0

On CD, consisting of:

- SINAUT ST7/DNP3 configuration and diagnostic software for STEP 7 V5.6
- SINAUT TD7 block library
- Electronic manual in German and English

SINAUT engineering software V5.5; Upgrade from V5.0, V5.1, V5.2, V5.3 or V5.4
6NH7997-0CA55-0GA0
TeleService modules

Connection to TS Adapter IE Basic/Advanced or CP 1243-8 IRC. Power supply via TS Adapter IE Basic/Advanced or CP 1243-8 IRC

TS module RS232
6ES7972-0MS00-0XA0
TS module MODEM
6ES7972-0MM00-0XA0
CSM 1277
compact switch module
6GK7277-1AA10-0AA0

Unmanaged switch for connecting a SIMATIC S7-1200 and up to three further nodes to Industrial Ethernet with 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, LED diagnostics, S7-1200 module including electronic Equipment Manual on CD-ROM

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

CP 1243-8 IRC

Technical specifications

Article number	6GK7243-8RX30-0XE0
product type designation	CP 1243-8 IRC
transfer rate	
transfer rate	
• at the 1st interface	10 ... 100 Mbit/s
• at the 2nd interface	0.3 ... 115.2 kbit/s
interfaces	
number of interfaces according to Industrial Ethernet	1
number of electrical connections	
• at the 1st interface according to Industrial Ethernet	1
• for power supply	1
type of electrical connection	
• at the 1st interface according to Industrial Ethernet	RJ45 port
type of electrical connection	
• at interface 2 for external data transmission	Interface to the TS Module
• for power supply	3-pole terminal block
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	5 V
supply voltage external	24 V
supply voltage external	19.2 ... 28.8 V
supply voltage external at DC rated value	24 V
supply voltage external at DC rated value	19.2 ... 28.8 V
consumed current	
• from backplane bus at DC at 5 V typical	0.25 A
• from external supply voltage at DC at 24 V typical	0.1 A
power loss [W]	2.4 W; 1.25 W from S7-1200 backplane without TS module. 2.4 W from 24 V DC external with TS module
ambient conditions	
ambient temperature	
• for vertical installation during operation	-20 ... +60 °C
• for horizontally arranged busbars during operation	-20 ... +70 °C
• during storage	-40 ... -70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-1200 single width
width	30 mm
height	110 mm
depth	75 mm
net weight	0.122 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes
• S7-300 rail mounting	No
• wall mounting	Yes

Article number	6GK7243-8RX30-0XE0
product type designation	CP 1243-8 IRC
product features, product functions, product components general	
number of units	
• per CPU maximum	1
• note	One CP pluggable on left side of CPU, one TS Module pluggable left side of CP.
performance data open communication	
number of possible connections for open communication	
• by means of T blocks maximum	like CPU
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	Configured S7-Connection for ST7-Communication
• with PG connections maximum	2
• with OP connections maximum	1
service	
• SINAUT ST7 via S7 communication	Yes
performance data IT functions	
number of possible connections	
• as email client maximum	1
performance data telecontrol	
suitability for use	
• node station	No
• substation	Yes
• TIM control center	No
• note	Ethernet and TS Module can be operated in parallel
control center connection	control center with ST7 function supported
• by means of a permanent connection	
protocol is supported	
• DNP3	Yes
• IEC 60870-5	Yes
• SINAUT ST7 protocol	Yes
product function data buffering if connection is aborted	Yes; DNP3, IEC60870-5: 64000 events, SINAUT ST7: 16000 telegrams
number of data points per station maximum	500
transmission format	
• for SINAUT ST7 protocol with multi-master polling 10-bit	Yes
• for SINAUT ST7 protocol with polling or spontaneous 10-bit or 11-bit	Yes
operating mode for scanning of data transmission	
• with dedicated line/radio link with SINAUT ST7 protocol	Polling
• with dial-up network with SINAUT ST7 protocol	spontaneous
hamming distance	
• for SINAUT ST7 protocol	4
performance data teleservice	
diagnostics function online	Yes
diagnostics with SIMATIC STEP 7	
product function	
• program download with SIMATIC STEP 7	Yes
• remote firmware update	Yes

Technical specifications

Article number	6GK7243-8RX30-0XE0
product type designation	CP 1243-8 IRC
product functions management, configuration, engineering	
protocol is supported	
• SNMP v3	Yes
• DCP	Yes
configuration software	
• required	SINAUT ES V5.5 and STEP7 V13 SP1 or higher
• for PG configuring required SINAUT ST7 configuration software for PG	Yes
product functions diagnostics	
product function web-based diagnostics	Yes
product functions security	
firewall version	stateful inspection
operating mode Virtual Private Network (VPN)	Yes
product function with VPN connection	IPsec, SINEMA RC
type of encryption algorithms with VPN connection	AES-256, AES-192, AES-128, 3DES-168, DES-56
type of authentication procedure with VPN connection	Preshared key (PSK), X.509v3 certificates
type of hashing algorithms with VPN connection	MD5, SHA-1
number of possible connections with VPN connection	8
product function	
• password protection for teleservice access	No
• encrypted data transmission	Yes
• MSC client via GPRS modem with MSC capability	Yes
protocol	
• is supported MSC protocol	Yes
• with Virtual Private Network MSC is supported	TCP/IP
key length for MSC with Virtual Private Network	128 bit
number of possible connections	
• as MSC client with VPN connection	1
• as MSC server with VPN connection	0

Article number	6GK7243-8RX30-0XE0
product type designation	CP 1243-8 IRC
product functions time	
protocol is supported	
• NTP	Yes
time synchronization	
• from NTP-server	Yes
• from control center	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
• total	89.58 kg
• during manufacturing	14.29 kg
• during operation	75.11 kg
• after end of life	0.18 kg
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-1200 Basic Controllers

I/O modules

Communication

SIMATIC RF120C

Overview



The SIMATIC RF120C is a communications module for connecting the SIMATIC identification systems directly to the SIMATIC S7-1200. The readers of the RF200/300/1000 RFID systems as well as the MV300/400/500 optical readers can be operated on the SIMATIC RF120C.

Integration into the TIA Portal and the uniform plug-in connection systems permit fast and simple commissioning.

Ordering data

Article No.

SIMATIC RF120C communications module

Integrated in the S7-1200 PLC for connection of a reader

6GT2002-0LA00

Accessories for all readers

Reader cable for SIMATIC RF200 / RF300 / MV400

PUR material, trailable, straight reader connector

2 m

6GT2091-4LH20

5 m

6GT2091-4LH50

10 m

6GT2091-4LN10

Connecting cable for SIMATIC RF1000

Prefabricated RS232, between RF1040R or RF1070R and RF120C; black, length 2 m

6GT2891-6UH20

Connecting cable for SIMATIC MV320

Pre-assembled, between RF120C and MV320, coiled, length 5 m, usable length 1.6 to 4 m

6GT2191-1BH50

Accessories for extended use

Extension cable for all readers

PUR material, trailable.

2 m, straight plug

6GT2891-4FH20

5 m, straight plug

6GT2891-4FH50

10 m, straight plug

6GT2891-4FN10

20 m, straight plug

6GT2891-4FN20

50 m, straight plug

6GT2891-4FN50

2 m, plug angled at reader

6GT2891-4JH20

5 m, plug angled at reader

6GT2891-4JH50

10 m, plug angled at reader

6GT2891-4JN10

Technical specifications

Article number	6GT2002-0LA00
product type designation	RF120C communication module
suitability for operation	SIMATIC S7-1200 together with RF200/300/1000, MV300/400/500, MOBY D/U
transfer rate	
transfer rate at the point-to-point connection serial maximum	115.2 kbit/s
interfaces	
design of the interface for point-to-point connection	RS422/RS232
number of readers connectable	1
type of electrical connection	
• of the backplane bus	S7-1200 backplane bus
• for supply voltage	Screw terminals
design of the interface to the reader for communication	sub-D, 9-pin, female
mechanical data	
material	Xantar MX 1094
color	Ti-grey 24L01
tightening torque of the screw for securing the equipment maximum	0.45 N·m
supply voltage, current consumption, power loss	
supply voltage at DC	
• rated value	24 V
•	20 ... 30 V
• consumed current at DC at 24 V without connected devices typical	0.03 A
• Consumed current from supply voltage 1L+ maximum	1 A
ambient conditions	
ambient temperature	
• during operation	0 ... 55 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
protection class IP	IP20
shock resistance	According to IEC 61131-2
shock acceleration	300 m/s ²
vibrational acceleration	100 m/s ²

Article number	6GT2002-0LA00
product type designation	RF120C communication module
design, dimensions and weights	
width	30 mm
height	100 mm
depth	75 mm
net weight	0.15 kg
fastening method	S7-1200 rack
wire length for RS 422 interface maximum	1 000 m
product features, product functions, product components general	
display version	4 LEDs for reader connection, 1 LED for device status
product function addressable transponder file handler	No
protocol is supported	
• S7 communication	Yes
product functions management, configuration, engineering	
type of parameterization	HSP, TO
type of programming	ID profile, library with functions
type of computer-switched communication	acyclic communication
standards, specifications, approvals	
certificate of suitability	CE, FCC, cULus, KCC, C-Tick, FM
certificate of suitability	
• IECEX	Yes
• for IECEX as marking	Ex: II 3G Ex nAA IIC T4 Gc
MTBF	196 a
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO ₂ eq]	
• total	112.73 kg
• during manufacturing	15.07 kg
• during operation	97.62 kg
• after end of life	0.042 kg
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS communication

SIPLUS CM 1241 communications modules

Overview



- For fast, high-performance serial data exchange via point-to-point coupling
- Implemented protocols: ASCII, USS drive protocol, Modbus RTU
- Additional protocols can also be loaded
- Simple parameterization with STEP 7 Basic

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CM 1241 communications module

(Extended temperature range and exposure to environmental substances)

Ambient temperature -40 ... +70 °C

Communications module for point-to-point connection, with one RS232 interface

Communications module for point-to-point connection, with one RS 485 interface

For areas with extreme exposure to environmental substances (conformal coating)

Communications module for point-to-point connection, with one RS232 interface

Communications module for point-to-point connection, with one RS 485 interface

Accessories**6AG1241-1AH32-2XB0****6AG1241-1CH32-2XB0****6AG1241-1AH32-4XB0****6AG1241-1CH32-4XB0**

See SIMATIC S7-1200 CM 1241 communications module, page 3/138

Technical specifications

Article number	6AG1241-1AH32-4XB0	6AG1241-1AH32-2XB0	6AG1241-1CH32-4XB0	6AG1241-1CH32-2XB0
Based on	6ES7241-1AH32-0XB0 SIPLUS S7-1200 CM 1241 RS232	6ES7241-1AH32-0XB0 SIPLUS S7-1200 CM1241 RS232	6ES7241-1CH32-0XB0 SIPLUS S7-1200 CM 1241 RS422/485	6ES7241-1CH32-0XB0 SIPLUS S7-1200 CM 1241 RS422/485
Ambient conditions				
Ambient temperature during operation				
• min.	-20 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-20 °C; = Tmin (incl. condensation/frost); start-up @ 0 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; = Tmax	70 °C; = Tmax	60 °C; = Tmax	70 °C; Tmax > 60 °C, derating: Max. one module may be configured; this module must be the last module on the CM bus; minimum clearance on the left side of at least 45 mm
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air

Technical specifications

Article number	6AG1241-1AH32-4XB0	6AG1241-1AH32-2XB0	6AG1241-1CH32-4XB0	6AG1241-1CH32-2XB0
Based on	6ES7241-1AH32-0XB0 SIPLUS S7-1200 CM 1241 RS232	6ES7241-1AH32-0XB0 SIPLUS S7-1200 CM1241 RS232	6ES7241-1CH32-0XB0 SIPLUS S7-1200 CM 1241 RS422/485	6ES7241-1CH32-0XB0 SIPLUS S7-1200 CM 1241 RS422/485
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS communication

SIPLUS CB 1241 RS485 communication board

Overview

- For fast, high-performance serial data exchange via point-to-point connection
- Implemented protocols: ASCII, USS drive protocol, Modbus RTU
- Additional protocols can be loaded later
- Simple parameterization with STEP 7 Basic
- Can be plugged directly into the CPU

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

SIPLUS CB 1241 RS485 communication board

for point-to-point connection, with 1 RS485 interface

Accessories

Article No.

6AG1241-1CH30-5XB1

See SIMATIC CB 1241 RS485 communication board, page 3/140

Technical specifications

Article number	6AG1241-1CH30-5XB1
Based on	6ES7241-1CH30-0XB1 SIPLUS S7-1200 CB 1241 RS485
Ambient conditions	
Ambient temperature during operation	
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	60 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *

Article number	6AG1241-1CH30-5XB1
Based on	6ES7241-1CH30-0XB1 SIPLUS S7-1200 CB 1241 RS485
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Overview



DP-M	DP-S	FMS	PG/OP	S7
	●			

© IKT10_XX_110322

The SIPLUS CM 1242-5 communications module is used to connect a SIPLUS S7-1200 controller to PROFIBUS as a DP slave and has the following characteristics:

- PROFIBUS DPV1 slave in accordance with IEC 61158
- Module replacement without PG supported
- Power is supplied via the backplane bus so that no extra cabling is required
- Support of all standard baud rates from 9.6 kbps to 12 Mbps
- Compact industry-standard enclosure in S7-1200 design for mounting on a DIN rail
- Fast commissioning thanks to easy configuration using STEP 7 without additional programming overhead

The CM 1242-5 is intended for use in factory automation. Low-cost PROFIBUS-based automation solutions can be created on the basis of S7-1200 for optimal production.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Technical specifications

Article number	6AG1242-5DX30-2XE0
Based on	6GK7242-5DX30-0XE0
product type designation	SIPLUS S7-1200 CM 1242-5
ambient conditions	
ambient temperature	
• for vertical installation during operation	-25 ... +45 °C
• for horizontally arranged busbars during operation	-25 ... +55 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
installation altitude at height above sea level maximum	5 000 m
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
relative humidity	
• with condensation according to IEC 60068-2-38 maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets
resistance to biologically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request
• conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
resistance to chemically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
• conformity according to EN 60721-3-6	Yes
resistance to mechanically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
• conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
protection class IP	IP20

Ordering data

Article No.

SIPLUS CM 1242-5 communications module

(Extended temperature range and exposure to environmental substances)

Communications module for electrical connection of SIMATIC S7-1200 to PROFIBUS as a DPV1 slave

6AG1242-5DX30-2XE0**Accessories**

See SIMATIC S7-1200 CM 1242-5 communications module, page 3/141


SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS communication

SIPLUS CM 1243-2 communications modules

Overview

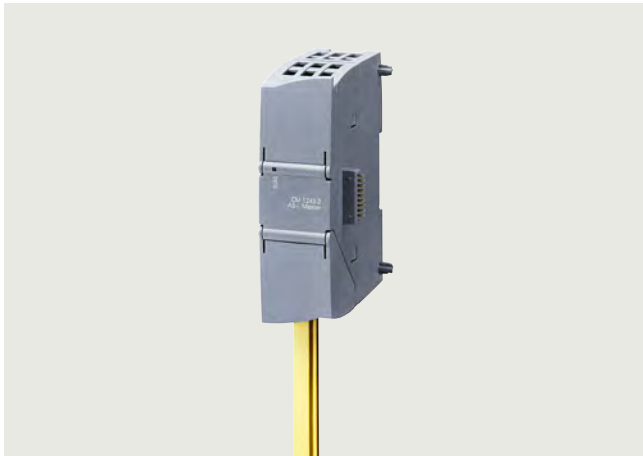

The CM 1243-2 communications module is the AS-Interface master for the SIMATIC S7-1200 and has the following features:

- As many as 62 AS-Interface slaves can be connected
- Integrated analog value transmission
- Supports all AS-Interface master functions according to the AS-Interface Specification V3.0
- Indication of the operating state on the front of the device via LED
- Indication of operating mode, AS-Interface voltage faults, configuration faults and I/O faults via LEDs behind the front panel
- Compact enclosure in the design of the SIMATIC S7-1200
- Suitable for AS-Interface with 30 V voltage and AS-i Power24V: In combination with the optional DCM 1271 data decoupling module, a standard 24 V power supply unit can be used
- Configuration and diagnostics via the TIA Portal

Installation

The CM 1243-2 communications module is positioned to the left of the S7-1200 CPU and linked to the S7-1200 via lateral contacts.

It incorporates:

- Terminals for two AS-i cables (internally jumpered) via two screw terminals each
- One terminal for connection to the functional ground
- LEDs for indication of the operating state and fault statuses of the connected slaves

The screw terminals (included in the scope of supply) can be removed to facilitate installation

Function

The CM 1243-2 supports all specified functions of the AS-Interface Specification V3.0.

The values of the digital AS-i slaves can be addressed via the process image of the S7-1200. During configuration of the slaves in the TIA Portal, the values of the analog AS-i slaves can also be accessed directly in the process image.

It is also possible to exchange all data of the AS-i master and the connected AS-i slaves with the S7-1200 via the data record interface.

Changeover of the operating mode, automatic application of the slave configuration and the re-addressing of a connected AS-i slave can be implemented via the control panel of the CM 1243-2 in the TIA Portal.

The optional DCM 1271 data decoupling unit (see "Ordering data for accessories") has an integrated detection unit for detecting ground faults on the AS-Interface cable. The integrated overload protection also disconnects the AS-Interface cable if the drive current required exceeds 4 A. For more information on DCM 1271, see "Power supplies and data decoupling units" @ "Data decoupling units for S7-1200".

Notes on security

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions can constitute an integral element of such a concept.

For more information about industrial security, please visit <https://www.siemens.com/Industrialsecurity>.

Configuration

To configure CM 1243-2, you require STEP 7 V11 + SP2 or higher.

For STEP 7 V11 + SP2 or higher, the additional Hardware Support Package for CM 1243-2 is required. This is available from the Industry Online Support Portal, see <https://support.industry.siemens.com/cs/ww/en/view/72341852>.

The software enables user-friendly configuration and diagnostics of the AS-i master and any connected slaves.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CM 1243-2 communications module

6AG1243-2AA30-7XB0

(Extended temperature range and exposure to environmental substances)

- AS-Interface master for SIMATIC S7-1200
- Corresponds to AS-Interface Specification V3.0
- With screw terminals, removable terminals (included in the scope of supply)
- Dimensions (W × H × D/ mm)
30 × 100 × 75

Accessories

See S7-1200 CM 1243-2 communications module, page 3/144

Overview



DP-M	DP-S	FMS	PG/OP	S7
●			●	●

G_1K10_XX-10223

The CM 1243-5 communications module is used to connect a SIMATIC S7-1200 controller to PROFIBUS as a DP master and has the following characteristics:

- PROFIBUS DPV1 master in accordance with IEC 61158
- Support of up to 16 PROFIBUS DP slaves
- Communication with other S7 controllers based on S7 communication
- Allows the connection of programming devices and operator panels with a PROFIBUS interface to S7-1200
- Module replacement without PG supported
- Support of all standard baud rates from 9.6 kbps to 12 Mbps
- Compact industry-standard enclosure in S7-1200 design for mounting on a DIN rail
- Fast commissioning thanks to easy configuration using STEP 7 without additional programming overhead

The CM 1243-5 is intended for use in factory automation. Low-cost PROFIBUS-based automation solutions can be created on the basis of S7-1200 for optimal production.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CM 1243-5 communications module

(Extended temperature range and exposure to environmental substances)

Communications module for electrical connection of SIMATIC S7-1200 to PROFIBUS as a DPV1 master

6AG1243-5DX30-2XE0**Accessories**

See SIMATIC S7-1200 CM 1243-5 communications module, page 3/147

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS communication

SIPLUS CM 1243-5 communications modules**Technical specifications**

Article number	6AG1243-5DX30-2XE0	Article number	6AG1243-5DX30-2XE0
Based on	6GK7243-5DX30-0XE0	Based on	6GK7243-5DX30-0XE0
product type designation	SIPLUS S7-1200 CM 1243-5	product type designation	SIPLUS S7-1200 CM 1243-5
ambient conditions		resistance to chemically active substances	
ambient temperature			
• for vertical installation during operation	-25 ... +45 °C	• conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
• for horizontally arranged busbars during operation	-25 ... +55 °C		Yes
• during storage	-40 ... +70 °C	• conformity according to EN 60721-3-6	
• during transport	-40 ... +70 °C	resistance to mechanically active substances	
installation altitude at height above sea level maximum	5 000 m	• conformity according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	• conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
relative humidity		coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
• with condensation according to IEC 60068-2-38 maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets	type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
resistance to biologically active substances		product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
• conformity according to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request	protection class IP	IP20
• conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)		

Overview



The CP 1243-1 communications processor is used for connecting the SIMATIC S7-1200 to telecontrol centers via remote networks and telecontrol protocols (DNP3, IEC 60870-5-104, TeleControl Basic), and for safe communication via IP-based networks.

The CP has the following features:

- Ethernet-based connection to TeleControl Server Basic, e.g. via internet
- Data transfer of measured values, control variables, or alarms optimized for telecontrol systems
- Automatic sending of alert emails
- Data buffering of up to 64,000 values ensures a secure database even with temporary connection failures
- Secure communication via VPN connections based on IPsec
- Access protection via Stateful Inspection Firewall
- Support of SINEMA Remote Connect with autoconfiguration
- Clearly laid out LED signaling for fast and easy diagnostics
- Compact industrial enclosure in S7-1200 design for mounting on a standard DIN rail
- Fast commissioning thanks to easy configuration using STEP 7

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CP 1243-1 communications module

(Extended temperature range and exposure to environmental substances)

Communications processor for connecting SIMATIC S7-1200 as an additional Ethernet interface and for connection to control centers via telecontrol protocols (DNP3, IEC 60870, TeleControl Basic), security (firewall, VPN)

6AG1243-1BX30-2AX0**Accessories**

See SIMATIC S7-1200 CP 1243-1 communications processor, page 3/152

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS communication

SIPLUS CP 1243-1 communications modules**Technical specifications**

Article number	6AG1243-1BX30-2AX0	Article number	6AG1243-1BX30-2AX0
Based on	6GK7243-1BX30-0AX0	Based on	6GK7243-1BX30-0AX0
product type designation	SIPLUS S7-1200 CP 1243-1	product type designation	SIPLUS S7-1200 CP 1243-1
ambient conditions		resistance to chemically active substances	
ambient temperature			
• for vertical installation during operation	-40 ... +60 °C	• conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
• for horizontally arranged busbars during operation	-40 ... +70 °C		
• during storage	-40 ... +70 °C	• conformity according to EN 60721-3-6	Yes
• during transport	-40 ... +70 °C	resistance to mechanically active substances	
installation altitude at height above sea level maximum	5 000 m	• conformity according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	• conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
relative humidity		coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
• with condensation according to IEC 60068-2-38 maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets	type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
resistance to biologically active substances		product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
• conformity according to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request	protection class IP	IP20
• conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)		

Overview

- Unmanaged switch for connecting a SIPLUS S7-1200 controller to an Industrial Ethernet network with a line, tree or star topology
- Multiplication of Ethernet interfaces on a SIPLUS S7-1200 controller for additional connection of up to three programming devices, operator controls, and further Ethernet nodes
- Simple, space-saving mounting on the SIPLUS S7-1200 mounting rail
- Low-cost solution for implementing small, local Ethernet networks
- Problem-free connection using RJ45 plugs
- Simple and fast status display via LEDs on the device
- Integral autocrossover function permits use of uncrossed connecting cables

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**SIPLUS NET CSM 1277 compact switch module**

(Extended temperature range and exposure to environmental substances)

Unmanaged switch for the connection of a SIPLUS S7-1200 Controller and as many as three other nodes to an Industrial Ethernet operating at 10/100 Mbps;

With conformal coating, -40 ... +70 °C,

Unmanaged switch for the connection of a SIPLUS S7-1200 Controller and as many as three other nodes to an Industrial Ethernet operating at 10/100 Mbps; With conformal coating, 0 ... +60 °C,

Accessories**Article No.****6AG1277-1AA10-2AA0****6AG1277-1AA10-4AA0**

See CSM 1277 unmanaged, page 3/149

SIMATIC S7-1200 Basic Controllers

I/O modules


SIPLUS communication

SIPLUS CSM 1277

Technical specifications

Article number	6AG1277-1AA10-2AA0	6AG1277-1AA10-4AA0
Based on	6GK7277-1AA10-0AA0	6GK7277-1AA10-0AA0
product type designation	SIPLUS NET CSM 1277	SIPLUS NET CSM 1277
ambient conditions		
ambient temperature in horizontal mounting position during operation	-40 ... +70 °C; > 60 °C ambient temperature on both sides 25 mm clearance on the left and right of the module to adjacent devices	0 ... 60 °C
ambient temperature during storage and transport	-40 ... +70 °C	-40 ... +70 °C
installation altitude at height above sea level maximum	5 000 m	5 000 m
relative humidity		
• with condensation according to IEC 60068-2-38 maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets	Yes; incl. airborne diesel and oil droplets
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
resistance to biologically active substances		
• conformity according to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna); class 3B3 on request	Yes; Class 3B2 mold and fungal spores (excluding fauna); class 3B3 on request
• conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
resistance to chemically active substances		
• conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
• conformity according to EN 60721-3-6	Yes; Class 6C3 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (Severity degree 3); *	Yes; Class 6C3 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (Severity degree 3); *
resistance to mechanically active substances		
• conformity according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
• conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
environmental category according to IEC 60721 note	* The supplied plug covers must remain in place on the unused interfaces during operation!	* The supplied plug covers must remain in place on the unused interfaces during operation!
coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability	Yes; Class 2 for high availability
type of coating		
• protection against pollution according to EN 60664-3	Yes; protection of the type 1	Yes; protection of the type 1
type of test of the coating according to MIL-I-46058C	Yes; coating discoloration during service life possible	Yes; coating discoloration during service life possible
product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; conformal coating, class A	Yes; conformal coating, class A
protection class IP	IP20	IP20

3

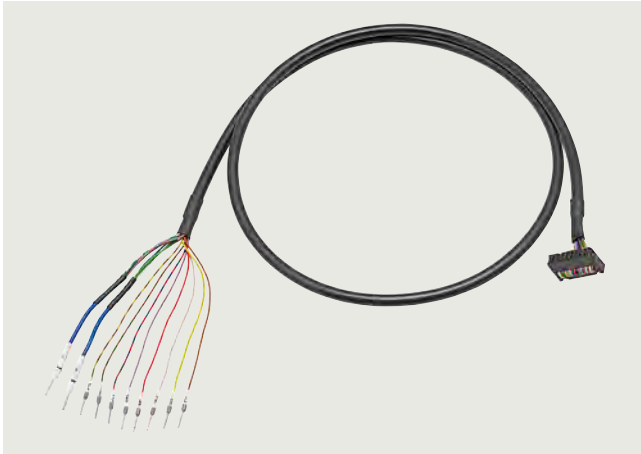Overview

SIMATIC TOP connect universal connecting cable

The wiring of the

- SIMATIC S7-1500 IO (25 mm)
- SIMATIC ET 200SP
- SIMATIC S7-1200
- LOGO!


with the sensors/actuators is a significant factor with respect to time/cost overhead during configuration, control cabinet design, procurement and ease of servicing. The SIMATIC TOP connect system cabling makes connection easy, fast and secure.

3**Design**

The unshielded universal connection cable is offered for a wide range of control cabinet concepts.

It comprises:

- 16-pin round cable with a core cross-section of 0.14 mm², pre-assembled with wire end ferrules for connection to the controller:
 - Labeled with "0" ... "7" for the control inputs/outputs
 - Labeled with "M" for mass
 - Labeled with "L+" for 24 V DC potential
- 16-pin ID (insulation displacement) connector for connection to the SIMATIC TOP connect connection modules for 8 I/Os:
 - 3-wire connection using the appropriate connection module for quick, error-free wiring
 - Galvanic isolation and adaptation using a coupling relay for easy implementation of potential groups in the system
 - High output current (up to 4 A), even for higher switching frequencies, using an optocoupler module (overload and short-circuit proof)
 - Implementation of isolating terminals using switch modules enabling individual signals to be measured
 - Channel-wise protection of I/Os using a fuse module with a thermal fuse

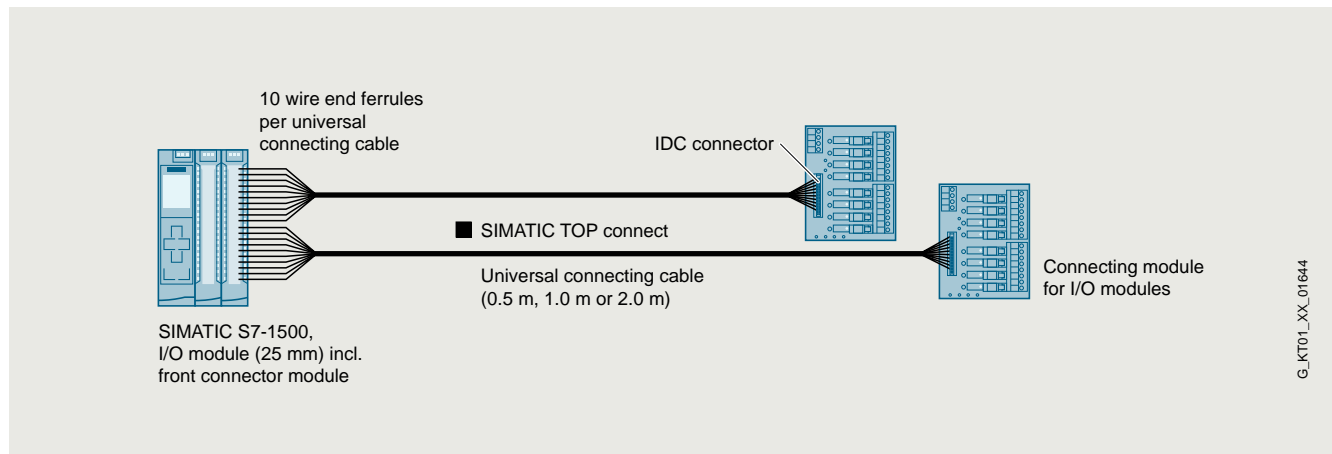

SIMATIC TOP connect universal connection cable


SIMATIC S7-1200 Basic Controllers

I/O modules

Connection system

System cabling for SIMATIC S7-1500 IO (25 mm), ET 200SP, S7-1200 and LOGO!

Overview Universal connecting cable

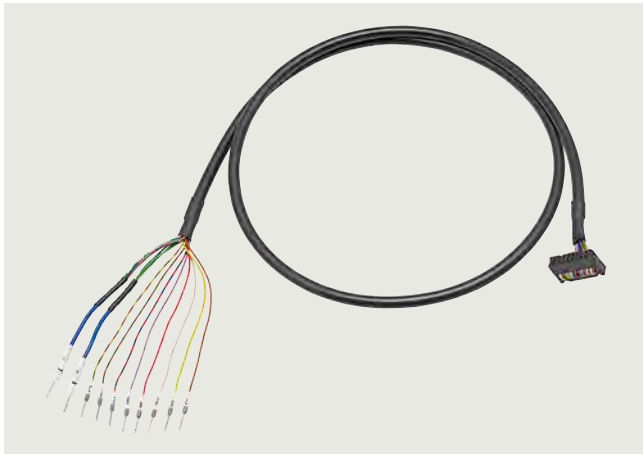

SIMATIC TOP connect universal connecting cable

The universal connecting cable constitutes the link between the standard connection of the SIMATIC S7-1500 IO (25 mm), SIMATIC ET 200SP, SIMATIC S7-1200 or LOGO! and the SIMATIC TOP connect terminal module. It transmits 8 signals and the supply voltage. The connecting cable is available in lengths of 0.5 m / 1.0 m / 2.0 m. the maximum technically feasible length is 30 m.

Ordering data

Article No.

**Universal connecting cables
for SIMATIC S7-1500 IO (25 mm),
SIMATIC ET 200SP,
SIMATIC S7-1200 and LOGO!**

16 x 0.14 mm² unshielded

- 0.5 m
- 1.0 m
- 2.0 m

6ES7923-0BA50-0FB0
6ES7923-0BB00-0FB0
6ES7923-0BC00-0FB0

Overview Connection modules

The connection modules are used instead of conventional terminal blocks and act as the interface between the PLC and signals from the field. All digital modules with 8 I/Os can be used.

Ordering data

Article No.

TP1 connection module

For 1-conductor connection,
for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0AA20-0AC0
6ES7924-0AA20-0AA0
6ES7924-0AA20-0BC0
6ES7924-0AA20-0BA0

TP3 connection module

For 3-conductor connection,
for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs
- Push-in terminals with LEDs and one isolating terminal per channel
- Screw-type terminals with LEDs and one isolating terminal per channel
- Push-in terminals with LEDs and fuse per channel
- Screw-type terminals with LEDs and fuse per channel

6ES7924-0CA20-0AC0
6ES7924-0CA20-0AA0
6ES7924-0CA20-0BC0
6ES7924-0CA20-0BA0
6ES7924-0CH20-0BC0
6ES7924-0CH20-0BA0
6ES7924-0CL20-0BC0
6ES7924-0CL20-0BA0

TPRo connection module

Relay module for 8 outputs,
relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BD20-0BC0
6ES7924-0BD20-0BA0

TPRi connection module

Relay module for 8 inputs (230 V AC),
relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BE20-0BC0
6ES7924-0BE20-0BA0

TPRi connection module

Relay module for 8 inputs (110 V AC),
relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BG20-0BC0
6ES7924-0BG20-0BA0

TPOo connection module

Optocoupler module for 8 outputs
(max. 24 V DC/4 A)

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BF20-0BC0
6ES7924-0BF20-0BA0

Overview



- Digital inputs as supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFI-safe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional inputs
- Operable exclusively in the central system

Ordering data

Article No.

SIMATIC S7-1200, SM 1226 digital input module F-DI 16x 24 V DC, PROFI-safe, 70 mm size, up to PLe (ISO 13849-1)/ SIL3 (IEC 61508)	6ES7226-6BA32-0XB0
Accessories	
Terminal block (spare part)	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Digital signal module 32CH (4 units with 11 screws each)	6ES7292-1AL30-0XA0
Front flap set (spare part)	
SIMATIC S7-1200, spare part front flaps signal module 70 mm (signal module 70 mm wide front flap top & bottom) 6 units each	6ES7291-1BB30-0XA0
STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.	
SIMATIC S7, F programming tool; STEP 7 Safety Advanced V19; engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB	6ES7833-1FA23-0YA5

SIMATIC S7-1200 Basic Controllers

I/O modules

Fail-safe I/O modules

SM 1226 fail-safe digital input**Ordering data****Article No.****Article No.**

**SIMATIC S7, F programming tool;
STEP 7 Safety Advanced V19;
engineering software;
floating license for 1 user;
license key for download¹⁾**

Class A, 2 languages (en, de);
runs with TIA Portal V19 STEP 7
Professional V19; for configuring
SIMATIC S7-1200F/1500F,
SIMATIC S7-1500F SW Controller,
SIMATIC S7-300F/400F/WinAC F
Consignee email address required
for delivery

STEP 7 Safety Basic V19

Task:
Engineering tool for configuring
fail-safe user programs for
SIMATIC S7-1200 FC
Requirement:
STEP 7 Basic V19 or higher

Note:

As of TIA Portal V16, the
SIMATIC STEP 7 Safety software
is an integral component of the
SIMATIC STEP 7 product setup.
The functionality of SIMATIC STEP 7
Safety is activated by means of the
license key supplied in each case.

6ES7833-1FA23-0YH5

**SIMATIC S7, F programming tool;
STEP 7 Safety Basic V19,
engineering software;
floating license for 1 user;
license key on USB flash drive**

Class A, 2 languages (en, de);
runs with TIA Portal V19 as of
STEP 7 Basic V19; for configuring
SIMATIC S7-1200F
Content: 1x USB

6ES7833-1FB23-0YA5

**SIMATIC S7, F programming tool;
STEP 7 Safety Basic V19,
engineering software;
floating license for 1 user;
license key for download¹⁾**

Class A, 2 languages (en, de);
runs with TIA Portal V19 as of
STEP 7 Basic V19; for configuring
SIMATIC S7-1200F
Consignee email address required
for delivery

6ES7833-1FB23-0YH5

¹⁾ Up-to-date information and download availability can be found at
<http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7226-6BA32-0XB0 Digital Input SM 1226, F-DI 16x 24VDC
General information	
Product type designation	SM 1226, F-DI 16x24 V DC
Supply voltage	
Rated value (DC)	24 V
Input current	
from backplane bus 5 V DC, max.	155 mA; Current consumption (SM Bus, 5 V DC): 155 mA
Digital inputs	
• from load voltage L+ (without load), max.	130 mA; 130 mA + 6 mA / input used + any Vs1/Vs2 current used
Digital inputs	
Number of digital inputs	16; 16 (1001) or 8 (1002); Note: You can individually assign each pair of inputs "a.x" and "b.x" as a single (1002)-channel or as 2 separate (1001)-channels
Number of simultaneously controllable inputs	
horizontal installation - up to 50 °C, max.	16; 16 inputs at 55 °C horizontal
vertical installation - up to 40 °C, max.	16; 16 inputs at 45 °C vertical
Input voltage	
• for signal *0*	-30 V DC to +5 V DC
• for signal *1*	15 V DC to 30 V DC
Input current	
• for signal *0*, max. (permissible quiescent current)	0.5 mA
• for signal *1*, typ.	5 mA
Input delay (for rated value of input voltage)	
for standard inputs - parameterizable	Yes; 0.8 / 1.6 / 3.2 / 6.4 / 12.8 ms
Interrupts/diagnostics/ status information	
Diagnostics indication LED	
• for status of the inputs	Yes

Article number	6ES7226-6BA32-0XB0 Digital Input SM 1226, F-DI 16x 24VDC
Degree and class of protection	
IP degree of protection	IP20
Standards, approvals, certificates	
CE mark	Yes
cULus	Yes
FM approval	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	1-channel, Category 3, PL d; 2-channel, Category 3 or 4, PL e
• SIL acc. to IEC 61508	SIL 2 (single-channel), SIL 3 (two-channel)
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	55 °C
Mechanics/material	
Enclosure material (front)	
• Plastic	Yes
Dimensions	
Width	70 mm
Height	100 mm
Depth	75 mm
Weights	
Weight, approx.	250 g

SIMATIC S7-1200 Basic Controllers

I/O modules

Fail-safe I/O modules

SM 1226 fail-safe digital output

Overview



- Digital outputs as a supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFIsafe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional outputs
- Operable exclusively in the central system

Ordering data

Article No.

SIMATIC S7-1200, SM 1226 digital output module **6ES7226-6DA32-0XB0**

F-DQ 4x 24 V DC 2 A, PROFIsafe, 70 mm size, up to PLe (ISO 13849-1)/ SIL3 (IEC 61508)

Accessories

Terminal block (spare part)

SIMATIC S7-1200, spare part, tin-coated I/O terminal block **6ES7292-1AL30-0XA0**

Digital signal module 32CH (4 units with 11 screws each)

Front flap set (spare part)

SIMATIC S7-1200, spare part front flaps signal module 70 mm **6ES7291-1BB30-0XA0**

(signal module 70 mm wide front flap top & bottom) 6 units each

STEP 7 Safety Advanced V19

Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O

Requirement:

STEP 7 Professional V19

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

SIMATIC S7, F programming tool; STEP 7 Safety Advanced V19; engineering software; floating license for 1 user; license key on USB flash drive **6ES7833-1FA23-0YA5**

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F
Content: 1x USB

Ordering data	Article No.	Ordering data	Article No.
<p>SIMATIC S7, F programming tool; STEP 7 Safety Advanced V19; engineering software; floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Consignee email address required for delivery</p>	6ES7833-1FA23-0YH5	<p>SIMATIC S7, F programming tool; STEP 7 Safety Basic V19, engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 as of STEP 7 Basic V19; for configuring SIMATIC S7-1200F Content: 1x USB</p>	6ES7833-1FB23-0YA5
<p>STEP 7 Safety Basic V19</p> <p>Task: Engineering tool for configuring fail-safe user programs for SIMATIC S7-1200 FC Requirement: STEP 7 Basic V19 or higher</p> <p><u>Note:</u> As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>		<p>SIMATIC S7, F programming tool; STEP 7 Safety Basic V19, engineering software; floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 as of STEP 7 Basic V19; for configuring SIMATIC S7-1200F Consignee email address required for delivery</p>	6ES7833-1FB23-0YH5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1200 Basic Controllers

I/O modules

Fail-safe I/O modules

SM 1226 fail-safe digital output

Technical specifications

Article number	6ES7226-6DA32-0XB0 Digital Output SM 1226, F-DQ 4x 24VDC
General information	
Product type designation	SM 1226 F-DQ 4x 24 VDC
Input current	
from backplane bus 5 V DC, max.	125 mA
Digital outputs	
• from load voltage L+, max.	170 mA
Digital outputs	
Number of digital outputs	4
• in groups of	1
Short-circuit protection	Yes
Switching capacity of the outputs	
• with resistive load, max.	30 Hz
• on lamp load, max.	10 Hz
Output voltage	
• Rated value (DC)	24 V
Output current	
• for signal "1" rated value	2 A
• for signal "0" residual current, max.	P-switch: 0.5 mA, maximum; M-switch: 0.5 mA, maximum
Interrupts/diagnostics/ status information	
Diagnostics indication LED	
• for status of the outputs	Yes
Degree and class of protection	
IP degree of protection	IP20

Article number	6ES7226-6DA32-0XB0 Digital Output SM 1226, F-DQ 4x 24VDC
Standards, approvals, certificates	
CE mark	Yes
cULus	Yes
FM approval	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	Category 4, PL e
• SIL acc. to IEC 61508	SIL 3
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	55 °C
Mechanics/material	
Enclosure material (front)	
• Plastic	Yes
Dimensions	
Width	70 mm
Height	100 mm
Depth	75 mm
Weights	
Weight, approx.	270 g

3

Overview



- Relay outputs as a supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFIsafe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional outputs
- Operable exclusively in the central system

Ordering data

Article No.

SIMATIC S7-1200, SM 1226 relay output F-DQ 2x RLY 5 A, PROFIsafe, 70 mm size, up to PLe (ISO 13849-1)/ SIL3 (IEC 61508)	6ES7226-6RA32-0XB0
Accessories	
Terminal block (spare part)	
SIMATIC S7-1200, spare part, tin-coated I/O terminal block Encoded right, digital signal module 32CH (4 units with 11 screws each)	6ES7292-1AL40-0XA0
Front flap set (spare part)	
SIMATIC S7-1200, spare part front flaps signal module 70 mm (signal module 70 mm wide front flap top & bottom) 6 units each	6ES7291-1BB30-0XA0
STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.	
SIMATIC S7, F programming tool; STEP 7 Safety Advanced V19; engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB	6ES7833-1FA23-0YA5

SIMATIC S7-1200 Basic Controllers

I/O modules

Fail-safe I/O modules

SM 1226 fail-safe relay output**Ordering data****Article No.****Article No.**

**SIMATIC S7, F programming tool;
STEP 7 Safety Advanced V19;
engineering software,
floating license for 1 user;
license key for download¹⁾**

Class A, 2 languages (en, de);
runs with TIA Portal V19 STEP 7
Professional V19; for configuring
SIMATIC S7-1200F/1500F,
SIMATIC S7-1500F SW Controller,
SIMATIC S7-300F/400F/WinAC F
Consignee email address required
for delivery

6ES7833-1FA23-0YH5

**SIMATIC S7, F programming tool;
STEP 7 Safety Basic V19,
engineering software;
floating license for 1 user;
license key on USB flash drive**

Class A, 2 languages (en, de);
runs with TIA Portal V19 as of
STEP 7 Basic V19; for configuring
SIMATIC S7-1200F
Content: 1x USB

6ES7833-1FB23-0YA5

STEP 7 Safety Basic V19

Task:
Engineering tool for configuring
fail-safe user programs for
SIMATIC S7-1200 FC
Requirement:
STEP 7 Basic V19 or higher

Note:

As of TIA Portal V16, the
SIMATIC STEP 7 Safety software
is an integral component of the
SIMATIC STEP 7 product setup.
The functionality of SIMATIC STEP 7
Safety is activated by means of the
license key supplied in each case.

**SIMATIC S7, F programming tool;
STEP 7 Safety Basic V19,
engineering software;
floating license for 1 user;
license key for download¹⁾**

Class A, 2 languages (en, de);
runs with TIA Portal V19 as of
STEP 7 Basic V19; for configuring
SIMATIC S7-1200F
Consignee email address required
for delivery

6ES7833-1FB23-0YH5

¹⁾ Up-to-date information and download availability can be found at
<http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7226-6RA32-0XB0 Digital Output SM 1226, F-DQ 2x Relay
General information	
Product type designation	SM 1226, F-DQ 2x relay/5 A
Input current	
from backplane bus 5 V DC, max.	120 mA
Digital outputs	
• from load voltage L+, max.	300 mA
Digital outputs	
Number of digital outputs	2
Short-circuit protection	No
Output voltage	
• Rated value (DC)	5 V DC to 30 V DC
• Rated value (AC)	5 V AC to 250 V AC
Relay outputs	
• Number of relay outputs	2; 2 circuits per output
Switching capacity of contacts	
- with inductive load, max.	0.1 Hz, accordance with IEC 60947-5-1, DC-13; 2 Hz, accordance with IEC 60947-5-1, AC-15
- with resistive load, max.	2 Hz
Interrupts/diagnostics/ status information	
Diagnostics indication LED	
• for status of the outputs	Yes
Degree and class of protection	
IP degree of protection	IP20

Article number	6ES7226-6RA32-0XB0 Digital Output SM 1226, F-DQ 2x Relay
Standards, approvals, certificates	
CE mark	Yes
cULus	Yes
FM approval	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	Category 4, PL e
• SIL acc. to IEC 61508	SIL 3
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	55 °C
Mechanics/material	
Enclosure material (front)	
• Plastic	Yes
Dimensions	
Width	70 mm
Height	100 mm
Depth	75 mm
Weights	
Weight, approx.	300 g

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS Fail-safe digital inputs and outputs

SIPLUS SM 1226 fail-safe digital input

Overview



- Digital inputs as supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFIsafe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional inputs
- Operable exclusively in the central system

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

SIPLUS SM 1226 fail-safe digital input signal module

(Extended temperature range and environmental stress)

16 inputs, 24 V DC (SIL 2/category 3/PL d) or 8 inputs 24 V DC (SIL 3/category 3 or category 4/PL e) or a combination of both

Accessories

Article No.

6AG1226-6BA32-5XB0

See SIMATIC SM 1226 fail-safe digital input signal module, page 3/175

Technical specifications

Article number	6AG1226-6BA32-5XB0
Based on	6ES7226-6BA32-0XB0 SIPLUS S7-1200 SM 1226 F-DI 16x24VDC
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C; = Tmin
• max.	55 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS Fail-safe digital inputs and outputs

SIPLUS SM 1226 fail-safe digital output

Overview



- Digital outputs as a supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFIsafe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional outputs
- Operable exclusively in the central system

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

Ordering data

SIPLUS SM 1226 fail-safe digital output module

4 outputs; 24 V DC, current sourcing/sinking

Accessories

Article No.

6AG1226-6DA32-5XB0

See SIMATIC SM 1226 fail-safe digital output signal module, page 3/178

Technical specifications

Article number	6AG1226-6DA32-5XB0
Based on	6ES7226-6DA32-0XB0 SIPLUS S7-1200 SM 1226 F-DQ 4x24VDC
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C; = Tmin
• max.	55 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

I/O modules

SIPLUS Fail-safe digital inputs and outputs

SIPLUS SM 1226 fail-safe relay output

Overview



- Relay outputs as a supplement to the integral I/O of the CPUs
- Integrated into the overall automation for the implementation of safety-related requirements
- With integrated safety functions
- Communication with fail-safe CPUs via PROFIsafe mechanisms
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional outputs
- Operable exclusively in the central system

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

Ordering data

SIPLUS SM 1226 fail-safe relay output signal module

2 relay outputs

Accessories

Article No.

6AG1226-6RA32-5XB0

See SIMATIC SM 1226 fail-safe relay output signal module, page 3/181

Technical specifications

Article number	6AG1226-6RA32-5XB0
Based on	6ES7226-6RA32-0XB0 SIPLUS S7-1200 SM 1226 F-DQ 2xRelay
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C; = Tmin
• max.	55 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Overview



In terms of design and functionality, the SIMATIC PM 1207 single-phase load power supply (PM = power module) with automatic range selection of the input voltage is an optimal match to the SIMATIC S7-1200 PLC. It provides the supply to CPUs with 24 V input as well as to signal modules, and to 24 V loads connected to the modules. Comprehensive certifications such as UL and DNV GL enable universal use.

Ordering data

Article No.

SIMATIC S7-1200 PM 1207

Input: 120/230 V AC
Output: 24 V DC/2.5 A

6EP1332-1SH71

Technical specifications

Article number	6EP1332-1SH71
product brand name	S7-1200 PM1207
type of current supply	24 V/2.5 A
input	
type of the power supply network	1-phase AC
supply voltage at AC	Automatic range selection
supply voltage	120 V/230 V
• input voltage 1 at AC	85 ... 132 V
• input voltage 2 at AC	176 ... 264 V
wide range input	No
overvoltage overload capability	$2.3 \times V_{in}$ rated, 1.3 ms
buffering time for rated value of the output current in the event of power failure minimum	20 ms
operating condition of the mains buffering	at $V_{in} = 93/187$ V
line frequency	50 Hz/60 Hz
line frequency initial value	47 ... 63 Hz
line frequency full-scale value	

Article number	6EP1332-1SH71
product brand name	S7-1200 PM1207
type of current supply	24 V/2.5 A
input current	
• at rated input voltage 120 V	1.2 A
• at rated input voltage 230 V	0.67 A
current limitation of inrush current at 25 °C maximum	13 A
duration of inrush current limiting at 25 °C	
• maximum	3 ms
I ² t value maximum	0.5 A ² ·s
• fuse protection type	T 3, 15 A/250 V (not accessible)
• fuse protection type in the feeder	Recommended miniature circuit breaker: 16 A characteristic B or 10 A characteristic C
output	
voltage curve at output	Controlled, isolated DC voltage
output voltage at DC rated value	24 V
output voltage	
• at output 1 at DC rated value	24 V
output voltage adjustable	No; -
relative overall tolerance of the voltage	3 %
relative control precision of the output voltage	
• on slow fluctuation of input voltage	0.1 %
• on slow fluctuation of ohm loading	0.2 %
residual ripple	
• maximum	150 mV
voltage peak	
• maximum	240 mV
display version for normal operation	Green LED for 24 V OK
behavior of the output voltage when switching on	No overshoot of V_{out} (soft start)
response delay maximum	6 s; 2 s at 230 V, 6 s at 120 V
voltage increase time of the output voltage	
• typical	10 ms
output current	
• rated value	2.5 A
• rated range	0 ... 2.5 A
supplied active power typical	60 W
short-term overload current	
• on short-circuiting during the start-up typical	6 A
• at short-circuit during operation typical	6 A
duration of overloading capability for excess current	
• on short-circuiting during the start-up	100 ms
• at short-circuit during operation	100 ms
bridging of equipment	Yes
number of parallel-switched equipment resources	2
efficiency in percent	83 %
power loss [W]	
• at rated output voltage for rated value of the output current typical	12 W

SIMATIC S7-1200 Basic Controllers

Power supplies

1-phase, 24 V DC (for S7-1200)

Technical specifications

Article number	6EP1332-1SH71
product brand name	S7-1200 PM1207
type of current supply	24 V/2.5 A
closed-loop control	
relative control precision of the output voltage with rapid fluctuation of the input voltage by +/- 15% typical	0.3 %
relative control precision of the output voltage load step of resistive load 50/100/50 % typical	3 %
setting time	
• load step 50 to 100% typical	5 ms
• load step 100 to 50% typical	5 ms
setting time	
• maximum	5 ms
protection and monitoring	
design of the overvoltage protection	< 33 V
property of the output short-circuit proof	Yes
design of short-circuit protection	Constant current characteristic
• response value current limitation typical	2.65 A
enduring short circuit current RMS value	
• typical	2.7 A
safety	
galvanic isolation between input and output	Yes
galvanic isolation	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178
operating resource protection class	Class I
leakage current	
• maximum	3.5 mA
protection class IP standard	IP20
• for emitted interference	EN 55022 Class B
• for mains harmonics limitation	not applicable
• for interference immunity	EN 61000-6-2
standards, specifications, approvals	
certificate of suitability	
• CE marking	Yes
• UL approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950-1, CSA C22.2 No. 60950-1) File E151273
• CSA approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cURus-Recognized (UL 60950-1, CSA C22.2 No. 60950-1) File E151273
• EAC approval	Yes
• NEC Class 2	Yes; according to UL1310, File E151273
type of certification	
• CB-certificate	Yes
MTBF at 40 °C	1 492 537 h

Article number	6EP1332-1SH71
product brand name	S7-1200 PM1207
type of current supply	24 V/2.5 A
standards, specifications, approvals hazardous environments	
certificate of suitability	
• IECEx	Yes; IECEx Ex nA nC IIC T4 Gc
• ATEX	Yes; ATEX (EX) II 3G Ex nA nC IIC T4 Gc
• ULhazloc approval	Yes
• cCSAus, Class 1, Division 2	No
• FM registration	Yes; Class I, Div. 2, Group ABCD, T4
standards, specifications, approvals marine classification	
shipbuilding approval	Yes
Marine classification association	
• American Bureau of Shipping Europe Ltd. (ABS)	Yes
• French marine classification society (BV)	Yes
• Det Norske Veritas (DNV)	Yes
• Lloyds Register of Shipping (LRS)	Yes
• Nippon Kaiji Kyokai (NK)	Yes
ambient conditions	
ambient temperature	
• during operation	0 ... 60 °C; with natural convection
• during transport	-40 ... +85 °C
• during storage	-40 ... +85 °C
environmental category according to IEC 60721	Climate class 3K3, 5 ... 95% no condensation
connection method	
type of electrical connection	screw-type terminals
• at input	L, N, PE: 1 screw terminal each for 0.5 ... 2.5 mm ²
• at output	L+, M: 2 screw terminals each for 0.5 ... 2.5 mm ²
• for auxiliary contacts	-
mechanical data	
width × height × depth of the enclosure	70 mm × 100 mm × 75 mm
installation width × mounting height	70 mm × 140 mm
required spacing	
• top	20 mm
• bottom	20 mm
• left	0 mm
• right	0 mm
fastening method	Snaps onto DIN rail EN 60715 35x7.5/15, wall mounting
• standard rail mounting	Yes
• S7 rail mounting	No
• wall mounting	Yes
housing can be lined up	Yes
net weight	0.3 kg
additional information	
other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

Overview



- Stabilized power supply for SIPLUS S7-1200
- In the S7-1200 design
- Input 120/230 V AC, output 24 V DC, 2.5 A (derating: 1.5 A above 60 °C)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

SIPLUS power supply PM 1207		
Article No.	6AG1332-1SH71-4AA0	6AG1332-1SH71-7AA0
Article No. based on	6EP1332-1SH71	
Ambient temperature range	0 ... +60° C	-40 ... +70° C
Conformal coating	Coating of the printed circuit boards and the electronic components	
Technical specifications	The technical data of the standard product applies except for the ambient conditions.	
Ambient conditions		
Relative humidity	100%, condensation/frost permissible. No commissioning if condensation present.	
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold and fungal spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation.	
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation.	
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.	
Air pressure (depending on the highest positive temperature range specified)	1080 ... 795 hPa (-1000 ... +2000 m) see ambient temperature range 795 ... 658 hPa (+2000 ... +3500 m) derating 10 K 658 ... 540 hPa (+3500 ... +5000 m) derating 20 K	

For technical documentation on SIPLUS, see:
<http://www.siemens.com/siplus-extreme>

SIMATIC S7-1200 Basic Controllers

SIPLUS power supplies

1-phase, 24 V DC (for SIPLUS S7-1200)**Ordering data****Article No.****SIPLUS S7-1200 PM 1207
power supply**

(Extended temperature range and exposure to environmental substances)

Input 120/230 V AC,
output 24 V DC, 2.5 A;
derating from +55 °C to
+70 °C to 1.2 A output current

Ambient temperature -25 ... +70 °C

Ambient temperature 0 ... +60 °C

6AG1332-1SH71-7AA0**6AG1332-1SH71-4AA0****Technical specifications**

	SIPLUS PM 1207
Article No.	6AG1332-1SH71-7AA0 6AG1332-1SH71-4AA0
Article No. based on	6EP1332-1SH71
Input voltage, nominal value	120/230 V AC (auto-switching)
• Range	85 ... 132 V/176 ... 264 V AC
Mains buffering	> 20 ms (at 93/187 V)
Line frequency, nominal	50/60 Hz
• Range	47 ... 63 Hz
Input current, nominal value	1.2/0.67 A
• Inrush current (25 °C)	<13 A
• Recommended circuit-breaker	16 A Charact. B, 10 A Charact. C
Output voltage, nominal value	24 V DC
• Tolerance	± 3%
• Residual ripple	< 150 mVpp
• Adjustment	No
Output current, nominal value	2.5 A (derating: 1.5 A above 60 °C)
Efficiency at nominal values, approx.	83%
Parallel operation	Yes, 2 units
Electronic short-circuit protection	Yes, automatic restart
Radio interference suppression (EN 55022)	Class B
Operating display	Green LED for "24 V o.k."
Supply-harmonics limitation (EN 61000-3-2)	Not applicable
Degree of protection (EN 60529)	IP20
Protection class	Class 1
Electric isolation	SELV acc. to EN 60950 and EN 50178
Ambient temperature	0 ... +60 °C -40 ... +70 °C
Transport and storage temperature	-40 ... +85 °C
Installation	DIN rail EN 60715 35x7.5/15
Dimensions (W x H x D) in mm	70 x 100 x 75
Weight, approx.	0.3 kg
Certifications	CE

Overview**Basic Panels 2nd Generation**

With their fully developed HMI basic functions, SIMATIC HMI Basic Panels 2nd Generation are the ideal entry-level series for simple HMI applications.

The device family offers panels with 4", 7", 9" and 12" displays, as well as combined key and touch operation.

The innovative high-resolution widescreen displays with 64 000 colors are also suitable for upright installation, and they can be dimmed down to 100%. The innovative operator interface with improved usability opens up a diverse range of options thanks to new controls and graphics. The new USB interface enables the connection of keyboard, mouse or bar code scanner, and supports the simple archiving of data on a USB flash drive as well as the manual backup and restoring of the complete panel.

The integrated Ethernet or RS 485/422 interface (version-specific) enables simple connection to the controller.

More information is available at
<http://www.siemens.com/basic-panels>

Ordering data**Article No.**

Ordering data	Article No.
SIMATIC HMI Basic Panels (2nd Generation)	
Key and touch devices	
SIMATIC HMI KTP400 Basic Key/touch operation; 4" TFT widescreen display, 65 536 colors, PROFINET interface	6AV2123-2DB03-0AX0
SIMATIC HMI TP400 Basic Keyless Touch screen operation; 4" TFT widescreen display, 65 536 colors, PROFINET interface	6AV2143-6DB00-0AA0
SIMATIC HMI KTP700 Basic Key/touch operation; 7" TFT display, 65 536 colors, PROFINET interface	6AV2123-2GB03-0AX0
SIMATIC HMI KTP700 Basic DP Key/touch operation; 7" TFT display, 65 536 colors, PROFIBUS interface	6AV2123-2GA03-0AX0
SIMATIC HMI TP700 Basic Keyless Touch screen operation; 7" TFT display, 65 536 colors, PROFINET interface	6AV2143-6GB00-0AA0
SIMATIC HMI KTP900 Basic Key/touch operation; 9" TFT display, 65 536 colors, PROFINET interface	6AV2123-2JB03-0AX0
SIMATIC HMI TP900 Basic Keyless Touch screen operation; 9" TFT display, 65 536 colors, PROFINET interface	6AV2143-6JB00-0AA0
SIMATIC HMI KTP1200 Basic Key/touch operation; 12" TFT display, 65 536 colors, PROFINET interface	6AV2123-2MB03-0AX0
SIMATIC HMI KTP1200 Basic DP Key/touch operation; 12" TFT display, 65 536 colors, PROFIBUS interface	6AV2123-2MA03-0AX0
Documentation You can find the Equipment Manual for the Basic Panels on the Internet at:	https://support.automation.siemens.com
Accessories	See Catalog ST 80/ST PC or SiePortal

SIMATIC S7-1200 Basic Controllers

Operator control and monitoring
Comfort Panels

Comfort Panels standard devices

Overview



SIMATIC HMI Comfort Panels - Standard devices

- Excellent HMI functionality for demanding applications
- Widescreen TFT displays with 4", 7", 9", 12", 15", 19" and 22" diagonals (all 16 million colors) with up to 40% more visualization area as compared to the predecessor devices
- Integrated high-end functionality with archives, scripts, PDF/Word/Excel viewer, Internet Explorer, Media Player and Web Server
- Dimmable displays from 0 to 100% via PROFlenergy, via the HMI project or via a controller
- Modern industrial design, cast aluminum fronts for 7" upwards
- Upright installation for all touch devices
- Data security in the event of a power failure for the device and for the SIMATIC HMI Memory Card
- Innovative service and commissioning concept
- Maximum performance with short screen refresh times
- Suitable for extremely harsh industrial environments thanks to extended approvals such as ATEX 2/22 and marine approvals
- All versions can be used as an OPC UA client or as a server
- Key-operated devices with LED in every function key and new text input mechanism, similar to the keypads of mobile phones
- All keys have a service life of 2 million operations
- Configuring with the WinCC engineering software of the TIA Portal engineering framework

Note:

A 7" and a 15" Comfort Outdoor version are available. These devices have been specially designed for outdoor applications in difficult environments. Best display quality, even under sunlight, UV-resistant fronts and much more.

More information is available at
<http://www.siemens.com/comfort-panels>

Ordering data

Article No.

Ordering data	Article No.
SIMATIC HMI Comfort Panels	
Touch devices	
SIMATIC HMI TP700 Comfort Touch operation; 7" widescreen display	6AV2124-0GC01-0AX0
SIMATIC HMI TP900 Comfort Touch operation; 9" widescreen display	6AV2124-0JC01-0AX0
SIMATIC HMI TP1200 Comfort Touch operation; 12" widescreen display	6AV2124-0MC01-0AX0
SIMATIC HMI TP1500 Comfort Touch operation; 15" widescreen display	6AV2124-0QC02-0AX2
SIMATIC HMI TP1900 Comfort Touch operation; 19" widescreen display	6AV2124-0UC02-0AX1
SIMATIC HMI TP2200 Comfort Touch operation; 22" widescreen display	6AV2124-0XC02-0AX1
Key devices	
SIMATIC HMI KP700 Comfort Key operation; 7" widescreen display	6AV2124-1GC01-0AX0
SIMATIC HMI KP900 Comfort Key operation; 9" widescreen display	6AV2124-1JC01-0AX0
SIMATIC HMI KP1200 Comfort Key operation; 12" widescreen display	6AV2124-1MC01-0AX0
SIMATIC HMI KP1500 Comfort Key operation; 15" widescreen display	6AV2124-1QC02-0AX2
Accessories	See Catalog ST 80/ST PC or SiePortal

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Basic Panels (2nd Generation)

Overview



With their fully developed HMI basic functions, 2nd Generation SIPLUS Basic Panels are the ideal entry-level series for simple HMI applications.

The device family offers panels with 4", 7", 9" and 12" displays, as well as combined key and touch operation.

The innovative high-resolution widescreen displays with 64 000 colors are also suitable for upright installation, and they can be dimmed down to 100%. The innovative operator interface with improved usability opens up a diverse range of options thanks to new controls and graphics. The new USB interface enables the connection of keyboard, mouse or barcode scanner, and supports the simple archiving of data on a USB flash drive.

The integrated Ethernet or RS 485/422 interface (version-specific) enables simple connection to the controller.

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

Ordering data	Article No.
SIPLUS HMI Basic Panels, Key and Touch	
SIPLUS HMI KTP400 Basic For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C	6AG1123-2DB03-2AX0
SIPLUS HMI KTP700 Basic For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C	6AG1123-2GB03-2AX0
SIPLUS HMI KTP700 Basic DP For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C	6AG1123-2GA03-2AX0
SIPLUS HMI KTP900 Basic For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C	6AG1123-2JB03-2AX0
SIPLUS HMI KTP1200 Basic For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -10 ... +50 °C	6AG1123-2MB03-2AX0
SIPLUS HMI KTP1200 Basic DP For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -10 ... +50 °C	6AG1123-2MA03-2AX0
Accessories	See Catalog ST 80/ST PC or SiePortal

Technical specifications

Article number	6AG1123-2DB03-2AX0	6AG1123-2GB03-2AX0	6AG1123-2GA03-2AX0
Based on	6AV2123-2DB03-0AX0 SIPLUS HMI KTP400 BASIC	6AV2123-2GB03-0AX0 SIPLUS HMI KTP700 BASIC	6AV2123-2GA03-0AX0 SIPLUS HMI KTP700 BASIC DP
Ambient conditions			
Suited for indoor use		Yes	Yes
Suited for outdoor use		No	No
Ambient temperature during operation			
Operation (vertical installation)			
- For vertical installation, min.	-20 °C; = Tmin	-20 °C	-20 °C; = Tmin
- For vertical installation, max.	60 °C; = Tmax	50 °C	50 °C
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning when condensation present), vertical mounting position

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Basic Panels (2nd Generation)

Technical specifications

Article number	6AG1123-2DB03-2AX0	6AG1123-2GB03-2AX0	6AG1123-2GA03-2AX0
Based on	6AV2123-2DB03-0AX0 SIPLUS HMI KTP400 BASIC	6AV2123-2GB03-0AX0 SIPLUS HMI KTP700 BASIC	6AV2123-2GA03-0AX0 SIPLUS HMI KTP700 BASIC DP
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1123-2JB03-2AX0	6AG1123-2MB03-2AX0	6AG1123-2MA03-2AX0
Based on	6AV2123-2JB03-0AX0 SIPLUS HMI KTP900 BASIC	6AV2123-2MB03-0AX0 SIPLUS HMI KTP1200 BASIC	6AV2123-2MA03-0AX0 SIPLUS HMI KTP1200 BASIC DP
Ambient conditions			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
Ambient temperature during operation			
Operation (vertical installation)			
- For vertical installation, min.	-20 °C	-10 °C; = Tmin	-10 °C; = Tmin
- For vertical installation, max.	50 °C	50 °C	50 °C
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Basic Panels (2nd Generation)

3

Technical specifications

Article number	6AG1123-2JB03-2AX0	6AG1123-2MB03-2AX0	6AG1123-2MA03-2AX0
Based on	6AV2123-2JB03-0AX0	6AV2123-2MB03-0AX0	6AV2123-2MA03-0AX0
	SIPLUS HMI KTP900 BASIC	SIPLUS HMI KTP1200 BASIC	SIPLUS HMI KTP1200 BASIC DP
<ul style="list-style-type: none"> Ambient air temperature-barometric pressure-altitude 	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity <ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning when condensation present), vertical mounting position
Resistance			
Coolants and lubricants <ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea <ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology <ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark <ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating <ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Basic Panels (1st Generation)

Overview



- Ideal entry-level series of 3.8" to 15" for operating and monitoring compact machines and systems
- Clear process representation through the use of full-graphic displays
- Intuitive operation via touch and tactile function keys
- Equipped with all the necessary basic functions such as reporting, recipe management, curve representation, vector graphics, and language selection
- Easy connection to the controller via integrated Ethernet interface or a separate version with RS485/422
- Faster commissioning thanks to integrated diagnostics viewer and IP setting for SIMATIC S7-1200 and S7-1500 PLCs

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS HMI Basic Panels

SIPLUS HMI KP300 Basic mono PN

with conformal coating, ambient temperature -25... +60°C, based on 6AV6647-0AH11-3AX1

6AG1647-0AH11-2AX1

Accessories

See Catalog ST 80/ST PC or SiePortal

Technical specifications

Article number	6AG1647-0AH11-2AX1
Based on	6AV2647-0AH11-3AX1 SIPLUS HMI KP300 Basic mono PN
Ambient conditions	
Suited for indoor use	Yes
Suited for outdoor use	No

Article number	6AG1647-0AH11-2AX1
Based on	6AV2647-0AH11-3AX1 SIPLUS HMI KP300 Basic mono PN
Ambient temperature during operation	
Operation (vertical installation)	
- For vertical installation, min.	-25 °C; = Tmin
- For vertical installation, max.	60 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning when condensation present), horizontal at vertical mounting position
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Overview



- Excellent HMI functionality for demanding applications
- Widescreen TFT displays with 4", 7", 9", 12", 15", 19" and 22" diagonals (all 16 million colors) with up to 40% more visualization area as compared to the predecessor devices
- Integrated high-end functionality with archives, scripts, PDF/Word/Excel viewer, Internet Explorer, Media Player
- Dimmable displays from 0 to 100% via PROFIenergy, via the HMI project or via a controller
- Modern industrial design, cast aluminum fronts for 7" upwards
- Upright installation for all touch devices
- Optimal selection option: seven touch and five key versions are available
- Data security in the event of a power failure for the device and for the SIMATIC HMI Memory Card
- Innovative service and commissioning concept through second SD card (automatic backup)
- Easy project transfer via standard cable (standard Ethernet cable, standard USB cable)
- Maximum performance with short screen refresh times
- Suitable for extremely harsh industrial environments thanks to extended approvals such as ATEX 2/22
- Wide range of communication options: PROFIBUS and PROFINET onboard; 2x PROFINET with integrated switch for 7" models or larger; plus 1 additional PROFINET with Gigabit support for 15" models or larger
- All variants can be used as an OPC UA client or as an OPC DA server
- Key-operated devices with LED in every function key and new text input mechanism, similar to the keypads of mobile phones
- Key-operated devices with stamped keys for optimum tactile feedback
- All keys have a service life of 2 million operations
- Configuring with the WinCC engineering software of the TIA Portal

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS HMI Comfort Panels, Touch	
SIPLUS HMI TP700 Comfort	6AG1124-0GC01-4AX0
SIPLUS HMI TP900 Comfort	6AG1124-0JC01-4AX0
SIPLUS HMI TP1200 Comfort	6AG1124-0MC01-4AX0
SIPLUS HMI TP1500 Comfort	6AG1124-0QC02-4AX1
SIPLUS HMI TP1900 Comfort	6AG1124-0UC02-4AX1
SIPLUS HMI TP2200 Comfort	6AG1124-0XC02-4AX1
SIPLUS HMI Comfort Panels, Keys	
SIPLUS HMI KP700 Comfort	6AG1124-1GC01-4AX0
SIPLUS HMI KP900 Comfort	6AG1124-1JC01-4AX0
SIPLUS HMI KP1200 Comfort	6AG1124-1MC01-4AX0
SIPLUS HMI KP1500 Comfort	6AG1124-1QC02-4AX1
Accessories	See Catalog ST 80/ST PC or SiePortal

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Comfort Panels Standard

Technical specifications

Article number	6AG1124-0GC01-4AX0	6AG1124-0JC01-4AX0	6AG1124-0MC01-4AX0
Based on	6AV2124-0GC01-0AX0 SIPLUS HMI TP700 COMFORT	6AV2124-0JC01-0AX0 SIPLUS HMI TP900 COMFORT	6AV2124-0MC01-0AX0 SIPLUS HMI TP1200 COMFORT
Ambient conditions			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
Ambient temperature during operation			
Operation (vertical installation)			
- For vertical installation, min.	0 °C; = Tmin	0 °C; = Tmin	0 °C; = Tmin
- For vertical installation, max.	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

Technical specifications

Article number	6AG1124-0GC01-4AX0	6AG1124-0JC01-4AX0	6AG1124-0MC01-4AX0
Based on	6AV2124-0GC01-0AX0 SIPLUS HMI TP700 COMFORT	6AV2124-0JC01-0AX0 SIPLUS HMI TP900 COMFORT	6AV2124-0MC01-0AX0 SIPLUS HMI TP1200 COMFORT
Conformal coating			
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1124-0QC02-4AX1	6AG1124-0UC02-4AX1	6AG1124-0XC02-4AX1
Based on	6AV2124-0QC02-0AX1 SIPLUS HMI TP1500 Comfort	6AV2124-0UC02-0AX1 SIPLUS HMI TP1900 Comfort	6AV2124-0XC02-0AX1 SIPLUS HMI TP2200 Comfort
Ambient conditions			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
Ambient temperature during operation			
Operation (vertical installation)			
- For vertical installation, min.	0 °C	0 °C; = Tmin	0 °C; = Tmin
- For vertical installation, max.	50 °C; (55 °C, see entry ID: 64847814)	45 °C; = Tmax	45 °C; = Tmax
Altitude during operation relating to sea level			
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Comfort Panels Standard

Technical specifications

Article number	6AG1124-0QC02-4AX1	6AG1124-0UC02-4AX1	6AG1124-0XC02-4AX1	
Based on	6AV2124-0QC02-0AX1 SIPLUS HMI TP1500 Comfort	6AV2124-0UC02-0AX1 SIPLUS HMI TP1900 Comfort	6AV2124-0XC02-0AX1 SIPLUS HMI TP2200 Comfort	
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	
Article number	6AG1124-1GC01-4AX0	6AG1124-1JC01-4AX0	6AG1124-1MC01-4AX0	6AG1124-1QC02-4AX1
Based on	6AV2124-1GC01-0AX0 SIPLUS HMI KP700 Comfort	6AV2124-1JC01-0AX0 SIPLUS HMI KP900 Comfort	6AV2124-1MC01-0AX0 SIPLUS HMI KP1200 Comfort	6AV2124-1QC02-0AX1 SIPLUS HMI KP1500 Comfort
Ambient conditions				
Suited for indoor use	Yes	Yes	Yes	Yes
Suited for outdoor use	No	No	No	No
Ambient temperature during operation				
Operation (vertical installation)				
- For vertical installation, min.	0 °C; = Tmin	0 °C; = Tmin	0 °C; = Tmin	0 °C
- For vertical installation, max.	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax	50 °C; (55 °C, see entry ID: 64847814)
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)

SIMATIC S7-1200 Basic Controllers

SIPLUS operator control and monitoring

SIPLUS Comfort Panels Standard

3

Technical specifications

Article number	6AG1124-1GC01-4AX0	6AG1124-1JC01-4AX0	6AG1124-1MC01-4AX0	6AG1124-1QC02-4AX1
Based on	6AV2124-1GC01-0AX0	6AV2124-1JC01-0AX0	6AV2124-1MC01-0AX0	6AV2124-1QC02-0AX1
	SIPLUS HMI KP700 Comfort	SIPLUS HMI KP900 Comfort	SIPLUS HMI KP1200 Comfort	SIPLUS HMI KP1500 Comfort
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1200 Basic Controllers

Add-on products from third-party manufacturers

SIMATIC S7-1200 CM CANopen

Overview



Note

The CM CANopen module is an HMS Industrial Networks product and can only be obtained through HMS.

The following description contains information on supplementary products that are manufactured and marketed, not by Siemens, but by third-parties outside the Siemens group ("external companies"). These external companies organize the manufacture, sale and delivery of their products independently. Their own terms and conditions of business and delivery apply.

Responsibility for these supplementary products and for the associated information presented here rests exclusively with the respective external company. Unless compulsory by law, Siemens assumes no liability and makes no guarantee for supplemental products of external companies. Please refer also to the note on "Exemption from liability/Use of hyperlinks" (see "More information").

Overview

An interface module is available for operating the SIMATIC S7-1200 on CANopen. It can be used together with system and IO components of the S7-1200 automation system.

CiA and CANopen are registered Community Trademarks of CAN in Automation e.V.

Application

CANopen is a widely used industrial bus system and can be used for a variety of different applications. The module allows simple and cost-effective connection of CANopen applications to SIMATIC.

- Control of hydraulic valves/axes in vehicles
- Control of motors in packaging machines or conveyors
- Control of drives in mobile machines (AGV/AMR)
- Capturing of angular encoder positions in wind turbines
- Capturing of control devices on machines, e.g. joysticks
- Capturing the measured data of path encoders, inclinometers or angular encoders, e.g. for tower cranes and gantry cranes

The CM CANopen module has the following properties:

- Interface module for CANopen (master/device) for SIMATIC S7-1200
- Connection of up to 16 CANopen device nodes in the master mode
- 256 bytes of input data and 256 bytes of output data per module
- Connection of up to 3 modules per CPU
- 3 LEDs for module, network and I/O status diagnostics
- Possible integration of the module into the hardware catalog of the TIA Portal configuration suite
- Supports Transparent CAN 2.0A for processing customer-specific protocols
- CANopen implementation according to communication profiles CiA 301 Rev. 4.2 and CiA 302 Rev. 4.1 (master)

More information

The CANopen bus can be configured via any commercially available CANopen configuration tool. HMS Industrial Networks also supplies suitable "CM CANopen Configuration Studio" software with the product. The configuration is saved directly on the module by means of a USB connection. Routing via PROFIBUS/PROFINET is not possible.

Preprogrammed function blocks are available for easier PLC programming in the TIA Portal.

For more information, please contact HMS Industrial Networks under

<http://www.ixxat.com/cm-canopen>.

Ordering and Support

Please note that ordering and support for the module are exclusively carried out via HMS Industrial Networks. Please contact HMS Industrial Networks directly should you have any questions concerning this module. The relevant contact details can be found under

<http://www.ixxat.com/cm-canopen>.

Exemption from liability/Use of hyperlinks

Siemens has prepared this description with great care. It is not possible, however, for Siemens to verify that the data supplied by external companies is complete, correct or up to date. The possibility that individual items of information might be incorrect, incomplete, or not up-to-date cannot therefore be ruled out. Unless compulsory by law, Siemens accepts no liability for the usability of the data or of the product for the user per se.

This article contains third-party web addresses. Siemens is not responsible for the contents of these web sites, nor does Siemens adopt these web sites and their contents, as Siemens does not control the presented information and cannot be held responsible for the content and information they contain. You therefore use these links at your own risk.



4/3	Introduction	4/148	CPU 1517TF-3 PN/DP
4/3	S7-1500	4/152	CPU 1518T-4 PN/DP
4/6	Central processing units	4/156	CPU 1518TF-4 PN/DP
4/6	<u>Standard CPUs</u>	4/160	Technical specifications
4/6	CPU 1511-1 PN	4/172	I/O modules
4/9	CPU 1513-1 PN	4/172	<u>Digital modules</u>
4/12	CPU 1515-2 PN	4/172	SM 521 digital input modules
4/15	CPU 1516-3 PN/DP	4/181	SM 522 digital output modules
4/19	CPU 1517-3 PN/DP	4/193	SM 523 digital input/output modules
4/23	CPU 1518-4 PN/DP	4/197	<u>SIPLUS digital modules</u>
4/27	CPU 1518-4 PN/DP MFP	4/197	SIPLUS SM 521 digital input modules
4/31	Technical specifications	4/200	SIPLUS SM 522 digital output modules
4/41	<u>SIPLUS standard CPUs</u>	4/204	<u>Analog modules</u>
4/41	SIPLUS CPU 1511-1 PN	4/204	SM 531 analog input modules
4/42	SIPLUS CPU 1513-1 PN	4/217	SM 532 analog output modules
4/43	SIPLUS CPU 1516-3 PN/DP	4/221	SM 534 analog input/output modules
4/44	SIPLUS CPU 1518-4 PN/DP	4/225	<u>SIPLUS analog modules</u>
4/45	SIPLUS CPU 1518-4 PN/DP MFP	4/225	SIPLUS SM 531 analog input modules
4/47	Technical specifications	4/228	SIPLUS SM 532 analog output modules
4/50	<u>Compact CPUs</u>	4/230	<u>Technology modules</u>
4/50	CPU 1511C-1 PN	4/230	TM Count 2x24V counter module
4/53	CPU 1512C-1 PN	4/233	TM PosInput 2 counter and position detection module
4/56	Technical specifications	4/236	TM Timer DIDQ 16x24V time-based IO module
4/59	<u>Fail-safe CPUs</u>	4/239	TM PTO 4 interface module for PTO (Pulse Train Output)
4/59	CPU 1511F-1 PN	4/242	TM FAST user-programmable high-speed module
4/62	CPU 1513F-1 PN	4/245	TM NPU technology module for artificial intelligence applications
4/65	CPU 1515F-2 PN	4/247	TM SIWAREX WP521 ST and WP522 ST weighing electronics
4/68	CPU 1516F-3 PN/DP	4/249	SIPLUS TM Count 2x24V counter module
4/72	CPU 1517F-3 PN/DP	4/250	SIPLUS TM PosInput 2 position detection module
4/76	CPU 1518F-4 PN/DP	4/252	<u>Communication</u>
4/80	CPU 1518F-4 PN/DP MFP	4/252	CM PtP
4/85	Technical specifications	4/255	CM 8xIO-Link
4/96	<u>SIPLUS fail-safe CPUs</u>	4/257	CM 1542-5
4/96	SIPLUS CPU 1511F-1 PN	4/260	CP 1542-5
4/97	SIPLUS CPU 1513F-1 PN	4/262	CM 1542-1
4/98	SIPLUS CPU 1515F-2 PN	4/265	CP 1543-1
4/99	SIPLUS CPU 1516F-3 PN/DP	4/268	CP 1545-1
4/100	SIPLUS CPU 1518F-4 PN/DP	4/271	TIM 1531 IRC (for S7-1500)
4/101	Technical specifications	4/275	SCALANCE W774 RJ45 for the control cabinet
4/103	<u>Redundant CPUs</u>	4/281	SCALANCE W734 RJ45 for the control cabinet
4/103	CPU 1513R-1 PN	4/286	<u>SIPLUS communication</u>
4/106	CPU 1515R-2 PN	4/286	SIPLUS CM PtP
4/109	CPU 1517H-3 PN	4/288	SIPLUS NET CM 1542-5
4/112	CPU 1518HF-4 PN	4/290	SIPLUS NET CP 1543-1
4/115	Technical specifications		
4/119	<u>SIPLUS redundant CPUs</u>		
4/119	SIPLUS CPU 1515R-2 PN		
4/120	SIPLUS CPU 1517H-3 PN		
4/121	SIPLUS CPU 1518HF-4 PN		
4/122	Technical specifications		
4/124	<u>Technology CPUs</u>		
4/124	CPU 1511T-1 PN		
4/127	CPU 1511TF-1 PN		
4/130	CPU 1515T-2 PN		
4/133	CPU 1515TF-2 PN		
4/136	CPU 1516T-3 PN/DP		
4/140	CPU 1516TF-3 PN/DP		
4/144	CPU 1517T-3 PN/DP		



- 4/292 Connection system
- 4/292 Front connectors
- 4/293 System cabling for SIMATIC S7-1500 and ET 200MP
 - 4/294 - Fully modular connection
 - 4/298 - Flexible connection
- 4/299 System cabling for SIMATIC S7-1500 IO (25 mm), ET 200SP, S7-1200 and LOGO!
- 4/301 Fail-safe I/O modules
- 4/301 Digital F-input modules
- 4/304 Digital F-output modules
- 4/307 Analog F-input modules
- 4/310 SIPLUS F-digital/analog modules
- 4/310 SIPLUS digital F-input modules
- 4/311 SIPLUS digital F-output modules

- 4/312 Power supplies**
- 4/312 1-phase, 24 V DC (for S7-1500 and ET 200MP)
- 4/316 System power supplies

- 4/319 SIPLUS power supplies**
- 4/319 1-phase, 24 V DC (for S7-1500 and ET 200MP)
- 4/321 SIPLUS system power supplies

- 4/323 Operator control and monitoring**
- 4/323 Basic Panels
- 4/323 Standard devices 2nd Generation
- 4/324 Comfort Panels
- 4/324 SIMATIC HMI Unified Comfort Panels Standard
- 4/326 Comfort Panels standard devices

- 4/327 SIPLUS Operator control and monitoring**
- 4/327 SIPLUS Basic Panels (2nd Generation)
- 4/330 SIPLUS Basic Panels (1st Generation)
- 4/332 SIPLUS HMI Unified Comfort Panels Standard
- 4/334 SIPLUS Comfort Panels Standard

- 4/339 Accessories**
- 4/339 Mounting rail
- 4/340 Labeling sheets
- 4/341 Spare parts

Overview



With its extended ambient conditions, the SIMATIC S7-1500 can be used almost anywhere. Many controllers can be operated in a temperature range from -30 °C to +60 °C and at altitudes up to 5,000 m as standard. A wide range of SIPLUS Controllers is available for requirements beyond this.

The SIMATIC S7-1500 is

- a modular, scalable, and universally usable system in IP20 degree of protection
- the system solution for a variety of automation applications in discrete automation
- maximum performance combined with excellent usability
- configurable in the Totally Integrated Automation Portal with STEP 7 Professional V12 or higher

Performance

- Increase in performance through
 - Faster command execution
 - Language extensions
 - New data types
 - Faster backplane bus
 - Optimized code generation
- High-performance communication:
 - PROFINET IO (2-port switch) as standard interface; from CPU 1515-2 PN, one or more additional integrated PROFINET interfaces, e.g. for network separation, for connecting further PROFINET devices or for high-speed communication as an I-Device
 - OPC UA server (data access) and client as runtime option for the easy connection of SIMATIC S7-1500 to non-Siemens devices/systems
 - Expandable with communications modules for bus systems and point-to-point connection

Integrated technology

- Motion Control integrated without additional modules:
 - Standardized blocks (PLCopen) for connection of analog and PROFIdrive-capable drives
 - The Motion Control functionality supports speed axes, positioning axes, relative synchronous operation (synchronizing without specification of the synchronized position), as well as external encoders, output cams and probes.
 - Extended Motion Control functions such as velocity gearing, absolute synchronous operation (synchronizing with specification of the synchronized position), camming and functions for controlling kinematics are also integrated in the technology CPUs.
- Comprehensive trace functions for all CPU tags for real-time diagnostics and sporadic error detection; for effective commissioning and quick optimization of drives and controls
- Comprehensive control functionalities: e.g. easily configurable blocks for automatic optimization of the control parameters for optimum control quality
- Additional functions through available technology modules: e.g. high-speed counting, position detection, or measurement functions for signals up to 1 MHz

Safety Integrated

- Protection of personnel and machinery – within the framework of an integrated complete system
- Fail-safe SIMATIC S7-1500(T)F Controllers for processing standard and safety programs on the same controller. The fail-safe and standard user programs are created in the TIA Portal with the same editors; fail-safe data, for example, can therefore be evaluated like standard data in the standard user program. Due to this integration the system benefits and the comprehensive functionality of SIMATIC are also available for fail-safe applications.

Redundant systems

- Redundant S7-1500R/H CPUs for applications where availability of the PLC is crucial.
- Both CPUs are connected with the I/O stations via a PROFINET IO ring. Synchronization for the S7-1500R is via this ring, or via separate FOC synchronization cables for the S7-1500H. In the event of a CPU failure, the back-up CPU automatically assumes control of the process. No data is lost and the process can be continued extremely quickly. The PROFINET IO ring ensures that all nodes remain accessible in the event of a fieldbus interruption.
- The engineering corresponds to that of a standard CPU. The TIA Portal and redundant CPUs handle the synchronization of the programs and data. All without any additional overhead for the user.

SIMATIC S7-1500 Advanced Controllers

Introduction

S7-1500

Overview

Security Integrated

- Password-based know-how protection against unauthorized read-out and modification of program blocks
- Copy protection for greater protection against unauthorized copying of program blocks:
With copy protection, individual blocks on the SIMATIC Memory Card can be tied to its serial number so that the block can only be run if the configured memory card is inserted into the CPU.
- Rights concept with four different authorization levels: Different access rights can be assigned to various user groups. The new protection level 4 makes it possible to also restrict communication to HMI devices.
- Improved manipulation protection:
Changed or unauthorized transfers of engineering data are detected by the controller.
- For use of an Ethernet CP (CP 1543-1):
 - Additional access protection by means of a firewall
 - Establishment of secure VPN connections

Design and handling

- CPUs with display for plain text information (display simulator tool on the internet):
 - Information about article numbers, firmware version, and the serial number of all connected modules can be displayed
 - Setting the IP address of the CPU and additional network settings possible directly on site, without programming device on the display
 - Display of occurring error messages directly as plain text message, meaning reduction in downtime
- Uniform front connectors for all modules and integrated potential bridges for flexible potential group formation simplify stock keeping and reduce wiring effort
- Integrated DIN rail in the S7-1500 DIN rail: quick and easy installation of additional components such as miniature circuit breakers, relays, etc.
- Central expansion with signal modules: for flexible adaptation to any application
- System cabling for digital signal modules: for fast and clearly arranged connecting to sensors and actuators in the field and simple wiring inside the control cabinet
- Power supply:
 - Load current supply modules (Power Modules) for supplying the module with 24 V
 - Power supply modules to supply power to the internal module electronics via the backplane bus
 - System power supply modules for retentively storing the entire work memory (max. 20 MB) on the controller
- Distributed expansion:
 - Use of up to 30 signal modules, communications modules, and technology modules via the PROFINET IM 155-5 interface module for the ET 200MP I/O system
 - No difference in terms of handling and system functions in central and distributed operation

Integrated system diagnostics

- Integrated system diagnostics for CPUs, activated by default:
 - Consistent plain text display of system diagnostic information in the display, TIA Portal, HMI, and web server, even for drive messages. Messages are updated even if the CPU is in STOP state.
 - System diagnostics integrated in the CPU firmware. Configuration by user not required. The diagnostics is automatically updated on configuration changes.

Support of SIMATIC ProDiag S7-1500

- ProDiag is a concept for the easy creation of machine and plant diagnostics. It increases availability and supports with fault analysis and elimination on site.

Data log (archives) and recipes

- SIMATIC Memory Card:
 - Plug-in load memory
 - Permits firmware updates
 - Storage option for STEP 7 projects (including comments and symbols), additional documentation, or csv/ASCII files (for recipes and archives)
 - Easy access to plant-relevant operating data and configuration data with Office tools via the SD card reader (two-way data exchange from and to the PLC)
- Integrated web server:
 - Easy access to plant-relevant operating data and configuration data, Motion Control diagnostics and display of trace recordings via a web browser

Approvals

The SIMATIC S7-1500 complies with the following national and international standards:

- cULus approval
- cULus HazLoc approval
- FM approval
- ATEX approval (only for 24 V; not for 230 V)
- UKEX approval
- CCCEX approval
- CE
- RCM (formerly C-Tick)
- KCC
- UKCA marking
- IECEx (24 V only; not for 230 V)
- EN 61000-6-4
- EN 60068-2-1/-2/-6/-14/-27/-30/-32
- EN 61131-2

You can find the marine approvals available for the S7-1500 on the internet (SIMATIC Customer Support) under <http://www.siemens.com/automation/support>.

The S7-1500 system is also suitable for operating at elevations up to 5000 m. You can find a list of all currently approved modules under <https://support.industry.siemens.com/cs/ww/en/view/109763260>.

Technical specifications

General technical specifications SIMATIC S7-1500	
Degree of protection	IP20 acc. to IEC 60 529
Ambient temperature	0...60 °C (display: at an operating temperature of typ. 50 °C, the display is switched off.)
• Horizontal installation	
• Vertical installation	0... 40 °C (display: at an operating temperature of typ. 40 °C, the display is switched off.)
Relative humidity	10 %...95 %, no condensation
Atmospheric pressure	From 1080 to 795 hPa (corresponds to an altitude of -1000 to +2000 m)
Insulation	707 V DC test voltage (type test)
• < 50 V	2200 V DC test voltage
• < 150 V	2500 V DC test voltage
• < 250 V	
Electromagnetic compatibility	Requirements of the EMC directive; interference immunity according to IEC 61000-6-2
• Pulse-shaped disturbance variables	Test according to: Electrostatic discharge according to IEC 61000-4-2, burst pulses according to IEC 61000-4-4, energy single pulse (surge) according to IEC 61000-4-5,
• Sinusoidal disturbance variables	Test according to: HF irradiation according to IEC 61000-4-3, HF decoupling according to IEC 61000-4-6
• Emission of radio frequency interference	Requirements of the EMC directive; interference emission according to EN 61000-6-4 Interference emission according to 61000-6-4 Interference emission of electromagnetic fields according to EN 61000-6-4
Mechanical stress	
• Vibrations	Testing according to EN 60068-2-6 Tested with: 5 Hz ≤ f ≤ 8.4 Hz, constant amplitude 7 mm; 9 Hz ≤ f ≤ 150 Hz, constant acceleration 2 g; duration of vibration: 10 frequency passes per axis in each direction of the 3 mutually perpendicular axes
• Shock	Testing according to EN 60068-2-27 Tested with: Half-wave: strength of shock 15 g peak value, 11 ms duration; shock direction: 3 shocks each in ± direction in each of the 3 mutually vertical axes

General technical specifications SIPLUS S7-1500	
Ambient temperature range	-40/-25/-20 ... +55/60/70 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical specifications	The technical data of the standard product applies except for the ambient conditions.
Ambient conditions	
Extended range of ambient conditions	
• with reference to ambient temperature, air pressure and altitude	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m) 0° C
• at cold restart, min.	
Relative humidity	
• with condensation, max.	100 %; RH incl. bedewing/frost (no commissioning in bedewed state)
Resistance	
• to biologically active substances/compliance with EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (except fauna); the supplied plug covers must remain in place on the unused interfaces during operation.
• to chemically active substances/compliance with EN 60721-3-3	Yes; Class 3C4 (RH < 75%) incl. salt spray in accordance with EN 60068-2-52 (severity 3); the supplied plug covers must remain in place on the unused interfaces during operation.
• to mechanically active substances, compliance with EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; the supplied plug covers must remain in place on unused interfaces during operation.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1511-1 PN

Overview



- Entry-level CPU in the S7-1500 Controller product range
- Suitable for applications with medium requirements for program scope and processing speed
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET I/O controller
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to non-Siemens devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call, Support
 - OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data

Article No.

SIMATIC S7-1500, CPU 1511-1 PN

6ES7511-1AL03-0AB0

Central processing unit with 300 KB work memory for program and 1.5 MB for data; 1st interface: PROFINET IRT with 2-port switch, 25 ns bit performance, SIMATIC Memory Card required. Observe the approvals and certificate according to entry 109815653 at <https://support.industry.siemens.com/cs/document/109815653!>

Accessories

SIMATIC Memory Card

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS

6ES7954-8LC03-0AA0

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LE03-0AA0

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LF03-0AA0

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU

6ES7954-8LL03-0AA0

3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LP04-0AA0

3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LT03-0AA0

3.3 V Flash, 32 GB

SIMATIC S7-1500 mounting rail

SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches)

6ES7590-1AB60-0AA0

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches)

6ES7590-1AC40-0AA0

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches)

6ES7590-1AE80-0AA0

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches)

6ES7590-1AF30-0AA0

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches)

6ES7590-1AJ30-0AA0

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	Power supply connector	
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0
System power supply		Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
Load current supply		Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	SIMATIC S7-1500, spare part, display module For 35 mm S7-1500 CPUs with firmware >= V3.0	6ES7591-1AB10-0AA0
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	SIMATIC S7-1500, spare part, cover flap 35 mm with cutout for displays and display control keys, for S7-1500 CPUs, 5 units per packing unit	6ES7591-4AB00-0AA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1511-1 PN

Ordering data

Article No.

Article No.

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included,
fr, sp, it, ru, jp, kr as download

SIMATIC STEP 7 Prof. V19; floating license

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

6ES7822-1AA23-0YA5

SIMATIC STEP 7 Prof. V19, floating license download

Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

The system requirements specification can be found at <https://www.siemens.com/compatool>

Consignee email address required for delivery

6ES7822-1AE23-0YA5

SIMATIC Manual Collection on DVD, 5 languages

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection on DVD, 5 languages, Software Update Service

Under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Overview

- The CPU for applications with medium requirements for program/data storage in the S7-1500 Controller product range
- Medium to high processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET I/O controller
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to non-Siemens devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data**Article No.****SIMATIC S7-1500, CPU 1513-1 PN** **6ES7513-1AM03-0AB0**

Central processing unit with 600 KB work memory for program and 2.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 25 ns bit performance, SIMATIC Memory Card required. Observe the approvals and certificate according to entry 109815653 at <https://support.industry.siemens.com/cs/document/109815653!>

Accessories**SIMATIC Memory Card****SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS** **6ES7954-8LC03-0AA0**

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LE03-0AA0**

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LF03-0AA0**

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU **6ES7954-8LL03-0AA0**

3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LP04-0AA0**

3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LT03-0AA0**

3.3 V Flash, 32 GB

SIMATIC S7-1500 mounting rail**SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches)** **6ES7590-1AB60-0AA0**

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) **6ES7590-1AC40-0AA0**

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) **6ES7590-1AE80-0AA0**

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) **6ES7590-1AF30-0AA0**

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) **6ES7590-1AJ30-0AA0**

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1513-1 PN

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	IE FC RJ45 plugs Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
System power supply SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
Load current supply SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	SIMATIC S7-1500, spare part, display module For 35 mm S7-1500 CPUs with firmware >= V3.0	6ES7591-1AB10-0AA0
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	SIMATIC S7-1500, spare part, cover flap 35 mm with cutout for displays and display control keys, for S7-1500 CPUs, 5 units per packing unit	6ES7591-4AB00-0AA0
Power supply connector Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		

Ordering data	Article No.	Article No.
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement: Windows 10 (64-bit)</p> <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H2 • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC • Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>SIMATIC STEP 7 Prof. V19, floating license download</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.</p> <p>The system requirements specification can be found at https://www.siemens.com/compatool</p> <p>Consignee email address required for delivery</p>
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.</p>	6ES7822-1AA23-0YA5	<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p> <p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>
		6ES7822-1AE23-0YA5
		6ES7998-8XC01-8YE0
		6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1515-2 PN

Overview



- The CPU for applications with medium to high requirements for program/data storage in the S7-1500 Controller product range
- High processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or non-Siemens PROFINET IO controller
- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data

Article No.

SIMATIC S7-1500, CPU 1515-2 PN

6ES7515-2AN03-0AB0

Central processing unit with 1 MB work memory for program and 4.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 6 ns bit performance, SIMATIC Memory Card required. Observe approvals and certificates according to entry 109817466 at <https://support.industry.siemens.com/cs/document/109815653!>

Accessories

SIMATIC Memory Card

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS

6ES7954-8LC03-0AA0

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LE03-0AA0

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LF03-0AA0

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU

6ES7954-8LL03-0AA0

3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LP04-0AA0

3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LT03-0AA0

3.3 V Flash, 32 GB

SIMATIC S7-1500 mounting rail

SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches)

6ES7590-1AB60-0AA0

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches)

6ES7590-1AC40-0AA0

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches)

6ES7590-1AE80-0AA0

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches)

6ES7590-1AF30-0AA0

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches)

6ES7590-1AJ30-0AA0

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	IE FC RJ45 plugs	
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
System power supply		Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
Load current supply		SIMATIC S7-1500, spare part, display module 70 mm for S7-1500 CPUs	6ES7591-1BB00-0AA0
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	SIMATIC S7-1500, spare part, cover flap 70 mm with cutout for displays and display control keys, for S7-1500 CPUs, 5 units per packing unit	6ES7591-4BB00-0AA0
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00		
Power supply connector			
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1515-2 PN

Ordering data

Article No.

Article No.

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
 - Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

SIMATIC STEP 7 Prof. V19; floating license

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

6ES7822-1AA23-0YA5

SIMATIC STEP 7 Prof. V19, floating license download

Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

The system requirements specification can be found at <https://www.siemens.com/compatool>

Consignee email address required for delivery

6ES7822-1AE23-0YA5

SIMATIC Manual Collection on DVD, 5 languages

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Overview

- The CPU with a large program and data memory in the S7-1500 Controller product range for applications with high requirements regarding program scope and networking.
- High processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or non-Siemens PROFINET IO controller
- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- PROFIBUS DP master interface
- UA server and client as runtime option for easy connection of the SIMATIC S7-1500 to non-Siemens devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data**Article No.****SIMATIC S7-1500,
CPU 1516-3 PN/DP****6ES7516-3AP03-0AB0**

Central processing unit with 2 MB work memory for program and 7.5 MB for data 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 3rd interface: PROFIBUS, 6 ns bit performance, SIMATIC Memory Card required
*** Observe approvals and certificates according to entry 109817466 at <https://support.industry.siemens.com/cs/document/109815653!> ***

Accessories**SIMATIC Memory Card****SIMATIC S7, memory card for
S7-1x 00 CPU/SINAMICS****6ES7954-8LC03-0AA0**

3.3 V Flash, 4 MB

**SIMATIC S7, memory card for
S7-1x00 CPU/SINAMICS****6ES7954-8LE03-0AA0**

3.3 V Flash, 12 MB

**SIMATIC S7, memory card for
S7-1x00 CPU/SINAMICS****6ES7954-8LF03-0AA0**

3.3 V Flash, 24 MB

**SIMATIC S7, memory card for
S7-1x00 CPU****6ES7954-8LL03-0AA0**

3.3 V Flash, 256 MB

**SIMATIC S7, memory card for
S7-1x 00 CPU****6ES7954-8LP04-0AA0**

3.3 V Flash, 2 GB

**SIMATIC S7, memory card for
S7-1x 00 CPU****6ES7954-8LT03-0AA0**

3.3 V Flash, 32 GB

SIMATIC S7-1500 mounting rail**SIMATIC S7-1500, mounting rail
160 mm (approx. 6.3 inches)****6ES7590-1AB60-0AA0**

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

**SIMATIC S7-1500, mounting rail
245 mm (approx. 9.6 inches)****6ES7590-1AC40-0AA0**

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

**SIMATIC S7-1500, mounting rail
482.6 mm (approx. 19 inches)****6ES7590-1AE80-0AA0**

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

**SIMATIC S7-1500, mounting rail
530 mm (approx. 20.9 inches)****6ES7590-1AF30-0AA0**

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

**SIMATIC S7-1500, mounting rail
830 mm (approx. 32.7 inches)****6ES7590-1AJ30-0AA0**

Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1516-3 PN/DP

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	PROFIBUS FastConnect RS485 bus connector with 90° cable outlet	
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0
System power supply		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	PROFIBUS FC robust bus cable with PUR protective jacket for use in environments subject to harsh chemicals and mechanical stress 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0JH10
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	PROFIBUS FC flexible cable GP 2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1831-2K
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	PROFIBUS FC trailing cable	
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3EH10
Load current supply		PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1831-2L
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	PROFIBUS FC FOOD bus cable with PE protective jacket for use in the food, beverages and tobacco industries, 2-wire, shielded Sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0GH10
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	PROFIBUS FC underground cable, underground cable 2-core, shielded Sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3FH10
Power supply connector		PROFIBUS FC FRNC cable GP, bus cable, flame-retardant and halogen-free bus cable with copolymer sheath FRNC, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0LH10
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		

Ordering data	Article No.	Article No.
PROFIBUS FastConnect stripping tool Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.	6GK1905-6AA00	STEP 7 Professional V19 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSB Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download
IE FC RJ45 plugs		
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0	
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0	
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0	
Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10	
Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10	
Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10	
Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00	
SIMATIC S7-1500, spare part, display module 70 mm for S7-1500 CPUs	6ES7591-1BB00-0AA0	
SIMATIC S7-1500, spare part, cover flap 70 mm with cutout for displays and display control keys, for S7-1500 CPUs, 5 units per packing unit	6ES7591-4BB00-0AA0	
		SIMATIC STEP 7 Prof. V19; floating license Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.
		SIMATIC STEP 7 Prof. V19, floating license download Engineering software in the TIA Portal; software, documentation and license key for downloading ¹⁾ ; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1516-3 PN/DP

Ordering data

Article No.

Article No.

SIMATIC Manual Collection on DVD, 5 languages

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

Overview



- The CPU with a very large program and data memory in the S7-1500 Controller product range for applications with high requirements regarding program scope and networking.
- High processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central PLC in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- PROFIBUS DP master interface
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to non-Siemens devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-1500, CPU 1517-3 PN/DP Central processing unit with 2 MB work memory for program and 8 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 3rd interface: PROFIBUS, 2 ns bit performance, SIMATIC Memory Card required	6ES7517-3AP00-0AB0
Accessories	
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0
SIMATIC S7-1500 mounting rail	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1517-3 PN/DP

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
System power supply		PROFIBUS FC robust bus cable with PUR protective jacket for use in environments subject to harsh chemicals and mechanical stress 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0JH10
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	PROFIBUS FC flexible cable GP 2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1831-2K
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	PROFIBUS FC trailing cable	
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	PROFIBUS FC trailing cable PROFIBUS trailing cable, max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3EH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	PROFIBUS FC trailing cable PROFIBUS trailing cable, max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1831-2L
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	PROFIBUS FC food bus cable with PE protective jacket For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0GH10
Load current supply		PROFIBUS FC underground cable Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3FH10
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	PROFIBUS FC FRNC cable GP Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0LH10
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	PROFIBUS FastConnect stripping tool Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.	6GK1905-6AA00
Power supply connector			
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		
PROFIBUS FastConnect RS485 bus connector with 90° cable outlet			
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0		
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0		

Ordering data	Article No.	Article No.
IE FC RJ45 plugs		
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0	STEP 7 Professional V19 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSB Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0	
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0	
Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10	
Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10	
Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10	
Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00	
SIMATIC S7-1500, spare part display for S7-1500 CPUs with 70 mm or 175 mm width	6ES7591-1BA02-0AA0	SIMATIC STEP 7 Prof. V19; floating license Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.
SIMATIC S7-1500 spare part, front cover for DP interface of the CPU 1518-4 PN/DP	6ES7591-8AA00-0AA0	
		SIMATIC STEP 7 Prof. V19, floating license download Engineering software in the TIA Portal; software, documentation and license key for downloading ¹⁾ ; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units

Standard CPUs

CPU 1517-3 PN/DP**Ordering data****Article No.****Article No.****SIMATIC Manual Collection on DVD, 5 languages**

All manuals for
S7-1200/1500/200/300/400,
LOGO!, SIMATIC DP, PC, PG,
STEP 7, Engineering SW,
Runtime SW, SIMATIC HMI,
SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0**SIMATIC Manual Collection on DVD, 5 languages**

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration.
Delivery and service period:
1 year from date of invoice

6ES7998-8XC01-8YE2

Overview

- The CPU with a very large program and data memory in the S7-1500 Controller product range for demanding applications with extremely high requirements regarding program scope, performance and networking
- Extremely high processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central PLC in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- Two additional PROFINET interfaces with separate IP address; for network separation. The PROFINET interface X2 can be used for connecting additional PROFINET IO RT devices or for fast communication as an I-Device. The PROFINET interface X3 facilitates data transfer at a speed of 1 Gbps.
- PROFIBUS DP master interface
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to non-Siemens devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data**Article No.**

SIMATIC S7-1500, CPU 1518-4 PN/DP Central processing unit with 6 MB work memory for program and 60 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 3rd interface: Ethernet, 4th interface: PROFIBUS, 1 ns bit performance, SIMATIC Memory Card required	6ES7518-4AP00-0AB0
Accessories	
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0
SIMATIC S7-1500 mounting rail	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1518-4 PN/DP

Ordering data

Article No.

Article No.

SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0
System power supply	
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0
Load current supply	
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00
Power supply connector	
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0
PROFIBUS FastConnect RS485 bus connector with 90° cable outlet	
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0
PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
PROFIBUS FC robust bus cable with PUR protective jacket For use environments subject to harsh chemicals and mechanical stress, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0JH10
PROFIBUS FC flexible cable GP 2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1831-2K
PROFIBUS FC trailing cable	
PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3EH10
PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1831-2L
PROFIBUS FC food bus cable with PE protective jacket For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0GH10
PROFIBUS FC underground cable Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3FH10
PROFIBUS FC FRNC cable GP Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0LH10
PROFIBUS FastConnect stripping tool Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.	6GK1905-6AA00

Ordering data	Article No.	Article No.
IE FC RJ45 plugs		STEP 7 Professional V19
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0	Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0	Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0	Windows 11 (64-bit) <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2
Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10	Windows Server (64-bit) <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation)
Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10	Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download
Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10	SIMATIC STEP 7 Prof. V19; floating license Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels
Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00	SIMATIC STEP 7 Prof. V19, floating license download Engineering software in the TIA Portal; software, documentation and license key for downloading ¹⁾ ; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.
SIMATIC S7-1500, spare part display for S7-1500 CPUs with 70 mm or 175 mm width	6ES7591-1BA02-0AA0	The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery
SIMATIC S7-1500 spare part, front cover for DP interface of the CPU 1518-4 PN/DP	6ES7591-8AA00-0AA0	

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1518-4 PN/DP

Ordering data

Article No.

Article No.

SIMATIC Manual Collection on DVD, 5 languages
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection on DVD, 5 languages
Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

Overview

- The CPU with a very large program and data memory in the S7-1500 Controller product range for demanding applications with extremely high requirements regarding program scope, performance and networking
- Extremely high processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- C/C++ functions can be called and executed in the CPU runtime.
- In parallel to the CPU Runtime, there is an additional C/C++ runtime, in which call-independent, i.e. stand-alone, C/C++ applications can be executed.
- Used as central PLC in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- Two additional PROFINET interfaces with separate IP addresses for network separation:
The PROFINET interface X2 can be used for connecting additional PROFINET IO RT devices or for fast communication as an I-Device. The PROFINET interface X3 facilitates data transfer at a speed of 1 Gbps.
- PROFIBUS DP master interface
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to non-Siemens devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, gearing between axes, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Multi-functional platform

With the multi-functional platform (MFP), more functionality can be accommodated in a module. The computing power of the CPU 1518-4 PN/DP MFP allows the merging of previously separate applications on a common platform while continuing to meet the high S7-1500 demands with regard to maintenance and ruggedness.

This means that, in addition to the control function, it is also possible to process typical PC applications on the multi-functional platform, e.g. tasks that:

- require high-level language programming,
- are developed based on models, or
- have to be solved via databases.

Thus, in addition to the option of running C/C++ code in the standard STEP 7 program, the CPU 1518-4 PN/DP MFP multi-functional platform provides an additional second independent runtime environment in order to execute C/C++ applications in parallel to the STEP 7 program if required. Control-independent applications, e.g. protocol converters, database applications and others, can be created in C/C++. This simplifies the creation or reuse of customer-specific, high-level language applications. The CPU 1518-4 PN/DP MFP has the quantity structure and functionality of a CPU 1518-4 PN/DP with regard to the control unit. In addition to the user program created with STEP 7 in the TIA Portal, C/C++ functions formulated via the SIMATIC ODK 1500S can be integrated into the standard user program. By using SIMATIC ODK 1500S (ODK - Open Development Kit), higher-level programming language mechanisms, such as object orientation, can also be utilized. Furthermore, with the SIMATIC Target 1500S™ engineering package for Simulink®, it is also possible to integrate complex Simulink models to take advantage of the model-based development using MATLAB and Simulink®.

Note:

SIMATIC Memory Card required for operation of the CPU.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1518-4 PN/DP MFP

4

Ordering data	Article No.		Article No.
SIMATIC S7-1500, CPU bundle consisting of: CPU 1518-4 PN/DP MFP (6ES7518-4AX00-1AB0) Including C/C++ Runtime and OPC UA Runtime license, 6 MB work memory for program and 60 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 3rd interface: PROFINET basic services, 4th interface: PROFIBUS, 1 ns bit performance, SIMATIC Memory Card (min. 2 GB) required	6ES7518-4AX00-1AC0		
Accessories			
SIMATIC Memory Card			
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0		
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0		
SIMATIC S7-1500 mounting rail			
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0		
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0		
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0		
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0		
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0		
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0		
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0		
		System power supply	
		SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0
		SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0
		SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0
		SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0
		SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0
		Load current supply	
		SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00
		SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00
		Power supply connector	
		Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0
		PROFIBUS FastConnect RS485 bus connector with 90° cable outlet	
		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0
		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0
		PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10

Ordering data	Article No.		Article No.
PROFIBUS FC robust bus cable with PUR protective jacket For use environments subject to harsh chemicals and mechanical stress, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0JH10	IE FC RJ45 plugs	
PROFIBUS FC flexible cable GP 2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1831-2K	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
PROFIBUS FC trailing cable		Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3EH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1831-2L	Industrial Ethernet FC TP standard cable GP 2x2 (PROFINET type A), TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
PROFIBUS FC food bus cable with PE protective jacket For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0GH10	Industrial Ethernet FC TP trailing cable 2x2 (PROFINET type C), TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
PROFIBUS FC underground cable Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3FH10	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
PROFIBUS FC FRNC cable GP Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0LH10	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
PROFIBUS FastConnect stripping tool Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.	6GK1905-6AA00	SIMATIC S7-1500, spare part display for S7-1500 CPUs with 70 mm or 175 mm width	6ES7591-1BA02-0AA0
		SIMATIC S7-1500 spare part, front cover for DP interface of the CPU 1518-4 PN/DP	6ES7591-8AA00-0AA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

CPU 1518-4 PN/DP MFP

4

Ordering data

Article No.

Article No.

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
 - Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

SIMATIC STEP 7 Prof. V19; floating license

6ES7822-1AA23-0YA5

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

SIMATIC STEP 7 Prof. V19, floating license download

6ES7822-1AE23-0YA5

Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

The system requirements specification can be found at <https://www.siemens.com/compatool>

Consignee email address required for delivery

SIMATIC ODK 1500S

SIMATIC ODK 1500S V2.5, floating license for 1 user, E-SW, software and documentation on DVD, license key on USB flash drive

6ES7806-2CD03-0YA0

Class A, 6 languages (en, de, fr, es, it, cn), runs on Windows 7, Windows 8.1 and Windows 10

SIMATIC ODK 1500S V2.5, floating license for 1 user, E-SW, software, documentation and license key download¹⁾

6ES7806-2CD03-0YG0

Class A, 6 languages (en, de, fr, es, it, cn), runs on Windows 7, Windows 8.1 and Windows 10
Consignee email address required for delivery

SIMATIC Target (TM) for Simulink(R) V6.0, floating license download¹⁾

6ES7823-1BE05-0YA5

Engineering software; software, documentation and license key for download; Class A; 2 languages: de, en; runs under Win10; Win11; Software for integrating Simulink models into the S7 program of the S7-1500 SW controller / CPU1518 ODK/MFP and the Industrial Edge runtime via the LiveTwin Edge app
Consignee email address required for delivery

SIMATIC Target (TM) for Simulink(R) V6.0 Upgrade V2.0 .. V5.0 -> V6.0, floating license download¹⁾

6ES7823-1BE05-0YE5

Engineering software, software, documentation and license key for download; Class A; 2 languages: de, en; runs under Win10; Win11; Software for integrating Simulink models into the S7 program of the S7-1500 SW controller / CPU1518 ODK/MFP and the Industrial Edge runtime via the LiveTwin Edge app
Consignee email address required for delivery

Target + ODK 1500S Bundle includes: SIMATIC ODK 1500S V2.5 and SIMATIC Target (TM) for Simulink (R) V6.0, floating license download¹⁾

6ES7823-1BE15-0YA0

E-SW, software, documentation and license key for download, Class A, 2 languages: de, en; runs under Win10; Win11; Software for integrating Simulink models into the S7 program of the S7-1500 SW controller / CPU1518 ODK/MFP and the Industrial Edge runtime via the LiveTwin Edge app
Consignee email address required for delivery

SIMATIC Manual Collection on DVD, 5 languages

6ES7998-8XC01-8YE0

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages

6ES7998-8XC01-8YE2

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7511-1AL03-0AB0 CPU 1511-1 PN, 300KB Prog., 1,5MB Data	6ES7513-1AM03-0AB0 CPU 1513-1 PN, 600KB Prog., 2,5MB Data	6ES7515-2AN03-0AB0 CPU 1515-2 PN, 1MB Prog., 4,5MB Data	6ES7516-3AP03-0AB0 CPU 1516-3 PN/DP, 2MB Prog., 7,5MB Data
General information				
Product type designation	CPU 1511-1 PN	CPU 1513-1 PN	CPU 1515-2 PN	CPU 1516-3 PN/DP
Engineering with				
<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/integrated from version 	V19 (FW V3.1) / V18 (FW V3.0) or higher; with older TIA Portal versions configurable as 6ES7511-1AK02-0AB0	V19 (FW V3.1) / V18 (FW V3.0) or higher; with older TIA Portal versions configurable as 6ES7513-1AL02-0AB0	V19 (FW V3.1) / V18 (FW V3.0) or higher; with older TIA Portal versions configurable as 6ES7515-2AM02-0AB0	V19 (FW V3.1) / V18 (FW V3.0) or higher; with older TIA Portal versions configurable as 6ES7516-3AN02-0AB0
Display				
Screen diagonal [cm]	3.45 cm	3.45 cm	6.1 cm	6.1 cm
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V
Memory				
Work memory				
<ul style="list-style-type: none"> integrated (for program) integrated (for data) 	300 kbyte 1.5 Mbyte	600 kbyte 2.5 Mbyte	1 Mbyte 4.5 Mbyte	2 Mbyte 7.5 Mbyte
Load memory				
<ul style="list-style-type: none"> Plug-in (SIMATIC Memory Card), max. 	32 Gbyte	32 Gbyte	32 Gbyte	32 Gbyte
CPU processing times				
for bit operations, typ.	25 ns	25 ns	6 ns	6 ns
for word operations, typ.	32 ns	32 ns	7 ns	7 ns
for fixed point arithmetic, typ.	42 ns	42 ns	9 ns	9 ns
for floating point arithmetic, typ.	170 ns	170 ns	37 ns	37 ns
Counters, timers and their retentivity				
S7 counter				
<ul style="list-style-type: none"> Number 	2 048	2 048	2 048	2 048
IEC counter				
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times				
<ul style="list-style-type: none"> Number 	2 048	2 048	2 048	2 048
IEC timer				
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity				
Flag				
<ul style="list-style-type: none"> Size, max. 	16 kbyte	16 kbyte	16 kbyte	16 kbyte
Address area				
I/O address area				
<ul style="list-style-type: none"> Inputs Outputs 	32 kbyte; All inputs are in the process image 32 kbyte; All outputs are in the process image	32 kbyte; All inputs are in the process image 32 kbyte; All outputs are in the process image	32 kbyte; All inputs are in the process image 32 kbyte; All outputs are in the process image	32 kbyte; All inputs are in the process image 32 kbyte; All outputs are in the process image
Time of day				
Clock				
<ul style="list-style-type: none"> Type 	Hardware clock	Hardware clock	Hardware clock	Hardware clock
1. Interface				
Interface types				
<ul style="list-style-type: none"> RJ 45 (Ethernet) Number of ports integrated switch 	Yes; X1 2 Yes	Yes; X1 2 Yes	Yes; X1 2 Yes	Yes; X1 2 Yes
Protocols				
<ul style="list-style-type: none"> IP protocol PROFINET IO Controller PROFINET IO Device SIMATIC communication Open IE communication Web server Media redundancy 	Yes; IPv4 Yes Yes Yes Yes; Optionally also encrypted Yes Yes	Yes; IPv4 Yes Yes Yes Yes; Optionally also encrypted Yes Yes	Yes; IPv4 Yes Yes Yes Yes; Optionally also encrypted Yes Yes	Yes; IPv4 Yes Yes Yes Yes; Optionally also encrypted Yes Yes

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

Technical specifications

Technical specifications

Article number	6ES7511-1AL03-0AB0 CPU 1511-1 PN, 300KB Prog., 1,5MB Data	6ES7513-1AM03-0AB0 CPU 1513-1 PN, 600KB Prog., 2,5MB Data	6ES7515-2AN03-0AB0 CPU 1515-2 PN, 1MB Prog., 4,5MB Data	6ES7516-3AP03-0AB0 CPU 1516-3 PN/DP, 2MB Prog., 7,5MB Data
PROFINET IO Controller				
Services				
- Isochronous mode	Yes	Yes	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes	Yes	Yes	Yes
- PROFinergy	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64	64	64	64
- Number of connectable IO Devices for RT, max.	128	128	256	256
- of which in line, max.	128	128	256	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1	1	1	1
PROFINET IO Device				
Services				
- Isochronous mode	No	No	No	No
- IRT	Yes	Yes	Yes	Yes
- PROFinergy	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Shared device	Yes	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- PROFINET Security Class	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only
2. Interface				
Interface types				
• RJ 45 (Ethernet)			Yes; X2	Yes; X2
• Number of ports			1	1
• integrated switch			No	No
Protocols				
• IP protocol			Yes; IPv4	Yes; IPv4
• PROFINET IO Controller			Yes	Yes
• PROFINET IO Device			Yes	Yes
• SIMATIC communication			Yes	Yes
• Open IE communication			Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server			Yes	Yes
• Media redundancy			No	No

Technical specifications

Article number	6ES7511-1AL03-0AB0 CPU 1511-1 PN, 300KB Prog., 1,5MB Data	6ES7513-1AM03-0AB0 CPU 1513-1 PN, 600KB Prog., 2,5MB Data	6ES7515-2AN03-0AB0 CPU 1515-2 PN, 1MB Prog., 4,5MB Data	6ES7516-3AP03-0AB0 CPU 1516-3 PN/DP, 2MB Prog., 7,5MB Data
PROFINET IO Controller				
Services				
- Isochronous mode			No	No
- Direct data exchange			No	No
- IRT			No	No
- PROFlenergy			Yes; per user program	Yes; per user program
- Prioritized startup			No	No
- Number of connectable IO Devices, max.			32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.			32	32
- of which in line, max.			32	32
- Number of IO Devices that can be simultaneously activated/deactivated, max.			8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.			8	8
- Updating times			The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class			1	1
PROFINET IO Device				
Services				
- Isochronous mode			No	No
- IRT			No	No
- PROFlenergy			Yes; per user program	Yes; per user program
- Prioritized startup			No	No
- Shared device			Yes	Yes
- Number of IO Controllers with shared device, max.			4	4
- activation/deactivation of I-devices			Yes; per user program	Yes; per user program
- Asset management record			Yes; per user program	Yes; per user program
- PROFINET Security Class			SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only
3. Interface				
Interface types				
• RS 485				Yes; X3
• Number of ports				1
Protocols				
• PROFIBUS DP master				Yes
• PROFIBUS DP slave				No
• SIMATIC communication				Yes
PROFIBUS DP master				
• Number of DP slaves, max.				125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

Technical specifications

Technical specifications

Article number	6ES7511-1AL03-0AB0 CPU 1511-1 PN, 300KB Prog., 1,5MB Data	6ES7513-1AM03-0AB0 CPU 1513-1 PN, 600KB Prog., 2,5MB Data	6ES7515-2AN03-0AB0 CPU 1515-2 PN, 1MB Prog., 4,5MB Data	6ES7516-3AP03-0AB0 CPU 1516-3 PN/DP, 2MB Prog., 7,5MB Data
Protocols				
Number of connections				
• Number of connections, max.	128; via integrated interfaces of the CPU and connected CPs / CMs	128; via integrated interfaces of the CPU and connected CPs / CMs	256; via integrated interfaces of the CPU and connected CPs / CMs	256; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode				
Media redundancy				
- Media redundancy	only via 1st interface (X1)	only via 1st interface (X1)	only via 1st interface (X1)	only via 1st interface (X1)
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50	50	50
SIMATIC communication				
• S7 routing	Yes	Yes	Yes	Yes
OPC UA				
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes	Yes	Yes	Yes
Supported technology objects				
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	1 120	1 120	2 400	2 400
• Required Motion Control resources				
- per speed-controlled axis	40	40	40	40
- per positioning axis	80	80	80	80
- per synchronous axis	160	160	160	160
- per external encoder	80	80	80	80
- per output cam	20	20	20	20
- per cam track	160	160	160	160
- per probe	40	40	40	40
Controller				
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring				
• High-speed counter	Yes	Yes	Yes	Yes

Technical specifications

Article number	6ES7511-1AL03-0AB0 CPU 1511-1 PN, 300KB Prog., 1,5MB Data	6ES7513-1AM03-0AB0 CPU 1513-1 PN, 600KB Prog., 2,5MB Data	6ES7515-2AN03-0AB0 CPU 1515-2 PN, 1MB Prog., 4,5MB Data	6ES7516-3AP03-0AB0 CPU 1516-3 PN/DP, 2MB Prog., 7,5MB Data
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation
• horizontal installation, max.	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation
• vertical installation, max.	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
configuration / header				
configuration / programming / header				
Programming language				
- LAD	Yes	Yes	Yes	Yes
- FBD	Yes	Yes	Yes	Yes
- STL	Yes	Yes	Yes	Yes
- SCL	Yes	Yes	Yes	Yes
- CFC	Yes	Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes	Yes
Know-how protection				
• User program protection/ password protection	Yes	Yes	Yes	Yes
• Copy protection	Yes	Yes	Yes	Yes
• Block protection	Yes	Yes	Yes	Yes
Access protection				
• protection of confidential configuration data	Yes	Yes	Yes	Yes
• Password for display	Yes	Yes	Yes	Yes
• Protection level: Write protection	Yes	Yes	Yes	Yes
• Protection level: Read/write protection	Yes	Yes	Yes	Yes
• Protection level: Write protection for Failsafe	No	No	No	No
• Protection level: Complete protection	Yes	Yes	Yes	Yes
• User administration	Yes; device-wide	Yes; device-wide	Yes; device-wide	Yes; device-wide
Dimensions				
Width	35 mm	35 mm	70 mm	70 mm
Height	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm
Weights				
Weight, approx.	336 g	336 g	456 g	469 g
Article number	6ES7517-3AP00-0AB0 CPU 1517-3 PN/DP, 2MB Prog./8MB Data	6ES7518-4AP00-0AB0 CPU 1518-4 PN/DP, 6 MB Prog., 60MB Data	6ES7518-4AX00-1AC0 CPU 1518-4 PN/DP MFP + C/C++ RT + OPC UA	
General information				
Product type designation	CPU 1517-3 PN/DP	CPU 1518-4 PN/DP	CPU 1518-4 PN/DP MFP	
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V19 (FW V3.1); V13 Update 3 (FW V1.6) or higher	V19 (FW V3.1); V13 (FW V1.5) or higher	V18 (FW V3.0); V15 (FW V2.5) or higher	
Display				
Screen diagonal [cm]	6.1 cm	6.1 cm	6.1 cm	
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

Technical specifications

Technical specifications

Article number	6ES7517-3AP00-0AB0 CPU 1517-3 PN/DP, 2MB Prog./8MB Data	6ES7518-4AP00-0AB0 CPU 1518-4 PN/DP, 6 MB Prog., 60MB Data	6ES7518-4AX00-1AC0 CPU 1518-4 PN/DP MFP + C/C++ RT + OPC UA
Memory			
Work memory			
<ul style="list-style-type: none"> integrated (for program) integrated (for data) integrated (for CPU function library of CPU Runtime) 	2 Mbyte 8 Mbyte	6 Mbyte 60 Mbyte	6 Mbyte 60 Mbyte 50 Mbyte; Note: The "CPU function library of the CPU" are C/C++ blocks for the user program that were created using the SIMATIC ODK 1500S or Target 1500S.
Working memory for additional functions			
<ul style="list-style-type: none"> Integrated (for C/C++ Runtime application) available (for Linux runtime application) 			1 024 Mbyte 1 Gbyte
Load memory			
<ul style="list-style-type: none"> Plug-in (SIMATIC Memory Card), max. 	32 Gbyte	32 Gbyte	32 Gbyte; the memory card must have at least 2 GB of space on it
CPU processing times			
for bit operations, typ.	2 ns	1 ns	1 ns
for word operations, typ.	3 ns	2 ns	2 ns
for fixed point arithmetic, typ.	3 ns	2 ns	2 ns
for floating point arithmetic, typ.	12 ns	6 ns	6 ns
Counters, timers and their retentivity			
S7 counter			
<ul style="list-style-type: none"> Number 	2 048	2 048	2 048
IEC counter			
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times			
<ul style="list-style-type: none"> Number 	2 048	2 048	2 048
IEC timer			
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity			
Flag			
<ul style="list-style-type: none"> Size, max. 	16 kbyte	16 kbyte	16 kbyte
Address area			
I/O address area			
<ul style="list-style-type: none"> Inputs Outputs 	32 kbyte; All inputs are in the process image 32 kbyte; All outputs are in the process image	32 kbyte; All inputs are in the process image 32 kbyte; All outputs are in the process image	32 kbyte; All inputs are in the process image 32 kbyte; All outputs are in the process image
Time of day			
Clock			
<ul style="list-style-type: none"> Type 	Hardware clock	Hardware clock	Hardware clock
1. Interface			
Interface types			
<ul style="list-style-type: none"> RJ 45 (Ethernet) Number of ports integrated switch 	Yes; X1 2 Yes	Yes; X1 2 Yes	Yes; X1 2 Yes
Protocols			
<ul style="list-style-type: none"> IP protocol PROFINET IO Controller PROFINET IO Device SIMATIC communication Open IE communication Web server Media redundancy 	Yes; IPv4 Yes Yes Yes Yes; Optionally also encrypted Yes Yes	Yes; IPv4 Yes Yes Yes Yes; Optionally also encrypted Yes Yes	Yes; IPv4 Yes Yes Yes Yes; Optionally also encrypted Yes Yes

Technical specifications

Article number	6ES7517-3AP00-0AB0 CPU 1517-3 PN/DP, 2MB Prog./8MB Data	6ES7518-4AP00-0AB0 CPU 1518-4 PN/DP, 6 MB Prog., 60MB Data	6ES7518-4AX00-1AC0 CPU 1518-4 PN/DP MFP + C/C++ RT + OPC UA
PROFINET IO Controller			
Services			
- PG/OP communication			Yes
- Isochronous mode	Yes	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes	Yes	Yes
- PROFINergy	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	512; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	512; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	512; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64	64	64
- Number of connectable IO Devices for RT, max.	512	512	512
- of which in line, max.	512	512	512
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1	1	
PROFINET IO Device			
Services			
- PG/OP communication			Yes
- Isochronous mode	No	No	No
- IRT	Yes	Yes; Minimum send cycle of 250 µs	Yes; Minimum send cycle of 250 µs
- PROFINergy	Yes; per user program	Yes; per user program	Yes; per user program
- Shared device	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program	Yes; per user program
- PROFINET Security Class	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only	
2. Interface			
Interface types			
• RJ 45 (Ethernet)	Yes; X2	Yes; X2	Yes; X2
• Number of ports	1	1	1
• integrated switch	No	No	No
Protocols			
• IP protocol	Yes; IPv4	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes	Yes
• PROFINET IO Device	Yes	Yes	Yes
• SIMATIC communication	Yes	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes
• Media redundancy	No	No	No

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

Technical specifications

Technical specifications

Article number	6ES7517-3AP00-0AB0 CPU 1517-3 PN/DP, 2MB Prog./8MB Data	6ES7518-4AP00-0AB0 CPU 1518-4 PN/DP, 6 MB Prog., 60MB Data	6ES7518-4AX00-1AC0 CPU 1518-4 PN/DP MFP + C/C++ RT + OPC UA
PROFINET IO Controller			
Services			
- PG/OP communication			Yes
- Isochronous mode	No	No	No
- Direct data exchange	No	No	No
- IRT	No	No	No
- PROFINergy	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup	No	No	No
- Number of connectable I/O Devices, max.	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable I/O Devices for RT, max.	128	128	128
- of which in line, max.	128	128	128
- Number of I/O Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces
- Number of I/O Devices per tool, max.	8	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of I/O devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of I/O devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of I/O devices, and on the quantity of configured user data
- PROFINET Security Class	1	1	
PROFINET IO Device			
Services			
- PG/OP communication			Yes
- Isochronous mode	No	No	No
- IRT	No	No	No
- PROFINergy	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup	No	No	No
- Shared device	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program	Yes; per user program
- PROFINET Security Class	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only	
3. Interface			
Interface types			
• RJ 45 (Ethernet)		Yes; X3	Yes; X3
• RS 485	Yes; X3		
• Number of ports	1	1	1; C/C++ Runtime can also be reached via this port
• integrated switch		No	No
Protocols			
• IP protocol		Yes; IPv4	Yes; IPv4
• PROFINET IO Controller		No	No
• PROFINET IO Device		No	No
• PROFIBUS DP master	Yes		
• PROFIBUS DP slave	No		
• SIMATIC communication	Yes	Yes	Yes
• Open IE communication		Yes; Optionally also encrypted	Yes
• Web server		Yes	Yes
PROFIBUS DP master			
• Number of DP slaves, max.	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET		

Technical specifications

Article number	6ES7517-3AP00-0AB0 CPU 1517-3 PN/DP, 2MB Prog./8MB Data	6ES7518-4AP00-0AB0 CPU 1518-4 PN/DP, 6 MB Prog., 60MB Data	6ES7518-4AX00-1AC0 CPU 1518-4 PN/DP MFP + C/C++ RT + OPC UA
4. Interface			
Interface types			
<ul style="list-style-type: none"> RS 485 Number of ports 		Yes; X4 1	Yes; X4 1
Protocols			
<ul style="list-style-type: none"> PROFIBUS DP master PROFIBUS DP slave SIMATIC communication 		Yes No Yes	Yes No Yes
PROFIBUS DP master			
<ul style="list-style-type: none"> Number of DP slaves, max. 		125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols			
Number of connections			
<ul style="list-style-type: none"> Number of connections, max. 	320; via integrated interfaces of the CPU and connected CPs / CMs	384; via integrated interfaces of the CPU and connected CPs / CMs	384; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode			
Media redundancy			
<ul style="list-style-type: none"> Media redundancy MRP MRP interconnection, supported MRPD Switchover time on line break, typ. Number of stations in the ring, max. 	only via 1st interface (X1) Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client Yes; as MRP ring node according to IEC 62439-2 Edition 3.0 Yes; Requirement: IRT 200 ms; For MRP, bumpless for MRPD 50	only via 1st interface (X1) Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client Yes; as MRP ring node according to IEC 62439-2 Edition 3.0 Yes; Requirement: IRT 200 ms; For MRP, bumpless for MRPD 50	only via 1st interface (X1) Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client Yes; as MRP ring node according to IEC 62439-2 Edition 3.0 Yes; Requirement: IRT 200 ms; For MRP, bumpless for MRPD 50
SIMATIC communication			
<ul style="list-style-type: none"> S7 routing 	Yes	Yes	Yes
OPC UA			
<ul style="list-style-type: none"> OPC UA Client OPC UA Server Alarms and Conditions 	Yes; Data Access (registered Read/Write), Method Call Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space Yes	Yes; Data Access (registered Read/Write), Method Call Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space Yes	Yes; Data Access (registered Read/Write), Method Call Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space Yes
Supported technology objects			
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
<ul style="list-style-type: none"> Number of available Motion Control resources for technology objects Required Motion Control resources <ul style="list-style-type: none"> per speed-controlled axis per positioning axis per synchronous axis per external encoder per output cam per cam track per probe 	10 240 40 80 160 80 20 160 40	15 360 40 80 160 80 20 160 40	15 360 40 80 160 80 20 160 40
Controller			
<ul style="list-style-type: none"> PID_Compact PID_3Step PID-Temp 	Yes; Universal PID controller with integrated optimization Yes; PID controller with integrated optimization for valves Yes; PID controller with integrated optimization for temperature	Yes; Universal PID controller with integrated optimization Yes; PID controller with integrated optimization for valves Yes; PID controller with integrated optimization for temperature	Yes; Universal PID controller with integrated optimization Yes; PID controller with integrated optimization for valves Yes; PID controller with integrated optimization for temperature
Counting and measuring			
<ul style="list-style-type: none"> High-speed counter 	Yes	Yes	Yes

SIMATIC S7-1500 Advanced Controllers

Central processing units
Standard CPUs

Technical specifications

Technical specifications

Article number	6ES7517-3AP00-0AB0 CPU 1517-3 PN/DP, 2MB Prog./8MB Data	6ES7518-4AP00-0AB0 CPU 1518-4 PN/DP, 6 MB Prog., 60MB Data	6ES7518-4AX00-1AC0 CPU 1518-4 PN/DP MFP + C/C++ RT + OPC UA
Ambient conditions			
Ambient temperature during operation			
• horizontal installation, min.	0 °C	0 °C	0 °C
• horizontal installation, max.	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	0 °C	0 °C	0 °C
• vertical installation, max.	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
configuration / header			
configuration / programming / header			
Programming language			
- LAD	Yes	Yes	Yes
- FBD	Yes	Yes	Yes
- STL	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
- CFC	Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes
Know-how protection			
• User program protection/password protection	Yes	Yes	Yes
• Copy protection	Yes	Yes	Yes
• Block protection	Yes	Yes	Yes
Access protection			
• protection of confidential configuration data	Yes	Yes	Yes
• Password for display	Yes	Yes	Yes
• Protection level: Write protection	Yes	Yes	Yes
• Protection level: Read/write protection	Yes	Yes	Yes
• Protection level: Write protection for Failsafe	No	No	
• Protection level: Complete protection	Yes	Yes	Yes
• User administration	Yes; device-wide	Yes; device-wide	
Open Development interfaces			
• Size of ODK SO file, max.			9.8 Mbyte
Dimensions			
Width	175 mm	175 mm	175 mm
Height	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm
Weights			
Weight, approx.	1 929 g	2 079 g	2 093 g

Overview



- Entry-level CPU in the S7-1500 Controller product range
- Suitable for applications with medium requirements for program scope and processing speed
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- OPC UA server and client as runtime option for the easy connection of SIMATIC S7-1500 to non-Siemens devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call, Support
 - OPC UA Companion Specifications
- Central and distributed isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1511-1 PN

(Extended temperature range and exposure to environmental substances)

Work memory 150 KB for program, 1 MB for data, PROFINET IRT interface with 2-port switch; SIMATIC Memory Card required

Temperature range -40 ... +60 °C

6AG1511-1AK02-2AB0

Temperature range -40 ... +70 °C

6AG1511-1AK02-7AB0

System power supply

(Extended temperature range and exposure to environmental substances)

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0

Load power supply

(Extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8 A

6AG1333-4BA00-7AA0

Display

(Extended temperature range and exposure to environmental substances)

For SIPLUS CPU 1511-1 PN and CPU 1513-1 PN; spare part

6AG1591-1AB00-2AA0

Other accessories

See SIMATIC S7-1500, CPU 1511-1 PN, page 4/6

SIMATIC S7-1500 Advanced Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1513-1 PN

Overview



- The CPU for applications with medium/high requirements for program/data memory in the S7-1500 Controller product range
- High processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- OPC UA server and client as runtime option for the easy connection of SIPLUS S7-1500 to non-Siemens devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call, Support
 - OPC UA Companion Specifications
- Central and distributed isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1513-1 PN

(Extended temperature range and exposure to environmental substances)

300 KB work memory for program, 1.5 MB for data, PROFINET IRT interface with 2-port switch; SIMATIC Memory Card required

Temperature range -40 ... +60 °C

6AG1513-1AL02-2AB0

Temperature range -40 ... +70 °C

6AG1513-1AL02-7AB0

Accessories

System power supply

(Extended temperature range and exposure to environmental substances)

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0

Load power supply

(Extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8 A

6AG1333-4BA00-7AA0

Display

(Extended temperature range and exposure to environmental substances)

For SIPLUS CPU 1511-1 PN and CPU 1513-1 PN; spare part

6AG1591-1AB00-2AA0

Other accessories

See SIMATIC S7-1500, CPU 1513-1 PN, page 4/9

Overview

- The CPU with large program and data memory in the S7-1500 Controller product range for applications with high program scope requirements.
- High processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- Additional PROFINET interface with separate IP address
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller.
- PROFIBUS DP master interface
- Isochronous mode on PROFIBUS and PROFINET

Note:

SIPLIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS CPU 1516-3 PN/DP**

(extended temperature range and exposure to environmental substances)

1 MB work memory for program, 5 MB for data, PROFINET IRT interface with 2-port switch, PROFINET RT interface, PROFIBUS interface; SIMATIC Memory Card required

Temperature range -40 ... +60 °C

6AG1516-3AN02-2AB0

Temperature range -40 ... +70 °C

6AG1516-3AN02-7AB0

Accessories**System power supply**

(extended temperature range and exposure to environmental substances)

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0

Load current supply

(extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8 A

6AG1333-4BA00-7AA0

Display

(extended temperature range and exposure to environmental substances)

for 6AG1516-3AN02-7AB0; spare part

6AG1591-1BB00-2AA0

Other accessories

See SIMATIC S7-1500, CPU 1516-3 PN/DP, page 4/15

SIMATIC S7-1500 Advanced Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1518-4 PN/DP

Overview



- The CPU with a very large program and data memory in the S7-1500 Controller product range for demanding applications with extremely high requirements regarding program scope, performance and networking
- Extremely high processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller.
- Two additional PROFINET interfaces with separate IP addresses; for network separation. The PROFINET interface X2 can be used for connecting additional PROFINET IO RT devices or for fast communication as an I-Device. The PROFINET interface X3 facilitates data transfer at a speed of 1 Gbps.
- PROFIBUS DP master interface
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion Specifications
 - OPC UA Alarms and Conditions
- Central and distributed isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes
- Integrated web server with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1518-4 PN/DP

6AG1518-4AP00-4AB0

(Exposure to environmental substances)

3 MB work memory for program, 10 MB for data, PROFINET IRT interface with 2-port switch, PROFINET RT interface, Ethernet interface, PROFIBUS interface; SIMATIC Memory Card required

Accessories

SIPLUS S7-1500 cooling fan 175 mm

6AG1593-0AA00-7AA0

(Extended temperature range and exposure to environmental substances)

Fan module for the operation of a SIPLUS S7-1500 CPU at locations with an ambient temperature of up to +70 °C

System power supply

(Extended temperature range and exposure to environmental substances)

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0

Load current supply

(Extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8 A

6AG1333-4BA00-7AA0

Display

6AG1591-1BA02-2AA0

(Extended temperature range and exposure to environmental substances)

For SIPLUS CPU 1516-3 PN/DP and SIPLUS CPU 1518-4 PN/DP; spare part

Other accessories

See SIMATIC S7-1500, CPU 1518-4 PN/DP, page 4/23

Overview

- The CPU with a very large program and data memory in the S7-1500 Controller product range for demanding applications with extremely high requirements regarding program scope, performance and networking
- Extremely high processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- C/C++ functions can be called and executed in the CPU runtime.
- In parallel to the CPU runtime, there is an additional C/C++ runtime, in which call-independent, i.e. stand-alone, C/C++ applications can be executed.
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- Two additional PROFINET interfaces with separate IP addresses for network separation:
The PROFINET interface X2 can be used for connecting additional PROFINET IO RT devices or for fast communication as an I-Device. The PROFINET interface X3 facilitates data transfer at a speed of 1 Gbps.
- PROFIBUS DP master interface
- OPC UA Server (Data Access) as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion Specifications
 - OPC UA Alarms and Conditions
- Isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, gearing between axes, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Multi-functional platform

With the multi-functional platform (MFP), more functionality can be accommodated in a module. The computing power of the CPU 1518-4 PN/DP MFP allows the merging of previously separate applications on a common platform, and continues to meet the high demands of the S7-1500 in respect of ease of maintenance and ruggedness.

This means that, in addition to the control function, it is also possible to process typical PC applications on the multi-functional platform, e.g. tasks that:

- require high-level language programming,
- are developed based on models, or
- have to be solved via databases.

Thus, in addition to the option of running C/C++ code in the standard STEP 7 program, the CPU 1518-4 PN/DP MFP multi-functional platform provides an additional second independent runtime environment in order to execute C/C++ applications in parallel to the STEP 7 program if required.

Control-independent applications, e.g. protocol converters, database applications and others, can be created in C/C++.

This simplifies the creation or reuse of customer-specific, high-level language applications.

The CPU 1518-4 PN/DP MFP has the quantity structure and functionality of a CPU 1518-4 PN/DP with regard to the control unit. In addition to the user program created with STEP 7 in the TIA Portal, C/C++ functions formulated via the SIMATIC ODK 1500S can be integrated into the standard user program. By using SIMATIC ODK 1500S (ODK - Open Development Kit), higher-level programming language mechanisms, such as object orientation, can also be utilized. Furthermore, with the SIMATIC Target 1500S™ engineering package for Simulink®, it is also possible to integrate complex Simulink models to take advantage of the model-based development using MATLAB and Simulink®.

Note:

SIMATIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

SIMATIC S7-1500 Advanced Controllers

Central processing units
SIPLUS standard CPUs

SIPLUS CPU 1518-4 PN/DP MFP**Ordering data****Article No.****SIPLUS CPU 1518-4 PN/DP MFP****6AG1518-4AX00-4AC0**

(Exposure to environmental substances)

4 MB work memory for program, 20 MB for data, 50 MB for CPU function library in the CPU Runtime, 500 MB for C/C++ Runtime application, PROFINET IRT interface with 2-port switch, PROFINET RT interface, Ethernet interface, PROFIBUS interface; C/C++ runtime and OPC UA Runtime license included; SIMATIC Memory Card required

Accessories**SIPLUS S7-1500 cooling fan 175 mm****6AG1593-0AA00-7AA0**

(Extended temperature range and exposure to environmental substances)

Fan module for the operation of a SIPLUS S7-1500 CPU at locations with an ambient temperature of up to +70 °C

Article No.**System power supply**

(Extended temperature range and exposure to environmental substances)

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0**Load current supply**

(Extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8A

6AG1333-4BA00-7AA0**Display**

(Extended temperature range and exposure to environmental substances)

6AG1591-1BA02-2AA0

For SIPLUS CPU 1516-3 PN/DP and SIPLUS CPU 1518-4 PN/DP; spare part

Other accessories

See SIMATIC S7-1500, CPU 1518-4 PN/DP MFP, page 4/28

Technical specifications

Article number	6AG1511-1AK02-2AB0	6AG1511-1AK02-7AB0	6AG1513-1AL02-2AB0	6AG1513-1AL02-7AB0
Based on	6ES7511-1AK02-0AB0	6ES7511-1AK02-0AB0	6ES7513-1AL02-0AB0	6ES7513-1AL02-0AB0
	SIPLUS S7-1500 CPU 1511-1 PN	SIPLUS S7-1500 CPU 1511-1 PN	SIPLUS S7-1500 CPU 1513-1 PN	SIPLUS S7-1500 CPU 1513-1 PN
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	70 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	70 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• vertical installation, max.	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
• Ambient air temperature-barometric pressure-altitude	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

SIMATIC S7-1500 Advanced Controllers

Central processing units
SIPLUS standard CPUs

Technical specifications

Technical specifications

Article number	6AG1511-1AK02-2AB0	6AG1511-1AK02-7AB0	6AG1513-1AL02-2AB0	6AG1513-1AL02-7AB0
Based on	6ES7511-1AK02-0AB0 SIPLUS S7-1500 CPU 1511-1 PN	6ES7511-1AK02-0AB0 SIPLUS S7-1500 CPU 1511-1 PN	6ES7513-1AL02-0AB0 SIPLUS S7-1500 CPU 1513-1 PN	6ES7513-1AL02-0AB0 SIPLUS S7-1500 CPU 1513-1 PN
Usage in industrial process technology	<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04
Remark	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A
Article number	6AG1516-3AN02-2AB0	6AG1516-3AN02-7AB0	6AG1518-4AP00-4AB0	6AG1518-4AX00-4AC0
Based on	6ES7516-3AN02-0AB0 SIPLUS S7-1500 CPU 1516-3 PN/DP	6ES7516-3AN02-0AB0 SIPLUS S7-1500 CPU 1516-3 PN/DP	6ES7518-4AP00-0AB0 SIPLUS S7-1500 CPU 1518-4 PN/DP	6ES7518-4AX00-1AC0 SIPLUS S7-1500 CPU 1518-4 PN/DP MFP
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	0 °C; = Tmin (incl. condensation/frost)	0 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax; display: 50 °C, the display is switched off at an operating temperature of typically 50 °C	70 °C; = Tmax; display: 50 °C, the display is switched off at an operating temperature of typically 50 °C	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	-40 °C; = Tmin	-40 °C; = Tmin	0 °C; = Tmin	0 °C; = Tmin
• vertical installation, max.	40 °C; = Tmax; display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; = Tmax; display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; incl. condensation/frost permitted (no commissioning under condensation conditions)

Technical specifications

Article number	6AG1516-3AN02-2AB0	6AG1516-3AN02-7AB0	6AG1518-4AP00-4AB0	6AG1518-4AX00-4AC0
Based on	6ES7516-3AN02-0AB0 SIPLUS S7-1500 CPU 1516-3 PN/DP	6ES7516-3AN02-0AB0 SIPLUS S7-1500 CPU 1516-3 PN/DP	6ES7518-4AP00-0AB0 SIPLUS S7-1500 CPU 1518-4 PN/DP	6ES7518-4AX00-1AC0 SIPLUS S7-1500 CPU 1518-4 PN/DP MFP
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

Central processing units
Compact CPUs

CPU 1511C-1 PN

Overview



- The compact CPU with integral digital and analog inputs and outputs in the product spectrum of the S7-1500 Controllers
- With integrated technological functions, e.g. high-speed counter (HSC), frequency measurement, period duration measurement or stepper motor control, pulse width modulation, frequency output
- Suitable for applications with medium requirements for program scope and processing speed
- Used as central PLC in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to non-Siemens devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Isochronous mode (distributed)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-1500, compact CPU CPU 1511C-1 PN

6ES7511-1CK01-0AB0

Central processing unit 175 KB work memory for program and 1 MB for data, 16 digital inputs, 16 digital outputs, 5 analog inputs, 2 analog outputs, 6 high-speed counters, 4 high-speed outputs for PTO/PWM/frequency output
1st interface:
PROFINET IRT with 2-port switch, 60 ns bit performance, incl. push-in front connector, SIMATIC Memory Card required

Accessories

SIMATIC Memory Card

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS

6ES7954-8LC03-0AA0

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LE03-0AA0

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LF03-0AA0

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU

6ES7954-8LL03-0AA0

3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LP04-0AA0

3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LT03-0AA0

3.3 V Flash, 32 GB

Front connectors

SIMATIC S7-1500, front connector with push-in technology

6ES7592-1BM00-0XA0

40-pin for 25 mm wide modules and compact CPUs of the S7-1500, incl. cable tie

Shielding set I/O

SIMATIC S7-1500, spare part, shielding set

6ES7590-5CA10-0XA0

Consisting of: * 4x shield terminal, * 4x shielding bracket, * 4x 24 V DC infeed element with push-in technology, suitable for analog modules, technology modules and compact CPU of the S7-1500, suitable for all front connectors for 25 mm wide modules

SIMATIC S7-1500, spare part, suitable shield terminal

6ES7590-5BA00-0AA0

Suitable for analog modules and technology modules without shielding bracket and without 24 V DC infeed element, 10 units per packing unit

SIMATIC S7-1500 mounting rail

SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches)

6ES7590-1AB60-0AA0

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0	Load current supply	
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0	SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0	SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0	Power supply connector	
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	Connector, female, 2x2-pole, ET 200SP, interface module, KP32F, PN-PN coupler Grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	IE FC RJ45 plugs	
System power supply		Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10

SIMATIC S7-1500 Advanced Controllers

Central processing units
Compact CPUs

CPU 1511C-1 PN

4

Ordering data	Article No.	Ordering data	Article No.
Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00	SIMATIC STEP 7 Prof. V19; floating license Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.	6ES7822-1AA23-0YA5
SIMATIC S7-1500, spare part, display module 35 mm for S7-1500 CPUs	6ES7591-1AB00-0AA0	SIMATIC STEP 7 Prof. V19; floating license Download Engineering software in the TIA Portal; software, documentation and license key for downloading ¹⁾ ; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery	6ES7822-1AE23-0YA5
SIMATIC S7-1500, spare part, cover flap 35 mm with cutout, for displays and display buttons, for S7-1500 CPUs, 5 units per packing unit	6ES7591-4AB00-0AA0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
STEP 7 Professional V19 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Overview

- The compact CPU with integral digital and analog inputs and outputs in the product spectrum of the S7-1500 Controllers
- With integrated technological functions, e.g. high-speed counter (HSC), frequency measurement, period duration measurement or stepper motor control, pulse width modulation, frequency output
- Suitable for applications with medium requirements for program scope and processing speed
- Used as central PLC in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to non-Siemens devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Isochronous mode (distributed)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data**Article No.****SIMATIC S7-1500, compact CPU
CPU 1512C-1 PN** **6ES7512-1CK01-0AB0**

Central processing unit 250 KB work memory for program and 1 MB for data, 32 digital inputs, 32 digital outputs, 5 analog inputs, 2 analog outputs, 6 high-speed counters, 4 high-speed outputs for PTO/PWM/frequency output
1st interface:
PROFINET IRT with 2-port switch, 48 ns bit performance, incl. push-in front connector, SIMATIC Memory Card required

Accessories**SIMATIC Memory Card****SIMATIC S7, memory card for
S7-1x 00 CPU/SINAMICS** **6ES7954-8LC03-0AA0**

3.3 V Flash, 4 MB

**SIMATIC S7, memory card for
S7-1x00 CPU/SINAMICS** **6ES7954-8LE03-0AA0**

3.3 V Flash, 12 MB

**SIMATIC S7, memory card for
S7-1x00 CPU/SINAMICS** **6ES7954-8LF03-0AA0**

3.3 V Flash, 24 MB

**SIMATIC S7, memory card for
S7-1x00 CPU** **6ES7954-8LL03-0AA0**

3.3 V Flash, 256 MB

**SIMATIC S7, memory card for
S7-1x 00 CPU** **6ES7954-8LP04-0AA0**

3.3 V Flash, 2 GB

**SIMATIC S7, memory card for
S7-1x 00 CPU** **6ES7954-8LT03-0AA0**

3.3 V Flash, 32 GB

Front connectors**SIMATIC S7-1500,
front connector with push-in
technology** **6ES7592-1BM00-0XA0**

40-pin for 25 mm wide modules and compact CPUs of the S7-1500, incl. cable tie

Shielding set I/O**SIMATIC S7-1500, spare part,
shielding set** **6ES7590-5CA10-0XA0**

Consisting of: * 4x shield terminal, * 4x shielding bracket, * 4x 24 V DC infeed element with push-in technology, suitable for analog modules, technology modules and compact CPU of the S7-1500, suitable for all front connectors for 25 mm wide modules

**SIMATIC S7-1500, spare part,
suitable shield terminal** **6ES7590-5BA00-0AA0**

Suitable for analog modules and technology modules without shielding bracket and without 24 V DC infeed element, 10 units per packing unit

SIMATIC S7-1500 mounting rail**SIMATIC S7-1500, mounting rail
160 mm (approx. 6.3 inches)** **6ES7590-1AB60-0AA0**

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500 Advanced Controllers

Central processing units
Compact CPUs

CPU 1512C-1 PN

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0	Load current supply SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0	SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0	Power supply connector Connector, female, 2x2-pole, ET 200SP, interface module, KP32F, PN-PN coupler Grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0	IE FC RJ45 plugs Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
System power supply SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0		
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0		

Ordering data	Article No.	Article No.	
Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10		
Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00		
SIMATIC S7-1500, spare part, display module 35 mm for S7-1500 CPUs	6ES7591-1AB00-0AA0		
SIMATIC S7-1500, spare part, cover flap 35 mm with cutout, for displays and display buttons, for S7-1500 CPUs, 5 units per packing unit	6ES7591-4AB00-0AA0		
STEP 7 Professional V19 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H2 • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC • Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download		SIMATIC STEP 7 Prof. V19; floating license Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels	6ES7822-1AA23-0YA5
		SIMATIC STEP 7 Prof. V19; floating license download Engineering software in the TIA Portal; software, documentation and license key for downloading ¹⁾ ; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery	6ES7822-1AE23-0YA5
		SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Compact CPUs

Technical specifications

Technical specifications

Article number	6ES7511-1CK01-0AB0 CPU 1511C-1 PN, 175 KB Prog, 1 MB Data	6ES7512-1CK01-0AB0 CPU 1512C-1 PN, 250 KB Prog, 1 MB Data
General information		
Product type designation	CPU 1511C-1 PN	CPU 1512C-1 PN
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	V17 (FW V2.9) / V15 (FW V2.5) or higher; with older TIA Portal versions configurable as 6ES7511-1CK00-0AB0	V17 (FW V2.9) / V15 (FW V2.5) or higher; with older TIA Portal versions configurable as 6ES7512-1CK00-0AB0
Display		
Screen diagonal [cm]	3.45 cm	3.45 cm
Supply voltage		
Rated value (DC)	24 V	24 V
Memory		
Work memory		
• integrated (for program)	175 kbyte	250 kbyte
• integrated (for data)	1 Mbyte	1 Mbyte
Load memory		
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte	32 Gbyte
CPU processing times		
for bit operations, typ.	60 ns	48 ns
for word operations, typ.	72 ns	58 ns
for fixed point arithmetic, typ.	96 ns	77 ns
for floating point arithmetic, typ.	384 ns	307 ns
Counters, timers and their retentivity		
S7 counter		
• Number	2 048	2 048
IEC counter		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times		
• Number	2 048	2 048
IEC timer		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity		
Flag		
• Size, max.	16 kbyte	16 kbyte
Address area		
I/O address area		
• Inputs	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image
Time of day		
Clock		
• Type	Hardware clock	Hardware clock
Digital inputs		
integrated channels (DI)	16	32
Digital outputs		
integrated channels (DO)	16	32
Short-circuit protection	Yes; electronic/thermal	Yes; electronic/thermal
Analog outputs		
integrated channels (AO)	2	2
1. Interface		
Interface types		
• RJ 45 (Ethernet)	Yes; X1	Yes; X1
• Number of ports	2	2
• integrated switch	Yes	Yes
Protocols		
• IP protocol	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy	Yes	Yes

Technical specifications

Article number	6ES7511-1CK01-0AB0 CPU 1511C-1 PN, 175 KB Prog, 1 MB Data	6ES7512-1CK01-0AB0 CPU 1512C-1 PN, 250 KB Prog, 1 MB Data
PROFINET IO Controller		
Services		
- PG/OP communication	Yes	Yes
- Isochronous mode	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes	Yes
- PROFlenergy	Yes; per user program	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 256 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 256 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64	64
- Number of connectable IO Devices for RT, max.	128	128
- of which in line, max.	128	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device		
Services		
- PG/OP communication	Yes	Yes
- Isochronous mode	No	No
- IRT	Yes	Yes
- PROFlenergy	Yes; per user program	Yes; per user program
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program
Protocols		
Number of connections		
• Number of connections, max.	96; via integrated interfaces of the CPU and connected CPs / CMs	128; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode		
Media redundancy		
- Media redundancy	only via 1st interface (X1)	only via 1st interface (X1)
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50
SIMATIC communication		
• S7 routing	Yes	Yes
OPC UA		
• OPC UA Client	Yes	Yes
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space
• Alarms and Conditions	Yes	Yes

SIMATIC S7-1500 Advanced Controllers

Central processing units
Compact CPUs

Technical specifications

Technical specifications

Article number	6ES7511-1CK01-0AB0 CPU 1511C-1 PN, 175 KB Prog, 1 MB Data	6ES7512-1CK01-0AB0 CPU 1512C-1 PN, 250 KB Prog, 1 MB Data
Supported technology objects		
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	800	800
• Required Motion Control resources		
- per speed-controlled axis	40	40
- per positioning axis	80	80
- per synchronous axis	160	160
- per external encoder	80	80
- per output cam	20	20
- per cam track	160	160
- per probe	40	40
Controller		
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring		
• High-speed counter	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-25 °C; No condensation	-25 °C; No condensation
• horizontal installation, max.	60 °C; note derating data for onboard I/O in the manual. Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; note derating data for onboard I/O in the manual. Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	-25 °C; No condensation	-25 °C; No condensation
• vertical installation, max.	40 °C; note derating data for onboard I/O in the manual. Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; note derating data for onboard I/O in the manual. Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
configuration / header		
configuration / programming / header		
Programming language		
- LAD	Yes	Yes
- FBD	Yes	Yes
- STL	Yes	Yes
- SCL	Yes	Yes
- GRAPH	Yes	Yes
Know-how protection		
• User program protection/ password protection	Yes	Yes
• Copy protection	Yes	Yes
• Block protection	Yes	Yes
Access protection		
• protection of confidential configuration data	Yes	Yes
• Password for display	Yes	Yes
• Protection level: Write protection	Yes	Yes
• Protection level: Read/write protection	Yes	Yes
• Protection level: Complete protection	Yes	Yes
Dimensions		
Width	85 mm	110 mm
Height	147 mm	147 mm
Depth	129 mm	129 mm
Weights		
Weight, approx.	1 050 g	1 360 g

Overview



- Entry-level CPU in the S7-1500F Controller product range
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- Suitable for standard and fail-safe applications with medium requirements for program scope and processing speed
- Used as central controller in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configuration
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET I/O controller
- Isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes
- Integrated web server with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data

Article No.

SIMATIC S7-1500F, CPU 1511F-1 PN Central processing unit with 450 KB work memory for program and 1.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 25 ns bit performance, SIMATIC Memory Card required Observe the approvals and certificate according to entry 109815653 at https://support.industry.siemens.com!	6ES7511-1FL03-0AB0
Accessories	
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0
SIMATIC S7-1500 mounting rail	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

CPU 1511F-1 PN

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	IE FC RJ45 plugs Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
System power supply SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
Load current supply SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	SIMATIC S7-1500, spare part, display module For 35 mm S7-1500 CPUs with firmware >= V3.0	6ES7591-1AB10-0AA0
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	SIMATIC S7-1500, spare part, cover flap 35 mm with cutout for displays and display control keys, for S7-1500 CPUs, 5 units per packing unit	6ES7591-4AB00-0AA0
Power supply connector Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		

Ordering data	Article No.	Ordering data	Article No.
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement: Windows 10 (64-bit)</p> <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSB Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200ISP, ET 200pro and ET 200eco</p> <p>Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>	
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB</p>	6ES7833-1FA23-0YA5
<p>SIMATIC STEP 7 Prof. V19, floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Consignee email address required for delivery</p>	6ES7833-1FA23-0YH5
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>	6ES7998-8XC01-8YE0
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

CPU 1513F-1 PN

Overview



- The CPU for standard and fail-safe applications with medium/high requirements for program/data storage in the S7-1500 Controller product range
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- High processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configuration
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET I/O controller
- Isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes
- Integrated web server with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data

Article No.

SIMATIC S7-1500F, CPU 1513F-1 PN **6ES7513-1FM03-0AB0**

Central processor unit with 900 KB work memory for program and 2.5 MB for data,
1st interface:
PROFINET IRT with 2-port switch, 25 ns bit performance,
SIMATIC Memory Card required
Observe the approvals and certificate according to entry 109815653 at <https://support.industry.siemens.com!>

Accessories

SIMATIC Memory Card

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS **6ES7954-8LC03-0AA0**
3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LE03-0AA0**
3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LF03-0AA0**
3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU **6ES7954-8LL03-0AA0**
3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LP04-0AA0**
3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LT03-0AA0**
3.3 V Flash, 32 GB

SIMATIC S7-1500 mounting rail

SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) **6ES7590-1AB60-0AA0**
Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) **6ES7590-1AC40-0AA0**
Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) **6ES7590-1AE80-0AA0**
Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) **6ES7590-1AF30-0AA0**
Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) **6ES7590-1AJ30-0AA0**
Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

Ordering data	Article No.	Article No.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	IE FC RJ45 plugs Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.
System power supply SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.
Load current supply SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	SIMATIC S7-1500, spare part, display module For 35 mm S7-1500 CPUs with firmware >= V3.0
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	SIMATIC S7-1500, spare part, cover flap 35 mm with cutout for displays and display control keys, for S7-1500 CPUs, 5 units per packing unit
Power supply connector Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0	

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

CPU 1513F-1 PN

4

Ordering data

Article No.

Article No.

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
- Windows 10 Professional Version 22H2
- Windows 10 Enterprise Version 2009/20H2
- Windows 10 Enterprise Version 21H2
- Windows 10 Enterprise Version 22H2
- Windows 10 Enterprise 2016 LTSC
- Windows 10 Enterprise 2019 LTSC
- Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

SIMATIC STEP 7 Prof. V19; floating license

6ES7822-1AA23-0YA5

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>

SIMATIC STEP 7 Prof. V19, floating license download¹⁾

6ES7822-1AE23-0YA5

Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool> Consignee email address required for delivery

STEP 7 Safety Advanced V19

Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200ISP, ET 200pro and ET 200eco

Requirement:

STEP 7 Professional V19

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive **6ES7833-1FA23-0YA5**

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key for download¹⁾ **6ES7833-1FA23-0YH5**

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Consignee email address required for delivery

SIMATIC Manual Collection on DVD, 5 languages **6ES7998-8XC01-8YE0**

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages **6ES7998-8XC01-8YE2**

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Overview



- The CPU for applications with medium to high requirements for program/data storage in the S7-1500 Controller product range
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849.
- Medium to high processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configuration
- PROFINET IO IRT interface with 2-port switch
- Additional PROFINET interface with separate IP address
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or non-Siemens PROFINET IO controller
- Isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes
- Integrated web server with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data

Article No.

SIMATIC S7-1500F, CPU 1515F-2 PN Central processing unit with 1.5 MB work memory for program and 4.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 6 ns bit performance, SIMATIC Memory Card required *** Observe approvals and certificates according to entry 109817466! ***	6ES7515-2FN03-0AB0
Accessories	
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0
SIMATIC S7-1500 mounting rail	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

CPU 1515F-2 PN

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	IE FC RJ45 plugs Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
System power supply SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
Load current supply SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	SIMATIC S7-1500, spare part, display module 70 mm for S7-1500 CPUs	6ES7591-1BB00-0AA0
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	SIMATIC S7-1500, spare part, cover flap 70 mm with cutout for displays and display control keys, for S7-1500 CPUs, 5 units per packing unit	6ES7591-4BB00-0AA0
Power supply connector Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		

Ordering data	Article No.	Ordering data	Article No.
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement: Windows 10 (64-bit)</p> <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200ISP, ET 200pro and ET 200eco</p> <p>Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>	
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB</p>	6ES7833-1FA23-0YA5
<p>SIMATIC STEP 7 Prof. V19, floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery</p>	6ES7833-1FA23-0YH5
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>	6ES7998-8XC01-8YE0
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

CPU 1516F-3 PN/DP

Overview



- The CPU with a large program and data memory in the S7-1500 Controller product range for fail-safe applications with high requirements regarding program scope and networking.
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849.
- High processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configuration.
- PROFINET IO IRT interface with 2-port switch.
- Additional PROFINET interface with separate IP address.
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or non-Siemens PROFINET IO controller
- PROFIBUS DP master interface.
- Isochronous mode on PROFIBUS and PROFINET.
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes
- Integrated web server with the option of creating user-defined web pages.

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data

Article No.

SIMATIC S7-1500F, CPU 1516F-3 PN/DP

6ES7516-3FP03-0AB0

Central processing unit with 3 MB work memory for program and 7.5 MB for data
1st interface:
PROFINET IRT with 2-port switch,
2nd interface: PROFINET RT,
3rd interface: PROFIBUS,
6 ns bit performance,
SIMATIC Memory Card required
Observe approvals and certificates according to entry 109817466 at [https://support.industry.siemens.com/!](https://support.industry.siemens.com/)

Accessories

SIMATIC Memory Card

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS

6ES7954-8LC03-0AA0

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LE03-0AA0

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LF03-0AA0

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU

6ES7954-8LL03-0AA0

3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LP04-0AA0

3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LT03-0AA0

3.3 V Flash, 32 GB

SIMATIC S7-1500 mounting rail

SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches)

6ES7590-1AB60-0AA0

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches)

6ES7590-1AC40-0AA0

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches)

6ES7590-1AE80-0AA0

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches)

6ES7590-1AF30-0AA0

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches)

6ES7590-1AJ30-0AA0

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

Ordering data	Article No.	Article No.	
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail; Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0
System power supply		PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	PROFIBUS FC robust bus cable with PUR protective jacket For use environments subject to harsh chemicals and mechanical stress, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0JH10
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	PROFIBUS FC flexible cable GP 2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1831-2K
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	PROFIBUS FC trailing cable	
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3EH10
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1831-2L
Load current supply		PROFIBUS FC food bus cable with PE protective jacket For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0GH10
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	PROFIBUS FC underground cable Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3FH10
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	PROFIBUS FC FRNC cable GP Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0LH10
Power supply connector		PROFIBUS FastConnect stripping tool Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.	6GK1905-6AA00
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		
PROFIBUS FastConnect RS485 bus connector with 90° cable outlet			

SIMATIC S7-1500 Advanced Controllers

Central processing units

Fail-safe CPUs

CPU 1516F-3 PN/DP

Ordering data

Article No.

Article No.

IE FC RJ45 plugs

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 1 unit.

6GK1901-1BB10-2AA0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 10 units.

6GK1901-1BB10-2AB0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 50 units.

6GK1901-1BB10-2AE0

Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A)

TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.

6XV1840-2AH10

Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C)

TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.

6XV1840-3AH10

Industrial Ethernet FC TP marine cable

TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.

6XV1840-4AH10

Industrial Ethernet FastConnect stripping tool

Stripping tool for fast stripping of insulation from the IE FastConnect cables.

6GK1901-1GA00

SIMATIC S7-1500, spare part, display module

70 mm for S7-1500 CPUs

6ES7591-1BB00-0AA0

SIMATIC S7-1500, spare part, cover flap

70 mm with cutout for displays and display control keys, for S7-1500 CPUs, 5 units per packing unit

6ES7591-4BB00-0AA0

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

- Windows 11 (64-bit)
- Windows 11 Home Version 21H2
 - Windows 11 Home Version 22H2
 - Windows 11 Professional Version 21H2
 - Windows 11 Professional Version 22H2
 - Windows 11 Enterprise 21H2
 - Windows 11 Enterprise 22H2

- Windows Server (64-bit)
- Windows Server 2016 Standard (full installation)
 - Windows Server 2019 Standard (full installation)
 - Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

SIMATIC STEP 7 Prof. V19; floating license

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>

6ES7822-1AA23-0YA5

SIMATIC STEP 7 Prof. V19; floating license download¹⁾

Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; For configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool> Consignee email address required for delivery

6ES7822-1AE23-0YA5

Ordering data	Article No.	Article No.	Article No.
<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco</p> <p>Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>		<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery</p>	6ES7833-1FA23-0YH5
<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F</p> <p>Content: 1x USB</p>	6ES7833-1FA23-0YA5	<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>	6ES7998-8XC01-8YE0
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

CPU 1517F-3 PN/DP

Overview



- The CPU with a very large program and data memory in the S7-1500 Controller product range for fail-safe applications with high requirements regarding program scope and networking.
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- High processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configuration
- PROFINET IO IRT interface with 2-port switch
- Additional PROFINET interface with separate IP address
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET I/O controller.
- PROFIBUS DP master interface
- Isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes
- Integrated web server with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data

Article No.

SIMATIC S7-1500F, CPU 1517F-3 PN/DP Central processor unit with 3 MB work memory for program and 8 MB work memory for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 3rd interface: PROFIBUS, 2 ns bit performance, SIMATIC Memory Card required	6ES7517-3FP00-0AB0
Accessories	
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0
SIMATIC S7-1500 mounting rail	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0

Ordering data	Article No.	Article No.	
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0
System power supply		PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	PROFIBUS FC robust bus cable with PUR protective jacket For use environments subject to harsh chemicals and mechanical stress, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0JH10
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	PROFIBUS FC flexible cable GP 2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1831-2K
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	PROFIBUS FC trailing cable	
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3EH10
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1831-2L
Load current supply		PROFIBUS FC food bus cable with PE protective jacket For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0GH10
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	PROFIBUS FC underground cable Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3FH10
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	PROFIBUS FC FRNC cable GP Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0LH10
Power supply connector		PROFIBUS FastConnect stripping tool Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.	6GK1905-6AA00
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		
PROFIBUS FastConnect RS485 bus connector with 90° cable outlet			

SIMATIC S7-1500 Advanced Controllers

Central processing units

Fail-safe CPUs

CPU 1517F-3 PN/DP

Ordering data

Article No.

Article No.

IE FC RJ45 plugs

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 1 unit.

6GK1901-1BB10-2AA0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 10 units.

6GK1901-1BB10-2AB0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 50 units.

6GK1901-1BB10-2AE0

Industrial Ethernet FC TP standard cable

GP 2x2 (PROFINET type A), TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.

6XV1840-2AH10

Industrial Ethernet FC TP trailing cable

2x2 (PROFINET type C), TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.

6XV1840-3AH10

Industrial Ethernet FC TP marine cable

TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.

6XV1840-4AH10

Industrial Ethernet FastConnect stripping tool

Stripping tool for fast stripping of insulation from the IE FastConnect cables.

6GK1901-1GA00

SIMATIC S7-1500, spare part display

For S7-1500 CPUs with 70 mm or 175 mm width

6ES7591-1BA02-0AA0

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

- Windows 11 (64-bit)
- Windows 11 Home Version 21H2
 - Windows 11 Home Version 22H2
 - Windows 11 Professional Version 21H2
 - Windows 11 Professional Version 22H2
 - Windows 11 Enterprise 21H2
 - Windows 11 Enterprise 22H2

- Windows Server (64-bit)
- Windows Server 2016 Standard (full installation)
 - Windows Server 2019 Standard (full installation)
 - Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

SIMATIC STEP 7 Prof. V19; floating license

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>

6ES7822-1AA23-0YA5

SIMATIC STEP 7 Prof. V19, floating license download¹⁾

Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool> Consignee email address required for delivery

6ES7822-1AE23-0YA5

Ordering data	Article No.	Article No.	Article No.
<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco</p> <p>Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>		<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery</p>	6ES7833-1FA23-0YH5
<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F</p> <p>Content: 1x USB</p>	6ES7833-1FA23-0YA5	<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>	6ES7998-8XC01-8YE0
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

CPU 1518F-4 PN/DP

Overview



- The CPU with a very large program and data memory in the S7-1500 Controller product range for fail-safe applications with highest requirements regarding program scope and networking.
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849.
- Extremely high processing speed for binary and floating-point arithmetic.
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configuration.
- PROFINET IO IRT interface with 2-port switch.
- Two additional PROFINET interfaces with separate IP addresses.
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET I/O controller.
- PROFIBUS DP master interface.
- Isochronous mode on PROFIBUS and PROFINET.
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes
- Integrated web server with the option of creating user-defined web pages.

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-1500F, CPU 1518F-4 PN/DP

Central processing unit with 9 MB work memory for program and 60 MB for data,
1st interface:
PROFINET IRT with 2-port switch,
2nd interface: PROFINET RT,
3rd interface:
PROFINET basic services,
4th interface: PROFIBUS,
1 ns bit performance,
SIMATIC Memory Card required

6ES7518-4FP00-0AB0

Accessories

SIMATIC Memory Card

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS

3.3 V Flash, 4 MB

6ES7954-8LC03-0AA0

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

3.3 V Flash, 12 MB

6ES7954-8LE03-0AA0

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

3.3 V Flash, 24 MB

6ES7954-8LF03-0AA0

SIMATIC S7, memory card for S7-1x00 CPU

3.3 V Flash, 256 MB

6ES7954-8LL03-0AA0

SIMATIC S7, memory card for S7-1x 00 CPU

3.3 V Flash, 2 GB

6ES7954-8LP04-0AA0

SIMATIC S7, memory card for S7-1x 00 CPU

3.3 V Flash, 32 GB

6ES7954-8LT03-0AA0

SIMATIC S7-1500 mounting rail

SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches)

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

6ES7590-1AB60-0AA0

SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches)

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

6ES7590-1AC40-0AA0

SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches)

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

6ES7590-1AE80-0AA0

SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches)

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

6ES7590-1AF30-0AA0

SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches)

Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays

6ES7590-1AJ30-0AA0

Ordering data	Article No.	Article No.	
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
System power supply		PROFIBUS FC robust bus cable with PUR protective jacket For use environments subject to harsh chemicals and mechanical stress, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0JH10
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	PROFIBUS FC flexible cable GP 2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1831-2K
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	PROFIBUS FC trailing cable	
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3EH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1831-2L
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	PROFIBUS FC food bus cable with PE protective jacket For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0GH10
Load current supply		PROFIBUS FC underground cable Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3FH10
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	PROFIBUS FC FRNC cable GP Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0LH10
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	PROFIBUS FastConnect stripping tool Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.	6GK1905-6AA00
Power supply connector			
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0		

SIMATIC S7-1500 Advanced Controllers

Central processing units

Fail-safe CPUs

CPU 1518F-4 PN/DP

Ordering data

Article No.

Article No.

IE FC RJ45 plugs

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 1 unit.

6GK1901-1BB10-2AA0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 10 units.

6GK1901-1BB10-2AB0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 50 units.

6GK1901-1BB10-2AE0

Industrial Ethernet FC TP standard cable

GP 2x2 (PROFINET type A), TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.

6XV1840-2AH10

Industrial Ethernet FC TP trailing cable

2x2 (PROFINET type C), TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.

6XV1840-3AH10

Industrial Ethernet FC TP marine cable

TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.

6XV1840-4AH10

Industrial Ethernet FastConnect stripping tool

Stripping tool for fast stripping of insulation from the IE FastConnect cables.

6GK1901-1GA00

SIMATIC S7-1500, spare part display

For S7-1500 CPUs with 70 mm or 175 mm width

6ES7591-1BA02-0AA0

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

- Windows 11 (64-bit)
- Windows 11 Home Version 21H2
 - Windows 11 Home Version 22H2
 - Windows 11 Professional Version 21H2
 - Windows 11 Professional Version 22H2
 - Windows 11 Enterprise 21H2
 - Windows 11 Enterprise 22H2

- Windows Server (64-bit)
- Windows Server 2016 Standard (full installation)
 - Windows Server 2019 Standard (full installation)
 - Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

SIMATIC STEP 7 Prof. V19; floating license

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>

6ES7822-1AA23-0YA5

SIMATIC STEP 7 Prof. V19, floating license download¹⁾

Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool> Consignee email address required for delivery

6ES7822-1AE23-0YA5

Ordering data	Article No.	Article No.	
<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>			
<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB</p>	6ES7833-1FA23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Consignee email address required for delivery</p>	6ES7833-1FA23-0YH5
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>	6ES7998-8XC01-8YE0
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

CPU 1518F-4 PN/DP MFP

Overview



- CPU with an extremely large program and data memory in the S7-1500 Controller product range for demanding standard and fail-safe applications with demanding requirements regarding program scope, performance and networking
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- Extremely high processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- C/C++ functions can be called and executed in the CPU runtime.
- In parallel to the CPU runtime, there is an additional C/C++ runtime, in which call-independent, i.e. stand-alone, C/C++ applications can be executed.
- Used as central controller in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configurations
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- Two additional PROFINET interfaces with separate IP addresses for network separation:
The PROFINET interface X2 can be used for connecting additional PROFINET IO RT devices or for fast communication as an I-Device. The PROFINET interface X3 facilitates data transfer at a speed of 1 Gbps.
- PROFIBUS DP master interface
- OPC UA server (data access) as runtime option for easy connection of the SIMATIC S7-1500 to non-Siemens devices/systems
- Isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, gearing between axes, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages

Multi-functional platform

With the multi-functional platform (MFP), more functionality can be accommodated in a module. The computing power of the CPU 1518F-4 PN/DP MFP allows the merging of previously separate applications on a common platform while continuing to meet the high S7-1500 demands with regard to maintenance and ruggedness.

This means that, in addition to the control function, it is also possible to process typical PC applications on the multi-functional platform, e.g. tasks that:

- require high-level language programming,
- are developed based on models, or
- have to be solved via databases.

Besides the option of running C/C++ code in the standard STEP 7 program, the multi-functional platform CPU 1518F-4 PN/DP MFP thus provides an additional second independent runtime environment which facilitates execution of C/C++ applications in parallel to the STEP 7 program if required. Control-independent applications, e.g. protocol converters, database applications and others, can be created in C/C++. This simplifies the creation or reuse of customer-specific, high-level language applications.

The CPU 1518F-4 PN/DP MFP has the quantity structure and functionality of a CPU 1518F-4 PN/DP with regard to the control part. In addition to the user program created with STEP 7 in the TIA Portal, C/C++ functions formulated via the SIMATIC ODK 1500S can be integrated into the standard user program. By using SIMATIC ODK 1500S (ODK - Open Development Kit), higher-level programming language mechanisms, such as object orientation, can also be utilized. Furthermore, with the SIMATIC Target 1500S™ engineering package for Simulink®, it is also possible to integrate complex Simulink models to take advantage of the model-based development using MATLAB and Simulink®.

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500F, CPU bundle consisting of: CPU 1518F-4 PN/DP MFP (6ES7518-4FX00-1AB0) Including C/C++ Runtime and OPC UA Runtime license, 9 MB work memory for program and 60 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 3rd interface: PROFINET basic services, 4th interface: PROFIBUS, 1 ns bit performance, SIMATIC Memory Card (min. 2 GB) required	6ES7518-4FX00-1AC0	System power supply SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0
Accessories SIMATIC Memory Card SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0	SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0	SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0
SIMATIC S7-1500 mounting rail SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0	SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0	SIMATIC S7-1500 spare part, connector For system power supply modules (PS) and load current supply modules (PM), 10 pieces per packing unit	6ES7590-8AA00-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0	Load current supply SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0	SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0	Power supply connector Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0
		PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10

SIMATIC S7-1500 Advanced Controllers

Central processing units

Fail-safe CPUs

CPU 1518F-4 PN/DP MFP

Ordering data

Article No.

Article No.

PROFIBUS FC robust bus cable with PUR protective jacket

For use environments subject to harsh chemicals and mechanical stress, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1830-0JH10

PROFIBUS FC flexible cable GP

2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.

6XV1831-2K

PROFIBUS FC trailing cable

PROFIBUS FC trailing cable, PROFIBUS trailing cable

Max. acceleration 4 m/s², at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1830-3EH10

PROFIBUS FC trailing cable, PROFIBUS trailing cable

Max. acceleration 4 m/s², at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1831-2L

PROFIBUS FC food bus cable with PE protective jacket

For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1830-0GH10

PROFIBUS FC underground cable

Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1830-3FH10

PROFIBUS FC FRNC cable GP

Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1830-0LH10

PROFIBUS FastConnect stripping tool

Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.

6GK1905-6AA00

IE FC RJ45 plugs

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 1 unit.

6GK1901-1BB10-2AA0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 10 units.

6GK1901-1BB10-2AB0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 50 units.

6GK1901-1BB10-2AE0

Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A)

TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.

6XV1840-2AH10

Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C)

TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.

6XV1840-3AH10

Industrial Ethernet FC TP marine cable

TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.

6XV1840-4AH10

Industrial Ethernet FastConnect stripping tool

Stripping tool for fast stripping of insulation from the IE FastConnect cables.

6GK1901-1GA00

SIMATIC S7-1500, spare part display

For S7-1500 CPUs with 70 mm or 175 mm width

6ES7591-1BA02-0AA0

SIMATIC S7-1500 spare part, front cover

For DP interface of the CPU 1518-4 PN/DP

6ES7591-8AA00-0AA0

Ordering data	Article No.	Article No.
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement: Windows 10 (64-bit)</p> <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSB Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200ISP, ET 200pro and ET 200eco</p> <p>Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB</p>
<p>SIMATIC STEP 7 Prof. V19; floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Consignee email address required for delivery</p>
		<p>SIMATIC ODK 1500S</p>
		<p>SIMATIC ODK 1500S V2.5, floating license for 1 user, Engineering software, software and documentation on DVD</p> <p>License key on USB flash drive, Class A, 6 languages (en, de, fr, es, it, cn), runs on Windows 7, Windows 8.1 and Windows 10</p>
		<p>SIMATIC ODK 1500S V2.5, floating license for 1 user, E-SW, software, documentation and license key download¹⁾</p> <p>Class A, 6 languages (en, de, fr, es, it, cn), runs on Windows 7, Windows 8.1 and Windows 10 Consignee email address required for delivery</p>

SIMATIC S7-1500 Advanced Controllers

Central processing units

Fail-safe CPUs

CPU 1518F-4 PN/DP MFP

Ordering data

Article No.

Article No.

SIMATIC Target for Simulink V6.0

SIMATIC Target (TM) for Simulink(R) V6.0 SP1, floating license download¹⁾

Engineering software; software, documentation and license key for download; Class A; 2 languages: en, de; software for integrating Simulink models into the S7 program of the S7-1500 SW controller / CPU1518 ODK/MFP and the Industrial Edge Runtime via the LiveTwin Edge app
For system requirements specification, see under <https://www.siemens.com/compatool>
Consignee email address required for delivery

6ES7823-1BE05-0YA5

SIMATIC Target (TM) for Simulink(R) V6.0 SP1 upgrade V2.0..V5.0 -> V6.0 SP1 floating license download

Engineering software, software, documentation and license key for download; Class A; 2 languages: en, de; software for integrating Simulink models into the S7 program of the S7-1500 SW controller / CPU1518 ODK/MFP and the Industrial Edge Runtime via the LiveTwin Edge app
For system requirements specification, see under <https://www.siemens.com/compatool>
Consignee email address required for delivery

6ES7823-1BE05-0YE5

Target + ODK 1500S Bundle includes: SIMATIC ODK 1500S V2.5 and SIMATIC Target (TM) for Simulink (R) V6.0 SP1, floating license download

E-SW, software, documentation and license key for download, Class A, 2 languages: en, de; software for integrating Simulink models into the S7 program of the S7-1500 SW controller / CPU1518 ODK/MFP and the Industrial Edge Runtime via the LiveTwin Edge app
For system requirements specification, see under <https://www.siemens.com/compatool>
Consignee email address required for delivery

6ES7823-1BE15-0YA0

SIMATIC Manual Collection on DVD, 5 languages

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration.
Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7511-1FL03-0AB0 CPU 1511F-1 PN, 450KB Prog., 1,5MB Data	6ES7513-1FM03-0AB0 CPU 1513F-1 PN, 900KB Prog., 2,5MB Data	6ES7515-2FN03-0AB0 CPU 1515F-2 PN, 1,5MB Prog., 4,5MB Data	6ES7516-3FP03-0AB0 CPU 1516F-3 PN/DP, 3MB Prog., 7,5MB Data
General information				
Product type designation	CPU 1511F-1 PN	CPU 1513F-1 PN	CPU 1515F-2 PN	CPU 1516F-3 PN/DP
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7 511-1FK02-0AB0	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7513-1FL02-0AB0	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7515-2FM02-0AB0	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7516-3FN02-0AB0
Display				
Screen diagonal [cm]	3.45 cm	3.45 cm	6.1 cm	6.1 cm
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V
Memory				
Work memory				
• integrated (for program)	450 kbyte	900 kbyte	1.5 Mbyte	3 Mbyte
• integrated (for data)	1.5 Mbyte	2.5 Mbyte	4.5 Mbyte	7.5 Mbyte
Load memory				
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte	32 Gbyte	32 Gbyte	32 Gbyte
CPU processing times				
for bit operations, typ.	25 ns	25 ns	6 ns	6 ns
for word operations, typ.	32 ns	32 ns	7 ns	7 ns
for fixed point arithmetic, typ.	42 ns	42 ns	9 ns	9 ns
for floating point arithmetic, typ.	170 ns	170 ns	37 ns	37 ns
Counters, timers and their retentivity				
S7 counter				
• Number	2 048	2 048	2 048	2 048
IEC counter				
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times				
• Number	2 048	2 048	2 048	2 048
IEC timer				
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity				
Flag				
• Size, max.	16 kbyte	16 kbyte	16 kbyte	16 kbyte
Address area				
I/O address area				
• Inputs	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image
Time of day				
Clock				
• Type	Hardware clock	Hardware clock	Hardware clock	Hardware clock
1. Interface				
Interface types				
• RJ 45 (Ethernet)	Yes; X1	Yes; X1	Yes; X1	Yes; X1
• Number of ports	2	2	2	2
• integrated switch	Yes	Yes	Yes	Yes
Protocols				
• IP protocol	Yes; IPv4	Yes; IPv4	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes	Yes	Yes
• PROFINET IO Device	Yes	Yes	Yes	Yes
• SIMATIC communication	Yes	Yes	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes	Yes
• Media redundancy	Yes	Yes	Yes	Yes

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

Technical specifications

Technical specifications

Article number	6ES7511-1FL03-0AB0 CPU 1511F-1 PN, 450KB Prog., 1,5MB Data	6ES7513-1FM03-0AB0 CPU 1513F-1 PN, 900KB Prog., 2,5MB Data	6ES7515-2FN03-0AB0 CPU 1515F-2 PN, 1,5MB Prog., 4,5MB Data	6ES7516-3FP03-0AB0 CPU 1516F-3 PN/DP, 3MB Prog., 7,5MB Data
PROFINET IO Controller				
Services				
- PG/OP communication	Yes	Yes	Yes	Yes
- Isochronous mode	Yes	Yes	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes	Yes	Yes	Yes
- PROFinergy	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64	64	64	64
- Number of connectable IO Devices for RT, max.	128	128	256	256
- of which in line, max.	128	128	256	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device				
Services				
- PG/OP communication	Yes	Yes	Yes	Yes
- Isochronous mode	No	No	No	No
- IRT	Yes	Yes	Yes	Yes
- PROFinergy	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Shared device	Yes	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
2. Interface				
Interface types				
• RJ 45 (Ethernet)			Yes; X2	Yes; X2
• Number of ports			1	1
• integrated switch			No	No
Protocols				
• IP protocol			Yes; IPv4	Yes; IPv4
• PROFINET IO Controller			Yes	Yes
• PROFINET IO Device			Yes	Yes
• SIMATIC communication			Yes	Yes
• Open IE communication			Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server			Yes	Yes
• Media redundancy			No	No

Technical specifications

Article number	6ES7511-1FL03-0AB0 CPU 1511F-1 PN, 450KB Prog., 1,5MB Data	6ES7513-1FM03-0AB0 CPU 1513F-1 PN, 900KB Prog., 2,5MB Data	6ES7515-2FN03-0AB0 CPU 1515F-2 PN, 1,5MB Prog., 4,5MB Data	6ES7516-3FP03-0AB0 CPU 1516F-3 PN/DP, 3MB Prog., 7,5MB Data
PROFINET IO Controller				
Services				
- PG/OP communication			Yes	Yes
- Isochronous mode			No	No
- Direct data exchange			No	No
- IRT			No	No
- PROFIenergy			Yes; per user program	Yes; per user program
- Prioritized startup			No	No
- Number of connectable IO Devices, max.			32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.			32	32
- of which in line, max.			32	32
- Number of IO Devices that can be simultaneously activated/deactivated, max.			8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.			8	8
- Updating times			The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device				
Services				
- PG/OP communication			Yes	Yes
- Isochronous mode			No	No
- IRT			No	No
- PROFIenergy			Yes; per user program	Yes; per user program
- Prioritized startup			No	No
- Shared device			Yes	Yes
- Number of IO Controllers with shared device, max.			4	4
- activation/deactivation of I-devices			Yes; per user program	Yes; per user program
- Asset management record			Yes; per user program	Yes; per user program
3. Interface				
Interface types				
• RS 485				Yes; X3
• Number of ports				1
Protocols				
• PROFIBUS DP master				Yes
• PROFIBUS DP slave				No
• SIMATIC communication				Yes
PROFIBUS DP master				
• Number of DP slaves, max.				125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

Technical specifications

Technical specifications

Article number	6ES7511-1FL03-0AB0 CPU 1511F-1 PN, 450KB Prog., 1,5MB Data	6ES7513-1FM03-0AB0 CPU 1513F-1 PN, 900KB Prog., 2,5MB Data	6ES7515-2FN03-0AB0 CPU 1515F-2 PN, 1,5MB Prog., 4,5MB Data	6ES7516-3FP03-0AB0 CPU 1516F-3 PN/DP, 3MB Prog., 7,5MB Data
Protocols				
Number of connections				
• Number of connections, max.	128; via integrated interfaces of the CPU and connected CPs / CMs	128; via integrated interfaces of the CPU and connected CPs / CMs	256; via integrated interfaces of the CPU and connected CPs / CMs	256; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode				
Media redundancy				
- Media redundancy	only via 1st interface (X1)	only via 1st interface (X1)	only via 1st interface (X1)	only via 1st interface (X1)
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50	50	50
SIMATIC communication				
• S7 routing	Yes	Yes	Yes	Yes
OPC UA				
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes	Yes	Yes	Yes
Supported technology objects				
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	1 120	1 120	2 400	2 400
• Required Motion Control resources				
- per speed-controlled axis	40	40	40	40
- per positioning axis	80	80	80	80
- per synchronous axis	160	160	160	160
- per external encoder	80	80	80	80
- per output cam	20	20	20	20
- per cam track	160	160	160	160
- per probe	40	40	40	40
Controller				
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring				
• High-speed counter	Yes	Yes	Yes	Yes

Technical specifications

Article number	6ES7511-1FL03-0AB0 CPU 1511F-1 PN, 450KB Prog., 1,5MB Data	6ES7513-1FM03-0AB0 CPU 1513F-1 PN, 900KB Prog., 2,5MB Data	6ES7515-2FN03-0AB0 CPU 1515F-2 PN, 1,5MB Prog., 4,5MB Data	6ES7516-3FP03-0AB0 CPU 1516F-3 PN/DP, 3MB Prog., 7,5MB Data
Standards, approvals, certificates				
Highest safety class achievable in safety mode				
Probability of failure (for service life of 20 years and repair time of 100 hours)				
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05	< 2.00E-05	< 2.00E-05	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09	< 1.00E-09	< 1.00E-09	< 1.00E-09
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation
• horizontal installation, max.	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation
• vertical installation, max.	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
configuration / header				
configuration / programming / header				
Programming language				
- LAD	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe
- FBD	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe
- STL	Yes	Yes	Yes	Yes
- SCL	Yes	Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes	Yes
Know-how protection				
• User program protection/ password protection	Yes	Yes	Yes	Yes
• Copy protection	Yes	Yes	Yes	Yes
• Block protection	Yes	Yes	Yes	Yes
Access protection				
• protection of confidential configuration data	Yes	Yes	Yes	Yes
• Password for display	Yes	Yes	Yes	Yes
• Protection level: Write protection	Yes	Yes	Yes	Yes
• Protection level: Read/write protection	Yes	Yes	Yes	Yes
• Protection level: Write protection for Failsafe	Yes	Yes	Yes	Yes
• Protection level: Complete protection	Yes	Yes	Yes	Yes
Dimensions				
Width	35 mm	35 mm	70 mm	70 mm
Height	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm
Weights				
Weight, approx.	336 g	336 g	456 g	469 g

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

Technical specifications

Technical specifications

Article number	6ES7517-3FP00-0AB0 CPU 1517F-3 PN/DP, 3MB Prog., 8MB Data	6ES7518-4FP00-0AB0 CPU 1518F-4 PN/DP, 9 MB Prog, 60MB Data	6ES7518-4FX00-1AC0 CPU 1518F-4 PN/DP MFP + C/C++ RT +OPC UA
General information			
Product type designation	CPU 1517F-3 PN/DP	CPU 1518F-4PN/DP	CPU 1518F-4 PN/DP MFP
Engineering with			
<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/ integrated from version 	V19 (FW V3.1); V13 Update 3 (FW V1.6) or higher	V19 (FW V3.1); V13 (FW V1.5) or higher	V18 (FW V3.0) / V15 (FW V2.5) or higher
Display			
Screen diagonal [cm]	6.1 cm	6.1 cm	6.1 cm
Supply voltage			
Rated value (DC)	24 V	24 V	24 V
Memory			
Work memory			
<ul style="list-style-type: none"> integrated (for program) integrated (for data) integrated (for CPU function library of CPU Runtime) 	3 Mbyte 8 Mbyte	9 Mbyte 60 Mbyte	9 Mbyte 60 Mbyte 50 Mbyte; Note: The "CPU function library of the CPU" are C/C++ blocks for the user program that were created using the SIMATIC ODK 1500S or Target 1500S.
Working memory for additional functions			
<ul style="list-style-type: none"> Integrated (for C/C++ Runtime application) available (for Linux runtime application) 			1 024 Mbyte 1 Gbyte
Load memory			
<ul style="list-style-type: none"> Plug-in (SIMATIC Memory Card), max. 	32 Gbyte	32 Gbyte	32 Gbyte; the memory card must have at least 2 GB of space on it
CPU processing times			
for bit operations, typ.	2 ns	1 ns	1 ns
for word operations, typ.	3 ns	2 ns	2 ns
for fixed point arithmetic, typ.	3 ns	2 ns	2 ns
for floating point arithmetic, typ.	12 ns	6 ns	6 ns
Counters, timers and their retentivity			
S7 counter			
<ul style="list-style-type: none"> Number 	2 048	2 048	2 048
IEC counter			
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times			
<ul style="list-style-type: none"> Number 	2 048	2 048	2 048
IEC timer			
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity			
Flag			
<ul style="list-style-type: none"> Size, max. 	16 kbyte	16 kbyte	16 kbyte
Address area			
I/O address area			
<ul style="list-style-type: none"> Inputs Outputs 	32 kbyte; All inputs are in the process image 32 kbyte; All outputs are in the process image	32 kbyte; All inputs are in the process image 32 kbyte; All outputs are in the process image	32 kbyte; All inputs are in the process image 32 kbyte; All outputs are in the process image
Time of day			
Clock			
<ul style="list-style-type: none"> Type 	Hardware clock	Hardware clock	Hardware clock

Technical specifications

Article number	6ES7517-3FP00-0AB0 CPU 1517F-3 PN/DP, 3MB Prog., 8MB Data	6ES7518-4FP00-0AB0 CPU 1518F-4 PN/DP, 9 MB Prog, 60MB Data	6ES7518-4FX00-1AC0 CPU 1518F-4 PN/DP MFP + C/C++ RT +OPC UA
1. Interface			
Interface types			
• RJ 45 (Ethernet)	Yes; X1	Yes; X1	Yes; X1
• Number of ports	2	2	2
• integrated switch	Yes	Yes	Yes
Protocols			
• IP protocol	Yes; IPv4	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes	Yes
• PROFINET IO Device	Yes	Yes	Yes
• SIMATIC communication	Yes	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes
• Media redundancy	Yes	Yes	Yes
PROFINET IO Controller			
Services			
- PG/OP communication			Yes
- Isochronous mode	Yes	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes	Yes	Yes
- PROFINergy	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	512; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	512; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	512; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64	64	64
- Number of connectable IO Devices for RT, max.	512	512	512
- of which in line, max.	512	512	512
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1	1	
PROFINET IO Device			
Services			
- PG/OP communication			Yes
- Isochronous mode	No	No	No
- IRT	Yes	Yes; Minimum send cycle of 250 µs	Yes; Minimum send cycle of 250 µs
- PROFINergy	Yes; per user program	Yes; per user program	Yes; per user program
- Shared device	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program	Yes; per user program
- PROFINET Security Class	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only	

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

Technical specifications

Technical specifications

Article number	6ES7517-3FP00-0AB0 CPU 1517F-3 PN/DP, 3MB Prog., 8MB Data	6ES7518-4FP00-0AB0 CPU 1518F-4 PN/DP, 9 MB Prog, 60MB Data	6ES7518-4FX00-1AC0 CPU 1518F-4 PN/DP MFP + C/C++ RT +OPC UA
2. Interface			
Interface types			
• RJ 45 (Ethernet)	Yes; X2	Yes; X2	Yes; X2
• Number of ports	1	1	1
• integrated switch	No	No	No
Protocols			
• IP protocol	Yes; IPv4	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes	Yes
• PROFINET IO Device	Yes	Yes	Yes
• SIMATIC communication	Yes	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes
• Media redundancy	No	No	No
PROFINET IO Controller			
Services			
- PG/OP communication			Yes
- Isochronous mode	No	No	No
- Direct data exchange	No	No	No
- IRT	No	No	No
- PROFlenergy	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup	No	No	No
- Number of connectable IO Devices, max.	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.	128	128	128
- of which in line, max.	128	128	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1	1	
PROFINET IO Device			
Services			
- PG/OP communication			Yes
- Isochronous mode	No	No	No
- IRT	No	No	No
- PROFlenergy	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup	No	No	No
- Shared device	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program	Yes; per user program
- PROFINET Security Class	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only	

Technical specifications

Article number	6ES7517-3FP00-0AB0 CPU 1517F-3 PN/DP, 3MB Prog., 8MB Data	6ES7518-4FP00-0AB0 CPU 1518F-4 PN/DP, 9 MB Prog, 60MB Data	6ES7518-4FX00-1AC0 CPU 1518F-4 PN/DP MFP + C/C++ RT +OPC UA
3. Interface			
Interface types			
<ul style="list-style-type: none"> RJ 45 (Ethernet) RS 485 Number of ports 	Yes; X3 1	Yes; X3 1	Yes; X3 1; C/C++ Runtime can also be reached via this port
<ul style="list-style-type: none"> integrated switch 		No	No
Protocols			
<ul style="list-style-type: none"> IP protocol PROFINET IO Controller PROFINET IO Device PROFIBUS DP master PROFIBUS DP slave SIMATIC communication Open IE communication Web server 	Yes No Yes	Yes; IPv4 No No Yes Yes; Optionally also encrypted Yes	Yes; IPv4 No No Yes Yes; Optionally also encrypted Yes
PROFIBUS DP master			
<ul style="list-style-type: none"> Number of DP slaves, max. 	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET		
4. Interface			
Interface types			
<ul style="list-style-type: none"> RS 485 Number of ports 		Yes; X4 1	Yes; X4 1
Protocols			
<ul style="list-style-type: none"> PROFIBUS DP master PROFIBUS DP slave SIMATIC communication 		Yes No Yes	Yes No Yes
PROFIBUS DP master			
<ul style="list-style-type: none"> Number of DP slaves, max. 		125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols			
Number of connections			
<ul style="list-style-type: none"> Number of connections, max. 	320; via integrated interfaces of the CPU and connected CPs / CMs	384; via integrated interfaces of the CPU and connected CPs / CMs	384; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode			
Media redundancy			
<ul style="list-style-type: none"> Media redundancy MRP MRP interconnection, supported MRPD Switchover time on line break, typ. Number of stations in the ring, max. 	only via 1st interface (X1) Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client Yes; as MRP ring node according to IEC 62439-2 Edition 3.0 Yes; Requirement: IRT 200 ms; For MRP, bumpless for MRPD 50	only via 1st interface (X1) Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client Yes; as MRP ring node according to IEC 62439-2 Edition 3.0 Yes; Requirement: IRT 200 ms; For MRP, bumpless for MRPD 50	only via 1st interface (X1) Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client Yes; as MRP ring node according to IEC 62439-2 Edition 3.0 Yes; Requirement: IRT 200 ms; For MRP, bumpless for MRPD 50
SIMATIC communication			
<ul style="list-style-type: none"> S7 routing 	Yes	Yes	Yes
OPC UA			
<ul style="list-style-type: none"> OPC UA Client OPC UA Server Alarms and Conditions 	Yes; Data Access (registered Read/Write), Method Call Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space Yes	Yes; Data Access (registered Read/Write), Method Call Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space Yes	Yes; Data Access (registered Read/Write), Method Call Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space Yes

SIMATIC S7-1500 Advanced Controllers

Central processing units
Fail-safe CPUs

Technical specifications

Technical specifications

Article number	6ES7517-3FP00-0AB0 CPU 1517F-3 PN/DP, 3MB Prog., 8MB Data	6ES7518-4FP00-0AB0 CPU 1518F-4 PN/DP, 9 MB Prog, 60MB Data	6ES7518-4FX00-1AC0 CPU 1518F-4 PN/DP MFP + C/C++ RT +OPC UA
Supported technology objects			
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	10 240	15 360	15 360
• Required Motion Control resources			
- per speed-controlled axis	40	40	40
- per positioning axis	80	80	80
- per synchronous axis	160	160	160
- per external encoder	80	80	80
- per output cam	20	20	20
- per cam track	160	160	160
- per probe	40	40	40
Controller			
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring			
• High-speed counter	Yes	Yes	Yes
Standards, approvals, certificates			
Highest safety class achievable in safety mode			
Probability of failure (for service life of 20 years and repair time of 100 hours)			
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05	< 2.00E-05	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09	< 1.00E-09	< 1.00E-09
Ambient conditions			
Ambient temperature during operation			
• horizontal installation, min.	0 °C	0 °C	0 °C
• horizontal installation, max.	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	0 °C	0 °C	0 °C
• vertical installation, max.	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual

Technical specifications

Article number	6ES7517-3FP00-0AB0 CPU 1517F-3 PN/DP, 3MB Prog., 8MB Data	6ES7518-4FP00-0AB0 CPU 1518F-4 PN/DP, 9 MB Prog, 60MB Data	6ES7518-4FX00-1AC0 CPU 1518F-4 PN/DP MFP + C/C++ RT +OPC UA
configuration / header			
configuration / programming / header			
Programming language			
- LAD	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe
- FBD	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe
- STL	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
- CFC	Yes; either CFC or failsafe functionality	Yes; either CFC or failsafe functionality	either CFC or failsafe functionality
- GRAPH	Yes	Yes	Yes
Know-how protection			
• User program protection/ password protection	Yes	Yes	Yes
• Copy protection	Yes	Yes	Yes
• Block protection	Yes	Yes	Yes
Access protection			
• protection of confidential configuration data	Yes	Yes	Yes
• Password for display	Yes	Yes	Yes
• Protection level: Write protection	Yes	Yes	Yes
• Protection level: Read/write protection	Yes	Yes	Yes
• Protection level: Write protection for Failsafe	Yes	Yes	
• Protection level: Complete protection	Yes	Yes	Yes
• User administration	Yes; device-wide	Yes; device-wide	
Open Development interfaces			
• Size of ODK SO file, max.			9.8 Mbyte
Dimensions			
Width	175 mm	175 mm	175 mm
Height	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm
Weights			
Weight, approx.	1 929 g	2 079 g	2 093 g

SIMATIC S7-1500 Advanced Controllers

Central processing units
SIPLUS fail-safe CPUs

SIPLUS CPU 1511F-1 PN

Overview



SIMATIC S7-1500F CPU 1511F-1 PN

- Entry-level CPU in the SIPLUS S7-1500F Controller product range
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- Suitable for standard and fail-safe applications with medium requirements for program scope and processing speed
- Used as central PLC in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configurations
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- Isochronous mode

Note:

SIMATIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1511F-1 PN

(Extended temperature range and exposure to environmental substances)

Fail-safe central processing unit with work memory 225 KB for program, 1 MB for data, 1st interface: PROFINET IRT with 2-port switch; SIMATIC Memory Card required

Temperature range -25 ... +60 °C

6AG1511-1FK02-2AB0

Accessories

System power supply

(Extended temperature range and exposure to environmental substances)

For supplying the backplane bus of the S7-1500 Controller

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0

Load current supply

(Extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8 A

6AG1333-4BA00-7AA0

Display

(Extended temperature range and exposure to environmental substances)

For SIPLUS CPU 1511F-1 PN and CPU 1513F-1 PN; spare part

6AG1591-1AA01-2AA0

Other accessories

See SIMATIC S7-1500, CPU 1511F-1 PN, page 4/59

Overview

- The CPU for standard and fail-safe applications with medium/high requirements for program/data storage in the SIPLUS S7-1500 Controller product range
- High processing speed for binary and floating-point arithmetic
- Used as central PLC in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configurations
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- Isochronous mode

Note:

SIMATIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS CPU 1513F-1 PN****6AG1513-1FL02-2AB0**

(extended temperature range and exposure to media)

Fail-safe CPU, 450 KB work memory for program, 1.5 MB for data, PROFINET IRT interface with 2-port switch; SIMATIC Memory Card required

Accessories**System power supply**

(extended temperature range and exposure to media)

For supplying the backplane bus of the S7-1500 PLC

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0**Load current supply**

(extended temperature range and exposure to media)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8 A

6AG1333-4BA00-7AA0**Display****6AG1591-1AB00-2AA0**

(extended temperature range and exposure to media)

For SIPLUS CPU 1511F-1 PN and CPU 1513F-1 PN; spare part

Other accessories

See SIMATIC S7-1500, CPU 1513F-1 PN, page 4/62

SIMATIC S7-1500 Advanced Controllers

Central processing units
SIPLUS fail-safe CPUs

SIPLUS CPU 1515F-2 PN

Overview



- The CPU for applications with medium to high requirements for program/data memory in the S7-1500 Controller product range
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- Medium to high processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configurations
- PROFINET IO IRT interface with 2-port switch
- Additional PROFINET interface with separate IP address
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- Isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders
- Integrated web server with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1515F-2 PN

6AG1515-2FM02-2AB0

(Extended temperature range and exposure to environmental substances)

Fail-safe CPU, 750 KB work memory for program, 3 MB for data, PROFINET IRT interface with 2-port switch; PROFINET RT interface; SIMATIC Memory Card required

Accessories

System power supply

(Extended temperature range and exposure to environmental substances)

For supplying the backplane bus of the S7-1500 Controller

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0

Load current supply

(Extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8 A

6AG1333-4BA00-7AA0

Display

(Extended temperature range and exposure to environmental substances)

For SIPLUS CPU 1515F-2 PN; spare part

6AG1591-1BB00-2AA0

Other accessories

see SIMATIC S7-1500, CPU 1515F-2 PN/DP, page 4/65

Overview



- The CPU with a large program and data memory in the SIPLUS S7-1500 Controller product range for fail-safe applications with high requirements regarding program scope and networking.
- Can be used for failsafe functions up to SIL 3 according to IEC 61508 and up to PLe according to ISO 13849.
- High processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configuration.
- PROFINET IO IRT interface with 2-port switch.
- Additional PROFINET interface with separate IP address.
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller.
- PROFIBUS DP master interface.
- Isochronous mode on PROFIBUS and PROFINET.
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders.
- Integrated web server with the option of creating user-defined web pages.

Note:

SIMATIC Memory Card required for operation of the CPU

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1516F-3 PN/DP

(Extended temperature range and exposure to environmental substances)

Fail-safe CPU, 1.5 MB work memory for program, 5 MB for data, PROFINET IRT interface with 2-port switch, PROFINET RT interface, PROFIBUS interface; SIMATIC Memory Card required

Temperature range -40 ... +60 °C

6AG1516-3FN02-2AB0

Accessories**System power supply**

(Extended temperature range and exposure to environmental substances)

For supplying the backplane bus of the S7-1500 Controller

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0

Load current supply

(Extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8 A

6AG1333-4BA00-7AA0

Display

(Extended temperature range and exposure to environmental substances)

For SIPLUS CPU 1516F-3 PN/DP; spare part

6AG1591-1BB00-2AA0

Other accessories

See SIMATIC S7-1500, CPU 1516F-3 PN/DP, page 4/68

SIMATIC S7-1500 Advanced Controllers

Central processing units
SIPLUS fail-safe CPUs

SIPLUS CPU 1518F-4 PN/DP

Overview



- The CPU with a very large program and data memory in the SIPLUS S7-1500 Controller product range for fail-safe applications with highest requirements regarding program scope, performance and networking.
- Can be used for failsafe functions up to SIL 3 according to IEC 61508 and up to PLe according to ISO 13849.
- Extremely high processing speed for binary and floating-point arithmetic.
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- Supports PROFIsafe in centralized and distributed configuration.
- PROFINET IO IRT interface with 2-port switch.
- Two additional PROFINET interfaces with separate IP addresses.
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller.
- PROFIBUS DP master interface.
- Isochronous mode on PROFIBUS and PROFINET.
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes
- Integrated web server with the option of creating user-defined web pages.

Note:

SIMATIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1518F-4 PN/DP

6AG1518-4FP00-4AB0

(Exposure to environmental substances)

Fail-safe CPU, 6 MB work memory for program, 20 MB for data, PROFINET IRT interface with 2-port switch, PROFINET RT interface, Ethernet interface, PROFIBUS interface; SIMATIC Memory Card required

Accessories

SIPLUS S7-1500 cooling fan 175 mm

6AG1593-0AA00-7AA0

(Extended temperature range and exposure to environmental substances)

Fan module for the operation of a SIPLUS S7-1500 CPU at locations with an ambient temperature of up to +70 °C

System power supply

(Extended temperature range and exposure to environmental substances)

For supplying the backplane bus of the S7-1500 Controller

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0

Load current supply

(Extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8 A

6AG1333-4BA00-7AA0

Display

6AG1591-1BA02-2AA0

(Extended temperature range and exposure to environmental substances)

for CPU 1518-4F PN/DP; spare part

Other accessories

See SIMATIC S7-1500, CPU 1518F-4 PN/DP, page 4/76

Technical specifications

Article number	6AG1511-1FK02-2AB0	6AG1513-1FL02-2AB0	6AG1515-2FM02-2AB0	6AG1516-3FN02-2AB0	6AG1518-4FP00-4AB0
Based on	6ES7511-1FK02-0AB0	6ES7513-1FL02-0AB0	6ES7515-2FM02-0AB0	6ES7516-3FN02-0AB0	6ES7518-4FP00-0AB0
	SIPLUS S7-1500 CPU 1511F-1 PN	SIPLUS S7-1500 CPU 1513F-1 PN	SIPLUS S7-1500 CPU 1515F-2 PN	SIPLUS S7-1500 CPU 1516F-3 PN/DP	SIPLUS S7-1500 CPU 1518F-4 PN/DP
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-25 °C; = Tmin (incl. condensation/frost)	-25 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	0 °C
• horizontal installation, max.	60 °C; = Tmax; display: 50 °C, the display is switched off at an operating temperature of typically 50 °C	60 °C; = Tmax; display: 50 °C, the display is switched off at an operating temperature of typically 50 °C	60 °C; = Tmax; display: 50 °C, the display is switched off at an operating temperature of typically 50 °C	60 °C; = Tmax; display: 50 °C, the display is switched off at an operating temperature of typically 50 °C	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	-25 °C; = Tmin (incl. condensation/frost)	-25 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin	-40 °C; = Tmin	0 °C
• vertical installation, max.	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; = Tmax; display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; = Tmax; display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m
• Ambient air temperature-barometric pressure-altitude	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260
Relative humidity					
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance					
Coolants and lubricants					
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems					
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea					
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

SIMATIC S7-1500 Advanced Controllers

Central processing units
SIPLUS fail-safe CPUs

Technical specifications

Technical specifications

Article number	6AG1511-1FK02-2AB0	6AG1513-1FL02-2AB0	6AG1515-2FM02-2AB0	6AG1516-3FN02-2AB0	6AG1518-4FP00-4AB0
Based on	6ES7511-1FK02-0AB0	6ES7513-1FL02-0AB0	6ES7515-2FM02-0AB0	6ES7516-3FN02-0AB0	6ES7518-4FP00-0AB0
	SIPLUS S7-1500 CPU 1511F-1 PN	SIPLUS S7-1500 CPU 1513F-1 PN	SIPLUS S7-1500 CPU 1515F-2 PN	SIPLUS S7-1500 CPU 1516F-3 PN/DP	SIPLUS S7-1500 CPU 1518F-4 PN/DP
Usage in industrial process technology					
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark					
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating					
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview

- The CPU for applications with medium requirements for program scope and processing speed, and increased requirements for availability.
- High processing speed for binary and floating-point arithmetic
- Used as the central controller in production lines with distributed I/O
- PROFINET IO RT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data**Article No.**

SIMATIC S7-1500R, CPU 1513R-1PN Central processor unit with 600 KB work memory for program and 2.5 MB for data, 1st interface: PROFINET RT with 2-port switch, SIMATIC Memory Card required	6ES7513-1RM03-0AB0
Accessories	
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0
SIMATIC S7-1500 mounting rail	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Redundant CPUs

CPU 1513R-1 PN

Ordering data

Article No.

Article No.

SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches)

Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately

6ES7590-1BC00-0AA0

SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail

Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit

6ES7590-5AA00-0AA0

Load current supply

SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500

Input: 120/230 V AC, output: 24 V DC/3 A

6EP1332-4BA00

SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500

Input: 120/230 V AC, output: 24 V DC/8 A

6EP1333-4BA00

Power supply connector

Connector, female, 2x2-pole, ET 200SP, interface module, KP32F

PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit

6ES7193-4JB00-0AA0

IE FC RJ45 plugs

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 1 unit.

6GK1901-1BB10-2AA0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 10 units.

6GK1901-1BB10-2AB0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack=50 units.

6GK1901-1BB10-2AE0

Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A)

TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.

6XV1840-2AH10

Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C)

TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.

6XV1840-3AH10

Industrial Ethernet FC TP marine cable

TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.

6XV1840-4AH10

Industrial Ethernet FastConnect stripping tool

Stripping tool for fast stripping of insulation from the IE FastConnect cables.

6GK1901-1GA00

Display module 35 mm

SIMATIC S7-1500, spare part

Display module, 35 mm for S7-1500 CPUs

6ES7591-1AB00-0AA0

STEP 7 Professional V19 (required for S7-1500R/H)

Target system:
SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

- Windows 11 (64-bit)
- Windows 11 Home Version 21H2
 - Windows 11 Home Version 22H2
 - Windows 11 Professional Version 21H2
 - Windows 11 Professional Version 22H2
 - Windows 11 Enterprise 21H2
 - Windows 11 Enterprise 22H2

- Windows Server (64-bit)
- Windows Server 2016 Standard (full installation)
 - Windows Server 2019 Standard (full installation)
 - Windows Server 2022 Standard (full installation)

Type of delivery:
9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

Ordering data	Article No.	Article No.	Article No.
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>	6ES7998-8XC01-8YE0
<p>SIMATIC STEP 7 Prof. V19; floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5	<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Redundant CPUs

CPU 1515R-2 PN

Overview



- The CPU for applications with medium/high requirements for program scope, networking and processing speed, and with increased requirements for availability.
- High processing speed for binary and floating-point arithmetic
- Used as central controller with distributed I/O
- PROFINET IO RT interface with 2-port switch
- Additional PROFINET interface with separate IP address
- PROFINET IO controller for operating distributed I/O on PROFINET

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data

Article No.

**SIMATIC S7-1500R,
CPU 1515R-2 PN** **6ES7515-2RN03-0AB0**

Central processing unit with 1 MB work memory for program and 4.5 MB for data,
1st interface:
PROFINET RT with 2-port switch,
2nd interface: PROFINET,
SIMATIC Memory Card required

Accessories

SIMATIC Memory Card

**SIMATIC S7, memory card for
S7-1x 00 CPU/SINAMICS** **6ES7954-8LC03-0AA0**

3.3 V Flash, 4 MB

**SIMATIC S7, memory card for
S7-1x00 CPU/SINAMICS** **6ES7954-8LE03-0AA0**

3.3 V Flash, 12 MB

**SIMATIC S7, memory card for
S7-1x00 CPU/SINAMICS** **6ES7954-8LF03-0AA0**

3.3 V Flash, 24 MB

**SIMATIC S7, memory card for
S7-1x00 CPU** **6ES7954-8LL03-0AA0**

3.3 V Flash, 256 MB

**SIMATIC S7, memory card for
S7-1x 00 CPU** **6ES7954-8LP04-0AA0**

3.3 V Flash, 2 GB

**SIMATIC S7, memory card for
S7-1x 00 CPU** **6ES7954-8LT03-0AA0**

3.3 V Flash, 32 GB

SIMATIC S7-1500 mounting rail

**SIMATIC S7-1500, mounting rail
160 mm (approx. 6.3 inches)** **6ES7590-1AB60-0AA0**

Including grounding screw,
integrated DIN rail for mounting
small items such as terminals,
circuit breakers and relays

**SIMATIC S7-1500, mounting rail
245 mm (approx. 9.6 inches)** **6ES7590-1AC40-0AA0**

Including grounding screw,
integrated DIN rail for mounting
small items such as terminals,
circuit breakers and relays

**SIMATIC S7-1500, mounting rail
482.6 mm (approx. 19 inches)** **6ES7590-1AE80-0AA0**

Including grounding screw,
integrated DIN rail for mounting
small items such as terminals,
circuit breakers and relays

**SIMATIC S7-1500, mounting rail
530 mm (approx. 20.9 inches)** **6ES7590-1AF30-0AA0**

Including grounding screw,
integrated DIN rail for mounting
small items such as terminals,
circuit breakers and relays

**SIMATIC S7-1500, mounting rail
830 mm (approx. 32.7 inches)** **6ES7590-1AJ30-0AA0**

Including grounding screw,
integrated DIN rail for mounting
small items such as terminals,
circuit breakers and relays

**SIMATIC S7-1500, mounting rail
2000 mm (approx. 78.7 inches)** **6ES7590-1BC00-0AA0**

Without grounding screw,
integrated DIN rail for mounting
small items such as terminals,
circuit breakers and relays,
for cutting to length by customer,
grounding screw
(6ES7590-5AA00-0AA0, 20 units)
must be ordered separately

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
Load current supply		Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	SIMATIC S7-1500, spare part, display module 70 mm for S7-1500 CPUs	6ES7591-1BB00-0AA0
Power supply connector		STEP 7 Professional V19 (required for S7-1500R/H) Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download	
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		
IE FC RJ45 plugs			
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0		
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0		
Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0		
Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10		

SIMATIC S7-1500 Advanced Controllers

Central processing units
Redundant CPUs

CPU 1515R-2 PN**Ordering data****Article No.****Article No.****SIMATIC STEP 7 Prof. V19;
floating license**

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>

6ES7822-1AA23-0YA5**SIMATIC Manual Collection
on DVD, 5 languages**

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0**SIMATIC Manual Collection
on DVD, 5 languages**

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2**SIMATIC STEP 7 Prof. V19,
floating license download¹⁾**

Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool> Consignee email address required for delivery

6ES7822-1AE23-0YA5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Overview

- The CPU for applications with high requirements for availability, very high requirements for program scope and networking, and very high requirements for processing speed.
- High processing speed for binary and floating-point arithmetic
- Used as central controller with distributed I/O
- PROFINET IO RT interface with 2-port switch
- Additional PROFINET interface with separate IP address
- PROFINET IO controller for operating distributed I/O on PROFINET

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data**Article No.**

SIMATIC S7-1500H, CPU 1517H-3 PN Central processing unit with 2 MB work memory for program and 8 MB for data, 1st interface: PROFINET RT with 2-port switch, 2nd interface: PROFINET, 3rd/4th interface: H-SYNC, SIMATIC Memory Card required	6ES7517-3HP00-0AB0
SIMATIC S7-1500H, CPU 1517H system bundle consisting of: 2 x CPU 1517H-3 PN (6ES7517-3HP00-0AB0) 4 sync modules up to 10 m (6ES7960-1CB00-0AA5), 2 x sync cables 1 m (6ES7960-1BB00-5AA5), without memory card	6ES7500-0HP00-0AB0
Accessories	
Synchronization modules	
SIMATIC S7-1500H synchronization module for patch cables Up to 10 m	6ES7960-1CB00-0AA5
SIMATIC S7-1500H synchronization module for fiber-optic cables Up to 10 km, fiber category OS1 or OS2, LC connector type	6ES7960-1FB00-0AA5
SIMATIC S7-1500H synchronization module for fiber-optic cables From 8 km to 40 km, fiber category OS2, connector type LC	6ES7960-1FE00-0AA5
FOC synchronization connecting cables FOC for S7-1500H	
SIMATIC S7-1500H sync fiber-optic connecting cable 1 m	6ES7960-1BB00-5AA5
SIMATIC S7-1500H sync fiber-optic connecting cable 2 m	6ES7960-1BC00-5AA5
SIMATIC S7-1500H sync fiber-optic connecting cable 10 m	6ES7960-1CB00-5AA5
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Redundant CPUs

CPU 1517H-3 PN

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500 mounting rail		IE FC RJ45 plugs	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
Load current supply		Display	
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	SIMATIC S7-1500, spare part display For S7-1500 CPUs with 70 mm or 175 mm width	6ES7591-1BA02-0AA0
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00		
Power supply connector			
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		

Ordering data	Article No.	Article No.
<p>STEP 7 Professional V19 (required for S7-1500R/H)</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement: Windows 10 (64-bit)</p> <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H2 • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC • Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>SIMATIC STEP 7 Prof. V19, floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p> <p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p> <p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	6ES7822-1AE23-0YA5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Redundant CPUs

CPU 1518HF-4 PN

Overview



- The CPU for applications with high availability requirements, also in connection with functional safety requirements
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PLe according to ISO 13849
- A very large program data memory enables the realization of extensive applications.
- High processing speed for binary and floating-point arithmetic
- Used as central PLC with distributed I/O
- Supports PROFIsafe in distributed configurations
- PROFINET IO RT interface with 2-port switch
- Two additional PROFINET interfaces with separate IP addresses
- PROFINET IO controller for operating distributed I/O on PROFINET

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data

Article No.

SIMATIC S7-1500H, CPU 1518HF-4 PN Central processing unit with 9 MB work memory for program and 60 MB for data, 1st interface: PROFINET RT with 2-port switch, 2nd interface: PROFINET, 3rd interface: PROFINET, 4th/5th interface: H-SYNC, SIMATIC Memory Card required	6ES7518-4JP00-0AB0
SIMATIC S7-1500HF, CPU 1518HF system bundle Consisting of: 2 x CPU 1518HF-4 PN (6ES7518-4JP00-0AB0), 4 sync modules up to 10 m (6ES7960-1CB00-0AA5), 2 x sync cables 1 m (6ES7960-1BB00-5AA5), without memory card	6ES7500-0JP00-0AB0
Accessories	
Synchronization modules	
SIMATIC S7-1500H synchronization module for patch cables up to 10 m	6ES7960-1CB00-0AA5
SIMATIC S7-1500H synchronization module for fiber-optic cables up to 10 km Fiber category OS1 or OS2, connector type LC	6ES7960-1FB00-0AA5
SIMATIC S7-1500H synchronization module for fiber-optic cables from 8 km to 40 km Fiber category OS2, connector type LC	6ES7960-1FE00-0AA5
FOC synchronization connecting cables FOC for S7-1500H	
SIMATIC S7-1500H sync fiber-optic connecting cable 1 m	6ES7960-1BB00-5AA5
SIMATIC S7-1500H sync fiber-optic connecting cable 2 m	6ES7960-1BC00-5AA5
SIMATIC S7-1500H sync fiber-optic connecting cable 10 m	6ES7960-1CB00-5AA5
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0

Ordering data	Article No.	Article No.
SIMATIC S7-1500 mounting rail		IE FC RJ45 plugs
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.
Load current supply		SIMATIC S7-1500, spare part display For S7-1500 CPUs with 70 mm or 175 mm width
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	6GK1901-1GA00
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	6ES7591-1BA02-0AA0
Power supply connector		
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0	

SIMATIC S7-1500 Advanced Controllers

Central processing units
Redundant CPUs

CPU 1518HF-4 PN**Ordering data****Article No.****Article No.****STEP 7 Professional V19**

Target system:

SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included,
fr, sp, it, ru, jp, kr as download

**SIMATIC STEP 7 Prof. V19;
floating license****6ES7822-1AA23-0YA5**

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>

**SIMATIC STEP 7 Prof. V19,
floating license download¹⁾****6ES7822-1AE23-0YA5**

Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>
Consignee email address required for delivery

**SIMATIC Manual Collection
on DVD, 5 languages****6ES7998-8XC01-8YE0**

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

**SIMATIC Manual Collection
on DVD, 5 languages****6ES7998-8XC01-8YE2**

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7513-1RM03-0AB0 CPU 1513R-1 PN, 600KB program/2,5MB data	6ES7515-2RN03-0AB0 CPU 1515R-2 PN, 1MB program/4,5MB data	6ES7517-3HP00-0AB0 CPU 1517H-3 PN, 2MB program/8MB data	6ES7518-4JP00-0AB0 CPU 1518HF-4 PN, 9MB program/60MB data
General information				
Product type designation	CPU 1513R-1 PN	CPU 1515R-2 PN	CPU 1517H-3 PN	CPU 1518HF-4PN
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V19 (FW V3.1) / V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7513-1RL00-0AB0	V19 (FW V3.1) / V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7515-2RM00-0AB0	V19 (FW V3.1) / V15.1 (FW V2.6) or higher	V19 (FW V3.1) / V17 (FW V2.9) or higher
Display				
Screen diagonal [cm]	3.45 cm	6.1 cm	6.1 cm	6.1 cm
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V
Memory				
Work memory				
• integrated (for program)	600 kbyte	1 Mbyte	2 Mbyte	9 Mbyte
• integrated (for data)	2.5 Mbyte	4.5 Mbyte	8 Mbyte	60 Mbyte
Load memory				
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte	32 Gbyte	32 Gbyte	32 Gbyte
CPU processing times				
for bit operations, typ.	50 ns	20 ns	4 ns	4 ns
for word operations, typ.	64 ns	24 ns	6 ns	6 ns
for fixed point arithmetic, typ.	85 ns	32 ns	6 ns	6 ns
for floating point arithmetic, typ.	340 ns	128 ns	24 ns	24 ns
Counters, timers and their retentivity				
S7 counter				
• Number	2 048	2 048	2 048	2 048
IEC counter				
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times				
• Number	2 048	2 048	2 048	2 048
IEC timer				
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity				
Flag				
• Size, max.	16 kbyte	16 kbyte	16 kbyte	16 kbyte
Address area				
I/O address area				
• Inputs	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image
Time of day				
Clock				
• Type	Hardware clock	Hardware clock	Hardware clock	Hardware clock
1. Interface				
Interface types				
• RJ 45 (Ethernet)	Yes; X1	Yes; X1	Yes; X1	Yes; X1
• Number of ports	2	2	2	2
• integrated switch	Yes	Yes	Yes	Yes
Protocols				
• IP protocol	Yes; IPv4	Yes; IPv4	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes	Yes	Yes
• PROFINET IO Device	No	No	No	No
• SIMATIC communication	Yes; Only Server	Yes; Only Server	Yes; Only Server	Yes; Only Server
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes	Yes
• Media redundancy	Yes	Yes	Yes	Yes

SIMATIC S7-1500 Advanced Controllers

Central processing units
Redundant CPUs

Technical specifications

Technical specifications

Article number	6ES7513-1RM03-0AB0 CPU 1513R-1 PN, 600KB program/2,5MB data	6ES7515-2RN03-0AB0 CPU 1515R-2 PN, 1MB program/4,5MB data	6ES7517-3HP00-0AB0 CPU 1517H-3 PN, 2MB program/8MB data	6ES7518-4JP00-0AB0 CPU 1518HF-4 PN, 9MB program/60MB data
PROFINET IO Controller				
Services				
- Isochronous mode	No	No	No	No
- IRT	No	No	No	No
- PROFinergy	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Number of connectable IO Devices, max.	64	64	256	256
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1	1	1	1
2. Interface				
Interface types				
• RJ 45 (Ethernet)		Yes; X2	Yes; X2	Yes; X2
• Number of ports		1	1	1
• integrated switch		No	No	No
Protocols				
• IP protocol		Yes; IPv4	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller		No	No	No
• PROFINET IO Device		No	No	No
• SIMATIC communication		Yes; Only Server	Yes; Only Server	Yes; Only Server
• Open IE communication		Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server		Yes	Yes	Yes
• Media redundancy		No	No	No
3. Interface				
Interface type			Pluggable synchronization submodule (FO)	
Plug-in interface modules			Synchronization module 6ES7960-1CB00-0AA5, 6ES7960-1FB00-0AA5 or 6ES7 960-1FE00-0AA5	
Interface types				
• RJ 45 (Ethernet)				Yes; X3
• Number of ports				1
• integrated switch				No
Protocols				
• IP protocol				Yes; IPv4
• SIMATIC communication				Yes; Only Server
• Open IE communication				Yes; Optionally also encrypted
• Web server				Yes
4. Interface				
Interface type			Pluggable synchronization submodule (FO)	Pluggable synchronization submodule (FO)
Plug-in interface modules			Synchronization module 6ES7960-1CB00-0AA5, 6ES7960-1FB00-0AA5 or 6ES7960-1FE00-0AA5	Synchronization module 6ES7960-1CB00-0AA5, 6ES7960-1FB00-0AA5 or 6ES7960-1FE00-0AA5
5. Interface				
Interface type				Pluggable synchronization submodule (FO)
Plug-in interface modules				Synchronization module 6ES7960-1CB00-0AA5, 6ES7960-1FB00-0AA5 or 6ES7960-1FE00-0AA5

Technical specifications

Article number	6ES7513-1RM03-0AB0 CPU 1513R-1 PN, 600KB program/2,5MB data	6ES7515-2RN03-0AB0 CPU 1515R-2 PN, 1MB program/4,5MB data	6ES7517-3HP00-0AB0 CPU 1517H-3 PN, 2MB program/8MB data	6ES7518-4JP00-0AB0 CPU 1518HF-4 PN, 9MB program/60MB data
Protocols				
Number of connections				
• Number of connections, max.	128; via integrated interfaces of the CPU and connected CPs	256; via integrated interfaces of the CPU and connected CPs	320; via integrated interfaces of the CPU and connected CPs	384; via integrated interfaces of the CPU and connected CPs
Redundancy mode				
Media redundancy				
- Media redundancy				only via 1st interface (X1)
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	No	No	No	No
- Switchover time on line break, typ.	200 ms; PROFINET MRP	200 ms; PROFINET MRP	200 ms; PROFINET MRP	200 ms; PROFINET MRP
- Number of stations in the ring, max.	50; Only 16 are recommended, however	50; Only 16 are recommended, however	50	50
SIMATIC communication				
• S7 routing	Yes	Yes	Yes	Yes
OPC UA				
• OPC UA Client	No	No	No	No
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space
• Alarms and Conditions	No	No	No	No
Supported technology objects				
Motion Control Controller	No	No	No	No
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring	Yes	Yes	Yes	Yes
Standards, approvals, certificates				
Highest safety class achievable in safety mode				
Probability of failure (for service life of 20 years and repair time of 100 hours)				
- Low demand mode: PFDavg in accordance with SIL3				< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3				< 1.00E-09
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C; No condensation	-30 °C; No condensation	0 °C	0 °C
• horizontal installation, max.	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	-30 °C; No condensation	-30 °C; No condensation	0 °C	0 °C
• vertical installation, max.	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual

SIMATIC S7-1500 Advanced Controllers

Central processing units
Redundant CPUs

Technical specifications

Technical specifications

Article number	6ES7513-1RM03-0AB0 CPU 1513R-1 PN, 600KB program/2,5MB data	6ES7515-2RN03-0AB0 CPU 1515R-2 PN, 1MB program/4,5MB data	6ES7517-3HP00-0AB0 CPU 1517H-3 PN, 2MB program/8MB data	6ES7518-4JP00-0AB0 CPU 1518HF-4 PN, 9MB program/60MB data
configuration / header				
configuration / programming / header				
Programming language				
- LAD	Yes	Yes	Yes	Yes; incl. failsafe
- FBD	Yes	Yes	Yes	Yes; incl. failsafe
- STL	Yes	Yes	Yes	Yes
- SCL	Yes	Yes	Yes	Yes
- CFC	No	No	No	No
- GRAPH	Yes	Yes	Yes	Yes
Know-how protection				
• User program protection/ password protection	Yes	Yes	Yes	Yes
• Copy protection	No	No	No	No
• Block protection	Yes	Yes	Yes	Yes
Access protection				
• protection of confidential configuration data	Yes	Yes	Yes	Yes
• Password for display	Yes	Yes	Yes	Yes
• Protection level: Write protection	Yes	Yes	Yes	Yes
• Protection level: Read/write protection	Yes	Yes	Yes	Yes
• Protection level: Write protection for Failsafe		No	No	Yes
• Protection level: Complete protection	Yes	Yes	Yes	Yes
• User administration	Yes; device-wide	Yes	Yes	Yes
Dimensions				
Width	35 mm	70 mm	210 mm	210 mm
Height	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm
Weights				
Weight, approx.	336 g	456 g	2 094 g; Interface modules: 2x 18 g	2 116 g

Overview

- The CPU for applications with medium/high requirements for program scope, networking and processing speed, and with increased requirements for availability.
- High processing speed for binary and floating-point arithmetic
- Used as central PLC with distributed I/O
- PROFINET IO RT interface with 2-port switch
- Additional PROFINET interface with separate IP address
- PROFINET IO controller for operating distributed I/O on PROFINET

Note:

SIMATIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS CPU 1515R-2 PN****6AG1515-2RM00-7AB0**

(Extended temperature range and exposure to environmental substances)

SIPLUS S7-1500R CPU, 500 KB work memory for program, 3 MB for data, PROFINET RT interface with 2-port switch, PROFINET interface; SIMATIC Memory Card required

Accessories**System power supply**

(Extended temperature range and exposure to environmental substances)

For supplying the backplane bus of the S7-1500 Controller

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0**Load current supply**

(Extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8A

6AG1333-4BA00-7AA0**Replacement display for CPU, front flap****6AG1591-1BA02-2AA0****Other accessories**

See SIMATIC S7-1500, CPU 1515R-2 PN, page 4/106

SIMATIC S7-1500 Advanced Controllers

Central processing units
SIPLUS redundant CPUs

SIPLUS CPU 1517H-3 PN

Overview



- The CPU for applications with high requirements for availability, very high requirements for program scope and networking, and very high requirements for processing speed.
- High processing speed for binary and floating-point arithmetic
- Used as central controller with distributed I/O
- PROFINET IO RT interface with 2-port switch
- Additional PROFINET interface with separate IP address
- PROFINET IO controller for operating distributed I/O on PROFINET

Note:

SIMATIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1517H-3 PN

6AG1517-3HP00-4AB0

(Extended temperature range and exposure to environmental substances)

SIPLUS S7-1500H CPU,
2 MB work memory for program,
8 MB for data,
1st interface
PROFINET RT with 2-port switch,
2nd interface PROFINET RT,
3rd interface synchronization,
command times for bit operations
4 ns;
SIMATIC Memory Card required

SIPLUS S7-1500 CPU 1517H System Bundle

6AG1500-0HP00-4AB0

(Extended temperature range and exposure to environmental substances)

Comprising
2 SIPLUS CPU 1517H-3 PN,
4 SIPLUS synchronization modules
up to 10 m, 2 FOC synchronization
cables (1 m); without memory card

Accessories

SIPLUS S7-1500 cooling fan 210 mm

6AG1593-0AB00-7AA0

(Extended temperature range and exposure to environmental substances)

Fan module for the operation of a SIPLUS S7-1500 CPU at locations with an ambient temperature of up to +70 °C

Synchronization modules

(Extended temperature range and exposure to environmental substances)

- for patch cable FOC up to 10 m
- for routing cable FOC up to 10 km

6AG1960-1CB00-4AA5

6AG1960-1FB00-4AA5

System power supply

(Extended temperature range and exposure to environmental substances)

For supplying the backplane bus of the S7-1500 Controller

24 V DC input voltage,
power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage,
power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage,
power 60 W

6AG1507-0RA00-7AB0

Load current supply

(Extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8 A

6AG1333-4BA00-7AA0

Replacement display for CPU, front flap

6AG1591-1BA02-2AA0

Other accessories

See SIMATIC S7-1500, CPU 1517H-3 PN, page 4/109

Overview



- The CPU for applications with high availability requirements, also in connection with functional safety requirements.
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- A very large program data memory enables the realization of extensive applications
- High processing speed for binary and floating-point arithmetic
- Used as central controller with distributed I/O
- Supports PROFIsafe in distributed configurations
- PROFINET IO RT interface with 2-port switch
- Two additional PROFINET interfaces with separate IP addresses
- PROFINET IO controller for operating distributed I/O on PROFINET

Note:

SIMATIC Memory Card required for operation of the CPU.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1518HF-4 PN**6AG1518-4JP00-4AB0**

With conformal coating

CPU with 9 MB work memory for program and 60 MB work memory for data,
1st interface: PROFINET RT with 2-port switch,
2nd interface: PROFINET,
3rd interface: PROFINET,
4th/5th interface: H-SYNC;
SIMATIC Memory Card required

Accessories**SIPLUS S7-1500 cooling fan 210 mm****6AG1593-0AB00-7AA0**

(Extended temperature range)

Fan module for the operation of a SIPLUS S7-1500 CPU at locations with an ambient temperature of up to +70 °C

System power supply

(Extended temperature range and exposure to environmental substances)

For supplying the backplane bus of the S7-1500 Controller

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0**Load current supply**

(Extended temperature range and exposure to environmental substances)

24 V DC/3 A

6AG1332-4BA00-7AA0

24 V DC/8 A

6AG1333-4BA00-7AA0**Replacement display for CPU, front flap****6AG1591-1BA02-2AA0****Other accessories**

See SIMATIC S7-1500, CPU 1515R-2 PN, page 4/112

SIMATIC S7-1500 Advanced Controllers

Central processing units
SIPLUS redundant CPUs

Technical specifications

Technical specifications

Article number	6AG1515-2RM00-7AB0	6AG1517-3HP00-4AB0	6AG1518-4JP00-4AB0
Based on	6ES7515-2RM00-0AB0 SIPLUS S7-1500 CPU 1515R-2 PN	6ES7517-3HP00-0AB0 SIPLUS S7-1500 CPU 1517H-3 PN	6ES7518-4JP00-0AB0 SIPLUS S7-1500 CPU 1518HF-4 PN
Ambient conditions			
Ambient temperature during operation			
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -20 °C	0 °C; = Tmin	0 °C
• horizontal installation, max.	70 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; = Tmax; display: 50 °C, the display is switched off at an operating temperature of typically 50 °C	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -20 °C	0 °C; = Tmin	0 °C
• vertical installation, max.	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
• Ambient air temperature-barometric pressure-altitude	Restrictions for installation altitudes > 2 000 m, see entry ID: 109763260	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

Technical specifications

Article number	6AG1515-2RM00-7AB0	6AG1517-3HP00-4AB0	6AG1518-4JP00-4AB0
Based on	6ES7515-2RM00-0AB0 SIPLUS S7-1500 CPU 1515R-2 PN	6ES7517-3HP00-0AB0 SIPLUS S7-1500 CPU 1517H-3 PN	6ES7518-4JP00-0AB0 SIPLUS S7-1500 CPU 1518HF-4 PN
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)		Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)		Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1511T-1 PN

Overview



- Entry-level CPU in the S7-1500T Controller product range
- Suitable for applications with medium requirements for program scope and processing speed
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO Controller
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes.

Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data

Article No.

SIMATIC S7-1500T, CPU 1511T-1 PN Central processing unit with 450 KB work memory for program and 1.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 25 ns bit performance, SIMATIC Memory Card required Observe the approvals and certificate according to entry 109816881 at https://support.industry.siemens.com!	6ES7511-1TL03-0AB0
Accessories	
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0
SIMATIC S7-1500 mounting rail	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0

Ordering data	Article No.	Article No.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	IE FC RJ45 plugs
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.
System power supply		Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.
Load current supply		SIMATIC S7-1500, spare part, display module 35 mm for S7-1500 CPUs
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	
Power supply connector		
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0	

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1511T-1 PN**Ordering data****Article No.****Article No.****STEP 7 Professional V19**

Target system:

SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included,
fr, sp, it, ru, jp, kr as download

**SIMATIC STEP 7 Prof. V19;
floating license**

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>

6ES7822-1AA23-0YA5**SIMATIC STEP 7 Prof. V19,
floating license download¹⁾**

Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>
Consignee email address required for delivery

6ES7822-1AE23-0YA5**SIMATIC Manual Collection
on DVD, 5 languages**

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0**SIMATIC Manual Collection
on DVD, 5 languages**

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Overview



- Entry-level CPU in the S7-1500T Controller product range
- Suitable for standard and fail-safe applications with medium requirements for program scope and processing speed
- Used as central controller in production lines with central and distributed I/O
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO Controller
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes.

Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-1500T, CPU 1511TF-1 PN Central processing unit with 450 KB work memory for program and 1.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 25 ns bit performance, SIMATIC Memory Card required Observe the approvals and certificate according to entry 109816881 at https://support.industry.siemens.com/ !	6ES7511-1UL03-0AB0
Accessories	
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0
SIMATIC S7-1500 mounting rail	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1511TF-1 PN

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	IE FC RJ45 plugs	
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
System power supply		Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
Load current supply		SIMATIC S7-1500, spare part, display module 35 mm for S7-1500 CPUs	6ES7591-1AB00-0AA0
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	SIMATIC S7-1500, spare part, cover flap 35 mm with cutout for displays and display control keys, for S7-1500 CPUs, 5 units per packing unit	6ES7591-4AB00-0AA0
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00		
Power supply connector			
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		

Ordering data	Article No.	Article No.
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement: Windows 10 (64-bit)</p> <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSB Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200ISP, ET 200pro and ET 200eco I/O</p> <p>Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB</p>
<p>SIMATIC STEP 7 Prof. V19, floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery</p>
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1515T-2 PN

Overview



- The CPU for applications with medium to high requirements regarding program/data storage in the S7-1500T Controller product range
- Medium to high processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO Controller
- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes. Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-1500T, CPU 1515T-2 PN Central processing unit with 1.5 MB work memory for program and 4.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 6 ns bit performance, SIMATIC Memory Card required Observe approvals and certificates according to entry 109816881 at https://support.industry.siemens.com/ !	6ES7515-2TN03-0AB0
Accessories	
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0
SIMATIC S7-1500 mounting rail	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	IE FC RJ45 plugs	
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
System power supply		Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FastConnect stripping tool, Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
Load current supply		SIMATIC S7-1500, spare part, display module 70 mm for S7-1500 CPUs	6ES7591-1BB00-0AA0
SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	SIMATIC S7-1500, spare part, cover flap 70 mm with cutout for displays and display control keys, for S7-1500 CPUs, 5 units per packing unit	6ES7591-4BB00-0AA0
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00		
Power supply connector			
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1515T-2 PN

Ordering data

Article No.

Article No.

STEP 7 Professional V19

Target system:

SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
 - Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included,
fr, sp, it, ru, jp, kr as download

SIMATIC STEP 7 Prof. V19; floating license

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>

6ES7822-1AA23-0YA5

SIMATIC STEP 7 Prof. V19, floating license download¹⁾

Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>
Consignee email address required for delivery

6ES7822-1AE23-0YA5

SIMATIC Manual Collection on DVD, 5 languages

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Overview



- The CPU for standard and fail-safe applications with medium to high requirements regarding program/data storage in the S7-1500T Controller product range
- Medium to high processing speed for binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO Controller
- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Isochronous mode centrally and distributed
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes. Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-1500T, CPU 1515TF-2 PN Central processing unit with 1.5 MB work memory for program and 4.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 6 ns bit performance, SIMATIC Memory Card required Observe approvals and certificates according to entry 109816881 at https://support.industry.siemens.com/ !	6ES7515-2UN03-0AB0
Accessories	
SIMATIC Memory Card	
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0
SIMATIC S7-1500 mounting rail	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1515TF-2 PN

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	IE FC RJ45 plugs Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
System power supply SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
Load current supply SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00	SIMATIC S7-1500, spare part, display module 70 mm for S7-1500 CPUs	6ES7591-1BB00-0AA0
SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00	SIMATIC S7-1500, spare part, cover flap 70 mm with cutout for displays and display control keys, for S7-1500 CPUs, 5 units per packing unit	6ES7591-4BB00-0AA0
Power supply connector Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0		

Ordering data	Article No.	Article No.
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement: Windows 10 (64-bit)</p> <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H Windows 10 Enterprise 2016 LTSB Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200ISP, ET 200pro and ET 200eco</p> <p>Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB</p>
<p>SIMATIC STEP 7 Prof. V19, floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery</p>
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>

¹⁾ Up-to-date information and download availability can be found at <https://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1516T-3 PN/DP

Overview



- The CPU with a large program and data memory in the S7-1500 Controller product range for applications with high requirements regarding program scope and networking.
- High processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or third-party PROFINET IO Controller.

- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- PROFIBUS DP master interface
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes.

Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.

User-defined kinematics are also supported.
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500T, CPU 1516T-3 PN/DP Central processing unit with 3 MB work memory for program and 7.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface, Ethernet, 3rd interface, PROFIBUS, 6 ns bit performance, SIMATIC Memory Card required	6ES7516-3TN00-0AB0	SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0
Accessories		System power supply	
SIMATIC Memory Card		SIMATIC S7-1500, system power supply PS 25 W 24 V DC	6ES7505-0KA00-0AB0
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0	Supplies operating voltage to the backplane bus of the S7-1500	
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0	SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC	6ES7505-0RA00-0AB0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0	Supplies operating voltage to the backplane bus of the S7-1500	
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0	SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF	6ES7505-0RB00-0AB0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0	Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0	SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC	6ES7507-0RA00-0AB0
SIMATIC S7-1500 mounting rail		Supplies operating voltage to the backplane bus of the S7-1500	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0	SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0	Load current supply	
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0	SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0	SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0	Power supply connector	
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0
		PROFIBUS FastConnect RS485 bus connector with 90° cable outlet	
		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1516T-3 PN/DP

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0	IE FC RJ45 plugs	
PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
PROFIBUS FC robust bus cable with PUR protective jacket For use environments subject to harsh chemicals and mechanical stress, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0JH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
PROFIBUS FC flexible cable GP 2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1831-2K	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
PROFIBUS FC trailing cable		Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3EH10	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1831-2L	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
PROFIBUS FC food bus cable with PE protective jacket For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0GH10	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
PROFIBUS FC underground cable Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3FH10	SIMATIC S7-1500, spare part display For S7-1500 CPUs with 70 mm or 175 mm width	6ES7591-1BA02-0AA0
PROFIBUS FC FRNC cable GP Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0LH10	SIMATIC S7-1500 spare part, front cover For DP interface of the CPU 1518-4 PN/DP	6ES7591-8AA00-0AA0
PROFIBUS FastConnect stripping tool Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.	6GK1905-6AA00		

Ordering data	Article No.	Article No.	
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement: Windows 10 (64-bit)</p> <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>SIMATIC STEP 7 Prof. V19, floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>	6ES7998-8XC01-8YE0
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1516TF-3 PN/DP

Overview



- The CPU with a large program and data memory in the S7-1500 Controller product range for standard and fail-safe applications with high requirements regarding program scope and networking.
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- High processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO Controller

- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- PROFIBUS DP master interface
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes.
 - Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.
 - User-defined kinematics are also supported.
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500TF, CPU 1516TF-3 PN/DP Central processing unit with 3 MB work memory for program and 7.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface, Ethernet, 3rd interface, PROFIBUS, 6 ns bit performance, SIMATIC Memory Card required	6ES7516-3UN00-0AB0	SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0
Accessories		System power supply	
SIMATIC Memory Card		SIMATIC S7-1500, system power supply PS 25 W 24 V DC	6ES7505-0KA00-0AB0
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0	Supplies operating voltage to the backplane bus of the S7-1500	
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0	SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC	6ES7505-0RA00-0AB0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0	Supplies operating voltage to the backplane bus of the S7-1500	
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0	SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF	6ES7505-0RB00-0AB0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0	Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0	SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC	6ES7507-0RA00-0AB0
SIMATIC S7-1500 mounting rail		Supplies operating voltage to the backplane bus of the S7-1500	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0	SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0	Load current supply	
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0	SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0	SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Including grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0	Power supply connector	
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays, for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0	Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0
		PROFIBUS FastConnect RS485 bus connector with 90° cable outlet	
		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1516TF-3 PN/DP

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0	IE FC RJ45 plugs	
PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
PROFIBUS FC robust bus cable with PUR protective jacket For use environments subject to harsh chemicals and mechanical stress, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0JH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
PROFIBUS FC flexible cable GP 2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1831-2K	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
PROFIBUS FC trailing cable		Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3EH10	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1831-2L	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
PROFIBUS FC food bus cable with PE protective jacket For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0GH10	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
PROFIBUS FC underground cable Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3FH10	SIMATIC S7-1500, spare part display For S7-1500 CPUs with 70 mm or 175 mm width	6ES7591-1BA02-0AA0
PROFIBUS FC FRNC cable GP Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0LH10	SIMATIC S7-1500 spare part, front cover For DP interface of the CPU 1518-4 PN/DP	6ES7591-8AA00-0AA0
PROFIBUS FastConnect stripping tool Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.	6GK1905-6AA00		

Ordering data	Article No.	Article No.
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement: Windows 10 (64-bit)</p> <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200ISP, ET 200pro and ET 200eco I/O</p> <p>Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>
<p>SIMATIC STEP 7 Prof. V19; floating license</p> <p>Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB</p>
<p>SIMATIC STEP 7 Prof. V19, floating license download¹⁾</p> <p>Engineering software in the TIA Portal; software, documentation and license key for downloading; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery</p> <p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p> <p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1517T-3 PN/DP

Overview



- The CPU with a very large program and data memory in the S7-1500 Controller product range for applications with high requirements regarding program scope and networking.
- High processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or third-party PROFINET IO Controller.

- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- PROFIBUS DP master interface
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications.
- Central and distributed isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes. Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA. User-defined kinematics are also supported.
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500T, CPU 1517T-3 PN/DP Central processing unit with 3 MB work memory for program and 8 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface, Ethernet, 3rd interface, PROFIBUS, 2 ns bit performance, SIMATIC Memory Card required	6ES7517-3TP00-0AB0	SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0
Accessories		System power supply	
SIMATIC Memory Card		SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0	SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0	SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0	SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0	SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0	Load current supply	
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0	SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00
SIMATIC S7-1500 mounting rail		SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0	Power supply connector	
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0	Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0	PROFIBUS FastConnect RS485 bus connector with 90° cable outlet	
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0		
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0		

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1517T-3 PN/DP

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0	IE FC RJ45 plugs	
PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
PROFIBUS FC robust bus cable with PUR protective jacket for use in environments subject to harsh chemicals and mechanical stress 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0JH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
PROFIBUS FC flexible cable GP 2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1831-2K	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
PROFIBUS FC trailing cable		Industrial Ethernet FC TP standard cable GP 2x2 (PROFINET type A), TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
PROFIBUS FC trailing cable PROFIBUS trailing cable, max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3EH10	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
PROFIBUS FC trailing cable PROFIBUS trailing cable, max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1831-2L	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
PROFIBUS FC food bus cable with PE protective jacket For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0GH10	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
PROFIBUS FC underground cable Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3FH10	SIMATIC S7-1500, spare part display For S7-1500 CPUs with 70 mm or 175 mm width	6ES7591-1BA02-0AA0
PROFIBUS FC FRNC cable GP Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0LH10	SIMATIC S7-1500 spare part, front cover For DP interface of the CPU 1518-4 PN/DP	6ES7591-8AA00-0AA0
PROFIBUS FastConnect stripping tool Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.	6GK1905-6AA00		

Ordering data	Article No.	Article No.	Article No.
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement: Windows 10 (64-bit)</p> <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>SIMATIC STEP 7 Prof. V19, floating license download; Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾</p> <p>Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5
<p>SIMATIC STEP 7 Prof. V19; floating license; Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive</p> <p>Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>	6ES7998-8XC01-8YE0
		<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1517TF-3 PN/DP

Overview



- The CPU with a very large program and data memory in the S7-1500 Controller product range for fail-safe applications with high requirements regarding program scope and networking.
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- High processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or third-party PROFINET IO Controller.

- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- PROFIBUS DP master interface
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications.
- Central and distributed isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes. Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA. User-defined kinematics are also supported.
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data	Article No.		Article No.
SIMATIC S7-1500TF, CPU 1517TF-3 PN/DP Central processing unit with 3 MB work memory for program and 8 MB for data 1st interface: PROFINET IRT with 2-port switch 2nd interface, Ethernet 3rd interface, PROFIBUS 2 ns bit performance, SIMATIC Memory Card required	6ES7517-3UP00-0AB0		
Accessories			
SIMATIC Memory Card			
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0		
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0		
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0		
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0		
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0		
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0		
SIMATIC S7-1500 mounting rail			
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0		
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0		
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0		
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0		
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0		
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0		
		SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0
		System power supply	
		SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0
		SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0
		SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0
		SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0
		SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0
		Load current supply	
		SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A	6EP1332-4BA00
		SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A	6EP1333-4BA00
		Power supply connector	
		Connector, female, 2x2-pole, ET 200SP, interface module, KP32F PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit	6ES7193-4JB00-0AA0
		PROFIBUS FastConnect RS485 bus connector with 90° cable outlet	
		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method Without PG socket	6ES7972-0BA70-0XA0

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1517TF-3 PN/DP

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method With PG socket	6ES7972-0BB70-0XA0	IE FC RJ45 plugs	
PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
PROFIBUS FC robust bus cable with PUR protective jacket For use environments subject to harsh chemicals and mechanical stress, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0JH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
PROFIBUS FC flexible cable GP 2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1831-2K	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
PROFIBUS FC trailing cable		Industrial Ethernet FC TP standard cable GP 2x2 (PROFINET type A), TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3EH10	Industrial Ethernet FC TP trailing cable 2x2 (PROFINET type C), TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
PROFIBUS FC trailing cable, PROFIBUS trailing cable Max. acceleration 4 m/s ² , at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1831-2L	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
PROFIBUS FC food bus cable with PE protective jacket For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0GH10	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
PROFIBUS FC underground cable Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-3FH10	SIMATIC S7-1500, spare part display For S7-1500 CPUs with 70 mm or 175 mm width	6ES7591-1BA02-0AA0
PROFIBUS FC FRNC cable GP Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.	6XV1830-0LH10	SIMATIC S7-1500 spare part, front cover For DP interface of the CPU 1518-4 PN/DP	6ES7591-8AA00-0AA0
PROFIBUS FastConnect stripping tool Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.	6GK1905-6AA00		

Ordering data	Article No.	Article No.
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement: Windows 10 (64-bit)</p> <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200ISP, ET 200pro and ET 200eco I/O</p> <p>Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>
<p>SIMATIC STEP 7 Prof. V19; floating license; Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive</p> <p>Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB</p>
<p>SIMATIC STEP 7 Prof. V19; floating license download; Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾</p> <p>Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery</p> <p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p> <p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1518T-4 PN/DP

Overview



- S7-1500T Motion Control KinPlus
With "S7-1500T Motion Control KinPlus", kinematics with up to 6 interpolating axes can be controlled.
 - Predefined kinematics:
 - Cartesian portal 3D with 2 orientations,
 - Delta-Picker 3D with 2 orientations,
 - 6-axis articulated arm with central hand.
 - User-defined kinematics 3D with 3 orientations
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

- The CPU with a very large program and data memory in the S7-1500 Controller product range for applications with high requirements regarding program scope and networking.
- High processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO Controller
- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- PROFIBUS DP master interface
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes.
Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.
User-defined kinematics are also supported.

Ordering data	Article No.	Article No.
SIMATIC S7-1500T, CPU 1518T-4 PN/DP Central processing unit with 9 MB work memory for program and 60 MB for data 1st interface: PROFINET IRT with 2-port switch 2nd interface: PROFINET RT 3rd interface: PROFINET basic services 4th interface: PROFIBUS 1 ns bit performance, SIMATIC Memory Card required	6ES7518-4TP00-0AB0	SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays
Accessories		SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays
SIMATIC Memory Card		SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0	SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0	System power supply
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0	SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0	SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0	SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0	SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500
S7-1500T Motion Control KinPlus		SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit
S7-1500T Motion Control KinPlus Runtime software Without documentation class A executable under T-CPU 1518 T/TF DriveController 1507D TF Download product Consignee email address required for delivery The SD card 6ES7 954-8LP80-0AA0 or 6ES7 954-8LT80-0AA0 is required for execution	6ES7823-0KE00-1AA0	Load current supply
SIMATIC S7, memory card for S7-1500T Motion Control KinPlus 3.3 V flash, 2 GB	6ES7954-8LP80-0AA0	SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A
SIMATIC S7, memory card for S7-1500T Motion Control KinPlus 3.3 V flash, 32 GB	6ES7954-8LT80-0AA0	SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A
SIMATIC S7-1500 mounting rail		
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0	
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0	
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0	

SIMATIC S7-1500 Advanced ControllersCentral processing units
Technology CPUs**CPU 1518T-4 PN/DP****Ordering data****Article No.****Article No.****Power supply connector****Connector, female, 2x2-pole, ET 200SP, interface module, KP32F**

PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit

6ES7193-4JB00-0AA0

PROFIBUS FastConnect RS485 bus connector with 90° cable outlet

6ES7972-0BA70-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method

Without PG socket

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method

With PG socket

6ES7972-0BB70-0XA0

PROFIBUS FC standard cable GP

2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.

6XV1830-0EH10

PROFIBUS FC robust bus cable with PUR protective jacket

For use environments subject to harsh chemicals and mechanical stress, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1830-0JH10

PROFIBUS FC flexible cable GP

2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.

6XV1831-2K

PROFIBUS FC trailing cable**PROFIBUS FC trailing cable, PROFIBUS trailing cable**Max. acceleration 4 m/s², at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1830-3EH10

PROFIBUS FC trailing cable, PROFIBUS trailing cableMax. acceleration 4 m/s², at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1831-2L

PROFIBUS FC food bus cable with PE protective jacket

For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1830-0GH10

PROFIBUS FC underground cable

Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1830-3FH10

PROFIBUS FC FRNC cable GP

Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

6XV1830-0LH10

PROFIBUS FastConnect stripping tool

Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.

6GK1905-6AA00

IE FC RJ45 plugs**Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet**

1 pack = 1 unit.

6GK1901-1BB10-2AA0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 10 units.

6GK1901-1BB10-2AB0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 50 units.

6GK1901-1BB10-2AE0

Industrial Ethernet FC TP standard cable

GP 2x2 (PROFINET type A), TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.

6XV1840-2AH10

Industrial Ethernet FC TP trailing cable

2x2 (PROFINET type C), TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.

6XV1840-3AH10

Industrial Ethernet FC TP marine cable

TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.

6XV1840-4AH10

Industrial Ethernet FastConnect stripping tool

Stripping tool for fast stripping of insulation from the IE FastConnect cables.

6GK1901-1GA00

SIMATIC S7-1500, spare part display

For S7-1500 CPUs with 70 mm or 175 mm width

6ES7591-1BA02-0AA0

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500 spare part, front cover For DP interface of the CPU 1518-4 PN/DP	6ES7591-8AA00-0AA0	SIMATIC STEP 7 Prof. V19, floating license download; Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾ Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery	6ES7822-1AE23-0YA5
STEP 7 Professional V19 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H2 • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC • Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download	6ES7591-8AA00-0AA0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC STEP 7 Prof. V19; floating license; Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool	6ES7822-1AA23-0YA5	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1518TF-4 PN/DP

Overview



- S7-1500T Motion Control KinPlus
With "S7-1500T Motion Control KinPlus", kinematics with up to 6 interpolating axes can be controlled.
 - Predefined kinematics:
 - Cartesian portal 3D with 2 orientations,
 - Delta-Picker 3D with 2 orientations,
 - 6-axis articulated arm with central hand.
 - User-defined kinematics 3D with 3 orientations
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

- The CPU with a very large program and data memory in the S7-1500 Controller product range for fail-safe applications with high requirements regarding program scope and networking.
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- High processing speed for binary and floating-point arithmetic
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- PROFINET IO IRT interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET.
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or third-party PROFINET IO Controller.
- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- PROFIBUS DP master interface
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Central and distributed isochronous mode on PROFIBUS and PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes.
Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.
User-defined kinematics are also supported.

Ordering data	Article No.	Article No.
SIMATIC S7-1500TF, CPU 1518TF-4 PN/DP Central processing unit with 9 MB work memory for program and 60 MB for data 1st interface: PROFINET IRT with 2-port switch 2nd interface: PROFINET RT 3rd interface: PROFINET basic services 4th interface: PROFIBUS 1 ns bit performance, SIMATIC Memory Card required	6ES7518-4UP00-0AB0	
Accessories		
SIMATIC Memory Card		
SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS 3.3 V Flash, 4 MB	6ES7954-8LC03-0AA0	
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 12 MB	6ES7954-8LE03-0AA0	
SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS 3.3 V Flash, 24 MB	6ES7954-8LF03-0AA0	
SIMATIC S7, memory card for S7-1x00 CPU 3.3 V Flash, 256 MB	6ES7954-8LL03-0AA0	
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0	
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 32 GB	6ES7954-8LT03-0AA0	
S7-1500T Motion Control KinPlus		
S7-1500T Motion Control KinPlus Runtime software Without documentation class A executable under T-CPU 1518 T/TF DriveController 1507D TF download product ¹⁾ Consignee email address required for delivery The SD card 6ES7 954-8LP80-0AA0 or 6ES7 954-8LT80-0AA0 is required for execution	6ES7823-0KE00-1AA0	
SIMATIC S7, memory card for S7-1500T Motion Control KinPlus 3.3 V flash, 2 GB	6ES7954-8LP80-0AA0	
SIMATIC S7, memory card for S7-1500T Motion Control KinPlus 3.3 V flash, 32 GB	6ES7954-8LT80-0AA0	
SIMATIC S7-1500 mounting rail		
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0	
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0	
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0	
		SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays
		SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays
		SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately
		SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit
		System power supply
		SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500
		SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500
		SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU
		SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500
		SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit
		Load current supply
		SIMATIC PM 1507 24 V/3 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/3 A
		SIMATIC PM 1507 24 V/8 A, stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC, output: 24 V DC/8 A

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

CPU 1518TF-4 PN/DP

Ordering data

Article No.

Power supply connector

Connector, female, 2x2-pole, ET 200SP, interface module, KP32F

PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit

6ES7193-4JB00-0AA0

PROFIBUS FastConnect RS485 bus connector with 90° cable outlet

6ES7972-0BA70-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method

Without PG socket

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 72.2 x 36.4 mm (WxHxD), FastConnect insulation displacement method

With PG socket

6ES7972-0BB70-0XA0

PROFIBUS FC standard cable GP

6XV1830-0EH10

2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.

PROFIBUS FC robust bus cable with PUR protective jacket

6XV1830-0JH10

For use environments subject to harsh chemicals and mechanical stress, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

PROFIBUS FC flexible cable GP

6XV1831-2K

2-wire, shielded, special design for fast installation, delivery unit max. 1000 m, minimum order quantity 20 m, sold by the meter.

PROFIBUS FC trailing cable

PROFIBUS FC trailing cable, PROFIBUS trailing cable

6XV1830-3EH10

Max. acceleration 4 m/s², at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.

PROFIBUS FC trailing cable, PROFIBUS trailing cable

6XV1831-2L

Max. acceleration 4 m/s², at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, delivery unit, max. delivery unit 1000 m, minimum order quantity 20 m.

PROFIBUS FC food bus cable with PE protective jacket

6XV1830-0GH10

For use in the food, beverages and tobacco industries, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

PROFIBUS FC underground cable

6XV1830-3FH10

Underground cable, 2-wire shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

Article No.

PROFIBUS FC FRNC cable GP

6XV1830-0LH10

Bus cable flame-retardant and halogen-free bus cable with copolymer sheath, FRNC sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.

PROFIBUS FastConnect stripping tool

6GK1905-6AA00

Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable.

IE FC RJ45 plugs

RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables

IE FC RJ45 plug 180

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 1 unit.

6GK1901-1BB10-2AA0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 10 units.

6GK1901-1BB10-2AB0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet

1 pack = 50 units.

6GK1901-1BB10-2AE0

Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A)

6XV1840-2AH10

TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.

Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C)

6XV1840-3AH10

TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.

Industrial Ethernet FC TP marine cable

6XV1840-4AH10

TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.

Industrial Ethernet FastConnect stripping tool

6GK1901-1GA00

Stripping tool for fast stripping of insulation from the IE FastConnect cables.

Ordering data	Article No.	Article No.
SIMATIC S7-1500, spare part display For S7-1500 CPUs with 70 mm or 175 mm width	6ES7591-1BA02-0AA0	
SIMATIC S7-1500 spare part, front cover For DP interface of the CPU 1518-4 PN/DP	6ES7591-8AA00-0AA0	
STEP 7 Professional V19 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H2 • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC • Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download		STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.
SIMATIC STEP 7 Prof. V19; floating license; Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. ***** For system requirements, see www.siemens.com/compatool	6ES7822-1AA23-0YA5	SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB
SIMATIC STEP 7 Prof. V19, floating license download; Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾ Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery	6ES7822-1AE23-0YA5	SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key for download¹⁾ Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Consignee email address required for delivery
		SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT
		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

Technical specifications**Technical specifications**

Article number	6ES7511-1TL03-0AB0 CPU 1511T-1 PN, 450KB Prog., 1.5MB Data	6ES7515-2TN03-0AB0 CPU 1515T-2 PN, 1.5MB Prog., 4.5MB Data	6ES7517-3TP00-0AB0 CPU 1517T-3 PN/DP, 3MB Prog./8MB Data	6ES7516-3TN00-0AB0 CPU 1516T-3 PN/DP, 3MB Prog./7.5MB Data	6ES7518-4TP00-0AB0 CPU 1518T-4 PN/DP, 9MB Prog., 60MB Data
General information					
Product type designation	CPU 1511T-1 PN	CPU 1515T-2 PN	CPU 1517T-3 PN/DP	CPU 1516T-3 PN/DP	CPU 1518T-4 PN/DP
Engineering with					
• STEP 7 TIA Portal configurable/ integrated from version	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7511-1TK01-0AB0	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7515-2TM01-0AB0	V19 (FW V3.1) / V14 (FW V2.0) or higher	V19 (FW V3.1) / V15 (FW V2.5) or higher	V19 (FW V3.1) / V17 (FW V2.9) or higher
Display					
Screen diagonal [cm]	3.45 cm	6.1 cm	6.1 cm	6.1 cm	6.1 cm
Supply voltage					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Memory					
Work memory					
• integrated (for program)	450 kbyte	1.5 Mbyte	3 Mbyte	3 Mbyte	9 Mbyte
• integrated (for data)	1.5 Mbyte	4.5 Mbyte	8 Mbyte	7.5 Mbyte	60 Mbyte
Load memory					
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte	32 Gbyte	32 Gbyte	32 Gbyte	32 Gbyte
CPU processing times					
for bit operations, typ.	25 ns	6 ns	2 ns	6 ns	1 ns
for word operations, typ.	32 ns	7 ns	3 ns	7 ns	2 ns
for fixed point arithmetic, typ.	42 ns	9 ns	3 ns	9 ns	2 ns
for floating point arithmetic, typ.	170 ns	37 ns	12 ns	37 ns	6 ns
Counters, timers and their retentivity					
S7 counter					
• Number	2 048	2 048	2 048	2 048	2 048
IEC counter					
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times					
• Number	2 048	2 048	2 048	2 048	2 048
IEC timer					
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity					
Flag					
• Size, max.	16 kbyte	16 kbyte	16 kbyte	16 kbyte	16 kbyte
Address area					
I/O address area					
• Inputs	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image
Time of day					
Clock					
• Type	Hardware clock	Hardware clock	Hardware clock	Hardware clock	Hardware clock
1. Interface					
Interface types					
• RJ 45 (Ethernet)	Yes; X1	Yes; X1	Yes; X1	Yes; X1	Yes; X1
• Number of ports	2	2	2	2	2
• integrated switch	Yes	Yes	Yes	Yes	Yes

Technical specifications

Article number	6ES7511-1TL03-0AB0	6ES7515-2TN03-0AB0	6ES7517-3TP00-0AB0	6ES7516-3TN00-0AB0	6ES7518-4TP00-0AB0
	CPU 1511T-1 PN, 450KB Prog., 1.5MB Data	CPU 1515T-2 PN, 1.5MB Prog., 4.5MB Data	CPU 1517T-3 PN/DP, 3MB Prog./8MB Data	CPU 1516T-3 PN/DP, 3MB Prog./7.5MB Data	CPU 1518T-4 PN/DP, 9MB Prog., 60MB Data
Protocols					
• IP protocol	Yes; IPv4	Yes; IPv4	Yes; IPv4	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes	Yes	Yes	Yes
• PROFINET IO Device	Yes	Yes	Yes	Yes	Yes
• SIMATIC communication	Yes	Yes	Yes	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes	Yes	Yes
• Media redundancy	Yes	Yes	Yes	Yes	Yes
PROFINET IO Controller					
Services					
- PG/OP communication	Yes	Yes			
- Isochronous mode	Yes	Yes	Yes	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes	Yes	Yes	Yes	Yes
- PROFlenergy	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-I, PROFIBUS or PROFINET	256; In total, up to 1 000 distributed I/O devices can be connected via AS-I, PROFIBUS or PROFINET	512; In total, up to 1 000 distributed I/O devices can be connected via AS-I, PROFIBUS or PROFINET	256; In total, up to 1 000 distributed I/O devices can be connected via AS-I, PROFIBUS or PROFINET	512; In total, up to 1 000 distributed I/O devices can be connected via AS-I, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64	64	64	64	64
- Number of connectable IO Devices for RT, max.	128	256	512	256	512
- of which in line, max.	128	256	512	256	512
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8	8	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class			1	1	1
PROFINET IO Device					
Services					
- PG/OP communication	Yes	Yes			
- Isochronous mode	No	No	No	No	No
- IRT	Yes	Yes	Yes	Yes	Yes; Minimum send cycle of 250 µs
- PROFlenergy	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Shared device	Yes	Yes	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4	4	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- PROFINET Security Class			SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

Technical specifications

Technical specifications

Article number	6ES7511-1TL03-0AB0 CPU 1511T-1 PN, 450KB Prog., 1.5MB Data	6ES7515-2TN03-0AB0 CPU 1515T-2 PN, 1.5MB Prog., 4.5MB Data	6ES7517-3TP00-0AB0 CPU 1517T-3 PN/DP, 3MB Prog./8MB Data	6ES7516-3TN00-0AB0 CPU 1516T-3 PN/DP, 3MB Prog./7.5MB Data	6ES7518-4TP00-0AB0 CPU 1518T-4 PN/DP, 9MB Prog., 60MB Data
2. Interface					
Interface types					
• RJ 45 (Ethernet)		Yes; X2	Yes; X2	Yes; X2	Yes; X2
• Number of ports		1	1	1	1
• integrated switch		No	No	No	No
Protocols					
• IP protocol		Yes; IPv4	Yes; IPv4	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller		Yes	Yes	Yes	Yes
• PROFINET IO Device		Yes	Yes	Yes	Yes
• SIMATIC communication		Yes	Yes	Yes	Yes
• Open IE communication		Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server		Yes	Yes	Yes	Yes
• Media redundancy		No	No	No	No
PROFINET IO Controller					
Services					
- PG/OP communication		Yes			
- Isochronous mode		No	No	No	No
- Direct data exchange		No	No	No	No
- IRT		No	No	No	No
- PROFinergy		Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup		No	No	No	No
- Number of connectable IO Devices, max.		32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.		32	128	32	128
- of which in line, max.		32	128	32	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.		8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.		8	8	8	8
- Updating times		The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class			1	1	1
PROFINET IO Device					
Services					
- PG/OP communication		Yes			
- Isochronous mode		No	No	No	No
- IRT		No	No	No	No
- PROFinergy		Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup		No	No	No	No
- Shared device		Yes	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.		4	4	4	4
- activation/deactivation of I-devices		Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Asset management record		Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- PROFINET Security Class			SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only

Technical specifications

Article number	6ES7511-1TL03-0AB0	6ES7515-2TN03-0AB0	6ES7517-3TP00-0AB0	6ES7516-3TN00-0AB0	6ES7518-4TP00-0AB0
	CPU 1511T-1 PN, 450KB Prog., 1.5MB Data	CPU 1515T-2 PN, 1.5MB Prog., 4.5MB Data	CPU 1517T-3 PN/DP, 3MB Prog./8MB Data	CPU 1516T-3 PN/DP, 3MB Prog./7.5MB Data	CPU 1518T-4 PN/DP, 9MB Prog., 60MB Data
3. Interface					
Interface types					
• RJ 45 (Ethernet)			Yes; X3	Yes; X3	Yes; X3
• RS 485					
• Number of ports			1	1	1
• integrated switch					No
Protocols					
• IP protocol					Yes; IPv4
• PROFINET IO Controller					No
• PROFINET IO Device					No
• PROFIBUS DP master			Yes	Yes	
• PROFIBUS DP slave			No	No	
• SIMATIC communication			Yes	Yes	Yes
• Open IE communication					Yes; Optionally also encrypted
• Web server					Yes
PROFIBUS DP master					
• Number of DP slaves, max.			125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	
4. Interface					
Interface types					
• RS 485					Yes; X4
• Number of ports					1
Protocols					
• PROFIBUS DP master					Yes
• PROFIBUS DP slave					No
• SIMATIC communication					Yes
PROFIBUS DP master					
• Number of DP slaves, max.					125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols					
Number of connections					
• Number of connections, max.	128; via integrated interfaces of the CPU and connected CPs / CMs	256; via integrated interfaces of the CPU and connected CPs / CMs	320; via integrated interfaces of the CPU and connected CPs / CMs	256; via integrated interfaces of the CPU and connected CPs / CMs	384; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode					
Media redundancy					
- Media redundancy	only via 1st interface (X1)	only via 1st interface (X1)	only via 1st interface (X1)	only via 1st interface (X1)	only via 1st interface (X1)
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT	Yes; Requirement: IRT	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50	50	50	50

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

Technical specifications

Technical specifications

Article number	6ES7511-1TL03-0AB0	6ES7515-2TN03-0AB0	6ES7517-3TP00-0AB0	6ES7516-3TN00-0AB0	6ES7518-4TP00-0AB0
	CPU 1511T-1 PN, 450KB Prog., 1.5MB Data	CPU 1515T-2 PN, 1.5MB Prog., 4.5MB Data	CPU 1517T-3 PN/DP, 3MB Prog./8MB Data	CPU 1516T-3 PN/DP, 3MB Prog./7.5MB Data	CPU 1518T-4 PN/DP, 9MB Prog., 60MB Data
SIMATIC communication					
• S7 routing	Yes	Yes	Yes	Yes	Yes
OPC UA					
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes	Yes	Yes	Yes	Yes
Supported technology objects					
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	1 120	2 400	10 240	6 400	15 360
• Required Motion Control resources					
- per speed-controlled axis	40	40	40	40	40
- per positioning axis	80	80	80	80	80
- per synchronous axis	160	160	160	160	160
- per external encoder	80	80	80	80	80
- per output cam	20	20	20	20	20
- per cam track	160	160	160	160	160
- per probe	40	40	40	40	40
• Number of available Extended Motion Control resources for technology objects	90	120	256	192	512
• Required Extended Motion Control resources					
- per cam (1 000 points and 50 segments)	2	2	2	2	2
- per cam (10 000 points and 50 segments)	20	20	20	20	20
- for each set of kinematics	30	30	30	30	30
- per Interpreter			60	60	60
- Per leading axis proxy	3	3	3	3	3
• kinematics functions					
- kinematics with up to 4 interpolating axes	Yes; max. 3D + orientation	Yes; max. 3D + orientation	Yes; max. 3D + orientation	Yes; max. 3D + orientation	Yes; max. 3D + orientation
- kinematics with 5 or more interpolating axes	No	No	No	No	Yes; only with S7-1500T Motion Control KinPlus, as of TIA Portal V18 / FW V3.0
- user-defined kinematics	No	No	Yes	Yes	Yes
- SIMATIC Safe Kinematics	No	No	No	No	No
Controller					
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring					
• High-speed counter	Yes	Yes	Yes	Yes	Yes

Technical specifications

Article number	6ES7511-1TL03-0AB0	6ES7515-2TN03-0AB0	6ES7517-3TP00-0AB0	6ES7516-3TN00-0AB0	6ES7518-4TP00-0AB0
	CPU 1511T-1 PN, 450KB Prog., 1.5MB Data	CPU 1515T-2 PN, 1.5MB Prog., 4.5MB Data	CPU 1517T-3 PN/DP, 3MB Prog./8MB Data	CPU 1516T-3 PN/DP, 3MB Prog./7.5MB Data	CPU 1518T-4 PN/DP, 9MB Prog., 60MB Data
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-30 °C; No condensation	-30 °C; No condensation	0 °C	0 °C	0 °C
• horizontal installation, max.	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	-30 °C; No condensation	-30 °C; No condensation	0 °C	0 °C	0 °C
• vertical installation, max.	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
configuration / header					
configuration / programming / header					
Programming language					
- LAD	Yes	Yes	Yes	Yes	Yes
- FBD	Yes	Yes	Yes	Yes	Yes
- STL	Yes	Yes	Yes	Yes	Yes
- SCL	Yes	Yes	Yes	Yes	Yes
- CFC			Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes	Yes	Yes
Know-how protection					
• User program protection/ password protection	Yes	Yes	Yes	Yes	Yes
• Copy protection	Yes	Yes	Yes	Yes	Yes
• Block protection	Yes	Yes	Yes	Yes	Yes
Access protection					
• protection of confidential configuration data	Yes	Yes	Yes	Yes	Yes
• Password for display	Yes	Yes	Yes	Yes	Yes
• Protection level: Write protection	Yes	Yes	Yes	Yes	Yes
• Protection level: Read/write protection	Yes	Yes	Yes	Yes	Yes
• Protection level: Write protection for Failsafe	No	No	No	No	No
• Protection level: Complete protection	Yes	Yes	Yes	Yes	Yes
• User administration			Yes; device-wide	Yes; device-wide	Yes; device-wide
Dimensions					
Width	35 mm	70 mm	175 mm	175 mm	175 mm
Height	147 mm	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm	129 mm
Weights					
Weight, approx.	336 g	535 g	1 929 g	1 929 g	2 079 g

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

Technical specifications

Technical specifications

Article number	6ES7511-1UL03-0AB0 CPU 1511TF-1 PN, 450KB Prog., 1.5MB Data	6ES7515-2UN03-0AB0 CPU 1515TF-2 PN, 1.5MB Prog., 4.5MB Data	6ES7516-3UN00-0AB0 CPU 1516TF-3 PN/DP, 3MB Prog./7.5MB Data	6ES7517-3UP00-0AB0 CPU 1517TF-3 PN/DP, 3MB Prog., 8MB Data	6ES7518-4UP00-0AB0 CPU 1518TF-4 PN/DP, 9MB Prog., 60MB Data
General information					
Product type designation	CPU 1511TF-1 PN	CPU 1515TF-2 PN	CPU 1516TF-3 PN/DP	CPU 1517TF-3 PN/DP	CPU 1518TF-4 PN/DP
Engineering with					
• STEP 7 TIA Portal configurable/ integrated from version	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7 511-1UK01-0AB0	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7515-2UM01-0AB0	V19 (FW V3.1) / V15 (FW V2.5) or higher	V19 (FW V3.1) / V14 (FW V2.0) or higher	V19 (FW V3.1) / V17 (FW V2.9) or higher
Display					
Screen diagonal [cm]	3.45 cm	6.1 cm	6.1 cm	6.1 cm	6.1 cm
Supply voltage					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Memory					
Work memory					
• integrated (for program)	450 kbyte	1.5 Mbyte	3 Mbyte	3 Mbyte	9 Mbyte
• integrated (for data)	1.5 Mbyte	4.5 Mbyte	7.5 Mbyte	8 Mbyte	60 Mbyte
Load memory					
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte	32 Gbyte	32 Gbyte	32 Gbyte	32 Gbyte
CPU processing times					
for bit operations, typ.	25 ns	6 ns	6 ns	2 ns	1 ns
for word operations, typ.	32 ns	7 ns	7 ns	3 ns	2 ns
for fixed point arithmetic, typ.	42 ns	9 ns	9 ns	3 ns	2 ns
for floating point arithmetic, typ.	170 ns	37 ns	37 ns	12 ns	6 ns
Counters, timers and their retentivity					
S7 counter					
• Number	2 048	2 048	2 048	2 048	2 048
IEC counter					
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times					
• Number	2 048	2 048	2 048	2 048	2 048
IEC timer					
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity					
Flag					
• Size, max.	16 kbyte	16 kbyte	16 kbyte	16 kbyte	16 kbyte
Address area					
I/O address area					
• Inputs	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image
Time of day					
Clock					
• Type	Hardware clock	Hardware clock	Hardware clock	Hardware clock	Hardware clock
1. Interface					
Interface types					
• RJ 45 (Ethernet)	Yes; X1	Yes; X1	Yes; X1	Yes; X1	Yes; X1
• Number of ports	2	2	2	2	2
• integrated switch	Yes	Yes	Yes	Yes	Yes

Technical specifications

Article number	6ES7511-1UL03-0AB0	6ES7515-2UN03-0AB0	6ES7516-3UN00-0AB0	6ES7517-3UP00-0AB0	6ES7518-4UP00-0AB0
	CPU 1511TF-1 PN, 450KB Prog., 1.5MB Data	CPU 1515TF-2 PN, 1.5MB Prog., 4.5MB Data	CPU 1516TF-3 PN/DP, 3MB Prog./7.5MB Data	CPU 1517TF-3 PN/DP, 3MB Prog., 8MB Data	CPU 1518TF-4 PN/DP, 9MB Prog., 60MB Data
Protocols					
• IP protocol	Yes; IPv4	Yes; IPv4	Yes; IPv4	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes	Yes	Yes	Yes
• PROFINET IO Device	Yes	Yes	Yes	Yes	Yes
• SIMATIC communication	Yes	Yes	Yes	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes	Yes	Yes	Yes
• Media redundancy	Yes	Yes	Yes	Yes	Yes
PROFINET IO Controller					
Services					
- PG/OP communication	Yes	Yes			
- Isochronous mode	Yes	Yes	Yes	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes	Yes	Yes	Yes	Yes
- PROFinergy	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-I, PROFIBUS or PROFINET	256; In total, up to 1 000 distributed I/O devices can be connected via AS-I, PROFIBUS or PROFINET	256; In total, up to 1 000 distributed I/O devices can be connected via AS-I, PROFIBUS or PROFINET	512; In total, up to 1 000 distributed I/O devices can be connected via AS-I, PROFIBUS or PROFINET	512; In total, up to 1 000 distributed I/O devices can be connected via AS-I, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64	64	64	64	64
- Number of connectable IO Devices for RT, max.	128	256	256	512	512
- of which in line, max.	128	256	256	512	512
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8	8	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class			1	1	1
PROFINET IO Device					
Services					
- PG/OP communication	Yes	Yes			
- Isochronous mode	No	No	No	No	No
- IRT	Yes	Yes	Yes	Yes	Yes; Minimum send cycle of 250 µs
- PROFinergy	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Shared device	Yes	Yes	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4	4	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- PROFINET Security Class			SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

Technical specifications

Technical specifications

Article number	6ES7511-1UL03-0AB0 CPU 1511TF-1 PN, 450KB Prog., 1.5MB Data	6ES7515-2UN03-0AB0 CPU 1515TF-2 PN, 1.5MB Prog., 4.5MB Data	6ES7516-3UN00-0AB0 CPU 1516TF-3 PN/DP, 3MB Prog./7.5MB Data	6ES7517-3UP00-0AB0 CPU 1517TF-3 PN/DP, 3MB Prog., 8MB Data	6ES7518-4UP00-0AB0 CPU 1518TF-4 PN/DP, 9MB Prog., 60MB Data
2. Interface					
Interface types					
• RJ 45 (Ethernet)		Yes; X2	Yes; X2	Yes; X2	Yes; X2
• Number of ports		1	1	1	1
• integrated switch		No	No	No	No
Protocols					
• IP protocol		Yes; IPv4	Yes; IPv4	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller		Yes	Yes	Yes	Yes
• PROFINET IO Device		Yes	Yes	Yes	Yes
• SIMATIC communication		Yes	Yes	Yes	Yes
• Open IE communication		Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server		Yes	Yes	Yes	Yes
• Media redundancy		No	No	No	No
PROFINET IO Controller Services					
- PG/OP communication		Yes			
- Isochronous mode		No	No	No	No
- Direct data exchange		No	No	No	No
- IRT		No	No	No	No
- PROFlenergy		Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup		No	No	No	No
- Number of connectable IO Devices, max.		32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.		32	32	128	128
- of which in line, max.		32	32	128	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.		8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.		8	8	8	8
- Updating times		The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class			1	1	1
PROFINET IO Device Services					
- PG/OP communication		Yes			
- Isochronous mode		No	No	No	No
- IRT		No	No	No	No
- PROFlenergy		Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Prioritized startup		No	No	No	No
- Shared device		Yes	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.		4	4	4	4
- activation/deactivation of I-devices		Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- Asset management record		Yes; per user program	Yes; per user program	Yes; per user program	Yes; per user program
- PROFINET Security Class			SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only

Technical specifications

Article number	6ES7511-1UL03-0AB0	6ES7515-2UN03-0AB0	6ES7516-3UN00-0AB0	6ES7517-3UP00-0AB0	6ES7518-4UP00-0AB0
	CPU 1511TF-1 PN, 450KB Prog., 1.5MB Data	CPU 1515TF-2 PN, 1.5MB Prog., 4.5MB Data	CPU 1516TF-3 PN/DP, 3MB Prog./7.5MB Data	CPU 1517TF-3 PN/DP, 3MB Prog., 8MB Data	CPU 1518TF-4 PN/DP, 9MB Prog., 60MB Data
3. Interface					
Interface types					
• RJ 45 (Ethernet)			Yes; X3	Yes; X3	Yes; X3
• RS 485					
• Number of ports			1	1	1
• integrated switch					No
Protocols					
• IP protocol					Yes; IPv4
• PROFINET IO Controller					No
• PROFINET IO Device					No
• PROFIBUS DP master			Yes	Yes	
• PROFIBUS DP slave			No	No	
• SIMATIC communication			Yes	Yes	Yes
• Open IE communication					Yes; Optionally also encrypted
• Web server					Yes
PROFIBUS DP master					
• Number of DP slaves, max.			125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	
4. Interface					
Interface types					
• RS 485					Yes; X4
• Number of ports					1
Protocols					
• PROFIBUS DP master					Yes
• PROFIBUS DP slave					No
• SIMATIC communication					Yes
PROFIBUS DP master					
• Number of DP slaves, max.					125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols					
Number of connections					
• Number of connections, max.	128; via integrated interfaces of the CPU and connected CPs / CMs	256; via integrated interfaces of the CPU and connected CPs / CMs	256; via integrated interfaces of the CPU and connected CPs / CMs	320; via integrated interfaces of the CPU and connected CPs / CMs	384; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode					
Media redundancy					
- Media redundancy	only via 1st interface (X1)	only via 1st interface (X1)	only via 1st interface (X1)	only via 1st interface (X1)	only via 1st interface (X1)
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT	Yes; Requirement: IRT	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50	50	50	50
SIMATIC communication					
• S7 routing	Yes	Yes	Yes	Yes	Yes

SIMATIC S7-1500 Advanced Controllers

Central processing units
Technology CPUs

Technical specifications

Technical specifications

Article number	6ES7511-1UL03-0AB0	6ES7515-2UN03-0AB0	6ES7516-3UN00-0AB0	6ES7517-3UP00-0AB0	6ES7518-4UP00-0AB0
	CPU 1511TF-1 PN, 450KB Prog., 1.5MB Data	CPU 1515TF-2 PN, 1.5MB Prog., 4.5MB Data	CPU 1516TF-3 PN/DP, 3MB Prog./7.5MB Data	CPU 1517TF-3 PN/DP, 3MB Prog., 8MB Data	CPU 1518TF-4 PN/DP, 9MB Prog., 60MB Data
OPC UA					
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes	Yes	Yes	Yes	Yes
Supported technology objects					
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	1 120	2 400	6 400	10 240	15 360
• Required Motion Control resources					
- per speed-controlled axis	40	40	40	40	40
- per positioning axis	80	80	80	80	80
- per synchronous axis	160	160	160	160	160
- per external encoder	80	80	80	80	80
- per output cam	20	20	20	20	20
- per cam track	160	160	160	160	160
- per probe	40	40	40	40	40
• Number of available Extended Motion Control resources for technology objects	90	120	192	256	512
• Required Extended Motion Control resources					
- per cam (1 000 points and 50 segments)	2	2	2	2	2
- per cam (10 000 points and 50 segments)	20	20	20	20	20
- for each set of kinematics	30	30	30	30	30
- per Interpreter			60	60	60
- Per leading axis proxy	3	3	3	3	3
• kinematics functions					
- kinematics with up to 4 interpolating axes	Yes; max. 3D + orientation	Yes; max. 3D + orientation	Yes; max. 3D + orientation	Yes; max. 3D + orientation	Yes; max. 3D + orientation
- kinematics with 5 or more interpolating axes	No	No	No	No	Yes; only with S7-1500T Motion Control KinPlus, as of TIA Portal V18 / FW V3.0
- user-defined kinematics	No	No	Yes	Yes	Yes
- SIMATIC Safe Kinematics	No	No	No	Yes; optional, SIMATIC Safe Kinematics V17 or higher	Yes; optional, SIMATIC Safe Kinematics V17 or higher
Controller					
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring					
• High-speed counter	Yes	Yes	Yes	Yes	Yes

Technical specifications

Article number	6ES7511-1UL03-0AB0	6ES7515-2UN03-0AB0	6ES7516-3UN00-0AB0	6ES7517-3UP00-0AB0	6ES7518-4UP00-0AB0
	CPU 1511TF-1 PN, 450KB Prog., 1.5MB Data	CPU 1515TF-2 PN, 1.5MB Prog., 4.5MB Data	CPU 1516TF-3 PN/DP, 3MB Prog./7.5MB Data	CPU 1517TF-3 PN/DP, 3MB Prog., 8MB Data	CPU 1518TF-4 PN/DP, 9MB Prog., 60MB Data
Standards, approvals, certificates					
Highest safety class achievable in safety mode					
Probability of failure (for service life of 20 years and repair time of 100 hours)					
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05	< 2.00E-05	< 2.00E-05	< 2.00E-05	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09	< 1.00E-09	< 1.00E-09	< 1.00E-09	< 1.00E-09
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-30 °C; No condensation	-30 °C; No condensation	0 °C	0 °C	0 °C
• horizontal installation, max.	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off	60 °C; Display: 50 °C, at an operating temperature of typically 50 °C, the display is switched off
• vertical installation, min.	-30 °C; No condensation	-30 °C; No condensation	0 °C	0 °C	0 °C
• vertical installation, max.	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off	40 °C; Display: 40 °C, at an operating temperature of typically 40 °C, the display is switched off
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
configuration / header					
configuration / programming / header					
Programming language					
- LAD	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe
- FBD	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe	Yes; incl. failsafe
- STL	Yes	Yes	Yes	Yes	Yes
- SCL	Yes	Yes	Yes	Yes	Yes
- CFC			Yes; either CFC or failsafe functionality	Yes; either CFC or failsafe functionality	Yes; either CFC or failsafe functionality
- GRAPH	Yes	Yes	Yes	Yes	Yes
Know-how protection					
• User program protection/ password protection	Yes	Yes	Yes	Yes	Yes
• Copy protection	Yes	Yes	Yes	Yes	Yes
• Block protection	Yes	Yes	Yes	Yes	Yes
Access protection					
• protection of confidential configuration data	Yes	Yes	Yes	Yes	Yes
• Password for display	Yes	Yes	Yes	Yes	Yes
• Protection level: Write protection	Yes	Yes	Yes	Yes	Yes
• Protection level: Read/write protection	Yes	Yes	Yes	Yes	Yes
• Protection level: Write protection for Failsafe	Yes	Yes	Yes	Yes	Yes
• Protection level: Complete protection	Yes	Yes	Yes	Yes	Yes
• User administration			Yes; device-wide	Yes; device-wide	Yes; device-wide
Dimensions					
Width	35 mm	70 mm	175 mm	175 mm	175 mm
Height	147 mm	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm	129 mm
Weights					
Weight, approx.	336 g	456 g	1 929 g	1 929 g	2 079 g

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 521 digital input modules

Overview



- 16, 32 and 64-channel digital input modules
- Sinking and sourcing input versions available
- Module for recording NAMUR signals
- For flexible adaptation of the PLC to the corresponding task
- For subsequent expansion of the system with additional inputs
- 35 mm wide modules with parameters and diagnostic functions
- 25 mm wide modules for use in tight spaces: particularly economical, without parameters or diagnostic functions

Ordering data

SM 521 digital input modules

Module width 35 mm

SIMATIC S7-1500, digital input module DI 16x 24 V DC HF

16 channels in groups of 16; of which 2 inputs can be used as counters; input delay 0.05..20 ms; input type 3 (IEC 61131); diagnostics; hardware interrupts: order front connectors (screw terminals or push-in) separately

SIMATIC S7-1500, digital input module DI 32x 24 V DC HF

32 channels in groups of 16; of which 2 inputs can be used as counters; input delay 0.05..20 ms input type 3 (IEC 61131); diagnostics; hardware interrupts: order front connectors (screw terminals or push-in) separately

SIMATIC S7-1500, digital input module DI 16x24 V DC HS

16 channels in groups of 8; for 24 V encoders; 24 V DC sensor supply; input type 2 (IEC 61131); input delay parameterizable 0.05..20 ms; isochronous mode up to 250 µs; integr. counting function up to 20 kHz; pulse stretching; flutter monitoring; signal inversion diagnostics; hardware interrupts: order front connectors (screw terminals or push-in) and, if required, shielding set separately

SIMATIC S7-1500, digital input module, DI 64x 24 V DC SNK/SRC BA

64 channels in groups of 16, input delay typ. 3.2 ms, input type 3 (IEC 61131); sinking/sourcing input. 35 mm wide, cable and terminal blocks to be ordered separately as accessories

SIMATIC S7-1500, digital input module DI 16x 24 V DC BA, sourcing input

16 channels in groups of 16; input delay 3.2 ms; input type 3 (IEC 61131); order front connectors (screw terminals or push-in) separately

Article No.

6ES7521-1BH00-0AB0

6ES7521-1BL00-0AB0

6ES7521-7BH00-0AB0

6ES7521-1BP00-0AAA

6ES7521-1BH50-0AAA

Article No.

SIMATIC S7-1500, digital input module DI 16x 230 V AC BA

16 channels in groups of 4; input delay 20 ms; input type 1 (IEC 61131); order front connectors (screw terminals or push-in) separately

SIMATIC S7-1500, digital input module DI 16x 24...125 V UC HF

16 channels in groups of 1; input delay 0.05..20 ms; input type 3 (IEC 61131); diagnostics; hardware interrupts: order front connectors (screw terminals or push-in) separately

SIMATIC S7-1500, digital input module DI 16xNAMUR HF

16 channels in groups of 8; for 8.2 V NAMUR encoders; 8.2 V sensor supply; input delay; parameterizable 0.05 ... 20 ms; integr. counting function up to 20 kHz pulse stretching; flutter monitoring; signal inversion diagnostics; hardware interrupts; all components required for shielding are included in the scope of delivery; please order front connector (screw terminals or push-in) separately

Module width 25 mm;
front connector (push-in)
included in scope of delivery

SIMATIC S7-1500, digital input module DI 16x 24 V DC BA

16 channels in groups of 16, input delay typ. 3.2 ms, input type 3 (IEC 61131); delivery incl. push-in front connector

SIMATIC S7-1500, digital input module DI 32x 24 V DC BA

32 channels in groups of 16, input delay typ. 3.2 ms, input type 3 (IEC 61131); delivery incl. push-in front connector

6ES7521-1FH00-0AAA

6ES7521-7EH00-0AB0

6ES7521-7TH00-0AB0

6ES7521-1BH10-0AAA

6ES7521-1BL10-0AAA

Ordering data	Article No.	Article No.
Accessories		
Front connectors		
SIMATIC S7-1500, front connector screw-type connection system 40-pin for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1AM00-0XB0	
SIMATIC S7-1500, front connector with push-in technology 40-pin, for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1BM00-0XB0	
SIMATIC S7-1500, front connector with push-in technology 40-pin for 25 mm wide modules and compact CPUs of the S7-1500, incl. cable tie	6ES7592-1BM00-0XA0	
SIMATIC S7-1500, spare part jumper links For front connectors for 35 mm wide IO modules; can be used for all 24 V DC modules; 20 units per packing unit; Note: not suitable for 230 V, not suitable for analog modules	6ES7592-3AA00-0AA0	
DIN A4 labeling sheets		
SIMATIC S7-1500, labeling sheets for 35 mm Wide S7-1500 modules, color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules	6ES7592-2AX00-0AA0	
SIMATIC S7-1500, labeling sheets for 25 mm Wide S7-1500 modules and compact CPUs, color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 20 strips per packing unit sufficient for 200 modules	6ES7592-1AX00-0AA0	
SIMATIC S7-1500, spare part, U-connector For connecting I/O modules; self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0	
		Universal front door for I/O modules
		SIMATIC S7-1500, spare part front door for 35 mm Wide IO modules; consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit
		SIMATIC S7-1500, spare part front door for 25 mm Wide IO modules; consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit
		SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT
		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 521 digital input modules

Technical specifications

Article number	6ES7521-1BH00-0AB0	6ES7521-1BL00-0AB0	6ES7521-7BH00-0AB0	6ES7521-1BH50-0AA0	6ES7521-1FH00-0AA0	6ES7521-1BP00-0AA0
	S7-1500, DI 16x24VDC HF	S7-1500, DI 32x24VDC HF	S7-1500, DI 16x24VDC HS	S7-1500, DI 16x24VDC SRC BA	S7-1500, DI 16x230VAC BA	S7-1500, DI 64x24VDC SNK/SRC BA
General information						
Product type designation	DI 16x24VDC HF	DI 32x24VDC HF	DI 16x24 V DC HS	DI 16x24VDC SRC BA	DI 16x230VAC BA	DI 64x24VDC BA
Product function						
• Isochronous mode	Yes	Yes	Yes	No	No	No
• Prioritized startup	Yes	Yes	Yes	Yes	Yes	No
Engineering with						
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1 / -	V13 SP1 / -	STEP 7 V17 or higher	V12 / V12	V12 / V12	V16 with HSP 0319/ V17
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1
• PROFINET from GSD version/ GSD revision	V2.3 / -	V2.3 / -	V2.3 / -	V2.3 / -	V2.3 / -	V2.35 / -
Operating mode						
• DI	Yes	Yes	Yes	Yes	Yes	Yes
• Counter	Yes	Yes	Yes	No	No	No
• Oversampling	No	No	Yes			No
• MSI	Yes	Yes	Yes	Yes	Yes	Yes
Supply voltage						
Rated value (DC)	24 V	24 V	24 V			
Reverse polarity protection	Yes	Yes	Yes			
Encoder supply						
Number of outputs			16; 2x 24 V DC			
Short-circuit protection			Yes			
24 V encoder supply						
• 24 V			Yes			
• Short-circuit protection			Yes; Per group, electronic			
• Output current, max.			150 mA; per group			
• Output current per module, max.			300 mA			
Digital inputs						
Number of digital inputs	16	32	16	16	16	64
Digital inputs, parameterizable	Yes	Yes	Yes	No	No	No
Source/sink input	P-reading	P-reading	P-reading	Sourcing	P-reading	Yes
Input characteristic curve in accordance with IEC 61131, type 1			Yes		Yes	
Input characteristic curve in accordance with IEC 61131, type 2						
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes		Yes		Yes
Pulse extension			Yes; 0.05 s, 0.1 s, 0.2 s, 0.5 s, 1 s, 2 s			
Edge evaluation			Yes; Positive edge, negative edge			
Signal change flutter			Yes; 2 to 32 signal changes			
Flutter observation window			Yes; 0.5 s, 1 s to 100 s in 1-s steps			
Number of simultaneously controllable inputs						
• Number of simultaneously controllable inputs						64; see additional description in the manual
Digital input functions, parameterizable						
• Gate start/stop	Yes	Yes	Yes; software/ hardware gate			
• Freely usable digital input	Yes	Yes	Yes			
• Digital input with oversampling			Yes			

Technical specifications

Article number	6ES7521-1BH00-0AB0 S7-1500, DI 16x24VDC HF	6ES7521-1BL00-0AB0 S7-1500, DI 32x24VDC HF	6ES7521-7BH00-0AB0 S7-1500, DI 16x24VDC HS	6ES7521-1BH50-0AA0 S7-1500, DI 16x24VDC SRC BA	6ES7521-1FH00-0AA0 S7-1500, DI 16x230VAC BA	6ES7521-1BP00-0AA0 S7-1500, DI 64x24VDC SNK/SRC BA
Input voltage						
• Rated value (DC)	24 V	24 V	24 V	24 V		24 V
• Rated value (AC)					230 V; 120/230 V AC, 50/60 Hz	
• for signal "0"	-30 to +5 V	-30 to +5 V	-30 to +5 V	-5 to +30V	0V AC to 40V AC	-5 ... +5 V (reference potential is COM)
• for signal "1"	+11 to +30V	+11 to +30V	+11 to +30V	-11 to -30V	79V AC to 264V AC	-11 ... -30 V; +11 ... +30 V (reference potential is COM)
Input current						
• for signal "1", typ.	2.5 mA	2.5 mA	9 mA	4.5 mA	11 mA; At 230 V AC and 5.5 mA at 120 V AC	2.7 mA
Input delay (for rated value of input voltage)						
for standard inputs						
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 1.6 / 3.2 / 12.8 / 20 ms	Yes; 0.05 / 0.1 / 0.4 / 1.6 / 3.2 / 12.8 / 20 ms	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms	No	No	No
for interrupt inputs						
- parameterizable	Yes	Yes	Yes	No	No	No
for technological functions						
- parameterizable	Yes	Yes	Yes	No	No	No
Encoder						
Connectable encoders						
• 2-wire sensor	Yes	Yes	Yes	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA	2 mA	1.5 mA	2 mA	1.5 mA
Isochronous mode						
Filtering and processing time (TCI), min.	80 µs; At 50 µs filter time	80 µs; At 50 µs filter time	60 µs; At 50 µs filter time			
Bus cycle time (TDP), min.	250 µs	250 µs	250 µs			
Interrupts/diagnostics/ status information						
Diagnostics function	Yes	Yes	Yes	No	No	No
Alarms						
• Diagnostic alarm	Yes	Yes	Yes	No	No	No
• Hardware interrupt	Yes	Yes	Yes	No	No	No
Diagnoses						
• Monitoring the supply voltage	Yes	Yes	Yes	No	No	No
• Monitoring of encoder power supply			Yes; short-circuit			
• Wire-break	Yes; to I < 350 µA	Yes; to I < 350 µA	Yes; to I < 350 µA	No	No	No
• Short-circuit	No	No	No	No	No	No
• Group error						No
Diagnostics indication LED						
• RUN LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• MAINT LED						No
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED	Yes; green LED	Yes; green LED	No	No	Yes; via SIMATIC TOP connect connection module
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; via SIMATIC TOP connect connection module
• for channel diagnostics	Yes; red LED	Yes; red LED	Yes; red LED	No	No	No
• for module diagnostics	Yes; red LED	Yes; red LED	Yes; red LED	No	Yes; red LED	No

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 521 digital input modules

Technical specifications

Article number	6ES7521-1BH00-0AB0	6ES7521-1BL00-0AB0	6ES7521-7BH00-0AB0	6ES7521-1BH50-0AA0	6ES7521-1FH00-0AA0	6ES7521-1BP00-0AA0
	S7-1500, DI 16x24VDC HF	S7-1500, DI 32x24VDC HF	S7-1500, DI 16X24VDC HS	S7-1500, DI 16x24VDC SRC BA	S7-1500, DI 16x230VAC BA	S7-1500, DI 64x24VDC SNK/SRC BA
Potential separation						
Potential separation channels						
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes	Yes
Standards, approvals, certificates						
Suitable for safety functions	No	No	No	No	No	No
product functions / security / header						
signed firmware update				No	No	
data integrity	No	No	No	No	No	No
Ambient conditions						
Ambient temperature during operation						
• horizontal installation, min.	-30 °C; From FS05	-30 °C; From FS05	-30 °C	-25 °C; From FS05	-30 °C; From FS05	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; From FS05	-30 °C; From FS05	-30 °C	-25 °C; From FS05	-30 °C; From FS05	-30 °C
• vertical installation, max.	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C
Altitude during operation relating to sea level						
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual		5 000 m
Dimensions						
Width	35 mm	35 mm	35 mm	35 mm	35 mm	35 mm
Height	147 mm	147 mm	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm	129 mm	129 mm
Weights						
Weight, approx.	240 g	260 g	240 g	230 g	300 g	250 g
Other						
Note:						Please order cable and connection modules separately
Article number						
	6ES7521-7EH00-0AB0			6ES7521-7TH00-0AB0		
	S7-1500, DI 16 x 24...125V UC HF			S7-1500, DI 16xNAMUR HF		
General information						
Product type designation	DI 16x24 ... 125 V UC HF			DI 16xNAMUR HF		
Product function						
• Isochronous mode	No			Yes		
• Prioritized startup	Yes			Yes		
Engineering with						
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1 / -			STEP 7 V17 or higher		
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -			V5.5 SP3 / -		
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1			V1.0 / V5.1		
• PROFINET from GSD version/ GSD revision	V2.3 / -			V2.3 / -		
Operating mode						
• DI	Yes			Yes		
• Counter	No			Yes		
• Oversampling	No			No		
• MSI	Yes			Yes		
Supply voltage						
Rated value (DC)				24 V		
Reverse polarity protection				Yes		
Encoder supply						
Number of outputs				16; 2x 8.2 V DC		
Short-circuit protection				Yes		

Technical specifications

Article number	6ES7521-7EH00-0AB0 S7-1500, DI 16 x 24...125V UC HF	6ES7521-7TH00-0AB0 S7-1500, DI 16XNAMUR HF
NAMUR encoder supply		
<ul style="list-style-type: none"> 8.2 V Short-circuit protection Output current, max. Output current per module, max. 		Yes Yes; Per group, electronic 100 mA; per group 200 mA
Digital inputs		
Number of digital inputs	16	16; NAMUR
Digital inputs, parameterizable	Yes	Yes
Source/sink input	Yes	P-reading
Input characteristic curve in accordance with IEC 61131, type 3	Yes; At 24 V DC	
Pulse extension		Yes; 0.05 s, 0.1 s, 0.2 s, 0.5 s, 1 s, 2 s
Edge evaluation		Yes; rising edge, falling edge, edge change
Signal change flutter		Yes; 2 to 32 signal changes
Flutter observation window		Yes; 0.5 s, 1 s to 100 s in 1-s steps
Digital input functions, parameterizable		
<ul style="list-style-type: none"> Gate start/stop Freely usable digital input 		Yes; software/hardware gate Yes
Input voltage		
<ul style="list-style-type: none"> Rated value (DC) Rated value (AC) for signal "0" for signal "1" 	24 V; 48 V, 125 V 24 V; 48 V, 125 V (50 - 60 Hz) -5 ... +5 V +11 ... +146 V	8.2 V
Input current		
<ul style="list-style-type: none"> for signal "1", typ. 	3 mA; At 24 V DC	10 mA
for 10 k switched contact		
- for signal "0", min.		0.35 mA
- for signal "0", max.		1.2 mA
- for signal "1", min.		2.1 mA
- for signal "1", max.		10 mA
for unswitched contact		
- for signal "0", max. (permissible quiescent current)		0.35 to 1.2 mA
- for signal "1", typ.		2.1 ... 10 mA
for NAMUR encoders		
- for signal "0", min.		0.35 mA
- for signal "0", max.		1.2 mA
- for signal "1", min.		2.1 mA
- for signal "1", max.		10 mA
Input delay (for rated value of input voltage)		
for standard inputs		
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 1.6 / 3.2 / 12.8 / 20 ms parameterizable with DC, 20 ms fixed with AC	Yes; 0.05 / 0.1 / 0.4 / 1.6 / 3.2 / 12.8 / 20 ms
for interrupt inputs		
- parameterizable	Yes	Yes
for technological functions		
- parameterizable	No	Yes
for NAMUR inputs		
- at "0" to "1", max.		20 ms
- at "1" to "0", max.		20 ms
Encoder		
Connectable encoders		
<ul style="list-style-type: none"> NAMUR encoder/changeover contact according to EN 60947 Single contact / changeover contact unconnected Single contact / changeover contact connected with 10 kΩ 2-wire sensor - permissible quiescent current (2-wire sensor), max. 		Yes; no CO contact Yes; no CO contact Yes; no CO contact Yes 1.2 mA

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 521 digital input modules

Technical specifications

Article number	6ES7521-7EH00-0AB0 S7-1500, DI 16 x 24...125V UC HF	6ES7521-7TH00-0AB0 S7-1500, DI 16XNAMUR HF
Isochronous mode		
Filtering and processing time (TCI), min.		60 µs; At 50 µs filter time
Bus cycle time (TDP), min.		250 µs
Interrupts/diagnostics/status information		
Diagnostics function	Yes	Yes
Alarms		
• Diagnostic alarm	Yes	Yes
• Hardware interrupt	Yes	Yes
Diagnoses		
• Monitoring the supply voltage	No	Yes
• Monitoring of encoder power supply		Yes; short-circuit
• Wire-break	Yes; To I < 550 µA	Yes; to I < 350 µA
• Short-circuit	No	No
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	No	Yes; green LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; red LED	Yes; red LED
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes
Standards, approvals, certificates		
Suitable for safety functions	No	No
product functions / security / header		
data integrity	No	No
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	0 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	0 °C	-30 °C
• vertical installation, max.	40 °C	40 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.		5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions		
Width	35 mm	35 mm
Height	147 mm	147 mm
Depth	129 mm	129 mm
Weights		
Weight, approx.	240 g	240 g
Article number	6ES7521-1BH10-0AA0 S7-1500, DI 16x24VDC BA	6ES7521-1BL10-0AA0 S7-1500, DI 32x24VDC BA
General information		
Product type designation	DI 16 x 24 V DC BA	DI 32x24VDC BA
Product function		
• Isochronous mode	No	No
• Prioritized startup	Yes	Yes
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	V13 / V13	V13 / V13
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1	V1.0 / V5.1
• PROFINET from GSD version/ GSD revision	V2.3 / -	V2.3 / -

Technical specifications

Article number	6ES7521-1BH10-0AA0 S7-1500, DI 16x24VDC BA	6ES7521-1BL10-0AA0 S7-1500, DI 32x24VDC BA
Operating mode		
• DI	Yes	Yes
• Counter	No	No
• MSI	Yes	Yes
Supply voltage		
Rated value (DC)	24 V	24 V
Digital inputs		
Number of digital inputs	16	32
Digital inputs, parameterizable	No	No
Source/sink input	P-reading	P-reading
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal "0"	-30 to +5 V	-30 to +5 V
• for signal "1"	+11 to +30V	+11 to +30V
Input current		
• for signal "1", typ.	2.7 mA	2.7 mA
Input delay (for rated value of input voltage)		
for standard inputs		
- parameterizable	No	No
for interrupt inputs		
- parameterizable	No	No
for technological functions		
- parameterizable	No	No
Encoder		
Connectable encoders		
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA
Interrupts/diagnostics/status information		
Diagnostics function	No	No
Alarms		
• Diagnostic alarm	No	No
• Hardware interrupt	No	No
Diagnoses		
• Monitoring the supply voltage	No	No
• Wire-break	No	No
• Short-circuit	No	No
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	No	No
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No
• for module diagnostics	No	No
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes
Standards, approvals, certificates		
Suitable for safety functions	No	No
product functions / security / header		
data integrity	No	No

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 521 digital input modules**Technical specifications**

Article number	6ES7521-1BH10-0AA0 S7-1500, DI 16x24VDC BA	6ES7521-1BL10-0AA0 S7-1500, DI 32x24VDC BA
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-30 °C; from FS04	-30 °C; from FS04
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	-30 °C; from FS04	-30 °C; from FS04
• vertical installation, max.	40 °C	40 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions		
Width	25 mm	25 mm
Height	147 mm	147 mm
Depth	129 mm	129 mm
Weights		
Weight, approx.	230 g	260 g
Other		
Note:	Supplied incl. 40-pole push-in front connectors	Supplied incl. 40-pole push-in front connectors

Overview



- 8, 32, 16 and 64-channel digital output modules
- Sinking and sourcing output versions available
- For flexible adaptation of the PLC to the corresponding task
- For subsequent expansion of the system with additional outputs
- High Feature modules with parameters and diagnostic functions
- 25 mm wide modules for use in tight spaces: particularly economical, without parameters or diagnostic functions

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SM 522 digital output modules <u>Module width 35 mm</u>		SIMATIC S7-1500, digital output module DQ 64x24 V DC/0.3 A BA	6ES7522-1BP00-0AA0
SIMATIC S7-1500, digital output module DQ 8x24 V DC/2 A HF 8 channels in groups of 8; 8 A per group; diagnostics; substitute value: 2 channels can be used for pulse width modulation (PWM), the module supports the safety-related shutdown of load groups up to SIL2 according to EN IEC 62061:2021 and Category 3 / PL d according to EN ISO 13849-1:2015. order front connectors (screw terminals or push-in) separately	6ES7522-1BF00-0AB0	64 channels in groups of 16, 2 A per group at 60 °C, sourcing output, 35 mm wide, the module supports the safety-related shutdown of load groups up to SIL2 according to EN IEC 62061:2021 and Category 3 / PL d according to EN ISO 13849-1:2015. Order cables and terminal blocks separately as accessories	
SIMATIC S7-1500, digital output module, DQ 16x24 V DC/0.5 A HF 16 channels in groups of 8; 4 A per group; single-channel diagnostics; substitute value: switching cycle counter for connected actuators. the module supports the safety-related shutdown of load groups up to SIL2 according to EN IEC 62061:2021 and Category 3 / PL d according to EN ISO 13849-1:2015. order front connectors (screw terminals or push-in) separately	6ES7522-1BH01-0AB0	SIMATIC S7-1500, digital output module DQ 64x24 V DC/0.3 A SNK BA 64 channels in groups of 16, 2 A per group at 60 °C, sinking output, 35 mm wide cable and terminal blocks to be ordered separately as accessories	6ES7522-1BP50-0AA0
SIMATIC S7-1500, digital output module DQ 32x24 V DC/0.5 A HF 32 channels in groups of 8; 4 A per group; single-channel diagnostics; substitute value, switching cycle counter for connected actuators. the module supports the safety-related shutdown of load groups up to SIL2 according to EN IEC 62061:2021 and Category 3 / PL d according to EN ISO 13849-1:2015. order front connectors (screw terminals or push-in) separately	6ES7522-1BL01-0AB0	SIMATIC S7-1500, digital output module DQ 8x230 V AC/5 A ST Relay; 8 channels in groups of 1; 5 A per group; diagnostics; substitute value: Switching cycle counter for integrated relays, the module supports the safety-related shutdown of load groups up to SIL1 according to EN IEC 62061:2021 and Category 2 / PL c according to EN ISO 13849-1:2015. order front connectors (screw terminals or push-in) separately	6ES7522-5HF00-0AB0
		SIMATIC S7-1500, digital output module DQ 16x 230V AC/2A ST Relay 16 channels in groups of 2; 4 A per group; switching cycle counter for integrated relays, diagnostics; substitute value: the module supports the safety-related shutdown of load groups up to SIL1 according to EN IEC 62061:2021 and Category 2 / PL c according to EN ISO 13849-1:2015. order front connectors (screw terminals or push-in) separately	6ES7522-5HH00-0AB0

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 522 digital output modules

4

Ordering data	Article No.	Article No.
SIMATIC S7-1500, digital output module DQ 8x230 V AC/2 A ST TRIAC; 8 channels in groups of 1; 2 A per group; substitute value: order front connectors (screw terminals or push-in) separately	6ES7522-5FF00-0AB0	
SIMATIC S7-1500, digital output module DQ 16x230 V AC/1 A ST TRIAC; 16 channels in groups of 2; 2 A per group; substitute value: order front connectors (screw terminals or push-in) separately	6ES7522-5FH00-0AB0	
SIMATIC S7-1500, digital output module DQ 16x24.. 48 V UC/ 125 V DC/0.5 A ST 16 channels in groups of 1; 0.5 A per group; substitute value: Observe derating; the module supports the safety-related shutdown of load groups up to SIL2 according to EN IEC 62061:2021 and Category 3 / PL d according to EN ISO 13849-1:2015. order front connectors (screw terminals or push-in) separately Module width 25 mm; <u>front connector (push-in)</u> <u>included in scope of delivery</u>	6ES7522-5EH00-0AB0	
16 outputs, 24 V DC, 0.5 A Basic, isolated	6ES7 522-1BH10-0AA0	
32 outputs, 24 V DC, 0.5 A Basic, isolated	6ES7 522-1BL10-0AA0	
Accessories		
Front connectors		
SIMATIC S7-1500, front connector screw-type connection system 40-pin for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1AM00-0XB0	
SIMATIC S7-1500, front connector with push-in technology 40-pin, for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1BM00-0XB0	
SIMATIC S7-1500, front connector with push-in technology 40-pin for 25 mm wide modules and compact CPUs of the S7-1500, incl. cable tie	6ES7592-1BM00-0XA0	
SIMATIC S7-1500, spare part jumper links for front connector For 35 mm wide IO modules; can be used for all 24 V DC modules; 20 units per packing unit. Note: not suitable for 230 V, not suitable for analog modules	6ES7592-3AA00-0AA0	
		DIN A4 labeling sheets SIMATIC S7-1500, labeling sheets 6ES7592-2AX00-0AA0 For 35 mm width S7-1500 modules, color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules
		SIMATIC S7-1500, labeling sheets 6ES7592-1AX00-0AA0 For 25 mm wide S7-1500 modules and compact CPUs, color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 20 strips per packing unit sufficient for 200 modules
		SIMATIC S7-1500, spare part U-type connector for connecting I/O modules 6ES7590-0AA00-0AA0 Self-assembling backplane bus 5 units per packing unit
		Universal front door for I/O modules SIMATIC S7-1500, spare part front door 6ES7528-0AA00-7AA0 For 35 mm wide I/O modules; consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit
		SIMATIC S7-1500, spare part front door 6ES7528-0AA00-0AA0 For 25 mm wide I/O modules; consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit
		SIMATIC Manual Collection on DVD, 5 languages 6ES7998-8XC01-8YE0 All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT
		SIMATIC Manual Collection on DVD, 5 languages 6ES7998-8XC01-8YE2 Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

Technical specifications

Article number	6ES7522-1BH01-0AB0 S7-1500, DQ 16x24V DC/0.5A HF	6ES7522-1BL01-0AB0 S7-1500, DQ 32x24VDC/0.5A HF	6ES7522-1BF00-0AB0 S7-1500, DQ 8x24VDC/2A HF	6ES7522-5EH00-0AB0 S7-1500, DQ 16x24...48VUC/ 125VDC/0.5A ST
General information				
Product type designation	DQ 16x24VDC/0.5A HF	DQ 32x24VDC/0.5A HF	DQ 8x24VDC/2A HF	DQ 16x24 ... 48 V UC/ 125 V DC/0.5 A ST
Product function				
• Isochronous mode	Yes	Yes	No	No
• Prioritized startup	Yes	Yes	Yes	Yes
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1 / -	V13 SP1 / -	V13 SP1 / -	V13 SP1 / -
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1
• PROFINET from GSD version/ GSD revision	V2.3 / -	V2.3 / -	V2.3 / -	V2.3 / -
Operating mode				
• DQ	Yes	Yes	Yes	Yes
• DQ with energy-saving function	No	No	Yes; with an application	No
• PWM	No	No	Yes	No
• Cam control (switching at comparison values)	No	No	No	No
• Oversampling	No	No	No	No
• MSO	Yes	Yes	Yes	Yes
• Integrated operating cycle counter	Yes	Yes	Yes	No
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	
Reverse polarity protection	Yes; through internal protection with 7 A per group	Yes; through internal protection with 7 A per group	Yes; through internal protection with 10 A per group	
Digital outputs				
Type of digital output	Transistor	Transistor	Transistor	Transistor
Number of digital outputs	16	32	8	16
Current-sinking				Yes
Current-sourcing	Yes	Yes	Yes	Yes
Digital outputs, parameterizable	Yes	Yes	Yes	Yes
Short-circuit protection	Yes; Clocked electronically	Yes; Clocked electronically	Yes	
Limitation of inductive shutdown voltage to	L+ (-53 V)	L+ (-53 V)	-17 V	200 V (suppressor diode)
Controlling a digital input	Yes	Yes	Yes	Yes
Digital output functions, parameterizable				
• Freely usable digital output			Yes	
• PWM output			Yes; FS02 and FW V2.1.0 or higher	
- Number, max.			2	
Switching capacity of the outputs				
• with resistive load, max.	0.5 A	0.5 A		0.5 A
• on lamp load, max.	5 W	5 W	10 W	40 W; At 125 V DC, 10 W at 48 V UC, 5 W at 24 V UC
Load resistance range				
• lower limit	48 Ω	48 Ω	12 Ω	
• upper limit	12 kΩ	12 kΩ	4 kΩ	
Output voltage				
• for signal "1", min.	L+ (-0.8 V)	L+ (-0.8 V)	L+ (-0.8 V)	L+ (-1.0 V)
Output current				
• for signal "1" rated value	0.5 A	0.5 A	2 A	0.5 A
• for signal "0" residual current, max.	0.5 mA	0.5 mA	0.5 mA	

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 522 digital output modules

Technical specifications

Article number	6ES7522-1BH01-0AB0 S7-1500, DQ 16x24V DC/0.5A HF	6ES7522-1BL01-0AB0 S7-1500, DQ 32x24VDC/0.5A HF	6ES7522-1BF00-0AB0 S7-1500, DQ 8x24VDC/2A HF	6ES7522-5EH00-0AB0 S7-1500, DQ 16x24...48VUC/ 125VDC/0.5A ST
Output delay with resistive load				
• "0" to "1", typ.			80 µs	
• "0" to "1", max.	100 µs	100 µs	100 µs	5 ms
• "1" to "0", typ.			300 µs	
• "1" to "0", max.	500 µs	500 µs	500 µs	5 ms
Parallel switching of two outputs				
• for logic links	Yes	Yes	Yes	Yes
• for uprating	No	No	No	No
• for redundant control of a load	Yes	Yes	Yes	Yes
Switching frequency				
• with resistive load, max.	100 Hz	100 Hz	100 Hz; With PWM operation: 500 Hz	25 Hz
• with inductive load, max.	0.5 Hz; According to IEC 60947-5-1, DC-13	0.5 Hz; According to IEC 60947-5-1, DC-13	0.5 Hz; According to IEC 60947-5-1, DC-13; max. 500 Hz with PWM operation only with external circuit; see additional description in the manual	0.5 Hz
• on lamp load, max.	10 Hz	10 Hz	10 Hz	10 Hz
Total current of the outputs				
• Current per channel, max.	0.5 A; see additional description in the manual	0.5 A; see additional description in the manual	2 A; see additional description in the manual	0.5 A
• Current per group, max.	4 A; see additional description in the manual	4 A; see additional description in the manual	8 A; see additional description in the manual	0.5 A
• Current per module, max.	8 A; see additional description in the manual	16 A; see additional description in the manual	16 A; see additional description in the manual	8 A
Isochronous mode				
Execution and activation time (TCO), min.	70 µs	70 µs		
Bus cycle time (TDP), min.	250 µs	250 µs		
Interrupts/diagnostics/status information				
Diagnostics function	Yes	Yes	Yes	No
Substitute values connectable	Yes	Yes	Yes	Yes
Alarms				
• Diagnostic alarm	Yes	Yes	Yes	No
• Maintenance interrupt	Yes	Yes	Yes	No
Diagnoses				
• Monitoring the supply voltage	Yes	Yes	Yes	No
• Wire-break	Yes	Yes	No	No
• Short-circuit	Yes	Yes	Yes	No
• Group error	Yes	Yes	Yes	
Diagnostics indication LED				
• RUN LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED	Yes; green LED	Yes; green LED	No
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED	Yes; red LED	No
• for module diagnostics	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
Potential separation				
Potential separation channels				
• between the channels and backplane bus	Yes	Yes	Yes	Yes

Technical specifications

Article number	6ES7522-1BH01-0AB0 S7-1500, DQ 16x24V DC/0.5A HF	6ES7522-1BL01-0AB0 S7-1500, DQ 32x24VDC/0.5A HF	6ES7522-1BF00-0AB0 S7-1500, DQ 8x24VDC/2A HF	6ES7522-5EH00-0AB0 S7-1500, DQ 16x24...48VUC/ 125VDC/0.5A ST
Standards, approvals, certificates				
Suitable for safety functions	No	No	No	No
Suitable for safety-related tripping of standard modules	Yes; From FS02	Yes; From FS02	Yes; From FS03	Yes; From FS02
Highest safety class achievable for safety-related tripping of standard modules				
• Performance level according to ISO 13849-1	PL d	PL d	PL d	PL d
• Category according to ISO 13849-1	Cat. 3	Cat. 3	Cat. 3	Cat. 3
• SIL acc. to IEC 62061	SIL 2	SIL 2	SIL 2	SIL 2
product functions / security / header				
signed firmware update	No	No	No	No
data integrity	No	No	No	No
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C; From FS03	-30 °C; From FS03	-30 °C; From FS06	0 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; From FS03	-30 °C; From FS03	-30 °C; From FS06	0 °C
• vertical installation, max.	40 °C	40 °C	40 °C	40 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions				
Width	35 mm	35 mm	35 mm	35 mm
Height	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm
Weights				
Weight, approx.	230 g	280 g	240 g	230 g
Article number	6ES7522-5HF00-0AB0 S7-1500, DQ 8x230VAC/5A ST (Relay)	6ES7522-5HH00-0AB0 S7-1500, DQ 16x230VAC/2A ST (Relay)	6ES7522-5FF00-0AB0 S7-1500, DQ 8x230VAC/2A ST (Triac)	6ES7522-5FH00-0AB0 S7-1500, DQ 16x230VAC/1A ST (Triac)
General information				
Product type designation	DQ 8x230 V AC/5 A ST (relay)	DQ 16x 230 V AC/2 A ST (relay)	DQ 8x230 V AC/2A ST (triac)	DQ 16x230VAC/1A ST (Triac)
Product function				
• Isochronous mode	No	No	No	No
• Prioritized startup	Yes	Yes	Yes	Yes
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V12 / V12	V13 SP1 / -	V12 / V12	V13 SP1 / -
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1
• PROFINET from GSD version/ GSD revision	V2.3 / -	V2.3 / -	V2.3 / -	V2.3 / -
Operating mode				
• DQ	Yes	Yes	Yes	Yes
• DQ with energy-saving function	No	No	No	No
• PWM	No	No	No	No
• Oversampling	No	No	No	No
• MSO	Yes	Yes	Yes	Yes
• Integrated operating cycle counter	Yes; FW V2.1.0 or higher	Yes; FW V1.1.0 or higher	Yes; FW V 2.3.0 or higher	Yes; FW V 1.3.0 or higher
Supply voltage				
Rated value (DC)	24 V	24 V		
Reverse polarity protection	Yes	Yes		

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 522 digital output modules

Technical specifications

Article number	6ES7522-5HF00-0AB0	6ES7522-5HH00-0AB0	6ES7522-5FF00-0AB0	6ES7522-5FH00-0AB0
	S7-1500, DQ 8x230VAC/5A ST (Relay)	S7-1500, DQ 16x230VAC/2A ST (Relay)	S7-1500, DQ 8x230VAC/2A ST (Triac)	S7-1500, DQ 16x230VAC/1A ST (Triac)
Digital outputs				
Type of digital output	Relays	Relays	Triac	Triac
Number of digital outputs	8	16	8	16
Current-sinking	Yes	Yes		Yes
Current-sourcing	Yes	Yes	Yes	Yes
Digital outputs, parameterizable	Yes	Yes	Yes	Yes
Short-circuit protection	No	No	No	No
Controlling a digital input	Yes; possible	Yes		
Size of motor starters according to NEMA, max.	5	5	5	4
Switching capacity of the outputs				
• with resistive load, max.			2 A	1 A
• on lamp load, max.	1 500 W; 10 000 operating cycles	50 W (230 V AC), 5 W (24 V DC)	50 W	50 W
• Low energy/fluorescent lamps with electronic control gear	10x 58 W (25 000 operating cycles)			
• Fluorescent tubes, conventionally compensated	1x 58 W (25 000 operating cycles)			
• Fluorescent tubes, uncompensated	10x 58 W (25 000 operating cycles)			
Output voltage				
• for signal "1", min.			L1 (-1.5 V) at maximum output current; L1 (-8.5 V) at minimum output current	L1 (-1.5 V) at maximum output current; L1 (-8.5 V) at minimum output current
Output current				
• for signal "1" rated value	5 A	2 A	2 A	1 A
• for signal "0" residual current, max.	0 A	0 A	2 mA	2 mA
Output delay with resistive load				
• "0" to "1", max.			1 AC cycle	1 AC cycle
• "1" to "0", max.			1 AC cycle	1 AC cycle
Parallel switching of two outputs				
• for logic links	Yes	Yes	No	No
• for uprating	No	No	No	No
• for redundant control of a load	Yes	Yes	Yes	Yes
Switching frequency				
• with resistive load, max.	2 Hz	1 Hz	10 Hz	10 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz
• on lamp load, max.	2 Hz	1 Hz	1 Hz	1 Hz
Total current of the outputs				
• Current per channel, max.	8 A; see additional description in the manual	2 A; see additional description in the manual	2 A; see additional description in the manual	1 A; see additional description in the manual
• Current per group, max.	8 A; see additional description in the manual	4 A; see additional description in the manual	2 A; see additional description in the manual	2 A; see additional description in the manual
• Current per module, max.	64 A; see additional description in the manual	32 A; see additional description in the manual	10 A; see additional description in the manual	10 A; see additional description in the manual

Technical specifications

Article number	6ES7522-5HF00-0AB0	6ES7522-5HH00-0AB0	6ES7522-5FF00-0AB0	6ES7522-5FH00-0AB0
	S7-1500, DQ 8x230VAC/5A ST (Relay)	S7-1500, DQ 16x230VAC/2A ST (Relay)	S7-1500, DQ 8x230VAC/2A ST (Triac)	S7-1500, DQ 16x230VAC/1A ST (Triac)
Relay outputs				
• Number of relay outputs	8	16		
• Rated supply voltage of relay coil L+ (DC)	24 V	24 V		
• Current consumption of relays (coil current of all relays), typ.	80 mA	150 mA		
• external protection for relay outputs	With miniature circuit breaker with characteristic B for: cos φ 1.0: 600 A cos φ 0.5 ... 0.7: 900 A with 8 A Diazed fuse: 1 000 A	Miniature circuit breaker B10 / B16		
• Contact connection (internal)	No	No		
• Number of operating cycles, max.	4 000 000; see additional description in the manual	see additional description in the manual		
• Relay approved acc. to UL 508	Yes; 250 V AC/5 A g.p.; 120 V AC TV-4 tungsten; A300, R300	No		
Switching capacity of contacts				
- with inductive load, max.	see additional description in the manual	2 A; see additional description in the manual		
- with resistive load, max.	see additional description in the manual	2 A; see additional description in the manual		
Interrupts/diagnostics/ status information				
Diagnostics function	Yes		No	No
Substitute values connectable	Yes	Yes	Yes	Yes
Alarms				
• Diagnostic alarm	Yes	Yes	No	No
• Maintenance interrupt	Yes	Yes	Yes; maintenance alarm for switching cycle counter	Yes; maintenance alarm for switching cycle counter
Diagnoses				
• Monitoring the supply voltage	Yes	Yes	No	No
• Wire-break	No	No	No	No
• Short-circuit	No	No	No	No
Diagnostics indication LED				
• RUN LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED		
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED	Yes; green LED	No	No
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No	No	No
• for module diagnostics	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
Potential separation				
Potential separation channels				
• between the channels and backplane bus	Yes	Yes	Yes	Yes
Standards, approvals, certificates				
Suitable for safety functions	No	No	No	No
Suitable for safety-related tripping of standard modules	Yes; From FS03	Yes; From FS02		
Highest safety class achievable for safety-related tripping of standard modules				
• Performance level according to ISO 13849-1	PL c	PL c		
• Category according to ISO 13849-1	Cat. 2	Cat. 2		
• SIL acc. to IEC 62061	SIL 1	SIL 1		

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 522 digital output modules

Technical specifications

Article number	6ES7522-5HF00-0AB0 S7-1500, DQ 8x230VAC/5A ST (Relay)	6ES7522-5HH00-0AB0 S7-1500, DQ 16x230VAC/2A ST (Relay)	6ES7522-5FF00-0AB0 S7-1500, DQ 8x230VAC/2A ST (Triac)	6ES7522-5FH00-0AB0 S7-1500, DQ 16x230VAC/1A ST (Triac)
product functions / security / header				
signed firmware update	No	No	No	No
data integrity	No	No	No	No
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C; From FS03	-25 °C; From FS02	-25 °C; From FS05	-25 °C; from FS04
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; From FS03	-25 °C; From FS02	-25 °C; From FS05	-25 °C; from FS04
• vertical installation, max.	40 °C	40 °C	40 °C	40 °C
Dimensions				
Width	35 mm	35 mm	35 mm	35 mm
Height	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm
Weights				
Weight, approx.	350 g	350 g	290 g	310 g
<hr/>				
Article number	6ES7522-1BP00-0AA0 S7-1500, DQ 64x24VDC/0.3A BA	6ES7522-1BP50-0AA0 S7-1500, DQ 64x24VDC/0.3A SNK BA		
General information				
Product type designation	DQ 64x24VDC/0.3A BA	DQ 64x24VDC/0.3A SNK BA		
Product function				
• Isochronous mode	No	No		
• Prioritized startup	No	No		
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V16 with HSP 0319 / V17	V16 with HSP 0319 / V17		
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -		
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1	V1.0 / V5.1		
• PROFINET from GSD version/ GSD revision	V2.35 / -	V2.35 / -		
Operating mode				
• DQ	Yes	Yes		
• DQ with energy-saving function	No	No		
• PWM	No	No		
• Cam control (switching at comparison values)	No	No		
• Oversampling	No	No		
• MSO	Yes	Yes		
• Integrated operating cycle counter	No	No		
Supply voltage				
Rated value (DC)	24 V	24 V		
Reverse polarity protection	Yes; through internal protection with 7 A per group	Yes; Through internal protection with 4 A per group		
Digital outputs				
Type of digital output	Transistor	Transistor		
Number of digital outputs	64	64		
Current-sinking	No	Yes		
Current-sourcing	Yes	No		
Digital outputs, parameterizable	No	No		
Short-circuit protection	Yes	No; external fusing necessary, max. 4 A per group, tripping characteristic type B or C		
Limitation of inductive shutdown voltage to	L+ (-53 V)	L+ (-53 V)		
Controlling a digital input	Yes	Yes		
Switching capacity of the outputs				
• with resistive load, max.	0.3 A	0.3 A		
• on lamp load, max.	5 W	5 W		

Technical specifications

Article number	6ES7522-1BP00-0AA0 S7-1500, DQ 64x24VDC/0.3A BA	6ES7522-1BP50-0AA0 S7-1500, DQ 64x24VDC/0.3A SNK BA
Load resistance range		
• lower limit	80 Ω	80 Ω
• upper limit	10 kΩ	10 kΩ
Output voltage		
• for signal "1", min.	L+ (-0.8 V)	M+ (0.5 V)
Output current		
• for signal "1" rated value	0.3 A	0.3 A
• for signal "0" residual current, max.	0.5 mA	0.5 mA
Output delay with resistive load		
• "0" to "1", max.	100 μs	100 μs
• "1" to "0", max.	500 μs	500 μs
Parallel switching of two outputs		
• for logic links	Yes	Yes
• for uprating	No	No
• for redundant control of a load	Yes	Yes
Switching frequency		
• with resistive load, max.	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz; According to IEC 60947-5-1, DC-13	0.5 Hz; According to IEC 60947-5-1, DC-13
• on lamp load, max.	10 Hz	10 Hz
Total current of the outputs		
• Current per channel, max.	0.3 A	0.3 A
• Current per group, max.	2 A	2 A
• Current per module, max.	8 A	8 A
Total current of the outputs (per module)		
horizontal installation		
- up to 60 °C, max.	8 A	8 A
vertical installation		
- up to 40 °C, max.	8 A	8 A
Interrupts/diagnostics/status information		
Diagnostics function	No	No
Substitute values connectable	No	No
Alarms		
• Diagnostic alarm	No	No
• Maintenance interrupt	No	No
Diagnoses		
• Monitoring the supply voltage	No	No
• Wire-break	No	No
• Short-circuit	No	No
• Group error	No	No
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• MAINT LED	No	No
• Monitoring of the supply voltage (PWR-LED)	Yes; via SIMATIC TOP connect connection module	Yes; via SIMATIC TOP connect connection module
• Channel status display	Yes; via SIMATIC TOP connect connection module	Yes; via SIMATIC TOP connect connection module
• for channel diagnostics	No	No
• for module diagnostics	No	No
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 522 digital output modules

Technical specifications

Article number	6ES7522-1BP00-0AA0 S7-1500, DQ 64x24VDC/0.3A BA	6ES7522-1BP50-0AA0 S7-1500, DQ 64x24VDC/0.3A SNK BA
Standards, approvals, certificates		
Suitable for safety functions	No	No
Suitable for safety-related tripping of standard modules	Yes; From FS01	No
Highest safety class achievable for safety-related tripping of standard modules		
• Performance level according to ISO 13849-1	PL d	
• Category according to ISO 13849-1	Cat. 3	
• SIL acc. to IEC 62061	SIL 2	
product functions / security / header		
data integrity		No
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C
• vertical installation, max.	40 °C	40 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
Dimensions		
Width	35 mm	35 mm
Height	147 mm	147 mm
Depth	129 mm	129 mm
Weights		
Weight, approx.	270 g	270 g
Other		
Note:	Please order cable and connection modules separately	Please order cable and connection modules separately
Article number	6ES7522-1BH10-0AA0 S7-1500, DQ 16x24VDC/0.5A BA	6ES7522-1BL10-0AA0 S7-1500, DQ 32x24VDC/0.5A BA
General information		
Product type designation	DQ 16x24VDC/0.5A BA	DQ 32x24VDC/0.5A BA
Product function		
• Isochronous mode	No	No
• Prioritized startup	Yes	Yes
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	V13 / V13	V13 / V13
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1	V1.0 / V5.1
• PROFINET from GSD version/ GSD revision	V2.3 / -	V2.3 / -
Operating mode		
• DQ	Yes	Yes
• DQ with energy-saving function	No	No
• PWM	No	No
• Oversampling	No	No
• MSO	Yes	Yes
Supply voltage		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes; through internal protection with 7 A per group	Yes; through internal protection with 7 A per group

Technical specifications

Article number	6ES7522-1BH10-0AA0 S7-1500, DQ 16x24VDC/0.5A BA	6ES7522-1BL10-0AA0 S7-1500, DQ 32x24VDC/0.5A BA
Digital outputs		
Type of digital output	Transistor	Transistor
Number of digital outputs	16	32
Current-sourcing	Yes	Yes
Digital outputs, parameterizable	No	No
Short-circuit protection	Yes	Yes
Limitation of inductive shutdown voltage to	L+ (-53 V)	L+ (-53 V)
Controlling a digital input	Yes	Yes
Switching capacity of the outputs		
• with resistive load, max.	0.5 A	0.5 A
• on lamp load, max.	5 W	5 W
Load resistance range		
• lower limit	48 Ω	48 Ω
• upper limit	12 kΩ	12 kΩ
Output voltage		
• for signal "1", min.	L+ (-0.8 V)	L+ (-0.8 V)
Output current		
• for signal "1" rated value	0.5 A	0.5 A
• for signal "0" residual current, max.	0.5 mA	0.5 mA
Output delay with resistive load		
• "0" to "1", max.	100 μs	100 μs
• "1" to "0", max.	500 μs	500 μs
Parallel switching of two outputs		
• for logic links	Yes	Yes
• for uprating	No	No
• for redundant control of a load	Yes	Yes
Switching frequency		
• with resistive load, max.	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz; According to IEC 60947-5-1, DC-13	0.5 Hz; According to IEC 60947-5-1, DC-13
• on lamp load, max.	10 Hz	10 Hz
Total current of the outputs		
• Current per channel, max.	0.5 A; see additional description in the manual	0.5 A; see additional description in the manual
• Current per group, max.	4 A; see additional description in the manual	4 A; see additional description in the manual
• Current per module, max.	8 A; see additional description in the manual	16 A; see additional description in the manual
Interrupts/diagnostics/status information		
Diagnostics function	No	No
Substitute values connectable	No	No
Alarms		
• Diagnostic alarm	No	No
• Maintenance interrupt	No	No
Diagnoses		
• Monitoring the supply voltage	No	No
• Wire-break	No	No
• Short-circuit	No	No
• Group error	No	No
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED	Yes; green LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No
• for module diagnostics	No	No

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 522 digital output modules

Technical specifications

Article number	6ES7522-1BH10-0AA0 S7-1500, DQ 16x24VDC/0.5A BA	6ES7522-1BL10-0AA0 S7-1500, DQ 32x24VDC/0.5A BA
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes
Standards, approvals, certificates		
Suitable for safety functions	No	No
Suitable for safety-related tripping of standard modules	Yes; From FS02	Yes; From FS02
Highest safety class achievable for safety-related tripping of standard modules		
• Performance level according to ISO 13849-1	PL d	PL d
• Category according to ISO 13849-1	Cat. 3	Cat. 3
• SIL acc. to IEC 62061	SIL 2	SIL 2
product functions / security / header		
signed firmware update	No	No
data integrity	No	No
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-30 °C; from FS04	-30 °C; from FS04
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	-30 °C; from FS04	-30 °C; from FS04
• vertical installation, max.	40 °C	40 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions		
Width	25 mm	25 mm
Height	147 mm	147 mm
Depth	129 mm	129 mm
Weights		
Weight, approx.	230 g	280 g
Other		
Note:	Supplied incl. 40-pole push-in front connectors	Supplied incl. 40-pole push-in front connectors

4

Overview



- 16 digital inputs and 16 digital outputs (25 mm wide)
- 32 digital inputs, sinking/sourcing / 32 digital outputs, sourcing (35 mm wide)
- For flexible adaptation of the PLC to the corresponding task
- For subsequent expansion of the system with additional inputs and outputs
- For use in the tightest spaces: particularly economical, without parameters or diagnostic functions

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SM 523 digital input/output module		DIN A4 labeling sheets	
<u>Module width 35 mm</u>		SIMATIC S7-1500, labeling sheets	6ES7592-1AX00-0AA0
SIMATIC S7-1500 digital input/output module, DI 32x24 V DC BA SNK / SRC	6ES7523-1BP50-0AA0	For 25 mm wide S7-1500 modules and compact CPUs, color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 20 strips per packing unit sufficient for 200 modules	
32 channels in groups of 16, input delay typ. 3.2 ms, input type 3 (IEC 61131), sinking/sourcing input, DQ 32x24 V DC/0.3 A SNK BA; 32 channels in groups of 16; 2 A per group at 60 °C; sinking output; 35 mm wide; order cables and terminal blocks separately as accessories		SIMATIC S7-1500, spare part U-type connector for connecting I/O modules	6ES7590-0AA00-0AA0
<u>Module width 25 mm; front connector (push-in) included in scope of delivery</u>		Self-assembling backplane bus 5 units per packing unit	
SIMATIC S7-1500 digital input/output module, DI 16x 24 V DC	6ES7523-1BL00-0AA0	Universal front door for I/O modules	
16 channels in groups of 16, input delay typ. 3.2 ms, input type 3 (IEC 61131), DQ 16x24 V DC/0.5 A BA; 16 channels in groups of 8; 4 A per group; the module supports the safety-related shutdown of load groups up to SIL2 according to EN IEC 62061:2021 and Category 2 / PL c according to EN ISO 13849-1:2015. Supplied with push-in front connector		SIMATIC S7-1500, spare part front door	6ES7528-0AA00-0AA0
Accessories		For 25 mm wide I/O modules; consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit	
Front connectors		SIMATIC Manual Collection on DVD, 5 languages	6ES7998-8XC01-8YE0
SIMATIC S7-1500, front connector with push-in technology	6ES7592-1BM00-0XA0	All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	
40-pin for 25 mm wide modules and compact CPUs of the S7-1500, incl. cable tie		SIMATIC Manual Collection on DVD, 5 languages	6ES7998-8XC01-8YE2
		Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 523 digital input/output modules

Technical specifications

Article number	6ES7523-1BL00-0AA0 S7-1500, DI 16x24VDC/DQ 16x24VDC/0.5A BA	6ES7523-1BP50-0AA0 S7-1500, DI 32x24VDC/DQ 32x24VDC/0.3A BA
General information		
Product type designation	DI 16x24VDC / DQ16x24VDC/0.5A BA	DI 32 x 24 V DC / DQ 32 x 24 V DC/0.3A SNK BA
Product function		
• Isochronous mode	No	No
• Prioritized startup	Yes	No
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	V13 / V13	V16 with HSP 0319 / V17
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1	V1.0 / V5.1
• PROFINET from GSD version/ GSD revision	V2.3 / -	V2.35 / -
Operating mode		
• DI	Yes	Yes
• Counter	No	No
• DQ	Yes	Yes
• DQ with energy-saving function	No	No
• PWM	No	No
• Cam control (switching at comparison values)	No	No
• Oversampling	No	No
• MSI	Yes	Yes
• MSO	Yes	Yes
• Integrated operating cycle counter	No	No
Supply voltage		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes; through internal protection with 7 A per group	Yes; Through internal protection with 4 A per group
Digital inputs		
Number of digital inputs	16	32
Digital inputs, parameterizable	No	No
Source/sink input	P-reading	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes
Number of simultaneously controllable inputs		32
• Number of simultaneously controllable inputs		32
horizontal installation - up to 60 °C, max.		32
vertical installation - up to 40 °C, max.		16
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal *0*	-30 to +5 V	-5 ... +5 V (reference potential is COM)
• for signal *1*	+11 to +30V	-11 ... -30 V; +11 ... +30 V (reference potential is COM)
Input current		
• for signal *1*, typ.	2.7 mA	2.7 mA
Input delay (for rated value of input voltage)		
for standard inputs - parameterizable	No	No
for interrupt inputs - parameterizable	No	No
for technological functions - parameterizable	No	No

Technical specifications

Article number	6ES7523-1BL00-0AA0 S7-1500, DI 16x24VDC/DQ 16x24VDC/0.5A BA	6ES7523-1BP50-0AA0 S7-1500, DI 32x24VDC/DQ 32x24VDC/0.3A BA
Digital outputs		
Type of digital output	Transistor	Transistor
Number of digital outputs	16	32
Current-sinking	Yes	Yes
Current-sourcing	Yes	No
Digital outputs, parameterizable	No	No
Short-circuit protection	Yes	No; external fusing necessary, max. 4 A per group, tripping characteristic type B or C
Limitation of inductive shutdown voltage to	L+ (-53 V)	L+ (-53 V)
Controlling a digital input	Yes	Yes
Switching capacity of the outputs		
• with resistive load, max.	0.5 A	0.3 A
• on lamp load, max.	5 W	5 W
Load resistance range		
• lower limit	48 Ω	80 Ω
• upper limit	12 kΩ	10 kΩ
Output voltage		
• for signal "1", min.	L+ (-0.8 V)	M+ (0.5 V)
Output current		
• for signal "1" rated value	0.5 A	0.3 A
• for signal "0" residual current, max.	0.5 mA	0.5 mA
Output delay with resistive load		
• "0" to "1", max.	100 μs	100 μs
• "1" to "0", max.	500 μs	500 μs
Parallel switching of two outputs		
• for logic links	Yes	Yes
• for uprating	No	No
• for redundant control of a load	Yes	Yes
Switching frequency		
• with resistive load, max.	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz; According to IEC 60947-5-1, DC-13
• on lamp load, max.	10 Hz	10 Hz
Total current of the outputs		
• Current per channel, max.	0.5 A; see additional description in the manual	0.3 A
• Current per group, max.	4 A; see additional description in the manual	2 A
• Current per module, max.	8 A; see additional description in the manual	4 A
Total current of the outputs (per module)		
horizontal installation		
- up to 60 °C, max.		4 A
vertical installation		
- up to 40 °C, max.		4 A
Encoder		
Connectable encoders		
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA

SIMATIC S7-1500 Advanced Controllers

I/O modules

Digital modules

SM 523 digital input/output modules

Technical specifications

Article number	6ES7523-1BL00-0AA0 S7-1500, DI 16x24VDC/DQ 16x24VDC/0.5A BA	6ES7523-1BP50-0AA0 S7-1500, DI 32x24VDC/DQ 32x24VDC/0.3A BA
Interrupts/diagnostics/ status information		
Diagnostics function	No	No
Substitute values connectable	No	No
Alarms		
• Diagnostic alarm	No	No
• Maintenance interrupt	No	No
• Hardware interrupt	No	No
Diagnoses		
• Monitoring the supply voltage	No	No
• Wire-break	No	No
• Short-circuit	No	No
• Group error	No	No
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• MAINT LED		No
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED	Yes; via SIMATIC TOP connect connection module
• Channel status display	Yes; green LED	Yes; via SIMATIC TOP connect connection module
• for channel diagnostics	No	No
• for module diagnostics	No	No
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes
Standards, approvals, certificates		
Suitable for safety-related tripping of standard modules	Yes; From FS03	
Highest safety class achievable for safety-related tripping of standard modules		
• Performance level according to ISO 13849-1	PL d	
• Category according to ISO 13849-1	Cat. 3	
• SIL acc. to IEC 62061	SIL 2	
product functions / security / header		
signed firmware update	No	
data integrity	No	No
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-30 °C; from FS04	-30 °C
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	-30 °C; from FS04	-30 °C
• vertical installation, max.	40 °C	40 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m
Dimensions		
Width	25 mm	35 mm
Height	147 mm	147 mm
Depth	129 mm	129 mm
Weights		
Weight, approx.	280 g	250 g
Other		
Note:	Supplied incl. 40-pole push-in front connectors	Please order cable and connection modules separately

Overview



- 16 and 32-channel digital input modules
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional inputs

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SM 521 digital input modules

(Extended temperature range and exposure to environmental substances)

16 inputs, 24 V DC, isolated, parameterizable diagnostics and hardware interrupts

6AG1521-1BH00-7AB0

32 inputs, 24 V DC, isolated, parameterizable diagnostics and hardware interrupts

6AG1521-1BL00-7AB0

16 inputs, 24 V DC, isolated, input delay 3.2 ms

6AG1521-1BH50-7AA0

16 inputs, 230 V AC, isolated, input delay 20 ms

6AG1521-1FH00-7AA0

16 inputs, 48 ... 125 V UC, input delay 0.05 ... 20 ms, parameterizable diagnostics and hardware interrupts

6AG1521-7EH00-7AB0

Accessories

SIPLUS S7-1500 U connector

Spare part for connecting I/O modules; self-assembling backplane bus; 5 pieces per packaging unit; with conformal coating, -40...+70 °C

6AG1590-0AA00-7AA0

Other accessories

See SIMATIC S7-1500, SM 521 digital input modules, page 4/173

Technical specifications

Article number	6AG1521-1BH00-7AB0	6AG1521-1BL00-7AB0	6AG1521-1BH50-7AA0	6AG1521-1FH00-7AA0	6AG1521-7EH00-7AB0
Based on	6ES7521-1BH00-0AB0 SIPLUS S7-1500 DI 16X24VDC HF	6ES7521-1BL00-0AB0 SIPLUS S7-1500 DI 32X24VDC HF	6ES7521-1BH50-0AA0 SIPLUS S7-1500 DI 16X24VDC SRC BA	6ES7521-1FH00-0AA0 SIPLUS S7-1500 DI 16X230VAC BA	6ES7521-7EH00-0AB0 SIPLUS S7-1500 DI 48VUC/125VDC HF
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax; > +60 °C number of simultaneously controllable inputs max. 16	70 °C; = Tmax; > +60 °C number of simultaneously controllable inputs max. 8	70 °C; = Tmax; > +60 °C number of simultaneously controllable inputs max. 8	70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax > 60 °C max. 4 inputs (no adjacent points)
• vertical installation, min.	-40 °C; = Tmin	-40 °C; = Tmin	-40 °C; = Tmin	-40 °C; = Tmin	-40 °C; = Tmin
• vertical installation, max.	40 °C; = Tmax	40 °C; = Tmax	40 °C; = Tmax	40 °C; = Tmax	40 °C; = Tmax
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)

SIMATIC S7-1500 Advanced Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 521 digital input modules

Technical specifications

Article number	6AG1521-1BH00-7AB0	6AG1521-1BL00-7AB0	6AG1521-1BH50-7AA0	6AG1521-1FH00-7AA0	6AG1521-7EH00-7AB0
Based on	6ES7521-1BH00-0AB0 SIPLUS S7-1500 DI 16X24VDC HF	6ES7521-1BL00-0AB0 SIPLUS S7-1500 DI 32X24VDC HF	6ES7521-1BH50-0AAA SIPLUS S7-1500 DI 16X24VDC SRC BA	6ES7521-1FH00-0AAA SIPLUS S7-1500 DI 16X230VAC BA	6ES7521-7EH00-0AB0 SIPLUS S7-1500 DI 48VUC/125VDC HF
Relative humidity	<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 				
	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance					
Coolants and lubricants					
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems					
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea					
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

Technical specifications

Article number	6AG1521-1BH00-7AB0	6AG1521-1BL00-7AB0	6AG1521-1BH50-7AA0	6AG1521-1FH00-7AA0	6AG1521-7EH00-7AB0
Based on	6ES7521-1BH00-0AB0 SIPLUS S7-1500 DI 16X24VDC HF	6ES7521-1BL00-0AB0 SIPLUS S7-1500 DI 32X24VDC HF	6ES7521-1BH50-0AA0 SIPLUS S7-1500 DI 16X24VDC SRC BA	6ES7521-1FH00-0AA0 SIPLUS S7-1500 DI 16X230VAC BA	6ES7521-7EH00-0AB0 SIPLUS S7-1500 DI 48VUC/125VDC HF
Usage in industrial process technology					
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark					
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating					
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 522 digital output modules

Overview



- 8, 16 and 32-channel digital output modules
- For flexible adaptation of the controller to the corresponding task
- For subsequent expansion of the system with additional outputs

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information has been added.

Ordering data

Article No.

SIPLUS SM 522 digital output modules

(Extended temperature range and exposure to environmental substances)

8 outputs, 24 V DC; 2 A, isolated

6AG1522-1BF00-7AB0

16 outputs, 24 V DC; 0.5 A, isolated

6AG1522-1BH01-7AB0

32 outputs, 24 V DC; 0.5 A, isolated

6AG1522-1BL01-7AB0

8 relay outputs, 230 V AC, 5 A

6AG1522-5HF00-2AB0

16 relay outputs, 230 V AC, 2 A

6AG1522-5HH00-7AB0

8 outputs (triac), 230 V AC, 2 A

6AG1522-5FF00-7AB0

16 outputs (triac), 230 V AC, 1 A

6AG1522-5FH00-7AB0

16 outputs, 24 ... 48 V UC, 125 V DC, 0.5 A, isolated

6AG1522-5EH00-7AB0

Accessories

SIPLUS S7-1500 U connector

Spare part for connecting I/O modules; self-assembling backplane bus; 5 pieces per packaging unit; with conformal coating, -40...+70 °C

6AG1590-0AA00-7AA0

Other accessories

See SIMATIC S7-1500, SM 522 digital output modules, page 4/182

Technical specifications

Article number	6AG1522-1BF00-7AB0	6AG1522-1BH01-7AB0	6AG1522-1BL01-7AB0	6AG1522-5EH00-7AB0
Based on	6ES7522-1BF00-0AB0 SIPLUS S7-1500 DQ 8X24VDC/2A HF	6ES7522-1BH01-0AB0 SIPLUS S7-1500 DQ 16X24VDC/0.5A HF	6ES7522-1BL01-0AB0 SIPLUS S7-1500 DQ 32X24VDC/0.5A HF	6ES7522-5EH00-0AB0 SIPLUS S7-1500 DQ 16X48VUC/125VDC ST
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax; > +60 °C Number of simultaneously controllable outputs max. 8x 0.5 A, max. total current per group 2 A	70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax > 60 °C max. aggregate current 2 A per group	70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax > 60 °C max. aggregate current 2 A per group	70 °C; = Tmax; > +60 °C max. 0.25 A per output
• vertical installation, min.	-40 °C; = Tmin			
• vertical installation, max.	40 °C; = Tmax			
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air

Technical specifications

Article number	6AG1522-1BF00-7AB0	6AG1522-1BH01-7AB0	6AG1522-1BL01-7AB0	6AG1522-5EH00-7AB0
Based on	6ES7522-1BF00-0AB0 SIPLUS S7-1500 DQ 8X24VDC/2A HF	6ES7522-1BH01-0AB0 SIPLUS S7-1500 DQ 16X24VDC/0.5A HF	6ES7522-1BL01-0AB0 SIPLUS S7-1500 DQ 32X24VDC/0.5A HF	6ES7522-5EH00-0AB0 SIPLUS S7-1500 DQ 16x48VUC/125VDC ST
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

I/O modules

SIPLUS digital modules

SIPLUS SM 522 digital output modules

Technical specifications

Article number	6AG1522-5HH00-7AB0	6AG1522-5HF00-2AB0	6AG1522-5FF00-7AB0	6AG1522-5FH00-7AB0
Based on	6ES7522-5HH00-0AB0 SIPLUS S7-1500 DQ 16x230VAC 2A RLY	6ES7522-5HF00-0AB0 SIPLUS S7-1500 DQ 8X230VAC/5A ST (RELAY)	6ES7522-5FF00-0AB0 SIPLUS S7-1500 DQ 8X230VAC/2A ST (TRIAC)	6ES7522-5FH00-0AB0 SIPLUS S7-1500 DQ 16x230VAC 1A ST TRIAC
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-25 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• horizontal installation, max.	70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax > 60 °C max. 8 outputs (no adjacent points)	60 °C; = Tmax	70 °C; = Tmax; > +60 °C number of simultaneously controllable outputs max. 8x 0.25 A, max. total current 2 A	70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax > 60 °C max. 4 A aggregate current per module, max. 0.25 A per output
• vertical installation, min.	-40 °C; = Tmin; Startup @ -25 °C	-25 °C; = Tmin	-40 °C; = Tmin	-40 °C; = Tmin; Startup @ -25 °C
• vertical installation, max.	40 °C	40 °C; = Tmax	40 °C; = Tmax	60 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

Technical specifications

Article number	6AG1522-5HH00-7AB0	6AG1522-5HF00-2AB0	6AG1522-5FF00-7AB0	6AG1522-5FH00-7AB0
Based on	6ES7522-5HH00-0AB0 SIPLUS S7-1500 DQ 16x230VAC 2A RLY	6ES7522-5HF00-0AB0 SIPLUS S7-1500 DQ 8X230VAC/5A ST (RELAY)	6ES7522-5FF00-0AB0 SIPLUS S7-1500 DQ 8X230VAC/2A ST (TRIAC)	6ES7522-5FH00-0AB0 SIPLUS S7-1500 DQ 16x230VAC 1A ST TRIAC
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

I/O modules

Analog modules

SM 531 analog input modules

Overview



- 4, 8 or 16-channel analog input modules
- Optionally with extremely short conversion times
- For the connection of analog sensors without additional amplifiers
- Even solves more complex automation tasks

4

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SM 531 analog input modules		SIMATIC S7-1500, analog input module AI 8xU/I HF	6ES7531-7NF00-0AB0
SIMATIC S7-1500, analog input module AI 4xU/I/RTD/TC ST 16-bit resolution, accuracy 0.3%, 4 channels in groups of 4, 2 channels for RTD measurement, common mode voltage 10 V; diagnostics; hardware interrupts; supplied with push-in front connector, infeed element, shielding bracket, and shield terminal	6ES7531-7QD00-0AB0	Up to 24-bit resolution, accuracy 0.1%, 8 channels in groups of 1, common mode voltage: 30 V AC/60 V DC, diagnostics; hardware interrupts measured values scalable, measuring range adaptation, calibration in RUN mode; delivery including infeed element, shielding bracket and shield terminal: order front connectors (screw terminals or push-in) separately	
SIMATIC S7-1500, analog input module, AI 8xU/I/RTD BA 16-bit resolution, accuracy 0.5%, 8 channels in groups of 8, 4 V DC common mode voltage, diagnostics, hardware interrupts; delivery including infeed element, shielding bracket and shield terminal: order front connectors (screw terminals or push-in) separately	6ES7531-7QF00-0AB0	SIMATIC S7-1500, analog input module AI 8xU/R/RTD/TC HF 16-bit resolution, up to 21-bit resolution for RTD and TC, accuracy 0.1%, 8 channels in groups of 1, common mode voltage: 30 V AC/60 V DC, diagnostics; hardware interrupts scalable temperature measuring range, type C thermocouple, calibration in RUN mode; delivery including infeed element, shielding bracket and shield terminal: order front connectors (screw terminals or push-in) separately	6ES7531-7PF00-0AB0
SIMATIC S7-1500, analog input module AI 8xU/I HS 16-bit resolution, accuracy 0.3%, 8 channels in groups of 8, common mode voltage 10 V; diagnostics; hardware interrupts 8 channels in 0.0625 ms oversampling; delivery including infeed element, shielding bracket and shield terminal: order front connectors (screw terminals or push-in) separately	6ES7531-7NF10-0AB0	SIMATIC S7-1500, analog input module, AI 16xU BA 16-bit resolution, accuracy 0.5%, 16 channels in groups of 16, 4 V DC common mode voltage, diagnostics, hardware interrupts; delivery including infeed element, shielding bracket and shield terminal: order front connectors (screw terminals or push-in) separately	6ES7531-7LH00-0AB0
SIMATIC S7-1500, analog input module AI 8xU/I/RTD/TC ST 16-bit resolution, accuracy 0.3%, 8 channels in groups of 8, 4 channels for RTD measurement, common mode voltage 10 V; diagnostics; hardware interrupts; supplied with infeed element, shielding bracket and shield terminal order front connectors (screw terminals or push-in) separately	6ES7531-7KF00-0AB0	SIMATIC S7-1500, analog input module, AI 16xl BA 16-bit resolution, accuracy 0.5%, 16 channels in groups of 16, 4 V DC common mode voltage, diagnostics, hardware interrupts; delivery including infeed element, shielding bracket and shield terminal: order front connectors (screw terminals or push-in) separately	6ES7531-7MH00-0AB0

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, analog input module AI 8xHART HF Accuracy 0.1%, 8 channels in groups of 4, common mode voltage: 30 V AC/60 V DC, diagnostics; hardware interrupts for calibration in RUN mode; delivery including infeed element, shielding bracket and shield terminal	6ES7531-7TF00-0AB0	SIMATIC S7-1500, spare part front door for 25 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit	6ES7528-0AA00-0AA0
Accessories		Shielding set I/O	
Front connectors		SIMATIC S7-1500, spare part, shielding set Consisting of: * shield terminal, * shielding bracket, * 24 V DC infeed element with screw-type connection system, suitable for analog and technology modules of the S7-1500, suitable for all front connectors for 35 mm wide modules 5 units per packing unit	6ES7590-5CA00-0AA0
SIMATIC S7-1500, front connector screw-type connection system 40-pin for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1AM00-0XB0	SIMATIC S7-1500, spare part, shielding set Consisting of: * 4x shield terminal, * 4x shielding bracket, * 4x 24 V DC infeed element with push-in technology, suitable for analog modules, technology modules and compact CPU of the S7-1500, suitable for all front connectors for 25 mm wide modules	6ES7590-5CA10-0XA0
SIMATIC S7-1500, front connector with push-in technology 40-pin, for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1BM00-0XB0	SIMATIC S7-1500, spare part shield terminal Suitable for analog modules and technology modules with 35 mm width without shielding bracket and without 24 V DC infeed element, 10 units per packing unit	6ES7590-5BA00-0AA0
SIMATIC S7-1500, front connector with push-in technology 40-pin for 25 mm wide modules and compact CPUs of the S7-1500, incl. cable tie	6ES7592-1BM00-0XA0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
DIN A4 labeling sheets		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7-1500, labeling sheets for 35 mm wide S7-1500 modules Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules	6ES7592-2AX00-0AA0		
SIMATIC S7-1500, labeling sheets for 25 mm wide S7-1500 modules and compact CPUs Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 20 strips per packing unit sufficient for 200 modules	6ES7592-1AX00-0AA0		
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0		
Universal front door for I/O modules			
SIMATIC S7-1500, spare part front door for 35 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit	6ES7528-0AA00-7AA0		

SIMATIC S7-1500 Advanced Controllers

I/O modules

Analog modules

SM 531 analog input modules

Technical specifications

Article number	6ES7531-7QD00-0AB0	6ES7531-7QF00-0AB0	6ES7531-7KF00-0AB0	6ES7531-7NF10-0AB0	6ES7531-7NF00-0AB0
	S7-1500, AI 4xU/I/RTD/TC ST	S7-1500, AI 8xU/I/R/RTD BA	S7-1500, AI 8xU/I/RTD/TC ST	S7-1500, AI 8xU/I HS	S7-1500, AI 8xU/I HF
General information					
Product type designation	AI 4xU/I/RTD/TC ST	AI 8xU/I/R/RTD BA	AI 8xU/I/RTD/TC ST	AI 8xU/I HS	AI 8xU/I HF
Product function					
• Isochronous mode	No		No	Yes	No
• Prioritized startup	No	No	No	Yes	Yes
• Measuring range scalable	No		No	No	No
• Scalable measured values	No		No	No	Yes
• Adjustment of measuring range	No		No	No	Yes
Engineering with					
• STEP 7 TIA Portal configurable/ integrated from version	V13 / V13.0.2	V15.1 / V16	V12 / V12	V14 / -	V14 / -
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1
• PROFINET from GSD version/ GSD revision	V2.3 / -	V2.3 / -	V2.3 / -	V2.3 / -	V2.3 / -
Operating mode					
• Oversampling	No	No	No	Yes	No
• MSI	Yes	Yes	Yes	Yes	Yes
Supply voltage					
Rated value (DC)	24 V		24 V	24 V	24 V
Reverse polarity protection	Yes		Yes	Yes	Yes
Analog inputs					
Number of analog inputs	4	8	8	8	8
• For current measurement	4	8	8	8	8
• For voltage measurement	4	8	8	8	8
• For resistance/resistance thermometer measurement	2	8	4		
• For thermocouple measurement	4		8		
permissible input voltage for voltage input (destruction limit), max.	28.8 V	12 V; 12 V continuous, 30 V for max. 1 s	28.8 V	28.8 V	28.8 V
permissible input current for current input (destruction limit), max.	40 mA	40 mA	40 mA	40 mA	40 mA
Constant measurement current for resistance-type transmitter, typ.	150 Ohm, 300 Ohm, 600 Ohm, Pt100, Pt200, Ni100: 1.25 mA; 6 000 Ohm, Pt500, Pt1000, Ni1000, LG-Ni1000: 0.625 mA; PTC: 0.472 mA	230 ... 370 μ A	150 Ohm, 300 Ohm, 600 Ohm, Pt100, Pt200, Ni100: 1.25 mA; 6 000 Ohm, Pt500, Pt1000, Ni1000, LG-Ni1000: 0.625 mA; PTC: 0.472 mA		
Technical unit for temperature measurement adjustable	Yes; °C/°F/K	Yes; °C/°F/K	Yes; °C/°F/K		
Analog input with oversampling	No				
Standardization of measured values	No				
Input ranges (rated values), voltages					
• 0 to +5 V	No	No	No	No	No
• 0 to +10 V	No	No	No	No	No
• 1 V to 5 V	Yes	Yes	Yes	Yes	Yes
• -1 V to +1 V	Yes	Yes	Yes		
• -10 V to +10 V	Yes	Yes	Yes	Yes	Yes
• -2.5 V to +2.5 V	Yes	No	Yes	No	Yes
• -25 mV to +25 mV	No	No	No	No	No
• -250 mV to +250 mV	Yes	No	Yes	No	No
• -5 V to +5 V	Yes	Yes	Yes	Yes	Yes
• -50 mV to +50 mV	Yes	Yes	Yes	No	No
• -500 mV to +500 mV	Yes	Yes	Yes	No	No
• -80 mV to +80 mV	Yes	No	Yes	No	No

Technical specifications

Article number	6ES7531-7QD00-0AB0 S7-1500, AI 4xU/I/RTD/TC ST	6ES7531-7QF00-0AB0 S7-1500, AI 8xU/I/R/RTD BA	6ES7531-7KF00-0AB0 S7-1500, AI 8xU/I/RTD/TC ST	6ES7531-7NF10-0AB0 S7-1500, AI 8xU/I HS	6ES7531-7NF00-0AB0 S7-1500, AI 8xU/I HF
Input ranges (rated values), currents					
• 0 to 20 mA	Yes	Yes	Yes	Yes	Yes
• -20 mA to +20 mA	Yes	Yes	Yes	Yes	Yes
• 4 mA to 20 mA	Yes	Yes	Yes	Yes	Yes
Input ranges (rated values), thermocouples					
• Type B	Yes	No	Yes	No	No
• Type C	No	No	No	No	No
• Type E	Yes	No	Yes	No	No
• Type J	Yes	No	Yes	No	No
• Type K	Yes	No	Yes	No	No
• Type L	No	No	No	No	No
• Type N	Yes	No	Yes	No	No
• Type R	Yes	No	Yes	No	No
• Type S	Yes	No	Yes	No	No
• Type T	Yes	No	Yes	No	No
• Type U	No	No	No	No	No
• Type TXK/TXK(L) to GOST	No	No	No	No	No
Input ranges (rated values), resistance thermometer					
• Cu 10	No	No	No	No	No
• Cu 10 according to GOST	No	No	No	No	No
• Cu 50	No	No	No	No	No
• Cu 50 according to GOST	No	No	No	No	No
• Cu 100	No	No	No	No	No
• Cu 100 according to GOST	No	No	No	No	No
• Ni 10	No	No	No	No	No
• Ni 10 according to GOST	No	No	No	No	No
• Ni 100	Yes; Standard/climate	Yes; Standard/climate	Yes; Standard/climate	No	No
• Ni 100 according to GOST	No	No	No	No	No
• Ni 1000	Yes; Standard/climate	Yes; Standard/climate	Yes; Standard/climate	No	No
• Ni 1000 according to GOST	No	No	No	No	No
• LG-Ni 1000	Yes; Standard/climate	Yes; Standard/climate	Yes; Standard/climate	No	No
• Ni 120	No	No	No	No	No
• Ni 120 according to GOST	No	No	No	No	No
• Ni 200	No	No	No	No	No
• Ni 200 according to GOST	No	No	No	No	No
• Ni 500	No	No	No	No	No
• Ni 500 according to GOST	No	No	No	No	No
• Pt 10	No	No	No	No	No
• Pt 10 according to GOST	No	No	No	No	No
• Pt 50	No	No	No	No	No
• Pt 50 according to GOST	No	No	No	No	No
• Pt 100	Yes; Standard/climate	Yes; Standard/climate	Yes; Standard/climate	No	No
• Pt 100 according to GOST	No	No	No	No	No
• Pt 1000	Yes; Standard/climate	Yes; Standard/climate	Yes; Standard/climate	No	No
• Pt 1000 according to GOST	No	No	No	No	No
• Pt 200	Yes; Standard/climate	No	Yes; Standard/climate	No	No
• Pt 200 according to GOST	No	No	No	No	No
• Pt 500	Yes; Standard/climate	No	Yes; Standard/climate	No	No
• Pt 500 according to GOST	No	No	No	No	No

SIMATIC S7-1500 Advanced Controllers

I/O modules

Analog modules

SM 531 analog input modules

Technical specifications

Article number	6ES7531-7QD00-0AB0	6ES7531-7QF00-0AB0	6ES7531-7KF00-0AB0	6ES7531-7NF10-0AB0	6ES7531-7NF00-0AB0
	S7-1500, AI 4xU/I/RTD/TC ST	S7-1500, AI 8xU/I/R/RTD BA	S7-1500, AI 8xU/I/RTD/TC ST	S7-1500, AI 8xU/I HS	S7-1500, AI 8xU/I HF
Input ranges (rated values), resistors					
• 0 to 150 ohms	Yes	No	Yes	No	No
• 0 to 300 ohms	Yes	No	Yes	No	No
• 0 to 600 ohms	Yes	Yes	Yes	No	No
• 0 to 3000 ohms	No	No	No	No	No
• 0 to 6000 ohms	Yes	Yes	Yes	No	No
• PTC	Yes	Yes	Yes	No	No
Thermocouple (TC)					
Temperature compensation					
- parameterizable	Yes		Yes		
Cable length					
• shielded, max.	800 m; for U/I, 200 m for R/RTD, 50 m for TC	200 m; 50 m at 50 mV	800 m; for U/I, 200 m for R/RTD, 50 m for TC	800 m	800 m
Analog value generation for the inputs					
Integration and conversion time/resolution per channel					
• Resolution with overrange (bit including sign), max.	16 bit	16 bit	16 bit	16 bit	24 bit; When using the function "Scaling of the measured values" or "Measuring range adaptation" (32 bit REAL format); 16 bit when using the S7 format (16 bit INTEGER)
• Integration time, parameterizable	Yes	Yes	Yes		Yes
• Integration time (ms)	2,5 / 16,67 / 20 / 100 ms	2,5 / 16,67 / 20 / 100 ms	2,5 / 16,67 / 20 / 100 ms		Fast mode: 2.5 / 16.67 / 20 / 100 ms, standard mode: 7.5 / 50 / 60 / 300 ms
• Basic conversion time, including integration time (ms)	9 / 23 / 27 / 107 ms	10 / 24 / 27 / 107 ms	9 / 23 / 27 / 107 ms		Fast mode: 4 / 18 / 22 / 102 ms; Standard mode: 9 / 52 / 62 / 302 ms
- additional conversion time for resistance measurement	150 ohm, 300 ohm, 600 ohm, Pt100, Pt200, Ni100: 2 ms, 6000 ohm, Pt500, Pt1000, Ni1000, LG-Ni1000, PTC: 4 ms	8 ms	150 ohm, 300 ohm, 600 ohm, Pt100, Pt200, Ni100: 2 ms, 6000 ohm, Pt500, Pt1000, Ni1000, LG-Ni1000, PTC: 4 ms		
• Interference voltage suppression for interference frequency f_1 in Hz	400 / 60 / 50 / 10	400 / 60 / 50 / 10 Hz	400 / 60 / 50 / 10 Hz		400 / 60 / 50 / 10 Hz
• Basic execution time of the module (all channels released)				62.5 μ s; independent of number of activated channels	Corresponds to the channel with the highest basic conversion time
Smoothing of measured values					
• parameterizable	Yes	Yes	Yes	Yes	Yes
Encoder					
Connection of signal encoders					
• for voltage measurement	Yes	Yes	Yes	Yes	Yes
• for current measurement as 2-wire transducer	Yes	Yes; with external supply	Yes	Yes	Yes; with external transmitter supply
- Burden of 2-wire transmitter, max.	820 Ω		820 Ω	820 Ω	
• for current measurement as 4-wire transducer	Yes	Yes	Yes	Yes	Yes
• for resistance measurement with two-wire connection	Yes; Only for PTC	Yes; Only for PTC	Yes; Only for PTC	No	No
• for resistance measurement with three-wire connection	Yes; All measuring ranges except PTC; internal compensation of the cable resistances	Yes; All measuring ranges except PTC; internal compensation of the cable resistances	Yes; All measuring ranges except PTC; internal compensation of the cable resistances	No	No
• for resistance measurement with four-wire connection	Yes; All measuring ranges except PTC		Yes; All measuring ranges except PTC	No	No

Technical specifications

Article number	6ES7531-7QD00-0AB0	6ES7531-7QF00-0AB0	6ES7531-7KF00-0AB0	6ES7531-7NF10-0AB0	6ES7531-7NF00-0AB0
	S7-1500, AI 4xU/I/RTD/TC ST	S7-1500, AI 8xU/I/R/RTD BA	S7-1500, AI 8xU/I/RTD/TC ST	S7-1500, AI 8xU/I HS	S7-1500, AI 8xU/I HF
Errors/accuracies					
Basic error limit (operational limit at 25 °C)					
• Voltage, relative to input range, (+/-)	0.1 %	0.3 %	0.1 %	0.2 %	0.05 %
• Current, relative to input range, (+/-)	0.1 %	0.3 %	0.1 %	0.2 %	0.05 %
• Resistance, relative to input range, (+/-)	0.1 %	0.3 %	0.1 %		
• Resistance thermometer, relative to input range, (+/-)	0.1 %; Ptxxx standard: ±0.7 K, Ptxxx climate: ±0.2 K, Nixxx standard: ±0.3 K, Nixxx climate: ±0.15 K	Ptxxx Standard: ±1.0 K, Ptxxx Climate: ±0.5 K, Nixxx Standard: ±0.5 K, Nixxx Climate: ±0.5 K	Ptxxx standard: ±0.7 K, Ptxxx climate: ±0.2 K, Nixxx standard: ±0.3 K, Nixxx climate: ±0.15 K		
• Thermocouple, relative to input range, (+/-)	0.1 %; Type B: > 600 °C ±1.7 K, type E: > -200 °C ±0.7 K, type J: > -210 °C ±0.8 K, type K: > -200 °C ±1.2 K, type N: > -200 °C ±1.2 K, type R: > 0 °C ±1.9 K, type S: > 0 °C ±1.9 K, type T: > -200 °C ±0.8 K		Type B: > 600 °C ±1.7 K, type E: > -200 °C ±0.7 K, type J: > -210 °C ±0.8 K, type K: > -200 °C ±1.2 K, type N: > -200 °C ±1.2 K, type R: > 0 °C ±1.9 K, type S: > 0 °C ±1.9 K, type T: > -200 °C ±0.8 K		
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, $f1 =$ interference frequency					
• Series mode interference (peak value of interference < rated value of input range), min.	40 dB	40 dB	40 dB		80 dB; in the Standard operating mode, 40 dB in the Fast operating mode
• Common mode voltage, max.	10 V	4 V	10 V	10 V	60 V DC/30 V AC
• Common mode interference, min.	60 dB	60 dB	60 dB	50 dB at 400 Hz; 60 dB at 60 / 50 / 10 Hz	80 dB
Isochronous mode					
Filtering and processing time (TCI), min.				80 µs	
Bus cycle time (TDP), min.				250 µs	
Interrupts/diagnostics/status information					
Diagnostics function	Yes	Yes	Yes	Yes	Yes
Alarms					
• Diagnostic alarm	Yes	Yes	Yes	Yes	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case	Yes; two upper and two lower limit values in each case	Yes; two upper and two lower limit values in each case	Yes; two upper and two lower limit values in each case	Yes; two upper and two lower limit values in each case
Diagnoses					
• Monitoring the supply voltage	Yes	No	Yes	Yes	Yes
• Wire-break	Yes; Only for 1 to 5 V, 4 to 20 mA, TC, R, and RTD	Yes; Only for 1 ... 5 V, 4 ... 20 mA, R, and RTD	Yes; Only for 1 to 5 V, 4 to 20 mA, TC, R, and RTD	Yes; only for 1 ... 5 V and 4 ... 20 mA	Yes; only for 1 ... 5 V and 4 ... 20 mA
• Short-circuit		No			
• Group error		No			
• Overflow/underflow	Yes	Yes	Yes	Yes	Yes
Diagnostics indication LED					
• RUN LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• MAINT LED		No			
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED	No	Yes; green LED	Yes; green LED	Yes; green LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED

SIMATIC S7-1500 Advanced Controllers

I/O modules

Analog modules

SM 531 analog input modules

Technical specifications

Article number	6ES7531-7QD00-0AB0	6ES7531-7QF00-0AB0	6ES7531-7KF00-0AB0	6ES7531-7NF10-0AB0	6ES7531-7NF00-0AB0
	S7-1500, AI 4xU/I/RTD/TC ST	S7-1500, AI 8xU/I/R/RTD BA	S7-1500, AI 8xU/I/RTD/TC ST	S7-1500, AI 8xU/I HS	S7-1500, AI 8xU/I HF
Potential separation					
Potential separation channels					
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes
Standards, approvals, certificates					
Suitable for applications according to AMS 2750			Yes; Declaration of Conformity, see online support entry 109757262		
Suitable for applications according to CQI-9			Yes; Based on AMS 2750 E		
product functions / security / header					
signed firmware update		No	No		
data integrity	No	No	No	No	No
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-25 °C; From FS03	-30 °C; From FS05	-25 °C; From FS08	-25 °C; From FS02	-30 °C; From FS02
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-25 °C; From FS03	-30 °C; From FS05	-25 °C; From FS08	-25 °C; From FS02	-30 °C; From FS02
• vertical installation, max.	40 °C	40 °C	40 °C	40 °C	40 °C
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions					
Width	25 mm	35 mm	35 mm	35 mm	35 mm
Height	147 mm	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm	129 mm
Weights					
Weight, approx.	210 g	250 g	310 g	300 g	280 g
Other					
Note:	Supplied incl. 40-pole push-in front connectors. Additional basic error and noise for integration time = 2.5 ms: Voltage: ±250 mV (±0.02%), ±80 mV (±0.05%), ±50 mV (±0.05%); resistance: 150 Ohms (±0.02%); resistance thermometer: Pt100 climate: ±0.08 K, Ni100 climate: ±0.08 K; thermoelement: Type B, R, S: ±3 K, type E, J, K, N, T: ±1 K		Additional basic error and noise for integration time = 2.5 ms: Voltage: ±250 mV (±0.02%), ±80 mV (±0.05%), ±50 mV (±0.05%); resistance: 150 ohms ±0.02%; resistance thermometer: Pt100 climate: ±0.08 K, Ni100 climate: ±0.08 K; thermocouple: Type B, R, S: ±3 K, type E, J, K, N, T: ±1 K		

Article number	6ES7531-7LH00-0AB0	6ES7531-7MH00-0AB0
	S7-1500, AI 16xU BA	S7-1500, AI 16xl BA
General information		
Product type designation	AI 16xU BA	AI 16xl BA
Product function		
• Isochronous mode	No	No
• Prioritized startup	No	No
• Measuring range scalable	No	No
• Scalable measured values	No	No
• Adjustment of measuring range	No	No

Technical specifications

Article number	6ES7531-7LH00-0AB0 S7-1500, AI 16xU BA	6ES7531-7MH00-0AB0 S7-1500, AI 16xI BA
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	V16 with HSP 312 / V17	V16 with HSP 312 / V17
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1	V1.0 / V5.1
• PROFINET from GSD version/ GSD revision	V2.3 / -	V2.3 / -
Operating mode		
• Oversampling	No	No
• MSI	Yes	Yes
Analog inputs		
Number of analog inputs	16	16
• For current measurement		16
• For voltage measurement	16	
permissible input voltage for voltage input (destruction limit), max.	12 V; 12 V continuous, 30 V for max. 1 s	
permissible input current for current input (destruction limit), max.		40 mA
Input ranges (rated values), voltages		
• 0 to +5 V	No	
• 0 to +10 V	No	
• 1 V to 5 V	Yes	
• -1 V to +1 V	Yes	
• -10 V to +10 V	Yes	
• -2.5 V to +2.5 V	No	
• -25 mV to +25 mV	No	
• -250 mV to +250 mV	No	
• -5 V to +5 V	Yes	
• -50 mV to +50 mV	No	
• -500 mV to +500 mV	No	
• -80 mV to +80 mV	No	
Input ranges (rated values), currents		
• 0 to 20 mA		Yes
• -20 mA to +20 mA		Yes
• 4 mA to 20 mA		Yes
Cable length		
• shielded, max.	200 m	800 m
Analog value generation for the inputs		
Integration and conversion time/resolution per channel		
• Resolution with overrange (bit including sign), max.	16 bit	16 bit
• Integration time, parameterizable	Yes	Yes
• Integration time (ms)	2,5 / 16,67 / 20 / 100 ms	2,5 / 16,67 / 20 / 100 ms
• Basic conversion time, including integration time (ms)	10 / 24 / 27 / 107 ms	10 / 24 / 27 / 107 ms
• Interference voltage suppression for interference frequency f1 in Hz	400 / 60 / 50 / 10 Hz	400 / 60 / 50 / 10 Hz
Smoothing of measured values		
• parameterizable	Yes	Yes

SIMATIC S7-1500 Advanced Controllers

I/O modules

Analog modules

SM 531 analog input modules

Technical specifications

Article number	6ES7531-7LH00-0AB0 S7-1500, AI 16xU BA	6ES7531-7MH00-0AB0 S7-1500, AI 16xI BA
Encoder		
Connection of signal encoders		
<ul style="list-style-type: none"> for voltage measurement for current measurement as 2-wire transducer for current measurement as 4-wire transducer for resistance measurement with two-wire connection for resistance measurement with three-wire connection for resistance measurement with four-wire connection 	Yes	<ul style="list-style-type: none"> No Yes; with external supply Yes No No No
Errors/accuracies		
Basic error limit (operational limit at 25 °C)		
<ul style="list-style-type: none"> Voltage, relative to input range, (+/-) Current, relative to input range, (+/-) 	0.3 %	0.3 %
Interference voltage suppression for $f = n \times (f_1 \pm 1 \%)$, $f_1 =$ interference frequency		
<ul style="list-style-type: none"> Series mode interference (peak value of interference < rated value of input range), min. Common mode voltage, max. Common mode interference, min. 	40 dB 4 V 60 dB	40 dB 4 V 60 dB
Interrupts/diagnostics/status information		
Diagnostics function	Yes	Yes
Alarms		
<ul style="list-style-type: none"> Diagnostic alarm Limit value alarm 	Yes Yes; two upper and two lower limit values in each case	Yes Yes; two upper and two lower limit values in each case
Diagnoses		
<ul style="list-style-type: none"> Monitoring the supply voltage Wire-break Short-circuit Group error Overflow/underflow 	No Yes; Only for 1 ... 5 V No No Yes	No Yes; Only for 4 ... 20 mA No No Yes
Diagnostics indication LED		
<ul style="list-style-type: none"> RUN LED ERROR LED MAINT LED Monitoring of the supply voltage (PWR-LED) Channel status display for channel diagnostics for module diagnostics 	Yes; green LED Yes; red LED No No Yes; green LED Yes; red LED Yes; red LED	Yes; green LED Yes; red LED No No Yes; green LED Yes; red LED Yes; red LED
Potential separation		
Potential separation channels		
<ul style="list-style-type: none"> between the channels and backplane bus 	Yes	Yes
product functions / security / header		
data integrity	No	No
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> horizontal installation, min. horizontal installation, max. vertical installation, min. vertical installation, max. 	-30 °C 60 °C -30 °C 40 °C	-30 °C 60 °C -30 °C 40 °C
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. 	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual

Technical specifications

Article number	6ES7531-7LH00-0AB0 S7-1500, AI 16xU BA	6ES7531-7MH00-0AB0 S7-1500, AI 16xI BA
Dimensions		
Width	35 mm	35 mm
Height	147 mm	147 mm
Depth	129 mm	129 mm
Weights		
Weight, approx.	250 g	250 g
Article number	6ES7531-7PF00-0AB0 S7-1500, AI 8 X U/R/RTD/TC HF	6ES7531-7TF00-0AB0 S7-1500, AI 8xHART HF
General information		
Product type designation	AI 8xU/R/RTD/TC HF	AI 8xHART HF
Product function		
• Isochronous mode	No	No
• Prioritized startup	Yes	No
• Measuring range scalable	Yes	No
• Scalable measured values	No	No
• Adjustment of measuring range	No	No
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	V14 / -	V17/V18 with HSP 383
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1	V1.0 / V5.1
• PROFINET from GSD version/ GSD revision	V2.3 / -	V2.42 / -
Operating mode		
• Oversampling	No	No
• MSI	Yes	Yes
Supply voltage		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes	Yes
Analog inputs		
Number of analog inputs	8; Plus one additional RTD (reference) channel	8
• For current measurement		8
• For voltage measurement	8; Plus one additional RTD (reference) channel	
• For resistance/resistance thermometer measurement	8; Plus one additional RTD (reference) channel	
• For thermocouple measurement	8; Plus one additional RTD (reference) channel	
permissible input voltage for voltage input (destruction limit), max.	20 V	
permissible input current for current input (destruction limit), max.		40 mA
Constant measurement current for resistance-type transmitter, typ.	150 Ohm, 300 Ohm, 600 Ohm, Cu10, Cu50, Cu100, Ni10, Ni100, Ni120, Ni200, Pt10, Pt50, Pt100, Pt200 climate: 1 mA; 6 kOhm, Ni500, Ni1000, LG-Ni1000, Pt200 standard, Pt500, Pt1000, PTC: 0.25 mA	
Technical unit for temperature measurement adjustable	Yes; °C/°F/K	
Input ranges (rated values), voltages		
• 0 to +5 V	No	
• 0 to +10 V	No	
• 1 V to 5 V	No	
• -1 V to +1 V	Yes	
• -10 V to +10 V	No	
• -2.5 V to +2.5 V	No	
• -25 mV to +25 mV	Yes	
• -250 mV to +250 mV	Yes	
• -5 V to +5 V	No	
• -50 mV to +50 mV	Yes	
• -500 mV to +500 mV	Yes	
• -80 mV to +80 mV	Yes	

SIMATIC S7-1500 Advanced Controllers

I/O modules

Analog modules

SM 531 analog input modules

Technical specifications

Article number	6ES7531-7PF00-0AB0	6ES7531-7TF00-0AB0
	S7-1500, AI 8 X U/R/RTD/TC HF	S7-1500, AI 8xHART HF
Input ranges (rated values), currents		
• 0 to 20 mA	No	Yes
• -20 mA to +20 mA	No	Yes
• 4 mA to 20 mA	No	Yes
Input ranges (rated values), thermocouples		
• Type B	Yes	
• Type C	Yes	
• Type E	Yes	
• Type J	Yes	
• Type K	Yes	
• Type L	No	
• Type N	Yes	
• Type R	Yes	
• Type S	Yes	
• Type T	Yes	
• Type TXK/TXK(L) to GOST	Yes	
Input ranges (rated values), resistance thermometer		
• Cu 10	Yes; Standard/climate	
• Cu 10 according to GOST	Yes; Standard/climate	
• Cu 50	Yes; Standard/climate	
• Cu 50 according to GOST	Yes; Standard/climate	
• Cu 100	Yes; Standard/climate	
• Cu 100 according to GOST	Yes; Standard/climate	
• Ni 10	Yes; Standard/climate	
• Ni 10 according to GOST	Yes; Standard/climate	
• Ni 100	Yes; Standard/climate	
• Ni 100 according to GOST	Yes; Standard/climate	
• Ni 1000	Yes; Standard/climate	
• Ni 1000 according to GOST	Yes; Standard/climate	
• LG-Ni 1000	Yes; Standard/climate	
• Ni 120	Yes; Standard/climate	
• Ni 120 according to GOST	Yes; Standard/climate	
• Ni 200	Yes; Standard/climate	
• Ni 200 according to GOST	Yes; Standard/climate	
• Ni 500	Yes; Standard/climate	
• Ni 500 according to GOST	Yes; Standard/climate	
• Pt 10	Yes; Standard/climate	
• Pt 10 according to GOST	Yes; Standard/climate	
• Pt 50	Yes; Standard/climate	
• Pt 50 according to GOST	Yes; Standard/climate	
• Pt 100	Yes; Standard/climate	
• Pt 100 according to GOST	Yes; Standard/climate	
• Pt 1000	Yes; Standard/climate	
• Pt 1000 according to GOST	Yes; Standard/climate	
• Pt 200	Yes; Standard/climate	
• Pt 200 according to GOST	Yes; Standard/climate	
• Pt 500	Yes; Standard/climate	
• Pt 500 according to GOST	Yes; Standard/climate	
Input ranges (rated values), resistors		
• 0 to 150 ohms	Yes	
• 0 to 300 ohms	Yes	
• 0 to 600 ohms	Yes	
• 0 to 3000 ohms	No	
• 0 to 6000 ohms	Yes	
• PTC	Yes	

Technical specifications

Article number	6ES7531-7PF00-0AB0 S7-1500, AI 8 X U/R/RTD/TC HF	6ES7531-7TF00-0AB0 S7-1500, AI 8xHART HF
Thermocouple (TC)		
Temperature compensation - parameterizable	Yes	
Cable length • shielded, max.	800 m; at U; 200 m at R/RTD/TC	800 m
Analog value generation for the inputs		
Integration and conversion time/resolution per channel • Resolution with overrange (bit including sign), max.	21 bit; For measuring mode RTC and TC when using the function "Scalable temperature measuring range" (32 bit REAL format); 16 bit for measuring mode R and U; 16 bit for all measuring modes when using the S7 format (16 bit INTEGER)	16 bit
• Integration time, parameterizable	Yes	Yes
• Integration time (ms)	Fast mode: 2.5 / 16.67 / 20 / 100 ms, standard mode: 7.5 / 50 / 60 / 300 ms	Fast mode: 2.5 / 16.67 / 20 / 100 ms, standard mode: 7.5 / 50 / 60 / 300 ms
• Basic conversion time, including integration time (ms)	Fast mode: 4 / 18 / 22 / 102 ms; Standard mode: 9 / 52 / 62 / 302 ms	Fast Mode: 7 / 22 / 25 / 106 ms; Standard Mode: 12 / 55 / 65 / 308 ms
• Interference voltage suppression for interference frequency f1 in Hz	400 / 60 / 50 / 10 Hz	10 / 50 / 60 / 400 Hz
• Basic execution time of the module (all channels released)	Corresponds to the channel with the highest basic conversion time	channel 0 and 4, 1 and 5, etc. measure in pairs simultaneously. The slower channel of each pair determines the basic execution time of the channel pair. The basic execution time of the module is calculated by adding the basic conversion times of the channel pairs.
Smoothing of measured values • parameterizable	Yes	Yes
Encoder		
Connection of signal encoders		
• for voltage measurement	Yes	No
• for current measurement as 2-wire transducer - Burden of 2-wire transmitter, max.	No	Yes 820 Ω; at 24 V input voltage
• for current measurement as 4-wire transducer	No	Yes
• for resistance measurement with two-wire connection	Yes	No
• for resistance measurement with three-wire connection	Yes; All measuring ranges except PTC; internal compensation of the cable resistances	No
• for resistance measurement with four-wire connection	Yes; All measuring ranges except PTC	No
Errors/accuracies		
Basic error limit (operational limit at 25 °C) • Voltage, relative to input range, (+/-)	0.05 %	0.05 %; without HART communication
• Current, relative to input range, (+/-)		
• Resistance, relative to input range, (+/-)	0.05 %	
• Resistance thermometer, relative to input range, (+/-)	Cuxxx Standard: ±0.3 K, Cuxxx Klima: ±0.2 K, Ptxxx Standard: ±0.5 K, Ptxxx Klima: ±0.2 K, Nixxx Standard: ±0.3 K, Nixxx Klima: ±0.15 K	
• Thermocouple, relative to input range, (+/-)	Type B: > 600 °C ±1 K, Type E: > -200 °C ±0.5 K, Type J: > -210 °C ±0.5 K, Type K: > -200 °C ±1 K, Type N: > -200 °C ±1 K, Type R: > 0 °C ±1 K, Type S: > 0 °C ±1 K, Type T: > -200 °C ±0.5 K, Type C: ±2 K, Type TXK/TXK(L): ±0.5 K	
Influence of a HART signal modulated on the input signal in relation to input range • error occurred at interference frequency suppression: 400 Hz		0.19 %; in the Standard operating mode, 0.55 % in the Fast operating mode
• error occurred at interference frequency suppression: 60 Hz		0.05 %; in the Standard operating mode, 0.1 % in the Fast operating mode
• error occurred at interference frequency suppression: 50 Hz		0.04 %; in the Standard operating mode, 0.09 % in the Fast operating mode
• error occurred at interference frequency suppression: 10 Hz		0.02 %; in the Standard operating mode, 0.03 % in the Fast operating mode

SIMATIC S7-1500 Advanced Controllers

I/O modules

Analog modules

SM 531 analog input modules

Technical specifications

Article number	6ES7531-7PF00-0AB0 S7-1500, AI 8 X U/R/RTD/TC HF	6ES7531-7TF00-0AB0 S7-1500, AI 8xHART HF
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, f1 = interference frequency		
<ul style="list-style-type: none"> Series mode interference (peak value of interference < rated value of input range), min. 	80 dB; in the Standard operating mode, 40 dB in the Fast operating mode	80 dB; in the Standard operating mode, 40 dB in the Fast operating mode
<ul style="list-style-type: none"> Common mode voltage, max. 	60 V DC/30 V AC	60 V DC/30 V AC
<ul style="list-style-type: none"> Common mode interference, min. 	80 dB	80 dB
Interrupts/diagnostics/ status information		
Diagnostics function	Yes	Yes
Alarms		
<ul style="list-style-type: none"> Diagnostic alarm 	Yes	Yes
<ul style="list-style-type: none"> Limit value alarm 	Yes; two upper and two lower limit values in each case	Yes; two upper and two lower limit values in each case
Diagnoses		
<ul style="list-style-type: none"> Monitoring the supply voltage 	Yes	Yes
<ul style="list-style-type: none"> Wire-break 	Yes; Only with TC, R, RTD	Yes; With 4 mA to 20 mA, channel by channel
<ul style="list-style-type: none"> Overflow/underflow 	Yes	Yes
Diagnostics indication LED		
<ul style="list-style-type: none"> RUN LED 	Yes; green LED	Yes; green LED
<ul style="list-style-type: none"> ERROR LED 	Yes; red LED	Yes; red LED
<ul style="list-style-type: none"> Monitoring of the supply voltage (PWR-LED) 	Yes; green LED	Yes; green LED
<ul style="list-style-type: none"> Channel status display 	Yes; green LED	Yes; green LED
<ul style="list-style-type: none"> for channel diagnostics 	Yes; red LED	Yes; red LED
<ul style="list-style-type: none"> for module diagnostics 	Yes; red LED	Yes; red LED
Potential separation		
Potential separation analog inputs		
<ul style="list-style-type: none"> between the channels and backplane bus 		Yes
Potential separation channels		
<ul style="list-style-type: none"> between the channels and backplane bus 	Yes	Yes
Standards, approvals, certificates		
Suitable for applications according to AMS 2750	Yes; Declaration of Conformity, see online support entry 109757262	
Suitable for applications according to CQI-9	Yes; Based on AMS 2750 E	
product functions / security / header		
signed firmware update		No
data integrity	No	No
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> horizontal installation, min. 	-30 °C; From FS02	-30 °C
<ul style="list-style-type: none"> horizontal installation, max. 	60 °C	60 °C
<ul style="list-style-type: none"> vertical installation, min. 	-30 °C; From FS02	-30 °C
<ul style="list-style-type: none"> vertical installation, max. 	40 °C	40 °C
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. 		5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions		
Width	35 mm	35 mm
Height	147 mm	147 mm
Depth	129 mm	129 mm
Weights		
Weight, approx.	290 g	270 g
Other		
Note:	for the R/RDT three-wire measurement, the conductor compensation is made alternating with the measurement; this then requires two module cycles for a measured value	

Overview



- 2, 4 and 8-channel analog output modules
- Optionally with extremely short conversion times
- For connecting analog actuators without additional amplifiers
- Even solves more complex automation tasks

Ordering data	Article No.	Ordering data	Article No.
SM 532 analog output modules		SIMATIC S7-1500, analog output module AQ 4xU/I HF	6ES7532-5ND00-0AB0
<u>Module width 25 mm</u>		16 bit resolution, accuracy 0.1%, 4 channels in groups of 1, common mode voltage: 30 V AC/60 V DC, diagnostics; substitute value, isochronous mode; the module supports the safety-related shutdown of load groups up to SIL2 according to EN IEC 62061:2021 and Category 3 / PL d according to EN ISO 13849-1:2015. Supplied with infeed element, shielding bracket and shield terminal: order front connectors (screw terminals or push-in) separately	
SIMATIC S7-1500, analog output module AQ 2x U/I ST	6ES7532-5NB00-0AB0	Accessories	
16-bit resolution, accuracy 0.3%. 2 channels in groups of 2, diagnostics; substitute value; the module supports the safety-related shutdown of load groups up to SIL2 according to EN IEC 62061:2021 and Category 2 / PL c according to EN ISO 13849-1:2015. Supplied with push-in front connector, infeed element, shielding bracket and shield terminal		Front connectors	
<u>Module width 35 mm</u>		SIMATIC S7-1500, front connector screw-type connection system	6ES7592-1AM00-0XB0
SIMATIC S7-1500, analog output module AQ 4xU/I ST	6ES7532-5HD00-0AB0	40-pin for 35 mm wide modules including 4 jumper links and cable ties	
16-bit resolution, accuracy 0.3%. 4 channels in groups of 4, diagnostics; substitute value; the module supports the safety-related shutdown of load groups up to SIL2 according to EN IEC 62061:2021 and Category 2 / PL c according to EN ISO 13849-1:2015. Supplied with infeed element, shielding bracket and shield terminal: order front connectors (screw terminals or push-in) separately		SIMATIC S7-1500, front connector with push-in technology	6ES7592-1BM00-0XB0
SIMATIC S7-1500, analog output module AQ 8xU/I HS	6ES7532-5HF00-0AB0	40-pin, for 35 mm wide modules including 4 jumper links and cable ties	
16-bit resolution, accuracy 0.3%, 8 channels in groups of 8, diagnostics; substitute value 8 channels in 0.125 ms oversampling; the module supports the safety-related shutdown of load groups up to SIL2 according to EN IEC 62061:2021 and Category 3 / PL d according to EN ISO 13849-1:2015. Supplied with infeed element, shielding bracket and shield terminal: order front connectors (screw terminals or push-in) separately		SIMATIC S7-1500, front connector with push-in technology	6ES7592-1BM00-0XA0
		40-pin for 25 mm wide modules and compact CPUs of the S7-1500, incl. cable tie	
		DIN A4 labeling sheets	
		SIMATIC S7-1500, labeling sheets for 35 mm wide S7-1500 modules	6ES7592-2AX00-0AA0
		Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules	

SIMATIC S7-1500 Advanced Controllers

I/O modules

Analog modules

SM 532 analog output modules

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, labeling sheets for 25 mm wide S7-1500 modules and compact CPUs Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 20 strips per packing unit sufficient for 200 modules	6ES7592-1AX00-0AA0	SIMATIC S7-1500, spare part, shielding set Consisting of: * 4x shield terminal, * 4x shielding bracket, * 4x 24 V DC infeed element with push-in technology, suitable for analog modules, technology modules and compact CPU of the S7-1500, suitable for all front connectors for 25 mm wide modules	6ES7590-5CA10-0XA0
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0	SIMATIC S7-1500, spare part shield terminal Suitable for analog modules and technology modules with 35 mm width without shielding bracket and without 24 V DC infeed element 10 units per packing unit	6ES7590-5BA00-0AA0
Universal front door for I/O modules		SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC S7-1500, spare part front door for 35 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit	6ES7528-0AA00-7AA0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7-1500, spare part front door for 25 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit	6ES7528-0AA00-0AA0		
Shielding set I/O			
SIMATIC S7-1500, spare part, shielding set Consisting of: * shield terminal, * shielding bracket, * 24 V DC infeed element with screw-type connection system, suitable for analog and technology modules of the S7-1500, suitable for all front connectors for 35 mm wide modules 5 units per packing unit	6ES7590-5CA00-0AA0		

Technical specifications

Article number	6ES7532-5NB00-0AB0	6ES7532-5HD00-0AB0	6ES7532-5HF00-0AB0	6ES7532-5ND00-0AB0
	S7-1500, AQ 2xU/I ST	S7-1500, AQ 4xU/I ST	S7-1500, AQ 8xU/I HS	S7-1500, AQ 4xU/I HF
General information				
Product type designation	AQ 2xU/I ST	AQ 4xU/I ST	AQ 8xU/I HS	AQ 4xU/I HF
Product function				
• Isochronous mode	No	No	Yes	Yes
• Prioritized startup	No	No	No	Yes
• Output range scalable	No	No	No	
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V13 / V13.0.2	V12 / V12	V14 / -	V14 / -
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1	V1.0 / V5.1
• PROFINET from GSD version/ GSD revision	V2.3 / -	V2.3 / -	V2.3 / -	V2.3 / -
Operating mode				
• Oversampling	No	No	Yes	No
• MSO	Yes	Yes	Yes	Yes

Technical specifications

Article number	6ES7532-5NB00-0AB0 S7-1500, AQ 2xU/I ST	6ES7532-5HD00-0AB0 S7-1500, AQ 4xU/I ST	6ES7532-5HF00-0AB0 S7-1500, AQ 8xU/I HS	6ES7532-5ND00-0AB0 S7-1500, AQ 4xU/I HF
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes
Analog outputs				
Number of analog outputs	2	4	8	4
Cycle time (all channels), min.	3.2 ms; independent of number of activated channels	3.2 ms; independent of number of activated channels	125 µs; independent of number of activated channels	125 µs; independent of number of activated channels
Output ranges, voltage				
• 0 to 10 V	Yes	Yes	Yes	Yes
• 1 V to 5 V	Yes	Yes	Yes	Yes
• -5 V to +5 V	No	No	No	No
• -10 V to +10 V	Yes	Yes	Yes	Yes
Output ranges, current				
• 0 to 20 mA	Yes	Yes	Yes	Yes
• -20 mA to +20 mA	Yes	Yes	Yes	Yes
• 4 mA to 20 mA	Yes	Yes	Yes	Yes
Connection of actuators				
• for voltage output two-wire connection	Yes	Yes	Yes	Yes
• for voltage output four-wire connection	Yes	Yes	Yes	Yes
• for current output two-wire connection	Yes	Yes	Yes	Yes
Load impedance (in rated range of output)				
• with voltage outputs, min.	1 kΩ; 0.5 kΩhm at 1 to 5 V	1 kΩ; 0.5 kΩhm at 1 to 5 V	1 kΩ	1 kΩ; 0.5 kΩhm at 1 to 5 V
• with voltage outputs, capacitive load, max.	1 µF	1 µF	100 nF	1 µF
• with current outputs, max.	750 Ω	750 Ω	500 Ω	750 Ω
• with current outputs, inductive load, max.	10 mH	10 mH	1 mH	10 mH
Cable length				
• shielded, max.	800 m; for current, 200 m for voltage	800 m; for current, 200 m for voltage	200 m	800 m; for current, 200 m for voltage
Analog value generation for the outputs				
Integration and conversion time/resolution per channel				
• Resolution with overrange (bit including sign), max.	16 bit	16 bit	16 bit	16 bit
• Conversion time (per channel)	0.5 ms	0.5 ms	50 µs; independent of number of activated channels	125 µs; independent of number of activated channels
Settling time				
• for resistive load	1.5 ms	1.5 ms	30 µs; see additional description in the manual	0.2 ms; see additional description in the manual
• for capacitive load	2.5 ms	2.5 ms	100 µs; see additional description in the manual	1.8 ms; see additional description in the manual
• for inductive load	2.5 ms	2.5 ms	100 µs; see additional description in the manual	2 ms; see additional description in the manual
Errors/accuracies				
Basic error limit (operational limit at 25 °C)				
• Voltage, relative to output range, (+/-)	0.2 %	0.2 %	0.2 %	0.06 %
• Current, relative to output range, (+/-)	0.2 %	0.2 %	0.2 %	0.1 %
Isochronous mode				
Execution and activation time (TCO), min.			100 µs	100 µs
Bus cycle time (TDP), min.			250 µs	250 µs

SIMATIC S7-1500 Advanced Controllers

I/O modules

Analog modules

SM 532 analog output modules

Technical specifications

Article number	6ES7532-5NB00-0AB0	6ES7532-5HD00-0AB0	6ES7532-5HF00-0AB0	6ES7532-5ND00-0AB0
	S7-1500, AQ 2xU/I ST	S7-1500, AQ 4xU/I ST	S7-1500, AQ 8xU/I HS	S7-1500, AQ 4xU/I HF
Interrupts/diagnostics/ status information				
Diagnostics function	Yes	Yes	Yes	Yes
Substitute values connectable	Yes	Yes	Yes	Yes
Alarms				
• Diagnostic alarm	Yes	Yes	Yes	Yes
Diagnoses				
• Monitoring the supply voltage	Yes	Yes	Yes	Yes
• Wire-break	Yes; Only for output type "current"	Yes; Only for output type "current"	Yes; Only for output type "current"	Yes; Only for output type "current"
• Short-circuit	Yes; Only for output type "voltage"	Yes; Only for output type "voltage"	Yes; Only for output type "voltage"	Yes; Only for output type "voltage"
• Overflow/underflow	Yes	Yes	Yes	Yes
Diagnostics indication LED				
• RUN LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
Potential separation				
Potential separation channels				
• between the channels and backplane bus	Yes	Yes	Yes	Yes
Standards, approvals, certificates				
Suitable for safety-related tripping of standard modules	Yes; From FS02	Yes; From FS05	Yes; from FS04	
Highest safety class achievable for safety-related tripping of standard modules				
• Performance level according to ISO 13849-1	PL d	PL d	PL d	
• Category according to ISO 13849-1	Cat. 3	Cat. 3	Cat. 3	
• SIL acc. to IEC 62061	SIL 2	SIL 2	SIL 2	
• SILCL according to IEC 62061				
product functions / security / header				
signed firmware update	No	No	No	
data integrity	No	No	No	No
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C; from FS04	-30 °C; From FS06	-30 °C; From FS03	-25 °C; From FS02
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; from FS04	-30 °C; From FS06	-30 °C; From FS03	-25 °C; From FS02
• vertical installation, max.	40 °C	40 °C	40 °C	40 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	
Dimensions				
Width	25 mm	35 mm	35 mm	35 mm
Height	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm
Weights				
Weight, approx.	200 g	310 g	325 g	300 g
Other				
Note:	Supplied incl. 40-pole push-in front connectors			

Overview



- 4 analog inputs/ 2 analog outputs
- For flexible adaptation of the PLC to the corresponding task
- For subsequent expansion of the system with additional inputs and outputs
- For use in the tightest spaces

Ordering data	Article No.	Ordering data	Article No.
SM 534 analog input/output module <u>Module width 25 mm</u>		Shielding set I/O	
SIMATIC S7-1500, analog input/output module AI 4x U/I/R/RTD/TC ST 4 channels in groups of 4; hardware interrupts; diagnostics AQ 2x U/I ST; 2 channels in groups of 2; substitute value; diagnostics common mode voltage approx. 10 V 16 bit; accuracy 0.3%; Supplied with push-in front connector, infeed element, shielding bracket and shield terminal	6ES7534-7QE00-0AB0	SIMATIC S7-1500, spare part, shielding set Consisting of: * 4x shield terminal, * 4x shielding bracket, * 4x 24 V DC infeed element with push-in technology, suitable for analog modules, technology modules and compact CPU of the S7-1500, suitable for all front connectors for 25 mm wide modules	6ES7590-5CA10-0XA0
Accessories		SIMATIC S7-1500, spare part shield terminal Suitable for analog modules and technology modules with 35 mm width without shielding bracket and without 24 V DC infeed element, 10 units per packing unit	6ES7590-5BA00-0AA0
Front connectors		SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC S7-1500, front connector with push-in technology 40-pin for 25 mm wide modules and compact CPUs of the S7-1500, incl. cable tie	6ES7592-1BM00-0XA0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
DIN A4 labeling sheets			
SIMATIC S7-1500, labeling sheets for 25 mm wide S7-1500 modules and compact CPUs Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 20 strips per packing unit sufficient for 200 modules	6ES7592-1AX00-0AA0		
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0		
Universal front door for I/O modules			
SIMATIC S7-1500, spare part front door for 25 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit	6ES7528-0AA00-0AA0		

SIMATIC S7-1500 Advanced Controllers

I/O modules

Analog modules

SM 534 analog input/output modules

Technical specifications

Article number	6ES7534-7QE00-0AB0 S7-1500, AI 4x U/I/RTD/TC/AQ 2x U/I ST
General information	
Product type designation	AI 4xU/I/RTD/TC /AQ 2xU/I ST
Product function	
• Isochronous mode	No
• Prioritized startup	No
• Measuring range scalable	No
• Scalable measured values	No
• Adjustment of measuring range	No
• Output range scalable	No
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V13 / V13.0.2
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -
• PROFIBUS from GSD version/ GSD revision	V1.0 / V5.1
• PROFINET from GSD version/ GSD revision	V2.3 / -
Operating mode	
• Oversampling	No
• MSI	Yes
• MSO	Yes
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Analog inputs	
Number of analog inputs	4
• For current measurement	4
• For voltage measurement	4
• For resistance/resistance thermometer measurement	2
• For thermocouple measurement	4
permissible input voltage for voltage input (destruction limit), max.	28.8 V
permissible input current for current input (destruction limit), max.	40 mA
Constant measurement current for resistance-type transmitter, typ.	150 Ohm, 300 Ohm, 600 Ohm, Pt100, Pt200, Ni100: 1.25 mA; 6 000 Ohm, Pt500, Pt1000, Ni1000, LG-Ni1000: 0.625 mA; PTC: 0.472 mA
Technical unit for temperature measurement adjustable	Yes; °C/°F/K
Analog input with oversampling	No
Standardization of measured values	No
Input ranges (rated values), voltages	
• 0 to +5 V	No
• 0 to +10 V	No
• 1 V to 5 V	Yes
• -1 V to +1 V	Yes
• -10 V to +10 V	Yes
• -2.5 V to +2.5 V	Yes
• -25 mV to +25 mV	No
• -250 mV to +250 mV	Yes
• -5 V to +5 V	Yes
• -50 mV to +50 mV	Yes
• -500 mV to +500 mV	Yes
• -80 mV to +80 mV	Yes

Article number	6ES7534-7QE00-0AB0 S7-1500, AI 4x U/I/RTD/TC/AQ 2x U/I ST
Input ranges (rated values), currents	
• 0 to 20 mA	Yes
• -20 mA to +20 mA	Yes
• 4 mA to 20 mA	Yes
Input ranges (rated values), thermocouples	
• Type B	Yes
• Type C	No
• Type E	Yes
• Type J	Yes
• Type K	Yes
• Type L	No
• Type N	Yes
• Type R	Yes
• Type S	Yes
• Type T	Yes
• Type U	No
• Type TXK/TXK(L) to GOST	No
Input ranges (rated values), resistance thermometer	
• Cu 10	No
• Cu 10 according to GOST	No
• Cu 50	No
• Cu 50 according to GOST	No
• Cu 100	No
• Cu 100 according to GOST	No
• Ni 10	No
• Ni 10 according to GOST	No
• Ni 100	Yes; Standard/climate
• Ni 100 according to GOST	No
• Ni 1000	Yes; Standard/climate
• Ni 1000 according to GOST	No
• LG-Ni 1000	Yes; Standard/climate
• Ni 120	No
• Ni 120 according to GOST	No
• Ni 200	No
• Ni 200 according to GOST	No
• Ni 500	No
• Ni 500 according to GOST	No
• Pt 10	No
• Pt 10 according to GOST	No
• Pt 50	No
• Pt 50 according to GOST	No
• Pt 100	Yes; Standard/climate
• Pt 100 according to GOST	No
• Pt 1000	Yes; Standard/climate
• Pt 1000 according to GOST	No
• Pt 200	Yes; Standard/climate
• Pt 200 according to GOST	No
• Pt 500	Yes; Standard/climate
• Pt 500 according to GOST	No

Technical specifications

Article number	6ES7534-7QE00-0AB0 S7-1500, AI 4x U/I/RTD/TC/AQ 2x U/I ST
Input ranges (rated values), resistors	
• 0 to 150 ohms	Yes
• 0 to 300 ohms	Yes
• 0 to 600 ohms	Yes
• 0 to 3000 ohms	No
• 0 to 6000 ohms	Yes
• PTC	Yes
Thermocouple (TC) Temperature compensation	
- parameterizable	Yes
Cable length	
• shielded, max.	800 m; for U/I, 200 m for R/RTD, 50 m for TC
Analog outputs	
Number of analog outputs	2
Cycle time (all channels), min.	3.2 ms; ±0.5 ms, regardless of the number of activated channels
Output ranges, voltage	
• 0 to 10 V	Yes
• 1 V to 5 V	Yes
• -5 V to +5 V	No
• -10 V to +10 V	Yes
Output ranges, current	
• 0 to 20 mA	Yes
• -20 mA to +20 mA	Yes
• 4 mA to 20 mA	Yes
Connection of actuators	
• for voltage output two-wire connection	Yes
• for voltage output four-wire connection	Yes
• for current output two-wire connection	Yes
Load impedance (in rated range of output)	
• with voltage outputs, min.	1 kΩ; 0.5 kΩhm at 1 to 5 V
• with voltage outputs, capacitive load, max.	1 μF
• with current outputs, max.	750 Ω
• with current outputs, inductive load, max.	10 mH
Cable length	
• shielded, max.	800 m; for current, 200 m for voltage

Article number	6ES7534-7QE00-0AB0 S7-1500, AI 4x U/I/RTD/TC/AQ 2x U/I ST
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
• Integration time, parameterizable	Yes
• Integration time (ms)	2.5 / 16.67 / 20 / 100 ms
• Basic conversion time, including integration time (ms)	9 / 23 / 27 / 107 ms
- additional conversion time for resistance measurement	150 ohm, 300 ohm, 600 ohm, Pt100, Pt200, Ni100: 2 ms, 6000 ohm, Pt500, Pt1000, Ni1000, LG-Ni1000, PTC: 4 ms
• Interference voltage suppression for interference frequency f1 in Hz	400 / 60 / 50 / 10
Smoothing of measured values	
• parameterizable	Yes
Analog value generation for the outputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
• Conversion time (per channel)	0.5 ms
Settling time	
• for resistive load	1.5 ms
• for capacitive load	2.5 ms
• for inductive load	2.5 ms
Encoder	
Connection of signal encoders	
• for voltage measurement	Yes
• for current measurement as 2-wire transducer	Yes
- Burden of 2-wire transmitter, max.	820 Ω
• for current measurement as 4-wire transducer	Yes
• for resistance measurement with two-wire connection	Yes; Only for PTC
• for resistance measurement with three-wire connection	Yes; All measuring ranges except PTC; internal compensation of the cable resistances
• for resistance measurement with four-wire connection	Yes; All measuring ranges except PTC

SIMATIC S7-1500 Advanced Controllers

I/O modules

Analog modules

SM 534 analog input/output modules

Technical specifications

Article number	6ES7534-7QE00-0AB0 S7-1500, AI 4x U/I/RTD/TC/AQ 2x U/I ST
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Voltage, relative to input range, (+/-)	0.1 %
• Current, relative to input range, (+/-)	0.1 %
• Resistance, relative to input range, (+/-)	0.1 %
• Resistance thermometer, relative to input range, (+/-)	0.1 %; Ptxxx standard: ±0.7 K, Ptxxx climate: ±0.2 K, Nixxx standard: ±0.3 K, Nixxx climate: ±0.15 K
• Thermocouple, relative to input range, (+/-)	0.1 %; Type B: > 600 °C ±1.7 K, type E: > -200 °C ±0.7 K, type J: > -210 °C ±0.8 K, type K: > -200 °C ±1.2 K, type N: > -200 °C ±1.2 K, type R: > 0 °C ±1.9 K, type S: > 0 °C ±1.9 K, type T: > -200 °C ±0.8 K
• Voltage, relative to output range, (+/-)	0.2 %
• Current, relative to output range, (+/-)	0.2 %
Interference voltage suppression for $f = n \times (f_1 \pm 1 \%)$, $f_1 =$ interference frequency	
• Series mode interference (peak value of interference < rated value of input range), min.	40 dB
• Common mode voltage, max.	10 V
• Common mode interference, min.	60 dB
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; only for input type 1 ... 5 V, 4 ... 20 mA, TC, R, RTD and output type current
• Short-circuit	Yes; Only for output type "voltage"
• Overflow/underflow	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; red LED

Article number	6ES7534-7QE00-0AB0 S7-1500, AI 4x U/I/RTD/TC/AQ 2x U/I ST
Potential separation	
Potential separation analog inputs	
• between the channels and backplane bus	Yes
Potential separation analog outputs	
• between the channels and backplane bus	Yes
product functions / security / header	
signed firmware update	No
data integrity	No
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C; from FS04
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C; from FS04
• vertical installation, max.	40 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions	
Width	25 mm
Height	147 mm
Depth	129 mm
Weights	
Weight, approx.	250 g
Other	
Note:	Supplied incl. 40-pole push-in front connectors. Additional basic error and noise for integration time = 2.5 ms: Voltage: ±250 mV (±0.02%), ±80 mV (±0.05%), ±50 mV (±0.05%); resistance: 150 Ohms (±0.02%); resistance thermometer: Pt100 climate: ±0.08 K, Ni100 climate: ±0.08 K; thermoelement: Type B, R, S: ±3 K, type E, J, K, N, T: ±1 K

4

Overview



- 8-channel analog input modules
- Optionally with extremely short conversion times
- For the connection of analog sensors without additional amplifiers
- Even solves more complex automation tasks

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SM 531 analog input modules

(Extended temperature range and exposure to environmental substances)

8 analog inputs,
 $\pm 10\text{ V}$, $\pm 5\text{ V}$, $1 \dots 5\text{ V}$ or
 $0/4 \dots 20\text{ mA}$, $\pm 20\text{ mA}$,
 16 bits + sign; incl. infeed element,
 shielding bracket, shield terminal,
 labeling strips, U connector,
 printed front door

6AG1531-7NF10-7AB0

8 analog inputs
 $\pm 10\text{ V}$, $\pm 5\text{ V}$, $\pm 2.5\text{ V}$, $\pm 1\text{ V}$, $\pm 500\text{ mV}$,
 $\pm 250\text{ mV}$, $\pm 80\text{ mV}$, $\pm 50\text{ mV}$, $1 \dots 5\text{ V}$,
 $0/4 \dots 20\text{ mA}$, $\pm 20\text{ mA}$,
 thermocouples type
 B, E, J, K, N, R, S, T,
 resistance thermometers Ni 100,
 Ni 1000, LG-Ni 1000, Pt 100,
 Pt 1000, Pt 250, Pt 500,
 resistors
 $0 \dots 150/300/600/6000\text{ ohms}$,
 16 bits

6AG1531-7KF00-7AB0

8 analog inputs,
 $\pm 10\text{ V}$, $\pm 5\text{ V}$, $1 \dots 5\text{ V}$ or
 $0/4 \dots 20\text{ mA}$, $\pm 20\text{ mA}$, 16 bits +
 sign; including infeed element,
 shielding bracket, shield terminal,
 labeling strips, U connector,
 printed front door

6AG1531-7NF00-7AB0

8 analog inputs,
 $\pm 1\text{ V}$, $\pm 500\text{ mV}$, $\pm 250\text{ mV}$, $\pm 80\text{ mV}$,
 $\pm 50\text{ mV}$, $\pm 25\text{ mV}$;
 thermocouples type
 B, E, J, K, N, R, S, T, TXK/TXK(L)
 according to GOST;
 resistance thermometers
 Cu 10, Cu 50, Cu 100, Ni 10,
 Ni 100, Ni 120, Ni 200, Ni 500,
 Ni 1000, LG-Ni 1000, Pt10, Pt50,
 Pt100, Pt200, Pt500, Pt1000;
 resistors
 $0 \dots 150/300/600/6000\text{ ohms}$, PTC;
 16 bit; incl. infeed element,
 shielding bracket, shield terminal,
 labeling strips, U connector,
 printed front door

6AG1531-7PF00-4AB0

Analog input module, AI 16xU BA,
 16-bit resolution, accuracy 0.5%,
 16 channels in groups of 16,
 4 V DC common mode voltage,
 diagnostics, hardware interrupts;

6AG1531-7LH00-7AB0

Analog input module, AI 16xI BA,
 16-bit resolution, accuracy 0.5%,
 16 channels in groups of 16,
 4 V DC common mode voltage,
 diagnostics, hardware interrupts;

6AG1531-7MH00-7AB0**Accessories****SIPLUS S7-1500 U connector**

Spare part for connecting
 I/O modules; self-assembling
 backplane bus; 5 pieces per
 packaging unit; with conformal
 coating, $-40 \dots +70\text{ }^\circ\text{C}$

6AG1590-0AA00-7AA0**Other accessories**

See SIMATIC S7-1500,
 SM 531 analog input
 modules, page 4/205

SIMATIC S7-1500 Advanced Controllers

I/O modules

SIPLUS analog modules

SIPLUS SM 531 analog input modules

Technical specifications

Article number	6AG1531-7NF10-7AB0	6AG1531-7KF00-7AB0	6AG1531-7NF00-7AB0	6AG1531-7PF00-4AB0	6AG1531-7LH00-7AB0	6AG1531-7MH00-7AB0
Based on	6ES7531-7NF10-0AB0	6ES7531-7KF00-0AB0	6ES7531-7NF00-0AB0	6ES7531-7PF00-0AB0	6ES7531-7LH00-0AB0	6ES7531-7MH00-0AB0
	SIPLUS S7-1500 AI 8XU/ HS	SIPLUS S7-1500 AI 8XU//RTD/TC ST	SIPLUS S7-1500 AI 8XU/ HF	SIPLUS S7-1500 AI 8XU/R/RTD/TC HF	SIPLUS S7-1500 AI 16xU BA	SIPLUS S7-1500 AI 16xI BA
Ambient conditions						
Ambient temperature during operation						
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-30 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax	60 °C	70 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin	-40 °C; = Tmin	-40 °C; = Tmin	-30 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• vertical installation, max.	40 °C; = Tmax	40 °C; = Tmax	40 °C; = Tmax	40 °C	40 °C; = Tmax	40 °C; = Tmax
Altitude during operation relating to sea level						
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m		5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity						
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance						
Coolants and lubricants						
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air		Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems						
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3C4 (RH < 75 %) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3C4 (RH < 75 %) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!

Technical specifications

Article number	6AG1531-7NF10-7AB0	6AG1531-7KF00-7AB0	6AG1531-7NF00-7AB0	6AG1531-7PF00-4AB0	6AG1531-7LH00-7AB0	6AG1531-7MH00-7AB0
Based on	6ES7531-7NF10-0AB0 SIPLUS S7-1500 AI 8XU/I HS	6ES7531-7KF00-0AB0 SIPLUS S7-1500 AI 8XU/I/RTD/TC ST	6ES7531-7NF00-0AB0 SIPLUS S7-1500 AI 8XU/I HF	6ES7531-7PF00-0AB0 SIPLUS S7-1500 AI 8XU/R/RTD/TC HF	6ES7531-7LH00-0AB0 SIPLUS S7-1500 AI 16xU BA	6ES7531-7MH00-0AB0 SIPLUS S7-1500 AI 16xI BA
Use on ships/at sea						
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request		Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *		Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *		Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology						
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)		Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)		Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark						
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!		* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating						
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability		Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection		Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life		Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A		Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

I/O modules

SIPLUS analog modules

SIPLUS SM 532 analog output modules

Overview



- 4 and 8-channel analog output modules
- Optionally with extremely short conversion times
- For connecting analog actuators without additional amplifiers
- Even solves more complex automation tasks

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS SM 532 analog output modules

(Extended temperature range and exposure to environmental substances)

4 analog outputs, ± 10 V, 1 ... 5 V, 0 ... 10 V or ± 20 mA, 0/4 ... 20 mA, 16-bit

6AG1532-5HD00-7AB0

8 analog outputs, ± 10 V, 1 ... 5 V, 0 ... 10 V or ± 20 mA, 0/4 ... 20 mA, 16-bit; incl. infeed element, shielding bracket, shield terminal, labeling strips, U connector, printed front door

6AG1532-5HF00-7AB0

Accessories

SIPLUS S7-1500 U connector

Spare part for connecting I/O modules; self-assembling backplane bus; 5 pieces per packaging unit; with conformal coating, -40...+70 °C

6AG1590-0AA00-7AA0

Other accessories

See SIMATIC S7-1500, SM 532 analog output modules, page 4/217

Technical specifications

Article number	6AG1532-5HD00-7AB0	6AG1532-5HF00-7AB0
Based on	6ES7532-5HD00-0AB0 SIPLUS S7-1500 AQ 4XU/I ST	6ES7532-5HF00-0AB0 SIPLUS S7-1500 AQ 8XU/I HS
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax; > +60 °C max. 4x ± 10 V permissible
• vertical installation, min.	-40 °C; = Tmin	-40 °C; = Tmin; Startup @ -25 °C
• vertical installation, max.	40 °C; = Tmax	40 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

Technical specifications

Article number	6AG1532-5HD00-7AB0	6AG1532-5HF00-7AB0
Based on	6ES7532-5HD00-0AB0	6ES7532-5HF00-0AB0
	SIPLUS S7-1500 AQ 4XU/I ST	SIPLUS S7-1500 AQ 8XU/I HS
Resistance		
Coolants and lubricants		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

I/O modules

Technology modules

TM Count 2x24V counter module

Overview



- 2-channel high-speed counter module
- With comprehensive parameterization options for an optimum adaptation to the task and reduction of control load
- Speed and time period measuring
- Storage and comparison functions
- Connection of 24 V encoders

4

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, TM count 2x24 V counter module 2 channels for 24 V incremental encoder, 3 DI, 2 DQ per channel	6ES7550-1AA01-0AB0	SIMATIC S7-1500, spare part, shielding set Consisting of: * shield terminal, * shielding bracket, * 24 V DC infeed element with screw-type connection system, suitable for analog and technology modules of the S7-1500, suitable for all front connectors for 35 mm wide modules 5 units per packing unit	6ES7590-5CA00-0AA0
Accessories Front connectors		SIMATIC S7-1500, spare part shield terminal Suitable for analog modules and technology modules with 35 mm width without shielding bracket and without 24 V DC infeed element, 10 units per packing unit	6ES7590-5BA00-0AA0
SIMATIC S7-1500, front connector screw-type connection system 40-pin for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1AM00-0XB0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC S7-1500, front connector with push-in technology 40-pin, for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1BM00-0XB0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7-1500, labeling sheets for 35 mm wide S7-1500 modules Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules	6ES7592-2AX00-0AA0		
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0		
SIMATIC S7-1500, spare part front door for 35 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit	6ES7528-0AA00-7AA0		

Technical specifications

Article number	6ES7550-1AA01-0AB0 S7-1500, TM Count 2x24V
General information	
Product type designation	TM Count 2x24V
Product function	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	Yes
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V16 with HSP 0332 / V17
• PROFIBUS from GSD version/ GSD revision	GSD Revision 5
• PROFINET from GSD version/ GSD revision	V2.3 / -
Installation type/mounting	
Rail mounting	Yes; S7-1500 mounting rail
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
Encoder supply	
Number of outputs	1; A common 24V encoder supply for both channels
24 V encoder supply	
• 24 V	Yes; L+ (-0.8 V)
• Short-circuit protection	Yes
• Output current, max.	1 A; total current of all encoders/channels
Digital inputs	
Number of digital inputs	6; 3 per channel
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Digital input functions, parameterizable	
• Gate start/stop	Yes
• Capture	Yes
• Synchronization	Yes
• Freely usable digital input	Yes
Input voltage	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
Input current	
• for signal "1", typ.	2.5 mA
Input delay (for rated value of input voltage)	
for standard inputs	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
- at "0" to "1", min.	6 µs; for parameterization "none"
- at "1" to "0", min.	6 µs; for parameterization "none"
for technological functions	
- parameterizable	Yes

Article number	6ES7550-1AA01-0AB0 S7-1500, TM Count 2x24V
Digital outputs	
Type of digital output	Transistor
Number of digital outputs	4; 2 per channel
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Limitation of inductive shutdown voltage to	L+ (-53 V)
Controlling a digital input	Yes
Digital output functions, parameterizable	
• Switching tripped by comparison values	Yes
• Freely usable digital output	Yes
Switching capacity of the outputs	
• with resistive load, max.	0.5 A; Per digital output
• on lamp load, max.	5 W
Load resistance range	
• lower limit	48 Ω
• upper limit	12 kΩ
Output voltage	
• Type of output voltage	DC
• for signal "1", min.	23.2 V; L+ (-0.8 V)
Output current	
• for signal "1" rated value	0.5 A; Per digital output
• for signal "0" residual current, max.	0.5 mA
Output delay with resistive load	
• "0" to "1", max.	50 µs
• "1" to "0", max.	50 µs
Switching frequency	
• with resistive load, max.	10 kHz
• with inductive load, max.	0.5 Hz; Acc. to IEC 60947-5-1, DC-13; observe derating curve
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per module, max.	2 A
Encoder	
Connectable encoders	
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA
Encoder signals, incremental encoder (asymmetrical)	
• Input voltage	24 V
• Input frequency, max.	200 kHz
• Counting frequency, max.	800 kHz; with quadruple evaluation
• Cable length, shielded, max.	600 m; depending on input frequency, encoder and cable quality; max. 50 m at 200 kHz
• Signal filter, parameterizable	Yes
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes
• pulse encoder	Yes
• pulse encoder with direction	Yes
• pulse encoder with one impulse signal per count direction	Yes
Interface types	
• Source/sink input	Yes
• Input characteristic curve in accordance with IEC 61131, type 3	Yes

SIMATIC S7-1500 Advanced Controllers

I/O modules

Technology modules

TM Count 2x24V counter module

Technical specifications

Article number	6ES7550-1AA01-0AB0 S7-1500, TM Count 2x24V
Interrupts/diagnostics/ status information	
Alarms	
• Diagnostic alarm	Yes
• Hardware interrupt	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• A/B transition error at incremental encoder	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
Integrated Functions	
Counter	Yes
• Number of counters	2
• Counting frequency, max.	800 kHz; with quadruple evaluation
Fast mode	Yes
Counting functions	
• Can be used with TO High_Speed_Counter	Yes
• Continuous counting	Yes
• Counter response parameterizable	Yes
• Hardware gate via digital input	Yes
• Software gate	Yes
• Event-controlled stop	Yes
• Synchronization via digital input	Yes
• Counting range, parameterizable	Yes
Comparator	
- Number of comparators	2; Per channel
- Direction dependency	Yes
- Can be changed from user program	Yes
Position detection	
• Incremental acquisition	Yes
• Suitable for S7-1500 Motion Control	Yes
• suitable for SIMOTION	Yes
Measuring functions	
• Measuring time, parameterizable	Yes
• Dynamic measurement period adjustment	Yes
• Number of thresholds, parameterizable	2

Article number	6ES7550-1AA01-0AB0 S7-1500, TM Count 2x24V
Measuring range	
- Frequency measurement, min.	0.04 Hz
- Frequency measurement, max.	800 kHz
- Cycle duration measurement, min.	1.25 µs
- Cycle duration measurement, max.	25 s
Accuracy	
- Frequency measurement	100 ppm; depending on measuring interval and signal evaluation
- Cycle duration measurement	100 ppm; depending on measuring interval and signal evaluation
- Velocity measurement	100 ppm; depending on measuring interval and signal evaluation
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C; Please note derating for inductive loads
• vertical installation, min.	-30 °C
• vertical installation, max.	40 °C; Please note derating for inductive loads
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200MP system manual
Decentralized operation	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	Yes
to standard PROFINET controller	Yes
Dimensions	
Width	35 mm
Height	147 mm
Depth	129 mm
Weights	
Weight, approx.	250 g

Overview



- 2-channel counter and position detection module with RS 422 interface
- Extensive parameterization options for optimum task-specific adaptation
- Reduces load on controller due to preprocessing on the module
- Position detection with incremental and SSI absolute encoders
- Speed and time period measuring
- Storage and comparison functions
- Connection of encoders with RS 422 signals or 5V-TTL signals
- Fast Mode with reduced functionality for particularly short cycle times

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, TM PosInput 2 counting and position detection module For RS422 incremental encoders or SSI absolute encoders, 2 channels, 2 DI, 2 DQ per channel	6ES7551-1AB01-0AB0	SIMATIC S7-1500, spare part, shielding set Consisting of: * shield terminal, * shielding bracket, * 24 V DC infeed element with screw-type connection system, suitable for analog and technology modules of the S7-1500, suitable for all front connectors for 35 mm wide modules 5 units per packing unit	6ES7590-5CA00-0AA0
Accessories			
Front connectors			
SIMATIC S7-1500, front connector screw-type connection system 40-pin for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1AM00-0XB0	SIMATIC S7-1500, spare part shield terminal Suitable for analog modules and technology modules with 35 mm width without shielding bracket and without 24 V DC infeed element, 10 units per packing unit	6ES7590-5BA00-0AA0
SIMATIC S7-1500, front connector with push-in technology 40-pin, for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1BM00-0XB0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC S7-1500, labeling sheets for 35 mm wide S7-1500 modules Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules	6ES7592-2AX00-0AA0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0		
SIMATIC S7-1500, spare part front door for 35 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit	6ES7528-0AA00-7AA0		

SIMATIC S7-1500 Advanced Controllers

I/O modules

Technology modules

TM PosInput 2 counter and position detection module

Technical specifications

Article number	6ES7551-1AB01-0AB0 S7-1500, TM PosInput 2
General information	
Product type designation	TM PosInput 2
Number of channels	2
Product function	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	Yes
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V17
• PROFIBUS from GSD version/ GSD revision	GSD Revision 5
• PROFINET from GSD version/ GSD revision	V2.3 / -
Installation type/mounting	
Rail mounting	Yes; S7-1500 mounting rail
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
Encoder supply	
Number of outputs	4; One 5V and 24V encoder supply per channel
5 V encoder supply	
• 5 V	Yes; 5.2 V ±2 %
• Short-circuit protection	Yes
• Output current, max.	300 mA; Per channel
24 V encoder supply	
• 24 V	Yes; L+ (-0.8 V)
• Short-circuit protection	Yes
• Output current, max.	300 mA; Per channel
Digital inputs	
Number of digital inputs	4; 2 per channel
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Digital input functions, parameterizable	
• Gate start/stop	Yes; only for pulse and incremental encoders
• Capture	Yes
• Synchronization	Yes; only for pulse and incremental encoders
• Freely usable digital input	Yes
Input voltage	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
Input current	
• for signal "1", typ.	2.5 mA
Input delay (for rated value of input voltage) for standard inputs	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
- at "0" to "1", min.	6 µs; for parameterization "none"
- at "1" to "0", min.	6 µs; for parameterization "none"
for technological functions	
- parameterizable	Yes

Article number	6ES7551-1AB01-0AB0 S7-1500, TM PosInput 2
Digital outputs	
Type of digital output	Transistor
Number of digital outputs	4; 2 per channel
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Limitation of inductive shutdown voltage to	L+ (-33 V)
Controlling a digital input	Yes
Digital output functions, parameterizable	
• Switching tripped by comparison values	Yes
• Freely usable digital output	Yes
Switching capacity of the outputs	
• with resistive load, max.	0.5 A; Per digital output
• on lamp load, max.	5 W
Load resistance range	
• lower limit	48 Ω
• upper limit	12 kΩ
Output voltage	
• Type of output voltage	DC
• for signal "1", min.	23.2 V; L+ (-0.8 V)
Output current	
• for signal "1" rated value	0.5 A; Per digital output
• for signal "0" residual current, max.	0.5 mA
Output delay with resistive load	
• "0" to "1", max.	50 µs
• "1" to "0", max.	50 µs
Switching frequency	
• with resistive load, max.	10 kHz
• with inductive load, max.	0.5 Hz; Acc. to IEC 60947-5-1, DC-13; observe derating curve
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per module, max.	2 A
Encoder	
Encoder signals, incremental encoder (symmetrical)	
• Input voltage	RS 422
• Input frequency, max.	1 MHz
• Counting frequency, max.	4 MHz; with quadruple evaluation
• Cable length, shielded, max.	32 m; at 1 MHz
• Signal filter, parameterizable	Yes
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes
• pulse encoder	Yes
• Pulse encoder with direction	Yes
• pulse encoder with one impulse signal per count direction	Yes
Encoder signals, incremental encoder (asymmetrical)	
• Input voltage	5 V TTL (push-pull encoders only)
• Input frequency, max.	1 MHz
• Counting frequency, max.	4 MHz; with quadruple evaluation
• Signal filter, parameterizable	Yes
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes
• pulse encoder	Yes

Technical specifications

Article number	6ES7551-1AB01-0AB0 S7-1500, TM PosInput 2
• pulse encoder with direction	Yes
• pulse encoder with one impulse signal per count direction	Yes
Encoder signals, absolute encoder (SSI)	
• Input signal	to RS-422
• Telegram length, parameterizable	10 ... 40 bit
• Clock frequency, max.	2 MHz; 125 kHz, 250 kHz, 500 kHz, 1 MHz, 1.5 MHz or 2 MHz
• Binary code	Yes
• Gray code	Yes
• Cable length, shielded, max.	320 m; Cable length, RS-422 SSI absolute encoders, Siemens type 6FX2001-5, 24 V supply; 125 kHz, 320 meters shielded, max.; 250 kHz, 160 meters shielded, max.; 500 kHz, 60 meters shielded, max.; 1 MHz, 20 meters shielded, max.; 1.5 MHz, 10 meters shielded, max.; 2 MHz, 8 meters shielded, max.
• Parity bit, parameterizable	Yes
• Monoflop time	16, 32, 48, 64 µs & automatic
• Multiturn	Yes
• Singleturn	Yes
Interface types	
• TTL 5 V	Yes; push-pull encoders only
• RS 422	Yes
Interrupts/diagnostics/status information	
Alarms	
• Diagnostic alarm	Yes
• Hardware interrupt	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• A/B transition error at incremental encoder	Yes
• Telegram error at SSI encoder	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
Integrated Functions	
Counter	Yes
• Number of counters	2
• Counting frequency, max.	4 MHz; with quadruple evaluation
Fast mode	Yes
Counting functions	
• Can be used with TO High_Speed_Counter	Yes; only for pulse and incremental encoders
• Continuous counting	Yes
• Counter response parameterizable	Yes
• Hardware gate via digital input	Yes
• Software gate	Yes
• Event-controlled stop	Yes
• Synchronization via digital input	Yes
• Counting range, parameterizable	Yes

Article number	6ES7551-1AB01-0AB0 S7-1500, TM PosInput 2
Comparator	
- Number of comparators	2; Per channel
- Direction dependency	Yes
- Can be changed from user program	Yes
Position detection	
• Incremental acquisition	Yes
• Absolute acquisition	Yes
• Suitable for S7-1500 Motion Control	Yes
Measuring functions	
• Measuring time, parameterizable	Yes
• Dynamic measurement period adjustment	Yes
• Number of thresholds, parameterizable	2
Measuring range	
- Frequency measurement, min.	0.04 Hz
- Frequency measurement, max.	4 MHz
- Cycle duration measurement, min.	0.25 µs
- Cycle duration measurement, max.	25 s
Accuracy	
- Frequency measurement	100 ppm; depending on measuring interval and signal evaluation
- Cycle duration measurement	100 ppm; depending on measuring interval and signal evaluation
- Velocity measurement	100 ppm; depending on measuring interval and signal evaluation
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C; Please note derating for inductive loads
• vertical installation, min.	-30 °C
• vertical installation, max.	40 °C; Please note derating for inductive loads
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200MP system manual
Decentralized operation	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	Yes
to standard PROFINET controller	Yes
Dimensions	
Width	35 mm
Height	147 mm
Depth	129 mm
Weights	
Weight, approx.	325 g

SIMATIC S7-1500 Advanced Controllers

I/O modules

Technology modules

TM Timer DIDQ 16x24V time-based IO module

Overview



- 8 digital inputs, 16 digital outputs, of which up to 16 can be used in different configurations as technological, time-controlled channels
- Inputs for detecting the input edges with μs accuracy
- Outputs for outputting switching signals with μs accuracy
- 32x oversampling
- PWM output
- Counter function
- Outputs can be switched between 0.5 A standard and especially fast 0.1 A high-speed operation

Ordering data

Article No.

SIMATIC S7-1500, TM timer DIDQ 16x 24 V time-controlled digital inputs and outputs max. 8 DI, 16 DQ of which max. 16 with time stamp, counting, PWM, oversampling	6ES7552-1AA00-0AB0
Accessories	
Front connectors	
SIMATIC S7-1500, front connector screw-type connection system 40-pin for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1AM00-0XB0
SIMATIC S7-1500, front connector with push-in technology 40-pin, for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1BM00-0XB0
SIMATIC S7-1500, labeling sheets for 35 mm wide S7-1500 modules Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules	6ES7592-2AX00-0AA0
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0
SIMATIC S7-1500, spare part front door for 35 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit	6ES7528-0AA00-7AA0
SIMATIC S7-1500, spare part, shielding set Consisting of: * shield terminal, * shielding bracket, * 24 V DC infeed element with screw-type connection system, suitable for analog and technology modules of the S7-1500, suitable for all front connectors for 35 mm wide modules 5 units per packing unit	6ES7590-5CA00-0AA0
SIMATIC S7-1500, spare part shield terminal Suitable for analog modules and technology modules with 35 mm width without shielding bracket and without 24 V DC infeed element, 10 units per packing unit	6ES7590-5BA00-0AA0
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

Technical specifications

Article number	6ES7552-1AA00-0AB0 S7-1500, TM Timer DIDQ 16x24V
General information	
Product type designation	TM Timer DIDQ 16x24V
Product function	
• I&M data	Yes; I&M 0
• Isochronous mode	Yes
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V13 Update 3
Installation type/mounting	
Rail mounting	Yes; S7-1500 mounting rail
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Load voltage 2L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Encoder supply	
Number of outputs	8; max. depending on parameterization
24 V encoder supply	
• 24 V	Yes; L+ (-0.8 V)
• Short-circuit protection	Yes
• Output current, max.	1.2 A; Total current of all encoders / channels, max. 0.5 A per output
Digital inputs	
Number of digital inputs	8; max. depending on parameterization
• in groups of	8
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Digital input functions, parameterizable	
• Digital input with time stamp - Number, max.	Yes 8
• Counter - Number, max.	Yes 4
• Counter for incremental encoder - Number, max.	Yes 4
• Digital input with oversampling - Number, max.	Yes 8
• HW enable for digital input - Number, max.	Yes 4
• HW enable for digital output - Number, max.	Yes 4
Input voltage	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
Input current	
• for signal "1", typ.	2.5 mA

Article number	6ES7552-1AA00-0AB0 S7-1500, TM Timer DIDQ 16x24V
Input delay (for rated value of input voltage)	
• Minimum pulse width for program reactions	3 µs for parameterization "none"
for standard inputs	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 ms
- at "0" to "1", min.	4 µs; for parameterization "none"
- at "1" to "0", min.	4 µs; for parameterization "none"
Digital outputs	
Type of digital output	Transistor
Number of digital outputs	16; max. depending on parameterization
• in groups of	8
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Limitation of inductive shutdown voltage to	-0.8 V
Controlling a digital input	Yes
Digital output functions, parameterizable	
• Digital output with time stamp - Number, max.	Yes 16
• PWM output - Number, max.	Yes 16
• Digital output with oversampling - Number, max.	Yes 16
Switching capacity of the outputs	
• with resistive load, max.	0.5 A; 0.1 A with High Speed output
• on lamp load, max.	5 W; 1 W with High Speed output
Load resistance range	
• lower limit	48 Ω; 240 ohm with High Speed output
• upper limit	12 kΩ
Output voltage	
• Type of output voltage	DC
• for signal "0", max.	1 V; With High Speed output
• for signal "1", min.	23.2 V; L+ (-0.8 V)
Output current	
• for signal "1" rated value	0.5 A; 0.1 A with High Speed output, observe derating
• for signal "0" residual current, max.	0.5 mA
Output delay with resistive load	
• "0" to "1", max.	1 µs; With High Speed output, 5 µs with Standard output
• "1" to "0", max.	1 µs; With High Speed output, 6 µs with Standard output
Switching frequency	
• with resistive load, max.	10 kHz
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per group, max.	4 A
• Current per module, max.	8 A; Observe derating

SIMATIC S7-1500 Advanced Controllers

I/O modules

Technology modules

TM Timer DIDQ 16x24V time-based IO module

Technical specifications

Article number	6ES7552-1AA00-0AB0 S7-1500, TM Timer DIDQ 16x24V
Encoder	
Connectable encoders	
• Incremental encoder (asymmetrical)	Yes
• 24 V initiator	Yes
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA
Encoder signals, incremental encoder (asymmetrical)	
• Input voltage	24 V
• Input frequency, max.	50 kHz
• Counting frequency, max.	200 kHz; with quadruple evaluation
• Cable length, shielded, max.	600 m; Depending on input frequency, encoder and cable quality; max. 200 m at 50 kHz
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• pulse encoder	Yes
Interface types	
• Input characteristic curve in accordance with IEC 61131, type 3	Yes
Isochronous mode	
Bus cycle time (TDP), min.	250 µs
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED

Article number	6ES7552-1AA00-0AB0 S7-1500, TM Timer DIDQ 16x24V
Integrated Functions	
Counter	Yes
• Number of counters	4
• Counting frequency, max.	200 kHz; with quadruple evaluation
Counting functions	
• Continuous counting	Yes
Position detection	
• Incremental acquisition	Yes
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	40 °C; Observe derating
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200MP system manual
Decentralized operation to SIMATIC S7-1500	
	Yes
Dimensions	
Width	35 mm
Height	147 mm
Depth	129 mm
Weights	
Weight, approx.	320 g

4

TM PTO 4 interface module for PTO (Pulse Train Output)

Overview



- 4-channel interface module for PTO (Pulse Train Output)
- 3 signal interfaces can be configured for speed and direction:
 - 24 V asymmetrical up to 200 kHz
 - RS422, 5 V symmetrical up to 1 MHz
 - TTL 5 V asymmetrical up to 200 kHz
- 3 signal types can be configured:
 - Pulse and direction
 - Pulses for forward movement and pulses for backwards movement
 - 2 phase-shifted signals, with simple or quadruple evaluation
- Supported technology objects:
 - Speed axis (S7-1500, S7-1500T)
 - Positioning axis (S7-1200, S7-1500, S7-1500T)
 - Synchronous axis (S7-1500, S7-1500T)
 - Probe (S7-1500, S7-1500T)

4

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, TM PTO 4 interface module For stepper drives 4 channels pulse train output PTO: 24 V, RS422, 5 V, 2 DI, 1 DQ 24 V DC per channel	6ES7553-1AA00-0AB0	SIMATIC S7-1500, spare part, shielding set Consisting of: * shield terminal, * shielding bracket, * 24 V DC infeed element with screw-type connection system, suitable for analog and technology modules of the S7-1500, suitable for all front connectors for 35 mm wide modules 5 units per packing unit	6ES7590-5CA00-0AA0
Accessories Front connectors		SIMATIC S7-1500, spare part shield terminal Suitable for analog modules and technology modules with 35 mm width without shielding bracket and without 24 V DC infeed element, 10 units per packing unit	6ES7590-5BA00-0AA0
SIMATIC S7-1500, front connector screw-type connection system 40-pin for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1AM00-0XB0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC S7-1500, front connector with push-in technology 40-pin, for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1BM00-0XB0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7-1500, labeling sheets for 35 mm wide S7-1500 modules Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules	6ES7592-2AX00-0AA0		
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0		
SIMATIC S7-1500, spare part front door for 35 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit	6ES7528-0AA00-7AA0		

SIMATIC S7-1500 Advanced Controllers

I/O modules

Technology modules

TM PTO 4 interface module for PTO (Pulse Train Output)

Technical specifications

Article number	6ES7553-1AA00-0AB0 S7-1500, TM PTO 4
General information	
Product type designation	TM PTO 4
Number of channels	4; Axes
Product function	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	Yes
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V14 or higher
• STEP 7 configurable/ integrated from version	V5.5 SP3 with GSD file / -
• PROFINET from GSD version/ GSD revision	GSDML V2.32
Installation type/mounting	
Rail mounting	Yes; S7-1500 mounting rail
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
Digital inputs	
Number of digital inputs	12; 3 per channel, of which 1 DIQ
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Digital input functions, parameterizable	
• Synchronization	Yes
Input voltage	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-5 V
• permissible voltage at input, max.	30 V
Input current	
• for signal "1", typ.	2.5 mA
Input delay (for rated value of input voltage)	
for standard inputs	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
- at "0" to "1", min.	4 µs; for parameterization "none"
- at "1" to "0", min.	4 µs; for parameterization "none"
for technological functions	
- parameterizable	Yes

Article number	6ES7553-1AA00-0AB0 S7-1500, TM PTO 4
Digital outputs	
Number of digital outputs	12; 3 per channel, of which 1 DIQ
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Controlling a digital input	Yes
Digital output functions, parameterizable	
• PTO (pulse train output) signal interface	
- 24 V asymmetrical	Yes
- RS 422 symmetrical	Yes
- TTL (5 V) asymmetrical	Yes
• PTO (pulse train output) signal type	
- Pulse and direction	Yes
- Count up, count down	Yes
- Incremental encoder (A, B phase shift)	Yes
- Incremental encoder (A, B phase shift, quadruple)	Yes
Switching capacity of the outputs	
• with resistive load, max.	0.1 A; 0.5 A for DIQn.2
• on lamp load, max.	1 W; 5 W for DIQn.2
Load resistance range	
• lower limit	240 Ω; 48 ohms for DIQn.2
• upper limit	12 kΩ
Output voltage	
• Type of output voltage	DC
• for signal "1", min.	23.2 V; L+ (-0.8 V), L+ (-1.3 V) for DIQn.2
Output current	
• for signal "1" rated value	0.1 A; 0.5 A for DIQn.2
• for signal "0" residual current, max.	0.5 mA
Output delay with resistive load	
• "0" to "1", typ.	1 µs; 28 µs for DIQn.2
• "1" to "0", typ.	1 µs; 25 µs for DIQn.2
Switching frequency	
• with resistive load, max.	1 kHz; For DIQn.2
• with inductive load, max.	0.5 Hz; According to IEC 60947-5-1, DC-13, for DIQn.2
• on lamp load, max.	10 Hz; For DIQn.2
• For signal interface 24 V asymmetrical	200 kHz; With DQn.0 and DQn.1
• For signal interface RS 422 symmetrical	1 MHz
• For signal interface TTL (5 V) asymmetrical	200 kHz
Isochronous mode	
Bus cycle time (TDP), min.	250 µs; 375 µs if all 4 channels are used

TM PTO 4 interface module for PTO (Pulse Train Output)

Technical specifications

Article number	6ES7553-1AA00-0AB0 S7-1500, TM PTO 4
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Short-circuit	Yes; Thermal overload protection
• Group error	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes

Article number	6ES7553-1AA00-0AB0 S7-1500, TM PTO 4
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C; Observe derating
• vertical installation, min.	0 °C
• vertical installation, max.	40 °C; Observe derating
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200MP system manual
Decentralized operation	
to SIMATIC S7-300	Yes; Via control and feedback interface
to SIMATIC S7-400	Yes; Via control and feedback interface
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFINET controller	Yes; Via control and feedback interface
Dimensions	
Width	35 mm
Height	147 mm
Depth	129 mm
Weights	
Weight, approx.	300 g

SIMATIC S7-1500 Advanced Controllers

I/O modules

Technology modules

TM FAST user-programmable high-speed module

Overview



- User-programmable technology module with extremely short internal cycle time and very fast digital input and output signals
- The following are available:
 - 8 x digital input 24 V DC
 - 8 x digital output 24 V DC
 - 4 x digital input/output 24 V DC
 - 8 x RS485/RS422, usable as digital input or output with differential signal or as TTL asymmetrically
- Programming the application with the Intel® Quartus® Prime software
- Cycle time of the application typ. 20 ns (nanoseconds); Thus a response time terminal – terminal from the application of a signal change at the input to a reaction at the output of significantly less than 1 µs can be achieved.

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-1500, TM FAST Field Adaptable High-Speed Technology Programmable with Intel(R) Quartus(R) Prime SW, 8xDI, 8xDQ, 4xDIQ 24 V, 8xRS485 DIQ, for extremely short response time of less than 1 µs	6ES7554-1AA00-0AB0	SIMATIC S7-1500, spare part front door for 35 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram 5 units per packing unit	6ES7528-0AA00-7AA0
Accessories TM FAST Debug Connector For connecting a USB blaster to TM FAST, for commissioning and service purposes only	6ES7554-1AA00-5AA0	SIMATIC S7-1500, spare part, shielding set Consisting of: * shield terminal, * shielding bracket, * 24 V DC infeed element with screw-type connection system, suitable for analog and technology modules of the S7-1500, suitable for all front connectors for 35 mm wide modules 5 units per packing unit	6ES7590-5CA00-0AA0
Front connectors SIMATIC S7-1500, front connector screw-type connection system 40-pin for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1AM00-0XB0	SIMATIC S7-1500, spare part shield terminal Suitable for analog modules and technology modules with 35 mm width without shielding bracket and without 24 V DC infeed element 10 units per packing unit	6ES7590-5BA00-0AA0
SIMATIC S7-1500, front connector with push-in technology 40-pin, for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1BM00-0XB0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC S7-1500, labeling sheets for 35 mm wide S7-1500 modules Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules	6ES7592-2AX00-0AA0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0		

Technical specifications

Article number	6ES7554-1AA00-0AB0 S7-1500, TM FAST
General information	
Product type designation	TM FAST
Product function	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	Yes
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V17 with HSP or higher
• PROFINET from GSD version/ GSD revision	GSDML V2.35
Installation type/mounting	
Rail mounting	Yes; S7-1500 mounting rail
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
Digital inputs	
Number of digital inputs	12; including 4 DIQs
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Input voltage	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-5 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
Input current	
• for signal "1", typ.	2.5 mA
Input frequency	
• For signal interface 24 V asymmetrical	200 kHz
• For signal interface RS 422 symmetrical	5 MHz
• For signal interface TTL (5 V) asymmetrical	1 MHz
Input delay (for rated value of input voltage)	
• Minimum pulse width for program reactions	application specific below 1µs possible
for standard inputs	
- parameterizable	Yes; customer defined / 0.001 / 0.003 / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
- at "0" to "1", min.	0.8 µs; for parameterization "customer defined = 0"
- at "1" to "0", min.	0.8 µs; for parameterization "none"

Article number	6ES7554-1AA00-0AB0 S7-1500, TM FAST
Digital outputs	
Number of digital outputs	12; including 4 DIQs
Short-circuit protection	Yes; electronic/thermal
Switching capacity of the outputs	
• with resistive load, max.	0.1 A; 0.3 A for DIQs
Load resistance range	
• lower limit	240 Ω; 80 ohms for DIQs
• upper limit	12 kΩ
Output voltage	
• Type of output voltage	DC
• for signal "1", min.	23.2 V; L+ (-0.8 V), L+ (-1.3 V) for DIQs
Output current	
• for signal "1" rated value	0.1 A; 0.3 A for DIQs
• for signal "0" residual current, max.	0.5 mA
Output delay with resistive load	
• "0" to "1", typ.	420 ns; for DQn
• "1" to "0", typ.	420 ns; for DQn
Switching frequency	
• with resistive load, max.	200 kHz; 1 kHz for DIQs
• For signal interface 24 V asymmetrical	200 kHz; 1 kHz for DIQs
• For signal interface RS 422 symmetrical	2 MHz
• For signal interface TTL (5 V) asymmetrical	200 kHz
Encoder	
Interface types	
• TTL 5 V	Yes; 8 channels (direction switchable)
• RS 422	Yes; 8 channels (direction switchable)
• Source/sink input	Yes
• Input characteristic curve in accordance with IEC 61131, type 3	Yes
Isochronous mode	
Bus cycle time (TDP), min.	250 µs

SIMATIC S7-1500 Advanced Controllers

I/O modules

Technology modules

TM FAST user-programmable high-speed module**Technical specifications**

Article number	6ES7554-1AA00-0AB0 S7-1500, TM FAST
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; for RS485/RS422/TTL Input
• Short-circuit	Yes; Thermal overload protection
• Group error	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes

Article number	6ES7554-1AA00-0AB0 S7-1500, TM FAST
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	40 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200MP system manual
Decentralized operation	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFINET controller	Yes
Dimensions	
Width	35 mm
Height	147 mm
Depth	129 mm
Weights	
Weight, approx.	300 g

4

Overview



- Technology module for artificial intelligence applications
- Integrated AI-enabled processor "Intel Movidius Myriad X" enables the processing of loadable neuronal networks with very low power demand (max. 2 - 3 W)
- With interfaces for connecting cameras (USB 3.1: Intel RealSense, Gigabit Ethernet: GigE Vision)
- SD card slot for holding SIMATIC Memory Cards; allows the installation of neuronal networks and a user program (Micropython)
- Use of AI Model Deployer V1.1 to convert the neuronal network for classification and object detection applications
- Arbitrary adaptation of the module function via the Micropython script and the integrated Micropython Interpreter

Ordering data

Ordering data	Article No.
SIMATIC S7-1500, TM NPU Technology module for artificial intelligence applications 1x Ethernet, 1x USB, 1x SD Special sales release required	6ES7556-1AA00-0AB0
Accessories	
SIMATIC S7, memory card for S7-1x 00 CPU 3.3 V Flash, 2 GB	6ES7954-8LP04-0AA0
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0
SIMATIC S7-1500, spare part front door for 35 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram, 5 units per packing unit	6ES7528-0AA00-7AA0

Technical specifications

Article number	6ES7556-1AA00-0AB0 S7-1500, TM NPU
General information	
Product type designation	TM NPU
Product function	
• I&M data	Yes; I&M0 to I&M3
• Artificial intelligence/ processing of neural networks	Yes
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V17 or higher with HSP
• STEP 7 configurable/ integrated from version	- / -
• PROFIBUS from GSD version/ GSD revision	- / -
• PROFINET from GSD version/ GSD revision	GSDML V2.35
Installation type/mounting	
Mounting position	Horizontal, vertical
Rail mounting	Yes
Control cabinet installation	Yes
Supply voltage	
Rated value (DC)	24 V
Mains buffering	
• Mains/voltage failure stored energy time	5 ms
Interfaces	
Number of Ethernet interfaces	1
Number of USB interfaces	1
1. Interface	
Interface type	Ethernet
supported image format	YUYV422, UYVY422
supported image resolution	1 280 x 1 024, 1 280 x 720, 640 x 480
Interface types	
• RJ 45 (Ethernet)	Yes
• Number of ports	1
• integrated switch	No
2. Interface	
Interface type	USB
supported image format	YUYV422
supported image resolution	1 280 x 720
Interface types	
• USB	Yes; only for commissioning and test purposes
• Number of ports	1
• Output current of the interface, max.	900 mA
Interface types	
RJ 45 (Ethernet)	
• 1000 Mbps	Yes
USB port	
• USB specification	USB 3.1
• Design of the USB ports	USB type A socket
Protocols	
Protocols (Ethernet)	
• GigE Vision	Yes; V2.1
Web server	
• supported	Yes; only for Debug purposes. Should be disabled during normal operation.

SIMATIC S7-1500 Advanced Controllers

I/O modules

Technology modules

TM NPU technology module for artificial intelligence applications**Technical specifications**

Article number	6ES7556-1AA00-0AB0 S7-1500, TM NPU
Interrupts/diagnostics/ status information	
Status indicator	Yes
Alarms	No
Diagnostics function	Yes
Diagnostics indication LED	
• RUN LED	Yes
• ERROR LED	Yes
• MAINT LED	Yes
• LINK LED	Yes
• Monitoring of the supply voltage (PWR-LED)	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C
• vertical installation, max.	40 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m

Article number	6ES7556-1AA00-0AB0 S7-1500, TM NPU
Decentralized operation	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	No
to standard PROFINET controller	No
Dimensions	
Width	35 mm
Height	147 mm
Depth	129 mm
Weights	
Weight, approx.	400 g

4

Overview



TM SIWAREX WP521 ST (left) and TM SIWAREX WP522 ST (right) weighing electronics

The TM SIWAREX WP521 ST and WP522 ST (ST = Standard) are versatile weighing modules for the SIMATIC S7-1500 Advanced Controller family. With these electronic weighing systems, simple weighing applications, such as platform or hopper scales, can be seamlessly integrated into the S7-1500 automation environment.

Ordering data

TM SIWAREX WP521 ST weighing electronics

Single-channel, for platform scales or hopper scales with analog load cells (1 - 4 mV/V), 1 x LC, 4 x DQ, 3 x DI, 1 x RS 485, Ethernet port, including shielding set.

TM SIWAREX WP522 ST weighing electronics

Two-channel, for two separate platform scales or hopper scales with analog load cells (1 - 4 mV/V), per channel 1 x LC, 4 x DQ, 3 x DI, 1 x RS 485, Ethernet port, including shielding set.

SIMATIC S7-1500, front connector with screw-type terminals

40-pin, for 35 mm wide modules, including 4 jumper links and cable ties

SIMATIC S7-1500, front connector with push-in technology

40-pin, for 35 mm wide modules, including 4 jumper links and cable ties

SIWATOOL V4 & V7

Service and commissioning software for SIWAREX weighing modules

Ethernet cable patch cord 2 m (7 ft)

For connecting SIWAREX WP52x ST to a PC (SIWATOOL V7 or Modbus TCP/IP)

Article No.

7MH4980-1AA01

7MH4980-2AA01

6ES7592-1AM00-0XB0

6ES7592-1BM00-0XB0

7MH4900-1AK01

6XV1850-2GH20

Ordering data

Article No.

Accessories**SIWAREX EB extension box**

7MH4710-2AA

For extending sensor cables

SIWAREX JB junction box, aluminum housing

7MH5001-0AA20

For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes

SIWAREX JB junction box, stainless steel housing

7MH5001-0AA00

For connecting up to 4 load cells in parallel

SIWAREX JB junction box, stainless steel housing (ATEX)

7MH5001-0AA01

For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate)

SIWAREX IS Ex interface

For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately.

- Short-circuit current < 199 mA DC
- Short-circuit current < 137 mA DC

7MH4710-5BA
7MH4710-5CA**Cable (optional)****Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) – CY**

For connecting SIWAREX electronic to junction box (JB), extension box (EB), digital junction box (DB), Ex interface (IS) or between two extension boxes.

For permanent installation. Occasional bending is possible. External diameter: approx. 10.8 mm (0.43 inch)

Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F)

Sold by the meter.

- Sheath color: orange
- Sheath color (for hazardous atmospheres): blue

7MH4702-8AG
7MH4702-8AF**Remote display (optional)**

The digital remote displays can be connected directly to the SIWAREX WP231 via the RS 485 interface.

Suitable remote display: S102

Siebert Industrieelektronik GmbH
PO Box 1180
D-66565 Eppelborn
Tel.: +49 6806/980-0
Fax: +49 6806/980-999

<https://www.siebert-group.com/en/>

Detailed information is available from the manufacturer.

SIMATIC S7-1500 Advanced Controllers

I/O modules

Technology modules

TM SIWAREX WP521 ST and WP522 ST weighing electronics

Technical specifications

SIWAREX WP521 ST / WP522 ST	
Weighing modes	<ul style="list-style-type: none"> Non-automatic scales, e.g. platform and hopper scales
Ports	<ul style="list-style-type: none"> 1 × SIMATIC S7-1500 system bus 1 × Ethernet (SIWATOOL, Modbus TCP/IP) 1 × RS 485 per channel (Modbus RTU or remote display) 3 × digital inputs per channel (24 V DC) 4 × digital outputs (24 V DC short-circuit proof) per channel
Functions	<ul style="list-style-type: none"> 3 limits Zeroing Tare Tare specification Zero adjustment Trace function for signal analysis Internal restore point SIMATIC S7-1500 integrated and/or stand-alone operation
Parameter assignment	<ul style="list-style-type: none"> Using function block in SIMATIC S7-1500 and HMI Using SIWATOOL V7 Using Modbus TCP/IP Using Modbus RTU
Remote display (see accessories)	
Connection	Via RS 485
Display	Additional display for weight value
Measuring accuracy	
Error limit according to DIN 1319-1 of full-scale value at 20 °C ± 10 K (68 °F ± 10 K)	0.05%
Internal resolution	Up to ± 4 million parts
Number of measurements/second	100 or 120 (selectable)
Filter	<ul style="list-style-type: none"> Low-pass filter 0.05 ... 50 Hz Average value filter
Weighing functions	
Weight values	<ul style="list-style-type: none"> Gross Net Tare
Limit values	<ul style="list-style-type: none"> 2 × min/max 1 × empty
Zeroing	Per command
Tare	Per command
Tare specification	Per command
Compatible sensors	Analog load cells / full-bridge strain gauges (1-4 mV/V) in 4-wire or 6-wire system

SIWAREX WP521 ST / WP522 ST	
Load cell powering	
Supply voltage (regulated via feedback)	4.85 V DC
Permissible load resistance	<ul style="list-style-type: none"> R_{Lmin} > 40 Ω R_{Lmax} < 4 100 Ω
With SIWAREX IS Ex interface	<ul style="list-style-type: none"> R_{Lmin} > 50 Ω R_{Lmax} < 4 100 Ω
Load cell characteristic	1 ... 4 mV/V
Permissible range of the measurement signal (with 4 mV/V sensors)	-21.3 ... +21.3 mV
Max. distance of load cells	800 m (2 624 ft)
Connection to load cells in Ex zone 1	Optionally via SIWAREX IS Ex interface
Certificates	<ul style="list-style-type: none"> ATEX Zone 2 UL KCC EAC RCM FM IECEX
Auxiliary power supply	
Rated voltage	24 V DC
Max. power consumption WP521 ST / WP522 ST	120 mA / 200 mA
Max. power consumption SIMATIC Bus	35 mA @ 15 V
IP degree of protection to EN 60529; IEC 60529	IP20
Climatic requirements	
$T_{min(IND)} \dots T_{max(IND)}$ (operating temperature)	
• Horizontal installation	-10 ... +60 °C (14 ... 140 °F)
• Vertical installation	-10 ... +40 °C (14 ... 104 °F)
EMC requirements	According to IEC 61000-6-2:2004; IEC 61000-6-4:2007+A1:2011
Dimensions (W × H × D)	35 × 147 × 129 mm (1.38 × 5.79 × 5.08 inch)

SIMATIC S7-1500 Advanced Controllers

I/O modules

SIPLUS technology modules

SIPLUS TM Count 2x24V counter module

Overview



- 2-channel high-speed counter module
- With comprehensive parameterization options for an optimum adaptation to the task and reduction of control load
- Speed and time period measuring
- Storage and comparison functions
- Connection of 24 V encoders

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Ordering data	Article No.
SIPLUS TM Count 2x24V counter module (Extended temperature range and exposure to environmental substances) With 2 channels, max. 200 kHz; for 24 V encoder	6AG1550-1AA01-7AB0
Accessories SIPLUS S7-1500 U connector Spare part for connecting I/O modules; self-assembling backplane bus; 5 pieces per packaging unit; with conformal coating, -40...+70 °C	6AG1590-0AA00-7AA0
Other accessories	See SIMATIC S7-1500, TM Count 2x24V counter module, page 4/230

Technical specifications

Article number	6AG1550-1AA01-7AB0
Based on	6ES7550-1AA01-0AB0 SIPLUS S7-1500 TM COUNT 2X24V
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• vertical installation, max.	40 °C; = Tmax

Technical specifications

Article number	6AG1550-1AA01-7AB0
Based on	6ES7550-1AA01-0AB0 SIPLUS S7-1500 TM COUNT 2X24V
Altitude during operation relating to sea level	
<ul style="list-style-type: none"> • Installation altitude above sea level, max. • Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
<ul style="list-style-type: none"> • With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Coolants and lubricants	
<ul style="list-style-type: none"> - Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
<ul style="list-style-type: none"> - to biologically active substances according to EN 60721-3-3 - to chemically active substances according to EN 60721-3-3 - to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea	
<ul style="list-style-type: none"> - to biologically active substances according to EN 60721-3-6 - to chemically active substances according to EN 60721-3-6 - to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
<ul style="list-style-type: none"> - Against chemically active substances acc. to EN 60654-4 - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
<ul style="list-style-type: none"> - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
<ul style="list-style-type: none"> • Coatings for printed circuit board assemblies acc. to EN 61086 • Protection against fouling acc. to EN 60664-3 • Military testing according to MIL-I-46058C, Amendment 7 • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

I/O modules

SIPLUS technology modules

SIPLUS TM PosInput 2 position detection module**Overview**

- 2-channel counter and position detection module with RS422 interface
- Comprehensive parameterization options for optimum adaptation to the task
- Offloading of controller through preprocessing on the module
- Position detection with incremental and SSI absolute-value encoders
- Speed and time period measuring
- Storage and comparison functions
- Connection of encoders with RS422 signals or 5 V TTL signals

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.**

SIPLUS S7-1500 TM PosInput 2	6AG1551-1AB01-7AB0
-------------------------------------	---------------------------

Counter and position feedback module, 2 channels, for RS 422 incremental encoders or SSI absolute encoders, 2 DI, 2 DQ per channel	
---	--

With conformal coating, -40...+70 °C	
--------------------------------------	--

SIPLUS S7-1500 U connector	
-----------------------------------	--

With conformal coating, -40...+70 °C, spare part for connecting I/O modules; self-assembling backplane bus, 5 units per packing unit	6AG1590-0AA00-7AA0
---	---------------------------

Other accessories	See SIMATIC S7-1500, TM PosInput 2 counter and positioning module, page 4/233
--------------------------	---

Technical specifications

Article number	6AG1551-1AB01-7AB0	Article number	6AG1551-1AB01-7AB0
Based on	6ES7551-1AB01-0AB0 SIPLUS S7-1500 TM POSINPUT 2	Based on	6ES7551-1AB01-0AB0 SIPLUS S7-1500 TM POSINPUT 2
Ambient conditions		Use on ships/at sea	
Ambient temperature during operation		- to biologically active substances according to EN 60721-3-6	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	
• horizontal installation, max.	70 °C; Please note derating for inductive loads	- to chemically active substances according to EN 60721-3-6	
• vertical installation, min.	-40 °C; = Tmin (incl. condensation/frost)	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	
• vertical installation, max.	40 °C; Please note derating for inductive loads	- to mechanically active substances according to EN 60721-3-6	
Altitude during operation relating to sea level		Usage in industrial process technology	
• Installation altitude above sea level, max.	5 000 m	- Against chemically active substances acc. to EN 60654-4	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Yes; Class 3 (excluding trichlorethylene)	
Relative humidity		- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	Remark	
Resistance		- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	
Coolants and lubricants		Conformal coating	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	• Coatings for printed circuit board assemblies acc. to EN 61086	
Use in stationary industrial systems		• Protection against fouling acc. to EN 60664-3	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	• Military testing according to MIL-I-46058C, Amendment 7	
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 2 for high reliability	
		Yes; Type 1 protection	
		Yes; Discoloration of coating possible during service life	
		Yes; Conformal coating, Class A	

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

CM PtP

Overview



- Modules for serial communication connections, scaled according to interface types, protocols, and performance
- 4 versions with different physical transmission characteristics:
 - RS 232C, max. 19.2 Kbps
 - RS 232C, max. 115.2 Kbps
 - RS 422/RS 485, max. 19.2 Kbps
 - RS 422/RS 485, max. 115.2 Kbps
- Protocols supported
 - Freeport: User-parameterizable telegram format for universal communication
 - 3964(R) for improved transmission reliability
 - Modbus RTU Master
 - Modbus RTU Slave
 - USS, implemented through instructions

Ordering data

SIMATIC S7-1500, CM PTP RS232 BA

Communications module for serial connection RS-232 Freeport, 3964 (R), USS, 19200 kbps, 9-pin D-sub connector

Article No.

6ES7540-1AD00-0AA0

SIMATIC S7-1500, CM PTP RS232 HF

Communications module for serial connection RS-232 Freeport, 3964 (R), USS, MODBUS RTU master, device, 115200 kbps, 9-pin D-sub connector

6ES7541-1AD00-0AB0

SIMATIC S7-1500, CM PTP RS422/485 BA

Communications module for serial connection RS422, RS485 Freeport, 3964 (R), USS, 19200 kbps, 15-pin D-sub socket

6ES7540-1AB00-0AA0

SIMATIC S7-1500, CM PTP RS-422/485 HF

Communications module for serial connection RS-422 and RS-485 Freeport, 3964 (R), USS, MODBUS RTU master, device, 115200 kbps, 15-pin D-sub socket

6ES7541-1AB00-0AB0

Accessories

RS 232 connecting cable

SIMATIC S7/M7, cable for point-to-point connection

RS-232C-RS-232C, 9-pin D-sub socket respectively 5 m long

6ES7902-1AB00-0AA0

SIMATIC S7/M7, cable for point-to-point connection

RS-232C-RS-232C, 9-pin D-sub socket respectively 10 m long

6ES7902-1AC00-0AA0

SIMATIC S7/M7, cable for point-to-point connection

RS-232C-RS-232C, 9-pin D-sub socket respectively 15 m long

6ES7902-1AD00-0AA0

Article No.

RS 422/485 connecting cable

SIMATIC S7/M7, cable for point-to-point connection

RS-422-RS-422, 15-pole D-sub pins respectively 5 m long

6ES7902-3AB00-0AA0

SIMATIC S7/M7, cable for point-to-point connection

RS-422-RS-422, 15-pole D-sub pins respectively 10 m long

6ES7902-3AC00-0AA0

SIMATIC S7/M7, cable for point-to-point connection

RS-422-RS-422, 15-pole D-sub pins respectively 50 m long

6ES7902-3AG00-0AA0

SIMATIC Manual Collection on DVD, 5 languages

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

Technical specifications

Article number	6ES7540-1AD00-0AA0 S7-1500, CM PtP RS232 BA	6ES7541-1AD00-0AB0 S7-1500, CM PtP RS232 HF	6ES7540-1AB00-0AA0 S7-1500, CM PtP RS422/485 BA	6ES7541-1AB00-0AB0 S7-1500, CM PtP RS422/485 HF
General information				
Product type designation	CM PtP RS 232 BA	CM PtP RS 232 HF	CM PtP RS 422 / 485 BA	CM PtP RS 422 / 485 HF
Product function				
• I&M data	Yes; I&M 0	Yes; I&M 0	Yes; I&M 0	Yes; I&M 0
• Fast startup	Yes	Yes	Yes	Yes
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V12 / V12	V12 / V12	V12 / V12	V12 / V12
• STEP 7 configurable/ integrated from version	V5.5 SP2 with GSD file	V5.5 SP2 with GSD file	V5.5 SP2 with GSD file	V5.5 SP2 with GSD file
• PROFIBUS from GSD version/ GSD revision	- / -	- / -	- / -	- / -
• PROFINET from GSD version/ GSD revision	V2.3	V2.3 / -	V2.3	V2.3 / -
Installation type/mounting				
Rail mounting	Yes; S7-1500 mounting rail	Yes; S7-1500 mounting rail	Yes; S7-1500 mounting rail	Yes; S7-1500 mounting rail
Interface types				
RS 232				
• Transmission rate, max.	19.2 kbit/s	115.2 kbit/s		
• Cable length, max.	15 m	15 m		
• RS 232 auxiliary signals	RTS, CTS, DTR, DSR, RI, DCD	RTS, CTS, DTR, DSR, RI, DCD		
RS 485				
• Transmission rate, max.			19.2 kbit/s	115.2 kbit/s
• Cable length, max.			1 200 m	1 200 m
RS 422				
• Transmission rate, max.			19.2 kbit/s	115.2 kbit/s
• Cable length, max.			1 200 m	1 200 m
• 4-wire full duplex connection			Yes	Yes
• 4-wire multipoint connection			No	No
Protocols				
Integrated protocols				
Freepoint				
- Telegram length, max.	1 kbyte	4 kbyte	1 kbyte	4 kbyte
- Bits per character	7 or 8	7 or 8	7 or 8	7 or 8
- Number of stop bits	1 or 2 bit	1 or 2 bit	1 or 2 bit	1 or 2 bit
- Parity	None, even, odd, always 1, always 0, any	None, even, odd, always 1, always 0, any	None, even, odd, always 1, always 0, any	None, even, odd, always 1, always 0, any
3964 (R)				
- Telegram length, max.	1 kbyte	4 kbyte	1 kbyte	4 kbyte
- Bits per character	7 or 8	7 or 8	7 or 8	7 or 8
- Number of stop bits	1 or 2 bit	1 or 2 bit	1 or 2 bit	1 or 2 bit
- Parity	None, even, odd, always 1, always 0, any	None, even, odd, always 1, always 0, any	None, even, odd, always 1, always 0, any	None, even, odd, always 1, always 0, any
Modbus RTU master				
- Address area		1 to 247, extended 1 to 65535		1 to 247, extended 1 to 65535
- Number of slaves, max.		1		32
MODBUS RTU slave				
- Address area		1 to 247, extended 1 to 65535		1 to 247, extended 1 to 65535
Telegram buffer				
• Buffer memory for telegrams	2 kbyte	8 kbyte	2 kbyte	8 kbyte
• Number of telegrams which can be buffered	255	255	255	255

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

CM PtP

Technical specifications

Article number	6ES7540-1AD00-0AA0 S7-1500, CM PTP RS232 BA	6ES7541-1AD00-0AB0 S7-1500, CM PTP RS232 HF	6ES7540-1AB00-0AA0 S7-1500, CM PTP RS422/485 BA	6ES7541-1AB00-0AB0 S7-1500, CM PTP RS422/485 HF
Interrupts/diagnostics/ status information				
Diagnostics function	Yes	Yes	Yes	Yes
Alarms				
• Diagnostic alarm	Yes	Yes	Yes	Yes
• Hardware interrupt	No	No	No	No
Diagnoses				
• Wire-break	Yes	Yes	Yes	Yes
Diagnostics indication LED				
• RUN LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• Receive RxD	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED
• Transmit TxD	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED
Potential separation between backplane bus and interface				
	Yes	Yes	Yes	Yes
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	0 °C	0 °C	0 °C	0 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	0 °C	0 °C	0 °C	0 °C
• vertical installation, max.	40 °C	40 °C	40 °C	40 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200MP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200MP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200MP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200MP system manual
Decentralized operation				
to SIMATIC S7-300	Yes	Yes	Yes	Yes
to SIMATIC S7-400	Yes	Yes	Yes	Yes
to SIMATIC S7-1500	Yes	Yes	Yes	Yes
to standard PROFINET controller	Yes	Yes	Yes	Yes
Dimensions				
Width	35 mm	35 mm	35 mm	35 mm
Height	147 mm	147 mm	147 mm	147 mm
Depth	127 mm	127 mm	127 mm	127 mm
Weights				
Weight, approx.	0.22 kg	0.22 kg	0.22 kg	0.22 kg

Overview



- Communication module for connecting up to 8 IO-Link devices (three-wire connection) or 8 standard sensors
- Can be used directly downstream of an S7-1500 CPU or distributed in ET 200MP via PROFINET or PROFIBUS
- Powerful diagnostics functions facilitate preventive maintenance to avoid plant standstills
- Easy replacement of sensors/actuators without time-consuming parameter assignment

Ordering data

Article No.

Ordering data	Article No.
S7-1500, CM 8xIO-Link, communications module IO-Link Master V1.1 order front connectors (screw terminals or push-in) separately	6ES7547-1JF00-0AB0
Accessories	
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

Technical specifications

Article number	6ES7547-1JF00-0AB0 S7-1500, CM 8xIO-Link
General information	
Product type designation	CM 8xIO-Link
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V15.1 with HSP 274
• STEP 7 configurable/ integrated from version	Configurable via GSD file
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.34
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Encoder supply	
Number of outputs	8
Output current	
• Rated value	1 A; 4 A total current per module
24 V encoder supply	
• Short-circuit protection	Yes; per channel, electronic
IO-Link	
Number of ports	8
• of which simultaneously controllable	8
IO-Link protocol 1.0	Yes
IO-Link protocol 1.1	Yes
Cycle time, min.	2 ms
Size of process data, input per port	33 byte; max.
Size of process data, input per module	240 byte; max.
Size of process data, output per port	32 byte; max.
Size of process data, output per module	240 byte; max.
Memory size for device parameter	2 kbyte; for each port
Master backup	Yes
Configuration without S7-PCT	Yes
Cable length unshielded, max.	20 m
Operating modes	
• IO-Link	Yes
• DI	Yes
• DQ	No
Time Based IO	
- TIO IO-Link IN	No
- TIO IO-Link OUT	No
- TIO IO-Link IN/OUT	No
Connection of IO-Link devices	
• Port type A	Yes
• Port type B	Yes; 24 V DC via external terminal

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

CM 8xIO-Link**Technical specifications**

Article number	6ES7547-1JF00-0AB0 S7-1500, CM 8xIO-Link
Interrupts/diagnostics/ status information	
Alarms	
• Diagnostic alarm	Yes; The port diagnosis is available in the IO-Link mode only.
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Group error	Yes
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; red LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes

Article number	6ES7547-1JF00-0AB0 S7-1500, CM 8xIO-Link
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C; Observe derating
• vertical installation, min.	0 °C
• vertical installation, max.	40 °C; Observe derating
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions	
Width	35 mm
Height	147 mm
Depth	129 mm

4

Overview



DP-M	DP-S	FMS	PG/OP	S7	
●	●		●	●	●

G. JK10_XX_10148

The CM 1542-5 communications module adds a PROFIBUS connection to the SIMATIC S7-1500 controller for communication with lower-level PROFIBUS devices at transfer rates of 9.6 Kbps to 12 Mbps. The module can also be used to implement separate PROFIBUS lines, in other words, to control a number of different field devices via a number of PROFIBUS segments. The CM 1542-5 assumes all communication tasks, thus reducing the CPU workload.

The CM 1542-5 is suitable for S7 communication as well as for conventional PROFIBUS communication. This makes it possible to establish communication between the S7-1500 PLC and other devices, for example those from the SIMATIC S7-300/400 range.

- PROFIBUS DP master or DP slave with electrical interface for connecting the SIMATIC S7-1500 to PROFIBUS at up to 12 Mbps (including 45.45 Kbps)
- Communications services:
 - PROFIBUS DP
 - PG/OP communication
 - S7 communication
 - Open user communication (SEND/RECEIVE) via FDL
- Time synchronization
- Simple programming and configuration over PROFIBUS
- Cross-network PG communication using S7 routing
- Module replacement without programming device/engineering station
- Data record routing (PROFIBUS DP)
- Adding or modifying distributed I/O during operation

Hardware innovations of the CM 1542-5 product with new article number 6GK7542-5DX10-0XE0 extend the permissible ambient temperature for operation from -25 °C to 60 °C (no condensation or icing) for a horizontally mounted rack and -25 °C to 40 °C (no condensation or icing) for a vertically mounted rack.

Furthermore, the permissible installation altitude for the CM 1542-5 module (6GK7542-5DX10-0XE0) has been extended to installation altitudes of up to 5000 m.

Ordering data

Article No.

CM 1542-5 communications module

Communications module for electrical connection of SIMATIC S7-1500 to PROFIBUS as DP master or DP slave; S7 and PG/OP communication, data record routing, time synchronization, diagnostics

6GK7542-5DX10-0XE0**Accessories****PROFIBUS FastConnect RS485 connection plug**

With 90° cable outlet; with insulation displacement terminals, max. transfer rate 12 Mbps

- Without programming device interface
- With programming device interface

6ES7972-0BA52-0XA0**6ES7972-0BB52-0XA0****PROFIBUS FC standard cable**

2-core bus cable, shielded, special design for fast installation, sold by the meter; delivery unit: max. 1000 m, minimum order quantity 20 m

6XV1830-0EH10**PROFIBUS FastConnect stripping tool**

Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable

6GK1905-6AA00**PROFIBUS bus terminal 12M**

Bus terminal for connection of PROFIBUS stations up to 12 Mbps with connecting cable

6GK1500-0AA10

Technical specifications

Article number	6AG1542-5DX10-7XE0
Product type designation	CM 1542-5
transfer rate	
transfer rate	
• at the 1st interface according to PROFIBUS	9.6 kbit/s ... 12 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	0
number of electrical connections	
• at the 1st interface according to PROFIBUS	1
type of electrical connection	
• at the 1st interface according to PROFIBUS	9-pin Sub-D socket (RS485)
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	15 V
relative symmetrical tolerance at DC	
• at 15 V	3 %
consumed current	
• from backplane bus at DC at 15 V typical	0.2 A
power loss [W]	3 W

SIMATIC S7-1500 Advanced Controllers

I/O modules
Communication

CM 1542-5

Technical specifications

Article number	6AG1542-5DX10-7XE0
Product type designation	CM 1542-5
ambient conditions	
ambient temperature	
• for vertical installation during operation	-40 ... +40 °C
• for horizontally arranged busbars during operation	-40 ... +70 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
installation altitude at height above sea level maximum	5 000 m
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
relative humidity	
• with condensation according to IEC 60068-2-38 maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets
resistance to biologically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request
• conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
resistance to chemically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
• conformity according to EN 60721-3-6	Yes
resistance to mechanically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
• conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
protection class IP	IP20

Article number	6AG1542-5DX10-7XE0
Product type designation	CM 1542-5
design, dimensions and weights	
module format	Compact module S7-1500 single width
width	35 mm
height	142 mm
depth	129 mm
net weight	0.4 kg
fastening method	
• S7-1500 rail mounting	Yes
product features, product functions, product components general	
number of units	
• per CPU maximum	8
• note	depending on CPU type
performance data open communication	
number of possible connections for open communication by means of SEND/RECEIVE blocks maximum	30
data volume	
• as user data per connection for open communication by means of SEND/RECEIVE blocks maximum	240 byte
performance data PROFIBUS DP	
service as DP master	
• DPV1	Yes
number of DP slaves	
• on DP master operable	125
data volume	
• of the address range of the inputs as DP master total	8 192 byte
• of the address range of the outputs as DP master total	8 192 byte
• of the address range of the inputs per DP slave	244 byte
• of the address range of the outputs per DP slave	244 byte
service as DP slave	
• DPV0	Yes
• DPV1	Yes
data volume	
• of the address range of the inputs as DP slave total	240 byte
• of the address range of the outputs as DP slave total	240 byte
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	48; depending on the system upper limit
performance data multi-protocol mode	
number of active connections with multi-protocol mode	48
performance data telecontrol	
protocol is supported	
• TCP/IP	No

Technical specifications

Article number	6AG1542-5DX10-7XE0
Product type designation	CM 1542-5
product functions management, configuration, engineering	
configuration software	
• required	STEP 7 Professional V18 (TIA Portal) or higher
identification & maintenance function	
• I&MO - device-specific information	Yes
• I&M1 - higher level designation/location designation	Yes
product functions diagnostics	
product function web-based diagnostics	Yes; via S7-1500 CPU

Article number	6AG1542-5DX10-7XE0
Product type designation	CM 1542-5
product functions time	
product function pass on time synchronization	Yes
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

CP 1542-5

Overview



DP-M	DP-S	FMS	PG/OP	S7/S5	
●	●		●	●	

G. IK10_XX10144

The CP 1542-5 communications processor expands the SIMATIC S7-1500 controller to include a PROFIBUS connection for communication with lower-level PROFIBUS devices in transfer rates from 9.6 Kbps to 12 Mbps. This CPU allows the implementation of separate PROFIBUS lines, in other words the control of multiple field devices over multiple PROFIBUS segments. The CP 1542-5 handles all communication tasks, thus reducing the CPU load.

- PROFIBUS DP master or DP slave with electrical interface for connecting the SIMATIC S7-1500 to PROFIBUS at up to 12 Mbps (including 45.45 Kbps)

Communications services:

- PROFIBUS DP
- PG/OP communication
- Time synchronization
- Simple programming and configuration over PROFIBUS
- Cross-network PG communication using S7 routing
- Module replacement without programming device/engineering station

Hardware innovations of the CP 1542-5 product with new article number 6GK7542-5FX10-0XE0 extend the permissible ambient temperature for operation from -25 °C to 60 °C (no condensation or icing) for a horizontally mounted rack and -25 °C to 40 °C (no condensation or icing) for a vertically mounted rack.

In addition, the permissible installation altitude for the CP 1542-5 module (6GK7542-5FX10-0XE0) has been extended to installation altitudes of up to 5000 m.

The use of innovative, high-quality hardware components to fulfill the requirements listed above results in higher power consumption from the backplane bus in the new product CP 1542-5 (6GK7542-5FX10-0XE0) compared with the predecessor product.

Ordering data

Article No.

CP 1542-5 communications processor

Communications module for electrical connection of SIMATIC S7-1500 to PROFIBUS as DP master or DP slave; PG/OP communication, time synchronization, diagnostics; smaller quantity structure

6GK7542-5FX10-0XE0

Accessories

PROFIBUS FastConnect RS485 connection plug

With 90° cable outlet; with insulation displacement terminals, max. transfer rate 12 Mbps

- Without programming device interface
- With programming device interface

6ES7972-0BA52-0XA0

6ES7972-0BB52-0XA0

PROFIBUS FC standard cable

2-core bus cable, shielded, special design for fast installation, sold by the meter; delivery unit: max. 1000 m, minimum order quantity 20 m

6XV1830-0EH10

PROFIBUS FastConnect stripping tool

Stripping tool for fast stripping of the PROFIBUS FastConnect bus cable

6GK1905-6AA00

PROFIBUS bus terminal 12M

Bus terminal for connection of PROFIBUS stations up to 12 Mbps with connecting cable

6GK1500-0AA10

Technical specifications

Article number	6GK7542-5FX10-0XE0
product type designation	CP 1542-5
transfer rate	
transfer rate	
• at the 1st interface according to PROFIBUS	9.6 kbit/s ... 12 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	0
number of electrical connections	
• at the 1st interface according to PROFIBUS	1
type of electrical connection	
• at the 1st interface according to PROFIBUS	9-pin Sub-D socket (RS485)
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	15 V
relative symmetrical tolerance at DC	
• at 15 V	3 %
consumed current	
• from backplane bus at DC at 15 V typical	0.2 A
power loss [W]	3 W

Technical specifications

Article number	6GK7542-5FX10-0XE0
product type designation	CP 1542-5
ambient conditions	
ambient temperature	
• for vertical installation during operation	-25 ... +40 °C
• for horizontally arranged busbars during operation	-25 ... +60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
• note	without condensation or icing
installation altitude at height above sea level maximum	5 000 m
ambient condition relating to ambient temperature - air pressure - installation altitude	restrictions for installation altitudes > 2 000 m, see manual
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-1500 single width
width	35 mm
height	142 mm
depth	129 mm
net weight	0.4 kg
fastening method	
• S7-1500 rail mounting	Yes
product features, product functions, product components general	
number of units	
• per CPU maximum	8
• note	depending on CPU type
performance data PROFIBUS DP	
service as DP master	
• DPV1	Yes
number of DP slaves	
• on DP master operable	32
data volume	
• of the address range of the inputs as DP master total	2 048 byte
• of the address range of the outputs as DP master total	2 048 byte
• of the address range of the inputs per DP slave	244 byte
• of the address range of the outputs per DP slave	244 byte
service as DP slave	
• DPV0	Yes
• DPV1	Yes
data volume	
• of the address range of the inputs as DP slave total	240 byte
• of the address range of the outputs as DP slave total	240 byte

Article number	6GK7542-5FX10-0XE0
product type designation	CP 1542-5
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	16; depending on the system upper limit
performance data multi-protocol mode	
number of active connections with multi-protocol mode	16
performance data telecontrol	
protocol is supported	
• TCP/IP	No
product functions management, configuration, engineering	
configuration software	
• required	STEP 7 Professional V18 (TIA Portal) or higher
identification & maintenance function	
• I&M0 - device-specific information	Yes
• I&M1 - higher level designation/location designation	Yes
product functions diagnostics	
product function web-based diagnostics	Yes; via S7-1500 CPU
product functions time	
product function pass on time synchronization	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
• total	115.52 kg
• during manufacturing	21.24 kg
• during operation	93.93 kg
• after end of life	0.35 kg
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

CM 1542-1

Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
	●	●	●	●	●	●	●

3_1K10_X1_10383

Communications module for connecting a SIMATIC S7-1500 to PROFINET networks as PROFINET IO controller or PROFINET IO device.

The CM 1542-1 supports the following communications services:

- PG/OP communication
- S7 communication
- Open communication (SEND/RECEIVE)
- PROFINET communication
- IT communication;
 - Web diagnostics by means of access to the web server of the S7-1500 system
 - Static IP routing with up to 1 Mbps via IPv4 to other CP 1543-1/CM 1542-1 units in an S7-1500 system, e.g. for web server access without real-time capability

Hardware innovations of the CM 1542-1 product with new Article No. 6GK7542-1AX10-0XE0 extend the permissible ambient temperature for operation from -25 °C to 60 °C (no condensation or icing) for a horizontally mounted rack and -25 °C to 40 °C (no condensation or icing) for a vertically mounted rack.

Furthermore, the permissible installation altitude for the module CM 1542-1 (6GK7542-1AX10-0XE0) has been extended to installation altitudes of up to 5000 m.

Ordering data

Article No.

CM 1542-1 communications module

For connecting SIMATIC S7-1500 to PROFINET IO, TCP/IP, ISO-on-TCP, UDP, S7 communication, IP broadcast/multicast, SNMPV1, time synchronization via NTP; 2 x RJ45 interface with 10/100 Mbps

6GK7542-1AX10-0XE0

Accessories

IE FC RJ45 plug 4 x 2

RJ45 connector for Industrial Ethernet (10/100/1000/10000 Mbps, Cat6_A) with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB12-2AA0
6GK1901-1BB12-2AB0
6GK1901-1BB12-2AE0

IE FC TP standard cable GP 4 x 2

8-core, shielded TP installation cable for connection to IE FC RJ45 modular outlet for universal applications; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

- AWG22, for connection to IE FC RJ45 modular outlet
- AWG24, for connection to IE FC RJ45 plug 4 x 2

6XV1870-2E

6XV1878-2A

SCALANCE XC206-2SFP G Industrial Ethernet switch

Manageable Layer 2 IE switch IEC 62443-4-2 certified 6x 10/100/1000 Mbps RJ45 ports 2x 1000 Mbps SFP 1x console port

6GK5206-2GS00-2AC2

Technical specifications

Article number	6GK7542-1AX10-0XE0
product type designation	CM 1542-1
transfer rate	
transfer rate	
• at the 1st interface	10 ... 100 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	1
number of electrical connections	
• at the 1st interface according to Industrial Ethernet	2
type of electrical connection	
• at the 1st interface according to Industrial Ethernet	RJ45 port

Technical specifications

Article number	6GK7542-1AX10-0XE0
product type designation	CM 1542-1
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	15 V
relative symmetrical tolerance at DC	
• at 15 V	3 %
consumed current	
• from backplane bus at DC at 15 V typical	0.22 A
power loss [W]	3.3 W
ambient conditions	
ambient temperature	
• for vertical installation during operation	-25 ... +40 °C
• for horizontally arranged busbars during operation	-25 ... +60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
• note	without condensation or icing
installation altitude at height above sea level maximum	5 000 m
ambient condition relating to ambient temperature - air pressure - installation altitude	restrictions for installation altitudes > 2 000 m, see manual
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-1500 single width
width	35 mm
height	142 mm
depth	129 mm
net weight	0.4 kg
fastening method	
• S7-1500 rail mounting	Yes
product features, product functions, product components general	
number of units	
• per CPU maximum	8
• note	depending on CPU type
performance data open communication	
number of possible connections for open communication	
• by means of T blocks maximum	64; depending on the system upper limit
data volume	
• as user data per ISO on TCP connection for open communication by means of T blocks maximum	65 536 byte
number of Multicast stations	6
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	64; depending on the system upper limit

Article number	6GK7542-1AX10-0XE0
product type designation	CM 1542-1
performance data multi-protocol mode	
number of active connections with multi-protocol mode	64
performance data PROFINET communication as PN IO controller	
product function PROFINET IO controller	Yes
number of PN IO devices on PROFINET IO controller operable total	128
number of PN IO IRT devices on PROFINET IO controller operable	64
number of external PN IO lines with PROFINET per rack	10
data volume	
• as user data for input variables as PROFINET IO controller maximum	8 Kibyte
• as user data for output variables as PROFINET IO controller maximum	8 Kibyte
• as user data for input variables per PN IO device as PROFINET IO controller maximum	1 433 byte
• as user data for output variables per PN IO device as PROFINET IO controller maximum	1 433 byte
• as user data for input variables per PN IO device for each sub-module as PROFINET IO controller maximum	256 byte
• as user data for output variables per PN IO device for each sub-module as PROFINET IO controller maximum	256 byte
performance data PROFINET communication as PN IO device	
product function PROFINET IO device	Yes
data volume	
• as user data for input variables as PROFINET IO device maximum	8 192 byte
• as user data for output variables as PROFINET IO device maximum	8 192 byte
• as user data for input variables for each sub-module as PROFINET IO device	256 byte
• as user data for output variables for each sub-module as PROFINET IO device	256 byte
• as user data for the consistency area for each sub-module	256 byte
number of submodules per PROFINET IO-Device	32
performance data telecontrol	
protocol is supported	
• TCP/IP	Yes

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

CM 1542-1

Technical specifications

Article number	6GK7542-1AX10-0XE0
product type designation	CM 1542-1
product functions management, configuration, engineering	
product function MIB support	Yes
protocol is supported	
• SNMP v1	Yes
• DCP	Yes
• LLDP	Yes
configuration software	
• required	STEP 7 Professional V18 (TIA Portal) or higher
identification & maintenance function	
• I&MO - device-specific information	Yes
• I&M1 - higher level designation/location designation	Yes
product function is supported identification link	Yes
product functions diagnostics	
product function web-based diagnostics	Yes; via S7-1500 CPU
product functions switch	
product feature switch	Yes
product function	
• switch-managed	No
• with IRT PROFINET IO switch	Yes
• configuration with STEP 7	Yes
product functions routing	
service routing note	IP routing up to 1 Mbps
product function	
• static IP routing	Yes
• static IP routing IPv6	No
• dynamic IP routing	No
• dynamic IP routing IPv6	No
protocol is supported	
• RIP v1	No
• RIPv2	No
• RIPnG for IPv6	No
• OSPFv2	No
• OSPFv3 for IPv6	No
• VRRP	No
• VRRP for IPv6	No
• BGP	No
• PPP	No
• PPoE via DSL	No

Article number	6GK7542-1AX10-0XE0
product type designation	CM 1542-1
product functions redundancy	
product function	
• ring redundancy	Yes
• redundancy manager	Yes
protocol is supported Media Redundancy Protocol (MRP)	Yes
product functions security	
product function	
• switch-off of non-required services	Yes
• blocking of communication via physical ports	No
• log file for unauthorized access	No
product functions time	
product function SICLOCK support	Yes
product function pass on time synchronization	Yes
protocol is supported	
• NTP	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
• total	115.52 kg
• during manufacturing	21.24 kg
• during operation	93.93 kg
• after end of life	0.35 kg
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

Overview



ISO	TCP/ UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
●	●			●	●	●	●

©_IIR10_XX 103893

The SIMATIC CP 1543-1 communications processor securely connects the SIMATIC S7-1500 PLC to Industrial Ethernet networks. By combining a variety of security features such as stateful packet inspection firewalls and VPNs, and data encryption protocols such as FTPS and SNMPv3, the communications processor protects individual S7-1500 stations or even entire automation cells against unauthorized access.

The CP can also be used for integrating the S7-1500 station into an IPv6-based network. All functions are configured by means of STEP 7 Professional V12 (TIA Portal) or higher.

The CP 1543-1 supports the following communications services:

- PG/OP communication
- S7 communication
- Open user communication (SEND/RECEIVE, FETCH/WRITE)
- IT communication
 - FTP functions (File Transfer Protocol FTP/FTPS) for file management and access to data blocks in the CPU (client and server function)
 - Access (read and write modes) to csv files stored on the memory card of the CPU via FTP(S)
 - Sending emails via SMTP or ESMTP with "SMTP-Auth" for authentication on an email server (also with IPv6)
 - Static IP routing with up to 1 Mbps via IPv4 to other CP 1543-1/CM 1542-1 units in an S7-1500 system, e.g. for web server access without real-time capability
- Security Integrated
 - Stateful Packet Inspection Firewall
 - Secure communication via VPN (IPsec)
 - Network authentication according to IEEE 802.1X using the EAP methods MD5, TLS, PEAP, TTLS, MSCHAPv2 or PWD
- Protocols for secure communication
 - Secure access to the web server of the CPU via the HTTPS protocol
 - Secure file transfer using FTPS
 - Secure time of day transfer (NTP)
 - SNMPv3 for tap-proof transfer of network analysis information
 - Encrypted email communication via SMTPS (Port 587)
 - Secure open communication over TCP/IP
 - Connection to SINEMA Remote Connect via OpenVPN
- Integration of the S7-1500 into IPv6-based networks; An IPv6-compliant IP address can be used for the following communications services:
 - FETCH/WRITE access (CP as server)
 - FTP server mode
 - FTP client mode with addressing via program block
 - Email transfer with addressing via program block

Ordering data

	Article No.	Article No.	
CP 1543-1 communications processor For connecting SIMATIC S7-1500 to Industrial Ethernet; TCP/IP, ISO, UDP, S7 communication, IP broadcast/multicast, security (VPN, firewall) diagnostics SNMPv1/v3, DHCP, FTP client/server, email, IPv4/IPv6, IEEE 802.1X (radius), time synchronization via NTP, 1x RJ45 (10/100/1000 Mbps)	6GK7543-1AX00-0XE0		
Accessories IE FC RJ45 plug 180 2 x 2 RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface <ul style="list-style-type: none"> • 1 pack = 1 unit • 1 pack = 10 units • 1 pack = 50 units 	6GK1901-1BB10-2AA0 6GK1901-1BB10-2AB0 6GK1901-1BB10-2AE0		
		IE FC RJ45 plug 4 x 2 RJ45 plug-in connector for Industrial Ethernet (10/100/1000/10000 Mbps, Cat6A) with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface <ul style="list-style-type: none"> • 1 pack = 1 unit • 1 pack = 10 units • 1 pack = 50 units 	6GK1901-1BB12-2AA0 6GK1901-1BB12-2AB0 6GK1901-1BB12-2AE0
		IE FC TP standard cable GP 2 x 2 (type A) 4-core, shielded TP installation cable for connecting to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1840-2AH10

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

CP 1543-1

Ordering data

IE FC TP standard cable GP 4 x 2

8-core, shielded TP installation cable for connection to IE FC RJ45 modular outlet for universal applications; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

- AWG22, for connection to IE FC RJ45 modular outlet
- AWG24, for connection to IE FC RJ45 plug 4 x 2

6XV1870-2E

6XV1878-2A

IE FC stripping tool

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

SCALANCE XC206-2SFP Industrial Ethernet switch

Manageable Layer 2 IE switch; IEC 62443-4-2 certified; 6x 10/100 Mbps RJ45 ports; 2x 100/1000 Mbps SFP; 1x console port

Article No.

6GK5206-2BS00-2AC2

Technical specifications

Article number	6GK7543-1AX00-0XE0
product type designation	CP 1543-1
transfer rate	
transfer rate	
• at the 1st interface	10 ... 1 000 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	1
number of electrical connections	
• at the 1st interface according to Industrial Ethernet	1
type of electrical connection	
• at the 1st interface according to Industrial Ethernet	RJ45 port
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	15 V
relative symmetrical tolerance at DC	
• at 15 V	3 %
consumed current	
• from backplane bus at DC at 15 V typical	0.35 A
power loss [W]	5.3 W
ambient conditions	
ambient temperature	
• for vertical installation during operation	0 ... 40 °C
• for horizontally arranged busbars during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20

Article number	6GK7543-1AX00-0XE0
product type designation	CP 1543-1
design, dimensions and weights	
module format	Compact module S7-1500 single width
width	35 mm
height	142 mm
depth	129 mm
net weight	0.35 kg
fastening method	
• S7-1500 rail mounting	Yes
product features, product functions, product components general	
number of units	
• per CPU maximum	8
• note	depending on CPU type
performance data open communication	
number of possible connections for open communication	
• by means of T blocks maximum	118; depending on the system upper limit
data volume	
• as user data per ISO on TCP connection for open communication by means of T blocks maximum	65 536 byte
number of Multicast stations	118
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	118; depending on the system upper limit
performance data multi-protocol mode	
number of active connections with multi-protocol mode	118

Technical specifications

Article number	6GK7543-1AX00-0XE0
product type designation	CP 1543-1
performance data IT functions	
number of possible connections	
• as client by means of FTP maximum	32
• as server by means of FTP maximum	16
number of possible connections	
• as server by means of HTTP maximum	4
• as email client maximum	1
data volume as user data for email maximum	64 Kibyte
performance data telecontrol	
protocol is supported	
• TCP/IP	Yes
product functions management, configuration, engineering	
product function MIB support	Yes
protocol is supported	
• SNMP v1	Yes
• SNMP v3	Yes
• DCP	Yes
• LLDP	Yes
configuration software	
• required	STEP 7 Professional V14 (TIA Portal) or higher
identification & maintenance function	
• I&MO - device-specific information	Yes
• I&M1 - higher level designation/location designation	Yes
product functions diagnostics	
product function web-based diagnostics	Yes; via S7-1500 CPU
product functions routing	
service routing note	IP routing up to 1 Mbps
product function	
• static IP routing	Yes
• static IP routing IPv6	No
• dynamic IP routing	No
• dynamic IP routing IPv6	No
protocol is supported	
• RIP v1	No
• RIPv2	No
• RIPnG for IPv6	No
• OSPFv2	No
• OSPFv3 for IPv6	No
• VRRP	No
• VRRP for IPv6	No
• BGP	No
• PPP	No
• PPOE via DSL	No

Article number	6GK7543-1AX00-0XE0
product type designation	CP 1543-1
product functions security	
firewall version	stateful inspection
product function with VPN connection	IPSec
type of encryption algorithms with VPN connection	AES-256, AES-192, AES-128, 3DES-168, DES-56
type of authentication procedure with VPN connection	Preshared key (PSK), X.509v3 certificates
type of hashing algorithms with VPN connection	MD5, SHA-1, SHA-256, SHA-384, SHA-512
number of possible connections with VPN connection	16
product function	
• IEEE 802.1x (radius)	Yes
• password protection for Web applications	No
• ACL - IP-based	No
• ACL - IP-based for PLC/routing	No
• switch-off of non-required services	Yes
• blocking of communication via physical ports	No
• log file for unauthorized access	Yes
product functions time	
product function SICLOCK support	No
product function pass on time synchronization	Yes
protocol is supported	
• NTP	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
• total	115.52 kg
• during manufacturing	21.24 kg
• during operation	93.93 kg
• after end of life	0.35 kg
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

CP 1545-1

Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
●	●			●	●	●	●

The SIMATIC CP 1545-1 communications processor securely connects the SIMATIC S7-1500 PLC to Industrial Ethernet networks. The new CloudConnect functionality enables easy and reliable transfer of all selected data from the SIMATIC S7-1500 to MindSphere, or a cloud solution that supports the standardized MQTT protocol, e.g. Microsoft Azure or IBM Cloud. The CP protects the SIMATIC S7-1500 station from unauthorized access with the integrated SPI (Stateful Packet Inspection) firewall. Data from cloud systems or MQTT brokers can also be received using the MQTT protocol.

The CloudConnect function of the CP 1545-1 is easy to configure with a few input screens in TIA Portal. First, all the parameters required for the different cloud platforms are specified. The data intended for the cloud is then selected from the tag management of the SIMATIC S7-1500 and saved as topics to be transferred with the corresponding trigger conditions.

All functions are configured using STEP 7 Professional V15.1 update 3 (TIA Portal) or higher.

The CP 1545-1 supports the following communications services:

- PG/OP communication
- S7 communication
- Open user communication (SEND/RECEIVE, FETCH/WRITE)
- IT communication
 - MQTT Publish for transferring selected data to a cloud system or MQTT broker
 - MQTT Subscribe for receiving data from a cloud system or MQTT broker
 - FTP functions (File Transfer Protocol FTP/FTPS) for file management and access to data blocks in the CPU (client and server function)
 - Access (read and write modes) to csv files stored on the memory card of the CPU via FTP(S)
 - Sending emails via SMTP or ESMTP with "SMTP-Auth" for authentication on an email server (also with IPv6)
 - Static IP routing with up to 1 Mbps via IPv4 to other CP 1545-1 / CP 1543-1 / CM 1542-1 units in the S7-1500 system, e.g. for web server accesses without real-time capability
- Security Integrated
 - Stateful Packet Inspection Firewall
- Protocols for secure communication
 - Secure access to the web server of the CPU via the HTTPS protocol
 - Secure file transfer using FTPS
 - Secure time of day transfer (NTP)
 - SNMPv3 for tap-proof transfer of network analysis information
 - Encrypted email communication via SMTPS (Port 587)
 - Secure open communication over TCP/IP
- Integration of the S7-1500 into IPv6-based networks

An IPv6-compliant IP address can be used for the following communications services:

 - MQTT
 - FETCH/WRITE access (CP as server)
 - FTP server mode
 - FTP client mode with addressing via program block
 - Email transfer with addressing via program block

Ordering data

Article No.

CP 1545-1 communications processor
 CP 1545-1 communications processor for connecting the SIMATIC S7-1500 to Industrial Ethernet; TCP/IP, UDP, S7 communication, security (firewall), SNMPv1/v3, DHCP, FTP client/server, email, IPv4/IPv6, time synchronization via NTP, connection to cloud systems via MQTT, 1x RJ45 (10/100/1000 Mbps)

6GK7545-1GX00-0XE0

Technical specifications

Article number	6GK7545-1GX00-0XE0
product type designation	CP 1545-1
transfer rate	
transfer rate	
• at the 1st interface	10 ... 1 000 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	1
number of electrical connections	
• at the 1st interface according to Industrial Ethernet	1
type of electrical connection	
• at the 1st interface according to Industrial Ethernet	RJ45 port

Technical specifications

Article number	6GK7545-1GX00-0XE0
product type designation	CP 1545-1
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	15 V
relative symmetrical tolerance at DC	
• at 15 V	3 %
consumed current	
• from backplane bus at DC at 15 V typical	0.3 A
power loss [W]	4.5 W
ambient conditions	
ambient temperature	
• for vertical installation during operation	0 ... 40 °C
• for horizontally arranged busbars during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-1500 single width
width	35 mm
height	142 mm
depth	129 mm
net weight	0.32 kg
fastening method	
• S7-1500 rail mounting	Yes
product features, product functions, product components general	
number of units	
• per CPU maximum	8
• note	depending on CPU type
product functions cloud connectivity	
protocol is supported	
• Message Queuing Telemetry Transport (MQTT)	Yes
• Advanced Message Queuing Protocol (AMQP)	No
product function for cloud connectivity	
• trigger management	Yes
• time stamping	Yes
product feature for cloud connectivity buffered message frame memory	No
number of data points per device maximum	500

Article number	6GK7545-1GX00-0XE0
product type designation	CP 1545-1
performance data open communication	
number of possible connections for open communication	
• by means of T blocks maximum	118; depending on the system upper limit
data volume	
• as user data per ISO on TCP connection for open communication by means of T blocks maximum	65 536 byte
number of Multicast stations	118
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	118; depending on the system upper limit
performance data multi-protocol mode	
number of active connections with multi-protocol mode	118
performance data IT functions	
number of possible connections	
• as client by means of FTP maximum	32
• as server by means of FTP maximum	16
number of possible connections	
• as server by means of HTTP maximum	4
• as email client maximum	1
data volume as user data for email maximum	64 Kibyte
performance data telecontrol	
protocol is supported	
• TCP/IP	Yes
product functions management, configuration, engineering	
product function MIB support	Yes
protocol is supported	
• SNMP v1	Yes
• SNMP v3	Yes
• DCP	Yes
• LLDP	Yes
configuration software	
• required	STEP 7 Professional V15.1 (TIA Portal) or higher
identification & maintenance function	
• I&M0 - device-specific information	Yes
• I&M1 - higher level designation/location designation	Yes

SIMATIC S7-1500 Advanced Controllers

I/O modules
Communication

CP 1545-1

Technical specifications

Article number	6GK7545-1GX00-0XE0
product type designation	CP 1545-1
product functions diagnostics	
product function web-based diagnostics	Yes; via S7-1500 CPU
product functions routing	
service routing note	IP routing up to 1 Mbps
product function	
• static IP routing	Yes
• static IP routing IPv6	No
• dynamic IP routing	No
• dynamic IP routing IPv6	No
protocol is supported	
• RIP v1	No
• RIPv2	No
• RIPnG for IPv6	No
• OSPFv2	No
• OSPFv3 for IPv6	No
• VRRP	No
• VRRP for IPv6	No
• BGP	No
• PPP	No
• PPoE via DSL	No
product functions security	
firewall version	stateful inspection
product function with VPN connection	IPSec
type of encryption algorithms with VPN connection	AES-256, AES-192, AES-128, 3DES-168, DES-56
type of authentication procedure with VPN connection	Preshared key (PSK), X.509v3 certificates
type of hashing algorithms with VPN connection	MD5, SHA-1, SHA-256, SHA-384, SHA-512
number of possible connections with VPN connection	16
product function	
• password protection for Web applications	No
• ACL - IP-based	No
• ACL - IP-based for PLC/routing	No
• switch-off of non-required services	Yes
• blocking of communication via physical ports	No
• log file for unauthorized access	Yes

Article number	6GK7545-1GX00-0XE0
product type designation	CP 1545-1
product functions time	
product function SICLOCK support	No
product function pass on time synchronization	Yes
protocol is supported	
• NTP	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
• total	115.52 kg
• during manufacturing	21.24 kg
• during operation	93.93 kg
• after end of life	0.35 kg
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

4

Overview



- TIM 1531 IRC communications module for telecontrol applications with four interfaces as a stand-alone device for SIMATIC S7-1500, S7-400, S7-300 and ET 200SP for use in wide area networks (WANs)
- For universal use in a station, node station and control center
- Communication either via the SINAUT ST7, IEC 60870-5-101/104 or DNP3 telecontrol protocols
- Operation via VPN (IPsec/OpenVPN) with additional SIMATIC NET components
- Wireless communication via mobile wireless routers, modems or radio devices
- Wired communication via Ethernet, internet, 2-/4-wire cables (SHDSL), dial-up modems or dedicated line modem
- Frame buffer for seamless recording of data
- Support of redundant communication paths
- Simple configuration with STEP 7 Professional (TIA Portal)
- Device redundancy TIM 1531 IRC (as station): Redundant telecontrol connection of an S7-1500R/H system to a PCS 7 process control system

Ordering data

	Article No.		Article No.
TIM 1531 IRC communications module TIM 1531 IRC communications module for SIMATIC S7-1500, S7-400, S7-300 and ET 200SP with SINAUT ST7, DNP3 and IEC 60870-5-101/104 with three RJ45 interfaces for communication via IP-based networks (WAN/LAN) and an RS232/RS485 interface for communication via conventional WANs	6GK7543-1MX00-0XE0	SCALANCE MUM853-1 5G router (EU), IP30, for wireless IP communication of Ethernet-based applications via public 3/4/5G mobile wireless networks and private 5G networks, VPN, firewall, NAT, IPv6, connection to SINEMA RC via CLP, 4 SMA connectors, 1 x micro SIM slot, 4 x 10/100/1000 Mbps RJ45 port, redundant 24 V DC, -30 ... +60 °C, CLP slot, 1 x DI and 1 x DQ, note country approvals!	6GK5853-2EA00-2DA1
STEP 7 Professional V19 engineering software <ul style="list-style-type: none"> • SIMATIC STEP 7 Professional V18 floating license • Upgrade SIMATIC STEP 7 Basic V11 ... V18 → V19 floating license 	6ES7822-1AE23-0YA5 6ES7822-0AE23-0YE5	SCALANCE M826-2 SHDSL router For IP communication via the 2-wire and 4-wire cables of Ethernet-based programmable controllers; SHDSL topology: point-to-point, bonding, line bridge mode, routing mode with VPN, firewall, NAT; 4-port switch, 1 x digital input, 1 x digital output	6GK5826-2AB00-2AB2
Accessories Mounting rail SIMATIC S7-1500, 160 mm mounting rail; incl. grounding screw, integrated DIN rail for mounting small items, such as terminals, relays	6ES7590-1AB60-0AA0	SITOP compact 24 V/0.6 A 1-phase power supply with wide-range input 85 ... 264 V AC/110 to 300 V DC, stabilized output voltage 24 V, rated output current value 0.6 A, slim design	6EP1331-5BA00
SIMATIC Memory Card SIMATIC S7, Memory Card for S7-1x 00 CPU/SINAMICS, 3.3 V flash, 24 MB	6ES7954-8LF03-0AA0	SIMATIC PM 1507 24 V/3 A Stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC Output: 24 V DC/3 A	6EP1332-4BA00
SCALANCE M876-4 4G router; for wireless IP communication of Ethernet-based programmable controllers via LTE (4G) mobile wireless optimized for worldwide use, VPN, firewall, NAT; 4-port switch; 2 x SMA antenna, MIMO technology; 1 x digital input, 1 x digital output; note country approvals!	6GK5876-4AA10-2BA2	SIMATIC PM 1507 24 V/8 A Stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC Output: 24 V DC/8 A <ul style="list-style-type: none"> • Output current 3 A • Output current 8 A 	6EP1333-4BA00 6EP1333-4BA00

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

TIM 1531 IRC (for S7-1500)

Technical specifications

Article number	6GK7543-1MX00-0XE0
product type designation	TIM 1531 IRC
transfer rate	
transfer rate	
• at the 1st interface	10 ... 1 000 Mbit/s
• at the 2nd interface	10 ... 100 Mbit/s
• at the 3rd interface	10 ... 100 Mbit/s
• according to RS 232	300 ... 115 200 bit/s
interfaces	
number of interfaces according to Industrial Ethernet	3
number of electrical connections	
• for external data transmission according to RS 232	1
• for power supply	1
number of slots	
• for memory cards	1
type of electrical connection	
• of Industrial Ethernet interface	RJ45 port
type of electrical connection	
• at interface 1 for external data transmission	9 pin Sub-D-connector, RS232 switchable to RS485
• for power supply	2-pole plugable terminal block
slot version	
• of the memory card	SD 1.0, SD 1.1, SDHC, Siemens SMC
storage capacity of the memory card maximum	32 Gbyte
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage	24 V
supply voltage	20.4 ... 28.8 V
supply voltage external at DC rated value	24 V
supply voltage external at DC rated value	20.4 ... 28.8 V
consumed current	
• from external supply voltage at DC at 24 V typical	0.15 A
• from external supply voltage at DC at 24 V maximum	0.3 A
power loss [W] with external supply voltage at 24 V DC	
• in update mode typical	3.9 W
• in communication mode typical	3.9 W
product extension optional backup battery	No

Article number	6GK7543-1MX00-0XE0
product type designation	TIM 1531 IRC
ambient conditions	
ambient temperature	
• during operation	0 ... 70 °C
• for vertical installation during operation	0 ... 50 °C
• for horizontally arranged busbars during operation	0 ... 70 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-1500 double-wide
width	70 mm
height	147 mm
depth	129 mm
net weight	0.525 kg
fastening method	
• 35 mm top hat DIN rail mounting	No
• S7-300 rail mounting	No
• S7-1500 rail mounting	Yes
product features, product functions, product components general	
product function	
• DynDNS client	No
number of units	
• note	Number of TIM per S7-1500: 1
wire length	
• with RS 232 interface maximum	6 m
• with RS 485 interface maximum	30 m

4

Technical specifications

Article number	6GK7543-1MX00-0XE0
product type designation	TIM 1531 IRC
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	132; only via LAN
• with PG connections maximum	4
• with PG/OP connections maximum	4
• with OP connections maximum	4
service	
• of SIMATIC communication as server	Yes
• SINAUT ST7 via S7 communication	Yes
• PG/OP communication	Yes
performance data IT functions	
number of possible connections	
• as server by means of HTTP maximum	2
• as server by means of HTTPS maximum	2; 2 per Ethernet interface
• as email client maximum	1
performance data telecontrol	
suitability for use	
• node station	Yes
• substation	Yes
• TIM control center	Yes
control center connection	Systems with ST7, DNP3 and IEC 60870-5-101/104 protocol
• by means of a permanent connection	Systems with ST7, DNP3 and IEC 60870-5-101/104 protocol
protocol is supported	
• DNP3	Yes
• IEC 60870-5	Yes
• SINAUT ST1 protocol	No
• SINAUT ST7 protocol	Yes
• Modbus RTU	No
product function data buffering if connection is aborted	Yes; 100000 data telegrams (ST7) or 250000 events (IEC 60870-5 / DNP3)
number of data points per station maximum	3 000
number of DNP3 masters	
• for Ethernet maximum	4
• with RS 232 interface maximum	4
product feature buffered message frame memory	Yes
transmission format	
• for SINAUT ST7 protocol with polling or spontaneous 10-bit or 11-bit	Yes
operating mode for scanning of data transmission	
• with dedicated line/radio link with SINAUT ST7 protocol	Polling, polling with time slot procedure
• with dial-up network with SINAUT ST7 protocol	spontaneous
hamming distance	
• for SINAUT ST7 protocol	4

Article number	6GK7543-1MX00-0XE0
product type designation	TIM 1531 IRC
performance data teleservice	
diagnostics function online diagnostics with SIMATIC STEP 7	Yes
product function	
• program download with SIMATIC STEP 7	Yes
• remote firmware update	Yes
• remote configuration	Yes
product functions management, configuration, engineering	
product function MIB support	Yes
protocol is supported	
• SNMP v1	Yes
• SNMP v3	Yes
• DCP	Yes
• LLDP	Yes
configuration software	
• required	STEP 7 Professional V14 SP1 (TIA Portal) or higher
• for CPU configuring required SINAUT TD7 block library for CPU	No
• for PG configuring required SINAUT ST7 configuration software for PG	No
storage location of TIM configuration data	Flash or SD card of the TIM 1531 IRC
identification & maintenance function	
• I&M0 - device-specific information	Yes
• I&M1 - higher level designation/location designation	Yes
• I&M2 - installation date	Yes
• I&M3 - comment	Yes
product functions diagnostics	
product function web-based diagnostics	Yes
product functions routing	
service routing note	IP routing up to 1 Mbps
product function	
• static IP routing	Yes
• static IP routing IPv6	Yes
• dynamic IP routing	No
• dynamic IP routing IPv6	No
protocol is supported	
• RIP v1	No
• RIPv2	No
• RIPnG for IPv6	No
• OSPFv2	No
• OSPFv3 for IPv6	No
• VRRP	No
• VRRP for IPv6	No
• BGP	No
• PPP	No
• PPoE via DSL	No

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

TIM 1531 IRC (for S7-1500)


Technical specifications

Article number	6GK7543-1MX00-0XE0
product type designation	TIM 1531 IRC
product functions security	
product function	
• MSC client via GPRS modem with MSC capability	Yes
protocol	
• is supported MSC protocol	Yes
• with Virtual Private Network MSC is supported	TCP/IP
key length for MSC with Virtual Private Network	128 bit
number of possible connections	
• as MSC client with VPN connection	1
• as MSC server with VPN connection	127
product functions time	
product function SICLOCK support	No
product function pass on time synchronization	Yes
protocol is supported	
• NTP	Yes
• NTP (secure)	Yes
product component hardware real time clock	No
product feature hardware real time clock w. battery backup	No
time synchronization	
• from NTP-server	Yes
• from GPS-signal	No
• from control center	Yes
• from mobile network provider	No
• PC	No
• manual setting	No

Article number	6GK7543-1MX00-0XE0
product type designation	TIM 1531 IRC
product functions position detection	
product function	
• position detection with GPS	No
• pass on position data	No
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

4

Overview

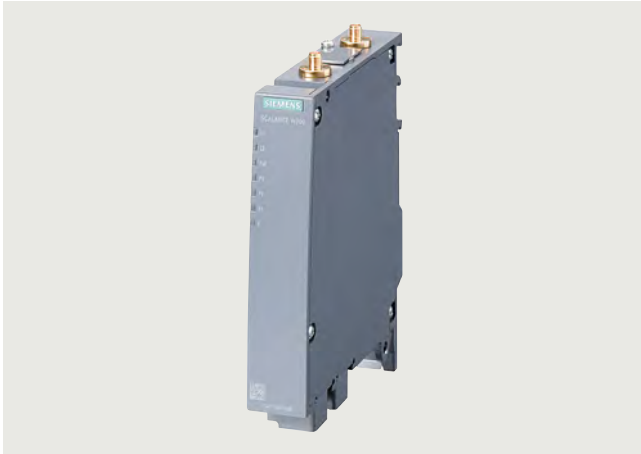

- Access points in SIMATIC S7-1500 design are suitable for applications where the device is to be mounted in the control cabinet

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SCALANCE W774 access points IWLAN access points with built-in wireless interface for establishing radio connections with iFeatures; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 300 Mbps; WPA2/AES; integrated 2-port switch; Power over Ethernet (PoE), IP30 degree of protection (-20 °C to +60 °C); scope of delivery: Mounting hardware, 4-pin screw terminal for 24 V DC; manual on CD-ROM; German/English		C-PLUG Removable data storage medium for simple device replacement in the event of a fault; for storing configuration data; can be used in SIMATIC NET products with PLUG slot	6GK1900-0AB10
SCALANCE W774-1 RJ45 IWLAN access point with one built-in wireless interface <ul style="list-style-type: none"> • Country approvals for operation outside the USA • Country approvals for operation within the USA¹⁾ • Country approvals for operation in Israel¹⁾ 	6GK5774-1FX00-0AA0 6GK5774-1FX00-0AB0 6GK5774-1FX00-0AC0	IE FC RJ45 plug 180 2 x 2 RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with a 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface <ul style="list-style-type: none"> • 1 pack = 1 unit • 1 pack = 10 units • 1 pack = 50 units 	6GK1901-1BB10-2AA0 6GK1901-1BB10-2AB0 6GK1901-1BB10-2AE0
Accessories		IE FC standard cable GP 2 x 2 4-core, shielded TP installation cable for connection to IE FC RJ45 outlet plug/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1840-2AH10
KEY-PLUG W780 iFeatures Removable data storage medium for enabling additional iFeatures, simple device replacement in the event of a fault and storage of configuration data; can be used in SCALANCE W access points with PLUG slot	6GK5907-8PA00	IE FC stripping tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	6GK1901-1GA00
Security KEY-PLUG Removable data storage medium for enabling security features for SCALANCE W700 access points	6GK5907-0PA00	Antennas and additional IWLAN accessories	See SiePortal
KEY-PLUG W740 Removable data storage medium for activating iFeatures for SCALANCE W in Client Mode	6GK5907-4PA00		

¹⁾ Please note country approvals under <http://www.siemens.com/wireless-approvals>

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

SCALANCE W774 RJ45 for the control cabinet

Technical specifications

Article number product type designation ¹⁾	6GK5774-1FX00-0AA0 W774-1 RJ45	6GK5774-1FX00-0AB0 W774-1 RJ45 (USA)	6GK5774-1FX00-0AC0 W774-1 RJ45 (ISR)
transfer rate			
transfer rate			
• with WLAN maximum	300 Mbit/s	300 Mbit/s	300 Mbit/s
• for Industrial Ethernet	10 Mbit/s, 100 Mbit/s	10 Mbit/s, 100 Mbit/s	10 Mbit/s, 100 Mbit/s
transfer rate for Industrial Ethernet			
• minimum	10 Mbit/s	10 Mbit/s	10 Mbit/s
• maximum	100 Mbit/s	100 Mbit/s	100 Mbit/s
interfaces			
number of electrical connections			
• for network components or terminal equipment	2	2	2
• for power supply	1	1	1
• for redundant voltage supply	1	1	1
type of electrical connection			
• for network components or terminal equipment	RJ45 socket	RJ45 socket	RJ45 socket
• for power supply	4-pole screw terminal, PoE	4-pole screw terminal, PoE	4-pole screw terminal, PoE
memory			
design of the removable storage			
• C-PLUG	Yes	Yes	Yes
• KEY-PLUG	Yes	Yes	Yes
interfaces wireless			
number of radio cards permanently installed	1	1	1
transmission mode for multiple input multiple output (MIMO)	2x2	2x2	2x2
number of spatial streams	2	2	2
number of electrical connections for external antenna(s)	2	2	2
type of electrical connection for external antenna(s)	R-SMA (socket)	R-SMA (socket)	R-SMA (socket)
product feature external antenna can be mounted directly on device	Yes	Yes	Yes
supply voltage, current consumption, power loss			
type of voltage of the supply voltage	DC	DC	DC
supply voltage			
• from Power-over-Ethernet according to IEEE802.3at for type 1 and IEEE802.3af	48 V	48 V	48 V
consumed current			
• at DC at 24 V typical	0.25 A	0.25 A	0.25 A
• with Power-over-Ethernet according to IEEE802.3at for type 1 and IEEE802.3af typical	0.125 A	0.125 A	0.125 A
power loss [W]			
• at DC at 24 V typical	6 W	6 W	6 W
• with Power-over-Ethernet according to IEEE802.3at for type 1 and IEEE802.3af typical	6 W	6 W	6 W
supply voltage 1			
• from terminal block	19.2 V	19.2 V	19.2 V
supply voltage 2			
• from terminal block	28.8 V	28.8 V	28.8 V

Technical specifications

Article number	6GK5774-1FX00-0AA0	6GK5774-1FX00-0AB0	6GK5774-1FX00-0AC0
product type designation ¹⁾	W774-1 RJ45	W774-1 RJ45 (USA)	W774-1 RJ45 (ISR)
ambient conditions			
ambient temperature			
• during operation	-20 ... +60 °C	-20 ... +60 °C	-20 ... +60 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
• during transport	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
relative humidity at 25 °C without condensation during operation maximum	97 %	97 %	97 %
ambient condition for operation	When used under hazardous conditions (Zone 2), the SCALANCE W774-1 RJ45 or W734-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.	When used under hazardous conditions (Zone 2), the SCALANCE W774-1 RJ45 or W734-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.	When used under hazardous conditions (Zone 2), the SCALANCE W774-1 RJ45 or W734-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.
protection class IP	IP30	IP30	IP30
design, dimensions and weights			
width	26 mm	26 mm	26 mm
height	156 mm	156 mm	156 mm
depth	127 mm	127 mm	127 mm
width of the enclosure without antenna	26 mm	26 mm	26 mm
height of the enclosure without antenna	147 mm	147 mm	147 mm
depth of the enclosure without antenna	127 mm	127 mm	127 mm
net weight	0.52 kg	0.52 kg	0.52 kg
fastening method	wall mounting only if flat mounted	wall mounting only if flat mounted	wall mounting only if flat mounted
• S7-300 rail mounting	Yes	Yes	Yes
• S7-1500 rail mounting	Yes	Yes	Yes
• 35 mm top hat DIN rail mounting	Yes	Yes	Yes
• wall mounting	Yes	Yes	Yes
radio frequencies			
operating frequency			
• for WLAN in 2.4 GHz frequency band	2.41 ... 2.48 GHz; depending on the country approvals	2.41 ... 2.48 GHz; depending on the country approvals	2.41 ... 2.48 GHz; depending on the country approvals
• for WLAN in 5 GHz frequency band	4.9 ... 5.8 GHz; depending on the country approvals	4.9 ... 5.8 GHz; depending on the country approvals	4.9 ... 5.8 GHz; depending on the country approvals
product features, product functions, product components general			
product function Access Point Mode	Yes	Yes	Yes
product function client Mode	Yes	Yes	Yes
number of SSIDs	4	4	4
product function			
• iPCF Access Point	Yes; Only in combination with the 'KEY-PLUG W780 iFeatures'	Yes; Only in combination with the 'KEY-PLUG W780 iFeatures'	Yes; Only in combination with the 'KEY-PLUG W780 iFeatures'
• iPCF client	Yes; Only in combination with the 'KEY-PLUG W740 iFeatures'	Yes; Only in combination with the 'KEY-PLUG W740 iFeatures'	Yes; Only in combination with the 'KEY-PLUG W740 iFeatures'
• iPCF-MC Access Point	No	No	No
• iPCF-MC client	Yes; Only in combination with the 'KEY-PLUG W740 iFeatures'	Yes; Only in combination with the 'KEY-PLUG W740 iFeatures'	Yes; Only in combination with the 'KEY-PLUG W740 iFeatures'
number of iPCF-capable radio modules	1	1	1
product function iREF	Yes; Only in combination with the 'KEY-PLUG W780 iFeatures' or 'KEY-PLUG W740 iFeatures'	Yes; Only in combination with the 'KEY-PLUG W780 iFeatures' or 'KEY-PLUG W740 iFeatures'	Yes; Only in combination with the 'KEY-PLUG W780 iFeatures' or 'KEY-PLUG W740 iFeatures'
number of iREF-capable radio modules	1	1	1
product function iPRP	Yes; In combination with the 'KEY-PLUG W780 iFeatures' only	Yes; In combination with the 'KEY-PLUG W780 iFeatures' only	Yes; In combination with the 'KEY-PLUG W780 iFeatures' only

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

SCALANCE W774 RJ45 for the control cabinet

Technical specifications

Article number	6GK5774-1FX00-0AA0	6GK5774-1FX00-0AB0	6GK5774-1FX00-0AC0
product type designation ¹⁾	W774-1 RJ45	W774-1 RJ45 (USA)	W774-1 RJ45 (ISR)
product functions management, configuration, engineering			
number of manageable IP addresses in client	8	8	8
product function			
• CLI	Yes	Yes	Yes
• web-based management	Yes	Yes	Yes
• MIB support	Yes	Yes	Yes
• TRAPs via email	Yes	Yes	Yes
• configuration with STEP 7	Yes	Yes	Yes
• configuration with STEP 7 in the TIA Portal	Yes	Yes	Yes
• operation with IWLAN controller	No	No	No
• operation with Enterasys WLAN controller	No	No	No
• forced roaming on IP down with IWLAN	Yes	Yes	Yes
• forced roaming on link down with IWLAN	Yes	Yes	Yes
• WDS	Yes	Yes	Yes
protocol is supported			
• Address Resolution Protocol (ARP)	Yes	Yes	Yes
• ICMP	Yes	Yes	Yes
• Telnet	Yes	Yes	Yes
• HTTP	Yes	Yes	Yes
• HTTPS	Yes	Yes	Yes
• TFTP	Yes	Yes	Yes
• DCP	Yes	Yes	Yes
• LLDP	Yes	Yes	Yes
identification & maintenance function			
• I&M0 - device-specific information	Yes	Yes	Yes
• I&M1 - higher level designation/location designation	Yes	Yes	Yes
product functions diagnostics			
product function			
• PROFINET IO diagnosis	Yes	Yes	Yes
• link check	No	No	No
• connection monitoring IP-Alive	No	No	No
• localization via Aeroscout	Yes	Yes	Yes
• SysLog	Yes	Yes	Yes
protocol is supported			
• SNMP v1	Yes	Yes	Yes
• SNMP v2	Yes	Yes	Yes
• SNMP v3	Yes	Yes	Yes
product functions VLAN			
product function			
• function VLAN with IWLAN	Yes	Yes	Yes
product functions DHCP			
product function			
• DHCP client	Yes	Yes	Yes
• DHCP server	Yes	Yes	Yes
• DHCP Option 82	Yes	Yes	Yes
product functions redundancy			
protocol is supported			
• STP/RSTP	Yes	Yes	Yes
• MSTP	Yes	Yes	Yes
• RSTP	Yes	Yes	Yes

4

Technical specifications

Article number product type designation ¹⁾	6GK5774-1FX00-0AA0 W774-1 RJ45	6GK5774-1FX00-0AB0 W774-1 RJ45 (USA)	6GK5774-1FX00-0AC0 W774-1 RJ45 (ISR)
product functions security			
product function			
• ACL - MAC-based	Yes	Yes	Yes
• management security, ACL-IP based	Yes	Yes	Yes
• IEEE 802.1x (radius)	Yes	Yes	Yes
• NAT/NAPT	Yes	Yes	Yes
• access protection according to IEEE802.11i	Yes	Yes	Yes
• WPA/WPA2	Yes	Yes	Yes
• TKIP/AES	Yes	Yes	Yes
protocol is supported			
• SSH	Yes	Yes	Yes
• RADIUS	Yes	Yes	Yes
product functions time			
protocol is supported			
• NTP	Yes	Yes	Yes
• SNTP	Yes	Yes	Yes
• SIMATIC time synchronization (SIMATIC Time)	Yes	Yes	Yes
standards, specifications, approvals			
standard			
• for FM	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X
• for safety from CSA and UL	UL 60950-1 E115352, CSA C22.2 No. 60950-1	UL 60950-1 E115352, CSA C22.2 No. 60950-1	UL 60950-1 E115352, CSA C22.2 No. 60950-1
certificate of suitability			
• EC Declaration of Conformity	Yes	Yes	No
• CE marking	Yes	Yes	No
• C-Tick	Yes	Yes	Yes
• E1 approval	No	No	No
• railway application in accordance with EN 50155	No	No	No
• railway application in accordance with EN 50121-4	No	No	No
• NEMA TS2	No	No	No
• IEC 61375	No	No	No
• IEC 61850-3	No	No	No
• NEMA4X	No	No	No
• Power-over-Ethernet according IEEE802.3at for type 1 and IEEE802.3af	Yes	Yes	Yes
• Power-over-Ethernet according to IEEE802.3at for type 2	Yes	Yes	Yes
standard for wireless communication			
• IEEE 802.11a	Yes	Yes	Yes
• IEEE 802.11b	Yes	Yes	Yes
• IEEE 802.11e	Yes	Yes	Yes
• IEEE 802.11g	Yes	Yes	Yes
• IEEE 802.11h	Yes	Yes	Yes
• IEEE 802.11i	Yes	Yes	Yes
• IEEE 802.11n	Yes	Yes	Yes
wireless approval	You will find the current list of countries at: www.siemens.com/wireless-approvals	You will find the current list of countries at: www.siemens.com/wireless-approvals	You will find the current list of countries at: www.siemens.com/wireless-approvals

SIMATIC S7-1500 Advanced Controllers

I/O modules


Communication

SCALANCE W774 RJ45 for the control cabinet**Technical specifications**

Article number	6GK5774-1FX00-0AA0	6GK5774-1FX00-0AB0	6GK5774-1FX00-0AC0
product type designation ¹⁾	W774-1 RJ45	W774-1 RJ45 (USA)	W774-1 RJ45 (ISR)
standards, specifications, approvals			
marine classification			
Marine classification association			
• American Bureau of Shipping Europe Ltd. (ABS)	Yes	Yes	Yes
• French marine classification society (BV)	Yes	Yes	Yes
• DNV GL	Yes	Yes	Yes
• Korean Register of Shipping (KRS)	Yes	Yes	Yes
• Lloyds Register of Shipping (LRS)	Yes	Yes	Yes
• Nippon Kaiji Kyokai (NK)	Yes	Yes	Yes
• Polski Rejestr Statkow (PRS)	Yes	Yes	Yes
• Royal Institution of Naval Architects (RINA)	Yes	Yes	Yes
standards, specifications, approvals			
hazardous environments			
standard for hazardous zone	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X
• from CSA and UL	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8	Yes; GB3836.1, GB3836.8	Yes; GB3836.1, GB3836.8
• as marking	Ex nA IIC T4 Gc	Ex nA IIC T4 Gc	Ex nA IIC T4 Gc
standards, specifications, approvals			
Environmental Product Declaration			
Environmental Product Declaration	Yes	Yes	Yes
Global Warming Potential [CO2 eq]			
• total	445.68 kg	445.68 kg	445.68 kg
• during manufacturing	32.3 kg	32.3 kg	32.3 kg
• during operation	190.081 kg	190.081 kg	190.081 kg
• after end of life	0.16 kg	0.16 kg	0.16 kg
accessories			
accessories	24 V DC screw terminal included in scope of delivery	24 V DC screw terminal included in scope of delivery	24 V DC screw terminal included in scope of delivery

¹⁾ You will find the current list of countries at: www.siemens.com/wireless-approvals

Overview

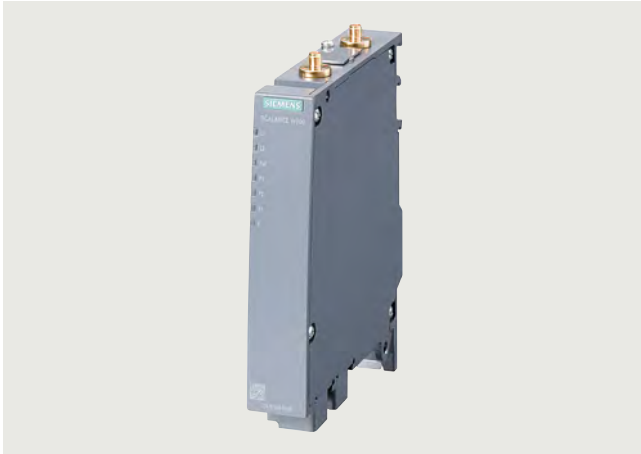

- Client modules in SIMATIC S7-1500 design are suitable for applications where the device is to be mounted in the control cabinet

ET 200MP station with SCALANCE W734 RJ45

Ordering data

Article No.	Article No.	
<p>SCALANCE W734 client modules</p> <p>IWLAN Ethernet client modules with built-in wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 300 Mbps; WPA2/AES; integrated 2-port switch; Power over Ethernet (PoE), IP30 degree of protection (-20 °C to +60 °C); scope of delivery: Mounting hardware, 4-pin screw terminal for 24 V DC; manual on CD-ROM; German/English</p>		
<p>SCALANCE W734-1 RJ45</p> <p>For managing the radio link of up to eight connected devices with Industrial Ethernet connections;</p> <ul style="list-style-type: none"> Country approvals for operation outside the USA Country approvals for operation within the USA¹⁾ 	<p>6GK5734-1FX00-0AA0</p> <p>6GK5734-1FX00-0AB0</p>	
<p>Accessories</p>		
<p>KEY-PLUG W740 iFeatures</p> <p>Removable data storage medium for enabling additional iFeatures, for simple device replacement in the event of a fault, and for storing configuration data; can be used in SCALANCE W client modules with a PLUG slot</p>	<p>6GK5907-4PA00</p>	
<p>C-PLUG</p> <p>Removable data storage medium for simple device replacement in the event of a fault; for storing configuration data; can be used in SIMATIC NET products with PLUG slot</p>	<p>6GK1900-0AB10</p>	
	<p>IE FC RJ45 plug 180 2 x 2</p> <p>RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with a 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface</p> <ul style="list-style-type: none"> 1 pack = 1 unit 1 pack = 10 units 1 pack = 50 units 	<p>6GK1901-1BB10-2AA0</p> <p>6GK1901-1BB10-2AB0</p> <p>6GK1901-1BB10-2AE0</p>
	<p>IE FC standard cable GP 2 x 2</p> <p>4-core, shielded TP installation cable for connection to IE FC RJ45 outlet plug/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m</p>	<p>6XV1840-2AH10</p>
	<p>IE FC stripping tool</p> <p>Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables</p>	<p>6GK1901-1GA00</p>
	<p>Antennas and additional IWLAN accessories</p>	<p>See SiePortal</p>

¹⁾ Please note country approvals under <http://www.siemens.com/wireless-approvals>

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

SCALANCE W734 RJ45 for the control cabinet

Technical specifications

Article number product type designation ¹⁾	6GK5734-1FX00-0AA0 W734-1 RJ45	6GK5734-1FX00-0AB0 W734-1 RJ45 (USA)
transfer rate		
transfer rate		
• with WLAN maximum	300 Mbit/s	300 Mbit/s
• for Industrial Ethernet	10 Mbit/s, 100 Mbit/s	10 Mbit/s, 100 Mbit/s
transfer rate for Industrial Ethernet		
• minimum	10 Mbit/s	10 Mbit/s
• maximum	100 Mbit/s	100 Mbit/s
interfaces		
number of electrical connections		
• for network components or terminal equipment	2	2
• for power supply	1	1
• for redundant voltage supply	1	1
type of electrical connection		
• for network components or terminal equipment	RJ45 socket	RJ45 socket
• for power supply	4-pole screw terminal, PoE	4-pole screw terminal, PoE
memory		
design of the removable storage		
• C-PLUG	Yes	Yes
• KEY-PLUG	Yes	Yes
interfaces wireless		
number of radio cards permanently installed	1	1
transmission mode for multiple input multiple output (MIMO)	2x2	2x2
number of spatial streams	2	2
number of electrical connections for external antenna(s)	2	2
type of electrical connection for external antenna(s)	R-SMA (socket)	R-SMA (socket)
product feature external antenna can be mounted directly on device	Yes	Yes
supply voltage, current consumption, power loss		
type of voltage of the supply voltage	DC	DC
supply voltage		
• from Power-over-Ethernet according to IEEE802.3at for type 1 and IEEE802.3af	48 V	48 V
consumed current		
• at DC at 24 V typical	0.25 A	0.25 A
• with Power-over-Ethernet according to IEEE802.3at for type 1 and IEEE802.3af typical	0.125 A	0.125 A
power loss [W]		
• at DC at 24 V typical	6 W	6 W
• with Power-over-Ethernet according to IEEE802.3at for type 1 and IEEE802.3af typical	6 W	6 W
supply voltage 1		
• from terminal block	19.2 V	19.2 V
supply voltage 2		
• from terminal block	28.8 V	28.8 V

Technical specifications

Article number	6GK5734-1FX00-0AA0	6GK5734-1FX00-0AB0
product type designation ¹⁾	W734-1 RJ45	W734-1 RJ45 (USA)
ambient conditions		
ambient temperature		
• during operation	-20 ... +60 °C	-20 ... +60 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C
• during transport	-40 ... +85 °C	-40 ... +85 °C
relative humidity at 25 °C without condensation during operation maximum	95 %	95 %
ambient condition for operation	When used under hazardous conditions (Zone 2), the SCALANCE W774-1 RJ45 or W734-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.	When used under hazardous conditions (Zone 2), the SCALANCE W774-1 RJ45 or W734-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.
protection class IP	IP30	IP30
design, dimensions and weights		
width	26 mm	26 mm
height	156 mm	156 mm
depth	127 mm	127 mm
width of the enclosure without antenna	26 mm	26 mm
height of the enclosure without antenna	147 mm	147 mm
depth of the enclosure without antenna	127 mm	127 mm
net weight	0.52 kg	0.52 kg
fastening method	wall mounting only if flat mounted	wall mounting only if flat mounted
• S7-300 rail mounting	Yes	Yes
• S7-1500 rail mounting	Yes	Yes
• 35 mm top hat DIN rail mounting	Yes	Yes
• wall mounting	Yes	Yes
radio frequencies		
operating frequency		
• for WLAN in 2.4 GHz frequency band	2.41 ... 2.48 GHz; depending on the country approvals	2.41 ... 2.48 GHz; depending on the country approvals
• for WLAN in 5 GHz frequency band	4.9 ... 5.8 GHz; depending on the country approvals	4.9 ... 5.8 GHz; depending on the country approvals
product features, product functions, product components general		
product function Access Point Mode	No	No
product function client Mode	Yes	Yes
product function		
• iPCF client	Yes; Only in combination with the 'KEY-PLUG W780 iFeatures' or 'KEY-PLUG W740 iFeatures'	Yes; Only in combination with the 'KEY-PLUG W780 iFeatures' or 'KEY-PLUG W740 iFeatures'
• iPCF-MC client	Yes; Only in combination with 'KEY-PLUG W780 iFeatures' or 'KEY-PLUG W740 iFeatures'	Yes; Only in combination with 'KEY-PLUG W780 iFeatures' or 'KEY-PLUG W740 iFeatures'
number of iPCF-capable radio modules	1	1
product function iPRP	Yes; In combination with the 'KEY-PLUG W780 iFeatures' or 'KEY-PLUG W740 iFeatures' only	Yes; In combination with the 'KEY-PLUG W780 iFeatures' or 'KEY-PLUG W740 iFeatures' only
product functions management, configuration, engineering		
number of manageable IP addresses in client	8	8
product function		
• CLI	Yes	Yes
• web-based management	Yes	Yes
• MIB support	Yes	Yes
• TRAPs via email	Yes	Yes
• configuration with STEP 7	Yes	Yes
• configuration with STEP 7 in the TIA Portal	Yes	Yes
• WDS	No	No
protocol is supported		
• Address Resolution Protocol (ARP)	Yes	Yes
• ICMP	Yes	Yes
• Telnet	Yes	Yes

SIMATIC S7-1500 Advanced Controllers

I/O modules

Communication

SCALANCE W734 RJ45 for the control cabinet

Technical specifications

Article number	6GK5734-1FX00-0AA0	6GK5734-1FX00-0AB0
product type designation ¹⁾	W734-1 RJ45	W734-1 RJ45 (USA)
<ul style="list-style-type: none"> • HTTP • HTTPS • TFTP • DCP • LLDP 	<ul style="list-style-type: none"> Yes Yes Yes Yes No 	<ul style="list-style-type: none"> Yes Yes Yes Yes No
identification & maintenance function		
<ul style="list-style-type: none"> • I&MO - device-specific information • I&M1 - higher level designation/location designation 	<ul style="list-style-type: none"> Yes Yes 	<ul style="list-style-type: none"> Yes Yes
product functions diagnostics		
product function		
<ul style="list-style-type: none"> • PROFINET IO diagnosis • link check • connection monitoring IP-Alive • SysLog 	<ul style="list-style-type: none"> Yes No No Yes 	<ul style="list-style-type: none"> Yes No No Yes
protocol is supported		
<ul style="list-style-type: none"> • SNMP v1 • SNMP v2 • SNMP v3 	<ul style="list-style-type: none"> Yes Yes Yes 	<ul style="list-style-type: none"> Yes Yes Yes
product functions VLAN		
product function		
<ul style="list-style-type: none"> • function VLAN with IWLAN 	<ul style="list-style-type: none"> No 	<ul style="list-style-type: none"> No
product functions DHCP		
product function		
<ul style="list-style-type: none"> • DHCP client • DHCP server • DHCP Option 82 	<ul style="list-style-type: none"> Yes Yes Yes 	<ul style="list-style-type: none"> Yes Yes Yes
product functions redundancy		
protocol is supported		
<ul style="list-style-type: none"> • STP/RSTP • MSTP • RSTP 	<ul style="list-style-type: none"> Yes Yes Yes 	<ul style="list-style-type: none"> Yes Yes Yes
product functions security		
product function		
<ul style="list-style-type: none"> • ACL - MAC-based • management security, ACL-IP based • IEEE 802.1x (radius) • NAT/NAPT • access protection according to IEEE802.11i • WPA/WPA2 • TKIP/AES 	<ul style="list-style-type: none"> Yes Yes Yes Yes Yes Yes Yes 	<ul style="list-style-type: none"> Yes Yes Yes Yes Yes Yes Yes
protocol is supported		
<ul style="list-style-type: none"> • SSH • RADIUS 	<ul style="list-style-type: none"> Yes Yes 	<ul style="list-style-type: none"> Yes Yes
product functions time		
protocol is supported		
<ul style="list-style-type: none"> • NTP • SNTP • SIMATIC time synchronization (SIMATIC Time) 	<ul style="list-style-type: none"> Yes Yes Yes 	<ul style="list-style-type: none"> Yes Yes Yes
standards, specifications, approvals		
standard		
<ul style="list-style-type: none"> • for FM • for safety from CSA and UL 	<ul style="list-style-type: none"> FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X UL 60950-1 E115352, CSA C22.2 No. 60950-1 	<ul style="list-style-type: none"> FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X UL 60950-1 E115352, CSA C22.2 No. 60950-1
certificate of suitability		
<ul style="list-style-type: none"> • EC Declaration of Conformity • CE marking • C-Tick 	<ul style="list-style-type: none"> Yes Yes Yes 	<ul style="list-style-type: none"> Yes Yes Yes

Technical specifications

Article number	6GK5734-1FX00-0AA0	6GK5734-1FX00-0AB0
product type designation ¹⁾	W734-1 RJ45	W734-1 RJ45 (USA)
• E1 approval	No	No
• railway application in accordance with EN 50155	No	No
• NEMA TS2	No	No
• IEC 61375	No	No
• IEC 61850-3	No	No
• NEMA4X	No	No
• Power-over-Ethernet according IEEE802.3at for type 1 and IEEE802.3af	Yes	Yes
• Power-over-Ethernet according to IEEE802.3at for type 2	Yes	Yes
standard for wireless communication		
• IEEE 802.11a	Yes	Yes
• IEEE 802.11b	Yes	Yes
• IEEE 802.11e	Yes	Yes
• IEEE 802.11g	Yes	Yes
• IEEE 802.11h	Yes	Yes
• IEEE 802.11i	Yes	Yes
• IEEE 802.11n	Yes	Yes
wireless approval	You will find the current list of countries at: www.siemens.com/wireless-approvals	You will find the current list of countries at: www.siemens.com/wireless-approvals
standards, specifications, approvals		
marine classification		
Marine classification association		
• American Bureau of Shipping Europe Ltd. (ABS)	Yes	Yes
• French marine classification society (BV)	Yes	Yes
• DNV GL	Yes	Yes
• Korean Register of Shipping (KRS)	Yes	Yes
• Lloyds Register of Shipping (LRS)	Yes	Yes
• Nippon Kaiji Kyokai (NK)	Yes	Yes
• Polski Rejestr Statkow (PRS)	Yes	Yes
• Royal Institution of Naval Architects (RINA)	Yes	Yes
standards, specifications, approvals		
hazardous environments		
standard for hazardous zone		
•	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X
• from CSA and UL	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480
certificate of suitability CCC for hazardous zone according to GB standard		
•	Yes; GB3836.1, GB3836.8	Yes; GB3836.1, GB3836.8
• as marking	Ex nA IIC T4 Gc	Ex nA IIC T4 Gc
standards, specifications, approvals		
Environmental Product Declaration		
Environmental Product Declaration	Yes	Yes
Global Warming Potential [CO2 eq]		
• total	445.68 kg	445.68 kg
• during manufacturing	32.3 kg	32.3 kg
• during operation	190.081 kg	190.081 kg
• after end of life	0.16 kg	0.16 kg
accessories		
accessories	24 V DC screw terminal included in scope of delivery	24 V DC screw terminal included in scope of delivery

¹⁾ You will find the current list of countries at: www.siemens.com/wireless-approvals

SIMATIC S7-1500 Advanced Controllers

I/O modules

SIPLUS communication

SIPLUS CM PtP

Overview



- Modules for serial communication connections, scaled according to interface types, protocols, and performance
- 4 versions with different physical transmission characteristics:
 - RS 232C, max. 19.2 kbps
 - RS 232C, max. 115.2 kbps
 - RS 422/RS 485, max. 19.2 kbps
 - RS 422/RS 485, max. 115.2 kbps
- Protocols supported
 - Freeport: User-parameterizable telegram format for universal communication
 - 3964(R) for improved transmission reliability
 - Modbus RTU Master
 - Modbus RTU Slave
 - USS, implemented through instructions

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

Communications module SIPLUS S7-1500 CM PtP RS 232 BA

6AG1540-1AD00-7AA0

(Extended temperature range and exposure to environmental substances)

Basic communications module with 1 RS 232 interface, Freeport, 3964(R) and USS protocols, 9-pin D-sub connector, max. 19.2 Kbps

Communications module SIPLUS S7-1500 CM PtP RS 232 HF

6AG1541-1AD00-7AB0

(Extended temperature range and exposure to environmental substances)

High Feature communications module with 1 RS 232 interface, Freeport, 3964(R), USS and Modbus RTU protocols, 9-pin D-sub connector, max. 115.2 Kbps

Communications module SIPLUS S7-1500 CM PtP RS 422/485 BA

6AG1540-1AB00-7AA0

(Extended temperature range and exposure to environmental substances)

Basic communications module with 1 interface RS 422/485, Freeport, 3964(R) and USS protocols, 15-pin sub D socket, max. 19.2 Kbps

Communications module SIPLUS S7-1500 CM PtP RS 422/485 HF

6AG1541-1AB00-7AB0

(Extended temperature range and exposure to environmental substances)

High Feature communications module with 1 RS 422/485 interface, Freeport, 3964(R), USS and Modbus RTU protocols, 15-pin D-sub socket, max. 115.2 Kbps

Accessories

See SIMATIC S7-1500, CM PtP communications module, page 4/252

Technical specifications

Article number	6AG1540-1AD00-7AA0	6AG1541-1AD00-7AB0	6AG1540-1AB00-7AA0	6AG1541-1AB00-7AB0
Based on	6ES7540-1AD00-0AA0	6ES7541-1AD00-0AB0	6ES7540-1AB00-0AA0	6ES7541-1AB00-0AB0
	SIPLUS S7-1500 CM PTP RS232 BA	SIPLUS S7-1500 CM PTP RS232 HF	SIPLUS S7-1500 CM PTP RS422/485 BA	SIPLUS S7-1500 CM PTP RS422/485 HF
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• horizontal installation, max.	70 °C	70 °C	70 °C	70 °C
• vertical installation, min.	-40 °C; = Tmin; Startup @ -25 °C	-40 °C; = Tmin; Startup @ -25 °C	-40 °C; = Tmin; Startup @ -25 °C	-40 °C; = Tmin; Startup @ -25 °C
• vertical installation, max.	40 °C	40 °C	40 °C	40 °C

Technical specifications

Article number	6AG1540-1AD00-7AA0	6AG1541-1AD00-7AB0	6AG1540-1AB00-7AA0	6AG1541-1AB00-7AB0
Based on	6ES7540-1AD00-0AA0 SIPLUS S7-1500 CM PTP RS232 BA	6ES7541-1AD00-0AB0 SIPLUS S7-1500 CM PTP RS232 HF	6ES7540-1AB00-0AA0 SIPLUS S7-1500 CM PTP RS422/485 BA	6ES7541-1AB00-0AB0 SIPLUS S7-1500 CM PTP RS422/485 HF
Altitude during operation relating to sea level				
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance				
Coolants and lubricants				
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea				
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

I/O modules

SIPLUS communication

SIPLUS NET CM 1542-5

Overview



DP-M	DP-S	FMS	PG/OP	S7	
●	●		●	●	●

©_10148

CM 1542-5

The CM 1542-5 communications module expands the SIMATIC S7-1500 Controller to include a PROFIBUS connection for communication with lower-level PROFIBUS devices in bandwidths from 9.6 kbps to 12 Mbps. The module can also be used to implement separate PROFIBUS lines, in other words, to control a number of different field devices via a number of PROFIBUS segments. The CM 1542-5 handles all communication tasks, thus reducing the CPU load.

Apart from classic PROFIBUS communication, the CM 1542-5 is also suitable for S7 communication. This makes it possible to establish communication between the S7-1500 controller and other devices, for example those from the SIMATIC S7-300/400 range.

- PROFIBUS DP device with electrical interface for connecting a SIMATIC S7-1500 to PROFIBUS at up to 12 Mbps (including 45.45 kbps)
- Communications services:
 - PROFIBUS DP
 - PG/OP communication
 - S7 communication
 - Open user communication (SEND/RECEIVE) via FDL
- Time synchronization
- Simple programming and configuration over PROFIBUS
- Cross-network PG communication using S7 routing
- Module replacement without programming device/engineering station
- Data record routing (PROFIBUS DP)
- Adding or modifying distributed I/O during operation

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Communications module SIPLUS S7-1500 CM 1542-5

(Extended temperature range and exposure to environmental substances)

Communications module for electrical connection of SIMATIC S7-1500 to PROFIBUS;

S7 and PG/OP communication, time-of-day, synchronization, diagnostics

Accessories

Article No.

6AG1542-5DX10-7XE0

See SIMATIC S7-1500, CM 1542-5 communications module, page 4/257

Technical specifications

Article number	6AG1542-5DX10-7XE0	Article number	6AG1542-5DX10-7XE0
Based on	6GK7542-5DX10-0XE0	Based on	6GK7542-5DX10-0XE0
Product type designation	SIPLUS NET CM 1542-5	Product type designation	SIPLUS NET CM 1542-5
ambient conditions		resistance to mechanically active substances	
ambient temperature			
• for vertical installation during operation	-40 ... +40 °C	• conformity according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
• for horizontally arranged busbars during operation	-40 ... +70 °C		
• during storage	-40 ... +70 °C	• conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
• during transport	-40 ... +70 °C		
installation altitude at height above sea level maximum	5 000 m	coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
relative humidity		type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
• with condensation according to IEC 60068-2-38 maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets	protection class IP	IP20
resistance to biologically active substances			
• conformity according to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request		
• conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)		
resistance to chemically active substances			
• conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.		
• conformity according to EN 60721-3-6	Yes		

SIMATIC S7-1500 Advanced Controllers

I/O modules

SIPLUS communication

SIPLUS NET CP 1543-1

Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
●	●			●	●	●	●

G...10...XX...103893

The CP 1543-1 communications processor securely connects the SIMATIC S7-1500 PLC to Industrial Ethernet networks. By combining a variety of security features such as an SPI (Stateful Packet Inspection) firewall, VPN and data encryption protocols such as FTPS and SNMPv3, the communications processor protects individual S7-1500 stations or even entire automation cells against unauthorized access.

The CP can also be used for linking the S7-1500 station into an IPv6-based network. All functions are configured by means of STEP 7 Professional V12 (TIA Portal) or higher.

The CP 1543-1 supports the following communications services:

- PG/OP communication
- S7 communication
- Open user communication (SEND/RECEIVE, FETCH/WRITE)
- IT communication
 - FTP functions (File Transfer Protocol FTP/FTPS) for file management and access to data blocks in the CPU (client and server function)
 - Access (read and write modes) to csv files stored on the memory card of the CPU via FTP(S)
 - Sending emails via SMTP or ESMTP with "SMTP-Auth" for authentication on an email server (also with IPv6)
 - Static IP routing with up to 1 Mbps via IPv4 to other CP 1543-1/CM 1542-1 units in an S7-1500 system, e.g. for web server access without real-time capability
- Security Integrated
 - Stateful Packet Inspection Firewall
 - Secure communication via VPN (IPsec)
 - Network authentication according to IEEE 802.1X using the EAP methods MD5, TLS, PEAP, TTLS, MSCHAPv2 or PWD
- Protocols for secure communication
 - Secure access to the web server of the CPU via the HTTPS protocol
 - Secure file transfer using FTPS
 - Secure transfer of the time of day (NTP)
 - SNMPv3 for tap-proof transfer of network analysis information
 - Encrypted email communication via SMTPS (Port 587)
 - Secure open communication over TCP/IP
 - Connection to SINEMA Remote Connect via OpenVPN

- Integration of an S7-1500 into IPv6-based networks; An IPv6-compliant IP address can be used for the following communications services:
 - FETCH/WRITE access (CP as server)
 - FTP server mode
 - FTP client mode with addressing by program block
 - Email transfer with addressing by program block

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS NET CP 1543-1 communications processor

6AG1543-1AX00-2XE0

(Extended temperature range and exposure to environmental substances)

For connection of SIMATIC S7-1500 to Industrial Ethernet via TCP/IP, ISO and UDP and Security functions; 1 x RJ45 interface with 10/100/1000 Mbps; electronic manual on DVD

Accessories

See SIMATIC S7-1500, CP 1543-1 communications processor, page 4/265

Technical specifications

Article number	6AG1543-1AX00-2XE0	Article number	6AG1543-1AX00-2XE0
Based on	6GK7543-1AX00-0XE0	Based on	6GK7543-1AX00-0XE0
product type designation	SIPLUS NET CP 1543-1	product type designation	SIPLUS NET CP 1543-1
ambient conditions		ambient conditions	
ambient temperature		resistance to chemically active substances	
• for vertical installation during operation	-40 ... +40 °C	• conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
• for horizontally arranged busbars during operation	-40 ... +70 °C		
• during storage	-40 ... +70 °C	• conformity according to EN 60721-3-6	Yes
• during transport	-40 ... +70 °C	resistance to mechanically active substances	
installation altitude at height above sea level maximum	5 000 m	• conformity according to EN 60721-3-6	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	• conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
relative humidity		coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
• with condensation according to IEC 60068-2-38 maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets	type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
resistance to biologically active substances		product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
• conformity according to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request	protection class IP	IP20
• conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)		

SIMATIC S7-1500 Advanced Controllers

I/O modules

Connection system

Front connectors

Overview



- Uniform, 40-pin front connector, suitable for SIMATIC S7-1500 I/O modules
- Versions for 25 mm wide or 35 mm wide modules
- With screw-type or push-in terminals
- Connectable core cross-sections: 0.25 mm² to 1.5 mm² (AWG 24 to 16)
- Front connector for 35 mm modules to be ordered separately; front connector for 25 mm modules included in scope of supply of modules

Design

- 40 terminals, arranged in two rows, numbered consecutively from 1 to 40
- Direct assignment of terminal to LED and labeling simplifies wiring, commissioning, and troubleshooting
- Holders for four potential bridges for simple and flexible creation of potential groups; four units are supplied with the front connector (optionally available as spare parts in packs of 20)
- Integrated shielding concept for analog modules and technology modules; allows space-saving installation without tools and ensures high ruggedness and EMC stability; components supplied with analog modules
- Cable ties for mechanical fixing of the cable bundle and for strain relief; 1 unit supplied with front connector

Ordering data

Article No.

Front connectors

SIMATIC S7-1500, front connector screw-type connection system

40-pin for 35 mm wide modules including 4 jumper links and cable ties

6ES7592-1AM00-0XB0

SIMATIC S7-1500, front connector with push-in technology

40-pin, for 35 mm wide modules including 4 jumper links and cable ties

6ES7592-1BM00-0XB0

SIMATIC S7-1500, front connector with push-in technology

40-pin for 25 mm wide modules and compact CPUs of the S7-1500, incl. cable tie

6ES7592-1BM00-0XA0

Accessories

SIMATIC S7-1500, spare part jumper links

For front connectors for 35 mm wide IO modules; can be used for all 24 V DC modules; 20 units per packing unit; Note: not suitable for 230 V, not suitable for analog modules

6ES7592-3AA00-0AA0

Overview

With two cabling systems, SIMATIC TOP connect ensures efficient wiring of the input and output module of the SIMATIC S7-1500 (35 mm unit): Fully modular connection for fast and clearly arranged connecting to sensors and actuators in the field, and flexible connection for simple wiring inside the control cabinet.

With the TIA Selection Tool, you can select suitable system cabling for the individual I/O modules with a simple mouse click. Suitable components for the respective I/O module are always offered. These can be transferred to the order list and then ordered in the Industry Mall.

More information is available on the internet at

<http://www.siemens.com/tia-selection-tool>

4

Design


Two cabling variants are available for a wide range of control cabinet concepts:

Fully modular connection

The system consists of:

- Front connector module
- Connecting cable
- Connection modules in the following versions: Basic module, signal module and function module

Connection errors are thus practically excluded and installation overhead is significantly reduced. Systematic connection of the SIMATIC system. The assembly work for the connecting cables is drastically reduced thanks to the use of pre-assembled cables sold by the meter.

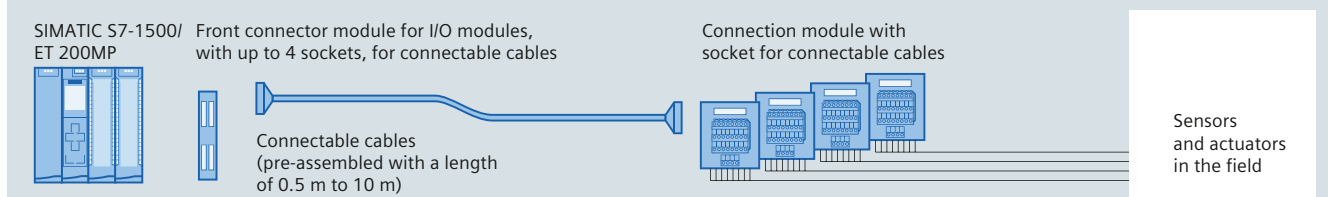

SIMATIC TOP connect for S7-1500/ET 200MP, fully modular connection

Flexible connection

Flexible connection with front connectors is available with 20 (Pin1 – 20) or 40 wired single cores.

These are available in lengths from 2.5 m to 10.0 m.


The single cores are available in different versions:

- Wire type H05V-K is used for industrial applications
- The UL/CSA-approved core is available for export to North America
- The halogen-free version is used where low smoke gas density in the event of fire is required, e.g. in building automation

The blue wires are numbered sequentially and can be routed direct to each element in the control cabinet. The numbering of the single cores corresponds to the coding of the front connector contacts.

In comparison to conventional single wiring, there is a cost saving of 50% for assembly, since the single cores that have already been checked on the connector are fixed.

Thus no complex pre-assembly of up to two times 20 single cores per module is necessary.

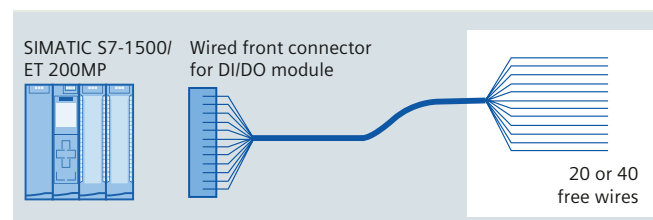

SIMATIC TOP connect for S7-1500/ET 200MP, flexible connection

SIMATIC S7-1500 Advanced Controllers

I/O modules

Connection system

System cabling for SIMATIC S7-1500 and ET 200MP > Fully modular connection

Overview



The fully modular connection for connecting to the digital I/O modules of the SIMATIC S7-1500 or ET 200MP (35 mm design) consists of modified front connectors, called front connector modules, pre-assembled connecting cables of various lengths, and connection modules. Suitable components can be selected for the application in question and joined by means of simple plug-in connections. The connection modules are used instead of conventional terminal blocks and act as the interface to the sensors and actuators.

Benefits

- Front connector module, connecting cable and terminal module are easy to plug in
- Fast, low-cost wiring
- In the case of digital signals, the supply voltage can be connected to the front connector module or the connection module
- Reduction in wiring errors, clear control cabinet wiring
- Distribution of digital signals by byte or quadruple byte
- Each component can be replaced individually
- Use of pre-assembled cables possible

Design

Front connector module

Modified front connectors, called front connector modules, are available for connecting to the I/O modules (35 mm design). These are plugged into the I/O module to be wired instead of the front connector. The front connector modules are available in many different versions for digital I/O modules, analog I/O modules and for the 24 V, 2-ampère module. The connecting cables are plugged into these front connector modules.

Connecting cable

There are different versions of the connecting cable.

As a pre-assembled 16-pole or 50-pole round cable (shielded or unshielded) it is available in lengths up to 10 m.

When pre-assembled, there are one or two connectors in insulation displacement method (female ribbon connectors) at both ends of the cable.

The connecting cable connects the front connector module with the connection module.

As a pre-assembled round cable (unshielded) with a 40-pole plug on the side of the I/O module (64-channel) and a 50-pole plug for the connection to the connection module (4-byte version). The cable connectors are designed with the insulation displacement method.

Connection module


The system has both digital and analog connection modules for connecting the I/O signals. These are snapped onto the DIN rail. The connection modules with basic or signal functionality are available in 1-byte or 4-byte versions.

Connection modules are available for two different connection methods: with push-in or screw-type terminals. The potential can be fed in at the connection module or at the front connector module.

If other voltage or power levels are required in the field, the connection module for TPRo or TPOo output signals is used. For the TPRo connection module, relays are used for the implementation. For the TPOo connection module, optocouplers are used for the implementation. This converts the 24 V DC output signal simply and reliably to another voltage or power level. If 230 V AC or 110 V AC input signals have to be transmitted to the PLC in the field, a connection module with relay TPRi is available that simply converts the 230/110 V AC signal to 24 V DC. This means that there is always the same voltage level on the module side.

Use with optocouplers for the TPRo relay modules

If higher switching frequencies of the relay terminal module are required for the output signals, the relay can simply be replaced with an optocoupler (note technical specifications) in order to increase the switching frequency.

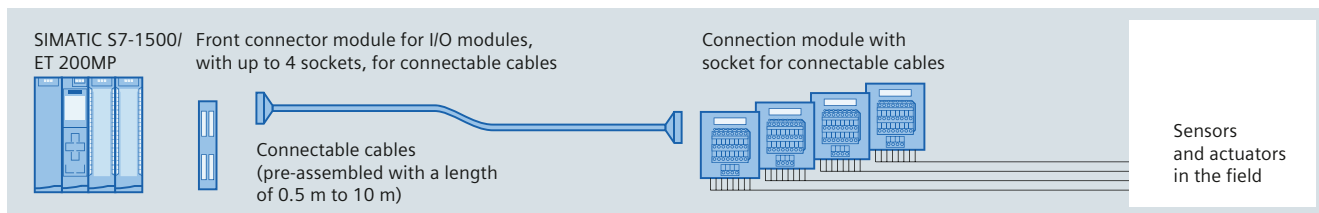

SIMATIC TOP connect for S7-1500/ET 200MP, fully modular connection

Ordering data

Article No.

Article No.

Front connectors¹⁾

Front connector module for digital modules for the connection of 16-pole connecting cables

Power supply via
• Push-in
• Screw terminals6ES7921-5AH20-0AA0
6ES7921-5AB20-0AA0

Front connector module for digital modules for the connection of 50-pole connecting cables

Power supply via
• Push-in
• Screw terminals6ES7921-5CH20-0AA0
6ES7921-5CB20-0AA0

Front connector module for 2 A digital output modules for the connection of 16-pole connecting cables

Power supply via
• Push-in
• Screw terminals6ES7921-5AJ00-0AA0
6ES7921-5AD00-0AA0

Front connector module for analog modules for the connection of 16-pole connecting cables

6ES7921-5AK20-0AA0

Front connector module for analog modules for the connection of 50-pole connecting cables

6ES7921-5CK20-0AA0

¹⁾ The terminal assignment of these front connector modules is unique and the dimensional drawings are shown in the Equipment Manual of SIMATIC TOP connect for S7-1500 and ET 200MP. The equipment manual is available as a download from Customer Support with the following ID: 95924607.

Connecting cables

Connecting cables for SIMATIC S7-1500

Pre-assembled round cable

16-pin, 0.14 mm²

Unshielded

- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 2.5 m
- 3.0 m
- 4.0 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7923-0BA50-0CB0
6ES7923-0BB00-0CB0
6ES7923-0BB50-0CB0
6ES7923-0BC00-0CB0
6ES7923-0BC50-0CB0
6ES7923-0BD00-0CB0
6ES7923-0BE00-0CB0
6ES7923-0BF00-0CB0
6ES7923-0BG50-0CB0
6ES7923-0BJ00-0CB0
6ES7923-0CB00-0CB0

Shielded

- 1.0 m
- 2.0 m
- 2.5 m
- 3.0 m
- 4.0 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7923-0BB00-0DB0
6ES7923-0BC00-0DB0
6ES7923-0BC50-0DB0
6ES7923-0BD00-0DB0
6ES7923-0BE00-0DB0
6ES7923-0BF00-0DB0
6ES7923-0BG50-0DB0
6ES7923-0BJ00-0DB0
6ES7923-0CB00-0DB0Version 4 x 16 to 1 x 50-pin,
0.14 mm²

Unshielded

- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 2.5 m
- 3.0 m
- 4.0 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7923-5BA50-0EB0
6ES7923-5BB00-0EB0
6ES7923-5BB50-0EB0
6ES7923-5BC00-0EB0
6ES7923-5BC50-0EB0
6ES7923-5BD00-0EB0
6ES7923-5BE00-0EB0
6ES7923-5BF00-0EB0
6ES7923-5BG50-0EB0
6ES7923-5BJ00-0EB0
6ES7923-5CB00-0EB0

Connecting cables for S7-1500

Pre-assembled round cable

50-pin, 0.14 mm²

Unshielded

- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 2.5 m
- 3.0 m
- 4.0 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7923-5BA50-0CB0
6ES7923-5BB00-0CB0
6ES7923-5BB50-0CB0
6ES7923-5BC00-0CB0
6ES7923-5BC50-0CB0
6ES7923-5BD00-0CB0
6ES7923-5BE00-0CB0
6ES7923-5BF00-0CB0
6ES7923-5BG50-0CB0
6ES7923-5BJ00-0CB0
6ES7923-5CB00-0CB0

Shielded

- 1.0 m
- 2.0 m
- 2.5 m
- 3.0 m
- 4.0 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7923-5BB00-0DB0
6ES7923-5BC00-0DB0
6ES7923-5BC50-0DB0
6ES7923-5BD00-0DB0
6ES7923-5BE00-0DB0
6ES7923-5BF00-0DB0
6ES7923-5BG50-0DB0
6ES7923-5BJ00-0DB0
6ES7923-5CB00-0DB0Version 1 x 40-pin to 1 x 50-pin,
0.14 mm²

Unshielded

- 1.0 m
- 2.0 m
- 2.5 m
- 3.0 m

6ES7923-5BB00-0GB0
6ES7923-5BC00-0GB0
6ES7923-5BC50-0GB0
6ES7923-5BD00-0GB0

SIMATIC S7-1500 Advanced Controllers

I/O modules

Connection system

System cabling for SIMATIC S7-1500 and ET 200MP > Fully modular connection

Ordering data

Article No.

Article No.

Connection modules

Connection module TP1

For 1-wire connection,
for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0AA20-0AC0
6ES7924-0AA20-0AA0
6ES7924-0AA20-0BC0
6ES7924-0AA20-0BA0

For 1-wire connection,
for 50-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs
- Push-in terminals, sourcing input, with LEDs
- Screw-type terminals, sourcing input, with LEDs
- Push-in terminals, mid-point conductor signal, with LEDs
- Screw-type terminals, mid-point conductor signal, with LEDs

6ES7924-2AA20-0AC0
6ES7924-2AA20-0AA0
6ES7924-2AA20-0BC0
6ES7924-2AA20-0BA0
6ES7924-2AK20-0BC0
6ES7924-2AK20-0BA0
6ES7924-2AM20-0BC0
6ES7924-2AM20-0BA0

Connection module TP3

For 3-wire connection,
for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs
- Push-in terminals with LEDs and one isolating terminal per channel
- Screw-type terminals with LEDs and one isolating terminal per channel
- Push-in terminals with LEDs and fuse per channel
- Screw-type terminals with LEDs and fuse per channel

6ES7924-0CA20-0AC0
6ES7924-0CA20-0AA0
6ES7924-0CA20-0BC0
6ES7924-0CA20-0BA0
6ES7924-0CH20-0BC0
6ES7924-0CH20-0BA0
6ES7924-0CL20-0BC0
6ES7924-0CL20-0BA0

For 3-wire connection,
for 50-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-2CA20-0AC0
6ES7924-2CA20-0AA0
6ES7924-2CA20-0BC0
6ES7924-2CA20-0BA0

Connection module TPRo

Relay module for 8 outputs,
relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BD20-0BC0
6ES7924-0BD20-0BA0

Connection module TPRI

Relay module for 8 inputs (110 V AC),
relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BG20-0BC0
6ES7924-0BG20-0BA0

Connection module TPRI

Relay module for 8 inputs (230 V AC),
relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BE20-0BC0
6ES7924-0BE20-0BA0

Connection module TPOo

Optocoupler module for 8 outputs
(max. 24 V DC/4 A)

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BF20-0BC0
6ES7924-0BF20-0BA0

Connection module for digital output modules 2 A

Connection module TP2

- Push-in terminals without LEDs
- Screw-type terminals without LEDs

6ES7924-0BB20-0AC0
6ES7924-0BB20-0AA0

Connection module for analog modules

TPA connection module, 16-pin

- Push-in terminals without LEDs
- Screw-type terminals without LEDs

6ES7924-0CC20-0AC0
6ES7924-0CC20-0AA0

TPA connection module, 50-pin

- Push-in terminals without LEDs
- Screw-type terminals without LEDs

6ES7924-2CC20-0AC0
6ES7924-2CC20-0AA0

Accessories

Labeling strip

Labels for connection modules
(6ES7924-... 20-0..0),
PU = 340 units

3RT2900-1SB20

Shield plate

For connection module 8 bits;
Pck. unit = 4 units (for 15-pin
connecting cable connection)

6ES7928-1AA20-4AA0

For connection module analog
32 bits;
Pck. unit = 4 units (for 15-pin
connecting cable connection)

6ES7928-1BA20-4AA0

Shield connection clamp

For shield plate at SIMATIC end
PU = 10 units

6ES7590-5BA00-0AA0

For shield plate at field end,
2 x 2 to 6 mm

6ES7390-5AB00-0AA0

For shield plate at field end,
3 to 8 mm

6ES7390-5BA00-0AA0

For shield plate at field end,
4 to 13 mm

6ES7390-5CA00-0AA0

Relay

For TPRO 24 V DC,
coil voltage 24 V DC,
output 230 V AC, Pck. unit = 4 units

6ES7928-3AA20-4AA0

For TPRI 110 V AC,
coil voltage 110 V AC,
Pck. unit = 4 units

6ES7928-3EA20-4AA0

For TPRI 230 V AC,
coil voltage 230 V AC,
Pck. unit = 4 units

6ES7928-3BA20-4AA0

Solid-state relay for TPRO

Excitation voltage 24 V DC,
output 230 V AC, Pck. unit = 4 units

6ES7928-3CA20-4AA0

Excitation voltage 24 V DC,
output 60 V DC, Pck. unit = 4 units

6ES7928-3DA20-4AA0

Housing cover for connection module

TP1 8 bits, Pck. unit = 4 units

6ES7928-5AA20-4AA0

TP2 / TP3 / TPA 8 bits, Pck.
unit = 4 units

6ES7928-5BA20-4AA0

TP3 32 bits, Pck. unit = 4 units

6ES7928-5CA20-4AA0

TP1 32 bits / TP3 switch / TPRO
8 bits, Pck. unit = 4 units

6ES7928-5DA20-4AA0

TPA 32 bits / TP3 fuse / TPRI /
TPOO 8 bits, Pck. unit = 4 units

6ES7928-5EA20-4AA0

Fuses

0.6 A, Pck. unit = 10 units

6ES7928-6AA20-0AA0

Technical specifications front connector modules

Rated operating voltage	24 V DC
Max. permissible operating voltage	60 V DC
Max. permissible continuous current • per connector pin	1 A
Max. permissible total current	2 A/byte
Permissible ambient temperature	0 to +60 °C
Test voltage	0.5 kV, 50 Hz, 60 sec.
Clearance and creepage distances	IEC 664 (1980), IEC 664 A (1981), in accordance with DIN VDE 0110 (01.89), overvoltage class II, pollution degree 2

Wiring rules for the front connector modules**SIMATIC TOP connect front connector module,
connection for potential infeed**

	Push-in	Screw terminals
Modules up to 4 connections		
Connectable cable cross-sections		
• Solid conductors	No	
• Flexible cables with/without wire end ferrule	0.25 to 1.5 mm ²	
Number of cables per connection	1 or a combination of 2 wires up to 1.5 mm ² (total) in a common wire end ferrule	
Max. diameter of the cable insulation	3.1 mm	
Stripped length of the cables		
• Without insulating collar	6 mm	
• With insulating collar	-	
Wire end ferrules according to DIN 46228		
• Without insulating collar	Form A; 5 to 7 mm long	
• With insulating collar 0.25 to 1.0 mm ²	-	
• With insulating collar 1.5 mm ²	-	
Blade width of the screwdriver	3.5 mm (cylindrical design)	
Tightening torque for connecting the cables	-	0.4 Nm to 0.7 Nm

Technical specifications Connecting cable

Technical specifications of connecting cable from SIMATIC S7 to connection module	
Operating voltage	60 V DC
Continuous current per signal conductor	1 A
Max. total current	4 A/byte
Operating temperature	0 to +60 °C
Outer diameter of pre-assembled round cable in mm unshielded/shielded (16-pole)	Approx. 6.5/7.0

SIMATIC S7-1500 Advanced Controllers

I/O modules

Connection system

System cabling for SIMATIC S7-1500 and ET 200MP > Flexible connection

Overview



Flexible connection of the cabling system consists of a S7-1500 front connector which has the 20 or 40 single cores already in place and which directly connects the I/O modules (35 mm design) with the sensors and actuators inside the control cabinet. With a cross-section of 0.5 square mm, the single wires are also suitable for higher currents and are available in different lengths and versions: as H05V-K cores (PVC insulation), H05Z-K (halogen-free insulation) or with UL/CSA certified cores. The halogen-free version has a low smoke gas density in the event of a fire and is thus particularly well suited for use in buildings.

Technical specifications

Front connector with single cores for 16 channels (pins 1-20)

Rated operating voltage	24 V DC
Permissible continuous current with simultaneous load of all cores, max.	1.5 A
Permissible ambient temperature	0 to 60 °C
Core type	H05V-K, UL 1007/1569; CSA TR64, or halogen-free
Number of single cores	20
Core cross-section	0.5 mm ² ; Cu
Bundle diameter in mm	approx. 15
Wire color	Blue, RAL 5010
Designation of cores	Numbered from 1 to 20 (front connector contact = core number)
Assembly	Screw contacts

Front connector with single cores for 32 channels (pins 1-40)

Rated operating voltage	24 V DC
Permissible continuous current with simultaneous load of all cores, max.	1.5 A
Permissible ambient temperature	0 to 60 °C
Core type	H05V-K, UL 1007/1569; CSA TR64, or halogen-free
Number of single cores	40
Core cross-section	0.5 mm ² ; Cu
Bundle diameter in mm	approx. 17
Wire color	Blue, RAL 5010
Designation of cores	Numbered from 1 to 40 (front connector contact = core number)
Assembly	Screw contacts

Ordering data

Article No.

Front connector with single cores for 32 channels (pins 1-40)

Core type H05V-K (0.5 mm² with screw connection)

- 2.5 m
- 3.2 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7922-5BC50-0AC0
6ES7922-5BD20-0AC0
6ES7922-5BF00-0AC0
6ES7922-5BG50-0AC0
6ES7922-5BJ00-0AC0
6ES7922-5CB00-0AC0

Core type H05Z-K, halogen-free (0.5 mm² with screw connection)

- 2.5 m
- 3.2 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7922-5BC50-0HC0
6ES7922-5BD20-0HC0
6ES7922-5BF00-0HC0
6ES7922-5BG50-0HC0
6ES7922-5BJ00-0HC0
6ES7922-5CB00-0HC0

Core type UL/CSA-certified (0.5 mm² with screw connection)

- 3.2 m
- 5.0 m
- 6.5 m

6ES7922-5BD20-0UC0
6ES7922-5BF00-0UC0
6ES7922-5BG50-0UC0

Front connector with single cores for 16 channels (pins 1-20)

Core type H05V-K (0.5 mm² with screw connection)

- 2.5 m
- 3.2 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7922-5BC50-0AB0
6ES7922-5BD20-0AB0
6ES7922-5BF00-0AB0
6ES7922-5BG50-0AB0
6ES7922-5BJ00-0AB0
6ES7922-5CB00-0AB0

Core type H05Z-K, halogen-free (0.5 mm² with screw connection)


- 2.5 m
- 3.2 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7922-5BC50-0HB0
6ES7922-5BD20-0HB0
6ES7922-5BF00-0HB0
6ES7922-5BG50-0HB0
6ES7922-5BJ00-0HB0
6ES7922-5CB00-0HB0

Core type UL/CSA-certified (0.5 mm² with screw connection)

- 3.2 m
- 5.0 m
- 6.5 m

6ES7922-5BD20-0UB0
6ES7922-5BF00-0UB0
6ES7922-5BG50-0UB0

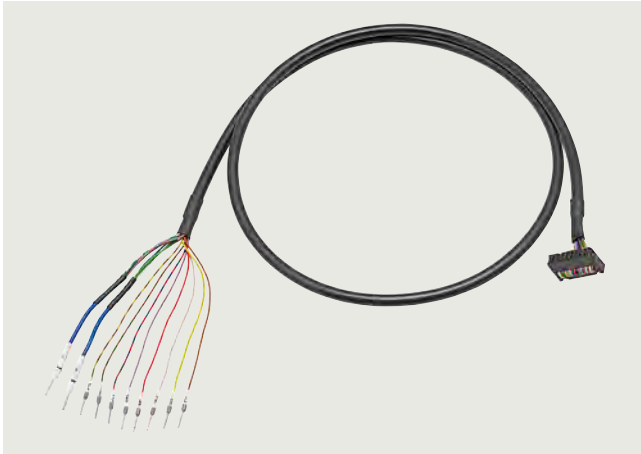System cabling for SIMATIC S7-1500 IO (25 mm), ET 200SP, S7-1200 and LOGO!**Overview**

SIMATIC TOP connect universal connecting cable

The wiring of the

- SIMATIC S7-1500 IO (25 mm)
- SIMATIC ET 200SP
- SIMATIC S7-1200
- LOGO!

with the sensors/actuators is a significant factor with respect to time/cost overhead during configuration, control cabinet design, procurement and ease of servicing. The SIMATIC TOP connect system cabling makes connection easy, fast and secure.


4

Design

The unshielded universal connection cable is offered for a wide range of control cabinet concepts.

It comprises:

- 16-pin round cable with a core cross-section of 0.14 mm^2 , pre-assembled with wire end ferrules for connection to the controller:
 - Labeled with "0" ... "7" for the control inputs/outputs
 - Labeled with "M" for mass
 - Labeled with "L+" for 24 V DC potential
- 16-pin ID (insulation displacement) connector for connection to the SIMATIC TOP connect connection modules for 8 I/Os:
 - 3-wire connection using the appropriate connection module for quick, error-free wiring
 - Galvanic isolation and adaptation using a coupling relay for easy implementation of potential groups in the system
 - High output current (up to 4 A), even for higher switching frequencies, using an optocoupler module (overload and short-circuit proof)
 - Implementation of isolating terminals using switch modules enabling individual signals to be measured
 - Channel-wise protection of I/Os using a fuse module with a thermal fuse

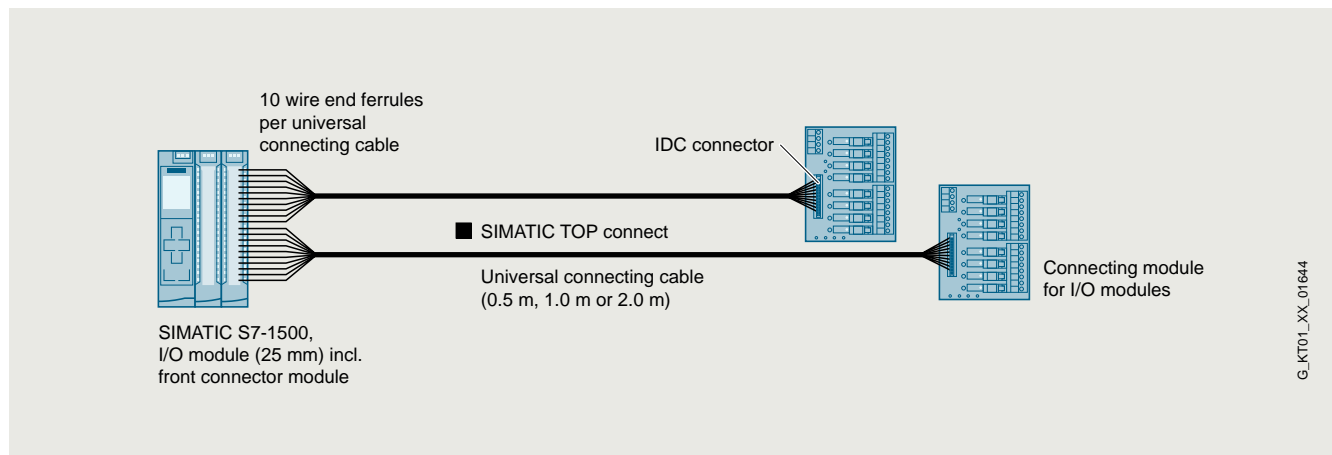

SIMATIC TOP connect universal connection cable


SIMATIC S7-1500 Advanced Controllers

I/O modules

Connection system

System cabling for SIMATIC S7-1500 IO (25 mm), ET 200SP, S7-1200 and LOGO!

Overview universal connecting cable

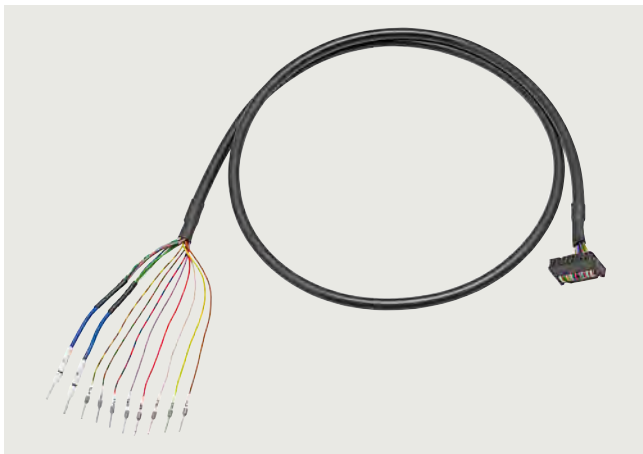

SIMATIC TOP connect universal connecting cable

The universal connecting cable constitutes the link between the standard connection of the SIMATIC S7-1500 IO (25 mm), SIMATIC ET 200SP, SIMATIC S7-1200 or LOGO! and the SIMATIC TOP connect terminal module. It transmits 8 signals and the supply voltage. The connecting cable is available in lengths of 0.5 m / 1.0 m / 2.0 m. the maximum technically feasible length is 30 m.

Ordering data

Article No.

Universal connecting cables for SIMATIC S7-1500 IO (25 mm), SIMATIC ET 200SP, SIMATIC S7-1200 and LOGO!

16 x 0.14 mm² unshielded

- 0.5 m
- 1.0 m
- 2.0 m

6ES7923-0BA50-0FB0
6ES7923-0BB00-0FB0
6ES7923-0BC00-0FB0

Overview Connection modules

The connection modules are used instead of conventional terminal blocks and act as the interface between the PLC and signals from the field. All digital modules with 8 I/Os can be used.

Ordering data

Article No.

TP1 connection module

For 1-conductor connection, for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0AA20-0AC0
6ES7924-0AA20-0AA0
6ES7924-0AA20-0BC0
6ES7924-0AA20-0BA0

TP3 connection module

For 3-conductor connection, for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs
- Push-in terminals with LEDs and one isolating terminal per channel
- Screw-type terminals with LEDs and one isolating terminal per channel
- Push-in terminals with LEDs and fuse per channel
- Screw-type terminals with LEDs and fuse per channel

6ES7924-0CA20-0AC0
6ES7924-0CA20-0AA0
6ES7924-0CA20-0BC0
6ES7924-0CA20-0BA0
6ES7924-0CH20-0BC0
6ES7924-0CH20-0BA0
6ES7924-0CL20-0BC0
6ES7924-0CL20-0BA0

TPRo connection module

Relay module for 8 outputs, relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BD20-0BC0
6ES7924-0BD20-0BA0

TPRi connection module

Relay module for 8 inputs (230 V AC), relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BE20-0BC0
6ES7924-0BE20-0BA0

TPRi connection module

Relay module for 8 inputs (110 V AC), relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BG20-0BC0
6ES7924-0BG20-0BA0

TPOo connection module

Optocoupler module for 8 outputs (max. 24 V DC/4 A)

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BF20-0BC0
6ES7924-0BF20-0BA0

Overview



Fail-safe digital input module: F-DI 16x24VDC PROFISAFE

Important features:

- 16-channel fail-safe digital input module for ET 200MP/S7-1500
- For fail-safe reading of sensor information (1 or 2 channels)
- Provides integral discrepancy evaluation for 2-out-of-2 signals
- 4 internal sensor supplies (incl. test function) onboard
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- LED display for error, operation, supply voltage and status
- Clear module labeling
 - Plain text identification of the module type
 - Complete Article No.
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Hardware and firmware version
- Optional labeling accessories
 - Labeling sheets, yellow
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. Can be used with all fail-safe SIMATIC S7-1500 F-CPU's in the central configuration, as well as ET 200MP distributed I/O with all other SIMATIC S7 F-CPU's.

Ordering data

Ordering data	Article No.	Ordering data	Article No.
F-digital input module		Front door for F-I/O modules	
SIMATIC S7-1500, F-digital input module F-DI 16x 24 V DC PROFIsafe; 35 mm width; up to PLe (ISO 13849-1)/ SIL 3 (IEC 61508)	6ES7526-1BH00-0AB0	SIMATIC S7-1500, spare part front door for F-I/O modules Consisting of: * front door (unlasered), * labeling strips (front, yellow for F-modules), * cabling diagram 5 units per packing unit	6ES7528-0AA10-7AA0
Accessories		STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.	
SIMATIC DP, spare part 5 E-coding elements type F For ET 200MP modules F-DI, F-AI, F-DQ; 5 units per packing unit	6ES7592-6EF00-1AA0	SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB	6ES7833-1FA23-0YA5
Front connectors			
SIMATIC S7-1500, front connector screw-type connection system 40-pin for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1AM00-0XB0		
SIMATIC S7-1500, front connector with push-in technology 40-pin, for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1BM00-0XB0		
SIMATIC S7-1500, labeling sheets For 35 mm width S7-1500 modules, color: yellow, material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules	6ES7592-2CX00-0AA0		
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0		

SIMATIC S7-1500 Advanced Controllers

I/O modules

Fail-safe I/O modules

Digital F-input modules

Ordering data

Article No.

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery

6ES7833-1FA23-0YH5

S7 Distributed Safety V5.4 SP5 Update 2 programming tool

Task:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used

Article No.

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

6ES7833-1FC02-0YA5

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading¹⁾

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F Consignee email address required for delivery

6ES7833-1FC02-0YH5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7526-1BH00-0AB0 ET 200MP, F-DI 16X24VDC
General information	
Product type designation	F-DI 16x24VDC
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V13 SP1 with HSP 0086
Operating mode	
• DI	Yes
• MSI	No
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Encoder supply	
Number of outputs	4
Short-circuit protection	Yes; Electronic (response threshold 0.7 A to 1.8 A)
24 V encoder supply	
• 24 V	Yes; min. L+ (-1.5 V)
• Short-circuit protection	Yes
• Output current, max.	300 mA; Max. 100 mA when mounted vertically
Digital inputs	
Number of digital inputs	16
Source/sink input	Yes; P-reading
Input characteristic curve in accordance with IEC 61131, type 1	Yes

Article number	6ES7526-1BH00-0AB0 ET 200MP, F-DI 16X24VDC
Input voltage	
• Rated value (DC)	24 V
• for signal "0"	-30 to +5 V
• for signal "1"	+15 to +30 V
Input current	
• for signal "1", typ.	3.7 mA
Input delay (for rated value of input voltage) for standard inputs	
- parameterizable	Yes
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
• Hardware interrupt	No
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	No
• Short-circuit	Yes
• Group error	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; red LED

Technical specifications

Article number	6ES7526-1BH00-0AB0 ET 200MP, F-DI 16X24VDC
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
Suitable for safety functions	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3

Article number	6ES7526-1BH00-0AB0 ET 200MP, F-DI 16X24VDC
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	40 °C
Dimensions	
Width	35 mm
Height	147 mm
Depth	129 mm
Weights	
Weight, approx.	280 g

SIMATIC S7-1500 Advanced Controllers

I/O modules

Fail-safe I/O modules

Digital F-output modules

Overview



Digital fail-safe output module:
F-DQ 8x24VDC 2A PPM PROFISAFE

Important features:

- 8-channel digital fail-safe output module for ET 200MP/S7-1500
- Fail-safe 2-channel activation (parameterizable PM/PP switching) of actuators
- Actuators can be controlled up to 2 A
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- LED display for error, operation, supply voltage and status
- Clear module labeling
 - Plain text identification of the module type
 - Complete Article No.
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Hardware and firmware version
- Optional labeling accessories
 - Labeling sheets, yellow
- The module supports PROFIsafe in both PROFIBUS and PROFINET configurations.
- Can be used with all fail-safe SIMATIC S7-1500 F-CPU's in the central configuration, as well as ET 200MP distributed I/O with all other SIMATIC S7 F-CPU's.

Ordering data

Ordering data	Article No.	Ordering data	Article No.
F-digital output module		Front door for F-I/O modules	
SIMATIC S7-1500, F-digital output module F-DQ 8x 24 V DC 2 A PPM PROFIsafe; 35 mm width; up to PLE (ISO 13849-1)/ SIL3 (IEC 61508)	6ES7526-2BF00-0AB0	SIMATIC S7-1500, spare part front door for F-I/O modules Consisting of: * front door (unlasered), * labeling strips (front, yellow for F-modules), * cabling diagram 5 units per packing unit	6ES7528-0AA10-7AA0
Accessories		STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 <u>Note:</u> As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.	
SIMATIC DP, spare part 5 E-coding elements type F For ET 200MP modules F-DI, F-AI, F-DQ; 5 units per packing unit	6ES7592-6EF00-1AA0	SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB	6ES7833-1FA23-0YA5
Front connectors			
SIMATIC S7-1500, front connector screw-type connection system 40-pin for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1AM00-0XB0		
SIMATIC S7-1500, front connector with push-in technology 40-pin, for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1BM00-0XB0		
SIMATIC S7-1500, labeling sheets for 35 mm wide S7-1500 modules Color: yellow, material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules	6ES7592-2CX00-0AA0		
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0		

Ordering data	Article No.	Article No.
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾ Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery	6ES7833-1FA23-0YH5	SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F
S7 Distributed Safety V5.4 SP5 Update 2 programming tool Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used		SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F Consignee email address required for delivery

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7526-2BF00-0AB0 ET 200MP, F-DQ 8x24VDC 2A PPM
General information	
Product type designation	F-DQ 8x24VDC/2A PPM
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V13 SP1 with HSP 0086
Operating mode	
• DQ	Yes
• MSO	No
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Digital outputs	
Number of digital outputs	8
Current-sinking	Yes
Current-sourcing	Yes
Short-circuit protection	Yes
Open-circuit detection	Yes
Overload protection	Yes
Limitation of inductive shutdown voltage to	PM-switching: -24 V + (-47 V), PP-switching: -24 V
Controlling a digital input	Yes; digital output, according to IEC 61131-2, type 2
Switching capacity of the outputs	
• with resistive load, max.	2 A
• on lamp load, max.	10 W

Article number	6ES7526-2BF00-0AB0 ET 200MP, F-DQ 8x24VDC 2A PPM
Load resistance range	
• lower limit	12 Ω
• upper limit	2 000 Ω
Output voltage	
• for signal "1", min.	24 V; L+ (-0.5 V)
Output current	
• for signal "1" rated value	2 A
• for signal "0" residual current, max.	0.5 mA; Current-sourcing, or current sourcing and sinking switches individually, current sinking: max. 1 mA
Switching frequency	
• with resistive load, max.	30 Hz
• with inductive load, max.	0.1 Hz
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per channel, max.	2 A
Total current of the outputs (per module)	
horizontal installation	
- up to 40 °C, max.	16 A
- up to 60 °C, max.	8 A
vertical installation	
- up to 40 °C, max.	8 A

SIMATIC S7-1500 Advanced Controllers

I/O modules

Fail-safe I/O modules

Digital F-output modules**Technical specifications**

Article number	6ES7526-2BF00-0AB0 ET 200MP, F-DQ 8x24VDC 2A PPM
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Substitute values connectable	No
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Group error	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; red LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes

Article number	6ES7526-2BF00-0AB0 ET 200MP, F-DQ 8x24VDC 2A PPM
Standards, approvals, certificates	
Suitable for safety functions	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	40 °C
Dimensions	
Width	35 mm
Height	147 mm
Depth	129 mm
Weights	
Weight, approx.	300 g

Overview

Analog fail-safe input module:
F-AI 8xI 0(4)..20 mA

Important features:

- 8-channel analog fail-safe input module for ET 200MP/S7-1500
- Max. achievable safety classes: SIL3 (acc. to IEC 61508) and PLe (acc. to ISO 13849-1)
- Measurement type current, can be set for each channel:
 - 0 - 20 mA
 - 4 - 20 mA
- Interference frequency suppression: 50/60 Hz
- 8 analog inputs can be used as:
 - 8 channels - 1 of 1 (SIL3/Cat.3/PLd) or
 - Up to 4 channels - 1 of 2 (SIL3/Cat.4/PLe)
- Galvanic isolation:
 - To the backplane bus
 - Analog inputs in 2 groups of 4 channels
 - Between channels and power supply
- Resolution 16-bit including sign
- External encoder supply possible
- Internal short-circuit-proof encoder supply per channel
- Channel-wide and module-wide passivation
- Module width 35 mm
- LED display for error, operation, supply voltage and status
- Clear module labeling
 - Plain text identification of the module type
 - Complete Article No.
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Hardware and firmware version
- Optional labeling accessories
 - Labeling sheets, yellow
 - The module supports PROFIsafe in both PROFIBUS and PROFINET configurations.
 - Can be used with all fail-safe SIMATIC S7-1500 F-CPU's in the central configuration, as well as ET 200MP distributed I/O with all other SIMATIC S7 F-CPU's.

Ordering data**Article No.**

Ordering data	Article No.
F-analog input module	
SIMATIC S7-1500, F-analog input module F-AI 8xI 0(4)..20 mA PROFIsafe, 35 mm, width; up to PLe (ISO 13849-1)/ SIL 3 (IEC 61508)	6ES7536-1MF00-0AB0
Accessories	
SIMATIC DP, spare part 5 E-coding elements type F For ET 200MP modules F-DI, F-AI, F-DQ; 5 units per packing unit	6ES7592-6EF00-1AA0
Front connectors Incl. four potential bridges, cable ties and individual labeling strips, 40-pin	
SIMATIC S7-1500, front connector screw-type connection system 40-pin for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1AM00-0XB0
SIMATIC S7-1500, front connector with push-in technology 40-pin, for 35 mm wide modules including 4 jumper links and cable ties	6ES7592-1BM00-0XB0
SIMATIC S7-1500, labeling sheets for 35 mm wide S7-1500 modules Color: yellow, material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules	6ES7592-2CX00-0AA0
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0
Front door for F-I/O modules	
SIMATIC S7-1500, spare part front door for F-IO modules Consisting of: * front door (unlasered), * labeling strips (front, yellow for F-modules) * Cabling diagram 5 units per packing unit	6ES7528-0AA10-7AA0

SIMATIC S7-1500 Advanced Controllers

I/O modules

Fail-safe I/O modules

Analog F-input modules

Ordering data

Article No.

Article No.

STEP 7 Safety Advanced V19

Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O

Requirement:

STEP 7 Professional V19

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F
Content: 1x USB

6ES7833-1FA23-0YA5

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery

6ES7833-1FA23-0YH5

S7 Distributed Safety V5.4 SP5 Update 2 programming tool

Task:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

6ES7833-1FC02-0YA5

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F
Consignee email address required for delivery

6ES7833-1FC02-0YH5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7536-1MF00-0AB0 ET 200MP, F-AI 8xI 0(4)..20mA
General information	
Product type designation	F-AI 8xI 0(4) ... 20 mA
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V18 with HSP0394 or higher
Operating mode	
• MSI	No
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Encoder supply	
Number of outputs	8
Analog inputs	
Number of analog inputs	8; Differential inputs
permissible input current for current input (destruction limit), max.	35 mA
Input ranges (rated values), currents	
• 0 to 20 mA	Yes
• 4 mA to 20 mA	Yes
Cable length	
• shielded, max.	1 000 m
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
• Integration time, parameterizable	Yes
• Integration time (ms)	20 / 16,667
• Interference voltage suppression for interference frequency f1 in Hz	50 / 60 Hz
Smoothing of measured values	
• Number of smoothing levels	7
• parameterizable	Yes
Encoder	
Connection of signal encoders	
• for current measurement as 2-wire transducer	Yes
- Burden of 2-wire transmitter, max.	650 Ω
• for current measurement as 4-wire transducer	Yes
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Current, relative to input range, (+/-)	0.05 %
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, f1 = interference frequency	
• Series mode interference (peak value of interference < rated value of input range), min.	40 dB
• Common mode voltage, max.	60 V DC/30 V AC
• Common mode interference, min.	70 dB

Article number	6ES7536-1MF00-0AB0 ET 200MP, F-AI 8xI 0(4)..20mA
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
• Limit value alarm	No
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Overflow/underflow	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
Potential separation	
Potential separation analog inputs	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 4.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09 1/h
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	40 °C
Dimensions	
Width	35 mm
Height	147 mm
Depth	129 mm
Weights	
Weight, approx.	290 g

SIMATIC S7-1500 Advanced Controllers

I/O modules

SIPLUS F-digital/analog modules

SIPLUS digital F-input modules**Overview**

SIPLUS digital fail-safe input module:
F-DI 16x24 V DC

Important properties:

- 16-channel fail-safe digital input module for ET 200MP/S7-1500
- For fail-safe reading of sensor information (1 or 2 channels)
- Provides integral discrepancy evaluation for 2-out-of-2 signals
- 4 internal sensor supplies (incl. test function) onboard
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- LED display for error, operation, supply voltage and status
- Clear module labeling
 - Plain text identification of the module type
 - Complete Article No.
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Hardware and firmware version
- Optional labeling accessories
 - Labeling sheets, yellow
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. Can be used with all fail-safe SIMATIC S7-1500 F-CPUs in the central configuration, as well as ET 200MP distributed I/O with all other SIMATIC S7 F-CPUs.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.**

SIPLUS F-digital input module 16 inputs, 24 V DC, PROFISAFE	6AG1526-1BH00-2AB0
Accessories	
Coding elements E-coding element type F for SIPLUS ET 200MP modules F-DI/F-DQ; 5 units, spare part	6AG1592-6EF00-2AA0
SIPLUS S7-1500 U connector Spare part for connecting I/O modules; self-assembling backplane bus; 5 pieces per packaging unit; with conformal coating, -40...+70 °C	6AG1590-0AA00-7AA0
Other accessories	See SIMATIC S7-1500 F-digital input modules, page 4/301

Technical specifications

Article number	6AG1526-1BH00-2AB0
Based on	6ES7526-1BH00-0AB0 SIPLUS S7-1500 F-DI 16x24VDC
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax
• vertical installation, min.	-30 °C; = Tmin
• vertical installation, max.	40 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Overview



SIPLUS digital fail-safe output module:
F-DQ 8x24 V DC 2 A PPM

Important properties:

- 8-channel digital fail-safe output module for ET 200MP/S7-1500
- Fail-safe 2-channel activation (parameterizable PM/PP switching) of actuators
- Actuators can be controlled up to 2 A
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- LED display for error, operation, supply voltage and status
- Clear module labeling
 - Plain text identification of the module type
 - Complete Article No.
 - 2D matrix code (article and serial number)
 - Connection diagram
 - Hardware and firmware version
- Optional labeling accessories
 - Labeling sheets, yellow
- The module supports PROFIsafe in both PROFIBUS and PROFINET configurations.
- Can be used with all fail-safe SIMATIC S7-1500 F-CPU's in the central configuration, as well as ET 200MP distributed I/O with all other SIMATIC S7 F-CPU's.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Ordering data	Article No.
SIPLUS F-digital output module 8 outputs, 24 V DC, 2 A, PROFISAFE, switching to sourcing/sinking output	6AG1526-2BF00-2AB0
Accessories	
Coding elements E-coding element type F for SIPLUS ET 200MP modules F-DI/F-DQ; 5 units, spare part	6AG1592-6EF00-2AA0
SIPLUS S7-1500 U connector Spare part for connecting I/O modules; self-assembling backplane bus; 5 pieces per packaging unit; with conformal coating, -40...+70 °C	6AG1590-0AA00-7AA0
Other accessories	See SIMATIC S7-1500, F-digital output modules, page 4/304

Technical specifications

Article number	6AG1526-2BF00-2AB0
Based on	6ES7526-2BF00-0AB0 SIPLUS S7-1500 F-DQ 8x24VDC/2A
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax
• vertical installation, min.	-30 °C; = Tmin
• vertical installation, max.	40 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

Power supplies

1-phase, 24 V DC (for S7-1500 and ET 200MP)

Overview



The design and functionality of the SIMATIC PM 1507 single-phase load power supply (PM = power module) with automatic range selection of the input voltage makes it an optimal match to the SIMATIC S7-1500 PLC. It supplies the S7-1500 system components such as CPU, system power supply (PS), I/O circuits of the input and output modules and, if necessary, the sensors and actuators with 24 V DC.

Ordering data

Article No.

SIMATIC PM 1507 Stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC Output: 24 V DC/3 A	6EP1332-4BA00
SIMATIC PM 1507 Stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC Output: 24 V DC/8 A	6EP1333-4BA00
Accessories	
Power plug With coding element for power supply module; spare part, 10 units per packing unit	6ES7590-8AA00-0AA0
DIN rail adapter For adapting S7-1500 mounting rails on low or flat DIN rails, as pre-assembled in control cabinets and terminal boxes, for example. An adapter must be placed every 25 cm. Including mounting hardware. 10 units per packing unit	6ES7590-6AA00-0AA0

Technical specifications

Article number	6EP1332-4BA00	6EP1333-4BA00
product brand name	S7-1500 PM1507	S7-1500 PM1507
type of current supply	24 V/3 A	24 V/8 A
input		
type of the power supply network	1-phase AC	1-phase AC
supply voltage at AC	Automatic range selection	Automatic range selection
supply voltage	120 V/230 V	120 V/230 V
input voltage 1 at AC	85 ... 132 V	85 ... 132 V
input voltage 2 at AC	170 ... 264 V	170 ... 264 V
wide range input	No	No
overvoltage overload capability	$2.3 \times V_{in \text{ rated}}, 1.3 \text{ ms}$	$2.3 \times V_{in \text{ rated}}, 1.3 \text{ ms}$
buffering time for rated value of the output current in the event of power failure minimum	20 ms	20 ms
operating condition of the mains buffering	at $V_{in} = 93/187 \text{ V}$	at $V_{in} = 93/187 \text{ V}$
line frequency	50 Hz/60 Hz	50 Hz/60 Hz
line frequency initial value	45 ... 65 Hz	45 ... 65 Hz
line frequency full-scale value		
input current		
• at rated input voltage 120 V	1.4 A	3.7 A
• at rated input voltage 230 V	0.8 A	1.7 A
current limitation of inrush current at 25 °C maximum	23 A	62 A
duration of inrush current limiting at 25 °C		
• maximum	3 ms	3 ms
I ² t value maximum	1.3 A ² ·s	12 A ² ·s
fuse protection type	T 3, 15 A/250 V (not accessible)	T 6.3 A/250 V (not accessible)
fuse protection type in the feeder	Recommended miniature circuit breaker: 10 A characteristic B or 6 A characteristic C	Recommended miniature circuit breaker: 16 A characteristic B or 10 A characteristic C

Technical specifications

Article number	6EP1332-4BA00	6EP1333-4BA00
product brand name	S7-1500 PM1507	S7-1500 PM1507
type of current supply	24 V/3 A	24 V/8 A
output		
voltage curve at output	Controlled, isolated DC voltage	Controlled, isolated DC voltage
output voltage at DC rated value	24 V	24 V
output voltage		
• at output 1 at DC rated value	24 V	24 V
output voltage adjustable	No	No
relative overall tolerance of the voltage	1 %	1 %
relative control precision of the output voltage		
• on slow fluctuation of input voltage	0.1 %	0.1 %
• on slow fluctuation of ohm loading	0.1 %	0.1 %
residual ripple		
• maximum	50 mV	50 mV
voltage peak		
• maximum	150 mV	150 mV
display version for normal operation	LED green for 24 V OK; LED red for error; LED yellow for stand-by	LED green for 24 V OK; LED red for error; LED yellow for stand-by
behavior of the output voltage when switching on	No overshoot of Vout (soft start)	No overshoot of Vout (soft start)
response delay maximum	1.5 s	1.5 s
voltage increase time of the output voltage		
• typical	10 ms	10 ms
output current		
• rated value	3 A	8 A
• rated range	0 ... 3 A	0 ... 8 A
supplied active power typical	72 W	192 W
short-term overload current		
• on short-circuiting during the start-up typical	12 A	35 A
• at short-circuit during operation typical	12 A	35 A
duration of overloading capability for excess current		
• on short-circuiting during the start-up	70 ms	70 ms
• at short-circuit during operation	70 ms	70 ms
bridging of equipment	Yes	Yes
number of parallel-switched equipment resources	2	2
efficiency in percent	87 %	90 %
power loss [W]		
• at rated output voltage for rated value of the output current typical	11 W	21 W

SIMATIC S7-1500 Advanced Controllers

Power supplies

1-phase, 24 V DC (for S7-1500 and ET 200MP)

Technical specifications

Article number	6EP1332-4BA00	6EP1333-4BA00
product brand name	S7-1500 PM1507	S7-1500 PM1507
type of current supply	24 V/3 A	24 V/8 A
closed-loop control		
relative control precision of the output voltage with rapid fluctuation of the input voltage by +/- 15% typical	0.1 %	0.1 %
relative control precision of the output voltage load step of resistive load 50/100/50 % typical	1 %	2 %
relative control precision of the output voltage at load step of resistive load 10/90/10 % typical	3 %	3 %
setting time		
• load step 10 to 90% typical	5 ms	5 ms
• load step 90 to 10% typical	5 ms	5 ms
• maximum	5 ms	5 ms
protection and monitoring		
design of the overvoltage protection	Additional control loop, limitation (closed loop control) at < 28.8 V	Additional control loop, limitation (closed loop control) at < 28.8 V
property of the output short-circuit proof	Yes	Yes
design of short-circuit protection	Electronic shutdown, automatic restart	Electronic shutdown, automatic restart
• response value current limitation	3.15 ... 3.6 A	8.4 ... 9.6 A
• response value current limitation typical	3.4 A	9 A
display version for overload and short circuit	-	
safety		
galvanic isolation between input and output	Yes	Yes
galvanic isolation	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178 and EN 61131-2	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178 and EN 61131-2
operating resource protection class	Class I	Class I
leakage current		
• maximum	3.5 mA	3.5 mA
• typical	0.4 mA	1.3 mA
protection class IP standard	IP20	IP20
• for emitted interference	EN 55022 Class B	EN 55022 Class B
• for mains harmonics limitation	EN 61000-3-2	EN 61000-3-2
• for interference immunity	EN 61000-6-2	EN 61000-6-2
standards, specifications, approvals		
certificate of suitability		
• CE marking	Yes	Yes
• UL approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 142), File E143289	Yes; cULus-Listed (UL 508, CSA C22.2 No. 142), File E143289
• CSA approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 142), File E143289	Yes; cULus-Listed (UL 508, CSA C22.2 No. 142), File E143289
• EAC approval	Yes	Yes
• NEC Class 2	No	No
type of certification		
• BIS	Yes; R-41183539	Yes; R-41183539
• CB-certificate	Yes	Yes
MTBF at 40 °C	1 611 993 h	1 362 918 h

SIMATIC S7-1500 Advanced Controllers

Power supplies

1-phase, 24 V DC (for S7-1500 and ET 200MP)

Technical specifications

Article number	6EP1332-4BA00	6EP1333-4BA00
product brand name	S7-1500 PM1507	S7-1500 PM1507
type of current supply	24 V/3 A	24 V/8 A
standards, specifications, approvals hazardous environments		
certificate of suitability		
• IECEx	Yes; IECEx Ex nA nC IIC T4 Gc	Yes; IECEx Ex nA nC IIC T3 Gc
• ATEX	Yes; ATEX (EX) II 3G Ex nA nC IIC T4 Gc	Yes; ATEX (EX) II 3G Ex nA nC IIC T3 Gc
• ULhazloc approval	Yes	Yes
• cCSAus, Class 1, Division 2	No	No
• FM registration	Yes; Class I, Div. 2, Group ABCD, T4	Yes; Class I, Div. 2, Group ABCD, T4
standards, specifications, approvals marine classification		
shipbuilding approval	Yes	Yes
Marine classification association		
• American Bureau of Shipping Europe Ltd. (ABS)	Yes	Yes
• French marine classification society (BV)	Yes	Yes
• Det Norske Veritas (DNV)	Yes	Yes
• Lloyds Register of Shipping (LRS)	No	No
ambient conditions		
ambient temperature		
• during operation	0 ... 60 °C; with natural convection	0 ... 60 °C; with natural convection
• during transport	-40 ... +85 °C	-40 ... +85 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C
environmental category according to IEC 60721	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K3, 5 ... 95% no condensation
connection method		
type of electrical connection	Screw-/spring clamp connection	Screw-/spring clamp connection
• at input	L, N, PE: 1 screw terminal each for 0.5 ... 2.5 mm ²	L, N, PE: 1 screw terminal each for 0.5 ... 2.5 mm ²
• at output	L+, M: 2 spring-loaded terminals each for 0.5 to 2.5 mm ²	L+, M: 2 spring-loaded terminals each for 0.5 to 2.5 mm ²
removable terminal at input	Yes	Yes
removable terminal at output	Yes	Yes
mechanical data		
width × height × depth of the enclosure	50 mm × 147 mm × 129 mm	75 mm × 147 mm × 129 mm
installation width × mounting height	50 mm × 205 mm	75 mm × 205 mm
required spacing		
• top	40 mm	40 mm
• bottom	40 mm	40 mm
• left	0 mm	0 mm
• right	0 mm	0 mm
fastening method	Can be mounted onto S7-1500 rail	Can be mounted onto S7-1500 rail
• standard rail mounting	No	No
• S7 rail mounting	Yes	Yes
• wall mounting	No	No
housing can be lined up	Yes	Yes
net weight	0.45 kg	0.74 kg
additional information		
other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

SIMATIC S7-1500 Advanced Controllers

Power supplies

System power supplies

Overview



- System power supplies for SIMATIC S7-1500
- For conversion of AC or DC line voltages to the operating voltages required for the internal electronics
- 25 or 60 W output power
- Can be used for S7-1500 or ET 200MP
- Engineering and configuration via STEP 7 V12 and higher (PS 60W 24/48/60V DC HF: from STEP 7 V14 SP1)
- In addition with PS 60W 24/48/60V DC HF: Retentive storage of CPU work memory (data) for all S7-1500 CPUs

Ordering data

System power supply	Article No.
SIMATIC S7-1500, system power supply PS 25 W 24 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0

Ordering data

Article No.

Accessories	Article No.
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0
SIMATIC S7-1500 spare part, connector For system power supply modules (PS) and load current supply modules (PM), 10 pieces per packing unit	6ES7590-8AA00-0AA0

SIMATIC S7-1500 Advanced Controllers

Power supplies

System power supplies

Technical specifications

Article number	6ES7505-0KA00-0AB0 S7-1500, PS 25W 24V DC	6ES7505-0RA00-0AB0 S7-1500, PS 60W 24/48/60V DC	6ES7505-0RB00-0AB0 S7-1500, PS 60W 24/48/60V DC HF	6ES7507-0RA00-0AB0 S7-1500, PS 60W 120/230V AC/DC
General information				
Product type designation	PS 25W 24VDC	PS 60 W 24/48/60 V DC	PS 60 W 24/48/60 V DC HF	PS 60 W 120/230 V AC/DC
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V12 / V12	V12 / V12	V14 SP1	V12 / V12
• STEP 7 configurable/ integrated from version	V5.5 SP3 or higher	V5.5 SP3 or higher		V5.5 SP3 or higher
Installation type/mounting				
Rail mounting		Yes		Yes
Supply voltage				
Rated value (DC)	24 V	24 V / 48 V / 60 V	24 V / 48 V / 60 V	120 V / 230 V
Rated value (AC)				120 V / 230 V
Reverse polarity protection	Yes	Yes	Yes	
Short-circuit protection	Yes	Yes	Yes	Yes
Line frequency				
• Rated value 50 Hz				Yes
• permissible range, lower limit				47 Hz
• permissible range, upper limit				63 Hz
Mains buffering				
• Mains/voltage failure stored energy time	20 ms	20 ms	20 ms	20 ms
Input current				
Rated value at 24 V DC	1.3 A	3 A	3 A	
Rated value at 48 V DC		1.5 A	1.5 A	
Rated value at 60 V DC		1.2 A	1.2 A	
Rated value at 120 V DC				0.6 A
Rated value at 230 V DC				0.3 A
Rated value at 120 V AC				0.6 A
Rated value at 230 V AC				0.34 A
Inrush current, max.			≤ 8 A for t ≤ 1 s	
Output current				
Short-circuit protection	Yes	Yes	Yes	Yes
Power				
Infeed power to the backplane bus	25 W	60 W	60 W	60 W
Power loss				
Power loss at nominal rating conditions	6.2 W	12 W	12 W	12 W
Interrupts/diagnostics/status information				
Status indicator	Yes	Yes	Yes	Yes
Potential separation				
primary/secondary	Yes	Yes; Electrical isolation for 230 V AC (reinforced isolation)		Yes
EMC				
Interference immunity against voltage surge				
• Interference immunity on supply lines acc. to IEC 61000-4-5	Yes; ±1 kV (acc. to IEC 61000-4-5; 1995; surge symm.), ±2 kV (acc. to IEC 61000-4-5; 1995; surge asymm.), no external protective circuit required	Yes; ±1 kV (acc. to IEC 61000-4-5; 1995; surge symm.), ±2 kV (acc. to IEC 61000-4-5; 1995; surge asymm.), no external protective circuit required	Yes; ±1 kV (acc. to IEC 61000-4-5; 1995; surge symm.), ±2 kV (acc. to IEC 61000-4-5; 1995; surge asymm.), no external protective circuit required	Yes; ±1 kV (acc. to IEC 61000-4-5; 1995; surge symm.), ±2 kV (acc. to IEC 61000-4-5; 1995; surge asymm.), no external protective circuit required

SIMATIC S7-1500 Advanced Controllers

Power supplies

System power supplies

Technical specifications

Article number	6ES7505-0KA00-0AB0 S7-1500, PS 25W 24V DC	6ES7505-0RA00-0AB0 S7-1500, PS 60W 24/48/60V DC	6ES7505-0RB00-0AB0 S7-1500, PS 60W 24/48/60V DC HF	6ES7507-0RA00-0AB0 S7-1500, PS 60W 120/230V AC/DC
Degree and class of protection				
Equipment protection class	III, with protective conductor	I, with protective conductor	I, with protective conductor	I, with protective conductor
Ambient conditions				
Ambient temperature during operation				
• min.	-25 °C; up to FS03: 0°C			
• max.	60 °C			
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual			
Dimensions				
Width	35 mm	70 mm	105 mm	70 mm
Height	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm
Weights				
Weight, approx.	350 g	600 g	865 g	600 g

SIMATIC S7-1500 Advanced Controllers

SIPLUS power supplies

1-phase, 24 V DC (for S7-1500 and ET 200MP)

Overview



The design and functionality of the SIMATIC PM 1507 single-phase load power supply (PM = power module) with automatic range selection of the input voltage makes it an optimal match to the SIMATIC S7-1500 PLC. It supplies the S7-1500 system components such as CPU, system power supply (PS), I/O circuits of the input and output modules and, if necessary, the sensors and actuators with 24 V DC.

Note:

SIPLUS extreme products are based on Siemens standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

4

Technical specifications

Article number	6AG1332-4BA00-7AA0	6AG1333-4BA00-7AA0
Based on	6EP1332-4BA00	6EP1333-4BA00
product brand name	SIPLUS S7-1500 PM1507	SIPLUS S7-1500 PM1507
type of current supply	24 V/3 A	24 V/8 A
ambient conditions		
ambient temperature		
• in horizontal mounting position during operation	-40 ... +70 °C; with natural convection	-40 ... +70 °C; with natural convection
• during transport	-40 ... +85 °C	-40 ... +85 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C
installation altitude at height above sea level maximum	6 000 m	6 000 m
ambient condition relating to ambient temperature - air pressure - installation altitude	In case of operation at altitudes of 2000 - 6000 m above sea level: Output power derating of -7.5 %/1000 m or reduction of the ambient temperature by 5 K/1000 m	In case of operation at altitudes of 2000 - 6000 m above sea level: Output power derating of -7.5 %/1000 m or reduction of the ambient temperature by 5 K/1000 m
relative humidity with condensation according to IEC 60068-2-38 maximum	100 %; RH incl. condensation/frost (no commissioning if condensation is present), horizontal installation	100 %; RH incl. condensation/frost (no commissioning if condensation is present), horizontal installation
chemical resistance to commercially available cooling lubricants	Yes; incl. diesel and oil droplets in the air	Yes; incl. diesel and oil droplets in the air
resistance to biologically active substances conformity according to EN 60721-3-3	Yes; Class 3B2 mold, fungal, sponge spores (except fauna); class 3B3 upon request	Yes; Class 3B2 mold, fungal, sponge spores (except fauna); class 3B3 upon request
resistance to chemically active substances conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (severity level 3)	Yes; Class 3C4 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (severity level 3)
resistance to mechanically active substances conformity according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust	Yes; Class 3S4 incl. sand, dust
resistance to biologically active substances conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal, sponge spores (except fauna)	Yes; Class 6B2 mold, fungal, sponge spores (except fauna)
resistance to chemically active substances conformity according to EN 60721-3-6	Yes; Class 6C3 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (severity level 3)	Yes; Class 6C3 (RH < 75%) incl. salt spray acc. to EN 60068-2-52 (severity level 3)
resistance to mechanically active substances conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust	Yes; Class 6S3 incl. sand, dust
coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability	Yes; Class 2 for high availability
type of coating protection against pollution according to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
type of test of the coating according to MIL-I-46058C	Yes; Discoloration of the coating during service life possible	Yes; Discoloration of the coating during service life possible
product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal Coating, Class A	Yes; Conformal Coating, Class A

SIMATIC S7-1500 Advanced Controllers

SIPLUS power supplies

1-phase, 24 V DC (for S7-1500 and ET 200MP)

Ordering data

Article No.

Article No.

SIPLUS S7-1500 PM 1507

(Extended temperature range and exposure to environmental substances)

Input 120/230 V AC, output 24 V DC, 3 A

Input 120/230 V AC, output 24 V DC, 8 A

6AG1332-4BA00-7AA0

6AG1333-4BA00-7AA0

Accessories

See SITOP in SIMATIC design, 1-phase, 24 V DC (for S7-1500 and ET 200MP), page 4/312

SIMATIC S7-1500 Advanced Controllers

SIPLUS power supplies

SIPLUS system power supplies

Overview



- System power supplies for the SIMATIC S7-1500
- For conversion of AC or DC line voltages to the operating voltages required for the internal electronics
- 25 or 60 W output power
- Can be used for S7-1500 or ET 200MP
- Engineering and configuration via STEP 7 V12

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS S7-1500 system power supply

(Extended temperature range and exposure to environmental substances)

For supplying the backplane bus of the S7-1500 Controller

24 V DC input voltage, power 25 W

6AG1505-0KA00-7AB0

24/48/60 V DC input voltage, power 60 W

6AG1505-0RA00-7AB0

120/230 V AC input voltage, power 60 W

6AG1507-0RA00-7AB0

Accessories

See SIMATIC S7-1500, system power supplies, page 4/316

4

Technical specifications

Article number	6AG1505-0KA00-7AB0	6AG1505-0RA00-7AB0	6AG1507-0RA00-7AB0
Based on	6ES7505-0KA00-0AB0 SIPLUS S7-1500 PS 25W 24V DC	6ES7505-0RA00-0AB0 SIPLUS S7-1500 PS 60W 24/48/60V DC	6ES7507-0RA00-0AB0 SIPLUS S7-1500 PS 60W 120/230V AC/DC
Ambient conditions			
Ambient temperature during operation			
• min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• max.	70 °C; = Tmax; for vertical mounting position Tmax = +40 °C	70 °C; = Tmax; > +60 °C max. power input 30 W; for vertical mounting position Tmax = +40 °C	70 °C; = Tmax; for vertical mounting position Tmax = +40 °C
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

SIMATIC S7-1500 Advanced Controllers

SIPLUS power supplies

SIPLUS system power supplies

Technical specifications

Article number	6AG1505-0KA00-7AB0	6AG1505-0RA00-7AB0	6AG1507-0RA00-7AB0
Based on	6ES7505-0KA00-0A00 SIPLUS S7-1500 PS 25W 24V DC	6ES7505-0RA00-0A00 SIPLUS S7-1500 PS 60W 24/48/60V DC	6ES7507-0RA00-0A00 SIPLUS S7-1500 PS 60W 120/230V AC/DC
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview**Basic Panels 2nd Generation**

With their fully developed HMI basic functions, SIMATIC HMI Basic Panels 2nd Generation are the ideal entry-level series for simple HMI applications.

The device family offers panels with 4", 7", 9" and 12" displays, as well as combined key and touch operation.

The innovative high-resolution widescreen displays with 64 000 colors are also suitable for upright installation, and they can be dimmed down to 100%. The innovative operator interface with improved usability opens up a diverse range of options thanks to new controls and graphics. The new USB interface enables the connection of keyboard, mouse or bar code scanner, and supports the simple archiving of data on a USB flash drive as well as the manual backup and restoring of the complete panel.

The integrated Ethernet or RS 485/422 interface (version-specific) enables simple connection to the controller.

More information is available at
<http://www.siemens.com/basic-panels>

Ordering data**Article No.**

Ordering data	Article No.
SIMATIC HMI Basic Panels (2nd Generation)	
Key and touch devices	
SIMATIC HMI KTP400 Basic Key/touch operation; 4" TFT widescreen display, 65 536 colors, PROFINET interface	6AV2123-2DB03-0AX0
SIMATIC HMI TP400 Basic Keyless Touch screen operation; 4" TFT widescreen display, 65 536 colors, PROFINET interface	6AV2143-6DB00-0AA0
SIMATIC HMI KTP700 Basic Key/touch operation; 7" TFT display, 65 536 colors, PROFINET interface	6AV2123-2GB03-0AX0
SIMATIC HMI KTP700 Basic DP Key/touch operation; 7" TFT display, 65 536 colors, PROFIBUS interface	6AV2123-2GA03-0AX0
SIMATIC HMI TP700 Basic Keyless Touch screen operation; 7" TFT display, 65 536 colors, PROFINET interface	6AV2143-6GB00-0AA0
SIMATIC HMI KTP900 Basic Key/touch operation; 9" TFT display, 65 536 colors, PROFINET interface	6AV2123-2JB03-0AX0
SIMATIC HMI TP900 Basic Keyless Touch screen operation; 9" TFT display, 65 536 colors, PROFINET interface	6AV2143-6JB00-0AA0
SIMATIC HMI KTP1200 Basic Key/touch operation; 12" TFT display, 65 536 colors, PROFINET interface	6AV2123-2MB03-0AX0
SIMATIC HMI KTP1200 Basic DP Key/touch operation; 12" TFT display, 65 536 colors, PROFIBUS interface	6AV2123-2MA03-0AX0
Documentation You can find the Equipment Manual for the Basic Panels on the Internet at:	https://support.automation.siemens.com
Accessories	See catalog ST 80 / ST PC or Sieportal

SIMATIC S7-1500 Advanced Controllers

Operator control and monitoring
Comfort Panels

SIMATIC HMI Unified Comfort Panels Standard

Overview



SIMATIC HMI MTP2200 Unified Comfort Panel Standard design front view

SIMATIC HMI Unified Comfort Panels - standard devices

SIMATIC HMI Unified Comfort Panels consist of six different devices with varying display sizes. All devices come with the same number of hardware interfaces and the same functionality – just select the perfect device for your needs based on the screen size.

Each Unified Comfort Panel is available in the standard design with Siemens and SIMATIC HMI branding and a silver-colored aluminum frame.

All Unified Comfort Panels come with integrated Edge functionality.

SIMATIC WinCC Unified contains visualization, communication, alarms/warnings, report creation, administration of parameter sets, archiving of user administration.

Furthermore, a WinCC Unified Client Operate (V17 or higher) for remote operator control and monitoring, and a WinCC Unified Client Monitor (V18 or higher) for monitoring only are also included. Additional clients can be enabled with a license. Up to three client licenses can be used.

Client access is based on native web technologies such as HTML5, SVG and JavaScript. The visualization can be accessed via any modern web browser – without the need for additional installation.

Siemens Industrial Edge can be used in two different ways:

- Device-managed Edge
- Centrally-managed Edge (planned)

SIMATIC HMI Unified Comfort Panels can also be ordered with a neutral design.

Note:

The technical specifications of the neutral design devices correspond to the technical specifications of the devices with standard design.

Ordering data

Article No.

Article No.

Touch devices for SIMATIC HMI Unified Comfort Panels

Standard design

SIMATIC HMI MTP700 Unified Comfort Panel

7" widescreen TFT display, touch operation, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source SW which is provided free of charge. See enclosed DVD

SIMATIC HMI MTP1000 Unified Comfort Panel

10.1" widescreen TFT display, touch operation, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source SW which is provided free of charge. See enclosed DVD

6AV2128-3GB06-0AX1

6AV2128-3KB06-0AX1

SIMATIC HMI MTP1200 Unified Comfort Panel

12.1" widescreen TFT display, touch operation, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source SW which is provided free of charge. See enclosed DVD

SIMATIC HMI MTP1500 Unified Comfort Panel

15.6" widescreen TFT display, touch operation, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source SW which is provided free of charge. See enclosed DVD

6AV2128-3MB06-0AX1

6AV2128-3QB06-0AX1

Ordering data	Article No.	Ordering data	Article No.
SIMATIC HMI MTP1900 Unified Comfort Panel 18.5" widescreen TFT display, touch operation, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source software, which is provided free of charge. See enclosed DVD	6AV2128-3UB06-0AX1	SIMATIC HMI MTP1200 Unified Comfort Panel Neutral, touch operation; 12.1" widescreen TFT display, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source software, which is provided free of charge. See enclosed DVD	6AV2128-3MB36-0AX1
SIMATIC HMI MTP2200 Unified Comfort Panel 21.5" widescreen TFT display, touch operation, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source software, which is provided free of charge. See enclosed DVD	6AV2128-3XB06-0AX1	SIMATIC HMI MTP1500 Unified Comfort Panel Neutral, touch operation; 15.6" widescreen TFT display, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source software, which is provided free of charge. See enclosed DVD	6AV2128-3QB36-0AX1
Neutral design		SIMATIC HMI MTP1900 Unified Comfort Panel Neutral, touch operation; 18.5" widescreen TFT display, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source software, which is provided free of charge. See enclosed DVD	6AV2128-3UB36-0AX1
SIMATIC HMI MTP700 Unified Comfort Panel Neutral, touch operation; 7" widescreen TFT display, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source software, which is provided free of charge. See enclosed DVD	6AV2128-3GB36-0AX1	SIMATIC HMI MTP2200 Unified Comfort Panel Neutral, touch operation; 21.5" widescreen TFT display, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source software, which is provided free of charge. See enclosed DVD	6AV2128-3XB36-0AX1
SIMATIC HMI MTP1000 Unified Comfort Panel Neutral, touch operation; 10.1" widescreen TFT display, 16 million colors, PROFINET interface, configurable as from WinCC Unified Comfort V16; with additional certifications for explosion-proof areas and for use in marine engineering (see Technical specifications). Contains open source software, which is provided free of charge. See enclosed DVD	6AV2128-3KB36-0AX1	Software	
		EDGE Runtime for SIMATIC Unified Comfort Runtime software, single license, license key for download, without software and documentation, Class A, email address required for delivery	6AV2170-2BA00-0AA0

SIMATIC S7-1500 Advanced Controllers

Operator control and monitoring
Comfort Panels

Comfort Panels standard devices

Overview



SIMATIC HMI Comfort Panels - Standard devices

- Excellent HMI functionality for demanding applications
- Widescreen TFT displays with 4", 7", 9", 12", 15", 19" and 22" diagonals (all 16 million colors) with up to 40% more visualization area as compared to the predecessor devices
- Integrated high-end functionality with archives, scripts, PDF/Word/Excel viewer, Internet Explorer, Media Player and Web Server
- Dimmable displays from 0 to 100% via PROFlenergy, via the HMI project or via a controller
- Modern industrial design, cast aluminum fronts for 7" upwards
- Upright installation for all touch devices
- Data security in the event of a power failure for the device and for the SIMATIC HMI Memory Card
- Innovative service and commissioning concept
- Maximum performance with short screen refresh times
- Suitable for extremely harsh industrial environments thanks to extended approvals such as ATEX 2/22 and marine approvals
- All versions can be used as an OPC UA client or as a server
- Key-operated devices with LED in every function key and new text input mechanism, similar to the keypads of mobile phones
- All keys have a service life of 2 million operations
- Configuring with the WinCC engineering software of the TIA Portal engineering framework

Note:

A 7" and a 15" Comfort Outdoor version are available. These devices have been specially designed for outdoor applications in difficult environments. Best display quality, even under sunlight, UV-resistant fronts and much more.

More information is available at
<http://www.siemens.com/comfort-panels>

Ordering data

Article No.

Ordering data	Article No.
SIMATIC HMI Comfort Panels	
Touch devices	
SIMATIC HMI TP700 Comfort Touch operation; 7" widescreen display	6AV2124-0GC01-0AX0
SIMATIC HMI TP900 Comfort Touch operation; 9" widescreen display	6AV2124-0JC01-0AX0
SIMATIC HMI TP1200 Comfort Touch operation; 12" widescreen display	6AV2124-0MC01-0AX0
SIMATIC HMI TP1500 Comfort Touch operation; 15" widescreen display	6AV2124-0QC02-0AX2
SIMATIC HMI TP1900 Comfort Touch operation; 19" widescreen display	6AV2124-0UC02-0AX1
SIMATIC HMI TP2200 Comfort Touch operation; 22" widescreen display	6AV2124-0XC02-0AX1
Key devices	
SIMATIC HMI KP700 Comfort Key operation; 7" widescreen display	6AV2124-1GC01-0AX0
SIMATIC HMI KP900 Comfort Key operation; 9" widescreen display	6AV2124-1JC01-0AX0
SIMATIC HMI KP1200 Comfort Key operation; 12" widescreen display	6AV2124-1MC01-0AX0
SIMATIC HMI KP1500 Comfort Key operation; 15" widescreen display	6AV2124-1QC02-0AX2
Accessories	See catalog ST 80 / ST PC or Sieportal

SIMATIC S7-1500 Advanced Controllers

SIPLUS Operator control and monitoring

SIPLUS Basic Panels (2nd Generation)

Overview



With their fully developed HMI basic functions, 2nd Generation SIPLUS Basic Panels are the ideal entry-level series for simple HMI applications.

The device family offers panels with 4", 7", 9" and 12" displays, as well as combined key and touch operation.

The innovative high-resolution widescreen displays with 64 000 colors are also suitable for upright installation, and they can be dimmed down to 100%. The innovative operator interface with improved usability opens up a diverse range of options thanks to new controls and graphics. The new USB interface enables the connection of keyboard, mouse or barcode scanner, and supports the simple archiving of data on a USB flash drive.

The integrated Ethernet or RS 485/422 interface (version-specific) enables simple connection to the controller.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS HMI Basic Panels, Key and Touch

SIPLUS HMI KTP400 Basic

6AG1123-2DB03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C

SIPLUS HMI KTP700 Basic

6AG1123-2GB03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C

SIPLUS HMI KTP700 Basic DP

6AG1123-2GA03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C

SIPLUS HMI KTP900 Basic

6AG1123-2JB03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C

SIPLUS HMI KTP1200 Basic

6AG1123-2MB03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -10 ... +50 °C

SIPLUS HMI KTP1200 Basic DP

6AG1123-2MA03-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -10 ... +50 °C

Accessories

See catalog ST 80 / ST PC or Sieportal

Technical specifications

Article number	6AG1123-2DB03-2AX0	6AG1123-2GB03-2AX0	6AG1123-2GA03-2AX0
Based on	6AV2123-2DB03-0AX0 SIPLUS HMI KTP400 BASIC	6AV2123-2GB03-0AX0 SIPLUS HMI KTP700 BASIC	6AV2123-2GA03-0AX0 SIPLUS HMI KTP700 BASIC DP
Ambient conditions			
Suited for indoor use		Yes	Yes
Suited for outdoor use		No	No
Ambient temperature during operation			
Operation (vertical installation)			
- For vertical installation, min.	-20 °C; = Tmin	-20 °C	-20 °C; = Tmin
- For vertical installation, max.	60 °C; = Tmax	50 °C	50 °C
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning when condensation present), vertical mounting position

SIMATIC S7-1500 Advanced Controllers

SIPLUS Operator control and monitoring

SIPLUS Basic Panels (2nd Generation)

Technical specifications

Article number	6AG1123-2DB03-2AX0	6AG1123-2GB03-2AX0	6AG1123-2GA03-2AX0
Based on	6AV2123-2DB03-0AX0 SIPLUS HMI KTP400 BASIC	6AV2123-2GB03-0AX0 SIPLUS HMI KTP700 BASIC	6AV2123-2GA03-0AX0 SIPLUS HMI KTP700 BASIC DP
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1123-2JB03-2AX0	6AG1123-2MB03-2AX0	6AG1123-2MA03-2AX0
Based on	6AV2123-2JB03-0AX0 SIPLUS HMI KTP900 BASIC	6AV2123-2MB03-0AX0 SIPLUS HMI KTP1200 BASIC	6AV2123-2MA03-0AX0 SIPLUS HMI KTP1200 BASIC DP
Ambient conditions			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
Ambient temperature during operation			
Operation (vertical installation)			
- For vertical installation, min.	-20 °C	-10 °C; = Tmin	-10 °C; = Tmin
- For vertical installation, max.	50 °C	50 °C	50 °C

Technical specifications


Article number	6AG1123-2JB03-2AX0	6AG1123-2MB03-2AX0	6AG1123-2MA03-2AX0
Based on	6AV2123-2JB03-0AX0	6AV2123-2MB03-0AX0	6AV2123-2MA03-0AX0
	SIPLUS HMI KTP900 BASIC	SIPLUS HMI KTP1200 BASIC	SIPLUS HMI KTP1200 BASIC DP
Altitude during operation relating to sea level			
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning when condensation present), vertical mounting position
Resistance			
Coolants and lubricants			
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

SIPLUS Operator control and monitoring

SIPLUS Basic Panels (1st Generation)

Overview

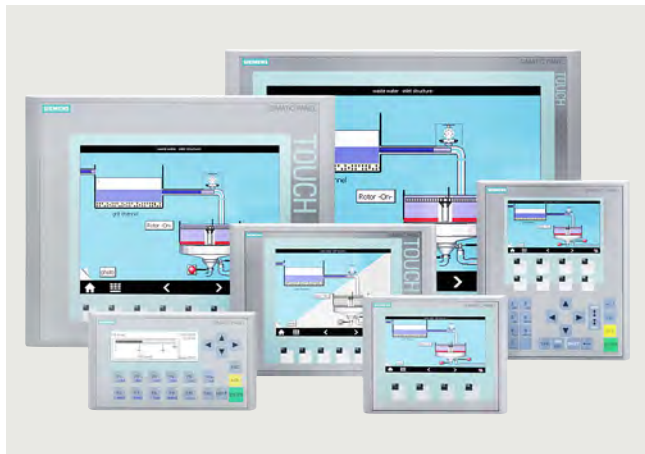

- Ideal entry-level series of 3.8" to 15" for operating and monitoring compact machines and systems
- Clear process representation through the use of full-graphic displays
- Intuitive operation via touch and tactile function keys
- Equipped with all the necessary basic functions such as reporting, recipe management, curve representation, vector graphics, and language selection
- Easy connection to the controller via integrated Ethernet interface or a separate version with RS485/422
- Faster commissioning thanks to integrated diagnostics viewer and IP setting for SIMATIC S7-1200 and S7-1500 PLCs

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS HMI Basic Panels

SIPLUS HMI KP300 Basic mono PN

with conformal coating, ambient temperature -25... +60°C, based on 6AV6647-0AH11-3AX1

Accessories

6AG1647-0AH11-2AX1

See catalog ST 80 / ST PC or Sieportal

Technical specifications

Article number	6AG1647-0AH11-2AX1
Based on	6AV6647-0AH11-3AX1 SIPLUS HMI KP300 Basic mono PN
Ambient conditions	
Suited for indoor use	Yes
Suited for outdoor use	No
Ambient temperature during operation	
Operation (vertical installation)	
- For vertical installation, min.	-25 °C; = Tmin
- For vertical installation, max.	60 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning when condensation present), horizontal at vertical mounting position

Article number	6AG1647-0AH11-2AX1
Based on	6AV6647-0AH11-3AX1 SIPLUS HMI KP300 Basic mono PN
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *

SIMATIC S7-1500 Advanced Controllers

SIPLUS Operator control and monitoring

SIPLUS Basic Panels (1st Generation)

Technical specifications

Article number	6AG1647-0AH11-2AX1	Article number	6AG1647-0AH11-2AX1
Based on	6AV6647-0AH11-3AX1 SIPLUS HMI KP300 Basic mono PN	Based on	6AV6647-0AH11-3AX1 SIPLUS HMI KP300 Basic mono PN
Usage in industrial process technology	<p>Yes; Class 3 (excluding trichlorethylene)</p> <p>Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)</p>	Conformal coating	<p>Yes; Class 2 for high reliability</p> <p>Yes; Type 1 protection</p> <p>Yes; Discoloration of coating possible during service life</p> <p>Yes; Conformal coating, Class A</p>
Remark	<p>* The supplied plug covers must remain in place over the unused interfaces during operation!</p>	<ul style="list-style-type: none"> • Coatings for printed circuit board assemblies acc. to EN 61086 • Protection against fouling acc. to EN 60664-3 • Military testing according to MIL-I-46058C, Amendment 7 • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	
<p>- Against chemically active substances acc. to EN 60654-4</p> <p>- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04</p>			

SIMATIC S7-1500 Advanced Controllers

SIPLUS Operator control and monitoring

SIPLUS HMI Unified Comfort Panels Standard

Overview



SIPLUS HMI Unified Comfort Panels - standard devices

SIPLUS HMI Unified Comfort Panels consist of six different devices with varying display sizes. All devices come with the same number of hardware interfaces and the same functionality – just select the perfect device for your needs based on the screen size.

Each Unified Comfort Panel is available in the standard design with Siemens and SIMATIC HMI branding and a silver-colored aluminum frame.

All Unified Comfort Panels come with integrated Edge functionality.

SIMATIC WinCC Unified contains visualization, communication, alarms/warnings, report creation, administration of parameter sets, archiving of user administration. Furthermore, a WinCC Unified Client Operate (V17 or higher) for remote operator control and monitoring, and a WinCC Unified Client Monitor (V18 or higher) for monitoring only are also included. Additional clients can be enabled with a license. Up to three client licenses can be used.

Client access is based on native web technologies such as HTML5, SVG and JavaScript. The visualization can be accessed via any modern web browser – without the need for additional installation.

Siemens Industrial Edge can be used in two different ways:

- Device-managed Edge
- Centrally-managed Edge (planned)

SIMATIC HMI Unified Comfort Panels can also be ordered with a neutral design.

Note:

The technical specifications of the neutral design devices correspond to the technical specifications of the devices with standard design.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

SIPLUS HMI Unified Comfort Panels

Standard design

SIPLUS HMI MTP700 Unified Comfort, with conformal coating

6AG1128-3GB06-4AX1

SIMATIC HMI MTP1000 Unified Comfort Panel, with conformal coating

6AG1128-3KB06-4AX1

SIMATIC HMI MTP1200 Unified Comfort Panel, with conformal coating

6AG1128-3MB06-4AX1

Accessories

EDGE Runtime for SIMATIC Unified Comfort

6AV2170-2BA00-0AA0

Runtime software, single license, license key for download, without software and documentation, Class A, email address required for delivery

Accessories

See catalog ST 80 / ST PC or Sieportal

Technical specifications

Article number	6AG1128-3GB06-4AX1	6AG1128-3KB06-4AX1	6AG1128-3MB06-4AX1
Based on	6AV2128-3GB06-0AX1	6AV2128-3KB06-0AX1	6AV2128-3MB06-0AX1
	SIPLUS HMI MTP700 Unified Comfort	SIPLUS HMI MTP1000 Unified Comfort	SIPLUS HMI MTP1200 Unified Comfort
Ambient conditions			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
Ambient temperature during operation			
Operation (vertical installation)			
- For vertical installation, min.	0 °C; = Tmin	0 °C; = Tmin	0 °C; = Tmin
- For vertical installation, max.	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax

Technical specifications

Article number	6AG1128-3GB06-4AX1	6AG1128-3KB06-4AX1	6AG1128-3MB06-4AX1
Based on	6AV2128-3GB06-0AX1	6AV2128-3KB06-0AX1	6AV2128-3MB06-0AX1
	SIPLUS HMI MTP700 Unified Comfort	SIPLUS HMI MTP1000 Unified Comfort	SIPLUS HMI MTP1200 Unified Comfort
Altitude during operation relating to sea level			
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning when condensation present), horizontal at vertical mounting position	100 %; RH incl. condensation/frost (no commissioning when condensation present), horizontal at vertical mounting position	100 %; RH incl. condensation/frost (no commissioning when condensation present), horizontal at vertical mounting position
Resistance			
Coolants and lubricants			
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna) Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna) Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna) Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

SIMATIC S7-1500 Advanced Controllers

SIPLUS Operator control and monitoring

SIPLUS Comfort Panels Standard

Overview



- Excellent HMI functionality for demanding applications
- Widescreen TFT displays with 4", 7", 9", 12", 15", 19" and 22" diagonals (all 16 million colors) with up to 40% more visualization area as compared to the predecessor devices
- Integrated high-end functionality with archives, scripts, PDF/Word/Excel viewer, Internet Explorer, Media Player
- Dimmable displays from 0 to 100% via PROFIenergy, via the HMI project or via a controller
- Modern industrial design, cast aluminum fronts for 7" upwards
- Upright installation for all touch devices
- Optimal selection option: seven touch and five key versions are available

- Data security in the event of a power failure for the device and for the SIMATIC HMI Memory Card
- Innovative service and commissioning concept through second SD card (automatic backup)
- Easy project transfer via standard cable (standard Ethernet cable, standard USB cable)
- Maximum performance with short screen refresh times
- Suitable for extremely harsh industrial environments thanks to extended approvals such as ATEX 2/22
- Wide range of communication options: PROFIBUS and PROFINET onboard; 2x PROFINET with integrated switch for 7" models or larger; plus 1 additional PROFINET with Gigabit support for 15" models or larger
- All variants can be used as an OPC UA client or as an OPC DA server
- Key-operated devices with LED in every function key and new text input mechanism, similar to the keypads of mobile phones
- Key-operated devices with stamped keys for optimum tactile feedback
- All keys have a service life of 2 million operations
- Configuring with the WinCC engineering software of the TIA Portal

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS HMI Comfort Panels, Touch	Article No.
SIPLUS HMI TP700 Comfort	6AG1124-0GC01-4AX0
SIPLUS HMI TP900 Comfort	6AG1124-0JC01-4AX0
SIPLUS HMI TP1200 Comfort	6AG1124-0MC01-4AX0
SIPLUS HMI TP1500 Comfort	6AG1124-0QC02-4AX1
SIPLUS HMI TP1900 Comfort	6AG1124-0UC02-4AX1
SIPLUS HMI TP2200 Comfort	6AG1124-0XC02-4AX1

Article No.

SIPLUS HMI Comfort Panels, Keys	Article No.
SIPLUS HMI KP700 Comfort	6AG1124-1GC01-4AX0
SIPLUS HMI KP900 Comfort	6AG1124-1JC01-4AX0
SIPLUS HMI KP1200 Comfort	6AG1124-1MC01-4AX0
SIPLUS HMI KP1500 Comfort	6AG1124-1QC02-4AX1
Accessories	See catalog ST 80 / ST PC or Sieportal

Technical specifications

Article number	6AG1124-0GC01-4AX0	6AG1124-0JC01-4AX0	6AG1124-0MC01-4AX0
Based on	6AV2124-0GC01-0AX0	6AV2124-0JC01-0AX0	6AV2124-0MC01-0AX0
	SIPLUS HMI TP700 COMFORT	SIPLUS HMI TP900 COMFORT	SIPLUS HMI TP1200 COMFORT
Ambient conditions			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
Ambient temperature during operation			
Operation (vertical installation)			
- For vertical installation, min.	0 °C; = Tmin	0 °C; = Tmin	0 °C; = Tmin
- For vertical installation, max.	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)

SIMATIC S7-1500 Advanced Controllers

SIPLUS Operator control and monitoring

SIPLUS Comfort Panels Standard

Technical specifications

Article number	6AG1124-0GC01-4AX0	6AG1124-0JC01-4AX0	6AG1124-0MC01-4AX0
Based on	6AV2124-0GC01-0AX0 SIPLUS HMI TP700 COMFORT	6AV2124-0JC01-0AX0 SIPLUS HMI TP900 COMFORT	6AV2124-0MC01-0AX0 SIPLUS HMI TP1200 COMFORT
Remark	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1124-0QC02-4AX1	6AG1124-0UC02-4AX1	6AG1124-0XC02-4AX1
Based on	6AV2124-0QC02-0AX1 SIPLUS HMI TP1500 Comfort	6AV2124-0UC02-0AX1 SIPLUS HMI TP1900 Comfort	6AV2124-0XC02-0AX1 SIPLUS HMI TP2200 Comfort
Ambient conditions			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
Ambient temperature during operation			
Operation (vertical installation)			
- For vertical installation, min.	0 °C	0 °C; = Tmin	0 °C; = Tmin
- For vertical installation, max.	50 °C; (55 °C, see entry ID: 64847814)	45 °C; = Tmax	45 °C; = Tmax
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

Technical specifications

Article number	6AG1124-0QC02-4AX1	6AG1124-0UC02-4AX1	6AG1124-0XC02-4AX1	
Based on	6AV2124-0QC02-0AX1 SIPLUS HMI TP1500 Comfort	6AV2124-0UC02-0AX1 SIPLUS HMI TP1900 Comfort	6AV2124-0XC02-0AX1 SIPLUS HMI TP2200 Comfort	
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	
Article number	6AG1124-1GC01-4AX0	6AG1124-1JC01-4AX0	6AG1124-1MC01-4AX0	6AG1124-1QC02-4AX1
Based on	6AV2124-1GC01-0AX0 SIPLUS HMI KP700 Comfort	6AV2124-1JC01-0AX0 SIPLUS HMI KP900 Comfort	6AV2124-1MC01-0AX0 SIPLUS HMI KP1200 Comfort	6AV2124-1QC02-0AX1 SIPLUS HMI KP1500 Comfort
Ambient conditions				
Suited for indoor use	Yes	Yes	Yes	Yes
Suited for outdoor use	No	No	No	No
Ambient temperature during operation				
Operation (vertical installation)				
- For vertical installation, min.	0 °C; = Tmin	0 °C; = Tmin	0 °C; = Tmin	0 °C
- For vertical installation, max.	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax	50 °C; (55 °C, see entry ID: 64847814)
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

SIMATIC S7-1500 Advanced Controllers

SIPLUS Operator control and monitoring

SIPLUS Comfort Panels Standard

Technical specifications

Article number	6AG1124-1GC01-4AX0	6AG1124-1JC01-4AX0	6AG1124-1MC01-4AX0	6AG1124-1QC02-4AX1
Based on	6AV2124-1GC01-0AX0 SIPLUS HMI KP700 Comfort	6AV2124-1JC01-0AX0 SIPLUS HMI KP900 Comfort	6AV2124-1MC01-0AX0 SIPLUS HMI KP1200 Comfort	6AV2124-1QC02-0AX1 SIPLUS HMI KP1500 Comfort
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview



- Aluminum DIN rail for mounting the SIMATIC S7-1500 or ET 200MP
- With integrated top hat DIN rail for snapping on a wide range of standard components
- Attachment of modules with a single screw
- Installation by screwing to the control cabinet wall
- Entire length of rail can be used
- Can also be mounted on low or flat top hat DIN rails, e.g. in control cabinets and terminals boxes, using top hat DIN rail adapter

Ordering data

Article No.


Ordering data	Article No.
SIMATIC S7-1500 mounting rail	
SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches) Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0
SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0
SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0
SIMATIC S7-1500, DIN rail adapter For adapting S7-1500 mounting rails on low or flat DIN rails, as preassembled in control cabinets and terminal boxes, for example. An adapter must be placed every 25 cm. Including mounting hardware. 10 units per packing unit	6ES7590-6AA00-0AA0
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

SIMATIC S7-1500 Advanced Controllers

Accessories

Labeling sheets

Overview

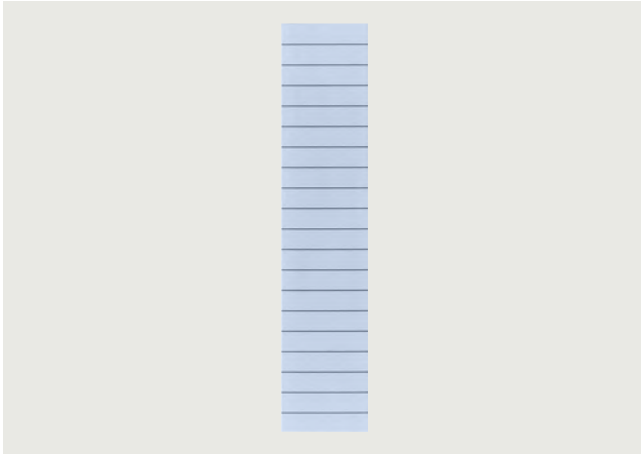

- Film sheets for the application-specific, automatic labeling of SIMATIC S7-1500 I/O modules using standard laser printers
- Direct printing possible from the TIA Portal
 - No double entry of symbols and/or addresses
 - Saves time and avoids typing errors
- Plain color films, tear-resistant, dirt-repellent
- Simple handling:
 - Perforated labeling sheets in DIN A4 format for easy separation of the labeling strips.
 - Detached strips can be inserted directly into the I/O modules.
- Different colors to differentiate module types; yellow reserved for fail-safe systems

Ordering data

Article No.

DIN A4 labeling sheet

SIMATIC S7-1500, labeling sheets for 35 mm wide S7-1500 modules

Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 10 strips per packing unit sufficient for 100 modules

6ES7592-2AX00-0AA0

SIMATIC S7-1500, labeling sheets for 25 mm wide S7-1500 modules and compact CPUs

Color: AL gray; material: film, perforated; suitable for printing with commercially available laser printers; 10 sheets of 20 strips per packing unit sufficient for 200 modules

6ES7592-1AX00-0AA0

SIMATIC Manual Collection on DVD, 5 languages

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

Overview**Front doors**

- Versions:
 - Universal front doors for digital and analog I/O modules
 - Universal front doors for the interface module IM155-5 PN ST
- Included in the scope of supply of the respective modules. Can be ordered as a spare part in a set consisting of five universal (unlabeled) front doors.
- Front doors for I/O modules: Universal labeling sheets and cabling diagrams are included. Cabling diagrams can be detached from perforated sheets and inserted inside the door.

U connector

- To interconnect the modules (self-assembling backplane bus)
- Implementation of a rugged, interference-free station setup through
 - Consistent separation of supply voltage of modules and data signals
 - Fully shielded, gold-plated contacts for the data bus
- Included in the scope of supply of each module. Available as spare part in sets of 5.

Shielding

- Components for implementing the integrated S7-1500 shielding concept:
 - 24 V DC infeed element for supplying the analog module: strict separation of infeed and analog signals ensures high EMC stability.
 - Shield bracket for insertion in the front connector: allows a low-impedance connection and optimally dissipates interference.
 - Universal shield terminal: connects the cable shield with the shield bracket and is simultaneously used for mechanical fixing.
- Included in the scope of supply of the analog modules. Available as a spare part in two versions:
 - Shielding set, comprising infeed element, shield bracket, and shield terminal (pack of 5 units each)
 - Individual shield terminals (pack of 20)
- No tool required for assembly/disassembly

SIMATIC S7-1500 Advanced Controllers

Accessories

Spare parts

Ordering data	Article No.	Ordering data	Article No.
SIMATIC ET 200MP, spare part front door For IM 155-5 (6ES7155-5AA00-0AB0) 5 units per packing unit	6ES7528-0AA70-7AA0	SIMATIC S7-1500, spare part, shielding set Consisting of: * 4x shield terminal, * 4x shielding bracket, * 4x 24 V DC infeed element with push-in technology, suitable for analog modules, technology modules and compact CPU of the S7-1500, suitable for all front connectors for 25 mm wide modules	6ES7590-5CA10-0XA0
Universal front door for I/O modules			
SIMATIC S7-1500, spare part front door for 35 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram 5 units per packing unit	6ES7528-0AA00-7AA0	SIMATIC S7-1500, spare part shield terminal Suitable for analog modules and technology modules with 35 mm width without shielding bracket and without 24 V DC infeed element 10 units per packing unit	6ES7590-5BA00-0AA0
SIMATIC S7-1500, spare part front door for 25 mm wide I/O modules Consisting of: * front door (unlasered), * labeling strips (front) * cabling diagram 5 units per packing unit	6ES7528-0AA00-0AA0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC S7-1500, spare part U-type connector for connecting I/O modules Self-assembling backplane bus 5 units per packing unit	6ES7590-0AA00-0AA0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
Shielding set I/O			
SIMATIC S7-1500, spare part, shielding set Consisting of: * shield terminal, * shielding bracket, * 24 V DC infeed element with screw-type connection system, suitable for analog and technology modules of the S7-1500, suitable for all front connectors for 35 mm wide modules 5 units per packing unit	6ES7590-5CA00-0AA0		

SIMATIC S7-300 Advanced Controllers



5/3	Introduction	5/122	<u>SIPLUS S7-300 digital modules</u>
5/3	S7-300	5/122	SIPLUS S7-300 SM 321
5/5	Central processing units	5/126	SIPLUS S7-300 SM 322
5/5	<u>Standard CPUs</u>	5/131	SIPLUS S7-300 SM 323
5/5	CPU 312	5/133	<u>Analog modules</u>
5/7	CPU 314	5/133	SM 331 analog input modules
5/9	CPU 315-2 DP	5/142	SM 332 analog output modules
5/11	CPU 315-2 PN/DP	5/145	SM 334 analog input/output modules
5/13	CPU 317-2 DP	5/149	<u>SIPLUS S7-300 analog modules</u>
5/15	CPU 317-2 PN/DP	5/149	SIPLUS S7-300 SM 331
5/17	CPU 319-3 PN/DP	5/153	SIPLUS S7-300 SM 332
5/19	Technical specifications	5/156	SIPLUS S7-300 SM 334
5/24	<u>SIPLUS S7-300 standard CPUs</u>	5/158	<u>F-digital/analog modules</u>
5/24	SIPLUS S7-300 CPU 314	5/158	SM 326 F-digital input modules - Safety Integrated
5/25	SIPLUS S7-300 CPU 315-2 DP	5/162	SM 326 F-digital output modules - Safety Integrated
5/26	SIPLUS S7-300 CPU 315-2 PN/DP	5/165	SM 336 F-analog input modules - Safety Integrated
5/28	SIPLUS S7-300 CPU 317-2 PN/DP	5/168	Safety protector
5/30	Technical specifications	5/169	<u>SIPLUS S7-300 F-digital/analog modules</u>
5/32	<u>Compact CPUs</u>	5/169	SIPLUS SM 326 F-digital input module - Safety Integrated
5/32	CPU 312C	5/172	SIPLUS SM 326 F-digital output module - Safety Integrated
5/34	CPU 313C	5/175	SIPLUS SM 336 F-analog input module - Safety Integrated
5/36	CPU 313C-2 PtP	5/177	SIPLUS S7-300 safety protector
5/38	CPU 313C-2 DP	5/178	<u>Ex digital modules</u>
5/40	CPU 314C-2 PtP	5/178	Ex digital input modules
5/42	CPU 314C-2 DP	5/180	Ex digital output modules
5/44	CPU 314C-2 PN/DP	5/182	<u>SIPLUS S7-300 Ex digital modules</u>
5/47	Technical specifications	5/182	SIPLUS S7-300 Ex digital input modules
5/53	<u>SIPLUS S7-300 compact CPUs</u>	5/184	<u>Ex analog modules</u>
5/53	SIPLUS S7-300 CPU 312C	5/184	Ex analog input modules
5/55	SIPLUS S7-300 CPU 313C	5/187	Ex analog output modules
5/57	SIPLUS S7-300 CPU 313C-2 DP	5/189	<u>SIPLUS S7-300 Ex analog modules</u>
5/59	SIPLUS S7-300 CPU 314C-2 PtP	5/189	SIPLUS S7-300 Ex analog input modules
5/61	SIPLUS S7-300 CPU 314C-2 DP	5/191	<u>Function modules</u>
5/63	SIPLUS S7-300 CPU 314C-2 PN/DP	5/191	FM 350-1 counter module
5/65	Technical specifications	5/193	FM 350-2 counter module
5/68	<u>Fail-safe CPUs</u>	5/195	FM 351 positioning module
5/68	CPU 315F-2 DP	5/198	FM 352 cam controllers
5/71	CPU 315F-2 PN/DP	5/201	FM 352-5 high-speed Boolean processor
5/74	CPU 317F-2 DP	5/205	FM 355 controller module
5/77	CPU 317F-2 PN/DP	5/209	FM 355-2 temperature controller module
5/80	CPU 319F-3 PN/DP	5/213	SM 338 POS input module
5/83	Technical specifications	5/215	SIWAREX U weighing electronics
5/86	<u>SIPLUS S7-300 fail-safe CPUs</u>	5/218	SIWAREX FTA weighing electronics
5/86	SIPLUS S7-300 CPU 315F-2 DP	5/221	SIWAREX FTC weighing electronics
5/88	SIPLUS S7-300 CPU 315F-2 PN/DP	5/224	<u>SIPLUS S7-300 function modules</u>
5/90	SIPLUS S7-300 CPU 317F-2 DP	5/224	SIPLUS S7-300 FM 350-1
5/92	SIPLUS S7-300 CPU 317F-2 PN/DP	5/226	SIPLUS S7-300 FM 350-2
5/94	Technical specifications	5/228	SIPLUS SIWAREX U
5/96	<u>Technology CPUs</u>	5/230	SIPLUS SIWAREX FTA
5/96	CPU 315T-3 PN/DP		
5/99	CPU 317T-3 PN/DP		
5/102	CPU 317TF-3 PN/DP		
5/105	Technical specifications		
5/108	I/O modules		
5/108	<u>Digital modules</u>		
5/108	SM 321 digital input modules		
5/113	SM 322 digital output modules		
5/119	SM 323/SM 327 digital input/output modules		

SIMATIC S7-300 Advanced Controllers



5/232	<u>Communication</u>
5/232	CP 340
5/234	CP 341
5/237	Loadable drivers for CP 441-2 and CP 341
5/239	CP 343-2P/CP 343-2
5/241	CP 342-5
5/243	CP 343-5
5/245	CP 343-1 Lean
5/248	CP 343-1
5/251	CP 343-1 Advanced
5/256	CSM 377 unmanaged
5/258	TIM 3V-IE (for S7-300)
5/261	TIM 3V-IE Advanced (for S7-300)
5/264	TIM 4R-IE (for S7-300/-400/PC)
5/267	TIM 3V-IE DNP3 (for S7-300)
5/269	TIM 4R-IE DNP3 (for S7-300/-400)
5/272	ASM 475
5/274	<u>SIPLUS S7-300 communication</u>
5/274	SIPLUS S7-300 CP 340
5/276	SIPLUS S7-300 CP 341
5/278	SIPLUS CP 342-5
5/279	SIPLUS S7-300 CP 343-1 Lean
5/281	SIPLUS S7-300 CP 343-1
5/283	SIPLUS S7-300 CP 343-1 Advanced
5/286	SIPLUS TIM 3V-IE for WAN and Ethernet
5/288	SIPLUS TIM 4R-IE for WAN and Ethernet
5/290	SIPLUS TIM 3V-IE DNP3
5/292	SIPLUS TIM 4R-IE DNP3

5/294	<u>Special modules</u>
5/294	SM 374 simulator
5/295	DM 370 dummy module
5/296	<u>SIPLUS S7-300 special modules</u>
5/296	SIPLUS S7-300 DM 370
5/297	<u>Connection system</u>
5/297	Front connectors
5/298	System cabling for SIMATIC S7-300 and ET 200M
5/299	- Fully modular connection
5/303	- Front connector with single wires
5/304	- Front connectors with crimp connections
5/305	Power supplies
5/305	1-phase, 24 V DC (for S7-300 and ET 200M)
5/310	SIPLUS power supplies
5/310	1-phase, 24 V DC (for S7-300 and ET200M)
5/312	Interface modules
5/312	IM 360/361/365 interface modules
5/313	SIPLUS interface modules
5/313	SIPLUS S7-300 IM 365
5/314	Accessories
5/314	Mounting rail
5/314	Labeling sheets

Overview



S7-300

- The modular mini PLC system for the low and mid-performance ranges
- With comprehensive range of modules for optimum adaptation to the automation task
- Flexible use through simple implementation of distributed structures and versatile networking
- User-friendly handling and uncomplicated design without a fan
- Can be expanded without problems when the tasks increase
- High performance thanks to a range of integrated functions

S7-300F

- Fail-safe automation system for plants with increased safety requirements for production technology
- Based on S7-300
- Additional ET 200S and ET 200M distributed I/O devices complete with safety-related modules can be connected
- Safety-related communication via PROFIBUS DP with PROFIsafe profile
- Standard modules can be used in addition for non-safety-oriented applications

Availability

As part of our established product portfolio, the SIMATIC S7-300/ET 200M system families will generally be available until 2023. Following the product phase-out declaration, products will be available as spare parts for another ten years.

Technical specifications

General technical specifications SIMATIC S7-300	
Degree of protection	IP20 according to IEC 60 529
Ambient temperature	<ul style="list-style-type: none"> • For horizontal installation 0 to 60 °C • For vertical installation 0 to 40 °C
Relative humidity	10 to 95%, non-condensing, corresponds to relative humidity (RH), stress level 2 acc. to IEC 61131, Part 2
Air pressure	From 1080 to 795 hPa (corresponds to an altitude of -1000 to +2000 m)
Insulation	<ul style="list-style-type: none"> • < 50 V 500 V DC test voltage • < 150 V 2500 V DC test voltage • < 250 V 4000 V DC test voltage
Electromagnetic compatibility	Requirements of the EMC directive; interference immunity according to IEC 61000-6-2 <ul style="list-style-type: none"> • Pulse-shaped disturbance variables Test according to: Electrostatic discharge according to IEC 61000-4-2, burst pulses according to IEC 61000-4-4, energy single pulse (surge) according to IEC 61000-4-5, • Sinusoidal disturbance variables Test according to: HF irradiation according to IEC 61000-4-3, HF decoupling according to IEC 61000-4-6 • Emission of radio interference Interference emission according to EN 50081-2 Test according to: Emitted interference of electromagnetic fields according to EN 55016: Limit value class A, (measured at a distance of 10 m) Interference emission via AC mains according to EN 55011: Limit value class A, Group 1
Mechanical strength	<ul style="list-style-type: none"> • Vibrations Frequency range $10 \text{ Hz} \leq f \leq 58 \text{ Hz}$ <ul style="list-style-type: none"> • Continuous: 0.0375 mm amplitude • Occasionally 0.75 mm amplitude Frequency range $58 \text{ Hz} \leq f \leq 150 \text{ Hz}$ <ul style="list-style-type: none"> • Continuous: 0.5 g constant acceleration • Occasionally 1 g constant acceleration Testing according to IEC 60068-2-6 Tested with: $5 \text{ Hz} \leq f \leq 9 \text{ Hz}$, constant amplitude 3.5 mm; $9 \text{ Hz} \leq f \leq 150 \text{ Hz}$, constant acceleration 1 g; Duration of oscillation: 10 frequency passes per axis in each direction of the 3 mutually perpendicular axes Testing according to IEC 60068-2-27 Tested with: Half-sine wave: strength of shock 15 g peak value, 11 ms duration; Shock direction: 3 shocks each in \pm direction in each of the 3 mutually vertical axes
• Shock	

SIMATIC S7-300 Advanced Controllers

Introduction

S7-300

Technical specifications

General technical specifications SIPLUS S7-300

Ambient temperature range	-40/-25 ... +60/70 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical data	The technical data of the standard product applies except for the environmental conditions.

Ambient conditions

Extended range of environmental conditions	
<ul style="list-style-type: none"> with reference to ambient temperature, air pressure and altitude 	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m)
<ul style="list-style-type: none"> At cold restart, min. 	0° C
Relative humidity	
<ul style="list-style-type: none"> with condensation, max. 	100 %; RH incl. bedewing/frost (no commissioning in bedewed state)
Resistance	
<ul style="list-style-type: none"> to biologically active substances/compliance with EN 60721-3-3 	Yes; Class 3B2 mold and fungal spores (except fauna); the supplied plug covers must remain in place on the unused interfaces during operation.
<ul style="list-style-type: none"> to chemically active substances/compliance with EN 60721-3-3 	Yes; Class 3C4 (RH < 75%) incl. salt spray in accordance with EN 60068-2-52 (severity 3); the supplied plug covers must remain in place on the unused interfaces during operation.
<ul style="list-style-type: none"> to mechanically active substances, compliance with EN 60721-3-3 	Yes; Class 3S4 incl. sand, dust; the supplied plug covers must remain in place on unused interfaces during operation.

Overview

- The entry level CPU in Totally Integrated Automation (TIA)
- For smaller applications with moderate processing performance requirements

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data**Article No.**

SIMATIC S7-300, CPU 312 **6ES7312-1AE14-0AB0**

Central processing unit with MPI, integrated 24 V DC power supply, 32 KB work memory, Micro Memory Card required

Accessories**SIMATIC Micro Memory Card**

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LF31-0AA0**

3.3 V Nflash, 64 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LG31-0AA0**

3.3 V Nflash, 128 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LJ31-0AA0**

3.3 V Nflash, 512 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LL31-0AA0**

3.3 V Nflash, 2 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LM32-0AA0**

3.3 V Nflash, 4 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LP31-0AA0**

3.3 V Nflash, 8 MB

SIMATIC S7, MPI cable **6ES7901-0BF00-0AA0**

For linking SIMATIC S7 and PG via MPI 5 m

SIMATIC S7-300/ET 200M, slot label. **6ES7912-0AA00-0AA0**

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part
P. unit = 1

SIMATIC Manual Collection on DVD, 5 languages **6ES7998-8XC01-8YE0**

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages **6ES7998-8XC01-8YE2**

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

SIMATIC S7-300, spare part connector for 24 V **6ES7391-1AA00-0AA0**

supply for S7-300 CPUs and FM352-5 10 units per packing unit

PC adapter USB A2 USB adapter (USB V2.0) **6GK1571-0BA00-0AA0**

For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.

SIMATIC S7-300 Advanced Controllers

Central processing units
Standard CPUs

CPU 312**Ordering data****Article No.****Article No.****PROFIBUS DP RS 485 bus connector****SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet**

15.8 x 64 x 35.6 mm (WxHxD),
terminating resistor
with isolating function
without PG socket

6ES7972-0BA12-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

15.8 x 59 x 35.6 mm (WxHxD),
FastConnect insulation
displacement method,
with PG socket
100 units 6ES7972-0BB52-0XA0
per packing unit

6ES7972-0BB52-0XB0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

15.8 x 64 x 35.6 mm (WxHxD),
terminating resistor
with isolating function
with PG socket

6ES7972-0BB12-0XA0

PROFIBUS bus connector with axial cable outlet for industrial PC

SIMATIC OP, OLM; transfer rate
12 Mbps; terminating resistor with
isolating function, metal enclosure.

6GK1500-0EA02

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

FastConnect insulation
displacement method,
without PG socket
15.8 x 59 x 35.6 mm (WxHxD)

6ES7972-0BA52-0XA0

PROFIBUS FC standard cable GP

2-core bus cable, shielded, special
design for fast installation, delivery
unit: max. 1000 m, minimum order
quantity 20 m, sold by the meter.

6XV1830-0EH10

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet, 15.8 x 59 x 35.6 mm (WxHxD)

FastConnect insulation
displacement method,
without PG socket 100 units
6ES7972-0BA52-0XA0
per packing unit

6ES7972-0BA52-0XB0

SIMATIC DP, RS-485 repeater for connecting PROFIBUS/MPI

bus systems with max. 31 nodes
max. 12 Mbps baud rate, degree of
protection IP20 improved user
handling

6ES7972-0AA02-0XA0

PROFIBUS bus components

For establishing
MPI/PROFIBUS communication

See SiePortal

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

FastConnect insulation
displacement method,
with PG socket
15.8 x 59 x 35.6 mm (WxHxD)

6ES7972-0BB52-0XA0

5

Overview

- For plants with medium program scope requirements
 - High processing power in binary and floating-point arithmetic
- SIMATIC Micro Memory Card required for operation of CPU.

Ordering data**Article No.****SIMATIC S7-300, CPU 314** **6ES7314-1AG14-0AB0**

Central processing unit with MPI, integrated 24 V DC power supply, work memory 128 KB, Micro Memory Card required

Accessories**SIMATIC Micro Memory Card****SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200** **6ES7953-8LF31-0AA0**

3.3 V Nflash, 64 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LG31-0AA0**

3.3 V Nflash, 128 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LJ31-0AA0**

3.3 V Nflash, 512 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LL31-0AA0**

3.3 V Nflash, 2 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LM32-0AA0**

3.3 V Nflash, 4 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LP31-0AA0**

3.3 V Nflash, 8 MB

SIMATIC S7, MPI cable **6ES7901-0BF00-0AA0**

For linking SIMATIC S7 and PG via MPI 5 m

SIMATIC S7-300/ET 200M, **6ES7912-0AA00-0AA0**

Slot label. Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1

SIMATIC Manual Collection on DVD, 5 languages **6ES7998-8XC01-8YE0**

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages **6ES7998-8XC01-8YE2**

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

SIMATIC S7-300, spare part connector **6ES7391-1AA00-0AA0**

For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit

PC adapter USB A2 USB adapter (USB V2.0) **6GK1571-0BA00-0AA0**

For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.

SIMATIC S7-300 Advanced Controllers

Central processing units
Standard CPUs

CPU 314

Ordering data	Article No.	Article No.
PROFIBUS DP RS 485 bus connector		
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function without PG socket	6ES7972-0BA12-0XA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function with PG socket	6ES7972-0BB12-0XA0	PROFIBUS bus connector with axial cable outlet For industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0	SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0	PROFIBUS bus components For establishing MPI/PROFIBUS communication
		6ES7972-0BB52-0XB0
		6GK1500-0EA02
		6XV1830-0EH10
		6ES7972-0AA02-0XA0
		See SiePortal

5

Overview

- The CPU with medium to large program memory and quantity structures for optional use of SIMATIC engineering tools
- High processing power in binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- PROFIBUS DP master/slave interface
- For comprehensive I/O expansion
- For configuring distributed I/O structures
- Isochronous mode on PROFIBUS

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data**Article No.**

SIMATIC S7-300, CPU 315-2DP Central processing unit with MPI, integrated 24 V DC power supply, 256 KB work memory, 2nd interface DP master/device Micro Memory Card required	6ES7315-2AH14-0AB0
Accessories	
SIMATIC Micro Memory Card	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 64 KB	6ES7953-8LF31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 128 KB	6ES7953-8LG31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 512 KB	6ES7953-8LJ31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 2 MB	6ES7953-8LL31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 4 MB	6ES7953-8LM32-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 8 MB	6ES7953-8LP31-0AA0
SIMATIC S7, MPI cable For linking SIMATIC S7 and PG via MPI 5 m	6ES7901-0BF00-0AA0
SIMATIC S7-300/ET 200M Slot label. Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	6ES7912-0AA00-0AA0
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0
PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0,3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0

SIMATIC S7-300 Advanced Controllers

Central processing units
Standard CPUs

CPU 315-2 DP**Ordering data****Article No.****Article No.****PROFIBUS DP RS 485 bus connector****SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet**

15.8 x 64 x 35.6 mm (WxHxD),
terminating resistor
with isolating function
without PG socket

6ES7972-0BA12-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

15.8 x 64 x 35.6 mm (WxHxD),
terminating resistor
with isolating function
with PG socket

6ES7972-0BB12-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

FastConnect insulation
displacement method,
without PG socket
15.8 x 59 x 35.6 mm (WxHxD)

6ES7972-0BA52-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

15.8 x 59 x 35.6 mm (WxHxD),
FastConnect insulation
displacement method,
without PG socket
100 units 6ES7972-0BA52-0XA0
per packing unit

6ES7972-0BA52-0XB0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

FastConnect insulation
displacement method,
with PG socket
15.8 x 59 x 35.6 mm (WxHxD)

6ES7972-0BB52-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

15.8 x 59 x 35.6 mm (WxHxD),
FastConnect insulation
displacement method,
with PG socket
100 units 6ES7972-0BB52-0XA0
per packing unit

6ES7972-0BB52-0XB0

PROFIBUS bus connection plug

With axial cable outlet for industrial
PC, SIMATIC OP, OLM; transfer rate
12 Mbps; terminating resistor with
isolating function, metal enclosure.

6GK1500-0EA02

PROFIBUS FC standard cable GP

2-core bus cable, shielded, special
design for fast installation, delivery
unit: max. 1000 m, minimum order
quantity 20 m, sold by the meter.

6XV1830-0EH10

SIMATIC DP, RS-485 repeater

For connecting PROFIBUS/MPI bus
systems with max. 31 nodes
max. 12 Mbps baud rate,
degree of protection IP20 improved
user handling

6ES7972-0AA02-0XA0

PROFIBUS bus components

For establishing
MPI/PROFIBUS communication

See SiePortal

5

Overview

- The CPU with mid-range program memory and quantity frameworks
- High processing power in binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- PROFINET interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- Component-based Automation (CBA) on PROFINET
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component-based Automation (CBA)
- Integrated web server with the option of creating user-defined web pages
- Combined MPI/PROFIBUS DP master/slave interface
- Isochronous mode on PROFIBUS and PROFINET

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data**Article No.****SIMATIC S7-300 CPU 315-2 PN/DP** **6ES7315-2EH14-0AB0**

Central processing unit with 384 KB work memory, 1st interface MPI/DP 12 Mbps, 2nd interface Ethernet PROFINET, with 2-port switch, Micro Memory Card required

Accessories**SIMATIC Micro Memory Card****SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200** **6ES7953-8LF31-0AA0**

3.3 V Nflash, 64 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LG31-0AA0**

3.3 V Nflash, 128 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LJ31-0AA0**

3.3 V Nflash, 512 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LL31-0AA0**

3.3 V Nflash, 2 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LM32-0AA0**

3.3 V Nflash, 4 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LP31-0AA0**

3.3 V Nflash, 8 MB

SIMATIC S7, MPI cable **6ES7901-0BF00-0AA0**

For linking SIMATIC S7 and PG via MPI 5 m

SIMATIC S7-300/ET 200M, slot label **6ES7912-0AA00-0AA0**

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1

SIMATIC Manual Collection on DVD, 5 languages **6ES7998-8XC01-8YE0**

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages **6ES7998-8XC01-8YE2**

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

SIMATIC S7-300, spare part connector **6ES7391-1AA00-0AA0**

For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit

PC adapter USB A2 USB adapter (USB V2.0) **6GK1571-0BA00-0AA0**

For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.

SIMATIC S7-300 Advanced Controllers

Central processing units
Standard CPUs

CPU 315-2 PN/DP

Ordering data

Article No.

Ordering data	Article No.
PROFIBUS bus components	
PROFIBUS DP RS 485 bus connector	
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function without PG socket	6ES7972-0BA12-0XA0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function with PG socket	6ES7972-0BB12-0XA0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit	6ES7972-0BB52-0XB0
PROFIBUS bus connector with axial cable outlet for industrial PC SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.	6GK1500-0EA02
PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0

Article No.

Ordering data	Article No.
PROFINET bus components	
Industrial Ethernet FC TP standard cable GP 2x2 (PROFINET type A), TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
FO standard cable GP (50/125) Standard cable splittable, UL approval, max. length 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1873-2A
Industrial Ethernet switch SCALANCE XC206-2SFP G IEC 62443-4-2 certified; 6x 100 Mbps RJ45 ports; 2x 100 Mbps ST/BFOC ports; 1x console port; diagnostics LED; redundant power supply; temperature range -40 °C to +70 °C; Mounting: DIN rail/S7 mounting rail/wall; redundancy functions; Office features (RSTP, VLAN, etc.); PROFINET IO device; Ethernet/IP-compliant C-PLUG slot.	6GK5206-2GS00-2AC2
CSM 377 compact switch module Connection SIMATIC S7-300 and up to 3 additional stations to Industrial Ethernet with 10/100 Mbps unmanaged switch, 4 RJ45 ports, external 24 V DC power supply, LED diagnostics, S7-300 module, including electronic Equipment Manual on CD-ROM.	6GK7377-1AA00-0AA0
IE FC RJ45 plugs	
Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
PROFIBUS/PROFINET bus components For establishing MPI/PROFIBUS/PROFINET communication	See SiePortal

Overview

- The CPU with a large program memory and quantity framework for demanding applications
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- High processing power in binary and floating-point arithmetic
- 2 PROFIBUS DP master/slave interfaces
- For comprehensive I/O expansion
- For configuring distributed I/O structures
- Isochronous mode on PROFIBUS
- Optionally supports the use of SIMATIC engineering tools

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data**Article No.**

SIMATIC S7-300, CPU 317-2 DP 6ES7317-2AK14-0AB0

Central processing unit with 1 MB work memory, 1st interface MPI/DP 12 Mbps, 2nd interface DP master/device, Micro Memory Card required

Accessories**SIMATIC Micro Memory Card**

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LF31-0AA0

3.3 V Nflash, 64 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LG31-0AA0

3.3 V Nflash, 128 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LJ31-0AA0

3.3 V Nflash, 512 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200, 6ES7953-8LL31-0AA0

3.3 V Nflash, 2 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LM32-0AA0

3.3 V Nflash, 4 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LP31-0AA0

3.3 V Nflash, 8 MB

SIMATIC S7, MPI cable 6ES7901-0BF00-0AA0

For linking SIMATIC S7 and PG via MPI 5 m

SIMATIC S7-300/ET 200M, slot label 6ES7912-0AA00-0AA0

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1

SIMATIC Manual Collection on DVD, 5 languages 6ES7998-8XC01-8YE0

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages 6ES7998-8XC01-8YE2

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

SIMATIC S7-300, spare part connector 6ES7391-1AA00-0AA0

For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit

PC adapter USB A2 USB adapter (USB V2.0) 6GK1571-0BA00-0AA0

For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.

SIMATIC S7-300 Advanced Controllers

Central processing units
Standard CPUs

CPU 317-2 DP**Ordering data****Article No.****Article No.****PROFIBUS DP RS 485 bus connector****SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet**

15.8 x 64 x 35.6 mm (WxHxD),
terminating resistor
with isolating function,
without PG socket

6ES7972-0BA12-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

15.8 x 64 x 35.6 (WxHxD),
terminating resistor
with isolating function,
with PG socket

6ES7972-0BB12-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

FastConnect insulation
displacement method,
without PG socket
15.8 x 59 x 35.6 mm (WxHxD)

6ES7972-0BA52-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

15.8 x 59 x 35.6 mm (WxHxD),
FastConnect insulation
displacement method,
without PG socket
100 units 6ES7972-0BA52-0XA0
per packing unit

6ES7972-0BA52-0XB0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

FastConnect insulation
displacement method,
with PG socket
15.8 x 59 x 35.6 mm (WxHxD)

6ES7972-0BB52-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

15.8 x 59 x 35.6 mm (WxHxD),
FastConnect insulation
displacement method,
with PG socket
100 units 6ES7972-0BB52-0XA0
per packing unit

6ES7972-0BB52-0XB0

PROFIBUS bus connector with axial cable outlet for industrial PC

SIMATIC OP, OLM; transfer rate
12 Mbps; terminating resistor with
isolating function, metal enclosure.

6GK1500-0EA02

PROFIBUS FC standard cable GP

2-core bus cable, shielded,
special design for fast installation,
delivery unit: max. 1000 m,
minimum order quantity 20 m,
sold by the meter.

6XV1830-0EH10

SIMATIC DP, RS-485 repeater

For connecting PROFIBUS/MPI bus
systems with max. 31 nodes
max. 12 Mbps baud rate,
degree of protection IP20 improved
user handling

6ES7972-0AA02-0XA0

PROFIBUS bus components

For establishing MPI/PROFIBUS
communication

See SiePortal

5

Overview

- The CPU with a large program memory and quantity framework for demanding applications
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- High processing power in binary and floating-point arithmetic
- PROFINET interface with 2-port switch
- PROFINET I/O Controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as intelligent PROFINET device under a SIMATIC or third-party PROFINET I/O Controller
- Distributed intelligence in Component Based Automation (CBA) on PROFINET
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component Based Automation (CBA)
- Integrated web server with the option of creating user-defined web pages
- Combined MPI/PROFIBUS DP master/slave interface
- Isochronous mode on PROFIBUS and PROFINET
- Optionally supports the use of SIMATIC engineering tools

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data**Article No.****SIMATIC S7-300 CPU 317-2 PN/DP** 6ES7317-2EK14-0AB0

Central processing unit with 1 MB work memory, 1st interface MPI/DP 12 Mbps, 2nd interface Ethernet PROFINET, with 2-port switch, Micro Memory Card required

Accessories**SIMATIC Micro Memory Card****SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200** 6ES7953-8LF31-0AA0

3.3 V Nflash, 64 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LG31-0AA0

3.3 V Nflash, 128 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LJ31-0AA0

3.3 V Nflash, 512 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LL31-0AA0

3.3 V Nflash, 2 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LM32-0AA0

3.3 V Nflash, 4 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LP31-0AA0

3.3 V Nflash, 8 MB

SIMATIC S7, MPI cable 6ES7901-0BF00-0AA0

For linking SIMATIC S7 and PG via MPI 5 m

SIMATIC S7-300/ET 200M, slot label 6ES7912-0AA00-0AA0

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1

SIMATIC Manual Collection on DVD, 5 languages 6ES7998-8XC01-8YE0

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages 6ES7998-8XC01-8YE2

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

SIMATIC S7-300, spare part connector 6ES7391-1AA00-0AA0

For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit

PC adapter USB A2 USB adapter (USB V2.0) 6GK1571-0BA00-0AA0

For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.

SIMATIC S7-300 Advanced Controllers

Central processing units
Standard CPUs

CPU 317-2 PN/DP

Ordering data

Article No.

Ordering data	Article No.
PROFIBUS bus components	
PROFIBUS DP RS 485 bus connector	
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function without PG socket	6ES7972-0BA12-0XA0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function with PG socket	6ES7972-0BB12-0XA0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit	6ES7972-0BB52-0XB0
PROFIBUS bus connector with axial cable outlet for industrial PC SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.	6GK1500-0EA02
PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0

Article No.

Ordering data	Article No.
PROFINET bus components	
Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
FO standard cable GP (50/125) Standard cable splittable, UL approval, max. length 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1873-2A
Industrial Ethernet switch SCALANCE XC206-2SFP G IEC 62443-4-2 certified; 6x 100 Mbps RJ45 ports; 2x 100 Mbps ST/BFOC ports; 1x console port; diagnostics LED; redundant power supply; temperature range -40 °C to +70 °C; Mounting: DIN rail/S7 mounting rail/wall; redundancy functions; Office features (RSTP, VLAN, etc.); PROFINET IO device; Ethernet/IP-compliant C-PLUG slot.	6GK5206-2GS00-2AC2
CSM 377 compact switch module Connection SIMATIC S7-300 and up to 3 additional stations to Industrial Ethernet with 10/100 Mbps unmanaged switch, 4 RJ45 ports, external 24 V DC power supply, LED diagnostics, S7-300 module, including electronic Equipment Manual on CD-ROM.	6GK7377-1AA00-0AA0
IE FC RJ45 plugs	
Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
PROFIBUS/PROFINET bus components For establishing MPI/PROFIBUS/PROFINET communication	See SiePortal

Overview



- The CPU with high command processing performance, large program memory and quantity framework for demanding applications
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O on PROFIBUS and PROFINET
- PROFINET I/O controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET I/O controller
- PROFINET interface with 2-port switch
- Isochronous mode on PROFIBUS or PROFINET
- Integrated web server with the option of creating user-defined web pages
- Distributed intelligence in Component Based Automation (CBA) on PROFINET
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component Based Automation (CBA)
- Optionally supports the use of SIMATIC engineering tools

SIMATIC Micro Memory Card required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-300 CPU 319-3 PN/DP Central processing unit with 2 MB work memory, 1st interface MPI/DP 12 Mbps, 2nd interface DP master/device, 3rd interface Ethernet PROFINET, with 2-port switch, Micro Memory Card required	6ES7318-3EL01-0AB0
SIMATIC Micro Memory Card	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 64 KB	6ES7953-8LF31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 128 KB	6ES7953-8LG31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 512 KB	6ES7953-8LJ31-0AA0

Ordering data

Article No.

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 2 MB	6ES7953-8LL31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 4 MB	6ES7953-8LM32-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 8 MB	6ES7953-8LP31-0AA0
SIMATIC S7, MPI cable For linking SIMATIC S7 and PG via MPI 5 m	6ES7901-0BF00-0AA0
SIMATIC S7-300/ET 200M, slot label Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	6ES7912-0AA00-0AA0
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0
PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0
PROFIBUS bus components	
PROFIBUS DP RS 485 bus connector	
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket	6ES7972-0BA12-0XA0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket	6ES7972-0BB12-0XA0

SIMATIC S7-300 Advanced Controllers

Central processing units
Standard CPUs

CPU 319-3 PN/DP

Ordering data	Article No.	Article No.
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0	CSM 377 compact switch module Connection SIMATIC S7-300 and up to 3 additional stations to Industrial Ethernet with 10/100 Mbps unmanaged switch, 4 RJ45 ports, external 24 V DC power supply, LED diagnostics, S7-300 module, including electronic Equipment Manual on CD-ROM.
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0	
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0	IE FC RJ45 plugs
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit	6ES7972-0BB52-0XB0	Industrial Ethernet FastConnect RJ45 plug 145 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 145° cable outlet 1 pack = 1 unit.
PROFIBUS bus connector with axial cable outlet for industrial PC SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.	6GK1500-0EA02	Industrial Ethernet FastConnect RJ45 plug 145 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 145° cable outlet 1 pack = 10 units.
PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10	Industrial Ethernet FastConnect RJ45 plug 145 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 145° cable outlet 1 pack = 50 units.
SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0	IE FC RJ45 plug 180
PROFINET bus components		Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.
Industrial Ethernet FC TP standard cable GP 2x2 (PROFINET type A), TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.
FO standard cable GP (50/125) Standard cable splittable, UL approval, max. length 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1873-2A	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.
Industrial Ethernet switch SCALANCE XC206-2SFP G IEC 62443-4-2 certified; 6x 100 Mbps RJ45 ports; 2x 100 Mbps ST/BFOC ports; 1x console port; diagnostics LED; redundant power supply; temperature range -40 °C to +70 °C; Mounting: DIN rail/S7 mounting rail/wall; redundancy functions; Office features (RSTP, VLAN, etc.); PROFINET IO device; Ethernet/IP-compliant C-PLUG slot.	6GK5206-2GS00-2AC2	PROFIBUS/PROFINET bus components See SiePortal For establishing MPI/PROFIBUS/PROFINET communication

Technical specifications

Article number	6ES7312-1AE14-0AB0 CPU312, 32KB	6ES7314-1AG14-0AB0 CPU314, 128 KB	6ES7315-2AH14-0AB0 CPU315-2DP, 256 KB	6ES7315-2EH14-0AB0 CPU315-2 PN/DP, 384 KB
General information				
Product function				
• Isochronous mode			Yes	Yes; Via PROFIBUS DP or PROFINET interface
Engineering with				
• Programming package	STEP 7 V5.5 + SP1 or higher or STEP 7 V5.2 + SP1 or higher with HSP 218	STEP 7 V5.5 + SP1 or higher or STEP 7 V5.2 + SP1 or higher with HSP 218	STEP 7 V5.5 + SP1 or higher or STEP 7 V5.2 + SP1 or higher with HSP 218	STEP 7 V5.5 or higher
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V
Memory				
Work memory				
• integrated	32 kbyte	128 kbyte	256 kbyte	384 kbyte
• expandable	No	No	No	No
Load memory				
• Plug-in (MMC), max.	8 Mbyte	8 Mbyte	8 Mbyte	8 Mbyte
CPU processing times				
for bit operations, typ.	0.1 µs	0.06 µs	0.05 µs	0.05 µs
for word operations, typ.	0.24 µs	0.12 µs	0.09 µs	0.09 µs
for fixed point arithmetic, typ.	0.32 µs	0.16 µs	0.12 µs	0.12 µs
for floating point arithmetic, typ.	1.1 µs	0.59 µs	0.45 µs	0.45 µs
Counters, timers and their retentivity				
S7 counter				
• Number	256	256	256	256
IEC counter				
• present	Yes	Yes	Yes	Yes
S7 times				
• Number	256	256	256	256
IEC timer				
• present	Yes	Yes	Yes	Yes
Data areas and their retentivity				
Flag				
• Size, max.	256 byte	256 byte	2 048 byte	2 048 byte
Address area				
I/O address area				
• Inputs	1 024 byte	1 024 byte	2 048 byte	2 048 byte
• Outputs	1 024 byte	1 024 byte	2 048 byte	2 048 byte
Process image				
• Inputs, adjustable	1 024 byte	1 024 byte	2 048 byte	2 048 byte
• Outputs, adjustable	1 024 byte	1 024 byte	2 048 byte	2 048 byte
Time of day				
Clock				
• Hardware clock (real-time)		Yes	Yes	Yes
• Software clock	Yes			
Operating hours counter				
• Number	1	1	1	1
1. Interface				
Interface type	Integrated RS 485 interface	Integrated RS 485 interface	Integrated RS 485 interface	Integrated RS 485 interface
Interface types				
• RS 485	Yes	Yes	Yes	Yes
Protocols				
• MPI	Yes	Yes	Yes	Yes
• PROFIBUS DP master	No	No	No	Yes
• PROFIBUS DP slave	No	No	No	Yes
• Point-to-point connection	No	No	No	No
PROFIBUS DP master				
• Number of DP slaves, max.				124

SIMATIC S7-300 Advanced Controllers

Central processing units
Standard CPUs

Technical specifications

Technical specifications

Article number	6ES7312-1AE14-0AB0 CPU312, 32KB	6ES7314-1AG14-0AB0 CPU314, 128 KB	6ES7315-2AH14-0AB0 CPU315-2DP, 256 KB	6ES7315-2EH14-0AB0 CPU315-2 PN/DP, 384 KB
2. Interface				
Interface type			Integrated RS 485 interface	PROFINET
Interface types				
<ul style="list-style-type: none"> • RJ 45 (Ethernet) • RS 485 • Number of ports 			Yes	Yes 2
Protocols				
<ul style="list-style-type: none"> • MPI • PROFINET IO Controller • PROFINET IO Device • PROFINET CBA • PROFIBUS DP master • PROFIBUS DP slave 			No Yes Yes	No Yes; Also simultaneously with IO-Device functionality Yes; Also simultaneously with IO Controller functionality Yes No No
PROFIBUS DP master				
<ul style="list-style-type: none"> • Number of DP slaves, max. 			124; Per station	
PROFINET IO Controller				
Services				
<ul style="list-style-type: none"> - Number of connectable IO Devices, max. - Of which IO devices with IRT, max. - Number of IO Devices with IRT and the option "high flexibility" - Number of connectable IO Devices for RT, max. 				128 64 128 128
Protocols				
Open IE communication				
<ul style="list-style-type: none"> • TCP/IP - Number of connections, max. • ISO-on-TCP (RFC1006) - Number of connections, max. • UDP - Number of connections, max. 				Yes; via integrated PROFINET interface and loadable FBs 8 Yes; via integrated PROFINET interface and loadable FBs 8 Yes; via integrated PROFINET interface and loadable FBs 8
Web server				
<ul style="list-style-type: none"> • supported 				Yes
communication functions / header				
PG/OP communication	Yes	Yes	Yes	Yes
Data record routing	No	No	Yes	Yes
Global data communication				
<ul style="list-style-type: none"> • supported 	Yes	Yes	Yes	Yes
S7 basic communication				
<ul style="list-style-type: none"> • communication function / S7 basic communication 	Yes	Yes	Yes	Yes
S7 communication				
<ul style="list-style-type: none"> • supported 	Yes	Yes	Yes	Yes
S5 compatible communication				
<ul style="list-style-type: none"> • supported 	Yes; via CP and loadable FC	Yes; via CP and loadable FC	Yes; via CP and loadable FC	Yes; via CP and loadable FC
Number of connections				
<ul style="list-style-type: none"> • overall 	6	12	16	16
Ambient conditions				
Ambient temperature during operation				
<ul style="list-style-type: none"> • min. • max. 	0 °C 60 °C	0 °C 60 °C	0 °C 60 °C	0 °C 60 °C

Technical specifications

Article number	6ES7312-1AE14-0AB0 CPU312, 32KB	6ES7314-1AG14-0AB0 CPU314, 128 KB	6ES7315-2AH14-0AB0 CPU315-2DP, 256 KB	6ES7315-2EH14-0AB0 CPU315-2 PN/DP, 384 KB
configuration / header				
configuration / programming / header				
Programming language				
- LAD	Yes	Yes	Yes	Yes
- FBD	Yes	Yes	Yes	Yes
- STL	Yes	Yes	Yes	Yes
- SCL	Yes	Yes	Yes	Yes
- CFC		Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes	Yes
- HiGraph®	Yes	Yes	Yes	Yes
Know-how protection				
• User program protection/ password protection	Yes	Yes	Yes	Yes
• Block encryption	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy
Dimensions				
Width	40 mm	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm	125 mm
Depth	130 mm	130 mm	130 mm	130 mm
Weights				
Weight, approx.	270 g	280 g	290 g	340 g
Article number	6ES7317-2AK14-0AB0 CPU317-2 DP, 1 MB	6ES7317-2EK14-0AB0 CPU317-2 PN/DP, 1 MB	6ES7318-3EL01-0AB0 CPU319-3 PN/DP, 2 MB	
General information				
Product function				
• Isochronous mode		Yes; Via PROFIBUS DP or PROFINET interface	Yes; Via 2nd PROFIBUS DP or PROFINET interface	
Engineering with				
• Programming package	STEP 7 as of V5.5 + SP1 or STEP 7 V5.2 + SP1 or higher with HSP 202	STEP 7 V5.5 or higher	STEP 7 V5.5 or higher	
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	
Memory				
Work memory				
• integrated	1 024 kbyte	1 024 kbyte	2 048 kbyte	
• expandable	No	No	No	
Load memory				
• Plug-in (MMC), max.	8 Mbyte	8 Mbyte	8 Mbyte	
CPU processing times				
for bit operations, typ.	0.025 µs	0.025 µs	0.004 µs	
for word operations, typ.	0.03 µs	0.03 µs	0.01 µs	
for fixed point arithmetic, typ.	0.04 µs	0.04 µs	0.01 µs	
for floating point arithmetic, typ.	0.16 µs	0.16 µs	0.04 µs	
Counters, timers and their retentivity				
S7 counter				
• Number	512	512	2 048	
IEC counter				
• present	Yes	Yes	Yes	
S7 times				
• Number	512	512	2 048	
IEC timer				
• present	Yes	Yes	Yes	
Data areas and their retentivity				
Flag				
• Size, max.	4 096 byte	4 096 byte	8 192 byte	
Address area				
I/O address area				
• Inputs	8 192 byte	8 192 byte	8 192 byte	
• Outputs	8 192 byte	8 192 byte	8 192 byte	

SIMATIC S7-300 Advanced Controllers

Central processing units
Standard CPUs

Technical specifications

Technical specifications

Article number	6ES7317-2AK14-0AB0 CPU317-2 DP, 1 MB	6ES7317-2EK14-0AB0 CPU317-2 PN/DP, 1 MB	6ES7318-3EL01-0AB0 CPU319-3 PN/DP, 2 MB
Process image			
• Inputs, adjustable	8 192 byte	8 192 byte	8 192 byte
• Outputs, adjustable	8 192 byte	8 192 byte	8 192 byte
Time of day			
Clock			
• Hardware clock (real-time)	Yes	Yes	Yes
Operating hours counter			
• Number	4	4	4
1. Interface			
Interface type	Integrated RS 485 interface	Integrated RS 485 interface	Integrated RS 485 interface
Interface types			
• RS 485	Yes	Yes	Yes
Protocols			
• MPI	Yes	Yes	Yes
• PROFIBUS DP master	Yes	Yes	Yes
• PROFIBUS DP slave	Yes; A DP slave at both interfaces simultaneously is not possible	Yes	Yes; A DP slave at both interfaces simultaneously is not possible
• Point-to-point connection	No	No	No
PROFIBUS DP master			
• Number of DP slaves, max.	124	124	124
2. Interface			
Interface type	Integrated RS 485 interface	PROFINET	Integrated RS 485 interface
Interface types			
• RJ 45 (Ethernet)		Yes	
• RS 485	Yes		Yes
• Number of ports		2	
Protocols			
• MPI	No	No	No
• PROFINET IO Controller		Yes; Also simultaneously with IO-Device functionality	No
• PROFINET IO Device		Yes; Also simultaneously with IO Controller functionality	No
• PROFINET CBA		Yes	No
• PROFIBUS DP master	Yes	No	Yes
• PROFIBUS DP slave	Yes; A DP slave at both interfaces simultaneously is not possible	No	Yes; A DP slave at both interfaces simultaneously is not possible
PROFIBUS DP master			
• Number of DP slaves, max.	124		124
PROFINET IO Controller			
Services			
- Number of connectable IO Devices, max.		128	
- Of which IO devices with IRT, max.		64	
- Number of IO Devices with IRT and the option "high flexibility"		128	
- Number of connectable IO Devices for RT, max.		128	
3. Interface			
Interface type			PROFINET
Interface types			
• RJ 45 (Ethernet)			Yes
• Number of ports			2
Protocols			
• MPI			No
• PROFINET IO Controller			Yes; Also simultaneously with I-Device functionality
• PROFINET IO Device			Yes; Also simultaneously with IO Controller functionality
• PROFINET CBA			Yes
• PROFIBUS DP master			No
• PROFIBUS DP slave			No

Technical specifications

Article number	6ES7317-2AK14-0AB0 CPU317-2 DP, 1 MB	6ES7317-2EK14-0AB0 CPU317-2 PN/DP, 1 MB	6ES7318-3EL01-0AB0 CPU319-3 PN/DP, 2 MB
PROFINET IO Controller			
Services			
- Number of connectable IO Devices, max.			256
- Of which IO devices with IRT, max.			64
- Number of IO Devices with IRT and the option "high flexibility"			256
- Number of connectable IO Devices for RT, max.			256
Protocols			
Open IE communication			
• TCP/IP		Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.		16	32
• ISO-on-TCP (RFC1006)		Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.		16	32
• UDP		Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.		16	32
Web server			
• supported		Yes	Yes
communication functions / header			
PG/OP communication	Yes	Yes	Yes
Data record routing	Yes	Yes	Yes
Global data communication			
• supported	Yes	Yes	Yes
S7 basic communication			
• communication function / S7 basic communication	Yes	Yes	Yes
S7 communication			
• supported	Yes	Yes	Yes
S5 compatible communication			
• supported	Yes; via CP and loadable FC	Yes; via CP and loadable FC	Yes; via CP and loadable FC
Number of connections			
• overall	32	32	32
Ambient conditions			
Ambient temperature during operation			
• min.	0 °C	0 °C	0 °C
• max.	60 °C	60 °C	60 °C
configuration / header			
configuration / programming / header			
Programming language			
- LAD	Yes	Yes	Yes
- FBD	Yes	Yes	Yes
- STL	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
- CFC	Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes
- HiGraph®	Yes	Yes	Yes
Know-how protection			
• User program protection/ password protection	Yes	Yes	Yes
• Block encryption	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy
Dimensions			
Width	40 mm	40 mm	120 mm
Height	125 mm	125 mm	125 mm
Depth	130 mm	130 mm	130 mm
Weights			
Weight, approx.	360 g	340 g	1 250 g

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 standard CPUs

SIPLUS S7-300 CPU 314

Overview



- For plants with medium requirements on the program scope
- High processing performance in binary and floating-point arithmetic

SIAMATIC Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

SIPLUS S7-300 CPU 314

For industrial applications with extended ambient conditions

CPU, 128 KB work memory, supply voltage 24 V DC, MPI; MMC required

Extended temperature range and exposure to environmental substances

Article No.

6AG1314-1AG14-7AB0

Accessories

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0

Ordering data

Article No.

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0
6AG1972-0BB12-2XA0

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0
6AG1972-0BB42-7XA0

With insulation displacement terminals, max. transfer rate 12 Mbps

- With PG interface, grounding via control cabinet cover

6AG1972-0BB70-7XA0

(Extended temperature range)

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

6AG1500-0EA02-2AA0

PROFIBUS FastConnect bus cable

6XV1830-0EH10

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m

RS 485 repeater for PROFIBUS

6AG1972-0AA02-7XA0

(Extended temperature range and exposure to environmental substances)

Transmission rate up to 12 Mbps; 24 V DC; IP20 enclosure

For commissioning

MPI cable

6ES7901-0BF00-0AA0

For connection of SIMATIC S7 and PG via MPI; length 5 m

USB A2 PC adapter

6GK1571-0BA00-0AA0

For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery

Consumables

Power supply connector

6ES7391-1AA00-0AA0

10 units, spare part

Slot number plates

6ES7912-0AA00-0AA0

Documentation

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

SIMATIC S7-300 Advanced ControllersCentral processing units
SIPLUS S7-300 standard CPUs**SIPLUS S7-300 CPU 315-2 DP****Overview**

- The CPU with medium to large program memory and quantity structures for optional use of SIMATIC engineering tools
- High processing performance in binary and floating-point arithmetic
- PROFIBUS DP master/slave interface
- For comprehensive I/O expansion
- For configuring distributed I/O structures

SIPLIC Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS S7-300 CPU 315-2 DP**

For industrial applications with extended ambient conditions

CPU, 256 KB work memory, supply voltage 24 V DC, MPI, PROFIBUS DP master/slave interface; MMC required

Extended temperature range and exposure to environmental substances

6AG1315-2AH14-7AB0**Accessories***Mandatory***SIMATIC Micro Memory Card**

64 KB	6ES7953-8LF31-0AA0
128 KB	6ES7953-8LG31-0AA0
512 KB	6ES7953-8LJ31-0AA0
2 MB	6ES7953-8LL31-0AA0
4 MB	6ES7953-8LM32-0AA0
8 MB	6ES7953-8LP31-0AA0

Ordering data**Article No.**

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0
6AG1972-0BB12-2XA0

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0
6AG1972-0BB42-7XA0

With insulation displacement terminals, max. transfer rate 12 Mbps

- With PG interface, grounding via control cabinet cover

6AG1972-0BB70-7XA0

(Extended temperature range)

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

6AG1500-0EA02-2AA0**PROFIBUS FastConnect bus cable**

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m

6XV1830-0EH10**RS 485 repeater for PROFIBUS**

(Extended temperature range and exposure to environmental substances)

Transmission rate up to 12 Mbps; 24 V DC; IP20 enclosure

6AG1972-0AA02-7XA0

For commissioning

MPI cable

For connection of SIMATIC S7 and PG via MPI; length 5 m

6ES7901-0BF00-0AA0**USB A2 PC adapter**

For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery

6GK1571-0BA00-0AA0

Consumables

Power supply connector

10 units, spare part

6ES7391-1AA00-0AA0**Slot number plates****6ES7912-0AA00-0AA0**

Documentation

SIMATIC Manual Collection

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0**SIMATIC Manual Collection update service for 1 year**

Current Manual Collection DVD and the three subsequent updates

6ES7998-8XC01-8YE2

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 standard CPUs

SIPLUS S7-300 CPU 315-2 PN/DP

Overview



- The CPU with medium-sized program memory and quantity frameworks
- High processing performance in binary and floating-point arithmetic
- Used as central controller in production lines with central and distributed I/O
- Component Based Automation (CBA) on PROFINET
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component Based Automation (CBA)
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET interface with 2-port switch
- Combined MPI/PROFIBUS DP master/slave interface
- Isochronous mode on PROFIBUS

SIMATIC Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS S7-300 CPU 315-2 PN/DP

For industrial applications with extended ambient conditions

CPU, 384 KB work memory, supply voltage 24 V DC, combined MPI/PROFIBUS DP master/slave interface, Ethernet/PROFINET interface with 2-port switch; MMC required

Extended temperature range and exposure to environmental substances

6AG1315-2EH14-7AB0

Accessories

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0

6AG1972-0BB12-2XA0

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0

6AG1972-0BB42-7XA0

With insulation displacement terminals, max. transfer rate 12 Mbps

- With PG interface, grounding via control cabinet cover

6AG1972-0BB70-7XA0

(Extended temperature range)

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

6AG1500-0EA02-2AA0

IE FC RJ45 plug 180

(Extended temperature range and exposure to environmental substances)

180° cable outlet

- 1 unit

6AG1901-1BB10-7AA0

SIMATIC S7-300 Advanced ControllersCentral processing units
SIPLUS S7-300 standard CPUs**SIPLUS S7-300 CPU 315-2 PN/DP**

Ordering data	Article No.	Ordering data	Article No.
SIPLUS SCALANCE XC-200 Industrial Ethernet switches Industrial Ethernet switches with integrated SNMP access, web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; with integrated redundancy manager; incl. operating instructions, Industrial Ethernet network manual and configuration software on CD-ROM Extended temperature range and exposure to environmental substances Switches with PROFINET delivery state • SIPLUS SCALANCE XC206-2 (ST/BFOC) with six RJ45 ports 10/100 Mbps and two ST/BFOC ports 100 Mbps	6AG1206-2BB00-7AC2	FO standard cable GP (50/125) Standard cable, splittable, UL approval, sold by the meter <i>For commissioning</i> MPI cable For connection of SIMATIC S7 and PG via MPI; length 5 m USB A2 PC adapter For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery <i>Consumables</i> Power supply connector 10 units, spare part Slot number plates	6XV1873-2A 6ES7901-0BF00-0AA0 6GK1571-0BA00-0AA0 6ES7391-1AA00-0AA0 6ES7912-0AA00-0AA0
PROFIBUS FastConnect bus cable Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m	6XV1830-0EH10	<i>Documentation</i> SIMATIC Manual Collection Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
IE FC TP standard cable GP 2x2 4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; Sold by the meter	6XV1840-2AH10	SIMATIC Manual Collection update service for 1 year Current Manual Collection DVD and the three subsequent updates	6ES7998-8XC01-8YE2

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 standard CPUs

SIPLUS S7-300 CPU 317-2 PN/DP

Overview



- The CPU with a large program memory and quantity framework for demanding applications
- Distributed intelligence in Component Based Automation (CBA) on PROFINET
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component Based Automation (CBA)
- PROFINET I/O controller for operating distributed I/O on PROFINET
- For cross-industry automation tasks in series machine, special machine and plant construction
- Used as central controller in production lines with central and distributed I/O
- For comprehensive I/O expansion
- For configuring distributed I/O structures
- High processing performance in binary and floating-point arithmetic
- Combined MPI/PROFIBUS DP master/slave interface
- Optionally supports the use of SIMATIC engineering tools

Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS S7-300 CPU 317-2 PN/DP

For industrial applications with extended ambient conditions

CPU, 1 MB work memory, supply voltage 24 V DC, combined MPI/PROFIBUS DP master/slave interface, Ethernet/PROFINET interface; MMC required

Extended temperature range and exposure to environmental substances

6AG1317-2EK14-7AB0

Accessories

Mandatory

SIMATIC Micro Memory Card

64 KB	6ES7953-8LF31-0AA0
128 KB	6ES7953-8LG31-0AA0
512 KB	6ES7953-8LJ31-0AA0
2 MB	6ES7953-8LL31-0AA0
4 MB	6ES7953-8LM32-0AA0
8 MB	6ES7953-8LP31-0AA0

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0
6AG1972-0BB12-2XA0

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0
6AG1972-0BB42-7XA0

With insulation displacement terminals, max. transfer rate 12 Mbps

- With PG interface, grounding via control cabinet cover

6AG1972-0BB70-7XA0

(Extended temperature range)

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

6AG1500-0EA02-2AA0

IE FC RJ45 plug 180

(Extended temperature range and exposure to environmental substances)

180° cable outlet

- 1 unit

6AG1901-1BB10-7AA0

SIPLUS SCALANCE XC-200 Industrial Ethernet switches

Industrial Ethernet switches with integrated SNMP access, web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; with integrated redundancy manager; incl. operating instructions, Industrial Ethernet network manual and configuration software on CD-ROM

Extended temperature range and exposure to environmental substances

Switches with PROFINET delivery state

SIMATIC S7-300 Advanced ControllersCentral processing units
SIPLUS S7-300 standard CPUs**SIPLUS S7-300 CPU 317-2 PN/DP**

Ordering data	Article No.	Ordering data	Article No.
SIPLUS SCALANCE XC206-2 (ST/BFOC) with six RJ45 ports 10/100 Mbps and two ST/BFOC ports 100 Mbps	6AG1206-2BB00-7AC2	USB A2 PC adapter For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery	6GK1571-0BA00-0AA0
PROFIBUS FastConnect bus cable • Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m	6XV1830-0EH10	<i>Consumables</i> Power supply connector 10 units, spare part	6ES7391-1AA00-0AA0
IE FC TP standard cable GP 2x2 4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; Sold by the meter	6XV1840-2AH10	Slot number plates <i>Documentation</i> SIMATIC Manual Collection Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7912-0AA00-0AA0 6ES7998-8XC01-8YE0
FO standard cable GP (50/125) Standard cable, splittable, UL approval, sold by the meter	6XV1873-2A	SIMATIC Manual Collection update service for 1 year Current Manual Collection DVD and the three subsequent updates	6ES7998-8XC01-8YE2
<i>For commissioning</i> MPI cable For connection of SIMATIC S7 and PG via MPI; length 5 m	6ES7901-0BF00-0AA0		

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 standard CPUs

Technical specifications

Technical specifications

Article number	6AG1314-1AG14-7AB0	6AG1315-2AH14-7AB0
Based on	6ES7314-1AG14-0AB0 SIPLUS S7-300 CPU314	6ES7315-2AH14-0AB0 SIPLUS S7-300 CPU 315-2DP
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C; = Tmin	-25 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

Technical specifications

Article number	6AG1315-2EH14-7AB0	6AG1317-2EK14-7AB0
Based on	6ES7315-2EH14-0AB0	6ES7317-2EK14-0AB0
	SIPLUS S7-300 CPU315-2PN/DP	SIPLUS S7-300 CPU317-2PN/DP
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C; = Tmin	-25 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; @ 60°C for UL/ATEX/FM use
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

Central processing units
Compact CPUs

CPU 312C

Overview



- The compact CPU with integral digital inputs/outputs
 - For small applications with increased processing performance requirements
 - With technological functions
- SIMATIC Micro Memory Card required for operation of CPU.

Ordering data

Article No.

SIMATIC S7-300, CPU 312C Compact CPU with MPI, 10 DI/6 DO, 2 fast counters (10 kHz), integrated power supply 24 V DC, 64 KB work memory, front connector (1x 40-pin) and Micro Memory Card required	6ES7312-5BF04-0AB0
Accessories	
SIMATIC Micro Memory Card	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 64 KB	6ES7953-8LF31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 128 KB	6ES7953-8LG31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 512 KB	6ES7953-8LJ31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 2 MB	6ES7953-8LL31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 4 MB	6ES7953-8LM32-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 8 MB	6ES7953-8LP31-0AA0
SIMATIC S7, MPI cable For linking SIMATIC S7 and PG via MPI 5 m	6ES7901-0BF00-0AA0
Front connectors	
SIMATIC S7-300, front connector with screw contacts 40-pin	6ES7392-1AM00-0AA0
SIMATIC S7-300, front connector with screw contacts 40-pin, 100 units per packing unit	6ES7392-1AM00-1AB0
SIMATIC S7-300, front connector for signal modules With spring-loaded contacts, 40-pin	6ES7392-1BM01-0AA0
SIMATIC S7-300, front connector for signal modules With spring-loaded contacts, 40-pin 100 units per packing unit	6ES7392-1BM01-1AB0
SIMATIC TOP connect	See page 5/298; for information about which components can be used for the respective module, see SiePortal
SIMATIC S7-300, raised front door For compact CPU, allows the connection of 1.3 mm ² /16 AWG cables, 5 units per packing unit incl. labeling strips and cabling diagram (petrol)	6ES7328-7AA20-0AA0
SIMATIC S7-300/ET 200M, slot label Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	6ES7912-0AA00-0AA0

Ordering data	Article No.	Ordering data	Article No.
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0	PROFIBUS DP RS 485 bus connector	
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket	6ES7972-0BA12-0XA0
SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket	6ES7972-0BB12-0XA0
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector 10 units per packing unit	6ES7392-2XY00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0
Labeling sheets for machine labeling		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit	6ES7972-0BB52-0XB0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0	PROFIBUS bus connector with axial cable outlet For industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.	6GK1500-0EA02
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0	SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0
PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI USB cable 5 m included, MPI cable 0.3 m can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0	PROFIBUS bus components For establishing MPI/PROFIBUS communication	See SiePortal

SIMATIC S7-300 Advanced Controllers

Central processing units
Compact CPUs

CPU 313C

Overview



- The compact CPU with integral digital and analog inputs/outputs
- For plants with high processing performance and response time requirements
- With technological functions

SIMATIC Micro Memory Card required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-300, CPU 313C

Compact CPU with MPI, 24 DI/16 DO, 4 AI, 2 AO, 1 Pt100, 3 fast counters (30 kHz), integrated power supply 24 V DC, work memory 128 KB, front connector (2x 40-pin) and Micro Memory Card required

6ES7313-5BG04-0AB0

Accessories

SIMATIC Micro Memory Card

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

3.3 V Nflash, 64 KB

6ES7953-8LF31-0AA0

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

3.3 V Nflash, 128 KB

6ES7953-8LG31-0AA0

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

3.3 V Nflash, 512 KB

6ES7953-8LJ31-0AA0

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

3.3 V Nflash, 2 MB

6ES7953-8LL31-0AA0

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

3.3 V Nflash, 4 MB

6ES7953-8LM32-0AA0

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

3.3 V Nflash, 8 MB

6ES7953-8LP31-0AA0

SIMATIC S7, MPI cable

For linking SIMATIC S7 and PG via MPI 5 m

6ES7901-0BF00-0AA0

Front connectors

SIMATIC S7-300, front connector with screw contacts

40-pin

6ES7392-1AM00-0AA0

SIMATIC S7-300, front connector with screw contacts

40-pin,
100 units per packing unit

6ES7392-1AM00-1AB0

SIMATIC S7-300, front connector for signal modules with spring-loaded contacts

40-pin

6ES7392-1BM01-0AA0

SIMATIC S7-300, front connector for signal modules with spring-loaded contacts

40-pin
100 units per packing unit

6ES7392-1BM01-1AB0

SIMATIC TOP connect

See page 5/298; for information about which components can be used for the respective module, see SiePortal

SIMATIC S7-300, raised front door for compact CPU

Allows the connection of 1.3 mm²/16 AWG cables, 5 units per packing unit incl. labeling strips and cabling diagram (petrol)

6ES7328-7AA20-0AA0

SIMATIC S7-300/ET 200M, slot label

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part
P. unit = 1

6ES7912-0AA00-0AA0

Ordering data	Article No.	Ordering data	Article No.
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0	PROFIBUS DP RS 485 bus connector	
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket	6ES7972-0BA12-0XA0
SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket	6ES7972-0BB12-0XA0
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0
Labeling sheets for machine labeling		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit	6ES7972-0BB52-0XB0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0	PROFIBUS bus connection plug With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.	6GK1500-0EA02
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0	SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0
PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0	PROFIBUS bus components For establishing MPI/PROFIBUS communication	See SiePortal

SIMATIC S7-300 Advanced Controllers

Central processing units
Compact CPUs

CPU 313C-2 PtP

Overview



- The compact CPU with integrated digital inputs/outputs as well as second serial interface
- For plants with high processing performance and response time requirements
- With technological functions

SIMATIC Micro Memory Card required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-300, CPU 313C-2 PTP	6ES7313-6BG04-0AB0
Compact CPU with MPI, 16 DI/16 DO, 3 fast counters (30 kHz), integrated interface RS485, integrated 24 V DC power supply, 128 KB work memory, front connector (1x 40-pin) and Micro Memory Card required	
Accessories	
SIMATIC Micro Memory Card	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LF31-0AA0
3.3 V Nflash, 64 KB	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LG31-0AA0
3.3 V Nflash, 128 KB	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LJ31-0AA0
3.3 V Nflash, 512 KB	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LL31-0AA0
3.3 V Nflash, 2 MB	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LM32-0AA0
3.3 V Nflash, 4 MB	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LP31-0AA0
3.3 V Nflash, 8 MB	
SIMATIC S7, MPI cable	6ES7901-0BF00-0AA0
For linking SIMATIC S7 and PG via MPI 5 m	
Point-to-point link cable	
SIMATIC S7/M7, cable	6ES7902-3AB00-0AA0
For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 5 m long	

Ordering data

Article No.

SIMATIC S7/M7, cable	6ES7902-3AC00-0AA0
For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 10 m long	
SIMATIC S7/M7, cable	6ES7902-3AG00-0AA0
For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 50 m long	
Front connectors	
SIMATIC S7-300, front connector	6ES7392-1AM00-0AA0
With screw contacts, 40-pin	
SIMATIC S7-300, front connector	6ES7392-1AM00-1AB0
With screw contacts, 40-pin, 100 units per packing unit	
SIMATIC S7-300, front connector	6ES7392-1BM01-0AA0
For signal modules with spring-loaded contacts, 40-pin	
SIMATIC S7-300, front connector	6ES7392-1BM01-1AB0
For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit	
SIMATIC TOP connect	See page 5/298; for information about which components can be used for the respective module, see SiePortal
SIMATIC S7-300, raised front door	6ES7328-7AA20-0AA0
For compact CPU, allows the connection of 1.3 mm ² /16 AWG cables, 5 units per packing unit incl. labeling strips and cabling diagram (petrol)	
SIMATIC S7-300/ET 200M, slot label	6ES7912-0AA00-0AA0
Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	
SIMATIC Manual Collection on DVD, 5 languages	6ES7998-8XC01-8YE0
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	
SIMATIC Manual Collection on DVD, 5 languages	6ES7998-8XC01-8YE2
Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	
SIMATIC S7-300, spare part connector	6ES7391-1AA00-0AA0
For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	

Ordering data	Article No.	Article No.
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 (WxHxD), terminating resistor with isolating function, with PG socket
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector 10 units per packing unit	6ES7392-2XY00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)
Labeling sheets for machine labeling		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0	PROFIBUS bus connection plug With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.
PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/ Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.
PROFIBUS DP RS 485 bus connector		SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket	6ES7972-0BA12-0XA0	PROFIBUS bus components For establishing MPI/PROFIBUS communication
		See SiePortal

SIMATIC S7-300 Advanced Controllers

Central processing units
Compact CPUs

CPU 313C-2 DP

Overview



- The compact CPU with integral digital inputs/outputs and PROFIBUS DP master/slave interface
- For plants with high processing performance and response time requirements
- With technological functions
- For tasks with special functions
- For connecting distributed I/Os

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data

Article No.

SIMATIC S7-300, CPU 313C-2 DP Compact CPU with MPI, 16 DI/16 DO, 3 fast counters (30 kHz), integrated DP interface, integrated power supply 24 V DC, work memory 128 KB, front connector (1x 40-pin) and Micro Memory Card required	6ES7313-6CG04-0AB0
Accessories	
SIMATIC Micro Memory Card	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 64 KB	6ES7953-8LF31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 128 KB	6ES7953-8LG31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 512 KB	6ES7953-8LJ31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 2 MB	6ES7953-8LL31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 4 MB	6ES7953-8LM32-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 8 MB	6ES7953-8LP31-0AA0
SIMATIC S7, MPI cable For linking SIMATIC S7 and PG via MPI 5 m	6ES7901-0BF00-0AA0
Front connectors	
SIMATIC S7-300, front connector With screw contacts, 40-pin	6ES7392-1AM00-0AA0
SIMATIC S7-300, front connector With screw contacts, 40-pin, 100 units per packing unit	6ES7392-1AM00-1AB0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin	6ES7392-1BM01-0AA0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit	6ES7392-1BM01-1AB0
SIMATIC TOP connect	See page 5/298; for information about which components can be used for the respective module, see SiePortal
SIMATIC S7-300, raised front door For compact CPU, allows the connection of 1.3 mm ² /16 AWG cables, 5 units per packing unit incl. labeling strips and cabling diagram (petrol)	6ES7328-7AA20-0AA0
SIMATIC S7-300/ET 200M, slot label Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	6ES7912-0AA00-0AA0

Ordering data	Article No.	Ordering data	Article No.
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0	PROFIBUS DP RS 485 bus connector	
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket	6ES7972-0BA12-0XA0
SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket	6ES7972-0BB12-0XA0
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0
Labeling sheets for machine labeling		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit	6ES7972-0BB52-0XB0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0	PROFIBUS bus connection plug With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.	6GK1500-0EA02
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0	SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0
PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0	PROFIBUS bus components For establishing MPI/PROFIBUS communication	See SiePortal

SIMATIC S7-300 Advanced Controllers

Central processing units
Compact CPUs

CPU 314C-2 PtP

Overview



- The compact CPU with integrated digital and analog inputs/outputs as well as second serial interface
- For plants with high processing performance and response time requirements
- With technological functions

SIMATIC Micro Memory Card required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-300, CPU 314C-2 PTP	6ES7314-6BH04-0AB0
Compact CPU with MPI, 24 DI/16 DO, 4 AI, 2 AO, 1 Pt100, 4 fast counters (60 kHz), integrated interface RS485, integrated power supply 24 V DC, work memory 192 KB, front connector (2x 40-pin) and Micro Memory Card required	
Accessories	
SIMATIC Micro Memory Card	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LF31-0AA0
3.3 V Nflash, 64 KB	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LG31-0AA0
3.3 V Nflash, 128 KB	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LJ31-0AA0
3.3 V Nflash, 512 KB	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LL31-0AA0
3.3 V Nflash, 2 MB	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LM32-0AA0
3.3 V Nflash, 4 MB	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200	6ES7953-8LP31-0AA0
3.3 V Nflash, 8 MB	
SIMATIC S7, MPI cable	6ES7901-0BF00-0AA0
For linking SIMATIC S7 and PG via MPI 5 m	
Point-to-point link cable	
SIMATIC S7/M7, cable	6ES7902-3AB00-0AA0
For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 5 m long	

Ordering data

Article No.

SIMATIC S7/M7, cable	6ES7902-3AC00-0AA0
For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 10 m long	
SIMATIC S7/M7, cable	6ES7902-3AG00-0AA0
For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 50 m long	
Front connectors	
SIMATIC S7-300, front connector	6ES7392-1AM00-0AA0
With screw contacts, 40-pin	
SIMATIC S7-300, front connector	6ES7392-1AM00-1AB0
With screw contacts, 40-pin, 100 units per packing unit	
SIMATIC S7-300, front connector	6ES7392-1BM01-0AA0
For signal modules with spring-loaded contacts, 40-pin	
SIMATIC S7-300, front connector	6ES7392-1BM01-1AB0
For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit	
SIMATIC TOP connect	See page 5/298; for information about which components can be used for the respective module, see SiePortal
SIMATIC S7-300, raised front door	6ES7328-7AA20-0AA0
For compact CPU, allows the connection of 1.3 mm ² /16 AWG cables 5 units per packing unit incl. labeling strips and cabling diagram (petrol)	
SIMATIC S7-300/ET 200M, slot label	6ES7912-0AA00-0AA0
Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	
SIMATIC Manual Collection on DVD, 5 languages	6ES7998-8XC01-8YE0
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	
SIMATIC Manual Collection on DVD, 5 languages	6ES7998-8XC01-8YE2
Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	
SIMATIC S7-300, spare part connector	6ES7391-1AA00-0AA0
For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	

Ordering data	Article No.	Article No.
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 (WxHxD), terminating resistor with isolating function, with PG socket
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)
Labeling sheets for machine labeling		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, With PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0	PROFIBUS bus connection plug With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.
PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/ Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.
PROFIBUS DP RS 485 bus connector		SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket	6ES7972-0BA12-0XA0	PROFIBUS bus components For establishing MPI/PROFIBUS communication

SIMATIC S7-300 Advanced Controllers

Central processing units
Compact CPUs

CPU 314C-2 DP

Overview



- The compact CPU with integral digital and analog inputs/outputs and PROFIBUS DP master/slave interface
- With technological functions
- For plants with high processing performance and response time requirements
- For connecting distributed I/Os

SIMATIC Micro Memory Card required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-300, CPU 314C-2 DP 6ES7314-6CH04-0AB0

Compact CPU with MPI, 24 DI/16 DO, 4 AI, 2 AO, 1 Pt100, 4 fast counters (60 kHz), integrated DP interface, integr. 24 V DC power supply, 192 KB work memory, front connector (2x 40-pin) and Micro Memory Card required

Accessories

SIMATIC Micro Memory Card

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LF31-0AA0

3.3 V Nflash, 64 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LG31-0AA0

3.3 V Nflash, 128 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LJ31-0AA0

3.3 V Nflash, 512 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LL31-0AA0

3.3 V Nflash, 2 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LM32-0AA0

3.3 V Nflash, 4 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 6ES7953-8LP31-0AA0

3.3 V Nflash, 8 MB

SIMATIC S7, MPI cable 6ES7901-0BF00-0AA0

For linking SIMATIC S7 and PG via MPI 5 m

Front connectors

SIMATIC S7-300, front connector 6ES7392-1AM00-0AA0

With screw contacts, 40-pin

SIMATIC S7-300, front connector 6ES7392-1AM00-1AB0

With screw contacts, 40-pin, 100 units per packing unit

SIMATIC S7-300, front connector 6ES7392-1BM01-0AA0

For signal modules with spring-loaded contacts, 40-pin

SIMATIC S7-300, front connector 6ES7392-1BM01-1AB0

For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit

SIMATIC TOP connect

See page 5/298; for information about which components can be used for the respective module, see SiePortal

SIMATIC S7-300, raised front door 6ES7328-7AA20-0AA0

For compact CPU, allows the connection of 1.3 mm²/16 AWG cables 5 units per packing unit incl. labeling strips and cabling diagram (petrol)

SIMATIC S7-300/ET 200M, slot label 6ES7912-0AA00-0AA0

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1

Ordering data	Article No.	Ordering data	Article No.
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0	PROFIBUS DP RS 485 bus connector	
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket	6ES7972-0BA12-0XA0
SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket	6ES7972-0BB12-0XA0
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0
Labeling sheets for machine labeling		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit	6ES7972-0BB52-0XB0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0	PROFIBUS bus connection plug With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.	6GK1500-0EA02
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0	SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0
PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0	PROFIBUS bus components For establishing MPI/PROFIBUS communication	See SiePortal

SIMATIC S7-300 Advanced Controllers

Central processing units
Compact CPUs

CPU 314C-2 PN/DP

Overview



- The compact CPU with integral digital and analog inputs/outputs and technological functions
- High processing performance in binary and floating-point arithmetic
- For connecting distributed I/O via PROFIBUS and PROFINET
- Combined MPI/PROFIBUS DP master/slave interface
- PROFINET interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET IO controller
- Component-based Automation (CBA) on PROFINET
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component-based Automation (CBA)
- Integrated web server with the option of creating user-defined web pages
- Isochronous mode on PROFINET

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data

Article No.

SIMATIC S7-300, CPU 314C-2PN/DP **6ES7314-6EH04-0AB0**

Compact CPU with 192 KB work memory, 24 DI/16 DO, 4 AI, 2 AO, 1 Pt100, 4 fast counters (60 kHz), 1st interface MPI/DP 12 Mbps, 2nd interface Ethernet PROFINET, with 2-port switch, integrated 24 V DC power supply, front connector (2x 40-pin) and Micro Memory Card required

Accessories

SIMATIC Micro Memory Card

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LF31-0AA0**

3.3 V Nflash, 64 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LG31-0AA0**

3.3 V Nflash, 128 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LJ31-0AA0**

3.3 V Nflash, 512 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LL31-0AA0**

3.3 V Nflash, 2 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LM32-0AA0**

3.3 V Nflash, 4 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 **6ES7953-8LP31-0AA0**

3.3 V Nflash, 8 MB

SIMATIC S7, MPI cable **6ES7901-0BF00-0AA0**

For linking SIMATIC S7 and PG via MPI 5 m

Front connectors

SIMATIC S7-300, front connector **6ES7392-1AM00-0AA0**

With screw contacts, 40-pin

SIMATIC S7-300, front connector **6ES7392-1AM00-1AB0**

With screw contacts, 40-pin, 100 units per packing unit

SIMATIC S7-300, front connector **6ES7392-1BM01-0AA0**

For signal modules with spring-loaded contacts, 40-pin

SIMATIC S7-300, front connector **6ES7392-1BM01-1AB0**

For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit

SIMATIC TOP connect

See page 5/298; for information about which components can be used for the respective module, see SiePortal

SIMATIC S7-300, raised front door **6ES7328-7AA20-0AA0**

For compact CPU, allows the connection of 1.3 mm²/16 AWG cables 5 units per packing unit incl. labeling strips and cabling diagram (petrol)

SIMATIC S7-300/ET 200M, slot label **6ES7912-0AA00-0AA0**

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1

Ordering data	Article No.	Ordering data	Article No.
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0	PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2	PROFIBUS DP RS 485 bus connector	
SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket	6ES7972-0BA12-0XA0
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket	6ES7972-0BB12-0XA0
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0
Labeling sheets for machine labeling		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit	6ES7972-0BB52-0XB0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0	PROFIBUS bus connection plug With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.	6GK1500-0EA02
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10
		SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0

SIMATIC S7-300 Advanced Controllers

Central processing units

Compact CPUs

CPU 314C-2 PN/DP

Ordering data

Article No.

Article No.

PROFINET bus components

Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A)

TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.

6XV1840-2AH10

FO standard cable GP (50/125)

Standard cable, splittable, UL approval, max. length 1000 m, minimum order quantity 20 m, sold by the meter.

6XV1873-2A

Industrial Ethernet switch SCALANCE XC206-2SFP G

IEC 62443-4-2 certified;
6x 100 Mbps RJ45 ports;
2x 100 Mbps ST/BFOC ports;
1x console port; diagnostics LED;
redundant power supply;
temperature range -40 °C to +70 °C;
mounting: DIN rail/S7 mounting rail/wall; redundancy functions;
Office features (RSTP, VLAN, etc.);
PROFINET IO device;
Ethernet/IP-compliant C-PLUG slot.

6GK5206-2GS00-2AC2

CSM 377 compact switch module

Connection SIMATIC S7-300 and up to 3 additional stations to Industrial Ethernet with 10/100 Mbps unmanaged switch, 4 RJ45 ports, external 24 V DC power supply, LED diagnostics, S7-300 module, including electronic Equipment Manual on CD-ROM.

6GK7377-1AA00-0AA0

IE FC RJ45 plugs

Industrial Ethernet FastConnect RJ45 plug 180 2x 2

RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet
1 pack = 1 unit.

6GK1901-1BB10-2AA0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2

RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet
1 pack = 10 units.

6GK1901-1BB10-2AB0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2

RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet
1 pack = 50 units.

6GK1901-1BB10-2AE0

PROFIBUS/PROFINET bus components

For establishing MPI/PROFIBUS/PROFINET communication

See SiePortal

5

Technical specifications

Article number	6ES7312-5BF04-0AB0	6ES7313-5BG04-0AB0	6ES7313-6BG04-0AB0	6ES7313-6CG04-0AB0
	CPU312C, 10DI/6DO, 64 KB	CPU313C, 24DI/16DO/ 5AI/2AO, 128 KB	CPU313C-2 PTP, 16DI/16DO, 128 KB	CPU313C-2 DP, 16DI/16DO, 128 KB
General information				
Engineering with				
• Programming package	STEP 7 V5.5 + SP1 or higher or STEP 7 V5.3 + SP2 or higher with HSP 203	STEP 7 V5.5 + SP1 or higher or STEP 7 V5.3 + SP2 or higher with HSP 203	STEP 7 as of V5.5 + SP1 or STEP 7 V5.3 + SP2 or higher with HSP 204	STEP 7 V5.5 + SP1 or higher or STEP 7 V5.3 + SP2 or higher with HSP 203
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V
Memory				
Work memory				
• integrated	64 kbyte	128 kbyte	128 kbyte	128 kbyte
• expandable	No	No	No	No
Load memory				
• Plug-in (MMC), max.	8 Mbyte	8 Mbyte	8 Mbyte	8 Mbyte
CPU processing times				
for bit operations, typ.	0.1 µs	0.07 µs	0.07 µs	0.07 µs
for word operations, typ.	0.24 µs	0.15 µs	0.15 µs	0.15 µs
for fixed point arithmetic, typ.	0.32 µs	0.2 µs	0.2 µs	0.2 µs
for floating point arithmetic, typ.	1.1 µs	0.72 µs	0.72 µs	0.72 µs
Counters, timers and their retentivity				
S7 counter				
• Number	256	256	256	256
IEC counter				
• present	Yes	Yes	Yes	Yes
S7 times				
• Number	256	256	256	256
IEC timer				
• present	Yes	Yes	Yes	Yes
Data areas and their retentivity				
Flag				
• Size, max.	256 byte	256 byte	256 byte	256 byte
Address area				
I/O address area				
• Inputs	1 024 byte	1 024 byte	1 024 byte	2 048 byte
• Outputs	1 024 byte	1 024 byte	1 024 byte	2 048 byte
Process image				
• Inputs, adjustable	1 024 byte	1 024 byte	1 024 byte	2 048 byte
• Outputs, adjustable	1 024 byte	1 024 byte	1 024 byte	2 048 byte
Time of day				
Clock				
• Hardware clock (real-time)		Yes	Yes	Yes
• Software clock	Yes			
Operating hours counter				
• Number	1	1	1	1
Digital inputs				
integrated channels (DI)	10	24	16	16
Digital outputs				
integrated channels (DO)	6	16	16	16
Analog inputs				
integrated channels (AI)	0	5; 4x current/voltage, 1x resistance	0	0
Input ranges				
• Voltage		Yes; ±10 V / 100 kΩ; 0 V to 10 V / 100 kΩ		
• Current		Yes; ±20 mA / 100 Ω; 0 mA to 20 mA / 100 Ω; 4 mA to 20 mA / 100 Ω		
• Resistance thermometer		Yes; Pt 100 / 10 MΩ		
• Resistance		Yes; 0 Ω to 600 Ω / 10 MΩ		

SIMATIC S7-300 Advanced Controllers

Central processing units
Compact CPUs

Technical specifications

Technical specifications

Article number	6ES7312-5BF04-0AB0 CPU312C, 10DI/6DO, 64 KB	6ES7313-5BG04-0AB0 CPU313C, 24DI/16DO/ 5AI/2AO, 128 KB	6ES7313-6BG04-0AB0 CPU313C-2 PTP, 16DI/16DO, 128 KB	6ES7313-6CG04-0AB0 CPU313C-2 DP, 16DI/16DO, 128 KB
Analog outputs				
integrated channels (AO)	0	2	0	0
Output ranges, voltage				
• 0 to 10 V		Yes		
• -10 V to +10 V		Yes		
Output ranges, current				
• 0 to 20 mA		Yes		
• -20 mA to +20 mA		Yes		
• 4 mA to 20 mA		Yes		
1. Interface				
Interface type	Integrated RS 485 interface	Integrated RS 485 interface	Integrated RS 485 interface	Integrated RS 485 interface
Interface types				
• RS 485	Yes	Yes		Yes
Protocols				
• MPI	Yes	Yes	Yes	Yes
• PROFIBUS DP master	No	No	No	No
• PROFIBUS DP slave	No	No	No	No
• Point-to-point connection	No	No	No	No
2. Interface				
Interface type			Integrated RS 422/ 485 interface	Integrated RS 485 interface
Interface types				
• RS 485			Yes; RS 422 / 485 (X.27)	Yes
Protocols				
• MPI			No	No
• PROFINET IO Controller			No	No
• PROFINET IO Device			No	No
• PROFINET CBA			No	No
• PROFIBUS DP master			No	Yes
• PROFIBUS DP slave			No	Yes
PROFIBUS DP master				
• Number of DP slaves, max.				124
communication functions / header				
PG/OP communication	Yes	Yes	Yes	Yes
Data record routing	No	No	No	Yes
Global data communication				
• supported	Yes	Yes	Yes	Yes
S7 basic communication				
• communication function / S7 basic communication	Yes	Yes	Yes; Server	Yes
S7 communication				
• supported	Yes	Yes	Yes	Yes
S5 compatible communication				
• supported	Yes; via CP and loadable FC	Yes; via CP and loadable FC	Yes; via CP and loadable FC	Yes; via CP and loadable FC
Number of connections				
• overall	6	8	8	8
Integrated Functions				
Counter				
• Number of counters	2; See "Technological Functions" manual	3; See "Technological Functions" manual	3; See "Technological Functions" manual	3; See "Technological Functions" manual
• Counting frequency, max.	10 kHz	30 kHz	30 kHz	30 kHz
Frequency measurement	Yes	Yes	Yes	Yes
• Number of frequency meters	2; up to 10 kHz (see "Technological Functions" manual)	3; up to 30 kHz (see "Technological Functions" manual)	3; up to 30 kHz (see "Technological Functions" manual)	3; up to 30 kHz (see "Technological Functions" manual)
controlled positioning	No	No	No	No
integrated function blocks (closed-loop control)	No	Yes; PID controller (see "Technological Functions" manual)	Yes; PID controller (see "Technological Functions" manual)	Yes; PID controller (see "Technological Functions" manual)
PID controller	No	Yes	Yes	Yes

Technical specifications

Article number	6ES7312-5BF04-0AB0	6ES7313-5BG04-0AB0	6ES7313-6BG04-0AB0	6ES7313-6CG04-0AB0
	CPU312C, 10DI/6DO, 64 KB	CPU313C, 24DI/16DO/ 5AI/2AO, 128 KB	CPU313C-2 PTP, 16DI/16DO, 128 KB	CPU313C-2 DP, 16DI/16DO, 128 KB
Number of pulse outputs	2; Pulse width modulation up to 2.5 kHz (see "Technological Functions" Manual)	3; Pulse width modulation up to 2.5 kHz (see "Technological Functions" Manual)	3; Pulse width modulation up to 2.5 kHz (see "Technological Functions" Manual)	3; Pulse width modulation up to 2.5 kHz (see "Technological Functions" Manual)
Limit frequency (pulse)	2.5 kHz	2.5 kHz	2.5 kHz	2.5 kHz
Ambient conditions				
Ambient temperature during operation				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	60 °C	60 °C	60 °C	60 °C
configuration / header				
configuration / programming / header				
Programming language				
- LAD	Yes	Yes	Yes	Yes
- FBD	Yes	Yes	Yes	Yes
- STL	Yes	Yes	Yes	Yes
- SCL	Yes	Yes	Yes	Yes
- CFC		Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes	Yes
- HiGraph®	Yes	Yes	Yes	Yes
Know-how protection				
• User program protection/ password protection	Yes	Yes	Yes	Yes
• Block encryption	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy
Dimensions				
Width	80 mm	120 mm	80 mm	80 mm
Height	125 mm	125 mm	125 mm	125 mm
Depth	130 mm	130 mm	130 mm	130 mm
Weights				
Weight, approx.	410 g	660 g	500 g	500 g

Article number	6ES7314-6BH04-0AB0	6ES7314-6CH04-0AB0	6ES7314-6EH04-0AB0
	CPU314C-2PTP, 24DI/16DO/5AI/2AO, 192 KB	CPU314C-2DP, 24DI/16DO/5AI/2AO, 192 KB	CPU314C-2PN/DP, 24DI/16DO/4AI/2AO, 192KB
General information			
Product function			
• Isochronous mode			Yes; For PROFINET only
Engineering with			
• Programming package	STEP 7 as of V5.5 + SP1 or STEP 7 V5.3 + SP2 or higher with HSP 204	STEP 7 V5.5 + SP1 or higher or STEP 7 V5.3 + SP2 or higher with HSP 203	STEP 7 V5.5 or higher with HSP 191
Supply voltage			
Rated value (DC)	24 V	24 V	24 V
Memory			
Work memory			
• integrated	192 kbyte	192 kbyte	192 kbyte
• expandable	No	No	No
Load memory			
• Plug-in (MMC), max.	8 Mbyte	8 Mbyte	8 Mbyte
CPU processing times			
for bit operations, typ.	0.06 µs	0.06 µs	0.06 µs
for word operations, typ.	0.12 µs	0.12 µs	0.12 µs
for fixed point arithmetic, typ.	0.16 µs	0.16 µs	0.16 µs
for floating point arithmetic, typ.	0.59 µs	0.59 µs	0.59 µs
Counters, timers and their retentivity			
S7 counter			
• Number	256	256	256
IEC counter			
• present	Yes	Yes	Yes

SIMATIC S7-300 Advanced Controllers

Central processing units
Compact CPUs

Technical specifications

Technical specifications

Article number	6ES7314-6BH04-0AB0 CPU314C-2PTP, 24DI/16DO/5AI/2AO, 192 KB	6ES7314-6CH04-0AB0 CPU314C-2DP, 24DI/16DO/5AI/2AO, 192 KB	6ES7314-6EH04-0AB0 CPU314C-2PN/DP, 24DI/16DO/4AI/2AO, 192KB
S7 times			
• Number	256	256	256
IEC timer			
• present	Yes	Yes	Yes
Data areas and their retentivity			
Flag			
• Size, max.	256 byte	256 byte	256 byte
Address area			
I/O address area			
• Inputs	1 024 byte	2 048 byte	2 048 byte
• Outputs	1 024 byte	2 048 byte	2 048 byte
Process image			
• Inputs, adjustable	1 024 byte	2 048 byte	2 048 byte
• Outputs, adjustable	1 024 byte	2 048 byte	2 048 byte
Time of day			
Clock			
• Hardware clock (real-time)	Yes	Yes	Yes
Operating hours counter			
• Number	1	1	1
Digital inputs			
integrated channels (DI)	24	24	24
Digital outputs			
integrated channels (DO)	16	16	16
Analog inputs			
integrated channels (AI)	5; 4x current/voltage, 1x resistance	5; 4x current/voltage, 1x resistance	5; 4x current/voltage, 1x resistance
Input ranges			
• Voltage	Yes; $\pm 10\text{ V} / 100\text{ k}\Omega$; 0 V to 10 V / 100 k Ω	Yes; $\pm 10\text{ V} / 100\text{ k}\Omega$; 0 V to 10 V / 100 k Ω	Yes; $\pm 10\text{ V} / 100\text{ k}\Omega$; 0 V to 10 V / 100 k Ω
• Current	Yes; $\pm 20\text{ mA} / 100\ \Omega$; 0 mA to 20 mA / 100 Ω ; 4 mA to 20 mA / 100 Ω	Yes; $\pm 20\text{ mA} / 100\ \Omega$; 0 mA to 20 mA / 100 Ω ; 4 mA to 20 mA / 100 Ω	Yes; $\pm 20\text{ mA} / 100\ \Omega$; 0 mA to 20 mA / 100 Ω ; 4 mA to 20 mA / 100 Ω
• Resistance thermometer	Yes; Pt 100 / 10 M Ω	Yes; Pt 100 / 10 M Ω	Yes; Pt 100 / 10 M Ω
• Resistance	Yes; 0 Ω to 600 Ω / 10 M Ω	Yes; 0 Ω to 600 Ω / 10 M Ω	Yes; 0 Ω to 600 Ω / 10 M Ω
Analog outputs			
integrated channels (AO)	2	2	2
Output ranges, voltage			
• 0 to 10 V	Yes	Yes	Yes
• -10 V to +10 V	Yes	Yes	Yes
Output ranges, current			
• 0 to 20 mA	Yes	Yes	Yes
• -20 mA to +20 mA	Yes	Yes	Yes
• 4 mA to 20 mA	Yes	Yes	Yes
1. Interface			
Interface type	Integrated RS 485 interface	Integrated RS 485 interface	Integrated RS 485 interface
Interface types			
• RS 485	Yes	Yes	Yes
Protocols			
• MPI	Yes	Yes	Yes
• PROFIBUS DP master	No	No	Yes
• PROFIBUS DP slave	No	No	Yes
• Point-to-point connection	No	No	No
PROFIBUS DP master			
• Number of DP slaves, max.			124

Technical specifications

Article number	6ES7314-6BH04-0AB0 CPU314C-2PTP, 24DI/16DO/5AI/2AO, 192 KB	6ES7314-6CH04-0AB0 CPU314C-2DP, 24DI/16DO/5AI/2AO, 192 KB	6ES7314-6EH04-0AB0 CPU314C-2PN/DP, 24DI/16DO/4AI/2AO, 192KB
2. Interface			
Interface type	Integrated RS 422/ 485 interface	Integrated RS 485 interface	PROFINET
Interface types			
• RJ 45 (Ethernet)			Yes
• RS 485	Yes; RS 422 / 485 (X.27)	Yes	
• Number of ports			2
Protocols			
• MPI	No	No	No
• PROFINET IO Controller	No	No	Yes; Also simultaneously with IO-Device functionality
• PROFINET IO Device	No	No	Yes; Also simultaneously with IO Controller functionality
• PROFINET CBA	No	No	Yes
• PROFIBUS DP master	No	Yes	No
• PROFIBUS DP slave	No	Yes	No
PROFIBUS DP master			
• Number of DP slaves, max.		124	
PROFINET IO Controller			
Services			
- Number of connectable IO Devices, max.			128
- Of which IO devices with IRT, max.			64
- Number of IO Devices with IRT and the option "high flexibility"			128
- Number of connectable IO Devices for RT, max.			128
Protocols			
Open IE communication			
• TCP/IP			Yes; via integrated PROFINET interface and loadable FBs 8
- Number of connections, max.			8
• ISO-on-TCP (RFC1006)			Yes; via integrated PROFINET interface and loadable FBs 8
- Number of connections, max.			8
• UDP			Yes; via integrated PROFINET interface and loadable FBs 8
- Number of connections, max.			8
Web server			
• supported			Yes
communication functions / header			
PG/OP communication	Yes	Yes	Yes
Data record routing	No	Yes	Yes
Global data communication			
• supported	Yes	Yes	Yes
S7 basic communication			
• communication function / S7 basic communication	Yes	Yes	Yes
S7 communication			
• supported	Yes	Yes	Yes
S5 compatible communication			
• supported	Yes; via CP and loadable FC	Yes; via CP and loadable FC	Yes; via CP and loadable FC
Number of connections			
• overall	12	12	12

SIMATIC S7-300 Advanced Controllers

Central processing units
Compact CPUs

Technical specifications

Technical specifications

Article number	6ES7314-6BH04-0AB0 CPU314C-2PTP, 24DI/16DO/5AI/2AO, 192 KB	6ES7314-6CH04-0AB0 CPU314C-2DP, 24DI/16DO/5AI/2AO, 192 KB	6ES7314-6EH04-0AB0 CPU314C-2PN/DP, 24DI/16DO/4AI/2AO, 192KB
Integrated Functions			
Counter			
• Number of counters	4; See "Technological Functions" manual	4; See "Technological Functions" manual	4; See "Technological Functions" manual
• Counting frequency, max.	60 kHz	60 kHz	60 kHz
Frequency measurement	Yes	Yes	Yes
• Number of frequency meters	4; up to 60 kHz (see "Technological Functions" manual)	4; up to 60 kHz (see "Technological Functions" manual)	4; up to 60 kHz (see "Technological Functions" manual)
controlled positioning	Yes	Yes	Yes
integrated function blocks (closed-loop control)	Yes; PID controller (see "Technological Functions" manual)	Yes; PID controller (see "Technological Functions" manual)	Yes; PID controller (see "Technological Functions" manual)
PID controller	Yes	Yes	Yes
Number of pulse outputs	4; Pulse width modulation up to 2.5 kHz (see "Technological Functions" Manual)	4; Pulse width modulation up to 2.5 kHz (see "Technological Functions" Manual)	4; Pulse width modulation up to 2.5 kHz (see "Technological Functions" Manual)
Limit frequency (pulse)	2.5 kHz	2.5 kHz	2.5 kHz
Ambient conditions			
Ambient temperature during operation			
• min.	0 °C	0 °C	0 °C
• max.	60 °C	60 °C	60 °C
configuration / header			
configuration / programming / header			
Programming language			
- LAD	Yes	Yes	Yes
- FBD	Yes	Yes	Yes
- STL	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
- CFC	Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes
- HiGraph®	Yes	Yes	Yes
Know-how protection			
• User program protection/ password protection	Yes	Yes	Yes
• Block encryption	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy
Dimensions			
Width	120 mm	120 mm	120 mm
Height	125 mm	125 mm	125 mm
Depth	130 mm	130 mm	130 mm
Weights			
Weight, approx.	680 g	680 g	730 g

5

SIMATIC S7-300 Advanced ControllersCentral processing units
SIPLUS S7-300 compact CPUs**SIPLUS S7-300 CPU 312C****Overview**

- The compact CPU with integral digital inputs/outputs
- For small applications with increased processing performance requirements
- With technological functions

Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS S7-300 CPU 312C**

For industrial applications with extended ambient conditions

Compact CPU, 64 KB work memory, supply voltage 24 V DC, 10 DI/6 DO integrated, integrated functions, MPI; including slot number labels; MMC required

Extended temperature range and exposure to environmental substances

6AG1312-5BF04-7AB0**Accessories**

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0**Front connector (1 unit)**

For compact CPUs

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0**6ES7392-1BM01-1AB0**

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0**6AG1972-0BB12-2XA0**

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0**6AG1972-0BB42-7XA0**

With insulation displacement terminals, max. transfer rate 12 Mbps

- With PG interface, grounding via control cabinet cover

6AG1972-0BB70-7XA0

(Extended temperature range)

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

6AG1500-0EA02-2AA0**PROFIBUS FastConnect bus cable**

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m

6XV1830-0EH10**RS 485 repeater for PROFIBUS**

(Extended temperature range and exposure to environmental substances)

Transmission rate up to 12 Mbps; 24 V DC; IP20 enclosure

6AG1972-0AA02-7XA0

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 compact CPUs

SIPLUS S7-300 CPU 312C

Ordering data

Article No.

For commissioning

MPI cable

For connection of SIMATIC S7 and PG via MPI; length 5 m

6ES7901-0BF00-0AA0

USB A2 PC adapter

For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery

6GK1571-0BA00-0AA0

Consumables

Front door, elevated design

For compact CPUs; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol

6ES7328-7AA20-0AA0

Power supply connector

10 units, spare part

6ES7391-1AA00-0AA0

Slot number plates

10 units, spare part

6ES7912-0AA00-0AA0

Labeling strips

10 units, spare part

6ES7392-2XX00-0AA0

Label cover

10 units, spare part

6ES7392-2XY00-0AA0

Article No.

Labeling sheets for machine labeling

For modules with 40-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

6ES7392-2AX10-0AA0

Light beige

6ES7392-2BX10-0AA0

Yellow

6ES7392-2CX10-0AA0

Red

6ES7392-2DX10-0AA0

Documentation

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

SIMATIC S7-300 Advanced ControllersCentral processing units
SIPLUS S7-300 compact CPUs**SIPLUS S7-300 CPU 313C****Overview**

- The compact CPU with integrated digital and analog inputs/outputs
- For plants with high processing performance and response time requirements
- With technological functions

Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS S7-300 CPU 313C**

For industrial applications with extended ambient conditions

Compact CPU, 128 KB work memory, 24 V DC supply voltage, 24 DI/16 DQ, 4 AI/2 AQ integrated, integrated functions, MPI; MMC required

Extended temperature range and exposure to environmental substances

6AG1313-5BG04-7AB0**Accessories**

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0**Front connector (1 unit)**

For compact CPUs

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0
6ES7392-1BM01-1AB0

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0
6AG1972-0BB12-2XA0

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0
6AG1972-0BB42-7XA0

(Extended temperature range)

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

6AG1500-0EA02-2AA0**PROFIBUS FastConnect bus cable****6XV1830-0EH10**

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m

RS 485 repeater for PROFIBUS**6AG1972-0AA02-7XA0**

(Extended temperature range and exposure to environmental substances)

Transmission rate up to 12 Mbps; 24 V DC; IP20 enclosure

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 compact CPUs

SIPLUS S7-300 CPU 313C**Ordering data****Article No.***For commissioning***MPI cable**

For connection of SIMATIC S7 and PG via MPI; length 5 m

6ES7901-0BF00-0AA0**USB A2 PC adapter**

For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery

6GK1571-0BA00-0AA0*Consumables***Front door, elevated design**For compact CPUs; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol**6ES7328-7AA20-0AA0****Power supply connector**

10 units, spare part

6ES7391-1AA00-0AA0**Slot number plates****6ES7912-0AA00-0AA0****Labeling strips**

10 units, spare part

6ES7392-2XX00-0AA0**Label cover**

10 units, spare part

6ES7392-2XY00-0AA0**Article No.****Labeling sheets for machine labeling**

For modules with 40-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

6ES7392-2AX10-0AA0

Light beige

6ES7392-2BX10-0AA0

Yellow

6ES7392-2CX10-0AA0

Red

6ES7392-2DX10-0AA0*Documentation***SIMATIC Manual Collection**Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT**6ES7998-8XC01-8YE0****SIMATIC Manual Collection update service for 1 year**

Current Manual Collection DVD and the three subsequent updates

6ES7998-8XC01-8YE2

SIMATIC S7-300 Advanced ControllersCentral processing units
SIPLUS S7-300 compact CPUs**SIPLUS S7-300 CPU 313C-2 DP****Overview**

- The compact CPU with integral digital inputs/outputs and PROFIBUS DP master/slave interface
- With technological functions
- For tasks with special functions
- For connecting distributed I/O

Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS S7-300 CPU 313C-2 DP**

For industrial applications with extended ambient conditions

Compact CPU, 128 KB work memory, supply voltage 24 V DC, 16 DI/16 DO integrated, integrated functions, MPI, PROFIBUS DP master/slave interface; MMC required

Extended temperature range and exposure to environmental substances

6AG1313-6CG04-7AB0**Accessories**

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0**Front connector (1 unit)**

For compact CPUs

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0**6ES7392-1BM01-1AB0**

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0**6AG1972-0BB12-2XA0**

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0**6AG1972-0BB42-7XA0**

(Extended temperature range)

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

6AG1500-0EA02-2AA0**PROFIBUS FastConnect bus cable**

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m

6XV1830-0EH10**RS 485 repeater for PROFIBUS**

(Extended temperature range and exposure to environmental substances)

Transmission rate up to 12 Mbps; 24 V DC; IP20 enclosure

6AG1972-0AA02-7XA0

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 compact CPUs

SIPLUS S7-300 CPU 313C-2 DP**Ordering data****Article No.***For commissioning***MPI cable**

For connection of SIMATIC S7 and PG via MPI; length 5 m

6ES7901-0BF00-0AA0**USB A2 PC adapter**

For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery

6GK1571-0BA00-0AA0*Consumables***Front door, elevated design**For compact CPUs; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol**6ES7328-7AA20-0AA0****Power supply connector**

10 units, spare part

6ES7391-1AA00-0AA0**Slot number plates****6ES7912-0AA00-0AA0****Labeling strips**

10 units, spare part

6ES7392-2XX00-0AA0**Label cover**

10 units, spare part

6ES7392-2XY00-0AA0**Article No.****Labeling sheets for machine labeling**

For modules with 40-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

6ES7392-2AX10-0AA0

Light beige

6ES7392-2BX10-0AA0

Yellow

6ES7392-2CX10-0AA0

Red

6ES7392-2DX10-0AA0*Documentation***SIMATIC Manual Collection**Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT**6ES7998-8XC01-8YE0****SIMATIC Manual Collection update service for 1 year**

Current Manual Collection DVD and the three subsequent updates

6ES7998-8XC01-8YE2

5

SIMATIC S7-300 Advanced ControllersCentral processing units
SIPLUS S7-300 compact CPUs**SIPLUS S7-300 CPU 314C-2 PtP****Overview**

- The compact CPU with integrated digital and analog inputs/outputs as well as second serial interface
- For plants with high processing performance and response time requirements
- With technological functions

SIPLIC Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS S7-300 CPU 314C-2 PtP**

For industrial applications with extended ambient conditions

Compact CPU, 192 KB work memory, 24 V DC supply voltage, 24DI/16DQ/4AI/2AQ integrated, integrated functions, MPI, RS 422/485 interface; MMC required

Extended temperature range and exposure to environmental substances

6AG1314-6BH04-7AB0**Accessories**

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0**Front connector (1 unit)**

For compact CPUs

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0
6ES7392-1BM01-1AB0

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0
6AG1972-0BB12-2XA0

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0
6AG1972-0BB42-7XA0

(Extended temperature range)

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

6AG1500-0EA02-2AA0**PROFIBUS FastConnect bus cable****6XV1830-0EH10**

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m

RS 485 repeater for PROFIBUS**6AG1972-0AA02-7XA0**

(Extended temperature range and exposure to environmental substances)

Transmission rate up to 12 Mbps; 24 V DC; IP20 enclosure

Point-to-point link cable

For connection to CPU 31xC-2 PtP

5 m

6ES7902-3AB00-0AA0

10 m

6ES7902-3AC00-0AA0

50 m

6ES7902-3AG00-0AA0

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 compact CPUs

SIPLUS S7-300 CPU 314C-2 PtP

Ordering data

Article No.

For commissioning

MPI cable

For connection of SIMATIC S7 and PG via MPI; length 5 m

6ES7901-0BF00-0AA0

USB A2 PC adapter

For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery

6GK1571-0BA00-0AA0

Consumables

Front door, elevated design

For compact CPUs; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol

6ES7328-7AA20-0AA0

Power supply connector

10 units, spare part

6ES7391-1AA00-0AA0

Slot number plates

10 units, spare part

6ES7912-0AA00-0AA0

Labeling strips

10 units, spare part

6ES7392-2XX00-0AA0

Label cover

10 units, spare part

6ES7392-2XY00-0AA0

Article No.

Labeling sheets for machine labeling

For modules with 40-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

6ES7392-2AX10-0AA0

Light beige

6ES7392-2BX10-0AA0

Yellow

6ES7392-2CX10-0AA0

Red

6ES7392-2DX10-0AA0

Documentation

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

SIMATIC S7-300 Advanced ControllersCentral processing units
SIPLUS S7-300 compact CPUs**SIPLUS S7-300 CPU 314C-2 DP****Overview**

- The compact CPU with integral digital and analog inputs/outputs and PROFIBUS DP master/slave interface
- With technological functions
- For tasks with special functions
- For connecting distributed I/O

Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS S7-300 CPU 314C-2 DP**

For industrial applications with extended ambient conditions

Compact CPU, 192 KB work memory, 24 V DC supply voltage, 24 DI/16 DQ/4 AI/2 AQ integrated, integrated functions, MPI, PROFIBUS DP master/slave interface; MMC required

Extended temperature range and exposure to environmental substances

6AG1314-6CH04-7AB0**Accessories**

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0**Front connector (1 unit)**

For compact CPUs

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0
6ES7392-1BM01-1AB0

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0
6AG1972-0BB12-2XA0

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0
6AG1972-0BB42-7XA0

(Extended temperature range)

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

6AG1500-0EA02-2AA0**PROFIBUS FastConnect bus cable****6XV1830-0EH10**

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m

RS 485 repeater for PROFIBUS**6AG1972-0AA02-7XA0**

(Extended temperature range and exposure to environmental substances)

Transmission rate up to 12 Mbps; 24 V DC; IP20 enclosure

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 compact CPUs

SIPLUS S7-300 CPU 314C-2 DP

Ordering data

Article No.

For commissioning

MPI cable

For connection of SIMATIC S7 and PG via MPI; length 5 m

6ES7901-0BF00-0AA0

USB A2 PC adapter

For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery

6GK1571-0BA00-0AA0

Consumables

Front door, elevated design

For compact CPUs; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol

6ES7328-7AA20-0AA0

Power supply connector

10 units, spare part

6ES7391-1AA00-0AA0

Slot number plates

10 units, spare part

6ES7912-0AA00-0AA0

Labeling strips

10 units, spare part

6ES7392-2XX00-0AA0

Label cover

10 units, spare part

6ES7392-2XY00-0AA0

Article No.

Labeling sheets for machine labeling

For modules with 40-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

6ES7392-2AX10-0AA0

Light beige

6ES7392-2BX10-0AA0

Yellow

6ES7392-2CX10-0AA0

Red

6ES7392-2DX10-0AA0

Documentation

SIMATIC Manual Collection

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection update service for 1 year

Current Manual Collection DVD and the three subsequent updates

6ES7998-8XC01-8YE2

SIMATIC S7-300 Advanced ControllersCentral processing units
SIPLUS S7-300 compact CPUs**SIPLUS S7-300 CPU 314C-2 PN/DP****Overview**

- The compact CPU with integral digital and analog inputs/outputs and technological functions
- High processing performance in binary and floating-point arithmetic
- For connecting distributed I/O via PROFIBUS and PROFINET
- Combined MPI/PROFIBUS DP master/slave interface
- PROFINET interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-device for connecting the CPU as intelligent PROFINET device under a SIMATIC or non-Siemens PROFINET I/O controller
- Component Based Automation (CBA) on PROFINET
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component Based Automation (CBA)
- Integrated web server with the option of creating user-defined web pages
- Isochronous mode on PROFINET

SIMATIC Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS S7-300 CPU 314C-2 PN/DP**

For industrial applications with extended ambient conditions

Compact CPU, 192 KB work memory, 24 V DC supply voltage, 24 DI/16 DQ/4 AI/2 AQ integrated, integrated functions, MPI, PROFIBUS DP master/slave interface; PROFINET IO controller/I-Device interface, MMC required

Extended temperature range and exposure to environmental substances

6AG1314-6EH04-7AB0**Accessories**

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0**Front connector (1 unit)**

For compact CPUs

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0
6ES7392-1BM01-1AB0

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0
6AG1972-0BB12-2XA0

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0
6AG1972-0BB42-7XA0

(Extended temperature range)

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

6AG1500-0EA02-2AA0**IE FC RJ45 plug 180**

(Extended temperature range and exposure to environmental substances)

180° cable outlet

- 1 unit

6AG1901-1BB10-7AA0

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 compact CPUs

SIPLUS S7-300 CPU 314C-2 PN/DP

5

Ordering data

Article No.

Article No.

SIPLUS SCALANCE XC-200 Industrial Ethernet switches

Industrial Ethernet switches with integrated SNMP access, web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; with integrated redundancy manager; incl. operating instructions, Industrial Ethernet network manual and configuration software on CD-ROM

Extended temperature range and exposure to environmental substances

Switches with PROFINET delivery state

- **SIPLUS SCALANCE XC206-2 (ST/BFOC)** with six RJ45 ports 10/100 Mbps and two ST/BFOC ports 100 Mbps

6AG1206-2BB00-7AC2

PROFIBUS FastConnect bus cable

6XV1830-0EH10

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m

IE FC TP standard cable GP 2x2

6XV1840-2AH10

4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval;

Sold by the meter;
Max. delivery unit 1000 m
Minimum order quantity 20 m

FO standard cable GP (50/125)

6XV1873-2A

Standard cable, splittable, UL approval, sold by the meter: max. delivery unit 1000 m minimum order quantity 20 m

RS 485 repeater for PROFIBUS

6AG1972-0AA02-7XA0

(Extended temperature range and exposure to environmental substances)

Transmission rate up to 12 Mbps; 24 V DC; IP20 enclosure

For commissioning

MPI cable

6ES7901-0BF00-0AA0

For connection of SIMATIC S7 and PG via MPI; length 5 m

USB A2 PC adapter

6GK1571-0BA00-0AA0

For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery

Consumables

Front door, elevated design

6ES7328-7AA20-0AA0

For compact CPUs; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol

Power supply connector

6ES7391-1AA00-0AA0

10 units, spare part

Slot number plates

6ES7912-0AA00-0AA0

Labeling strips

6ES7392-2XX00-0AA0

10 units, spare part

Label cover

6ES7392-2XY00-0AA0

10 units, spare part

Labeling sheets for machine labeling

For modules with 40-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

6ES7392-2AX10-0AA0

Light beige

6ES7392-2BX10-0AA0

Yellow

6ES7392-2CX10-0AA0

Red

6ES7392-2DX10-0AA0

Documentation

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:

All manuals for S7-1200/1500/200/300/400.LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

Technical specifications

Article number	6AG1312-5BF04-7AB0	6AG1313-5BG04-7AB0
Based on	6ES7312-5BF04-0AB0 SIPLUS S7-300 CPU312C	6ES7313-5BG04-0AB0 SIPLUS S7-300 CPU313C
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C; = Tmin	-25 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 compact CPUs

Technical specifications

Technical specifications

Article number	6AG1313-6CG04-7AB0	6AG1314-6BH04-7AB0
Based on	6ES7313-6CG04-0AB0 SIPLUS S7-300 CPU313C-2DP	6ES7314-6BH04-0AB0 SIPLUS S7-300 CPU314C-2 PtP
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C; = Tmin	-25 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

Technical specifications

Article number	6AG1314-6CH04-7AB0	6AG1314-6EH04-7AB0
Based on	6ES7314-6CH04-0AB0 SIPLUS S7-300 CPU314C-2DP	6ES7314-6EH04-0AB0 SIPLUS S7-300 CPU314C-2PN/DP
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C; = Tmin	-25 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; @ 60°C for UL/ATEX/FM use
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

Central processing units
Fail-safe CPUs

CPU 315F-2 DP

Overview



- Based on the SIMATIC CPU 315-2 DP
- For constructing a fail-safe automation system for plants with increased safety requirements
- Complies with safety requirements to SIL 3 acc. to IEC 61508 and PL e acc. to ISO 13849.1
- Distributed fail-safe I/O modules can be connected locally via the integrated PROFIBUS DP interface (PROFIsafe)
- Fail-safe ET 200M I/O modules can also be centrally connected
- Central and distributed use of standard modules for non safety-oriented applications

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data

Article No.

SIMATIC S7-300, CPU 315F-2DP

6ES7315-6FF04-0AB0

Fail-safe module with MPI, integrated 24 V DC power supply, 384 KB work memory, 40 mm width, 2nd interface DP master/device
Micro Memory Card required

Accessories

S7 Distributed Safety V5.4 SP5 Update 2 programming tool

Task:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD

6ES7833-1FC02-0YA5

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading¹⁾

6ES7833-1FC02-0YH5

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F
Consignee email address required for delivery

S7 Distributed Safety upgrade

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, upgrade from V5.X to V5.4, upgrade license for 1 user, engineering software, software and documentation on DVD

6ES7833-1FC02-0YE5

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Article No.	
STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.		SIMATIC S7-300/ET 200M, slot label Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	6ES7912-0AA00-0AA0
		SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB	6ES7833-1FA23-0YA5	SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key for download¹⁾ Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery	6ES7833-1FA23-0YH5	PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0
SIMATIC Micro Memory Card		PROFIBUS DP RS 485 bus connector	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 64 KB	6ES7953-8LF31-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket	6ES7972-0BA12-0XA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 128 KB	6ES7953-8LG31-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket	6ES7972-0BB12-0XA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 512 KB	6ES7953-8LJ31-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 2 MB	6ES7953-8LL31-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 4 MB	6ES7953-8LM32-0AA0		
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 8 MB	6ES7953-8LP31-0AA0		
SIMATIC S7, MPI cable For linking SIMATIC S7 and PG via MPI 5 m	6ES7901-0BF00-0AA0		

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-300 Advanced Controllers

Central processing units

Fail-safe CPUs

CPU 315F-2 DP**Ordering data****Article No.****Article No.****SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet**

FastConnect insulation displacement method, with PG socket
15.8 x 59 x 35.6 mm (WxHxD)

6ES7972-0BB52-0XA0**PROFIBUS FC standard cable GP**

2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.

6XV1830-0EH10**SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet**

15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket
100 units 6ES7972-0BB52-0XA0 per packing unit

6ES7972-0BB52-0XB0**SIMATIC DP, RS-485 repeater**

For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling

6ES7972-0AA02-0XA0**PROFIBUS bus components**

For establishing MPI/PROFIBUS communication

See SiePortal

PROFIBUS bus connection plug

With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.

6GK1500-0EA02

5

Overview



- Based on CPU 315-2 PN/DP
- The CPU with medium-sized program memory and quantity structures for setting up a fail-safe automation system in plants with increased safety requirements
- Complies with safety requirements to SIL 3 acc. to IEC 61508 and PL e acc. to ISO 13849.1
- Distributed fail-safe I/O modules can be locally connected via the integrated PROFINET interface (PROFIsafe) and/or via the integrated PROFIBUS DP interface (PROFIsafe)
- Fail-safe ET 200M I/O modules can also be connected centrally
- Central and distributed use of standard modules for non safety-oriented applications
- Component Based Automation (CBA) on PROFINET
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET interface with 2-port switch
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component Based Automation (CBA)

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data

Article No.

SIMATIC S7-300 CPU315F-2 PN/DP**6ES7315-2FJ14-0AB0**

Central processing unit with 512 KB work memory, 1st interface MPI/DP 12 Mbps, 2nd interface Ethernet PROFINET, with 2-port switch, Micro Memory Card required

Accessories**S7 Distributed Safety V5.4 SP5 Update 2 programming tool**

Task:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD**6ES7833-1FC02-0YA5**

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading¹⁾**6ES7833-1FC02-0YH5**

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F Consignee email address required for delivery

S7 Distributed Safety upgrade**SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, upgrade from V5.X to V5.4, upgrade license for 1 user, engineering software, software and documentation on DVD****6ES7833-1FC02-0YE5**

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-300 Advanced Controllers

Central processing units

Fail-safe CPUs

CPU 315F-2 PN/DP

5

Ordering data

Article No.

Article No.

STEP 7 Safety Advanced V19

Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O

Requirement:

STEP 7 Professional V19

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive

6ES7833-1FA23-0YA5

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F
Content: 1x USB

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key for download¹⁾

6ES7833-1FA23-0YH5

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery

SIMATIC Micro Memory Card

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LF31-0AA0

3.3 V Nflash, 64 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LG31-0AA0

3.3 V Nflash, 128 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LJ31-0AA0

3.3 V Nflash, 512 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LL31-0AA0

3.3 V Nflash, 2 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LM32-0AA0

3.3 V Nflash, 4 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LP31-0AA0

3.3 V Nflash, 8 MB

SIMATIC S7, MPI cable

6ES7901-0BF00-0AA0

For linking SIMATIC S7 and PG via MPI 5 m

SIMATIC S7-300/ET 200M, slot label

6ES7912-0AA00-0AA0

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part
P. unit = 1

SIMATIC Manual Collection on DVD, 5 languages

6ES7998-8XC01-8YE0

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages

6ES7998-8XC01-8YE2

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

SIMATIC S7-300, spare part connector

6ES7391-1AA00-0AA0

For 24 V supply for S7-300 CPUs and FM352-5
10 units per packing unit

PC adapter USB A2 USB adapter (USB V2.0)

6GK1571-0BA00-0AA0

For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.

PROFIBUS DP RS 485 bus connector

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

6ES7972-0BA12-0XA0

15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

6ES7972-0BB12-0XA0

15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

6ES7972-0BA52-0XA0

FastConnect insulation displacement method, without PG socket
15.8 x 59 x 35.6 mm (WxHxD)

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

6ES7972-0BA52-0XB0

15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket
100 units 6ES7972-0BA52-0XA0 per packing unit

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Ordering data	Article No.
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0	Industrial Ethernet switch SCALANCE XC206-2SFP G IEC 62443-4-2 certified; 6x 100 Mbps RJ45 ports; 2x 100 Mbps ST/BFOC ports; 1x console port; diagnostics LED; redundant power supply; temperature range -40 °C to +70 °C; Mounting: DIN rail/S7 mounting rail/wall; redundancy functions; Office features (RSTP, VLAN, etc.); PROFINET IO device; Ethernet/IP-compliant C-PLUG slot	6GK5206-2GS00-2AC2
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit	6ES7972-0BB52-0XB0	CSM 377 compact switch module Connection SIMATIC S7-300 and up to 3 additional stations to Industrial Ethernet with 10/100 Mbps unmanaged switch, 4 RJ45 ports, external 24 V DC power supply, LED diagnostics, S7-300 module, including electronic Equipment Manual on CD-ROM.	6GK7377-1AA00-0AA0
PROFIBUS bus connection plug With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.	6GK1500-0EA02	IE FC RJ45 plugs Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
PROFINET bus components Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10	PROFIBUS/PROFINET bus components For establishing MPI/PROFIBUS/PROFINET communication	See SiePortal
FO standard cable GP (50/125) Standard cable, splittable, UL approval, max. length 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1873-2A		

SIMATIC S7-300 Advanced Controllers

Central processing units
Fail-safe CPUs

CPU 317F-2 DP

Overview



- The fail-safe CPU with a large program memory and quantity framework for demanding applications
- For constructing a fail-safe automation system for plants with increased safety requirements
- Complies with safety requirements to SIL 3 acc. to IEC 61508 and PL e acc. to ISO 13849.1
- Fail-safe I/O modules can be connected in a distributed configuration to both integral PROFIBUS DP interfaces (PROFIsafe)
- Fail-safe ET 200M I/O modules can also be connected centrally
- Central and distributed use of standard modules for non safety-oriented applications

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data

Article No.

SIMATIC S7-300, CPU 317F-2DP
Central processing unit with 1.5 MB work memory, 1st interface MPI/DP 12 Mbps, 2nd interface DP master/device, Micro Memory Card required, can be used with software package S7 Distributed Safety V5.2 SP1 or higher

6ES7317-6FF04-0AB0

Accessories

S7 Distributed Safety V5.4 SP5 Update 2 programming tool

Task:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD

6ES7833-1FC02-0YA5

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading¹⁾

6ES7833-1FC02-0YH5

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F Consignee email address required for delivery

S7 Distributed Safety upgrade

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, upgrade from V5.X to V5.4, upgrade license for 1 user, engineering software, software and documentation on DVD

6ES7833-1FC02-0YE5

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Article No.	
STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.		SIMATIC S7-300/ET 200M, slot label Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	6ES7912-0AA00-0AA0
		SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB	6ES7833-1FA23-0YA5	SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key for download¹⁾ Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery	6ES7833-1FA23-0YH5	PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0
SIMATIC Micro Memory Card		PROFIBUS DP RS 485 bus connector	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 64 KB	6ES7953-8LF31-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket	6ES7972-0BA12-0XA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 128 KB	6ES7953-8LG31-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket	6ES7972-0BB12-0XA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 512 KB	6ES7953-8LJ31-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 2 MB	6ES7953-8LL31-0AA0		
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 4 MB	6ES7953-8LM32-0AA0		
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 8 MB	6ES7953-8LP31-0AA0		
SIMATIC S7, MPI cable For linking SIMATIC S7 and PG via MPI 5 m	6ES7901-0BF00-0AA0		

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-300 Advanced Controllers

Central processing units

Fail-safe CPUs

CPU 317F-2 DP**Ordering data****Article No.****Article No.****SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet**

15.8 x 59 x 35.6 mm (WxHxD),
FastConnect insulation displacement method, without PG socket
100 units 6ES7972-0BA52-0XA0 per packing unit

6ES7972-0BA52-0XB0

PROFIBUS bus connection plug
With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.

6GK1500-0EA02**SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet**

FastConnect insulation displacement method, with PG socket
15.8 x 59 x 35.6 mm (WxHxD)

6ES7972-0BB52-0XA0

PROFIBUS FC standard cable GP
2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.

6XV1830-0EH10**SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet**

15.8 x 59 x 35.6 mm (WxHxD),
FastConnect insulation displacement method, with PG socket
100 units 6ES7972-0BB52-0XA0 per packing unit

6ES7972-0BB52-0XB0

SIMATIC DP, RS-485 repeater
For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling

6ES7972-0AA02-0XA0

PROFIBUS bus components
For establishing MPI/PROFIBUS communication

See SiePortal

5

Overview

- Based on CPU 317-2 PN/DP
- The fail-safe CPU with a large program memory and quantity framework for demanding applications; for setting up a fail-safe automation system in plants with increased safety requirements.
- Complies with safety requirements to SIL 3 acc. to IEC 61508 and PL e acc. to ISO 13849.1
- Distributed fail-safe I/O modules can be locally connected via the integrated PROFINET interface (PROFIsafe) and/or via the integrated PROFIBUS DP interface (PROFIsafe)
- Fail-safe ET 200M I/O modules
- Can also be connected centrally
- Central and distributed use of standard modules for non safety-oriented applications
- Component-based Automation (CBA) on PROFINET
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET interface with 2-port switch
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component-based Automation (CBA)

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data**Article No.****SIMATIC S7-300 CPU317F-2 PN/DP****6ES7317-2FK14-0AB0**

Central processing unit with 1.5 MB work memory, 1st interface MPI/DP 12 Mbps, 2nd interface Ethernet PROFINET, with 2-port switch, Micro Memory Card required

S7 Distributed Safety V5.4 SP5 Update 2 programming tool**Task:**

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD**6ES7833-1FC02-0YA5**

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading¹⁾**6ES7833-1FC02-0YH5**

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F Consignee email address required for delivery

S7 Distributed Safety upgrade**SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, upgrade from V5.X to V5.4, upgrade license for 1 user, engineering software, software and documentation on DVD****6ES7833-1FC02-0YE5**

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-300 Advanced Controllers

Central processing units
Fail-safe CPUs

CPU 317F-2 PN/DP

Ordering data

Article No.

Article No.

STEP 7 Safety Advanced V19

Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O

Requirement:

STEP 7 Professional V19

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive

6ES7833-1FA23-0YA5

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F
Content: 1x USB

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾

6ES7833-1FA23-0YH5

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery

SIMATIC Micro Memory Card

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LF31-0AA0

3.3 V Nflash, 64 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LG31-0AA0

3.3 V Nflash, 128 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LJ31-0AA0

3.3 V Nflash, 512 KB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LL31-0AA0

3.3 V Nflash, 2 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LM32-0AA0

3.3 V Nflash, 4 MB

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LP31-0AA0

3.3 V Nflash, 8 MB

SIMATIC S7, MPI cable

6ES7901-0BF00-0AA0

For linking SIMATIC S7 and PG via MPI 5 m

SIMATIC S7-300/ET 200M, slot label

6ES7912-0AA00-0AA0

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part
P. unit = 1

SIMATIC Manual Collection on DVD, 5 languages

6ES7998-8XC01-8YE0

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages

6ES7998-8XC01-8YE2

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

SIMATIC S7-300, spare part connector

6ES7391-1AA00-0AA0

For 24 V supply for S7-300 CPUs and FM352-5
10 units per packing unit

PC adapter USB A2 USB adapter (USB V2.0)

6GK1571-0BA00-0AA0

For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.

PROFIBUS DP RS 485 bus connector

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

6ES7972-0BA12-0XA0

15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

6ES7972-0BB12-0XA0

15.8 x 64 x 35.6 (WxHxD), terminating resistor with isolating function, with PG socket

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

6ES7972-0BA52-0XA0

FastConnect insulation displacement method, without PG socket
15.8 x 59 x 35.6 mm (WxHxD)

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Article No.
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0	Industrial Ethernet switch SCALANCE XC206-2SFP G IEC 62443-4-2 certified; 6x 100 Mbps RJ45 ports; 2x 100 Mbps ST/BFOC ports; 1x console port; diagnostics LED; redundant power supply; temperature range -40 °C to +70 °C; Mounting: DIN rail/S7 mounting rail/wall; redundancy functions; Office features (RSTP, VLAN, etc.); PROFINET IO device; Ethernet/IP-compliant C-PLUG slot.
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0	
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit	6ES7972-0BB52-0XB0	CSM 377 compact switch module Connection SIMATIC S7-300 and up to 3 additional stations to Industrial Ethernet with 10/100 Mbps unmanaged switch, 4 RJ45 ports, external 24 V DC power supply, LED diagnostics, S7-300 module, including electronic Equipment Manual on CD-ROM.
PROFIBUS bus connection plug With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.	6GK1500-0EA02	
PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10	IE FC RJ45 plugs Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.
SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.
PROFINET bus components Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.
FO standard cable GP (50/125) Standard cable, splittable, UL approval, max. length 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1873-2A	PROFIBUS/PROFINET bus components For establishing MPI/PROFIBUS/PROFINET communication

SIMATIC S7-300 Advanced Controllers

Central processing units

Fail-safe CPUs

CPU 319F-3 PN/DP

Overview



- The fail-safe CPU with high-performance command processing, large program memory and large quantity structure for demanding applications
- For constructing a fail-safe automation system for plants with increased safety requirements
- Complies with safety requirements to SIL 3 acc. to IEC 61508 and PL e acc. to ISO 13849.1
- Distributed fail-safe I/O modules can be locally connected via the integrated PROFINET interface (PROFIsafe) and/or via the integrated PROFIBUS DP interface (PROFIsafe);
- Fail-safe ET 200M I/O modules can also be connected centrally
- Standard modules for non-safety-related applications can be operated centrally and locally
- Distributed intelligence in Component Based Automation (CBA) on PROFINET
- Isochronous mode on PROFIBUS
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component Based Automation (CBA)

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data

Article No.

SIMATIC S7-300 CPU319F-3 PN/DP

6ES7318-3FL01-0AB0

Central processing unit with 2.5 MB work memory, 1st interface MPI/DP 12 Mbps, 2nd interface DP master/device, 3rd interface Ethernet PROFINET, Micro Memory Card required

Accessories

S7 Distributed Safety V5.4 SP5 Update 2 programming tool

Task:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit),
Windows 10 Professional/Enterprise (64-bit),
Windows Server 2008 R2 SP1 (64-bit),
Windows Server 2012 R2 (64-bit),
Windows Server 2016 (64-bit);
STEP 7 from V5.5 SP1;
Please also note the operating systems that have been released for the STEP 7 version used

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD

6ES7833-1FC02-0YA5

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading¹⁾

6ES7833-1FC02-0YH5

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F
Consignee email address required for delivery

S7 Distributed Safety upgrade

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, upgrade from V5.X to V5.4, upgrade license for 1 user, engineering software, software and documentation on DVD

6ES7833-1FC02-0YE5

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Article No.
STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.		SIMATIC S7, MPI cable For linking SIMATIC S7 and PG via MPI 5 m 6ES7901-0BF00-0AA0
		SIMATIC S7-300/ET 200M, slot label Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1 6ES7912-0AA00-0AA0
		SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT 6ES7998-8XC01-8YE0
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB 6ES7833-1FA23-0YA5		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice 6ES7998-8XC01-8YE2
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾ Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery 6ES7833-1FA23-0YH5		SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit 6ES7391-1AA00-0AA0
SIMATIC Micro Memory Card SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 64 KB 6ES7953-8LF31-0AA0		PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher. 6GK1571-0BA00-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 128 KB 6ES7953-8LG31-0AA0		PROFIBUS bus components PROFIBUS DP RS 485 bus connector SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket 6ES7972-0BA12-0XA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 512 KB 6ES7953-8LJ31-0AA0		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 (WxHxD), terminating resistor with isolating function, with PG socket 6ES7972-0BB12-0XA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 2 MB 6ES7953-8LL31-0AA0		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD) 6ES7972-0BA52-0XA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 4 MB 6ES7953-8LM32-0AA0		
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 8 MB 6ES7953-8LP31-0AA0		

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-300 Advanced Controllers

Central processing units

Fail-safe CPUs

CPU 319F-3 PN/DP

Ordering data

Article No.

Article No.

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

15.8 x 59 x 35.6 mm (WxHxD),
FastConnect insulation displacement method, without PG socket
100 units 6ES7972-0BA52-0XA0 per packing unit

6ES7972-0BA52-0XB0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

FastConnect insulation displacement method, with PG socket
15.8 x 59 x 35.6 mm (WxHxD)

6ES7972-0BB52-0XA0

SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet

15.8 x 59 x 35.6 mm (WxHxD),
FastConnect insulation displacement method, with PG socket
100 units 6ES7972-0BB52-0XA0 per packing unit

6ES7972-0BB52-0XB0

PROFIBUS bus connection plug

With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.

6GK1500-0EA02

PROFIBUS FC standard cable GP

2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.

6XV1830-0EH10

SIMATIC DP, RS-485 repeater

For connecting PROFIBUS/MPI bus systems with max. 31 nodes
max. 12 Mbps baud rate, degree of protection IP20 improved user handling

6ES7972-0AA02-0XA0

PROFINET bus components

Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A)

TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.

6XV1840-2AH10

FO standard cable GP (50/125)

Standard cable splittable, UL approval, max. length 1000 m, minimum order quantity 20 m, sold by the meter.

6XV1873-2A

Industrial Ethernet switch SCALANCE XC206-2SFP G

6GK5206-2GS00-2AC2

CSM 377 compact switch module

Connection SIMATIC S7-300 and up to 3 additional stations to Industrial Ethernet with 10/100 Mbps unmanaged switch, 4 RJ45 ports, external 24 V DC power supply, LED diagnostics, S7-300 module, including electronic Equipment Manual on CD-ROM.

6GK7377-1AA00-0AA0

IE FC RJ45 plugs

Industrial Ethernet FastConnect RJ45 plug 145 2x 2

RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 145° cable outlet
1 pack = 1 unit.

6GK1901-1BB30-0AA0

Industrial Ethernet FastConnect RJ45 plug 145 2x 2

RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 145° cable outlet
1 pack = 10 units.

6GK1901-1BB30-0AB0

Industrial Ethernet FastConnect RJ45 plug 145 2x 2

RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 145° cable outlet
1 pack = 50 units.

6GK1901-1BB30-0AE0

IE FC RJ45 plug 180

Industrial Ethernet FastConnect RJ45 plug 180 2x 2

RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet
1 pack = 1 unit.

6GK1901-1BB10-2AA0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2

RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet
1 pack = 10 units.

6GK1901-1BB10-2AB0

Industrial Ethernet FastConnect RJ45 plug 180 2x 2

RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet
1 pack = 50 units.

6GK1901-1BB10-2AE0

PROFIBUS/PROFINET bus components

For establishing MPI/PROFIBUS/PROFINET communication

See SiePortal

Technical specifications

Article number	6ES7315-6FF04-0AB0	6ES7315-2FJ14-0AB0	6ES7317-6FF04-0AB0	6ES7317-2FK14-0AB0	6ES7318-3FL01-0AB0
	CPU315F, 384KB	CPU315F-2 PN/DP, 512 KB	CPU317F-2DP, 1.5 MB	CPU317F-2 PN/DP, 1.5 MB	CPU319F-3 PN/DP, 2.5 MB
General information					
Product function					
• Isochronous mode	Yes	Yes; Via PROFIBUS DP or PROFINET interface		Yes; Via PROFIBUS DP or PROFINET interface	Yes; Via 2nd PROFIBUS DP or PROFINET interface
Engineering with					
• Programming package	STEP 7 V5.5 + SP1 or higher or STEP 7 V5.2 + SP1 or higher with HSP 218 + Distributed Safety	STEP 7 V5.5 or higher, Distributed Safety V5.4 SP4	STEP 7 V5.5 + SP1 or higher or STEP 7 V5.2 + SP1 or higher with HSP 202 + Distributed Safety	STEP 7 V5.5 or higher, Distributed Safety V5.4 SP4	STEP 7 V5.5 or higher, Distributed Safety V5.4 SP4
Supply voltage					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Memory					
Work memory					
• integrated	384 kbyte	512 kbyte	1 536 kbyte	1 536 kbyte	2 560 kbyte
• expandable	No	No	No	No	No
Load memory					
• Plug-in (MMC), max.	8 Mbyte	8 Mbyte	8 Mbyte	8 Mbyte	8 Mbyte
CPU processing times					
for bit operations, typ.	0.05 µs	0.05 µs	0.025 µs	0.025 µs	0.004 µs
for word operations, typ.	0.09 µs	0.09 µs	0.03 µs	0.03 µs	0.01 µs
for fixed point arithmetic, typ.	0.12 µs	0.12 µs	0.04 µs	0.04 µs	0.01 µs
for floating point arithmetic, typ.	0.45 µs	0.45 µs	0.16 µs	0.16 µs	0.04 µs
Counters, timers and their retentivity					
S7 counter					
• Number	256	256	512	512	2 048
IEC counter					
• present	Yes	Yes	Yes	Yes	Yes
S7 times					
• Number	256	256	512	512	2 048
IEC timer					
• present	Yes	Yes	Yes	Yes	Yes
Data areas and their retentivity					
Flag					
• Size, max.	2 048 byte	2 048 byte	4 096 byte	4 096 byte	8 192 byte
Address area					
I/O address area					
• Inputs	2 048 byte	2 048 byte	8 192 byte	8 192 byte	8 192 byte
• Outputs	2 048 byte	2 048 byte	8 192 byte	8 192 byte	8 192 byte
Process image					
• Inputs, adjustable	2 048 byte	2 048 byte	8 192 byte	8 192 byte	8 192 byte
• Outputs, adjustable	2 048 byte	2 048 byte	8 192 byte	8 192 byte	8 192 byte
Time of day					
Clock					
• Hardware clock (real-time)	Yes	Yes	Yes	Yes	Yes
Operating hours counter					
• Number	1	1	4	4	4
1. Interface					
Interface type	Integrated RS 485 interface	Integrated RS 485 interface	Integrated RS 485 interface	Integrated RS 485 interface	Integrated RS 485 interface
Interface types					
• RS 485	Yes	Yes	Yes	Yes	Yes
Protocols					
• MPI	Yes	Yes	Yes	Yes	Yes
• PROFIBUS DP master	No	Yes	Yes	Yes	Yes
• PROFIBUS DP slave	No	Yes	Yes; A DP slave at both interfaces simultaneously is not possible	Yes	Yes; A DP slave at both interfaces simultaneously is not possible
• Point-to-point connection	No	No	No	No	No

SIMATIC S7-300 Advanced Controllers

Central processing units
Fail-safe CPUs

Technical specifications

Technical specifications

Article number	6ES7315-6FF04-0AB0	6ES7315-2FJ14-0AB0	6ES7317-6FF04-0AB0	6ES7317-2FK14-0AB0	6ES7318-3FL01-0AB0
	CPU315F, 384KB	CPU315F-2 PN/DP, 512 KB	CPU317F-2DP, 1.5 MB	CPU317F-2 PN/DP, 1.5 MB	CPU319F-3 PN/DP, 2.5 MB
PROFIBUS DP master					
• Number of DP slaves, max.		124	124	124	124
2. Interface					
Interface type	Integrated RS 485 interface	PROFINET	Integrated RS 485 interface	PROFINET	Integrated RS 485 interface
Interface types					
• RJ 45 (Ethernet)		Yes		Yes	
• RS 485	Yes		Yes		Yes
• Number of ports		2		2	
Protocols					
• MPI	No	No	No	No	No
• PROFINET IO Controller		Yes; Also simultaneously with IO-Device functionality		Yes; Also simultaneously with IO-Device functionality	No
• PROFINET IO Device		Yes; Also simultaneously with IO Controller functionality		Yes; Also simultaneously with IO Controller functionality	No
• PROFINET CBA		Yes		Yes	No
• PROFIBUS DP master	Yes	No	Yes	No	Yes
• PROFIBUS DP slave	Yes	No	Yes; A DP slave at both interfaces simultaneously is not possible	No	Yes; A DP slave at both interfaces simultaneously is not possible
PROFIBUS DP master					
• Number of DP slaves, max.	124; Per station		124		124
PROFINET IO Controller					
Services					
- Number of connectable IO Devices, max.		128		128	
- Of which IO devices with IRT, max.		64		64	
- Number of IO Devices with IRT and the option "high flexibility"		128		128	
- Number of connectable IO Devices for RT, max.		128		128	
3. Interface					
Interface type					PROFINET
Interface types					
• RJ 45 (Ethernet)					Yes
• Number of ports					2
Protocols					
• MPI					No
• PROFINET IO Controller					Yes; Also simultaneously with I-Device functionality
• PROFINET IO Device					Yes; Also simultaneously with IO Controller functionality
• PROFINET CBA					Yes
• PROFIBUS DP master					No
• PROFIBUS DP slave					No
PROFINET IO Controller					
Services					
- Number of connectable IO Devices, max.					256
- Of which IO devices with IRT, max.					64
- Number of IO Devices with IRT and the option "high flexibility"					256
- Number of connectable IO Devices for RT, max.					256

5

Technical specifications

Article number	6ES7315-6FF04-0AB0	6ES7315-2FJ14-0AB0	6ES7317-6FF04-0AB0	6ES7317-2FK14-0AB0	6ES7318-3FL01-0AB0
	CPU315F, 384KB	CPU315F-2 PN/DP, 512 KB	CPU317F-2DP, 1.5 MB	CPU317F-2 PN/DP, 1.5 MB	CPU319F-3 PN/DP, 2.5 MB
Protocols					
Open IE communication					
• TCP/IP		Yes; via integrated PROFINET interface and loadable FBs		Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.		8		16	32
• ISO-on-TCP (RFC1006)		Yes; via integrated PROFINET interface and loadable FBs		Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.		8		16	32
• UDP		Yes; via integrated PROFINET interface and loadable FBs		Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.		8		16	32
Web server					
• supported		Yes; only read function		Yes	Yes
communication functions / header					
PG/OP communication	Yes	Yes	Yes	Yes	Yes
Data record routing	Yes	Yes	Yes	Yes	Yes
Global data communication					
• supported	Yes	Yes	Yes	Yes	Yes
S7 basic communication					
• communication function / S7 basic communication	Yes	Yes	Yes	Yes	Yes
S7 communication					
• supported	Yes	Yes	Yes	Yes	Yes
S5 compatible communication					
• supported	Yes; via CP and loadable FC	Yes; via CP and loadable FC	Yes; via CP and loadable FC	Yes; via CP and loadable FC	Yes; via CP and loadable FC
Number of connections					
• overall	16	16	32	32	32
Ambient conditions					
Ambient temperature during operation					
• min.	0 °C	0 °C	0 °C	0 °C	0 °C
• max.	60 °C	60 °C	60 °C	60 °C	60 °C
configuration / header					
configuration / programming / header					
Programming language					
- LAD	Yes	Yes	Yes	Yes	Yes
- FBD	Yes	Yes	Yes	Yes	Yes
- STL	Yes	Yes	Yes	Yes	Yes
- SCL	Yes	Yes	Yes	Yes	Yes
- CFC	Yes	Yes	Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes	Yes	Yes
- HiGraph®	Yes	Yes	Yes	Yes	Yes
Know-how protection					
• User program protection/ password protection	Yes	Yes	Yes	Yes	Yes
• Block encryption	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy
Dimensions					
Width	40 mm	40 mm	40 mm	40 mm	120 mm
Height	125 mm	125 mm	125 mm	125 mm	125 mm
Depth	130 mm	130 mm	130 mm	130 mm	130 mm
Weights					
Weight, approx.	290 g	340 g	360 g	340 g	1 250 g

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 fail-safe CPUs

SIPLUS S7-300 CPU 315F-2 DP

Overview



- For configuring a fail-safe automation system for plants with increased safety requirements
- Complies with safety requirements up to SIL 3 according to IEC 61508 and up to Cat. 4 according to EN 954-1
- Distributed fail-safe I/O modules can be connected through the integral PROFIBUS DP interface (PROFIsafe)
- Fail-safe ET 200M I/O modules are also centrally connectable
- The standard modules for non-safety applications can be operated both centrally and locally

Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS S7-300 CPU 315F-2 DP

For industrial applications with extended ambient conditions

CPU for SIPLUS S7-300F; 384 KB work memory, supply voltage 24 V DC, MPI, PROFIBUS DP master/slave interface, incl. slot number labels; MMC required

Extended temperature range and exposure to environmental substances

6AG1315-6FF04-2AB0

Accessories

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0

6AG1972-0BB12-2XA0

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0

6AG1972-0BB42-7XA0

(Extended temperature range)

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

6AG1500-0EA02-2AA0

PROFIBUS FastConnect bus cable

6XV1830-0EH10

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m

RS 485 repeater for PROFIBUS

6AG1972-0AA02-7XA0

(Extended temperature range and exposure to environmental substances)

Transmission rate up to 12 Mbps; 24 V DC; IP20 enclosure

For commissioning

MPI cable

6ES7901-0BF00-0AA0

For connection of SIMATIC S7 and PG via MPI; length 5 m

USB A2 PC adapter

6GK1571-0BA00-0AA0

For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery

SIMATIC S7-300 Advanced ControllersCentral processing units
SIPLUS S7-300 fail-safe CPUs**SIPLUS S7-300 CPU 315F-2 DP**

Ordering data	Article No.	Article No.
<p>S7 Distributed Safety V5.4 SP5 Update 2 programming tool</p> <p>Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP</p> <p>Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 as of V5.5 SP1; Please also consider the operating systems that have been released for the used STEP 7 version</p> <p>Floating license for 1 user, software and documentation on DVD; license key on USB flash drive</p> <p>Floating license for 1 user, software, documentation and license key for download¹⁾; email address required for delivery</p>	<p>6ES7833-1FC02-0YA5</p> <p>6ES7833-1FC02-0YH5</p>	<p>STEP 7 Safety Advanced V17</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco</p> <p>Requirement: STEP 7 Professional V17</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p> <p>Floating license for 1 user; license key on USB flash drive</p> <p>Floating license for 1 user, license key for download¹⁾; email address required for delivery</p>
<p>S7 Distributed Safety upgrade</p> <p>From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive</p>	<p>6ES7833-1FC02-0YE5</p>	<p><i>Consumables</i></p> <p>Power supply connector 6ES7391-1AA00-0AA0</p> <p>10 units, spare part</p> <p>Slot number plates 6ES7912-0AA00-0AA0</p>
		<p><i>Documentation</i></p> <p>SIMATIC Manual Collection 6ES7998-8XC01-8YE0</p> <p>Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p> <p>SIMATIC Manual Collection update service for 1 year 6ES7998-8XC01-8YE2</p> <p>Current Manual Collection DVD and the three subsequent updates</p>

¹⁾ For up-to-date information and download availability, see:
<http://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 fail-safe CPUs

SIPLUS S7-300 CPU 315F-2 PN/DP

Overview



- The CPU with a medium sized program memory and quantity structures to build a fail-safe automation system for plants with increased safety requirements
- Complies with safety requirements up to SIL 3 according to IEC 61508, PL e in accordance with ISO 13849 and up to Cat. 4 of EN 954-1
- The fail-safe I/O modules can be locally connected to the integrated PROFINET interface (PROFIsafe) and/or to the integrated PROFIBUS DP interface (PROFIsafe)
- Fail-safe ET 200M I/O modules are also centrally connectable
- The standard modules for non-safety applications can be operated both centrally and locally
- Component Based Automation (CBA) on PROFINET
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET interface with 2-port switch
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component Based Automation (CBA)

Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS S7-300 CPU 315F-2 PN/DP

For industrial applications with extended ambient conditions

CPU for SIPLUS S7-300F;
512 KB work memory,
supply voltage 24 V DC,
MPI/PROFIBUS DP master/slave
interface, Industrial Ethernet/
PROFINET interface;
incl. slot number labels

Extended temperature range
and exposure to environmental
substances

6AG1315-2FJ14-2AB0

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range
and exposure to environmental
substances)

With 90° cable outlet,
max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0
6AG1972-0BB12-2XA0

With angled cable outlet,
max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0
6AG1972-0BB42-7XA0

(Extended temperature range)

With axial cable outlet for
SIMATIC OP, for connecting to PPI,
MPI, PROFIBUS

6AG1500-0EA02-2AA0

RS 485 repeater for PROFIBUS

(Extended temperature range
and exposure to environmental
substances)

Transmission rate up to 12 Mbps;
24 V DC; IP20 enclosure

6AG1972-0AA02-7XA0

IE FC RJ45 plug 180

(Extended temperature range
and exposure to environmental
substances)

- 180° cable outlet
- 1 unit

6AG1901-1BB10-7AA0

SIPLUS SCALANCE XC-200 Industrial Ethernet switches

Industrial Ethernet switches with
integrated SNMP access, web
diagnostics, copper cable
diagnostics and PROFINET
diagnostics for configuring line, star
and ring topologies; with integrated
redundancy manager; incl.
operating instructions, Industrial
Ethernet network manual and
configuration software on CD-ROM

Extended temperature range
and exposure to environmental
substances

SIMATIC S7-300 Advanced Controllers

Central processing units
SIPLUS S7-300 fail-safe CPUs

SIPLUS S7-300 CPU 315F-2 PN/DP

Ordering data	Article No.	Ordering data	Article No.
Switches with PROFINET delivery state • SIPLUS SCALANCE XC206-2 (ST/BFOC) with six RJ45 ports 10/100 Mbps and two ST/BFOC ports 100 Mbps	6AG1206-2BB00-7AC2	S7 Distributed Safety upgrade From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive	6ES7833-1FC02-0YE5
PROFIBUS FastConnect bus cable Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m	6XV1830-0EH10	STEP 7 Safety Advanced V17 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco Requirement: STEP 7 Professional V17 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.	
IE FC TP standard cable GP 2x2 4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; Sold by the meter	6XV1840-2AH10	Floating license for 1 user; license key on USB flash drive	6ES7833-1FA17-0YA5
FO standard cable GP (50/125)	6XV1873-2A	Floating license for 1 user, license key for download ¹⁾ ; email address required for delivery	6ES7833-1FA17-0YH5
<i>For commissioning</i>		<i>Consumables</i>	
MPI cable For connection of SIMATIC S7 and PG via MPI; length 5 m	6ES7901-0BF00-0AA0	Power supply connector 10 units, spare part	6ES7391-1AA00-0AA0
USB A2 PC adapter For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery	6GK1571-0BA00-0AA0	Slot number plates	6ES7912-0AA00-0AA0
S7 Distributed Safety V5.4 SP5 Update 2 programming tool Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 as of V5.5 SP1; Please also consider the operating systems that have been released for the used STEP 7 version		<i>Documentation</i>	
Floating license for 1 user, software and documentation on DVD; license key on USB flash drive	6ES7833-1FC02-0YA5	SIMATIC Manual Collection Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
Floating license for 1 user, software, documentation and license key for download ¹⁾ ; email address required for delivery	6ES7833-1FC02-0YH5	SIMATIC Manual Collection update service for 1 year Current Manual Collection DVD and the three subsequent updates	6ES7998-8XC01-8YE2

¹⁾ For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 fail-safe CPUs

SIPLUS S7-300 CPU 317F-2 DP

Overview



- The fail-safe CPU with a large program memory and quantity framework for demanding applications
- For configuring a fail-safe automation system for plants with increased safety requirements
- Complies with safety requirements up to SIL 3 according to IEC 61508 and up to Cat. 4 according to EN 954-1
- Fail-safe I/O modules can be connected in a distributed configuration to both integral PROFIBUS DP interfaces (PROFIsafe)
- Fail-safe ET 200M I/O modules are also centrally connectable
- The standard modules for non-safety applications can be operated both centrally and locally

Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS S7-300 CPU 317F-2 DP

For industrial applications with extended ambient conditions

CPU for SIPLUS S7-300F, 1.5 MB work memory, supply voltage 24 V DC, MPI, PROFIBUS DP master/slave interface; MMC required

Extended temperature range and exposure to environmental substances

6AG1317-6FF04-2AB0

Accessories

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0

6AG1972-0BB12-2XA0

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0

6AG1972-0BB42-7XA0

(Extended temperature range)

6AG1500-0EA02-2AA0

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

PROFIBUS FastConnect bus cable

6XV1830-0EH10

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m

RS 485 repeater for PROFIBUS

6AG1972-0AA02-7XA0

(Extended temperature range and exposure to environmental substances)

Transmission rate up to 12 Mbps; 24 V DC; IP20 enclosure

For commissioning

MPI cable

6ES7901-0BF00-0AA0

For connection of SIMATIC S7 and PG via MPI; length 5 m

USB A2 PC adapter

6GK1571-0BA00-0AA0

For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery

SIMATIC S7-300 Advanced ControllersCentral processing units
SIPLUS S7-300 fail-safe CPUs**SIPLUS S7-300 CPU 317F-2 DP**

Ordering data	Article No.	Article No.
<p>S7 Distributed Safety V5.4 SP5 Update 2 programming tool</p> <p>Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP</p> <p>Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 as of V5.5 SP1; Please also consider the operating systems that have been released for the used STEP 7 version</p> <p>Floating license for 1 user, software and documentation on DVD; license key on USB flash drive</p> <p>Floating license for 1 user, software, documentation and license key for download¹⁾; email address required for delivery</p>	<p>6ES7833-1FC02-0YA5</p> <p>6ES7833-1FC02-0YH5</p>	<p>STEP 7 Safety Advanced V17</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco</p> <p>Requirement: STEP 7 Professional V17</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p> <p>Floating license for 1 user; license key on USB flash drive</p> <p>Floating license for 1 user, license key for download¹⁾; email address required for delivery</p>
<p>S7 Distributed Safety upgrade</p> <p>From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive</p>	<p>6ES7833-1FC02-0YE5</p>	<p><i>Consumables</i></p> <p>Power supply connector 6ES7391-1AA00-0AA0</p> <p>10 units, spare part</p> <p>Slot number plates 6ES7912-0AA00-0AA0</p>
		<p><i>Documentation</i></p> <p>SIMATIC Manual Collection 6ES7998-8XC01-8YE0</p> <p>Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p> <p>SIMATIC Manual Collection update service for 1 year 6ES7998-8XC01-8YE2</p> <p>Current Manual Collection DVD and the three subsequent updates</p>

¹⁾ For up-to-date information and download availability, see:
<http://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 fail-safe CPUs

SIPLUS S7-300 CPU 317F-2 PN/DP

Overview



- The failsafe CPU with a large program memory and quantity structures for demanding applications to build a fail-safe automation system for plants with increased safety requirements
- Complies with safety requirements up to SIL 3 according to IEC 61508, PL e in accordance with ISO 13849-1 and up to category 4 of EN 954-1
- The fail-safe I/O modules can be locally connected via the integrated PROFINET interface (PROFIsafe) and/or via the integrated PROFIBUS DP interface (PROFIsafe)
- Fail-safe ET 200M I/O modules are also centrally connectable
- The standard modules for non-safety applications can be operated both centrally and locally
- Component Based Automation (CBA) on PROFINET
- PROFINET IO Controller for operating distributed I/O on PROFINET
- PROFINET interface with 2-port switch
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component Based Automation (CBA)

SIMATIC Micro Memory Card required for operation of CPU.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS S7-300 CPU 317F-2 PN/DP

For industrial applications with extended ambient conditions

CPU for SIPLUS S7-300F, 1.5 MB work memory, supply voltage 24 V DC, MPI/PROFIBUS DP master/slave interface; Industrial Ethernet/PROFINET interface; MMC required

Extended temperature range and exposure to environmental substances

6AG1317-2FK14-2AB0

Accessories

Mandatory

SIMATIC Micro Memory Card

64 KB

6ES7953-8LF31-0AA0

128 KB

6ES7953-8LG31-0AA0

512 KB

6ES7953-8LJ31-0AA0

2 MB

6ES7953-8LL31-0AA0

4 MB

6ES7953-8LM32-0AA0

8 MB

6ES7953-8LP31-0AA0

For communication within the application

PROFIBUS DP RS 485 bus connector

(Extended temperature range and exposure to environmental substances)

With 90° cable outlet, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0
6AG1972-0BB12-2XA0

With angled cable outlet, max. transmission rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0
6AG1972-0BB42-7XA0

(Extended temperature range)

6AG1500-0EA02-2AA0

With axial cable outlet for SIMATIC OP, for connecting to PPI, MPI, PROFIBUS

RS 485 repeater for PROFIBUS

6AG1972-0AA02-7XA0

(Extended temperature range and exposure to environmental substances)

Transmission rate up to 12 Mbps; 24 V DC; IP20 enclosure

IE FC RJ45 plug 180

(Extended temperature range and exposure to environmental substances)

180° cable outlet

- 1 unit

6AG1901-1BB10-7AA0

Ordering data	Article No.	Article No.
SIPLUS SCALANCE XC-200 Industrial Ethernet switches Industrial Ethernet switches with integrated SNMP access, web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; with integrated redundancy manager; incl. operating instructions, Industrial Ethernet network manual and configuration software on CD-ROM Extended temperature range and exposure to environmental substances Switches with PROFINET delivery state • SIPLUS SCALANCE XC206-2 (ST/BFOC) with six RJ45 ports 10/100 Mbps and two ST/BFOC ports 100 Mbps	6AG1206-2BB00-7AC2	Floating license for 1 user, software and documentation on DVD; license key on USB flash drive Floating license for 1 user, software, documentation and license key for download ¹⁾ ; email address required for delivery S7 Distributed Safety upgrade From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive STEP 7 Safety Advanced V17 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco Requirement: STEP 7 Professional V17 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case. Floating license for 1 user; license key on USB flash drive Floating license for 1 user, license key for download ¹⁾ ; email address required for delivery Consumables Power supply connector 10 units, spare part Slot number plates Documentation SIMATIC Manual Collection Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT SIMATIC Manual Collection update service for 1 year Current Manual Collection DVD and the three subsequent updates
PROFIBUS FastConnect bus cable Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m	6XV1830-0EH10	6ES7833-1FC02-0YA5
IE FC TP standard cable GP 2x2 4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; Sold by the meter	6XV1840-2AH10	6ES7833-1FC02-0YH5
FO standard cable GP (50/125) <i>For commissioning</i>	6XV1873-2A	6ES7833-1FA17-0YA5
MPI cable For connection of SIMATIC S7 and PG via MPI; length 5 m	6ES7901-0BF00-0AA0	6ES7833-1FA17-0YH5
USB A2 PC adapter For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of delivery	6GK1571-0BA00-0AA0	
S7 Distributed Safety V5.4 SP5 Update 2 programming tool Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 as of V5.5 SP1; Please also consider the operating systems that have been released for the used STEP 7 version		6ES7391-1AA00-0AA0
		6ES7912-0AA00-0AA0
		6ES7998-8XC01-8YE0
		6ES7998-8XC01-8YE2

¹⁾ For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-300 Advanced Controllers

Central processing units

SIPLUS S7-300 fail-safe CPUs

Technical specifications

Technical specifications

Article number	6AG1315-6FF04-2AB0	6AG1315-2FJ14-2AB0
Based on	6ES7315-6FF04-0AB0	6ES7315-2FJ14-0AB0
	SIPLUS S7-300 CPU 315F-2DP	SIPLUS S7-300 CPU315F-2PN/DP
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C	-25 °C; = Tmin
• max.	60 °C	60 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

5

Technical specifications

Article number	6AG1317-6FF04-2AB0	6AG1317-2FK14-2AB0
Based on	6ES7317-6FF04-0AB0 SIPLUS S7-300 CPU317F-2DP	6ES7317-2FK14-0AB0 SIPLUS S7-300 CPU317F-2PN/DP
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C; = Tmin	-25 °C; = Tmin
• max.	60 °C; = Tmax	60 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

Central processing units
Technology CPUs

CPU 315T-3 PN/DP

Overview



- SIMATIC CPU with integral technology/motion control functionality
- With full standard CPU 315-2 PN/DP functionality (except for CBA)
- For cross-industry automation tasks in series machine, special machine and plant construction
- Ideal for synchronized motion, such as coupling to a virtual/real master, gear synchronization, cam disk, path interpolation, or print mark compensation
- 3D path interpolation with different kinematics
- Position and pressure-regulated hydraulic axes
- Used as central controller in production lines with central and distributed I/O
- With integrated I/O for high-speed technology functions (e.g. camming, reference point acquisition)
- PROFIBUS DP (DRIVE) interface for isochronous connection of drive components
- PROFINET interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- One common S7 user program for control and motion control tasks (no additional programming language necessary for motion control)
- "S7 Technology" option package required (version V4.2 SP3 and higher)

SIMATIC Micro Memory Card (8 MB) required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-300, CPU 315T-3 PN/DP

6ES7315-7TJ10-0AB0

Central processing unit for PLC and technology tasks, 384 KB work memory, 1st interface MPI/DP 12 Mbps, 2nd interface DP (drive), 3rd interface Ethernet PROFINET, with 2-port switch, integr. I/O for technology, front connector (1x 40-pin) and Micro Memory Card min. 8 MB required

Accessories

S7 Technology V4.2

Task:

Option package for configuring and programming technology tasks with SIMATIC S7 CPU 31xT and SIMATIC S7 CPU 317TF

Requirement:

STEP 7 V5.6 and higher

Type of delivery:

On DVD

Incl. documentation for CPU 31xT, CPU 317TF (included on DVD)

SIMATIC S7, S7-Technology V4.2 incl. current Service Pack

6ES7864-1CC42-0YA5

Option package for STEP 7 for parameterization and programming of technological user programs, floating license for 1 user, engineering software, software and documentation on DVD, license key on USB flash drive, class A, 4 languages (en, de, fr, it), runs on Windows 7 (32/64-bit), reference hardware: S7-315T, S7-317T, S7-317TF, Microbox 420-T

SIMATIC S7, S7-Technology V4.2

6ES7864-1CC42-0XH5

Option package for STEP 7, license key download¹⁾, floating license for 1 user, for parameterization and programming of technological user programs, class A, runs on Windows XP (32-bit), Windows 7 (32/64-bit), reference hardware: S7-315T, S7-317T, S7-317TF, Microbox 420-T
Consignee email address required for delivery

SIMATIC Micro Memory Card

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

6ES7953-8LP31-0AA0

3.3 V Nflash, 8 MB

SIMATIC S7, MPI cable

6ES7901-0BF00-0AA0

For linking SIMATIC S7 and PG via MPI 5 m

Front connectors

SIMATIC S7-300, front connector

6ES7392-1AM00-0AA0

With screw contacts, 40-pin

SIMATIC S7-300, front connector

6ES7392-1AM00-1AB0

With screw contacts, 40-pin, 100 units per packing unit

SIMATIC S7-300, front connector

6ES7392-1BM01-0AA0

For signal modules with spring-loaded contacts, 40-pin

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Article No.
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit	6ES7392-1BM01-1AB0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit
SIMATIC S7-300/ET 200M, slot label Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	6ES7912-0AA00-0AA0	PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0	PROFIBUS bus components
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket
SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit
Labeling sheets for machine labeling		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0	PROFIBUS bus connection plug With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0	PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.

SIMATIC S7-300 Advanced Controllers

Central processing units
Technology CPUs

CPU 315T-3 PN/DP

Ordering data	Article No.	Ordering data	Article No.
SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0	IE FC RJ45 plugs Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
PROFINET bus components Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
FO standard cable GP (50/125) Standard cable, splittable, UL approval, max. length 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1873-2A	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
Industrial Ethernet switch SCALANCE XC206-2SFP G IEC 62443-4-2 certified; 6x 100 Mbps RJ45 ports; 2x 100 Mbps ST/BFOC ports; 1x console port; diagnostics LED; redundant power supply; temperature range -40 °C to +70 °C; mounting: DIN rail/S7 mounting rail/wall; redundancy functions; Office features (RSTP, VLAN, etc.); PROFINET IO device; Ethernet/IP-compliant C-PLUG slot.	6GK5206-2GS00-2AC2	PROFIBUS/PROFINET bus components For establishing MPI/PROFIBUS/PROFINET communication	See SiePortal
CSM 377 compact switch module Connection SIMATIC S7-300 and up to 3 additional stations to Industrial Ethernet with 10/100 Mbps unmanaged switch, 4 RJ45 ports, external 24 V DC power supply, LED diagnostics, S7-300 module, including electronic Equipment Manual on CD-ROM.	6GK7377-1AA00-0AA0		

5

Overview



- SIMATIC CPU with integral technology/motion control functionality
- With full standard CPU 317-2 PN/DP functionality (except for CBA)
- For cross-industry automation tasks in series machine, special machine and plant construction
- Ideal for synchronized motion, such as coupling to a virtual/real master, gear synchronization, cam disk, path interpolation, or print mark compensation
- 3D path interpolation with different kinematics
- Position and pressure-regulated hydraulic axes
- Used as central controller in production lines with central and distributed I/O
- With integrated I/O for high-speed technology functions (e.g. camming, reference point acquisition)
- PROFIBUS DP (DRIVE) interface for isochronous connection of drive components
- PROFINET interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- One common S7 user program for control and motion control tasks (no additional programming language necessary for motion control)
- "S7 Technology" option package required (version V4.2 SP3 and higher)

SIMATIC Micro Memory Card (8 MB) required for operation of the CPU.

Ordering data

Article No.

**SIMATIC S7-300,
CPU 317T-3 PN/DP**

6ES7317-7TK10-0AB0

Central processing unit for PLC and technology tasks, 1024 KB work memory, 1st interface MPI/DP 12 Mbps, 2nd interface DP (drive), 3rd interface Ethernet PROFINET with 2-port switch, integrated I/O for technology, front connector (1x 40-pin) and Micro Memory Card min. 8 MB required

Accessories**S7 Technology V4.2**

Task:

Option package for configuring and programming technology tasks with SIMATIC S7 CPU 31xT and SIMATIC S7 CPU 317TF

Requirement:

STEP 7 V5.6 and higher

Type of delivery:

On DVD

Incl. documentation for CPU 31xT, CPU 317TF (included on DVD)

**SIMATIC S7, S7-Technology V4.2
incl. current Service Pack**

6ES7864-1CC42-0YA5

Option package for STEP 7 for parameterization and programming of technological user programs, floating license for 1 user, engineering software, software and documentation on DVD, license key on USB flash drive, class A, 4 languages (en, de, fr, it), runs on Windows 7 (32/64-bit), reference hardware: S7-315T, S7-317T, S7-317TF, Microbox 420-T

SIMATIC S7, S7-Technology V4.2

6ES7864-1CC42-0XH5

Option package for STEP 7, license key download¹⁾, floating license for 1 user, for parameterization and programming of technological user programs, class A, runs on Windows XP (32-bit), Windows 7 (32/64-bit), reference hardware: S7-315T, S7-317T, S7-317TF, Microbox 420-T
Consignee email address required for delivery

SIMATIC Micro Memory Card**SIMATIC S7, Micro Memory Card
for S7-300/C7/ET 200**

6ES7953-8LP31-0AA0

3.3 V Nflash, 8 MB

SIMATIC S7, MPI cable

6ES7901-0BF00-0AA0

For linking SIMATIC S7 and PG via MPI 5 m

Front connectors**SIMATIC S7-300, front connector**

6ES7392-1AM00-0AA0

With screw contacts, 40-pin

SIMATIC S7-300, front connector

6ES7392-1AM00-1AB0

With screw contacts, 40-pin, 100 units per packing unit

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-300 Advanced Controllers

Central processing units
Technology CPUs

CPU 317T-3 PN/DP

5

Ordering data	Article No.	Article No.
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin	6ES7392-1BM01-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit	6ES7392-1BM01-1AB0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit
SIMATIC S7-300/ET 200M, slot label Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	6ES7912-0AA00-0AA0	PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0	PROFIBUS bus components
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket
SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit
Labeling sheets for machine labeling		SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, with PG socket 15.8 x 59 x 35.6 mm (WxHxD)
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0	SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit
		PROFIBUS bus connection plug With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.

Ordering data	Article No.	Article No.	
PROFIBUS FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10		
SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0		
PROFINET bus components			
Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10		
FO standard cable GP (50/125) Standard cable, splittable, UL approval, max. length 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1873-2A		
Industrial Ethernet switch SCALANCE XC206-2SFP G IEC 62443-4-2 certified; 6x 100 Mbps RJ45 ports; 2x 100 Mbps ST/BFOC ports; 1x console port; diagnostics LED; redundant power supply; temperature range -40 °C to +70 °C; mounting: DIN rail/S7 mounting rail/wall; redundancy functions; Office features (RSTP, VLAN, etc.); PROFINET IO device; Ethernet/IP-compliant C-PLUG slot.	6GK5206-2GS00-2AC2		
CSM 377 compact switch module Connection SIMATIC S7-300 and up to 3 additional stations to Industrial Ethernet with 10/100 Mbps unmanaged switch, 4 RJ45 ports, external 24 V DC power supply, LED diagnostics, S7-300 module, including electronic Equipment Manual on CD-ROM.	6GK7377-1AA00-0AA0		
		IE FC RJ45 plugs	
		Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
		Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
		Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
		PROFIBUS/PROFINET bus components For establishing MPI/PROFIBUS/PROFINET communication	See SiePortal

SIMATIC S7-300 Advanced Controllers

Central processing units
Technology CPUs

CPU 317TF-3 PN/DP

Overview



- Fail-safe SIMATIC CPU 317TF-3 PN/DP with integral technology/motion control functionality
- Spare-part-compatible successor to the CPU 317TF-2 DP (Article No. 6ES7317-6TF14-0AB0)
- With full functionality of the standard CPU 317-2 PN/DP and CPU 317F-2 PN/DP (except for CBA)
- For cross-industry automation tasks in series machine, special machine and plant construction
- Ideal for synchronized motion, such as coupling to a virtual/real master, gear synchronization, cam disk, path interpolation, or print mark compensation
- 3D path interpolation with different kinematics
- Position and pressure-regulated hydraulic axes
- Used as central controller in production lines with central and distributed I/O
- With integrated I/O for high-speed technology functions (e.g. camming, reference point acquisition)
- PROFIBUS DP (DRIVE) interface for isochronous connection of drive components
- PROFINET interface with 2-port switch
- PROFINET IO controller for operating distributed I/O on PROFINET
- One common S7 user program for control and motion control tasks (no additional programming language necessary for motion control)
- "S7 Technology" option package required
- "S7 Distributed Safety" option package required (version V4.2 SP3 and higher)

SIMATIC Micro Memory Card (8 MB) required for operation of the CPU.

Ordering data

Article No.

SIMATIC S7-300, CPU 317TF-3 PN/DP

6ES7317-7UL10-0AB0

Central processing unit for PLC, technology and safety tasks, 1.5 MB work memory, 1st interface MPI/DP 12 Mbps, 2nd interface DP (drive), 3rd interface Ethernet PROFINET with 2-port switch, integrated I/O for technology, front connector (1x 40-pin) and Micro Memory Card min. 8 MB required

Accessories

S7 Technology V4.2

Task:

Option package for configuring and programming technology tasks with SIMATIC S7 CPU 31xT and SIMATIC S7 CPU 317TF

Requirement:

STEP 7 V5.6 and higher

Type of delivery:

On DVD

Incl. documentation for CPU 31xT, CPU 317TF (included on DVD)

SIMATIC S7, S7-Technology V4.2 incl. current Service Pack

6ES7864-1CC42-0YA5

Option package for STEP 7 for parameterization and programming of technological user programs, floating license for 1 user, engineering software, software and documentation on DVD, license key on USB flash drive, class A, 4 languages (en, de, fr, it), runs on Windows 7 (32/64-bit), reference hardware: S7-315T, S7-317T, S7-317TF, Microbox 420-T

SIMATIC S7, S7-Technology V4.2

6ES7864-1CC42-0XH5

Option package for STEP 7, license key download¹⁾, floating license for 1 user, for parameterization and programming of technological user programs, class A, runs on Windows XP (32-bit), Windows 7 (32/64-bit), reference hardware: S7-315T, S7-317T, S7-317TF, Microbox 420-T
Consignee email address required for delivery

S7 Distributed Safety V5.4 SP5 Update 2 programming tool

Task:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F	6ES7833-1FC02-0YA5	SIMATIC S7-300/ET 200M, slot label Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	6ES7912-0AA00-0AA0
SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading¹⁾ Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F Consignee email address required for delivery	6ES7833-1FC02-0YH5	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
S7 Distributed Safety upgrade		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7, F-programming tool S7 Distributed Safety V5.4 Upgrade from V5.X to V5.4, upgrade license for 1 user, E-SW, software and documentation on DVD, Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F	6ES7833-1FC02-0YE5	SIMATIC S7-300, spare part connector For 24 V supply for S7-300 CPUs and FM352-5 10 units per packing unit	6ES7391-1AA00-0AA0
SIMATIC Micro Memory Card		SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3.3 V Nflash, 8 MB	6ES7953-8LP31-0AA0	SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector 10 units per packing unit	6ES7392-2XY00-0AA0
SIMATIC S7, MPI cable For linking SIMATIC S7 and PG via MPI 5 m	6ES7901-0BF00-0AA0	Labeling sheets for machine labeling	
Front connectors		SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0
SIMATIC S7-300, front connector With screw contacts, 40-pin	6ES7392-1AM00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0
SIMATIC S7-300, front connector With screw contacts, 40-pin, 100 units per packing unit	6ES7392-1AM00-1AB0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin	6ES7392-1BM01-0AA0		
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit	6ES7392-1BM01-1AB0		

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-300 Advanced Controllers

Central processing units
Technology CPUs

CPU 317TF-3 PN/DP

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0	SIMATIC DP, RS-485 repeater For connecting PROFIBUS/MPI bus systems with max. 31 nodes max. 12 Mbps baud rate, degree of protection IP20 improved user handling	6ES7972-0AA02-0XA0
PC adapter USB A2 USB adapter (USB V2.0) For connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI 5 m USB cable included, 0.3 m MPI cable can be used under Windows XP/Vista/Windows 7 32/64-bit and higher.	6GK1571-0BA00-0AA0	PROFINET bus components	
PROFINET bus components		Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, without PG socket	6ES7972-0BA12-0XA0	FO standard cable GP (50/125) Standard cable, splittable, UL approval, max. length 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1873-2A
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 64 x 35.6 mm (WxHxD), terminating resistor with isolating function, with PG socket	6ES7972-0BB12-0XA0	Industrial Ethernet switch SCALANCE XC206-2SFP G IEC 62443-4-2 certified; 6x 100 Mbps RJ45 ports; 2x 100 Mbps ST/BFOC ports; 1x console port; diagnostics LED; redundant power supply; temperature range -40 °C to +70 °C; mounting: DIN rail/S7 mounting rail/wall; redundancy functions; Office features (RSTP, VLAN, etc.); PROFINET IO device; Ethernet/IP-compliant C-PLUG slot.	6GK5206-2GS00-2AC2
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, without PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BA52-0XA0	CSM 377 compact switch module Connection SIMATIC S7-300 and up to 3 additional stations to Industrial Ethernet with 10/100 Mbps unmanaged switch, 4 RJ45 ports, external 24 V DC power supply, LED diagnostics, S7-300 module, including electronic Equipment Manual on CD-ROM.	6GK7377-1AA00-0AA0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, without PG socket 100 units 6ES7972-0BA52-0XA0 per packing unit	6ES7972-0BA52-0XB0	IE FC RJ45 plugs	
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet FastConnect insulation displacement method, With PG socket 15.8 x 59 x 35.6 mm (WxHxD)	6ES7972-0BB52-0XA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
SIMATIC DP, connection plug for PROFIBUS up to 12 Mbps 90° cable outlet 15.8 x 59 x 35.6 mm (WxHxD), FastConnect insulation displacement method, with PG socket 100 units 6ES7972-0BB52-0XA0 per packing unit	6ES7972-0BB52-0XB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
PROFINET bus connection plug With axial cable outlet for industrial PC, SIMATIC OP, OLM; transfer rate 12 Mbps; terminating resistor with isolating function, metal enclosure.	6GK1500-0EA02	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
PROFINET FC standard cable GP 2-core bus cable, shielded, special design for fast installation, delivery unit: max. 1000 m, minimum order quantity 20 m, sold by the meter.	6XV1830-0EH10	PROFINET/PROFINET bus components For establishing MPI/PROFINET/PROFINET communication	See SiePortal

Technical specifications

Article number	6ES7315-7TJ10-0AB0 CPU315T-3 PN/DP, 384KB	6ES7317-7TK10-0AB0 CPU317T-3 PN/DP, 1024KB	6ES7317-7UL10-0AB0 CPU317TF-3 PN/DP, 1,5 MB
General information			
Product function			
• Isochronous mode	Yes; Via PROFIBUS DP or PROFINET interface	Yes; Via PROFIBUS DP or PROFINET interface	Yes; Via PROFIBUS DP or PROFINET interface
Engineering with			
• Programming package	STEP 7 V5.5 SP2 or higher and S7-Technology option package V4.2 SP3	STEP 7 V5.5 SP2 or higher and S7-Technology option package V4.2 SP3	STEP 7 V5.5 SP2 or higher; S7-Technology option package V4.2 SP3 or higher, Distributed Safety V5.4 SP5 or higher; S7-F Configuration Pack V5.5 SP10 or higher
Supply voltage			
Rated value (DC)	24 V	24 V	24 V
Memory			
Work memory			
• integrated	384 kbyte	1 024 kbyte	1 536 kbyte
• expandable	No	No	No
Load memory			
• Plug-in (MMC), max.	8 Mbyte	8 Mbyte	8 Mbyte
CPU processing times			
for bit operations, typ.	0.05 µs	0.025 µs	0.025 µs
for word operations, typ.	0.09 µs	0.03 µs	0.03 µs
for fixed point arithmetic, typ.	0.12 µs	0.04 µs	0.04 µs
for floating point arithmetic, typ.	0.45 µs	0.16 µs	0.16 µs
Counters, timers and their retentivity			
S7 counter			
• Number	256	512	512
IEC counter			
• present	Yes	Yes	Yes
S7 times			
• Number	256	512	512
IEC timer			
• present	Yes	Yes	Yes
Data areas and their retentivity			
Flag			
• Size, max.	2 048 byte	4 096 byte	4 096 byte
Address area			
I/O address area			
• Inputs	2 048 byte	8 192 byte	8 192 byte
• Outputs	2 048 byte	8 192 byte	8 192 byte
Process image			
• Inputs, adjustable	2 048 byte	8 192 byte	8 192 byte
• Outputs, adjustable	2 048 byte	8 192 byte	8 192 byte
Time of day			
Clock			
• Hardware clock (real-time)	Yes	Yes	Yes
Operating hours counter			
• Number	1	4	4
Digital outputs			
Integrated high-speed cams			
• Switching accuracy (+/-)	70 µs	70 µs	70 µs
1. Interface			
Interface type	Integrated RS 485 interface	Integrated RS 485 interface	Integrated RS 485 interface
Interface types			
• RS 485	Yes	Yes	Yes
Protocols			
• MPI	Yes	Yes	Yes
• PROFIBUS DP master	Yes	Yes	Yes
• PROFIBUS DP slave	Yes	Yes	Yes
• Point-to-point connection	No	No	No
PROFIBUS DP master			
• Number of DP slaves, max.	124	124	124

SIMATIC S7-300 Advanced Controllers

Central processing units
Technology CPUs

Technical specifications

Technical specifications

Article number	6ES7315-7TJ10-0AB0 CPU315T-3 PN/DP, 384KB	6ES7317-7TK10-0AB0 CPU317T-3 PN/DP, 1024KB	6ES7317-7UL10-0AB0 CPU317TF-3 PN/DP, 1,5 MB
2. Interface			
Interface type	Integrated RS 485 interface	Integrated RS 485 interface	Integrated RS 485 interface
Interface types			
• RS 485	Yes	Yes	Yes
Protocols			
• MPI	No	No	No
• PROFIBUS DP master	Yes; DP(DRIVE)-Master	Yes; DP(DRIVE)-Master	Yes; DP(DRIVE)-Master
• PROFIBUS DP slave	No	No	No
PROFIBUS DP master			
• Number of DP slaves, max.	64	64	64
3. Interface			
Interface type	PROFINET	PROFINET	PROFINET
Interface types			
• RJ 45 (Ethernet)	Yes	Yes	Yes
• Number of ports	2	2	2
Protocols			
• MPI	No	No	No
• PROFINET IO Controller	Yes; Also simultaneously with IO-Device functionality	Yes; Also simultaneously with IO-Device functionality	Yes; Also simultaneously with IO-Device functionality
• PROFINET IO Device	Yes; Also simultaneously with IO Controller functionality	Yes; Also simultaneously with IO Controller functionality	Yes; Also simultaneously with IO Controller functionality
• PROFIBUS DP master	No	No	No
• PROFIBUS DP slave	No	No	No
PROFINET IO Controller Services			
- Number of connectable IO Devices, max.	128	128	128
- Of which IO devices with IRT, max.	64	64	64
- Number of connectable IO Devices for RT, max.	128	128	128
Protocols			
Open IE communication			
• TCP/IP	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.	8	16	16
• ISO-on-TCP (RFC1006)	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.	8	16	16
• UDP	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.	8	16	16
Web server			
• supported	Yes	Yes	Yes
communication functions / header			
PG/OP communication	Yes	Yes	Yes
Data record routing	Yes	Yes	Yes
Global data communication			
• supported	Yes	Yes	Yes
S7 basic communication			
• communication function / S7 basic communication	Yes	Yes	Yes
S7 communication			
• supported	Yes	Yes	Yes
S5 compatible communication			
• supported	Yes; via CP and loadable FC	Yes; via CP and loadable FC	Yes; via CP and loadable FC
Number of connections			
• overall	16	32	32
Ambient conditions			
Ambient temperature during operation			
• min.	0 °C	0 °C	0 °C
• max.	60 °C	60 °C	60 °C

Technical specifications

Article number	6ES7315-7TJ10-0AB0	6ES7317-7TK10-0AB0	6ES7317-7UL10-0AB0
	CPU315T-3 PN/DP, 384KB	CPU317T-3 PN/DP, 1024KB	CPU317TF-3 PN/DP, 1,5 MB
configuration / header			
configuration / programming / header			
Programming language			
- LAD	Yes	Yes	Yes
- FBD	Yes	Yes	Yes
- STL	Yes	Yes	Yes
- SCL	Yes	Yes	Yes
- CFC	Yes	Yes	Yes
- GRAPH	Yes	Yes	Yes
- HiGraph®	Yes	Yes	Yes
Know-how protection			
• User program protection/ password protection	Yes	Yes	Yes
• Block encryption	Yes; With S7 block Privacy	Yes; With S7 block Privacy	Yes; With S7 block Privacy
Dimensions			
Width	120 mm	120 mm	120 mm
Height	125 mm	125 mm	125 mm
Depth	130 mm	130 mm	130 mm
Weights			
Weight, approx.	640 g	640 g	640 g

SIMATIC S7-300 Advanced Controllers

I/O modules

Digital modules

SM 321 digital input modules

Overview



- Digital inputs
- For connecting standard switches and two-wire proximity switches (BEROs)

5

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SM 321 digital input modules		SIMATIC S7-300, SM 321 digital input	6ES7321-7BH01-0AB0
SIMATIC S7-300, SM 321 digital input Isolated, 16 DI, 24 V DC, 1x 20-pin	6ES7321-1BH02-0AA0	Isolated, 16 DI, 24 V DC, 1x 20-pin, hardware interrupt, diagnostics, suitable for isochronous mode	
SIMATIC S7-300, SM 321 digital input Isolated 16 DI, 24 V DC, sourcing input, 1x 20-pin	6ES7321-1BH50-0AA0	Front connectors	
SIMATIC S7-300, SM 321 digital input Isolated 32 DI, 24 V DC, 1x 40-pin	6ES7321-1BL00-0AA0	SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin	6ES7392-1AJ00-0AA0
SIMATIC S7-300 SM 321 digital input module Isolated in groups of 16, 64 DI, 24 V DC, 3 ms, sinking/sourcing input, terminal blocks 6ES7392-1-N00-0AA0 and cable 6ES7392-4... 0-0AA0 required	6ES7321-1BP00-0AA0	SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin 100 units per packing unit	6ES7392-1AJ00-1AB0
SIMATIC S7-300, SM 321 digital input Isolated, 16 DI, 24-48 V AC/DC with single connection to common potential, 1x 40-pin	6ES7321-1CH00-0AA0	SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 20-pin 100 units per packing unit	6ES7392-1BJ00-0AA0
SIMATIC S7-300, SM 321 digital input Isolated, 16 DI, 48-125 V DC, 1x 20-pin	6ES7321-1CH20-0AA0	SIMATIC S7-300, front connector With screw contacts, 40-pin	6ES7392-1BJ00-1AB0
SIMATIC S7-300, SM 321 digital input Isolated, 16 DI, 24 V DC, 1x 20-pin, 0.05 ms input delay	6ES7321-1BH10-0AA0	SIMATIC S7-300, front connector With screw contacts, 40-pin, 100 units per packing unit	6ES7392-1AM00-0AA0
SIMATIC S7-300, SM 321 digital input Isolated, 32 DI, 120 V AC, 1x 40-pin	6ES7321-1EL00-0AA0	SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit	6ES7392-1AM00-1AB0
SIMATIC S7-300, SM 321 digital input Isolated, 8 DI, 120 V/230 V AC, 1x 20-pin	6ES7321-1FF01-0AA0	SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit	6ES7392-1BM01-0AA0
SIMATIC S7-300, SM 321 digital input Isolated, 8 DI, 120 V/230 V AC, 1x 40-pin, with single connection to common potential/channel	6ES7321-1FF10-0AA0	S7-300 connecting cable	
SIMATIC S7-300, SM 321 digital input Isolated 16 DI, 120/230 V AC, 1x 20-pin	6ES7321-1FH00-0AA0	S7-300 connecting cable For 64-channel modules, length 1 m 2 units per packing unit	6ES7392-4BB00-0AA0
		S7-300 connecting cable For 64-channel modules, length 2.5 m 2 units per packing unit	6ES7392-4BC50-0AA0

Ordering data	Article No.	Ordering data	Article No.
S7-300 connecting cable For 64-channel modules, length 5 m 2 units per packing unit	6ES7392-4BF00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX00-0AA0
Terminal block			
S7-300, terminal block with screw-type connection For 64-channel modules of the S7-300, 2 units per packing unit	6ES7392-1AN00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX00-0AA0
S7-300, terminal block with spring-type connection For 64-channel modules of the S7-300, 2 units per packing unit	6ES7392-1BN00-0AA0		
SIMATIC S7-300, raised front door for 32-channel SM, allows the connection of 1.3 mm²/16 AWG conductors, 5 units per packing unit	6ES7328-0AA00-7AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0
SIMATIC TOP connect	See page 5/298		
SIMATIC S7, bus connector (spare part)	6ES7390-0AA00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0
Labeling strips			
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0
SIMATIC S7-300, labeling strip (spare part) For modules with 40-pin front connector, 10 units per packing unit	6ES7392-2XX10-0AA0		
Label cover			
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0
SIMATIC S7-300, labeling cover (spare part) For modules with 40-pin front connector, 10 units per packing unit	6ES7392-2XY10-0AA0		
Labeling sheets for machine labeling		SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX00-0AA0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX00-0AA0		

SIMATIC S7-300 Advanced Controllers

I/O modules

Digital modules

SM 321 digital input modules

Technical specifications

Article number	6ES7321-1BH02-0AA0	6ES7321-1BH50-0AA0	6ES7321-1BL00-0AA0	6ES7321-1BP00-0AA0	6ES7321-1BH10-0AA0
	SM321, 16DI, DC24V	SM321, 16DI, DC24V, Source Input	SM321, 32DI, DC24V	SM321, 64 DI, DC 24V, 3MS, P/M reading	SM321, 16DI, DC24V, 0.05ms Input Delay.
Supply voltage					
Load voltage L+					
• Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Input current					
from backplane bus 5 V DC, max.	10 mA	10 mA	15 mA	100 mA	110 mA
Power loss					
Power loss, typ.	3.5 W	3.5 W	6.5 W	7 W	3.8 W
Digital inputs					
Number of digital inputs	16	16	32	64	16
Input characteristic curve in accordance with IEC 61131, type 1	Yes	Yes	Yes	Yes	Yes
Input voltage					
• Type of input voltage	DC	DC	DC	DC	DC
• Rated value (DC)	24 V	24 V	24 V	24 V	24 V
• for signal "0"	-30 to +5 V	-5 to +30V	-30 to +5 V	-30 to +5 V	-30 to +5 V
• for signal "1"	13 to 30V	-13 to -30V	13 to 30V	13 to 30V	13 to 30V
Input current					
• for signal "1", typ.	7 mA	7 mA	7 mA	4.2 mA	7 mA
Input delay (for rated value of input voltage)					
for standard inputs					
- parameterizable	No	No	No	No	No
- at "0" to "1", min.	1.2 ms	1.2 ms	1.2 ms	1.2 ms	25 µs
- at "0" to "1", max.	4.8 ms	4.8 ms	4.8 ms	4.8 ms	75 µs
Cable length					
• shielded, max.	1 000 m	1 000 m	1 000 m	1 000 m	1 000 m
Encoder					
Connectable encoders					
• 2-wire sensor	Yes	Yes	Yes	No	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA	1.5 mA		1.5 mA
Interrupts/diagnostics/status information					
Alarms	No	No	No	No	No
Diagnostics function	No	No	No	No	No
Alarms					
• Diagnostic alarm	No	No	No	No	No
• Hardware interrupt	No	No	No	No	No
connection method					
required front connector	20-pin	20-pin	40-pin	Cable: 6ES7392-4Bxx0-0AA0 terminal blocks: 6ES7392-1xN00-0AA0	20-pin
Dimensions					
Width	40 mm	40 mm	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm	125 mm	125 mm
Depth	120 mm	120 mm	120 mm	112 mm	120 mm
Weights					
Weight, approx.	200 g	200 g	260 g	230 g	200 g

5

Technical specifications

Article number	6ES7321-7BH01-0AB0 SM321, 16DI, 24V DC	6ES7321-1CH00-0AA0 SM321, 16 DI, AC/DC 24-48V, 1ch/common	6ES7321-1CH20-0AA0 SM321, 16DI, DC48-125V	6ES7321-1FH00-0AA0 SM321, 16 DI, 120/230V AC
Supply voltage				
Load voltage L+				
• Rated value (DC)	24 V	24 V	48 V	
Load voltage L1				
• Rated value (AC)		24 V		230 V; 120/230 V AC; all load voltages must have the same phase.
Input current				
from load voltage L+ (without load), max.	90 mA			
from backplane bus 5 V DC, max.	130 mA	100 mA	40 mA	29 mA
Encoder supply				
Number of outputs	2			
Output current				
• Rated value	120 mA			
Power loss				
Power loss, typ.	4 W	1.5 W; at 24 V; 2.8 W at 48 V	4.3 W	4.9 W
Digital inputs				
Number of digital inputs	16	16	16	16
Input characteristic curve in accordance with IEC 61131, type 1		Yes	Yes	Yes
Input characteristic curve in accordance with IEC 61131, type 2	Yes			
Input voltage				
• Type of input voltage	DC	AC/DC	DC	AC
• Rated value (DC)	24 V	24 V; DC 24 or 48 V	48 V; 48 V DC to 125 V DC	
• Rated value (AC)		24 V; 24 V AC or 48 V AC (0 ... 63 Hz)		230 V; 120/230 V AC (47 ... 63 Hz)
• for signal "0"	-30 to +5 V	-5V AC to +5V AC	-146 V DC to +15 V DC	0 to 40V
• for signal "1"	13 to 30V	14V AC to 60V AC	30 V DC to 146 V DC	79 to 264V
Input current				
• for signal "1", typ.	7 mA	2.7 mA	3.5 mA	6.5 mA; (120 V, 60 Hz), 16 mA (230 V, 50 Hz)
Input delay (for rated value of input voltage)				
for standard inputs				
- parameterizable	Yes; 0.1 / 0.5 / 3 / 15 / 20 ms	No	No	No
- at "0" to "1", min.		16 ms	0.1 ms	25 ms
- at "0" to "1", max.		16 ms	3.5 ms	25 ms
Cable length				
• shielded, max.	1 000 m	1 000 m	1 000 m	1 000 m
Encoder				
Connectable encoders				
• 2-wire sensor	Yes	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	2 mA	1 mA	1 mA	2 mA
Interrupts/diagnostics/status information				
Alarms	Yes	No	No	No
Diagnostics function	Yes; Parameterizable	No	No	No
Alarms				
• Diagnostic alarm	Yes; Parameterizable	No	No	No
• Hardware interrupt	Yes; Parameterizable	No	No	No
connection method				
required front connector	20-pin	40-pin	20-pin	20-pin
Dimensions				
Width	40 mm	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm	125 mm
Depth	120 mm	120 mm	120 mm	120 mm
Weights				
Weight, approx.	200 g	260 g	200 g	240 g

SIMATIC S7-300 Advanced Controllers

I/O modules

Digital modules

SM 321 digital input modules

Technical specifications

Article number	6ES7321-1EL00-0AA0 SM321, 32DI, AC120V	6ES7321-1FF01-0AA0 SM321, 8DI, AC120/230V	6ES7321-1FF10-0AA0 SM321, 8 DI, AC/DC 120/230V, 1ch/common
Supply voltage			
Load voltage L1			
• Rated value (AC)	120 V	230 V; 120/230 V AC	230 V; 120/230 V AC; all load voltages must have the same phase.
Input current			
from backplane bus 5 V DC, max.	16 mA	29 mA	100 mA
Power loss			
Power loss, typ.	4 W	4.9 W	4.9 W
Digital inputs			
Number of digital inputs	32	8	8
Input characteristic curve in accordance with IEC 61131, type 1		Yes	Yes
Input characteristic curve in accordance with IEC 61131, type 2	Yes		
Input voltage			
• Type of input voltage	AC	AC	AC
• Rated value (AC)	120 V; 47 ... 63 Hz	230 V; 120/230 V AC (47 ... 63 Hz)	120 V; 120/230 V AC (47 ... 63 Hz)
• for signal "0"	0 to 20V	0 to 40V	0 to 40V
• for signal "1"	74 to 132V	79 to 264V	79 to 264V
Input current			
• for signal "1", typ.	21 mA	6.5 mA; (120 V); 11 mA (230 V)	7.5 mA; (120 V); 17.3 mA (230 V)
Input delay (for rated value of input voltage)			
for standard inputs			
- parameterizable	No	No	No
- at "0" to "1", max.	15 ms	25 ms	25 ms
Cable length			
• shielded, max.	1 000 m	1 000 m	1 000 m
Encoder			
Connectable encoders			
• 2-wire sensor	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	4 mA	2 mA	2 mA
Interrupts/diagnostics/status information			
Alarms	No	No	No
Diagnostics function	No	No	No
Alarms			
• Diagnostic alarm	No	No	No
• Hardware interrupt	No	No	No
connection method			
required front connector	40-pin	20-pin	40-pin
Dimensions			
Width	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm
Depth	120 mm	120 mm	120 mm
Weights			
Weight, approx.	300 g	240 g	240 g

Overview



- Digital outputs
- For connecting solenoid valves, contactors, small-power motors, lamps and motor starters

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SM 322 digital output modules		SIMATIC S7-300, SM 322 digital output	6ES7322-1CF00-0AA0
SIMATIC S7-300, SM 322 digital output Isolated, 8 DO, 24 V DC, 2 A, 1x 20-pin	6ES7322-1BF01-0AA0	Isolated, 8 DO, 48-125 V DC, 1.5 A, 1x 20-pin	
SIMATIC S7-300, SM 322 digital output Isolated, 16 DO, 24 V DC, 0.5 A, 1x 20-pin, total current 4 A/group (8 A/module)	6ES7322-1BH01-0AA0	SIMATIC S7-300, SM 322 digital output	6ES7322-1FF01-0AA0
SIMATIC S7-300, digital output module SM 322 High Speed Isolated, 16 DO, 24 V DC, 0.5 A, 1x 20-pin	6ES7322-1BH10-0AA0	Isolated, 8 DO, 120/230 V AC, 1 A, 1x 20-pin	
SIMATIC S7-300, SM 322 digital output Isolated, 32 DO, 24 V DC, 0.5 A, 1x 40-pin, total current 4 A/group (16 A/module)	6ES7322-1BL00-0AA0	SIMATIC S7-300, SM 322 digital output	6ES7322-5FF00-0AB0
SIMATIC S7-300 SM 322 digital output module Isolated in groups of 16, 64 DO, 24 V DC, 0.3 A, sourcing output, total current 2 A/group, 8 A/module, terminal blocks 6ES7392-1- N00-0AA0 and cable 6ES7392-4... 0-0AA0 required	6ES7322-1BP00-0AA0	Isolated, 8 DO, 120/230 V AC, 2 A, with single connection to common potential/channel and selectable failure mode, 1x 40-pin	
SIMATIC S7-300 SM 322 digital output module Isolated in groups of 16, 64 DO, 24 V DC, 0.3 A, sinking output, total current 2 A/group, 8 A/module, terminal blocks 6ES7392-1- N00-0AA0 and cable 6ES7392-4... 0-0AA0 required	6ES7322-1BP50-0AA0	SIMATIC S7-300, SM 322 digital output	6ES7322-1FH00-0AA0
SIMATIC S7-300, SM 322 digital output Isolated, 8 DO, 24 V DC, 0.5 A (1x 8 DO), short-circuit protection, diagnostics, 1x 20-pin	6ES7322-8BF00-0AB0	Isolated 16 DO, 120/230 V AC, 1 A, 1x 20-pin	
SIMATIC S7-300, SM 322 digital output Isolated, 16 DO (solid-state relay), 24-48 V AC/DC; 0.5 A with single connection to common potential, 1x 40-pin	6ES7322-5GH00-0AB0	SIMATIC S7-300, SM 322 digital output	6ES7322-1FL00-0AA0
		Isolated, 32 DO, 120 V/230 V AC, 1 A, double width, 2x 20-pin	
		SIMATIC S7-300, SM 322 digital output	6ES7322-1HF01-0AA0
		Isolated, 8 DO (relay), 1x 20-pin, 24 V DC, 2 A or 230 V AC, 2 A	
		SIMATIC S7-300, SM 322 digital output	6ES7322-1HF10-0AA0
		Isolated, 8 DO (relay), 1x 40-pin, 24 V DC, 5 A or 230 V AC, 5 A, connectors with spring-loaded terminal can be used from 6ES7392-1BM01-0AA0	
		SIMATIC S7-300, SM 322 digital output	6ES7322-5HF00-0AB0
		Isolated, 8 DO (relay), 1x 40-pin, 24 V DC, 120-230 V AC, 5 A with RC filter overvoltage protection	
		SIMATIC S7-300, SM 322 digital output	6ES7322-1HH01-0AA0
		Isolated 16 DO, relay contacts, 1x 20-pin	

SIMATIC S7-300 Advanced Controllers

I/O modules

Digital modules

SM 322 digital output modules

5

Ordering data	Article No.	Ordering data	Article No.
Front connectors		Labeling strips	
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin	6ES7392-1AJ00-0AA0	SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin 100 units per packing unit	6ES7392-1AJ00-1AB0	SIMATIC S7-300, labeling strip (spare part) For modules with 40-pin front connector, 10 units per packing unit	6ES7392-2XX10-0AA0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 20-pin	6ES7392-1BJ00-0AA0	Label cover	
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 20-pin 100 units per packing unit	6ES7392-1BJ00-1AB0	SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0
SIMATIC S7-300, front connector With screw contacts, 40-pin	6ES7392-1AM00-0AA0	SIMATIC S7-300, labeling cover (spare part) For modules with 40-pin front connector, 10 units per packing unit	6ES7392-2XY10-0AA0
SIMATIC S7-300, front connector With screw contacts, 40-pin, 100 units per packing unit	6ES7392-1AM00-1AB0	Labeling sheets for machine labeling	
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin	6ES7392-1BM01-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX00-0AA0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit	6ES7392-1BM01-1AB0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX00-0AA0
S7-300 connecting cable		SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX00-0AA0
S7-300 connecting cable For 64-channel modules, length 1 m 2 units per packing unit	6ES7392-4BB00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX00-0AA0
S7-300 connecting cable For 64-channel modules, length 2.5 m 2 units per packing unit	6ES7392-4BC50-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0
S7-300 connecting cable For 64-channel modules, length 5 m 2 units per packing unit	6ES7392-4BF00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0
Terminal block			
S7-300, terminal block With screw-type connection system for 64-channel modules of the S7-300, 2 units per packing unit	6ES7392-1AN00-0AA0		
S7-300, terminal block With spring-loaded connection system for 64-channel modules of the S7-300, 2 units per packing unit	6ES7392-1BN00-0AA0		
SIMATIC S7-300, raised front door For 32-channel SM, allows the connection of 1.3 mm ² /16 AWG conductors 5 units per packing unit	6ES7328-0AA00-7AA0		
SIMATIC TOP connect	See page 5/298		
SIMATIC S7, bus connector (spare part)	6ES7390-0AA00-0AA0		
Set of fuses for SM 322			
SIMATIC S7, fuse set For 6ES7322-1FF01-0AA0 and 6ES7322-1FH00-0AA0: 10 fuses 8 A quick-response, 2 fuse holders	6ES7973-1HD00-0AA0		
SIMATIC S7-300, 6.3 A fuse set For SM 322 6ES7322-1CF00-0AA0, 10 units per packing unit	6ES7973-1GC00-0AA0		

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

Technical specifications

Article number	6ES7322-1BH01-0AA0	6ES7322-1BH10-0AA0	6ES7322-1BL00-0AA0	6ES7322-1BP00-0AA0	6ES7322-1BP50-0AA0	6ES7322-8BF00-0AB0
	SM322, 16DO 24V DC, 0,5A	SM322 High Speed, 16DO 24V DC, 0,5A	SM322, 32DO 24V DC, 0,5A	SM322 64DA, DC24V, 0,3A P-write	SM322 64DO, DC24V, 0,3A M-write	SM322, 8DO, 24V DC, 0,5A
Supply voltage						
Load voltage L+						
• Rated value (DC)	24 V	24 V	24 V	24 V	24 V	24 V
Input current						
from load voltage L+ (without load), max.	80 mA	110 mA	160 mA	75 mA	75 mA	90 mA
from backplane bus 5 V DC, max.	80 mA	70 mA	110 mA	100 mA	100 mA	70 mA
Power loss						
Power loss, typ.	4.9 W	5 W	6.6 W	6 W	6 W	5 W
Digital outputs						
Number of digital outputs	16	16	32	64	64	8
Short-circuit protection	Yes; Electronic	Yes; Electronic	Yes; Electronic	Yes; Electronic	Yes; Electronic	Yes; Electronic
Limitation of inductive shutdown voltage to	L+ (-53 V)	L+ (-53 V)	L+ (-53 V)	L+ (-53 V)	M+ (45 V)	L+ (-45 V)
Switching capacity of the outputs						
• on lamp load, max.	5 W	5 W	5 W	5 W	5 W	5 W
Load resistance range						
• lower limit	48 Ω	48 Ω	48 Ω	80 Ω	80 Ω	48 Ω
• upper limit	4 kΩ	4 kΩ	4 kΩ	10 kΩ	10 kΩ	3 kΩ
Output voltage						
• for signal *1*, min.	L+ (-0.8 V)	L+ (-0.8 V)	L+ (-0.8 V)	L+ (-0.5 V)	M+ (0.5 V)	L+ (-0.8 to -1.6 V)
Output current						
• for signal *1* rated value	0.5 A	0.5 A	0.5 A	0.3 A	0.3 A	0.5 A
• for signal *0* residual current, max.	0.5 mA	0.5 mA	0.5 mA	0.1 mA		0.5 mA
Switching frequency						
• with resistive load, max.	100 Hz	1 000 Hz	100 Hz	100 Hz	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz	2 Hz
• on lamp load, max.	10 Hz	10 Hz	10 Hz	10 Hz	10 Hz	10 Hz
Total current of the outputs (per group)						
horizontal installation						
- up to 40 °C, max.	4 A	4 A	4 A	1.6 A	1.6 A	4 A
- up to 60 °C, max.	3 A	3 A	3 A	1.2 A	1.2 A	3 A
vertical installation						
- up to 40 °C, max.	2 A	2 A	2 A	1.6 A	1.6 A	4 A
Cable length						
• shielded, max.	1 000 m	1 000 m	1 000 m	1 000 m	1 000 m	1 000 m

SIMATIC S7-300 Advanced Controllers

I/O modules

Digital modules

SM 322 digital output modules

Technical specifications

Article number	6ES7322-1BH01-0AA0	6ES7322-1BH10-0AA0	6ES7322-1BL00-0AA0	6ES7322-1BP00-0AA0	6ES7322-1BP50-0AA0	6ES7322-8BF00-0AB0
	SM322, 16DO 24V DC, 0,5A	SM322 High Speed, 16DO 24V DC, 0,5A	SM322, 32DO 24V DC, 0,5A	SM322 64DA, DC24V, 0,3A P-write	SM322 64DO, DC24V, 0,3A M-write	SM322, 8DO, 24V DC, 0,5A
Interrupts/diagnostics/ status information						
Alarms	No	No	No	No	No	
Diagnostics function	No	No	No	No	No	Yes; Parameterizable
Alarms						
• Diagnostic alarm	No	No	No	No	No	Yes; Parameterizable
connection method						
required front connector	20-pin	20-pin	40-pin	Cable: 6ES7392- 4Bxx0-0AA0 terminal blocks: 6ES7392-1xN00- 0AA0	Cable: 6ES7392- 4Bxx0-0AA0 terminal blocks: 6ES7392-1xN00- 0AA0	20-pin
Dimensions						
Width	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm	125 mm	125 mm	125 mm
Depth	120 mm	120 mm	120 mm	112 mm	112 mm	120 mm
Weights						
Weight, approx.	190 g	200 g	260 g	230 g	230 g	210 g
Article number						
	6ES7322-5GH00-0AB0	6ES7322-1CF00-0AA0	6ES7322-1BF01-0AA0	6ES7322-1FF01-0AA0	6ES7322-5FF00-0AB0	6ES7322-1FH00-0AA0
	SM322, 16DO, AC/DC24-48V, 0,5A	SM322, 8DO, 48-125V DC, 1,5A	SM322, 8DO, 24V DC, 2A	SM322, 8DO, 120/230V AC, 1A	SM322, 8DO, AC120/230V, 2A	SM322, 16DO, 120/230V AC, 1A
Supply voltage						
Load voltage L+						
• Rated value (DC)	24 V; 24 / 48	48 V; 48 V DC to 125 V DC	24 V			
Load voltage L1						
• Rated value (AC)				230 V; 120/230 V AC	230 V; 120/230 V AC	230 V; 120/230 V AC
Input current						
from supply voltage L+, max.	200 mA					
from load voltage L+ (without load), max.		2 mA	60 mA			
from load voltage L1 (without load), max.				2 mA	2 mA	2 mA
from backplane bus 5 V DC, max.	100 mA	100 mA	40 mA	100 mA	100 mA	200 mA
Power loss						
Power loss, typ.	2.8 W	7.2 W	6.8 W	8.6 W	8.6 W	8.6 W
Digital outputs						
Number of digital outputs	16	8	8	8	8	16
Short-circuit protection	No; to be provided externally	Yes; Electronic	Yes; Electronic	Yes; Fuse 8 A, 250 V; per group	Yes; to be provided externally; fuse 3.15 A / 250 V, quick response	Yes; Fuse 8 A, 250 V; per group
Limitation of inductive shutdown voltage to		M (-1 V)	L+ (-48 V)			
Switching capacity of the outputs						
• on lamp load, max.	2.5 W	15 W; 15 W (48 V) or 40 W (125 V)	10 W	50 W	50 W	50 W
Load resistance range						
• lower limit			12 Ω			
• upper limit			4 kΩ			
Output voltage						
• for signal "1", min.	L+ (-0.25 V)	L+ (-1.2 V)	L+ (-0.8 V)	L1 (-1.5 V)	L1 (-8.5 V)	
Output current						
• for signal "1" rated value	0.5 A	1.5 A	2 A	2 A	2 A	1 A
• for signal "0" residual current, max.	10 μA	0.5 mA	0.5 mA	2 mA	2 mA	2 mA

Technical specifications

Article number	6ES7322-5GH00-0AB0	6ES7322-1CF00-0AA0	6ES7322-1BF01-0AA0	6ES7322-1FF01-0AA0	6ES7322-5FF00-0AB0	6ES7322-1FH00-0AA0
	SM322, 16DO, AC/DC24-48V, 0,5A	SM322, 8DO, 48-125V DC, 1,5A	SM322, 8DO, 24V DC, 2A	SM322, 8DO, 120/230V AC, 1A	SM322, 8DO, AC120/230V, 2A	SM322, 16DO, 120/230V AC, 1A
Switching frequency						
• with resistive load, max.	10 Hz	25 Hz	100 Hz	10 Hz	10 Hz	10 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz
• on lamp load, max.	0.5 Hz	10 Hz	10 Hz	1 Hz	1 Hz	1 Hz
Total current of the outputs (per group)						
horizontal installation						
- up to 40 °C, max.	0.5 A; 8 A per module	6 A	4 A	4 A	8 A	4 A
- up to 50 °C, max.		4 A				
- up to 60 °C, max.	0.5 A; 8 A per module	3 A	4 A	2 A	4 A	2 A
vertical installation						
- up to 40 °C, max.	0.5 A; 8 A per module	4 A	4 A	2 A	4 A	2 A
Cable length						
• shielded, max.	1 000 m	1 000 m	1 000 m	1 000 m	1 000 m	1 000 m
Interrupts/diagnostics/status information						
Alarms		No	No	No		
Diagnostics function	Yes; Parameterizable	No	No	Yes; Fuse blown or load voltage missing	Yes; Parameterizable	Yes; Fuse blown or load voltage missing
Alarms						
• Diagnostic alarm	Yes; Parameterizable	No	No	No	Yes; Parameterizable	No
connection method						
required front connector	40-pin	20-pin	20-pin	20-pin	40-pin	20-pin
Dimensions						
Width	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm	125 mm	125 mm	125 mm
Depth	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm
Weights						
Weight, approx.	260 g	250 g	190 g	275 g	275 g	275 g
Article number	6ES7322-1FL00-0AA0	6ES7322-1HF01-0AA0	6ES7322-1HF10-0AA0	6ES7322-5HF00-0AB0	6ES7322-1HH01-0AA0	
	SM322, 32DO, 120/230V AC, 1A	SM322, 8DA, 24V DC/2A or 230V AC/2A	SM322, 8DA, 24V DC/5A OR 230V AC/5A	SM322, 8DO Relay, 24VDC, 120-230V AC, 5A	SM322, 16DO Relay	
Supply voltage						
Load voltage L+						
• Rated value (DC)		24 V	120 V	24 V	120 V	
Load voltage L1						
• Rated value (AC)	120 V; 120/230 V AC		230 V	230 V	230 V	
Input current						
from supply voltage L+, max.		160 mA	125 mA	160 mA	250 mA	
from load voltage L1 (without load), max.	10 mA					
from backplane bus 5 V DC, max.	190 mA	40 mA	40 mA	100 mA	100 mA	
Power loss						
Power loss, typ.	25 W	3.2 W	3.2 W	3.5 W	4.5 W	
Digital outputs						
Number of digital outputs	32	8; Relays	8; Relays	8; Relays	16; Relays	
Short-circuit protection	No	No	No; to be provided externally	No; to be provided externally	No	
Switching capacity of the outputs						
• on lamp load, max.	50 W	50 W	1 500 W; 230 V AC	1 500 W; 230 V AC	50 W; 230 V AC	
Output voltage						
• for signal "1", min.	L1 (-0.8 V)					

SIMATIC S7-300 Advanced Controllers

I/O modules

Digital modules

SM 322 digital output modules

Technical specifications

Article number	6ES7322-1FL00-0AA0	6ES7322-1HF01-0AA0	6ES7322-1HF10-0AA0	6ES7322-5HF00-0AB0	6ES7322-1HH01-0AA0
	SM322, 32DO, 120/230V AC, 1A	SM322, 8DA, 24V DC/2A or 230V AC/2A	SM322, 8DA, 24V DC/5A OR 230V AC/5A	SM322, 8DO Relay, 24VDC, 120-230V AC, 5A	SM322, 16DO Relay
Output current					
• for signal "1" rated value	1 A	2 A	5 A	5 A	2 A
• for signal "0" residual current, max.	2 mA				
Switching frequency					
• with resistive load, max.	10 Hz	2 Hz	2 Hz	2 Hz	1 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz
• on lamp load, max.	1 Hz	2 Hz	2 Hz	2 Hz	1 Hz
• mechanical, max.		10 Hz	10 Hz	10 Hz	10 Hz
Total current of the outputs (per group)					
horizontal installation					
- up to 40 °C, max.	4 A				
- up to 60 °C, max.	3 A		5 A	5 A	8 A
vertical installation					
- up to 40 °C, max.	4 A		5 A	5 A	8 A
Relay outputs					
• Rated supply voltage of relay coil L+ (DC)		24 V; 110 mA	24 V		24 V
• Contact connection (internal)		Yes; SIOV-CU4032 K275G	No	Yes; 330 Ohm, 0.1uF	No
• Number of operating cycles, max.		300 000; 230 V AC: 100 000; 120 V AC: 200 000; 24 V DC: 300 000 (at 2 A)	300 000; 300 000 (24 V DC, at 2 A); 200 000 (120 V AC, at 3 A); 100 000 (230 V AC, at 3 A)	100 000; 100 000 (24 V DC, at 5 A), 100 000 (230 V AC, at 5 A)	100 000; 50 000 (24 V DC, at 2 A); 700 000 (120 V AC, at 2 A); 100 000 (230 V AC, at 2 A)
Switching capacity of contacts					
- with inductive load, max.		2 A; 2 A (230 V AC), 2 A (24 V DC)	3 A; 3 A (230 V DC), 2 A (24 V AC)	5 A; 5 A (230 V DC), 5 A (24 V AC)	2 A; 2 A (230 V AC), 2 A (24 V DC)
- with resistive load, max.		2 A	8 A; 8 A (230 V DC), 5 A (24 V AC)	5 A; 5 A (230 V DC), 5 A (24 V AC)	2 A; 2 A (230 V AC), 2 A (24 V DC)
- Thermal continuous current, max.		3 A	8 A	5 A	2 A
Cable length					
• shielded, max.	1 000 m	1 000 m	1 000 m	1 000 m	1 000 m
Interrupts/diagnostics/status information					
Alarms	No	No	No	Yes	No
Diagnostics function	Yes; Fuse blown or load voltage missing	No	No	Yes; Parameterizable	No
Alarms					
• Diagnostic alarm	No	No	No	Yes; Parameterizable	No
connection method					
required front connector	20-pin	20-pin	40-pin	40-pin	20-pin
Dimensions					
Width	80 mm	40 mm	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm	125 mm	125 mm
Depth	117 mm	120 mm	120 mm	120 mm	120 mm
Weights					
Weight, approx.	500 g	190 g	320 g	320 g	250 g

Overview



- Digital inputs and outputs
- For connection of switches, 2-wire proximity switches (BEROs), solenoid valves, contactors, low-power motors, lamps and motor starters

Ordering data	Article No.	Ordering data	Article No.
SM 323 digital input/output modules		SIMATIC S7-300, front door	6ES7328-0AA00-7AA0
SIMATIC S7-300, SM 323 digital module	6ES7323-1BH01-0AA0	Raised for 32-channel SM, allows the connection of 1.3 mm ² /16 AWG conductors 5 units per packing unit	
Isolated, 8 DI and 8 DO, 24 V DC, 0.5 A total current 2 A, 1x 20-pin		SIMATIC TOP connect	See page 5/298
SIMATIC S7-300, SM 323 digital module	6ES7323-1BL00-0AA0	SIMATIC S7, bus connector (spare part)	6ES7390-0AA00-0AA0
Isolated, 16 DI and 16 DO, 24 V DC, 0.5 A, total current 4 A, 1x 40-pin		Labeling strips	
SM 327 digital input/output modules		SIMATIC S7-300, labeling strip (spare part)	6ES7392-2XX00-0AA0
SIMATIC S7-300, SM 327 digital module	6ES7327-1BH00-0AB0	For modules with 20-pin front connector, 10 units per packing unit	
Isolated, 8 DI and 8 DX, 24 V DC, 0.5 A 1x 20-pin; 8 DX can be parameterized individually by channel as DI or DO		SIMATIC S7-300, labeling strip (spare part)	6ES7392-2XX10-0AA0
Front connectors		For modules with 40-pin front connector, 10 units per packing unit	
SIMATIC S7-300, front connector	6ES7392-1AJ00-0AA0	Label cover	
For signal modules with screw contacts, 20-pin		SIMATIC S7, labeling cover (spare part)	6ES7392-2XY00-0AA0
SIMATIC S7-300, front connector	6ES7392-1AJ00-1AB0	For modules with 20-pin front connector, 10 units per packing unit	
For signal modules with screw contacts, 20-pin 100 units per packing unit		SIMATIC S7-300, labeling cover (spare part)	6ES7392-2XY10-0AA0
SIMATIC S7-300, front connector	6ES7392-1BJ00-0AA0	For modules with 40-pin front connector, 10 units per packing unit	
For signal modules with spring-loaded contacts, 20-pin		Labeling sheets for machine labeling	
SIMATIC S7-300, front connector	6ES7392-1BJ00-1AB0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol	6ES7392-2AX00-0AA0
For signal modules with spring-loaded contacts, 20-pin 100 units per packing unit		10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	
SIMATIC S7-300, front connector	6ES7392-1AM00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige	6ES7392-2BX00-0AA0
With screw contacts, 40-pin		10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	
SIMATIC S7-300, front connector	6ES7392-1AM00-1AB0		
With screw contacts, 40-pin, 100 units per packing unit			
SIMATIC S7-300, front connector	6ES7392-1BM01-0AA0		
For signal modules with spring-loaded contacts, 40-pin			
SIMATIC S7-300, front connector	6ES7392-1BM01-1AB0		
For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit			

SIMATIC S7-300 Advanced Controllers

I/O modules

Digital modules

SM 323/SM 327 digital input/output modules

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

Technical specifications

Article number	6ES7323-1BH01-0AA0	6ES7323-1BL00-0AA0	6ES7327-1BH00-0AB0
	SM323, 8DI/8DO, DC24V, 0,5A	SM323, 16DI/DO, DC24V, 0,5A	SM327, 8DI/8DX, DC24V, 0,5A
Supply voltage			
Load voltage L+			
• Rated value (DC)	24 V	24 V	24 V
Input current			
from load voltage L+ (without load), max.	40 mA	80 mA	20 mA
from backplane bus 5 V DC, max.	40 mA	80 mA	60 mA
Power loss			
Power loss, typ.	3.5 W	6.5 W	3 W
Digital inputs			
Number of digital inputs	8	16	8; 8 hard-wired, 8 others individually parameterizable
Input characteristic curve in accordance with IEC 61131, type 1	Yes	Yes	Yes
Input voltage			
• Type of input voltage	DC	DC	DC
• Rated value (DC)	24 V	24 V	24 V
• for signal "0"	-30 to +5 V	-30 to +5 V	-30 to +5 V
• for signal "1"	13 to 30V	13 to 30V	+15 to +30 V
Input current			
• for signal "1", typ.	7 mA	7 mA	6 mA
Input delay (for rated value of input voltage)			
for standard inputs			
- at "0" to "1", min.	1.2 ms	1.2 ms	1.2 ms
- at "0" to "1", max.	4.8 ms	4.8 ms	4.8 ms
Cable length			
• shielded, max.	1 000 m	1 000 m	1 000 m

Technical specifications

Article number	6ES7323-1BH01-0AA0 SM323, 8DI/8DO, DC24V, 0,5A	6ES7323-1BL00-0AA0 SM323, 16DI/DO, DC24V, 0,5A	6ES7327-1BH00-0AB0 SM327, 8DI/8DX, DC24V, 0,5A
Digital outputs			
Number of digital outputs	8	16	8; can also be parameterized individually as DI
Short-circuit protection	Yes	Yes	Yes
Limitation of inductive shutdown voltage to	L+ (-53 V)	L+ (-48 V)	L+ (-54 V)
Switching capacity of the outputs			
• on lamp load, max.	5 W	5 W	5 W
Load resistance range			
• lower limit	48 Ω	48 Ω	48 Ω
• upper limit	4 kΩ	4 kΩ	4 kΩ
Output voltage			
• for signal "1", min.	L+ (-0.8 V)	L+ (-0.8 V)	L+ (-1.5 V)
Output current			
• for signal "1" rated value	0.5 A	0.5 A	0.5 A
• for signal "0" residual current, max.	0.5 mA	0.5 mA	0.5 mA
Switching frequency			
• with resistive load, max.	100 Hz	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz	0.5 Hz
• on lamp load, max.	10 Hz	100 Hz	10 Hz
Total current of the outputs (per group)			
horizontal installation			
- up to 40 °C, max.	4 A	4 A	4 A
- up to 60 °C, max.	4 A	3 A	3 A
vertical installation			
- up to 40 °C, max.	4 A	2 A	2 A
Cable length			
• shielded, max.	1 000 m	1 000 m	1 000 m
Encoder			
Connectable encoders			
• 2-wire sensor	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	2 mA	1.5 mA	1.5 mA
Interrupts/diagnostics/status information			
Alarms	No	No	No
Diagnostics function	No	No	No
connection method			
required front connector	20-pin	40-pin	20-pin
Dimensions			
Width	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm
Depth	120 mm	120 mm	120 mm
Weights			
Weight, approx.	220 g	260 g	200 g

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 digital modules

SIPLUS S7-300 SM 321

Overview



- Digital inputs
- For connection of switches and 2-wire proximity switches (BEROs)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

5

Ordering data

SIPLUS S7-300 SM 321 digital input modules

For industrial applications with extended ambient conditions

Extended temperature range and exposure to environmental substances

16 inputs, 24 V DC

6AG1321-1BH02-2AA0

32 inputs, 24 V DC

6AG1321-1BL00-2AA0

16 inputs, 48 to 120 V DC

6AG1321-1CH20-2AA0

8 inputs, 120/230 V AC

6AG1321-1FF01-2AA0

8 inputs, 120/230 V AC, single root

6AG1321-1FF10-7AA0

16 inputs, 120/230 V AC

6AG1321-1FH00-7AA0

16 inputs, 24 V DC, diagnostics-capable

6AG1321-7BH01-2AB0

Exposure to environmental substances

16 inputs, 24 V DC, 0-1 threshold

6AG1321-7BH01-4AS0

16 inputs, NAMUR, optional redundancy

6AG1321-7TH00-4AB0

For rolling stock railway applications

Conforms to EN 50155

16 inputs, 24 V DC

6AG1321-1BH02-2AA0

32 inputs, 24 V DC

6AG1321-1BL00-2AA0

16 inputs, 48 to 120 V DC

6AG1321-1CH20-2AA0

8 inputs, 120/230 V AC

6AG1321-1FF01-2AA0

16 inputs, 24 V DC, diagnostics-capable

6AG1321-7BH01-2AB0

Accessories

Mandatory

Front connector

20-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BJ00-0AA0
6ES7392-1BJ00-1AB0

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0
6ES7392-1BM01-1AB0

Article No.

Consumables

Front door, elevated design

6ES7328-0AA00-7AA0

E.g. for 32-channel modules; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol

Bus connectors

6ES7390-0AA00-0AA0

1 unit (spare part)

Labeling strips

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XX00-0AA0

For modules with 40-pin front connector

6ES7392-2XX10-0AA0

Label cover

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XY00-0AA0

For modules with 40-pin front connector

6ES7392-2XY10-0AA0

Documentation

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400.LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

Technical specifications

Article number	6AG1321-1BH02-2AA0	6AG1321-1BL00-2AA0	6AG1321-1CH20-2AA0	6AG1321-1FF01-2AA0	6AG1321-1FF10-7AA0
Based on	6ES7321-1BH02-0AA0 SIPLUS S7-300 SM 321 16DI/24 V DC	6ES7321-1BL00-0AA0 SIPLUS S7-300 SM 321 32DI/24 V DC	6ES7321-1CH20-0AA0 SIPLUS S7-300 SM 321 16DI/48-125 V DC	6ES7321-1FF01-0AA0 SIPLUS S7-300 SM 321 8DI/120/220 V AC	6ES7321-1FF10-0AA0 SIPLUS S7-300 SM 321 8 DI
Ambient conditions					
Ambient temperature during operation					
• min.	-40 °C; = Tmin	-40 °C; = Tmin	-25 °C; = Tmin	-40 °C; = Tmin	-25 °C
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; for use on railway vehicles according to EN50155, the rated temperature range -25 ... +55 °C (T1) or 60 °C @ UL/ULhaz/ATEX/FM use applies	70 °C; = Tmax; for use on railway vehicles according to EN50155, the rated temperature range -25 ... +55 °C (T1) or 60 °C @ UL/ULhaz/ATEX/FM use applies	70 °C; = Tmax; for use on railway vehicles according to EN50155, the rated temperature range -25 ... +55 °C (T1) or 60 °C @ UL/ULhaz/ATEX/FM use applies	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m	5 000 m	2 000 m	2 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Resistance					
Use in stationary industrial systems					
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on land craft, rail vehicles and special-purpose vehicles					
- to biologically active substances according to EN 60721-3-5	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request		
- to chemically active substances according to EN 60721-3-5	Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *	Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *	Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *		
- to mechanically active substances according to EN 60721-3-5	Yes; Class 5S3 incl. sand, dust; *	Yes; Class 5S3 incl. sand, dust; *	Yes; Class 5S3 incl. sand, dust; *		

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 digital modules

SIPLUS S7-300 SM 321

Technical specifications

Article number	6AG1321-1BH02-2AA0	6AG1321-1BL00-2AA0	6AG1321-1CH20-2AA0	6AG1321-1FF01-2AA0	6AG1321-1FF10-7AA0
Based on	6ES7321-1BH02-0AA0 SIPLUS S7-300 SM 321 16DI/24 V DC	6ES7321-1BL00-0AA0 SIPLUS S7-300 SM 321 32DI/24 V DC	6ES7321-1CH20-0AA0 SIPLUS S7-300 SM 321 16DI/48-125 V DC	6ES7321-1FF01-0AA0 SIPLUS S7-300 SM 321 8DI/120/220 V AC	6ES7321-1FF10-0AA0 SIPLUS S7-300 SM 321 8 DI
Use on ships/at sea					
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology					
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark					
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

Article number	6AG1321-1FH00-7AA0	6AG1321-7BH01-2AB0	6AG1321-7BH01-4AS0	6AG1321-7TH00-4AB0
Based on	6ES7321-1FH00-0AA0 SIPLUS S7-300 SM321 16DI	6ES7321-7BH01-0AB0 SIPLUS S7-300 SM 321 16DI/24 V DC	6ES7321-7BH01-0AB0 SIPLUS S7-300 SM321 16DI	6ES7321-7TH00-0AB0 SIPLUS PCS 7 SM321 16DI
Ambient conditions				
Ambient temperature during operation				
• min.	-40 °C; = Tmin	-25 °C; = Tmin	0 °C; = Tmin	0 °C
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	60 °C; = Tmax	60 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)

Technical specifications

Article number	6AG1321-1FH00-7AA0	6AG1321-7BH01-2AB0	6AG1321-7BH01-4AS0	6AG1321-7TH00-4AB0
Based on	6ES7321-1FH00-0AA0 SIPLUS S7-300 SM321 16DI	6ES7321-7BH01-0AB0 SIPLUS S7-300 SM 321 16DI/24 V DC	6ES7321-7BH01-0AB0 SIPLUS S7-300 SM321 16DI	6ES7321-7TH00-0AB0 SIPLUS PCS 7 SM321 16DI
Resistance				
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on land craft, rail vehicles and special-purpose vehicles				
- to biologically active substances according to EN 60721-3-5		Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request		
- to chemically active substances according to EN 60721-3-5		Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *		
- to mechanically active substances according to EN 60721-3-5		Yes; Class 5S3 incl. sand, dust; *		
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 digital modules

SIPLUS S7-300 SM 322

Overview



- Digital outputs
- For connecting solenoid valves, contactors, small-power motors, lamps and motor starters

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

5

Ordering data

Article No.

SIPLUS S7-300 SM 322 digital output modules

For industrial applications with extended ambient conditions

Extended temperature range and exposure to environmental substances

8 outputs, 24 V DC, 2 A

6AG1322-1BF01-2XB0

16 outputs, 24 V DC, 0.5 A

6AG1322-1BH01-2AA0

32 outputs, 24 V DC, 0.5 A

6AG1322-1BL00-2AA0

8 outputs, 48 to 125 V DC, 1.5 A

6AG1322-1CF00-7AA0

8 outputs, 120/230 V AC, 1 A

6AG1322-1FF01-7AA0

16 outputs, 120/230 V AC, 1 A

6AG1322-1FH00-7AA0

8 outputs, relay contacts, 5 A

6AG1322-1HF10-2AA0

16 outputs, relay contacts, 8 A

6AG1322-1HH01-2AA0

8 outputs, 24 V DC, 0.5 A, diagnostics-capable

6AG1322-8BF00-2AB0

16 outputs, 24 V DC, 0.5 A, diagnostics-capable

6AG1322-8BH10-7AB0

Exposure to environmental substances

8 outputs, 120/230 V AC, 2 A

6AG1322-5FF00-4AB0

8 outputs, relay contacts, 5 A, with RC filter, overvoltage protection

6AG1322-5HF00-4AB0

For rolling stock railway applications

Conforms to EN 50155

16 outputs, 24 V DC, 0.5 A, high speed

6AG1322-1BH01-2AA0

32 outputs, 24 V DC, 0.5 A

6AG1322-1BL00-2AA0

8 outputs, relay contacts, 5 A

6AG1322-1HF10-2AA0

16 outputs, relay contacts, 8 A

6AG1322-1HH01-2AA0

8 outputs, 24 V DC, 0.5 A, diagnostics-capable

6AG1322-8BF00-2AB0

Accessories

Mandatory

Front connector

20-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BJ00-0AA0

6ES7392-1BJ00-1AB0

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0

6ES7392-1BM01-1AB0

Article No.

Consumables

Front door, elevated design

6ES7328-0AA00-7AA0

E.g. for 32-channel modules; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol

Bus connectors

6ES7390-0AA00-0AA0

1 unit (spare part)

Labeling strips

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XX00-0AA0

For modules with 40-pin front connector

6ES7392-2XX10-0AA0

Label cover

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XY00-0AA0

For modules with 40-pin front connector

6ES7392-2XY10-0AA0

Documentation

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

Technical specifications

Article number	6AG1322-1BF01-2XB0	6AG1322-8BF00-2AB0	6AG1322-1BH01-2AA0	6AG1322-1BL00-2AA0
Based on	6ES7322-1BF01-0AA0 SIPLUS S7-300 SM 322 8DO/24 V DC	6ES7322-8BF00-0AB0 SIPLUS S7-300 SM 322 8DO/24 V DC	6ES7322-1BH01-0AA0 SIPLUS S7-300 SM 322 16DO/24 V DC 0.5 A	6ES7322-1BL00-0AA0 SIPLUS S7-300 SM 322 32DO/24 V DC 0.5 A
Ambient conditions				
Ambient temperature during operation				
• min.	-25 °C	-25 °C; = Tmin	-25 °C; = Tmin	-25 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL use	70 °C; = Tmax; 60 °C @ UL/cUL use	70 °C; = Tmax; for use on railway vehicles according to EN50155, the rated temperature range -25 ... +55 °C (T1) or 60 °C @ UL/ULhaz/ATEX/FM use applies	70 °C; = Tmax; for use on railway vehicles according to EN50155, the rated temperature range -25 ... +55 °C (T1) or 60 °C @ UL/ULhaz/ATEX/FM use applies
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Resistance				
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on land craft, rail vehicles and special-purpose vehicles				
- to biologically active substances according to EN 60721-3-5		Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request
- to chemically active substances according to EN 60721-3-5		Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *	Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *	Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *
- to mechanically active substances according to EN 60721-3-5		Yes; Class 5S3 incl. sand, dust; *	Yes; Class 5S3 incl. sand, dust; *	Yes; Class 5S3 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 digital modules

SIPLUS S7-300 SM 322

Technical specifications

Article number	6AG1322-1BF01-2XB0	6AG1322-8BF00-2AB0	6AG1322-1BH01-2AA0	6AG1322-1BL00-2AA0
Based on	6ES7322-1BF01-0AA0 SIPLUS S7-300 SM 322 8DO/24 V DC	6ES7322-8BF00-0AB0 SIPLUS S7-300 SM 322 8DO/24 V DC	6ES7322-1BH01-0AA0 SIPLUS S7-300 SM 322 16DO/24 V DC 0.5 A	6ES7322-1BL00-0AA0 SIPLUS S7-300 SM 322 32DO/24 V DC 0.5 A
Usage in industrial process technology	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Against chemically active substances acc. to EN 60654-4	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04				
Remark	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Article number	6AG1322-1CF00-7AA0	6AG1322-1HF10-2AA0	6AG1322-5HF00-4AB0	6AG1322-1FF01-7AA0
Based on	6ES7322-1CF00-0AA0 SIPLUS S7-300 SM 322 8DO/48-125 V DC	6ES7322-1HF10-0AA0 SIPLUS S7-300 SM 322 8DO/RLY	6ES7322-5HF00-0AB0 SIPLUS S7-300 SM 322 8DO/RLY	6ES7322-1FF01-0AA0 SIPLUS S7-300 SM 322 8DO/120/230 V AC
Ambient conditions				
Ambient temperature during operation				
• min.	-25 °C	-25 °C; = Tmin	0 °C; = Tmin	-40 °C
• max.	70 °C; = Tmax; for use on railway vehicles according to EN50155, the rated temperature range -25 ... +55 °C (T1) or 60 °C @ UL/ULhaz/ATEX/FM use applies	60 °C	60 °C; = Tmax	70 °C; = Tmax; for use on railway vehicles according to EN 50155, the rated temperature range -25 ... +55 °C (T1) or 60 °C @ UL/UL hazardous use applies
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Resistance				
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on land craft, rail vehicles and special-purpose vehicles				
- to biologically active substances according to EN 60721-3-5		Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request		
- to chemically active substances according to EN 60721-3-5		Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *		
- to mechanically active substances according to EN 60721-3-5		Yes; Class 5S3 incl. sand, dust; *		

Technical specifications

Article number	6AG1322-1CF00-7AA0	6AG1322-1HF10-2AA0	6AG1322-5HF00-4AB0	6AG1322-1FF01-7AA0
Based on	6ES7322-1CF00-0AA0 SIPLUS S7-300 SM 322 8DO/48-125 V DC	6ES7322-1HF10-0AA0 SIPLUS S7-300 SM 322 8DO/RLY	6ES7322-5HF00-0AB0 SIPLUS S7-300 SM 322 8DO/RLY	6ES7322-1FF01-0AA0 SIPLUS S7-300 SM 322 8DO/120/230 V AC
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Article number	6AG1322-5FF00-4AB0	6AG1322-1FH00-7AA0	6AG1322-1HH01-2AA0	6AG1322-8BH10-7AB0
Based on	6ES7322-5FF00-0AB0 SIPLUS S7-300 SM 322 8DO	6ES7322-1FH00-0AA0 SIPLUS S7-300 SM 322 16DO	6ES7322-1HH01-0AA0 SIPLUS S7-300 SM 322 16DO/RLY	6ES7322-8BH10-0AB0 SIPLUS S7-300 SM 322 16DO 24 V DC
Ambient conditions				
Ambient temperature during operation				
• min.	0 °C; = Tmin	-40 °C; = Tmin	-40 °C; = Tmin	-25 °C; = Tmin
• max.	60 °C; = Tmax	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; @ 60°C for UL/ATEX/FM use
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	2 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 digital modules

SIPLUS S7-300 SM 322

Technical specifications

Article number	6AG1322-5FF00-4AB0	6AG1322-1FH00-7AA0	6AG1322-1HH01-2AA0	6AG1322-8BH10-7AB0
Based on	6ES7322-5FF00-0AB0	6ES7322-1FH00-0AA0	6ES7322-1HH01-0AA0	6ES7322-8BH10-0AB0
	SIPLUS S7-300 SM 322 8DO	SIPLUS S7-300 SM 322 16DO	SIPLUS S7-300 SM 322 16DO/RLY	SIPLUS S7-300 SM 322 16DO 24 V DC
Resistance				
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on land craft, rail vehicles and special-purpose vehicles				
- to biologically active substances according to EN 60721-3-5			Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request	
- to chemically active substances according to EN 60721-3-5			Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *	
- to mechanically active substances according to EN 60721-3-5			Yes; Class 5S3 incl. sand, dust; *	
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

5

Overview

- Digital inputs and outputs
- For connection of switches, 2-wire proximity switches (BEROs), solenoid valves, contactors, low-power motors, lamps and motor starters

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****Article No.****SIPLUS S7-300 SM 323 digital input/output module**

For industrial applications with extended ambient conditions

Extended temperature range and exposure to environmental substances

8 inputs, 8 outputs

6AG1323-1BH01-2AA0

For rolling stock railway applications

Conforms to EN 50155

8 inputs, 8 outputs

6AG1323-1BH01-2AA0

Accessories*Mandatory***Front connector**

20-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BJ00-0AA0
6ES7392-1BJ00-1AB0

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0
6ES7392-1BM01-1AB0

*Consumables***Front door, elevated design**

E.g. for 32-channel modules; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol

6ES7328-0AA00-7AA0

Bus connectors

1 unit (spare part)

6ES7390-0AA00-0AA0

Labeling strips

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XX00-0AA0

For modules with 40-pin front connector

6ES7392-2XX10-0AA0

Label cover

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XY00-0AA0

For modules with 40-pin front connector

6ES7392-2XY10-0AA0

*Documentation***SIMATIC Manual Collection**

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 digital modules

SIPLUS S7-300 SM 323**Technical specifications**

Article number	6AG1323-1BH01-2AA0
Based on	6ES7323-1BH01-0AA0 SIPLUS S7-300 SM 323 8DI/8DO
Ambient conditions	
Ambient temperature during operation	
• min.	-40 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Resistance	
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
Use on land craft, rail vehicles and special-purpose vehicles	
- to biologically active substances according to EN 60721-3-5	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request
- to chemically active substances according to EN 60721-3-5	Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *
- to mechanically active substances according to EN 60721-3-5	Yes; Class 5S3 incl. sand, dust; *

Article number	6AG1323-1BH01-2AA0
Based on	6ES7323-1BH01-0AA0 SIPLUS S7-300 SM 323 8DI/8DO
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!

Overview



- Analog inputs
- For connection of voltage and current sensors, thermocouples, resistors and resistance thermometers

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-300, analog input SM 331	6ES7331-1KF02-0AB0	SIMATIC S7-300, analog input SM 331	6ES7331-7PF01-0AB0
Isolated 8 AI, resolution 13-bit U/I/resistor/Pt100, NI100, NI1000, LG-NI1000, PTC/KTY, 66 ms conversion time; 1x 40-pin		Isolated, 2/3/4-wire, 8 AI, resistor, Pt100/200/1000 NI100/120/200/500/1000, CU10, characteristics according to GOST 16-bit (internal 24-bit), 50 ms, 1x 40-pin	
SIMATIC S7-300, analog input SM 331	6ES7331-7KF02-0AB0	SIMATIC S7-300, analog input SM 331	6ES7331-7PF11-0AB0
Isolated, 8 AI, resolution 9/12/14-bit, U/I/thermocouple/resistor, alarm, diagnostics, 1x 20-pin insertion/removal with active backplane bus		Isolated, 8 AI type B, E, J, K, L, N, R, S, T TXK/TXK (L) thermocouples according to GOST 16-bit, 50 ms, 1x 40-pin	
SIMATIC S7-300, analog input SM 331	6ES7331-7KB02-0AB0	SIMATIC S7, measuring range modules	6ES7974-0AA00-0AA0
Isolated, 2 AI, resolution 9/12/14-bit, U/I/thermocouple/resistor, alarm, diagnostics, 1x 20-pin, insertion/removal with active backplane bus		For analog inputs, 2 units per packing unit	
SIMATIC S7-300, analog input SM 331	6ES7331-7NF00-0AB0	Front connectors	
Isolated, 8 AI; +/-5/10 V, 1-5 V, +/-20 mA, 0/4 to 20 mA, 16-bit (55 ms), with single connection to common potential (50 V COM.), 1x 40-pin		SIMATIC S7-300, front connector	6ES7392-1AJ00-0AA0
SIMATIC S7-300, analog input SM 331	6ES7331-7NF10-0AB0	For signal modules with screw contacts, 20-pin	
Isolated, 8 AI; +/-5/10 V, 1-5 V, +/-20 mA, 0/4 to 20 mA, 16-bit, with single connection to common potential (60 V COM.), 4-channel operation: 10 ms, 8-channel operation: 23-95 ms, 1x 40-pin		SIMATIC S7-300, front connector	6ES7392-1AJ00-1AB0
SIMATIC S7-300, analog input SM 331	6ES7331-7HF01-0AB0	For signal modules with spring-loaded contacts, 20-pin	
Isolated, 8 AI, resolution 14-bit, 0.052 ms/channel current, voltage alarm, diagnostics, 1x 20-pin, suitable for isochronous mode, improved bus cycle time for isochronous mode		SIMATIC S7-300, front connector	6ES7392-1BJ00-0AA0
SIMATIC S7-300, analog input SM 331	6ES7331-7PE10-0AB0	For signal modules with spring-loaded contacts, 20-pin	
Single channel isolated 250 V AC, 6 AI type B, E, J, K, L, N, R, S, T thermocouples, voltage: +/-25 MV to +/-1 V 16-bit, 50 ms, 1x 40-pin		SIMATIC S7-300, front connector	6ES7392-1BJ00-1AB0
		For signal modules with screw contacts, 40-pin	
		SIMATIC S7-300, front connector	6ES7392-1AM00-0AA0
		With screw contacts, 40-pin, 100 units per packing unit	
		SIMATIC S7-300, front connector	6ES7392-1AM00-1AB0
		With screw contacts, 40-pin, 100 units per packing unit	
		SIMATIC S7-300, front connector	6ES7392-1BM01-0AA0
		For signal modules with spring-loaded contacts, 40-pin	
		SIMATIC S7-300, front connector	6ES7392-1BM01-1AB0
		For signal modules with spring-loaded contacts, 40-pin	

SIMATIC S7-300 Advanced Controllers

I/O modules

Analog modules

SM 331 analog input modules

Ordering data

Article No.

SIMATIC S7-300, front door Raised for 32-channel SM, allows the connection of 1.3 mm ² /16 AWG conductors 5 units per packing unit	6ES7328-0AA00-7AA0
SIMATIC TOP connect	See page 5/298
SIMATIC S7, bus connector (spare part)	6ES7390-0AA00-0AA0
SIMATIC S7, shield support element 80 mm wide With 2 rows for 4 shield connection clamps each	6ES7390-5AA00-0AA0
Shield connection clamps	
SIMATIC S7, shield connection clamp For 2 cables with 2-6 mm diameter 2 units per packing unit	6ES7390-5AB00-0AA0
SIMATIC S7, shield connection clamp For 1 cable with 3..8 mm diameter 2 units per packing unit	6ES7390-5BA00-0AA0
SIMATIC S7, shield connection clamp For 1 cable with 4..13 mm diameter 2 units per packing unit	6ES7390-5CA00-0AA0
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0
Labeling sheets for machine labeling	
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX00-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX00-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX00-0AA0

Article No.

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX00-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

5

Technical specifications

Article number	6ES7331-7KF02-0AB0 SM331, 8AI, 9/12/14Bit	6ES7331-7HF01-0AB0 SM331, 8AI, 14BIT, 0,052MS/channel	6ES7331-1KF02-0AB0 SM331, 8AI, 13bit	6ES7331-7KB02-0AB0 SM331, 2AI, 9/12/14Bit
Supply voltage				
Load voltage L+				
• Rated value (DC)	24 V	24 V		24 V
Input current				
from load voltage L+ (without load), max.	30 mA	50 mA		30 mA
from backplane bus 5 V DC, max.	50 mA	100 mA	90 mA	50 mA
Power loss				
Power loss, typ.	1 W	1.5 W	0.4 W	1 W
Analog inputs				
Number of analog inputs	8	8	8	2
• For resistance measurement	4		8	1
permissible input voltage for voltage input (destruction limit), max.	20 V; continuous; 75 V for max. 1 s (mark to space ratio 1:20)	20 V; 20 V DC permanent, 75 V DC for max. 1 s (duty factor 1:20)	30 V; 12 V continuous, 30 V for max. 1 s	20 V; continuous; 75 V for max. 1 s (mark to space ratio 1:20)
permissible input current for current input (destruction limit), max.	40 mA	40 mA	40 mA	40 mA
Input ranges (rated values), voltages				
• 0 to +10 V	No	No	Yes	No
• 1 V to 5 V	Yes	Yes	Yes	Yes
• 1 V to 10 V	No		No	No
• -1 V to +1 V	Yes	Yes	Yes	Yes
• -10 V to +10 V	Yes	Yes	Yes	Yes
• -2.5 V to +2.5 V	Yes		No	Yes
• -250 mV to +250 mV	Yes		No	Yes
• -5 V to +5 V	Yes	Yes	Yes	Yes
• -50 mV to +50 mV	No		Yes	No
• -500 mV to +500 mV	Yes	Yes	Yes	Yes
• -80 mV to +80 mV	Yes	Yes	No	Yes
Input ranges (rated values), currents				
• 0 to 20 mA	Yes	Yes	Yes	Yes
• -10 mA to +10 mA	Yes		No	Yes
• -20 mA to +20 mA	Yes	Yes	Yes	Yes
• -3.2 mA to +3.2 mA	Yes		No	Yes
• 4 mA to 20 mA	Yes	Yes	Yes	Yes
Input ranges (rated values), thermocouples				
• Type B	No		No	No
• Type C	No		No	
• Type E	Yes		No	Yes
• Type J	Yes		No	Yes
• Type K	Yes		No	Yes
• Type L	Yes		No	No
• Type N	Yes		No	Yes
• Type R	No		No	No
• Type S	No		No	No
• Type T	No		No	No
• Type U	No		No	No
• Type TXK/TXK(L) to GOST	No		No	No

SIMATIC S7-300 Advanced Controllers

I/O modules

Analog modules

SM 331 analog input modules

Technical specifications

Article number	6ES7331-7KF02-0AB0 SM331, 8AI, 9/12/14Bit	6ES7331-7HF01-0AB0 SM331, 8AI, 14BIT, 0,052MS/channel	6ES7331-1KF02-0AB0 SM331, 8AI, 13bit	6ES7331-7KB02-0AB0 SM331, 2AI, 9/12/14Bit
Input ranges (rated values), resistance thermometer				
• Cu 10	No		No	No
• Ni 100	Yes; Standard		Yes; Standard/climate	Yes
• Ni 1000	No		Yes	No
• LG-Ni 1000	No		Yes; Standard/climate	No
• Ni 120	No		No	No
• Ni 200	No		No	No
• Ni 500	No		No	No
• Pt 100	Yes; Standard		Yes; Standard/climate	Yes
• Pt 1000	No		No	No
• Pt 200	No		No	No
• Pt 500	No		No	No
Input ranges (rated values), resistors				
• 0 to 150 ohms	Yes		No	Yes
• 0 to 300 ohms	Yes		No	Yes
• 0 to 600 ohms	Yes		Yes	Yes
• 0 to 6000 ohms	No		Yes	No
Thermocouple (TC)				
Temperature compensation				
- parameterizable	Yes		No	Yes
- internal temperature compensation	Yes		No	Yes
- external temperature compensation with compensations socket	Yes		No	Yes
- for definable comparison point temperature	Yes			Yes
Characteristic linearization				
• parameterizable	Yes		Yes	Yes
- for thermocouples	Type E, J, K, L, N		No	Type E, J, K, L, N
- for resistance thermometer	Pt100 (standard, climatic range), Ni100 (standard, climatic range)		yes; Pt100 standard/air con.; Ni100 standard/air con.; Ni1000 standard/air con.; LG-Ni1000 standard/air con.	Pt100 (standard, climatic range), Ni100 (standard, climatic range)
Cable length				
• shielded, max.	200 m; 50 m at 80 mV and thermocouples	200 m	200 m; max. 50 m at 50 mV	200 m; 50 m at 80 mV and thermocouples
Analog value generation for the inputs				
Integration and conversion time/resolution per channel				
• Resolution with overrange (bit including sign), max.	15 bit; Unipolar: 9/12/12/14 bit; bipolar: 9 bit + sign/12 bit + sign/12 bit + sign/14 bit + sign	14 bit; Unipolar: 14 bit; bipolar: 13 bit + sign	13 bit	15 bit; Unipolar: 9/12/12/14 bit; bipolar: 9 bit + sign/12 bit + sign/12 bit + sign/14 bit + sign
• Integration time, parameterizable	Yes; 2,5 / 16,67 / 20 / 100 ms	Yes	Yes; 60 / 50 ms	Yes; 2,5 / 16,67 / 20 / 100 ms
• Basic conversion time (ms)	3 / 17 / 22 / 102 ms	52 µs per channel	66 / 55 ms	3 / 17 / 22 / 102 ms
• Interference voltage suppression for interference frequency f1 in Hz	400 / 60 / 50 / 10 Hz	none / 400 / 60 / 50 Hz	50 / 60 Hz	400 / 60 / 50 / 10 Hz
Encoder				
Connection of signal encoders				
• for voltage measurement	Yes		Yes	Yes
• for current measurement as 2-wire transducer	Yes	Yes	Yes; with external supply	Yes
• for current measurement as 4-wire transducer	Yes	Yes	Yes	Yes
• for resistance measurement with two-wire connection	Yes		Yes	Yes
• for resistance measurement with three-wire connection	Yes		Yes	Yes
• for resistance measurement with four-wire connection	Yes		Yes	Yes

Technical specifications

Article number	6ES7331-7KF02-0AB0 SM331, 8AI, 9/12/14Bit	6ES7331-7HF01-0AB0 SM331, 8AI, 14BIT, 0,052MS/channel	6ES7331-1KF02-0AB0 SM331, 8AI, 13bit	6ES7331-7KB02-0AB0 SM331, 2AI, 9/12/14Bit
Errors/accuracies				
Operational error limit in overall temperature range				
• Voltage, relative to input range, (+/-)	1 %; ±1% (80 mV); ±0.6% (250 mV to 1 000 mV); ±0.8% (2.5 V to 10 V)	0.4 %	0.6 %; ±0.6 % (±5 V, 10 V, 1 to 5 V, 0 to 10 V); ±0.5 % (±50 mV, 500 mV, 1 V)	1 %; ±1% (80 mV); ±0.6% (250 mV to 1 000 mV); ±0.8% (2.5 V to 10 V)
• Current, relative to input range, (+/-)	0.7 %; From 3.2 to 20 mA	0.3 %	0.5 %; ±20 mA, 0 to 20 mA, 4 to 20 mA	0.7 %; From 3.2 to 20 mA
• Resistance, relative to input range, (+/-)	0.7 %; 150, 300, 600 Ohm		0.5 %; 0 to 6 kohms, 0 to 600 kohms	0.7 %; 150, 300, 600 Ohm
• Resistance thermometer, relative to input range, (+/-)	0.7 %; ±0.7 % (Pt100/ Ni100); ±0.8 % (Pt100 climate)		1 Kelvin (Pt100, Ni100, climatic; Ni1000, LG-Ni1000, standard; Ni1000, LG-Ni1000, climatic); 1.2 Kelvin (Pt100, Ni100, standard)	0.7 %; ±0.7 % (Pt100/ Ni100); ±0.8 % (Pt100 climate)
• Thermocouple, relative to input range, (+/-)	1.1 %; Type E, J, K, L, N			1.1 %; Type E, J, K, L, N
Basic error limit (operational limit at 25 °C)				
• Voltage, relative to input range, (+/-)	0.6 %; ±0.4 % (250 mV to 1 000 mV); ±0.6 % (2.5 mV to 10 mV); ±0.7 % (80 mV)	0.25 %	0.4 %; 0.4% (±5 V, 10 V, 1 to 5 V, 0 to 10 V); 0.3% (±50 mV, 500 mV, 1 V)	0.6 %; ±0.6% (80 mV, 2.5 V to 10 V); ±0.4% (250 mV to 1 000 mV)
• Current, relative to input range, (+/-)	0.5 %; 3.2 to 20 mA	0.2 %	0.3 %; ±20 mA, 0 to 20 mA, 4 to 20 mA	0.5 %; 3.2 to 20 mA
• Resistance, relative to input range, (+/-)	0.5 %; 150, 300, 600 Ohm		0.3 %; 0 to 6 kohms, 0 to 600 kohms	0.5 %; 150, 300, 600 Ohm
• Resistance thermometer, relative to input range, (+/-)	0.6 %; ±0.5% (Pt100/ Ni100), ±0.6% (Pt100 climate)		1 Kelvin (Pt100, Ni100, standard); 0.8 Kelvin (Pt100, Ni100, climatic; Ni1000, LG-Ni1000, standard; Ni1000, LG-Ni1000, climatic)	0.6 %; ±0.5% (Pt100/ Ni100), ±0.6% (Pt100 climate)
• Thermocouple, relative to input range, (+/-)	0.7 %; Type E, N, J, K, L			0.7 %; Type E, N, J, K, L
Interrupts/diagnostics/ status information				
Diagnostics function	Yes; Parameterizable	Yes	No	Yes; Parameterizable
Alarms				
• Diagnostic alarm	Yes; Parameterizable, channels 0 and 2	Yes; Parameterizable	No	Yes
• Limit value alarm	Yes; Parameterizable	Yes; Parameterizable, channels 0 and 2	No	Yes; Parameterizable, channel 0
connection method				
required front connector	20-pin	20-pin	40-pin	20-pin
Dimensions				
Width	40 mm	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm	125 mm
Depth	117 mm	117 mm	117 mm	120 mm
Weights				
Weight, approx.	250 g	230 g	250 g	250 g

SIMATIC S7-300 Advanced Controllers

I/O modules

Analog modules

SM 331 analog input modules

Technical specifications

Article number	6ES7331-7PF01-0AB0	6ES7331-7PF11-0AB0	6ES7331-7PE10-0AB0	6ES7331-7NF00-0AB0	6ES7331-7NF10-0AB0
	SM331, 8AI, resistor, PT100/200/1000	SM331, 8AI, 16BIT, Thermocouples	SM331, 6AI, 16bit, Thermocouple	SM331,8AI, +/-5/10V,1-5V, +/-20mA,0/4-20mA	SM331,8AI, +/-5/10V,1-5V, +/-20mA,0/4-20mA
Supply voltage					
Load voltage L+					
• Rated value (DC)	24 V	24 V	24 V		24 V
Input current					
from load voltage L+ (without load), max.	240 mA	240 mA	150 mA		200 mA
from backplane bus 5 V DC, max.	100 mA	100 mA	100 mA	130 mA	100 mA
Power loss					
Power loss, typ.	4.6 W	3 W	2.2 W	0.6 W	3 W
Analog inputs					
Number of analog inputs	8	8	6	8	8
• For resistance measurement	8				
permissible input voltage for voltage input (destruction limit), max.	75 V; 35 V continuous, 75 V for max. 1 s (mark to space ratio 1:20)	75 V; 20 V DC permanent, 75 V DC for max. 1 s (duty factor 1:20)	35 V; 35 V continuous, 75 V for max. 1 s (mark to space ratio 1:20)	50 V; Permanent	75 V; 35 V continuous, 75 V for max. 1 s (mark to space ratio 1:20)
permissible input current for current input (destruction limit), max.				32 mA	40 mA
Input ranges (rated values), voltages					
• 0 to +10 V	No	No	No	No	No
• 1 V to 5 V	No	No	No	Yes	Yes
• 1 V to 10 V	No	No	No	No	No
• -1 V to +1 V	No	No	Yes	No	No
• -10 V to +10 V	No	No	No	Yes	Yes
• -2.5 V to +2.5 V	No	No	No	No	No
• -250 mV to +250 mV	No	No	Yes	No	No
• -5 V to +5 V	No	No	No	Yes	Yes
• -50 mV to +50 mV	No	No	Yes	No	No
• -500 mV to +500 mV	No	No	Yes	No	No
• -80 mV to +80 mV	No	No	Yes	No	No
Input ranges (rated values), currents					
• 0 to 20 mA	No	No	No	Yes	Yes
• -10 mA to +10 mA	No	No	No	No	No
• -20 mA to +20 mA	No	No	No	Yes	Yes
• -3.2 mA to +3.2 mA	No	No	No	No	No
• 4 mA to 20 mA	No	No	No	Yes	Yes
Input ranges (rated values), thermocouples					
• Type B	No	Yes	Yes	No	No
• Type C	No	Yes	Yes	No	No
• Type E	No	Yes	Yes	No	No
• Type J	No	Yes	Yes	No	No
• Type K	No	Yes	Yes	No	No
• Type L	No	Yes	Yes	No	No
• Type N	No	Yes	Yes	No	No
• Type R	No	Yes	Yes	No	No
• Type S	No	Yes	Yes	No	No
• Type T	No	Yes	Yes	No	No
• Type U	No	Yes	Yes	No	No
• Type TXK/TXK(L) to GOST	No	Yes	Yes	No	No

Technical specifications

Article number	6ES7331-7PF01-0AB0	6ES7331-7PF11-0AB0	6ES7331-7PE10-0AB0	6ES7331-7NF00-0AB0	6ES7331-7NF10-0AB0
	SM331, 8AI, resistor, PT100/200/1000	SM331, 8AI, 16BIT, Thermocouples	SM331, 6AI, 16bit, Thermocouple	SM331,8AI, +/-5/10V,1-5V, +/-20mA,0/4-20mA	SM331,8AI, +/-5/10V,1-5V, +/-20mA,0/4-20mA
Input ranges (rated values), resistance thermometer					
• Cu 10	Yes	No	No	No	No
• Ni 100	Yes	No	No	No	No
• Ni 1000	Yes	No	No	No	No
• LG-Ni 1000	Yes	No	No	No	No
• Ni 120	Yes	No	No	No	No
• Ni 200	Yes	No	No	No	No
• Ni 500	Yes	No	No	No	No
• Pt 100	Yes	No	No	No	No
• Pt 1000	Yes	No	No	No	No
• Pt 200	Yes	No	No	No	No
• Pt 500	Yes	No	No	No	No
Input ranges (rated values), resistors					
• 0 to 150 ohms	Yes	No	No	No	No
• 0 to 300 ohms	Yes	No	No	No	No
• 0 to 600 ohms	Yes	No	No	No	No
• 0 to 6000 ohms		No	No	No	No
Thermocouple (TC)					
Temperature compensation					
- parameterizable		Yes	Yes		
- internal temperature compensation		Yes	Yes		
- external temperature compensation with Pt100		Yes	Yes		
- external temperature compensation with compensations socket		Yes	Yes		
- for definable comparison point temperature		Yes	Yes		
Characteristic linearization					
• parameterizable	Yes	Yes	Yes		
- for thermocouples		Type B, E, J, K, L, N, R, S, T, U, C	Type B, E, J, K, L, N, R, S, T, U, C, TXK, XK(L)		
- for resistance thermometer	Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni200, Ni500, Ni1000, Cu10; (standard/ climate)		No		
Cable length					
• shielded, max.	200 m	100 m	200 m	200 m	200 m
Analog value generation for the inputs					
Integration and conversion time/resolution per channel					
• Resolution with overrange (bit including sign), max.	16 bit; Two's complement	16 bit; Two's complement	16 bit; Two's complement	16 bit; Unipolar: 15/15/15/15 bit; bipolar: 15 bit + sign/15 bit + sign/15 bit + sign/15 bit + sign	16 bit; Unipolar: 15/15/15/15 bit; bipolar: 15 bit + sign/15 bit + sign/15 bit + sign/15 bit + sign
• Integration time, parameterizable	Yes	Yes	Yes	Yes; 10/ 16.67/ 20/ 100 ms	Yes; 23 / 72 / 83 / 95 ms
• Basic conversion time (ms)	up to 4 channels: 10 ms per module, over 5 channels: 190 ms per module, 8 channels: 80 ms	Up to 4 channels: 10 ms per module, 5 channels upwards: 190 ms per module	30 / 50 / 60 / 300 ms		10 ms (4-channel mode); 95/83/72/23 ms (8-channel mode)
• Integration time (ms)			10/ 16.67/ 20/ 100 ms		
• Interference voltage suppression for interference frequency f1 in Hz	400 / 60 / 50 Hz	400 / 60 / 50 Hz	10 / 50 / 60 / 400 Hz	400 / 60 / 50 / 10 Hz	400 / 60 / 50 Hz, combinations of 400, 60, 50 Hz

SIMATIC S7-300 Advanced Controllers

I/O modules

Analog modules

SM 331 analog input modules

Technical specifications

Article number	6ES7331-7PF01-0AB0	6ES7331-7PF11-0AB0	6ES7331-7PE10-0AB0	6ES7331-7NF00-0AB0	6ES7331-7NF10-0AB0
	SM331, 8AI, resistor, PT100/200/1000	SM331, 8AI, 16BIT, Thermocouples	SM331, 6AI, 16bit, Thermocouple	SM331,8AI, +/-5/10V,1-5V, +/-20mA,0/4-20mA	SM331,8AI, +/-5/10V,1-5V, +/-20mA,0/4-20mA
Encoder					
Connection of signal encoders					
<ul style="list-style-type: none"> for voltage measurement for current measurement as 2-wire transducer 			Yes	Yes	Yes
<ul style="list-style-type: none"> for current measurement as 4-wire transducer 				Yes	Yes
<ul style="list-style-type: none"> for resistance measurement with two-wire connection 	Yes; without resistance correction				
<ul style="list-style-type: none"> for resistance measurement with three-wire connection 	Yes				
<ul style="list-style-type: none"> for resistance measurement with four-wire connection 	Yes				
Errors/accuracies					
Operational error limit in overall temperature range					
<ul style="list-style-type: none"> Voltage, relative to input range, (+/-) 		±1 K	Operating error at 0... 60 °C: ±0.12% @ ±25 mV, ±0.08% @ ±50 mV, ±0.6% @ ±80 mV, ±0.05% @ ±250 mV, ±0.05% @ 500 mV, ±0.05% @ ±1 V	0.1 %; At Ucm = 0 V or ±0.7 % at Ucm = 50 V	0.1 %
<ul style="list-style-type: none"> Current, relative to input range, (+/-) 				0.3 %; At Ucm = 0 V or ±0.9 % at Ucm = 50 V	0.1 %
<ul style="list-style-type: none"> Resistance, relative to input range, (+/-) 	0.1 %				
<ul style="list-style-type: none"> Resistance thermometer, relative to input range, (+/-) 	±1 K				
<ul style="list-style-type: none"> Thermocouple, relative to input range, (+/-) 		Type T: ±0.18%, Type U: ±0.15%, Type E: ±0.12%, Type J: ±0.12%, Type L: ±0.17%, Type K: ±0.15%, Type N: ±0.17%, Type R: ±0.08%, Type S: ±0.10%, Type B: ±0.13%, Type C: ±0.10%, TXK/XK(L): ±1.00% accuracy in the lower range of the characteristic curve	See manual for details		
Basic error limit (operational limit at 25 °C)					
<ul style="list-style-type: none"> Voltage, relative to input range, (+/-) 			See manual for details	0.05 %	0.05 %
<ul style="list-style-type: none"> Current, relative to input range, (+/-) 				0.05 %	0.05 %
<ul style="list-style-type: none"> Resistance, relative to input range, (+/-) 	0.05 %				
<ul style="list-style-type: none"> Resistance thermometer, relative to input range, (+/-) 	±0.5 K				

5

Technical specifications

Article number	6ES7331-7PF01-0AB0	6ES7331-7PF11-0AB0	6ES7331-7PE10-0AB0	6ES7331-7NF00-0AB0	6ES7331-7NF10-0AB0
	SM331, 8AI, resistor, PT100/200/1000	SM331, 8AI, 16BIT, Thermocouples	SM331, 6AI, 16bit, Thermocouple	SM331,8AI, +/-5/10V,1-5V, +/-20mA,0/4-20mA	SM331,8AI, +/-5/10V,1-5V, +/-20mA,0/4-20mA
• Thermocouple, relative to input range, (+/-)		Type T: $\pm 0.13\%$, Type U: $\pm 0.08\%$, Type E: $\pm 0.05\%$, Type J: $\pm 0.04\%$, Type L: $\pm 0.06\%$, Type K: $\pm 0.04\%$, Type N: $\pm 0.04\%$, Type R: $\pm 0.03\%$, Type S: $\pm 0.03\%$, Type B: $\pm 0.05\%$, Type C: $\pm 0.02\%$, TXK/XK(L): $\pm 0.67\%$ accuracy in the lower range of the characteristic curve	See manual for details		
Interrupts/diagnostics/status information					
Diagnostics function	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
Alarms					
• Diagnostic alarm	Yes; Parameterizable per group	Yes; Parameterizable per group	Yes; channel by channel	Yes; Parameterizable	Yes; Parameterizable
• Limit value alarm	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable, channels 0 and 2	Yes; Parameterizable all channels (end of cycle interrupt is also supported across modules)
• Hardware interrupt	Yes; Parameterizable, channels 0 to 7	Yes; Parameterizable, channels 0 to 7	Yes; Parameterizable		Yes; Parameterizable, channels 0 to 7 (on exceeding limit value), at end of cycle
connection method					
required front connector	40-pin	40-pin	40-pin	40-pin	40-pin
Dimensions					
Width	40 mm	40 mm	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm	125 mm	125 mm
Depth	120 mm	120 mm	120 mm	117 mm	117 mm
Weights					
Weight, approx.	272 g	272 g	272 g	272 g	272 g

SIMATIC S7-300 Advanced Controllers

I/O modules

Analog modules

SM 332 analog output modules

Overview



- Analog outputs
- For the connection of analog actuators

5

Ordering data

Article No.

SM 332 analog output modules

SIMATIC S7-300, SM 332 analog output module

Isolated, 4 AO, U/I; diagnostics; resolution 11/12 bit, 20-pin, insertion/removal with active backplane bus possible

6ES7332-5HD01-0AB0

SIMATIC S7-300, SM 332 analog output module

Channel-by-channel isolated, 4 AO, resolution 16 bit, 0-10 V, 1-5 V, +/-10 V, +/-20 mA, 0/4-20 mA, 20-pin, suitable for isochronous mode, improved bus cycle time for isochronous mode

6ES7332-7ND02-0AB0

SIMATIC S7-300, SM 332 analog output module

Isolated, 2 AO, U/I; resolution 11/12 bit, 20-pin, insertion/removal with active backplane bus possible

6ES7332-5HB01-0AB0

SIMATIC S7-300, SM 332 analog output module

Isolated, 8 AO, U/I; diagnostics; resolution 11/12 bit, 40-pin, insertion/removal with active backplane bus possible

6ES7332-5HF00-0AB0

Front connectors

SIMATIC S7-300, front connector

For signal modules with screw contacts, 20-pin

6ES7392-1AJ00-0AA0

SIMATIC S7-300, front connector

For signal modules with screw contacts, 20-pin
100 units per packing unit

6ES7392-1AJ00-1AB0

SIMATIC S7-300, front connector

For signal modules with spring-loaded contacts, 20-pin

6ES7392-1BJ00-0AA0

SIMATIC S7-300, front connector

For signal modules with spring-loaded contacts, 20-pin
100 units per packing unit

6ES7392-1BJ00-1AB0

SIMATIC S7-300, front connector

With screw contacts, 40-pin

6ES7392-1AM00-0AA0

SIMATIC S7-300, front connector

With screw contacts, 40-pin,
100 units per packing unit

6ES7392-1AM00-1AB0

Article No.

SIMATIC S7-300, front connector

For signal modules with spring-loaded contacts, 40-pin

6ES7392-1BM01-0AA0

SIMATIC S7-300, front connector

For signal modules with spring-loaded contacts, 40-pin
100 units per packing unit

6ES7392-1BM01-1AB0

SIMATIC S7-300, front door

Raised for 32-channel SM, allows the connection of 1.3 mm²/16 AWG conductors 5 units per packing unit

6ES7328-0AA00-7AA0

SIMATIC TOP connect

See page 5/298

Bus connectors

SIMATIC S7, bus connector (spare part)

6ES7390-0AA00-0AA0

SIMATIC S7, shield support element 80 mm wide

With 2 rows for 4 shield connection clamps each

6ES7390-5AA00-0AA0

Shield connection clamps

SIMATIC S7, shield connection clamp

For 2 cables with 2-6 mm diameter
2 units per packing unit

6ES7390-5AB00-0AA0

SIMATIC S7, shield connection clamp

For 1 cable with 3..8 mm diameter
2 units per packing unit

6ES7390-5BA00-0AA0

SIMATIC S7, shield connection clamp

For 1 cable with 4..13 mm diameter
2 units per packing unit

6ES7390-5CA00-0AA0

SIMATIC S7, labeling cover (spare part)

For modules with 20-pin front connector,
10 units per packing unit

6ES7392-2XY00-0AA0

SIMATIC S7-300, labeling strip (spare part)

For modules with 20-pin front connector,
10 units per packing unit

6ES7392-2XX00-0AA0

Ordering data	Article No.	Article No.
Labeling sheets for machine labeling		
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX00-0AA0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

Technical specifications

Article number	6ES7332-5HB01-0AB0	6ES7332-5HD01-0AB0	6ES7332-5HF00-0AB0	6ES7332-7ND02-0AB0
	SM332, 2AA, U/I, 11/12Bit	SM332, 4AO, U/I, 11/12Bit	SM332, 8AA, U/I, 11/12Bit	SM332, 4AA, 0-10V, 0-5V, +/-10V, +/-20mA
Supply voltage				
Load voltage L+				
• Rated value (DC)	24 V	24 V	24 V	24 V
Input current				
from load voltage L+ (without load), max.	135 mA	240 mA	340 mA	290 mA
from backplane bus 5 V DC, max.	60 mA	60 mA	100 mA	120 mA
Power loss				
Power loss, typ.	3 W	3 W	6 W	3 W
Analog outputs				
Number of analog outputs	2	4	8	4; Isochronous mode
Voltage output, short-circuit protection	Yes	Yes	Yes	Yes
Voltage output, short-circuit current, max.	25 mA	25 mA	25 mA	40 mA
Current output, no-load voltage, max.	18 V	18 V	18 V	18 V
Output ranges, voltage				
• 0 to 10 V	Yes	Yes	Yes	Yes
• 1 V to 5 V	Yes	Yes	Yes	Yes
• -10 V to +10 V	Yes	Yes	Yes	Yes
Output ranges, current				
• 0 to 20 mA	Yes	Yes	Yes	Yes
• -20 mA to +20 mA	Yes	Yes	Yes	Yes
• 4 mA to 20 mA	Yes	Yes	Yes	Yes

SIMATIC S7-300 Advanced Controllers

I/O modules

Analog modules

SM 332 analog output modules

Technical specifications

Article number	6ES7332-5HB01-0AB0 SM332, 2AA, U/I, 11/12Bit	6ES7332-5HD01-0AB0 SM332, 4AO, U/I, 11/12Bit	6ES7332-5HF00-0AB0 SM332, 8AA, U/I, 11/12Bit	6ES7332-7ND02-0AB0 SM332, 4AA, 0-10V, 0-5V, +/-10V,+/-20mA
Load impedance (in rated range of output)				
• with voltage outputs, min.	1 kΩ	1 kΩ	1 kΩ	1 kΩ
• with voltage outputs, capacitive load, max.	1 μF	1 μF	1 μF	1 μF
• with current outputs, max.	500 Ω	500 Ω	500 Ω	500 Ω
• with current outputs, inductive load, max.	10 mH	10 mH	10 mH	1 mH
Cable length				
• shielded, max.	200 m	200 m	200 m	200 m
Analog value generation for the outputs				
Integration and conversion time/resolution per channel				
• Resolution with overrange (bit including sign), max.	12 bit; ±10 V, ±20 mA, 4 mA to 20 mA, 1 V to 5 V; 11 bit + sign; 0 V to 10 V, 0 mA to 20 mA: 12 bit	12 bit; ±10 V, ±20 mA, 4 mA to 20 mA, 1 V to 5 V; 11 bit + sign; 0 V to 10 V, 0 mA to 20 mA: 12 bit	12 bit; ±10 V, ±20 mA, 4 mA to 20 mA, 1 V to 5 V; 11 bit + sign; 0 V to 10 V, 0 mA to 20 mA: 12 bit	16 bit
• Conversion time (per channel)	0.8 ms	0.8 ms	0.8 ms	200 μs; in isochronous mode 640 μs
Settling time				
• for resistive load	0.2 ms	0.2 ms	0.2 ms	0.2 ms
• for capacitive load	3.3 ms	3.3 ms	3.3 ms	3.3 ms
• for inductive load	0.5 ms; 0.5 ms (1 mH); 3.3 ms (10 mH)	0.5 ms; 0.5 ms (1 mH); 3.3 ms (10 mH)	0.5 ms; 0.5 ms (1 mH); 3.3 ms (10 mH)	0.5 ms
Errors/accuracies				
Operational error limit in overall temperature range				
• Voltage, relative to output range, (+/-)	0.5 %	0.5 %	0.5 %	0.12 %
• Current, relative to output range, (+/-)	0.6 %	0.6 %	0.6 %	0.18 %
Basic error limit (operational limit at 25 °C)				
• Voltage, relative to output range, (+/-)	0.4 %	0.4 %	0.4 %	0.02 %
• Current, relative to output range, (+/-)	0.5 %	0.5 %	0.5 %	0.02 %
Interrupts/diagnostics/ status information				
Diagnostics function	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
Alarms				
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
connection method				
required front connector	20-pin	20-pin	40-pin	20-pin
Dimensions				
Width	40 mm	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm	125 mm
Depth	117 mm	117 mm	117 mm	117 mm
Weights				
Weight, approx.	220 g	220 g	272 g	220 g

5

Overview



- Analog inputs and outputs
- For the connection of analog sensors and actuators

Ordering data	Article No.	Ordering data	Article No.
SM 334 analog input/output modules		SIMATIC S7, shield connection clamp	6ES7390-5BA00-0AA0
SIMATIC S7-300, SM 334 analog output module Non-isolated, 4 AO/2 AO, 1x 20-pin, insertion/removal with active backplane bus possible	6ES7334-0CE01-0AA0	For 1 cable with 3..8 mm diameter 2 units per packing unit	
SIMATIC S7-300, SM 334 analog output module Isolated, 4 AI/2 AO, 12 bit, 0-10 V f. Pt100 (climate range-120-155 degrees) and 10 kOhm measuring range, 1x 20-pin	6ES7334-0KE00-0AB0	SIMATIC S7, shield connection clamp For 1 cable with 4..13 mm diameter 2 units per packing unit	6ES7390-5CA00-0AA0
Front connectors		SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin	6ES7392-1AJ00-0AA0	SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin 100 units per packing unit	6ES7392-1AJ00-1AB0	Labeling sheets for machine labeling	
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 20-pin	6ES7392-1BJ00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX00-0AA0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 20-pin 100 units per packing unit	6ES7392-1BJ00-1AB0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX00-0AA0
SIMATIC S7-300, front door Raised for 32-channel SM, allows the connection of 1.3 mm ² /16 AWG conductors 5 units per packing unit	6ES7328-0AA00-7AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX00-0AA0
SIMATIC TOP connect	See page 5/298		
SIMATIC S7, bus connector (spare part)	6ES7390-0AA00-0AA0		
SIMATIC S7, shield support element 80 mm wide With 2 rows for 4 shield connection clamps each	6ES7390-5AA00-0AA0		
Shield connection clamps			
SIMATIC S7, shield connection clamp For 2 cables with 2-6 mm diameter 2 units per packing unit	6ES7390-5AB00-0AA0		

SIMATIC S7-300 Advanced Controllers

I/O modules

Analog modules

SM 334 analog input/output modules

Ordering data

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red
10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

Article No.

6ES7392-2DX00-0AA0

SIMATIC Manual Collection on DVD, 5 languages

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

Article No.

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

Technical specifications

Article number	6ES7334-0CE01-0AA0	6ES7334-0KE00-0AB0
	SM334, 4AI, 2AO, non isolated	SM334, 4AI/2AO, 0-10V f.PT100
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	24 V
Input current		
from supply and load voltage L+ (without load), max.	110 mA	80 mA
from backplane bus 5 V DC, max.	55 mA	60 mA
Power loss		
Power loss, typ.	3 W	2 W
Analog inputs		
Number of analog inputs	4	4
• For voltage measurement	4	2
• For resistance measurement		4
permissible input voltage for voltage input (destruction limit), max.	20 V	20 V; continuous; 75 V for max. 1 s (mark to space ratio 1:20)
permissible input current for current input (destruction limit), max.	40 mA	
Cycle time (all channels) max.	5 ms	85 ms
Input ranges (rated values), voltages		
• 0 to +10 V	Yes	Yes
Input ranges (rated values), currents		
• 0 to 20 mA	Yes	
Input ranges (rated values), resistance thermometer		
• Pt 100		Yes; only climatic range
Input ranges (rated values), resistors		
• 0 to 10000 ohms		Yes
Characteristic linearization		
• parameterizable		Yes
- for resistance thermometer		Pt100 (climate)
Cable length		
• shielded, max.	200 m	100 m
Analog outputs		
Number of analog outputs	2	2
Voltage output, short-circuit protection	Yes	Yes
Voltage output, short-circuit current, max.	11 mA	30 mA
Current output, no-load voltage, max.	15 V	

Technical specifications

Article number	6ES7334-0CE01-0AA0	6ES7334-0KE00-0AB0
	SM334, 4AI, 2AO, non isolated	SM334, 4AI/2AO, 0-10V f.PT100
Output ranges, voltage • 0 to 10 V	Yes	Yes
Output ranges, current • 0 to 20 mA	Yes	
Load impedance (in rated range of output) • with voltage outputs, min. • with voltage outputs, capacitive load, max. • with current outputs, max. • with current outputs, inductive load, max.	5 kΩ 1 μF 300 Ω 1 mH	2.5 kΩ 1 μF
Cable length • shielded, max.	200 m	100 m
Analog value generation for the inputs Integration and conversion time/resolution per channel • Resolution with overrange (bit including sign), max. • Integration time, parameterizable • Integration time (ms) • Interference voltage suppression for interference frequency f1 in Hz	8 bit No	12 bit Yes 16,67 / 20 ms 50 / 60 Hz
Analog value generation for the outputs Integration and conversion time/resolution per channel • Resolution with overrange (bit including sign), max. • Conversion time (per channel)	8 bit 500 μs	12 bit 500 μs
Settling time • for resistive load • for capacitive load • for inductive load	0.3 ms 3 ms 0.3 ms	0.8 ms 0.8 ms
Encoder Connection of signal encoders • for voltage measurement • for current measurement as 2-wire transducer • for current measurement as 4-wire transducer • for resistance measurement with two-wire connection • for resistance measurement with three-wire connection • for resistance measurement with four-wire connection	Yes No Yes	Yes Yes Yes Yes Yes
Errors/accuracies Operational error limit in overall temperature range • Voltage, relative to input range, (+/-) • Current, relative to input range, (+/-) • Resistance, relative to input range, (+/-) • Resistance thermometer, relative to input range, (+/-) • Voltage, relative to output range, (+/-) • Current, relative to output range, (+/-)	0.9 % 0.8 % 3.5 % 1 % 0.6 % 1 %	0.7 %; 0 to 10V 3.5 %; 10 kOhm 1 % 1 %

SIMATIC S7-300 Advanced Controllers

I/O modules

Analog modules

SM 334 analog input/output modules**Technical specifications**

Article number	6ES7334-0CE01-0AA0 SM334, 4AI, 2AO, non isolated	6ES7334-0KE00-0AB0 SM334, 4AI/2AO, 0-10V f.PT100
Basic error limit (operational limit at 25 °C)		
• Voltage, relative to input range, (+/-)	0.7 %	0.5 %; 0 to 10V
• Current, relative to input range, (+/-)	0.6 %	
• Resistance, relative to input range, (+/-)		2.8 %; 10 kOhm
• Resistance thermometer, relative to input range, (+/-)		0.8 %
• Voltage, relative to output range, (+/-)	0.5 %	0.85 %
• Current, relative to output range, (+/-)	0.5 %	
Interrupts/diagnostics/ status information		
Alarms	No	No
Diagnostics function	No	No
connection method		
required front connector	20-pin	20-pin
Dimensions		
Width	40 mm	40 mm
Height	125 mm	125 mm
Depth	117 mm	117 mm
Weights		
Weight, approx.	285 g	200 g

5

Overview



- Analog inputs
- For connecting voltage sensors and current sensors, thermocouples, resistors and resistance thermometers

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

SIPLUS S7-300 SM 331 analog input modules

For industrial applications with extended ambient conditions

Extended temperature range and exposure to environmental substances

8 inputs, 13-bit resolution

6AG1331-1KF02-7AB0

2 inputs, 9/12/14-bit resolution

6AG1331-7KB02-2AB0

8 inputs, 9/12/14-bit resolution

6AG1331-7KF02-2AB0

8 inputs, enhanced 16-bit resolution

6AG1331-7NF00-2AB0

8 inputs, enhanced 16-bit resolution, 4-channel mode

6AG1331-7NF10-2AB0

Exposure to environmental substances

8 inputs, for thermal resistors

6AG1331-7PF01-4AB0

8 inputs, for thermocouples

6AG1331-7PF11-4AB0

For rolling stock railway applications

Conforms to EN 50155

8 inputs, 9/12/14-bit resolution

6AG1331-7KF02-2AB0

8 inputs, enhanced 16-bit resolution

6AG1331-7NF00-2AB0

Accessories

Mandatory

Front connector

20-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BJ00-0AA0
6ES7392-1BJ00-1AB0

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0
6ES7392-1BM01-1AB0

Consumables

Front door, elevated design

6ES7328-0AA00-7AA0

E.g. for 32-channel modules; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol

Article No.

Article No.

Bus connectors

6ES7390-0AA00-0AA0

1 unit (spare part)

Labeling strips

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XX00-0AA0

For modules with 40-pin front connector

6ES7392-2XX10-0AA0

Label cover

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XY00-0AA0

For modules with 40-pin front connector

6ES7392-2XY10-0AA0

Documentation

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 analog modules

SIPLUS S7-300 SM 331

Technical specifications

Article number	6AG1331-1KF02-7AB0	6AG1331-7KB02-2AB0	6AG1331-7KF02-2AB0
Based on	6ES7331-1KF02-0AB0 SIPLUS S7-300 SM 331 8AI	6ES7331-7KB02-0AB0 SIPLUS S7-300 SM 331 2AI	6ES7331-7KF02-0AB0 SIPLUS S7-300 SM 331 8AI
Ambient conditions			
Ambient temperature during operation			
• min.	-25 °C	-25 °C; = Tmin	-25 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; for use on railway vehicles according to EN50155, the rated temperature range -25 ... +55 °C (T1) or 60 °C @ UL/ULhaz/ATEX/FM use applies
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Resistance			
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on land craft, rail vehicles and special-purpose vehicles			
- to biologically active substances according to EN 60721-3-5			Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request
- to chemically active substances according to EN 60721-3-5			Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *
- to mechanically active substances according to EN 60721-3-5			Yes; Class 5S3 incl. sand, dust; *
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

Technical specifications

Article number	6AG1331-7NF00-2AB0	6AG1331-7NF10-2AB0	6AG1331-7PF01-4AB0	6AG1331-7PF11-4AB0
Based on	6ES7331-7NF00-0AB0 SIPLUS S7-300 SM331 8AI - 40pol	6ES7331-7NF10-0AB0 SIPLUS S7-300 SM 331 8AI - 40pol	6ES7331-7PF01-0AB0 SIPLUS S7-300 SM 331 8AI - 40pol	6ES7331-7PF11-0AB0 SIPLUS S7-300 SM 331 8AI 40pol
Ambient conditions				
Ambient temperature during operation				
• min.	-25 °C; = Tmin	-25 °C; = Tmin	0 °C; = Tmin	0 °C; = Tmin
• max.	70 °C; = Tmax; for use on railway vehicles according to EN 50155, the rated temperature range -25 ... +55 °C (T1) or 60 °C @ UL/UL hazardous use applies	60 °C; = Tmax	60 °C; = Tmax	60 °C; = Tmax
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Resistance				
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on land craft, rail vehicles and special-purpose vehicles				
- to biologically active substances according to EN 60721-3-5	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request
- to chemically active substances according to EN 60721-3-5	Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *	Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *	Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *	Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *
- to mechanically active substances according to EN 60721-3-5	Yes; Class 5S3 incl. sand, dust; *	Yes; Class 5S3 incl. sand, dust; *	Yes; Class 5S3 incl. sand, dust; *	Yes; Class 5S3 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 analog modules

SIPLUS S7-300 SM 331**Technical specifications**

Article number	6AG1331-7NF00-2AB0	6AG1331-7NF10-2AB0	6AG1331-7PF01-4AB0	6AG1331-7PF11-4AB0
Based on	6ES7331-7NF00-0AB0	6ES7331-7NF10-0AB0	6ES7331-7PF01-0AB0	6ES7331-7PF11-0AB0
	SIPLUS S7-300 SM331 8AI - 40pol	SIPLUS S7-300 SM 331 8AI - 40pol	SIPLUS S7-300 SM 331 8AI - 40pol	SIPLUS S7-300 SM 331 8AI - 40pol
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

Overview



- Analog outputs
- For connection of analog actuators

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data	Article No.	Ordering data	Article No.
SIPLUS S7-300 SM 332 analog output modules <i>For industrial applications with extended ambient conditions</i> <u>Extended temperature range and exposure to environmental substances</u> 2 outputs, 11/12-bit 4 outputs, 11/12-bit 8 outputs, 11/12-bit <u>Exposure to environmental substances</u> 4 outputs, 16-bit; only exposure to environmental substances <i>For rolling stock railway applications</i> <u>Conforms to EN 50155</u> 2 outputs, 11/12-bit	6AG1332-5HB01-2AB0 6AG1332-5HD01-7AB0 6AG1332-5HF00-2AB0 6AG1332-7ND02-4AB0 6AG1332-5HB01-2AB0	Bus connectors 1 unit (spare part)	6ES7390-0AA00-0AA0
Accessories <i>Mandatory</i> Front connector 20-pin, with spring-loaded contacts • 1 unit • 100 units 40-pin, with spring-loaded contacts • 1 unit • 100 units	6ES7392-1BJ00-0AA0 6ES7392-1BJ00-1AB0 6ES7392-1BM01-0AA0 6ES7392-1BM01-1AB0	Labeling strips 10 units (spare part) For modules with 20-pin front connector For modules with 40-pin front connector	6ES7392-2XX00-0AA0 6ES7392-2XX10-0AA0
<i>Consumables</i> Front door, elevated design E.g. for 32-channel modules; for connecting 1.3 mm ² /16 AWG conductors; cabling diagram and labeling strips in petrol	6ES7328-0AA00-7AA0	Label cover 10 units (spare part) For modules with 20-pin front connector For modules with 40-pin front connector <i>Documentation</i> SIMATIC Manual Collection Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7392-2XY00-0AA0 6ES7392-2XY10-0AA0 6ES7998-8XC01-8YE0

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 analog modules

SIPLUS S7-300 SM 332

Technical specifications

Article number	6AG1332-5HD01-7AB0	6AG1332-7ND02-4AB0	6AG1332-5HB01-2AB0	6AG1332-5HF00-2AB0
Based on	6ES7332-5HD01-0AB0 SIPLUS S7-300 SM 332 4AO U/I	6ES7332-7ND02-0AB0 SIPLUS S7-300 SM 332 4AO	6ES7332-5HB01-0AB0 SIPLUS S7-300 SM 332 2AO	6ES7332-5HF00-0AB0 SIPLUS S7-300 SM 332 8AO - 40pol
Ambient conditions				
Ambient temperature during operation				
• min.	-25 °C; = Tmin	0 °C; = Tmin	-25 °C; = Tmin	-25 °C
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	60 °C; = Tmax	70 °C; = Tmax; for use on railway vehicles according to EN50155, the rated temperature range -25 ... +55 °C (T1) or 60 °C @ UL/ULhaz/ATEX/FM use applies	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Resistance				
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on land craft, rail vehicles and special-purpose vehicles				
- to biologically active substances according to EN 60721-3-5			Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request	
- to chemically active substances according to EN 60721-3-5			Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *	
- to mechanically active substances according to EN 60721-3-5			Yes; Class 5S3 incl. sand, dust; *	
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *

Technical specifications

Article number	6AG1332-5HD01-7AB0	6AG1332-7ND02-4AB0	6AG1332-5HB01-2AB0	6AG1332-5HF00-2AB0
Based on	6ES7332-5HD01-0AB0 SIPLUS S7-300 SM 332 4AO U/I	6ES7332-7ND02-0AB0 SIPLUS S7-300 SM 332 4AO	6ES7332-5HB01-0AB0 SIPLUS S7-300 SM 332 2AO	6ES7332-5HF00-0AB0 SIPLUS S7-300 SM 332 8AO - 40pol
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 analog modules

SIPLUS S7-300 SM 334**Overview**

- Analog inputs and outputs
- For connection of analog sensors and actuators

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

5

Ordering data**Article No.****SIPLUS S7-300 SM 334 analog input/output modules**

For industrial applications with extended ambient conditions

Extended temperature range and exposure to environmental substances

4 inputs, 2 outputs; resistance test, Pt 100

6AG1334-0KE00-7AB0**Accessories**

Mandatory

Front connector

20-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BJ00-0AA0
6ES7392-1BJ00-1AB0

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0
6ES7392-1BM01-1AB0

Consumables

Front door, elevated design

E.g. for 32-channel modules; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol

6ES7328-0AA00-7AA0**Bus connectors**

1 unit (spare part)

6ES7390-0AA00-0AA0**Article No.****Labeling strips**

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XX00-0AA0

For modules with 40-pin front connector

6ES7392-2XX10-0AA0**Label cover**

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XY00-0AA0

For modules with 40-pin front connector

6ES7392-2XY10-0AA0

Documentation

SIMATIC Manual Collection

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0**SIMATIC Manual Collection update service for 1 year**

Current Manual Collection DVD and the three subsequent updates

6ES7998-8XC01-8YE2

Technical specifications

Article number	6AG1334-0KE00-7AB0
Based on	6ES7334-0KE00-0AB0 SIPLUS S7-300 SM 334 4AI/2AO
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Resistance	
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *

Article number	6AG1334-0KE00-7AB0
Based on	6ES7334-0KE00-0AB0 SIPLUS S7-300 SM 334 4AI/2AO
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

I/O modules

F-digital/analog modules

SM 326 F-digital input modules - Safety Integrated

Overview



- Digital inputs for the fail-safe SIMATIC S7 systems
- For connecting:
 - Switches and 2-wire proximity switches
 - Sensors according to NAMUR and mechanical contacts, also for signals from hazardous areas
- With integral safety functions for fail-safe operation
- Can be used in fail-safe operation
 - Centrally: with S7-31xF-2 DP
 - Distributed in ET 200M: with SIMATIC IM 151-7 F-CPU, S7-31xF-2 DP, S7-416F-2 and S7-400F/FH
- In standard operation can be used in the same way as S7-300 modules

Ordering data

SM 326 F-digital input module

SIMATIC S7, SM 326 digital input module, F-DI 24x24 V DC

Fail-safe digital input for SIMATIC S7 F-systems with diagnostics alarm, up to category 4 (EN 954-1)/ SIL3 (IEC61508)/PLe (ISO13849), 1x 40-pin

SIMATIC S7, SM 326 digital input module, 8 DI; 24 V DC, NAMUR

Fail-safe NAMUR input for SIMATIC S7 F-systems, up to category 4 (EN 954-1)/ SIL3 (IEC61508)/PLe (ISO13849), 1x 40-pin

Accessories

S7 Distributed Safety V5.4 SP5 Update 2 programming tool

Task:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit),
Windows 10 Professional/Enterprise (64-bit),
Windows Server 2008 R2 SP1 (64-bit),
Windows Server 2012 R2 (64-bit),
Windows Server 2016 (64-bit);
STEP 7 from V5.5 SP1;
Please also note the operating systems that have been released for the STEP 7 version used

Article No.

6ES7326-1BK02-0AB0

6ES7326-1RF01-0AB0

Article No.

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading¹⁾

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F
Consignee email address required for delivery

S7 Distributed Safety upgrade

SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, upgrade from V5.X to V5.4, upgrade license for 1 user, engineering software, software and documentation on DVD

Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F

6ES7833-1FC02-0YA5

6ES7833-1FC02-0YH5

6ES7833-1FC02-0YE5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Ordering data	Article No.
STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.		SIMATIC DP, bus module for ET 200M For accommodating one 80 mm-wide I/O module for the hot-swapping function	6ES7195-7HC00-0XA0
		SIMATIC S7-300 stabilized power supply PS307 Input: 120/230 V AC, output: 24 V DC/5 A	6ES7307-1EA01-0AA0
		Front connectors	
		SIMATIC S7-300, front connector With screw contacts, 40-pin	6ES7392-1AM00-0AA0
		SIMATIC S7-300, front connector With screw contacts, 40-pin, 100 units per packing unit	6ES7392-1AM00-1AB0
		SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin	6ES7392-1BM01-0AA0
		SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit	6ES7392-1BM01-1AB0
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB	6ES7833-1FA23-0YA5	SIMATIC S7-300, raised front door For safety modules, allows the connection of 1.3 mm ² /16 AWG cables 5 units per packing unit incl. labeling strips and cabling diagram (yellow)	6ES7328-7AA10-0AA0
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key for download¹⁾ Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery	6ES7833-1FA23-0YH5	SIMATIC S7-300, labeling strip For F-modules (spare part), 10 units per packing unit	6ES7392-2XX20-0AA0
		SIMATIC S7-300, labeling cover For F-modules (spare part), 10 units per packing unit	6ES7392-2XY20-0AA0
		SIMATIC S7-300, LK 393 cable guide For F-modules, connections L+ and M are fed to the terminals in a safety-oriented manner, 5 units per packing unit	6ES7393-4AA10-0AA0
Mounting rail for active bus modules		SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC DP, mounting rail for ET 200M 482.6 mm long, to accommodate bus modules for the hot swapping function	6ES7195-1GA00-0XA0	SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC DP, mounting rail for ET 200M 530 mm long, to accommodate bus modules for the hot swapping function	6ES7195-1GF30-0XA0		
SIMATIC DP, mounting rail for ET 200M 620 mm long, to accommodate bus modules for the hot swapping function	6ES7195-1GG30-0XA0		
SIMATIC DP, mounting rail for ET 200M 2000 mm long, to accommodate bus modules for the hot swapping function	6ES7195-1GC00-0XA0		

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-300 Advanced Controllers

I/O modules

F-digital/analog modules

SM 326 F-digital input modules - Safety Integrated

Technical specifications

Article number	6ES7326-1RF01-0AB0 SM326, 8 DI, 24 V DC, fail-safe	6ES7326-1BK02-0AB0 SM326, F-DI 24 X 24 V DC, fail-safe
Supply voltage		
Rated value (DC)	24 V	24 V
Input current		
from load voltage L+ (without load), max.	160 mA	450 mA
from backplane bus 5 V DC, max.	90 mA	100 mA
Encoder supply		
Number of outputs	8	4; Isolated
Output current		
• Rated value		400 mA
Power loss		
Power loss, typ.	4.5 W	10 W
Digital inputs		
Number of digital inputs	8	24
Input voltage		
• Type of input voltage	DC	DC
• Rated value (DC)		24 V
• for signal "0"		-30 to +5 V
• for signal "1"		+11 to +30V
Input current		
• for signal "1", typ.	2.1 to 7 mA	10 mA
Input delay (for rated value of input voltage)		
for standard inputs		3.4 ms
- at "0" to "1", max.		
for NAMUR inputs		
- at "0" to "1", max.	1.2 to 3 ms	
- at "1" to "0", max.	1.2 to 3 ms	
Cable length		
• shielded, max.	200 m	200 m
Encoder		
Connectable encoders		
• 2-wire sensor		Yes; if short-circuit test is deactivated
- permissible quiescent current (2-wire sensor), max.		2 mA
Interrupts/diagnostics/status information		
Diagnostics function		Yes
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes
Ex(i) characteristics		
Module for Ex(i) protection	Yes	
maximum values for connecting terminals for gas group IIC		
• U _o (no-load voltage), max.	10 V	
• I _o (short-circuit current), max.	13.9 mA	
• P _o (power output), max.	33.1 mW	
• C _o (permissible external capacity), max.	3 μF	
• L _o (permissible external inductivity), max.	80 mH	
• U _m (voltage at non-intrinsically safe connecting terminals), max.	60 V DC/30 V AC	

Technical specifications

Article number	6ES7326-1RF01-0AB0	6ES7326-1BK02-0AB0
	SM326, 8 DI, 24 V DC, fail-safe	SM326, F-DI 24 X 24 V DC, fail-safe
Standards, approvals, certificates		
Highest safety class achievable in safety mode		
<ul style="list-style-type: none"> • acc. to DIN VDE 0801 • acc. to EN 954 • SIL acc. to IEC 61508 	Cat. 4 SIL 2 (single-channel), SIL 3 (two-channel)	AK 6 Cat. 4 SIL 3
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> • max. 	60 °C	
connection method		
required front connector	1x 40-pin	40-pin
Dimensions		
Width	80 mm	80 mm
Height	125 mm	125 mm
Depth	120 mm	120 mm
Weights		
Weight, approx.	482 g	442 g

SIMATIC S7-300 Advanced Controllers

I/O modules

F-digital/analog modules

SM 326 F-digital output modules - Safety Integrated

Overview



- Digital outputs for the fail-safe SIMATIC S7 systems
- Two versions (1 x switching to P/P potential, 1 x switching to P/M potential)
- For connecting solenoid valves, DC contactors and indicator lights
- With integral safety functions for fail-safe operation
- Can be used in fail-safe operation
 - Centrally: with S7-31xF DP, S7-31xF PN/DP
 - Distributed in ET 200M: with SIMATIC IM 151-7 F-CPU, S7-31xF-2 DP, S7-41xF-2 and S7-400F/FH

5

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SM 326 F-digital output module		SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD	6ES7833-1FC02-0YA5
SIMATIC S7, SM 326 digital output, F-DO 10x 24 V DC/2 A PP Fail-safe digital output for SIMATIC S7 F-systems, with diagnostics alarm, LVV, up to category 4 (EN 954-1)/ SIL3 (IEC61508)/PLe (ISO13849), 1x 40-pin	6ES7326-2BF10-0AB0	Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F	
SIMATIC S7, SM 326 digital output, F-DO 8x 24 V DC/2 A PM Fail-safe digital output sinking-sourcing, up to category 4 (EN 954-1)/ SIL3 (IEC61508)/PLe (ISO13849), 1x 40-pin	6ES7326-2BF41-0AB0	SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading¹⁾	6ES7833-1FC02-0YH5
Accessories		Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F Consignee email address required for delivery	
S7 Distributed Safety V5.4 SP5 Update 2 programming tool Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used		S7 Distributed Safety upgrade	
		SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, upgrade from V5.X to V5.4, upgrade license for 1 user, engineering software, software and documentation on DVD	6ES7833-1FC02-0YE5
		Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F	

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Article No.
STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.		Active bus modules SIMATIC DP, bus module for ET 200M For accommodating two 40 mm-wide I/O modules for the hot-swapping function SIMATIC DP, bus module for ET 200M For accommodating one 80 mm-wide I/O module for the hot-swapping function SIMATIC S7-300 stabilized power supply PS307 Input: 120/230 V AC, output: 24 V DC/5 A Front connectors SIMATIC S7-300, front connector With screw contacts, 40-pin SIMATIC S7-300, front connector With screw contacts, 40-pin, 100 units per packing unit SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit SIMATIC S7-300, raised front door For safety modules, allows the connection of 1.3 mm ² /16 AWG cables 5 units per packing unit incl. labeling strips and cabling diagram (yellow) SIMATIC S7-300, labeling strip For F-modules (spare part), 10 units per packing unit SIMATIC S7-300, labeling cover For F-modules (spare part), 10 units per packing unit SIMATIC S7-300, LK 393 cable guide For F-modules, connections L+ and M are fed to the terminals in a safety-oriented manner, 5 units per packing unit SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB	6ES7833-1FA23-0YA5	
SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key for download¹⁾ Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery	6ES7833-1FA23-0YH5	
Mounting rail for active bus modules		
SIMATIC DP, mounting rail for ET 200M 482.6 mm long, to accommodate bus modules for the hot swapping function	6ES7195-1GA00-0XA0	
SIMATIC DP, mounting rail for ET 200M 530 mm long, to accommodate bus modules for the hot swapping function	6ES7195-1GF30-0XA0	
SIMATIC DP, mounting rail for ET 200M 620 mm long, to accommodate bus modules for the hot swapping function	6ES7195-1GG30-0XA0	
SIMATIC DP, mounting rail for ET 200M 2000 mm long, to accommodate bus modules for the hot swapping function	6ES7195-1GC00-0XA0	

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-300 Advanced Controllers

I/O modules

F-digital/analog modules

SM 326 F-digital output modules - Safety Integrated

Technical specifications

Article number	6ES7326-2BF10-0AB0 SM326, F-DO10XDC24V/2A PP, failsafe	6ES7326-2BF41-0AB0 SM 326, F-DO 8 X DC 24V/2A PM
Supply voltage		
Rated value (DC)	24 V; 1L+	24 V; 1L+
Load voltage L+		
• Rated value (DC)	24 V; 2L+, 3L+	24 V; 2L+, 3L+
Input current		
from supply voltage 1L+, max.	100 mA	75 mA
from load voltage 2L+ (without load), max.	100 mA	100 mA
from load voltage 3L+ (without load), max.	100 mA	100 mA
from backplane bus 5 V DC, max.	100 mA	100 mA
Power loss		
Power loss, typ.	6 W	12 W
Digital outputs		
Number of digital outputs	10	8
Short-circuit protection	Yes	Yes
Limitation of inductive shutdown voltage to		L+ (-33 V)
Switching capacity of the outputs		
• on lamp load, max.	5 W	5 W
Output voltage		
• for signal "1", min.	L+ (-1.0 V)	L+ (-1.0 V)
Output current		
• for signal "1" rated value	2 A	2 A
• for signal "0" residual current, max.	0.5 mA	0.5 mA
Switching frequency		
• with resistive load, max.	25 Hz	30 Hz
• with inductive load, max.	25 Hz	2 Hz
• on lamp load, max.	10 Hz	10 Hz
Total current of the outputs (per group)		
horizontal installation		
- up to 40 °C, max.	10 A	7.5 A
- up to 60 °C, max.	6 A	5 A
vertical installation		
- up to 40 °C, max.	5 A	5 A
Cable length		
• shielded, max.	1 000 m	200 m; 200 m for SIL 3, AK 6, Cat 4
Interrupts/diagnostics/status information		
Alarms		
• Diagnostic alarm	Yes	Yes; Parameterizable
Standards, approvals, certificates		
Highest safety class achievable in safety mode		
• acc. to DIN VDE 0801	AK 5 and 6	
• acc. to EN 954	Cat. 4	Cat. 4
• SIL acc. to IEC 61508	SIL 3	SIL 3
connection method		
required front connector	40-pin	40-pin
Dimensions		
Width	40 mm	80 mm
Height	125 mm	125 mm
Depth	120 mm	120 mm
Weights		
Weight, approx.	330 g	465 g

Overview



- Analog inputs for fail-safe SIMATIC S7 systems
- Can be used in the ET 200M distributed I/O device with IM 153-2 HF as well as centrally with SIMATIC S7-31xF-2 DP
- Properties of the SM 336; F-AI 6 x 0/4 ... 20 mA HART:
 - 6 analog inputs with galvanic isolation between channels and backplane bus
 - Input ranges: 0 mA to 20 mA, 4 mA to 20 mA
 - Short-circuit-proof power supply of 2- or 4-wire transmitters via the module
 - External encoder supply possible
 - Can be used in safety mode
 - HART communication
 - Firmware update using HW Config
 - Identification data

5

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SM 336 F-analog input module		SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, software, documentation and license key for downloading¹⁾	6ES7833-1FC02-0YH5
SIMATIC S7, SM 336 analog input, 6 AI; 15-bit Fail-safe analog inputs for SIMATIC Safety, with HART support, up to category 4 (EN 954-1)/ SIL3 (IEC61508)/PLE (ISO13849), 1x 20-pin	6ES7336-4GE00-0AB0	Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F Consignee email address required for delivery	
Accessories		S7 Distributed Safety upgrade	
S7 Distributed Safety V5.4 SP5 Update 2 programming tool Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used		SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, upgrade from V5.X to V5.4, upgrade license for 1 user, engineering software, software and documentation on DVD	6ES7833-1FC02-0YE5
SIMATIC S7, F-programming tool S7 Distributed Safety V5.4, floating license for 1 user, engineering software, software and documentation on DVD Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F	6ES7833-1FC02-0YA5	Class A, 3 languages (en, de, fr), runs on Windows 7 SP1, Windows 10 Professional, Windows 10 Enterprise, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016; 64-bit operating system required; from STEP 7 V5.5 SP1; reference hardware S7-300F/400F/WinAC F	

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

SIMATIC S7-300 Advanced Controllers

I/O modules

F-digital/analog modules

SM 336 F-analog input modules - Safety Integrated

Ordering data

Article No.

Article No.

STEP 7 Safety Advanced V19

Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O

Requirement:

STEP 7 Professional V19

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive

6ES7833-1FA23-0YA5

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F
Content: 1x USB

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key for download¹⁾

6ES7833-1FA23-0YH5

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery

Mounting rail for active bus modules

SIMATIC DP, mounting rail for ET 200M

6ES7195-1GA00-0XA0

482.6 mm long, to accommodate bus modules for the hot swapping function

SIMATIC DP, mounting rail for ET 200M

6ES7195-1GF30-0XA0

530 mm long, to accommodate bus modules for the hot swapping function

SIMATIC DP, mounting rail for ET 200M

6ES7195-1GG30-0XA0

620 mm long, to accommodate bus modules for the hot swapping function

SIMATIC DP, mounting rail for ET 200M

6ES7195-1GC00-0XA0

2000 mm long, to accommodate bus modules for the hot swapping function

SIMATIC DP, bus module for ET 200M

6ES7195-7HB00-0XA0

For accommodating two 40 mm-wide I/O modules for the hot-swapping function

SIMATIC S7-300 stabilized power supply PS307

6ES7307-1EA01-0AA0

Input: 120/230 V AC, output: 24 V DC/5 A

Front connectors

SIMATIC S7-300, front connector

6ES7392-1AJ00-0AA0

For signal modules with screw contacts, 20-pin

SIMATIC S7-300, front connector

6ES7392-1AJ00-1AB0

For signal modules with screw contacts, 20-pin
100 units per packing unit

SIMATIC S7-300, front connector

6ES7392-1BJ00-0AA0

For signal modules with spring contacts, 20-pin

SIMATIC S7-300, front connector

6ES7392-1BJ00-1AB0

For signal modules with spring-loaded contacts, 20-pin
100 units per packing unit

SIMATIC S7-300, raised front door for safety modules

6ES7328-7AA10-0AA0

Allows the connection of 1.3 mm²/16 AWG cables
5 units per packing unit incl. labeling strips and cabling diagram (yellow)

SIMATIC S7-300, labeling strip

6ES7392-2XX20-0AA0

For F-modules (spare part), 10 units per packing unit

SIMATIC S7-300, labeling cover

6ES7392-2XY20-0AA0

For F-modules (spare part), 10 units per packing unit

SIMATIC S7-300, LK 393 cable guide

6ES7393-4AA10-0AA0

For F-modules, connections L+ and M are fed to the terminals in a safety-oriented manner, 5 units per packing unit

SIMATIC Manual Collection on DVD, 5 languages

6ES7998-8XC01-8YE0

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages

6ES7998-8XC01-8YE2

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7336-4GE00-0AB0 SM 336, f.AI 6 X 0/4 ... 20mA HART
Supply voltage	
Rated value (DC)	24 V
Load voltage L+	
• Rated value (DC)	24 V
Input current	
From power supply L+, typ.	150 mA
from backplane bus 5 V DC, max.	90 mA
Power loss	
Power loss, typ.	4.5 W
Analog inputs	
Number of analog inputs	6
permissible input current for current input (destruction limit), max.	40 mA
Input ranges (rated values), currents	
• 0 to 20 mA	Yes
• 4 mA to 20 mA	Yes
Cable length	
• shielded, max.	1 000 m
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit; 15 bit + sign
• Integration time (ms)	20 ms @ 50 Hz, 16.7 ms @ 60 Hz
• Interference voltage suppression for interference frequency f1 in Hz	f=n x (f1 ±0.5 %)
Encoder	
Connection of signal encoders	
• for current measurement as 2-wire transducer	Yes
• for current measurement as 4-wire transducer	Yes

Article number	6ES7336-4GE00-0AB0 SM 336, f.AI 6 X 0/4 ... 20mA HART
Errors/accuracies	
Operational error limit in overall temperature range	
• Current, relative to input range, (+/-)	0.2 %; 40 µA
Basic error limit (operational limit at 25 °C)	
• Current, relative to input range, (+/-)	0.1 %
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
• acc. to EN 954	4
• SIL acc. to IEC 61508	SIL 3
connection method	
required front connector	20-pin
Dimensions	
Width	40 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	350 g

SIMATIC S7-300 Advanced Controllers

I/O modules

F-digital/analog modules

Safety protector

Overview



- Supports mixed operation of fail-safe signal modules in safety mode and S7-300 standard modules in an ET 200M distributed I/O device for achieving Cat. 4 or SIL 3.
- The safety protector is not required if the safety class or safety category to be achieved is less than SIL 3 or Cat. 4, respectively.

When Cat. 4/SIL 3 is required, the safety protector must be implemented in the following situations:

Application	Safety protector must be used
Central use after CPU 31xF-2 DP or CPU 31xF-2 PN/DP <ul style="list-style-type: none"> • Only fail-safe modules in the tier • Standard and fail-safe modules in the tier 	Yes, behind the CPU Yes, after the last standard module and before the first fail-safe module
Central use after CPU 31xF-2 DP or CPU 31xF-2 PN/DP in an expansion rack <ul style="list-style-type: none"> • Only fail-safe modules in the tier • Standard and fail-safe modules in the tier 	Yes, after the IM 36x Yes, after the last standard module and before the first fail-safe module
Distributed behind the IM 153-2 with copper connection <ul style="list-style-type: none"> • Only fail-safe modules in the station • Standard and fail-safe modules in the station 	Yes, after the IM 153-2 Yes, after the last standard module and before the first fail-safe module
Distributed behind the IM 153-2 with fiber-optic connection <ul style="list-style-type: none"> • Only fail-safe modules in the station • Standard and fail-safe modules in the station 	No Yes, after the last standard module and before the first fail-safe module

Ordering data

Article No.

SIMATIC S7, isolation module
Use between F and standard modules for redundant ET 200M interface modules only with isolating bus module

6ES7195-7KF00-0XA0

Accessories

SIMATIC S7, isolating bus module
Use between F and standard modules only with isolation module

6ES7195-7HG00-0XA0

Technical specifications

Article number	6ES7195-7KF00-0XA0 Safety Protector betw. F- and Std-Mod.
General information	
Product type designation	Safety protector
Weights	
Weight, approx.	10 g

Overview

- Digital inputs for the fail-safe SIPLUS S7 systems
- For connecting:
 - Switches and 2-wire proximity switches
 - Sensors according to NAMUR and mechanical contacts, also for signals from hazardous areas
- With integral safety functions for fail-safe operation
- Can be used in fail-safe operation
 - Centrally: with S7-31xF-2 DP
 - Distributed in ET 200M: with SIMATIC IM 151-7 F-CPU, S7-31xF-2 DP, S7-416F-2 and S7-400F/FH
- In standard operation can be used in the same way as S7-300 modules

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

5**Ordering data****Article No.****Article No.****SIPLUS S7-300 SM 326 F-digital input**

For industrial applications with extended ambient conditions

Extended temperature range and exposure to environmental substances

24 inputs, 24 V DC, fail-safe, with diagnostics interrupt

6AG1326-1BK02-2AB0

8 inputs, 24 V DC, NAMUR, fail-safe

6AG1326-1RF01-4AB0**Accessories**

Mandatory

Front connector

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0
6ES7392-1BM01-1AB0

Accessories for hot swapping function

Active bus module

BM 1 x 80 for 1 module, 80 mm wide

6AG1195-7HC00-2XA0*Consumables***DIN rail for active bus modules**

For max. 5 active bus modules for hot swapping function

- Length: 483 mm (19")
- Length: 530 mm
- Length: 620 mm
- Length: 2000 mm

6ES7195-1GA00-0XA0
6ES7195-1GF30-0XA0
6ES7195-1GG30-0XA0
6ES7195-1GC00-0XA0**Front door, elevated design, for F-modules**

For F-modules; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in yellow

6ES7328-7AA10-0AA0**Labeling strips**

For F-modules (spare part); 10 units

6ES7392-2XX20-0AA0**Label cover**

For F-modules (spare part); 10 units

6ES7392-2XY20-0AA0**LK 393 cable guide**

For F-modules; L+ and M connections; 5 units

6ES7393-4AA10-0AA0

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 F-digital/analog modules

SIPLUS SM 326 F-digital input module - Safety Integrated**Ordering data****Article No.****Article No.***Programming tools and documentation***S7 Distributed Safety V5.4 SP5 Update 2 programming tool**

Task:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 as of V5.5 SP1; Please also consider the operating systems that have been released for the used STEP 7 version

Floating license for 1 user, software and documentation on DVD; license key on USB flash drive

Floating license for 1 user, software, documentation and license key for download¹⁾; email address required for delivery

S7 Distributed Safety upgrade

From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive

6ES7833-1FC02-0YA5**6ES7833-1FC02-0YH5****6ES7833-1FC02-0YE5****STEP 7 Safety Advanced V17**

Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco

Requirement:

STEP 7 Professional V17

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user; license key on USB flash drive

Floating license for 1 user, license key for download¹⁾; email address required for delivery

SIMATIC Manual Collection

Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

Current Manual Collection DVD and the three subsequent updates

6ES7833-1FA17-0YA5**6ES7833-1FA17-0YH5****6ES7998-8XC01-8YE0****6ES7998-8XC01-8YE2**

¹⁾ For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

Technical specifications

Article number	6AG1326-1BK02-2AB0	6AG1326-1RF01-4AB0
Based on	6ES7326-1BK02-0AB0	6ES7326-1RF01-0AB0
	SIPLUS S7-300 SM 326F DI24	SIPLUS S7-300 SM 326F DI8 NAMUR
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> • min. • max. 	-25 °C; = Tmin 60 °C; = Tmax; *+70 °C where forced convection with a minimum air velocity of 0.7 m/s through the modules and rated voltage of 24 V ±5 % are ensured. If in the course of maintenance or automatic diagnosis it is determined that the admissible specified parameters have been exceeded, the modules should be subjected to a proof test (function check) by the manufacturer.	0 °C; = Tmin 60 °C; = Tmax
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> • Installation altitude above sea level, max. • Ambient air temperature-barometric pressure-altitude 	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity		
<ul style="list-style-type: none"> • With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Use in stationary industrial systems		
<ul style="list-style-type: none"> - to biologically active substances according to EN 60721-3-3 - to chemically active substances according to EN 60721-3-3 - to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
<ul style="list-style-type: none"> - to biologically active substances according to EN 60721-3-6 - to chemically active substances according to EN 60721-3-6 - to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
<ul style="list-style-type: none"> - Against chemically active substances acc. to EN 60654-4 - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
<ul style="list-style-type: none"> - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 F-digital/analog modules

SIPLUS SM 326 F-digital output module - Safety Integrated**Overview**

- Digital outputs for the fail-safe SIMATIC S7 systems
- For connection of solenoid valves, DC contactors and indicator lights
- With integral safety functions for fail-safe operation
- Can be used in fail-safe mode
 - Centrally: with S7-31xF-2 DP
 - Distributed in ET 200M: with SIMATIC IM 151-7 F-CPU, S7-31xF-2 DP, S7-416F-2 and S7-400F/FH

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

5

Ordering data**Article No.****SIPLUS S7-300 SM 326 F-digital output module**

For industrial applications with extended ambient conditions

Extended temperature range and exposure to environmental substances

10 outputs, 24 V DC, 2 A, fail-safe

6AG1326-2BF10-2AB0

8 outputs, 24 V DC, 2 A, fail-safe, sourcing-sinking output

6AG1326-2BF41-2AB0**Accessories***Mandatory***Front connector**

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0**6ES7392-1BM01-1AB0**

Accessories for hot swapping function

Active bus module

BM 2 x 40 for accepting 2 I/O modules, each 40 mm wide

6AG1195-7HB00-7XA0

BM 1 x 80 for 1 module, 80 mm wide

6AG1195-7HC00-2XA0**Article No.***Consumables***DIN rail for active bus modules**

For max. 5 active bus modules for hot swapping function

- Length: 483 mm (19")
- Length: 530 mm
- Length: 620 mm
- Length: 2000 mm

6ES7195-1GA00-0XA0**6ES7195-1GF30-0XA0****6ES7195-1GG30-0XA0****6ES7195-1GC00-0XA0****Front door, elevated design, for F-modules****6ES7328-7AA10-0AA0**

For F-modules; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in yellow

Labeling strips**6ES7392-2XX20-0AA0**

For F-modules (spare part); 10 units

Label cover**6ES7392-2XY20-0AA0**

For F-modules (spare part); 10 units

LK 393 cable guide**6ES7393-4AA10-0AA0**

For F-modules; L+ and M connections; 5 units

Ordering data	Article No.	Article No.	Article No.
<p><i>Programming tools and documentation</i></p> <p>S7 Distributed Safety V5.4 SP5 Update 2 programming tool</p> <p>Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP</p> <p>Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 as of V5.5 SP1; Please also consider the operating systems that have been released for the used STEP 7 version</p> <p>Floating license for 1 user, software and documentation on DVD; license key on USB flash drive</p> <p>Floating license for 1 user, software, documentation and license key for download¹⁾; email address required for delivery</p>	<p>6ES7833-1FC02-0YA5</p> <p>6ES7833-1FC02-0YH5</p>	<p>STEP 7 Safety Advanced V17</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco</p> <p>Requirement: STEP 7 Professional V17</p> <p>Note: As of TIA Portal V17, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p> <p>Floating license for 1 user; license key on USB flash drive</p> <p>Floating license for 1 user, license key for download¹⁾; email address required for delivery</p>	<p>6ES7833-1FA17-0YA5</p> <p>6ES7833-1FA17-0YH5</p>
<p>S7 Distributed Safety upgrade</p> <p>From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive</p>	<p>6ES7833-1FC02-0YE5</p>	<p>SIMATIC Manual Collection</p> <p>Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>	<p>6ES7998-8XC01-8YE0</p>
		<p>SIMATIC Manual Collection update service for 1 year</p> <p>Current Manual Collection DVD and the three subsequent updates</p>	<p>6ES7998-8XC01-8YE2</p>

¹⁾ For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 F-digital/analog modules

SIPLUS SM 326 F-digital output module - Safety Integrated**Technical specifications**

Article number	6AG1326-2BF10-2AB0	6AG1326-2BF41-2AB0
Based on	6ES7326-2BF10-0AB0	6ES7326-2BF41-0AB0
	SIPLUS S7-300 SM 326F 10 DO	SIPLUS S7-300 SM 326F DO8
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C	-25 °C
• max.	60 °C; = T max; *+70 °C when forced convection at a minimum air speed of 0.3 m/s through the modules is ensured. If in the course of maintenance or automatic diagnosis it is determined that the admissible specified parameters have been exceeded, the modules should be subjected to a proof test (function check) by the manufacturer.	60 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

Overview



- Analog inputs for fail-safe SIPLUS S7 systems
- Applicable in the ET 200M distributed I/O device with IM 153-2 HF as well as centrally with SIPLUS S7-31xF-2 DP
- Properties of the SM 336; F-AI 6 x 0/4 ... 20 mA HART:

- 6 analog inputs with galvanic isolation between channels and backplane bus
- Input ranges: 0 mA to 20 mA, 4 mA to 20 mA
- Short-circuit proof power supply of 2 or 4-wire transmitter via the module
- External encoder supply possible
- Applicable in safety mode
- HART communication
- Firmware update using HW Config
- Identification data
- Temperature range -25 ... +70 °C; (+70 °C when ensuring a forced convection with a minimal air velocity of 0.3 m/s through the module. If a violation of the permissible, specified parameters is detected during maintenance or by automatic diagnostics, the modules must be proof-tested by the manufacturer. Without this measure the temperature range is -25...60°C)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SIPLUS S7-300 SM 336 F-analog input module <i>For industrial applications with extended ambient conditions</i> <u>Extended temperature range and exposure to environmental substances</u> 6 inputs, 15 bits, 0/4 ... 20 mA HART	6AG1336-4GE00-2AB0	Labeling strips For F-modules (spare part); 10 units	6ES7392-2XX20-0AA0
Accessories <i>Mandatory</i> Front connector 20-pin, with spring-loaded contacts <ul style="list-style-type: none"> • 1 unit • 100 units 	6ES7392-1BJ00-0AA0 6ES7392-1BJ00-1AB0	Label cover For F-modules (spare part); 10 units	6ES7392-2XY20-0AA0
<i>Accessories for hot swapping function</i> Active bus module BM 2 x 40 for accepting 2 I/O modules, each 40 mm wide	6AG1195-7HB00-7XA0	LK 393 cable guide For F-modules; L+ and M connections; 5 units	6ES7393-4AA10-0AA0
<i>Consumables</i> DIN rail for active bus modules For max. 5 active bus modules for hot swapping function <ul style="list-style-type: none"> • Length: 483 mm (19") • Length: 530 mm • Length: 620 mm • Length: 2000 mm 	6ES7195-1GA00-0XA0 6ES7195-1GF30-0XA0 6ES7195-1GG30-0XA0 6ES7195-1GC00-0XA0	<i>Programming tools and documentation</i> S7 Distributed Safety V5.4 SP5 Update 2 programming tool Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 as of V5.5 SP1; Please also consider the operating systems that have been released for the used STEP 7 version	6ES7833-1FC02-0YA5 6ES7833-1FC02-0YH5
Front door, elevated design, for F-modules For F-modules; for connecting 1.3 mm ² /16 AWG conductors; cabling diagram and labeling strips in yellow	6ES7328-7AA10-0AA0	Floating license for 1 user, software and documentation on DVD; license key on USB flash drive Floating license for 1 user, software, documentation and license key for download ¹⁾ ; email address required for delivery	

¹⁾ For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 F-digital/analog modules

SIPLUS SM 336 F-analog input module - Safety Integrated

Ordering data

Article No.

S7 Distributed Safety upgrade

From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive

6ES7833-1FC02-0YE5

STEP 7 Safety Advanced V17

Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200ISP, ET 200pro and ET 200eco

Requirement:

STEP 7 Professional V17

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user; license key on USB flash drive

6ES7833-1FA17-0YA5

Floating license for 1 user; license key for download¹⁾; email address required for delivery

6ES7833-1FA17-0YH5

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

Technical specifications

Article number

6AG1336-4GE00-2AB0

Based on

6ES7336-4GE00-0AB0

SIPLUS S7-300 SM336 F 6AI 15BIT

Ambient conditions

Ambient temperature during operation

- min.
- max.

-25 °C; = T min; Startup @ -25 °C
60 °C; = T max; *+70 °C when forced convection at a minimum air speed of 0.3 m/s through the modules is ensured. If in the course of maintenance or automatic diagnosis it is determined that the admissible specified parameters have been exceeded, the modules should be subjected to a proof test (function check) by the manufacturer.

Altitude during operation relating to sea level

- Installation altitude above sea level, max.
- Ambient air temperature-barometric pressure-altitude

2 000 m

Tmin ... Tmax at
1 140 hPa ... 795 hPa
(-1 000 m ... +2 000 m)

Relative humidity

- With condensation, tested in accordance with IEC 60068-2-38, max.

100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

Resistance

Use in stationary industrial systems

- to biologically active substances according to EN 60721-3-3
- to chemically active substances according to EN 60721-3-3
- to mechanically active substances according to EN 60721-3-3

Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *

Yes; Class 3S4 incl. sand, dust; *

Use on ships/at sea

- to biologically active substances according to EN 60721-3-6
- to chemically active substances according to EN 60721-3-6
- to mechanically active substances according to EN 60721-3-6

Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request

Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *

Yes; Class 6S3 incl. sand, dust; *

Usage in industrial process technology

- Against chemically active substances acc. to EN 60654-4
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04

Yes; Class 3 (excluding trichlorethylene)
Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)

Remark

- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04

* The supplied plug covers must remain in place over the unused interfaces during operation!

¹⁾ For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

Overview



- Allows combined operation of fail-safe signal modules in safety mode and S7-300 standard modules in an ET 200M.
- The safety protector is not required if the safety class SIL 3 or safety category < Cat. 4 is to be achieved.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

Article No.

SIPLUS F safety protector

For the simultaneous operation of fail-safe and standard modules in the same ET 200M

For industrial applications with extended ambient conditions

Extended temperature range and exposure to environmental substances

6AG1195-7KF00-2XA0

Accessories

SIPLUS ET 200M bus safety protector F

For the simultaneous operation of fail-safe and standard modules in ET 200M for the hot swapping function

Extended temperature range and exposure to environmental substances

6AG1195-7HG00-2XA0

Technical specifications

Article number	6AG1195-7KF00-2XA0
Based on	6ES7195-7KF00-0XA0 SIPLUS S7-300 SAFETY PROTECTOR
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C; = Tmin
• max.	60 °C; = Tmax
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

I/O modules

Ex digital modules

Ex digital input modules

Overview



- Digital inputs for signals from the Ex field
- For the connection of intrinsically safe digital equipment from the Ex field
- 4 DI NAMUR
- 4 digital inputs in 4 channel modules (single-channel isolation)
- Connectable encoder in accordance with EN 60947-5-6 and NAMUR, optionally with wired or unwired mechanical contacts
- Diagnostics and diagnostics alarm programmable

5

Ordering data

Ex digital input module

SIMATIC S7, SM 321 digital input module

Isolated, 4 DI; 24 V DC, NAMUR/DIN 19234, for signals from hazardous areas, diagnostics-capable, PTB-tested,

Accessories

Front connectors

SIMATIC S7-300, front connector
For signal modules with screw contacts, 20-pin

SIMATIC S7-300, front connector
For signal modules with screw contacts, 20-pin
100 units per packing unit

Front door, elevated design

SIMATIC S7-300, raised front door
For 32-channel SM, allows the connection of 1.3 mm²/16 AWG conductors
5 units per packing unit

SIMATIC S7-300, LK 393 cable guide
For EX (I) modules, connections L+ and M are intrinsically safely fed to the terminals,
5 units per packing unit

SIMATIC S7-300, labeling strip (spare part)
For modules with 20-pin front connector,
10 units per packing unit

SIMATIC S7, labeling cover (spare part)
For modules with 20-pin front connector,
10 units per packing unit

Article No.

6ES7321-7RD00-0AB0

6ES7392-1AJ00-0AA0

6ES7392-1AJ00-1AB0

6ES7328-0AA00-7AA0

6ES7393-4AA00-0AA0

6ES7392-2XX00-0AA0

6ES7392-2XY00-0AA0

Article No.

Labeling sheets for machine labeling

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

SIMATIC Manual Collection on DVD, 5 languages

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7392-2AX00-0AA0

6ES7392-2BX00-0AA0

6ES7392-2CX00-0AA0

6ES7392-2DX00-0AA0

6ES7998-8XC01-8YE0

6ES7998-8XC01-8YE2

Technical specifications

Article number	6ES7321-7RD00-0AB0 SM321, 4DI, DC24V, HAZARDOUS AREAS
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
Input current	
from load voltage L+ (without load), max.	50 mA
from backplane bus 5 V DC, max.	80 mA
Power loss	
Power loss, typ.	1.1 W
Digital inputs	
Number of digital inputs	4
Number of NAMUR inputs	4
Input voltage	
• Type of input voltage	DC
• Rated value (DC)	8.2 V; from internal power circuit supply
Input current	
• on wire-break, max.	0.1 mA
• on short-circuit, max.	8.5 mA
for NAMUR encoders	
- for signal *0*, min.	0.35 mA
- for signal *0*, max.	1.2 mA
- for signal *1*, min.	2.1 mA
- for signal *1*, max.	7 mA
Input delay (for rated value of input voltage)	
• Input frequency (with a time delay of 0.1 ms), max.	2 kHz
for NAMUR inputs	
- parameterizable	Yes; 0.1 / 0.5 / 3 / 15 / 20 ms (plus 0.25 ms preparation time)
Encoder	
Connectable encoders	
• NAMUR encoder	Yes; Two-wire connection
Interrupts/diagnostics/status information	
Diagnostics function	Yes

Article number	6ES7321-7RD00-0AB0 SM321, 4DI, DC24V, HAZARDOUS AREAS
Ex(i) characteristics	
Module for Ex(i) protection	Yes
maximum values for connecting terminals for gas group IIC	
• U _o (no-load voltage), max.	10 V
• I _o (short-circuit current), max.	14.1 mA
• P _o (power output), max.	33.7 mW
• C _o (permissible external capacity), max.	3 µF
• L _o (permissible external inductivity), max.	100 mH
Standards, approvals, certificates	
Use in hazardous areas	
• ATEX marking	ATEX II 3 G (2) GD Ex nA [ib Gb] [ib IIC Db] IIC T4 Gc
• FM marking	Class II, Division 2, Group A, B, C, D T4
• Test number PTB	Ex-96.D.2094X
Ambient conditions	
Ambient temperature during operation	
• max.	60 °C
connection method	
required front connector	20-pin
Dimensions	
Width	40 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	230 g

SIMATIC S7-300 Advanced Controllers

I/O modules

Ex digital modules

Ex digital output modules

Overview



- Digital outputs for signals from the Ex field
- For the connection of intrinsically safe digital equipment from the Ex field
- 4 DO 24 V DC/10mA or 4 DO 15 V DC/20 mA
- 4 digital outputs in 4 channel modules (single-channel isolation)
- Diagnostics and diagnostics alarm programmable
- Substitute value behavior programmable

5

Ordering data

Article No.

Ex digital output modules

SIMATIC S7, SM 322 digital output module

Isolated, 4 DO; 24 V DC, 10 mA, 1 x 20-pole, for signals from hazardous areas, diagnostics-capable, PTB-tested

6ES7322-5SD00-0AB0

SIMATIC S7, SM 322 digital output module

Isolated, 4 DO; 15 V / 20 mA, 1 x 20-pole, for signals from hazardous areas, diagnostics-capable, PTB-tested

6ES7322-5RD00-0AB0

Accessories

Front connectors

SIMATIC S7-300, front connector

For signal modules with screw contacts, 20-pin

6ES7392-1AJ00-0AA0

SIMATIC S7-300, front connector

For signal modules with screw contacts, 20-pin
100 units per packing unit

6ES7392-1AJ00-1AB0

Front door, elevated design

SIMATIC S7-300, raised front door

For 32-channel SM, allows the connection of 1.3 mm²/16 AWG conductors
5 units per packing unit

6ES7328-0AA00-7AA0

SIMATIC S7-300, LK 393 cable guide

For EX (I) modules, connections L+ and M are intrinsically safely fed to the terminals,
5 units per packing unit

6ES7393-4AA00-0AA0

SIMATIC S7-300, labeling strip (spare part)

For modules with 20-pin front connector,
10 units per packing unit

6ES7392-2XX00-0AA0

SIMATIC S7, labeling cover (spare part)

For modules with 20-pin front connector,
10 units per packing unit

6ES7392-2XY00-0AA0

Article No.

Labeling sheets for machine labeling

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

6ES7392-2AX00-0AA0

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

6ES7392-2BX00-0AA0

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

6ES7392-2CX00-0AA0

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

6ES7392-2DX00-0AA0

SIMATIC Manual Collection on DVD, 5 languages

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

Technical specifications

Article number	6ES7322-5SD00-0AB0 SM322, 4DO, 24V DC, 10MA, HAZARDOUS AREAS	6ES7322-5RD00-0AB0 SM322, 4DO, 15V DC, 20MA, HAZARDOUS AREAS
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	24 V
Input current		
from load voltage L+ (without load), max.	160 mA	160 mA
from backplane bus 5 V DC, max.	85 mA	85 mA
Power loss		
Power loss, typ.	3 W	3 W
Digital outputs		
Number of digital outputs	4	4
Short-circuit protection	Yes; Electronic	Yes; Electronic
Load resistance range		
• upper limit	390 Ω; Two-wire connection	200 Ω; Two-wire connection
Output voltage		
• Rated value (DC)	24 V	15 V
Switching frequency		
• with resistive load, max.	100 Hz	100 Hz
Interrupts/diagnostics/status information		
Diagnostics function	Yes	Yes
Ex(i) characteristics		
Module for Ex(i) protection	Yes	Yes
maximum values for connecting terminals for gas group IIC		
• U _o (no-load voltage), max.	25.2 V	15.75 V
• I _o (short-circuit current), max.	70 mA	85 mA
• P _o (power output), max.	440 mW	335 mW
• C _o (permissible external capacity), max.	90 nF	500 nF
• L _o (permissible external inductivity), max.	6.7 mH	5 mH
Standards, approvals, certificates		
Use in hazardous areas		
• ATEX marking	[EEx ib] IIC	[EEx ib] IIC
• FM marking	AIS CL.1, DIV 1, GP A, B, C, D; CL.I, DIV 2, GP A, B, C, D T4	AIS CL.1, DIV 1, GP A, B, C, D; CL.I, DIV 2, GP A, B, C, D T4
• Test number PTB	Ex-96.D.2093X	Ex-96.D.2102X
Ambient conditions		
Ambient temperature during operation		
• max.	60 °C	60 °C
connection method		
required front connector	20-pin	20-pin
Dimensions		
Width	40 mm	40 mm
Height	125 mm	125 mm
Depth	120 mm	120 mm
Weights		
Weight, approx.	230 g	230 g

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 Ex digital modules

SIPLUS S7-300 Ex digital input modules

Overview



- Digital inputs for signals from the Ex field
- For the connection of intrinsically safe digital equipment from the Ex field
- 4 DI NAMUR
- 4 digital inputs in 4 channel modules (single-channel isolation)
- Connectable encoder in accordance with EN 60947-5-6 and NAMUR, optionally with wired or unwired mechanical contacts
- Programmable diagnostics and diagnostic interrupt

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

5

Ordering data

SIPLUS S7-300 Ex digital input module

Exposure to environmental substances

4 inputs, isolated, NAMUR

Article No.

6AG1321-7RD00-4AB0

Accessories

Mandatory

Front connectors

20-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BJ00-0AA0
6ES7392-1BJ00-1AB0

Consumables

DIN rail for active bus modules

For max. 5 active bus modules for hot swapping function

- Length: 483 mm (19")
- Length: 530 mm
- Length: 620 mm
- Length: 2000 mm

6ES7195-1GA00-0XA0
6ES7195-1GF30-0XA0
6ES7195-1GG30-0XA0
6ES7195-1GC00-0XA0

Front door, elevated design

6ES7328-0AA00-7AA0

E.g. for 32-channel modules; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol

Article No.

Labeling strips

10 units (spare part), for modules with 20-pin front connector

6ES7392-2XX00-0AA0

Label cover

10 units (spare part), for modules with 20-pin front connector

6ES7392-2XY00-0AA0

Labeling sheets for machine labeling

For modules with 20-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

6ES7392-2AX00-0AA0

Light beige

6ES7392-2BX00-0AA0

Yellow

6ES7392-2CX00-0AA0

Red

6ES7392-2DX00-0AA0

Documentation

SIMATIC Manual Collection

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection update service for 1 year

Current Manual Collection DVD and the three subsequent updates

6ES7998-8XC01-8YE2

Technical specifications

Article number	6AG1321-7RD00-4AB0
Based on	6ES7321-7RD00-0AB0 SIPLUS S7-300 SM 321 4DI NAMUR
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C; = Tmin
• max.	60 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

Article number	6AG1321-7RD00-4AB0
Based on	6ES7321-7RD00-0AB0 SIPLUS S7-300 SM 321 4DI NAMUR
Resistance	
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

I/O modules

Ex analog modules

Ex analog input modules

Overview



- Analog inputs for signals from the Ex field
- For the connection of intrinsically safe analog equipment from the Ex field
- 8 or 4 analog inputs in 4 channel groups (single-channel isolation)
- Measurement type and range can be selected for each channel
- Diagnostics and diagnostics alarm programmable
- Programmable threshold alarm
- HART-compatible inputs (only 6ES7331-7RD00-0AB0)

5

Ordering data

Ex analog input modules

SIMATIC S7, SM 331 analog input module

Isolated, 4 AI; 0/4 - 20 mA, 1 x 20-pole, for signals from hazardous areas, diagnostics-capable, PTB-tested

Article No.

6ES7331-7RD00-0AB0

SIMATIC S7, SM 331 analog input module

Isolated, 8 AI thermocouples/4 AI Pt100, for signals from hazardous areas, diagnostics-capable, PTB-tested, 1 x 20-pole

6ES7331-7SF00-0AB0

Accessories

Front connectors

SIMATIC S7-300, front connector

For signal modules with screw contacts, 20-pin

6ES7392-1AJ00-0AA0

SIMATIC S7-300, front connector

For signal modules with screw contacts, 20-pin
100 units per packing unit

6ES7392-1AJ00-1AB0

Front door, elevated design

SIMATIC S7-300, raised front door

For 32-channel SM, allows the connection of 1.3 mm²/16 AWG conductors
5 units per packing unit

6ES7328-0AA00-7AA0

SIMATIC S7-300, LK 393 cable guide

For EX (I) modules, connections L+ and M are intrinsically safely fed to the terminals,
5 units per packing unit

6ES7393-4AA00-0AA0

SIMATIC S7-300, labeling strip (spare part)

For modules with 20-pin front connector,
10 units per packing unit

6ES7392-2XX00-0AA0

SIMATIC S7, labeling cover (spare part)

For modules with 20-pin front connector,
10 units per packing unit

6ES7392-2XY00-0AA0

Article No.

Labeling sheets for machine labeling

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

6ES7392-2AX00-0AA0

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

6ES7392-2BX00-0AA0

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

6ES7392-2CX00-0AA0

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red

10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit

6ES7392-2DX00-0AA0

SIMATIC Manual Collection on DVD, 5 languages

All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

Technical specifications

Article number	6ES7331-7RD00-0AB0 SM 331, 4AI, 0/4 - 20 mA, HAZARDOUS AREA	6ES7331-7SF00-0AB0 SM 331, 8AI THERMO/4AI Pt100, HAZARDOUS AREA
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	24 V
Input current		
from load voltage L+ (without load), max.	250 mA	
from backplane bus 5 V DC, max.	60 mA	120 mA
output voltage / header		
supply voltage of the transmitters / header		
• supply voltage / of the transmitters / at DC / rated value	13 V; at 22 mA	
Power loss		
Power loss, typ.	3 W	0.6 W
Analog inputs		
Number of analog inputs	4	8; 8x thermocouples; 4x RTD thermoresistors
permissible input current for current input (destruction limit), max.	40 mA	
Input ranges (rated values), voltages		
• -1 V to +1 V		Yes
• -25 mV to +25 mV		Yes
• -250 mV to +250 mV		Yes
• -50 mV to +50 mV		Yes
• -500 mV to +500 mV		Yes
• -80 mV to +80 mV		Yes
Input ranges (rated values), currents		
• 0 to 20 mA	Yes	
• 4 mA to 20 mA	Yes	
Input ranges (rated values), thermocouples		
• Type B		Yes
• Type E		Yes
• Type J		Yes
• Type K		Yes
• Type L		Yes
• Type N		Yes
• Type R		Yes
• Type S		Yes
• Type T		Yes
• Type U		Yes
Input ranges (rated values), resistance thermometer		
• Ni 100		Yes
• Pt 100		Yes
• Pt 200		Yes
Cable length		
• shielded, max.	200 m	200 m; TC: 50 m
Analog value generation for the inputs		
Integration and conversion time/resolution per channel		
• Resolution with overrange (bit including sign), max.	16 bit; 10 bit to 15 bit + sign	16 bit; 10 bit to 15 bit + sign
• Integration time, parameterizable	Yes; 2.5 to 100 ms	Yes; 2.5 to 100 ms
• Interference voltage suppression for interference frequency f1 in Hz	10 to 400 Hz	10 to 400 Hz
Encoder		
Connection of signal encoders		
• for current measurement as 2-wire transducer	Yes	Yes
• for current measurement as 4-wire transducer	Yes	Yes

SIMATIC S7-300 Advanced Controllers

I/O modules

Ex analog modules

Ex analog input modules

Technical specifications

Article number	6ES7331-7RD00-0AB0 SM 331, 4AI, 0/4 - 20 mA, HAZARDOUS AREA	6ES7331-7SF00-0AB0 SM 331, 8AI THERMO/4AI Pt100, HAZARDOUS AREA
Errors/accuracies		
Operational error limit in overall temperature range		
<ul style="list-style-type: none"> Current, relative to input range, (+/-) Resistance thermometer, relative to input range, (+/-) 	0.45 %	0.04 %; 0.09 to 0.04%
Basic error limit (operational limit at 25 °C)		
<ul style="list-style-type: none"> Current, relative to input range, (+/-) Resistance thermometer, relative to input range, (+/-) 	0.1 %	0.008 %; 0.018 ... 0.008%
Interrupts/diagnostics/status information		
Diagnostics function	Yes	Yes
Ex(i) characteristics		
Module for Ex(i) protection	Yes	Yes
maximum values for connecting terminals for gas group IIC		
<ul style="list-style-type: none"> U_o (no-load voltage), max. I_o (short-circuit current), max. P_o (power output), max. C_o (permissible external capacity), max. L_o (permissible external inductivity), max. 	25.2 V 68.5 mA 431 mW 90 nF 7.5 mH	5.9 V 28.8 mA 41.4 mW 43 μF 40 mH
Standards, approvals, certificates		
Use in hazardous areas		
<ul style="list-style-type: none"> ATEX marking FM marking Test number PTB 	ATEX II 3 G (2) GD Ex nA [ib Gb] [ib IIIC Db] IIC T4 Gc Class I, Division 2, Group A, B, C, D T4 Ex-96.D.2092X	ATEX II 3 G (2) GD Ex nA [ib Gb] [ib IIIC Db] IIC T4 Gc Class I, Division 2, Group A, B, C, D T4 Ex-96.D.2108X
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> max. 	60 °C	60 °C
connection method		
required front connector	20-pin	20-pin
Dimensions		
Width	40 mm	
Height	125 mm	
Depth	120 mm	
Weights		
Weight, approx.	290 g	210 g

5

Overview



- Analog outputs for signals from the Ex field
- For the connection of intrinsically safe analog equipment from the Ex field
- 4 analog outputs in 4 channel modules (single-channel isolation)
- Diagnostics and diagnostics alarm programmable

Ordering data	Article No.	Ordering data	Article No.
Ex analog output module		Labeling sheets for machine labeling	
SIMATIC S7, SM 332 analog output module Isolated, 4 AO; 0/4 to 20 mA, 20-pole, for signals from hazardous areas, diagnostics-capable, PTB-tested	6ES7332-5RD00-0AB0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX00-0AA0
Accessories		SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX00-0AA0
Front connectors		SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX00-0AA0
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin	6ES7392-1AJ00-0AA0	SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX00-0AA0
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin 100 units per packing unit	6ES7392-1AJ00-1AB0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
Front door, elevated design		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2
SIMATIC S7-300, raised front door For 32-channel SM, allows the connection of 1.3 mm ² /16 AWG conductors 5 units per packing unit	6ES7328-0AA00-7AA0		
SIMATIC S7-300, LK 393 cable guide For EX (I) modules, connections L+ and M are intrinsically safely fed to the terminals, 5 units per packing unit	6ES7393-4AA00-0AA0		
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0		
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0		

SIMATIC S7-300 Advanced Controllers

I/O modules

Ex analog modules

Ex analog output modules

Technical specifications

Article number	6ES7332-5RD00-0AB0 SM 332, 4AI, 0/4 - 20 mA, HAZARDOUS AREA
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
Input current	
from load voltage L+ (without load), max.	200 mA
from backplane bus 5 V DC, max.	80 mA
Power loss	
Power loss, typ.	4 W
Analog outputs	
Number of analog outputs	4
Voltage output, short-circuit protection	Yes
Voltage output, short-circuit current, max.	70 mA
Current output, no-load voltage, max.	14 V
Output ranges, current	
• 0 to 20 mA	Yes
• 4 mA to 20 mA	Yes
Load impedance (in rated range of output)	
• with current outputs, max.	500 Ω
Cable length	
• shielded, max.	200 m
Analog value generation for the outputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	15 bit
Errors/accuracies	
Operational error limit in overall temperature range	
• Current, relative to output range, (+/-)	0.55 %
Basic error limit (operational limit at 25 °C)	
• Current, relative to output range, (+/-)	0.2 %

Article number	6ES7332-5RD00-0AB0 SM 332, 4AI, 0/4 - 20 mA, HAZARDOUS AREA
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Ex(i) characteristics	
Module for Ex(i) protection	Yes
maximum values for connecting terminals for gas group IIC	
• U _o (no-load voltage), max.	14 V
• I _o (short-circuit current), max.	70 mA
• P _o (power output), max.	440 mW
• C _o (permissible external capacity), max.	850 nF
• L _o (permissible external inductivity), max.	6.6 mH
Standards, approvals, certificates	
Use in hazardous areas	
• ATEX marking	[EEx ib] IIC
• FM marking	Class I, Division 2, Group A, B, C, D T4
• Test number PTB	Ex-96.D.2026X
Ambient conditions	
Ambient temperature during operation	
• max.	60 °C
connection method	
required front connector	20-pin
Dimensions	
Width	40 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	280 g

5

Overview

- Analog inputs for signals from the Ex field
- For the connection of intrinsically safe analog equipment from the Ex field
- 4 analog inputs in 4 channel groups (single-channel isolation)
- Measurement type and range can be selected for each channel
- Programmable diagnostics and diagnostic interrupt
- Programmable threshold alarm
- HART-compatible inputs (6AG1 331-7RD00-2AB0 only)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**SIPLUS S7-300 Ex analog input modules**

Extended temperature range and exposure to environmental substances

4 inputs, isolated, 0/4 to 20 mA, 15 bit

Exposure to environmental substances

8/4 inputs, isolated, for thermocouples and Pt100, Pt200, Ni100; exposure to environmental substances only

Accessories*Mandatory***Front connector**

20-pin, with spring-loaded contacts

- 1 unit
- 100 units

*Consumables***DIN rail for active bus modules**

For max. 5 active bus modules for hot swapping function

- Length: 483 mm (19")
- Length: 530 mm
- Length: 620 mm
- Length: 2000 mm

Front door, elevated design

E.g. for 32-channel modules; for connecting 1.3 mm²/16 AWG conductors; cabling diagram and labeling strips in petrol

Article No.

6AG1331-7RD00-2AB0

6AG1331-7SF00-4AB0

6ES7392-1BJ00-0AA0

6ES7392-1BJ00-1AB0

6ES7195-1GA00-0XA0

6ES7195-1GF30-0XA0

6ES7195-1GG30-0XA0

6ES7195-1GC00-0XA0

6ES7328-0AA00-7AA0

Article No.**Labeling strips**

10 units (spare part), for modules with 20-pin front connector

Label cover

10 units (spare part), for modules with 20-pin front connector

Labeling sheets for machine labeling

For modules with 20-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

6ES7392-2AX00-0AA0

Light beige

6ES7392-2BX00-0AA0

Yellow

6ES7392-2CX00-0AA0

Red

6ES7392-2DX00-0AA0

*Documentation***SIMATIC Manual Collection**

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 Ex analog modules

SIPLUS S7-300 Ex analog input modules**Technical specifications**

Article number	6AG1331-7RD00-2AB0	6AG1331-7SF00-4AB0
Based on	6ES7331-7RD00-0AB0 SIPLUS S7-300 SM 331 4AI	6ES7331-7SF00-0AB0 SIPLUS S7-300 SM 331 AI 20pol
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C; = Tmin	0 °C; = Tmin
• max.	60 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use, 70 °C only 4 wire	60 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

5

Overview



- Single-channel, intelligent counter module for simple counting tasks
- For direct connection of incremental encoders
- Comparison function with 2 definable comparison values
- Integrated digital outputs for output of the response on reaching the comparison value
- Operating modes:
 - Continuous counting
 - Single counting
 - Periodic counting
- Special functions:
 - Set counter
 - Latch counter
- Start/stop counter by gate function

Note:

Incremental encoder and preassembled connecting cables for counter and positioning function are offered under SIMODRIVE Sensor and Motion Connect 500, see under

<http://www.siemens.com/simatic-technology>.

Ordering data

**SIMATIC S7-300,
FM 350-1 counter module**

For S7-300, counting functions up to 500 kHz 1 channel for connecting 5 V and 24 V incremental encoders isochronous mode; types of measuring range incl. configuration package on CD

Article No.
6ES7350-1AH03-0AE0

Accessories**SIMATIC S7,
measuring range modules**

For analog inputs,
2 units per packing unit

Article No.
6ES7974-0AA00-0AA0

Front connectors**SIMATIC S7-300, front connector**

For signal modules with screw
contacts, 20-pin

Article No.
6ES7392-1AJ00-0AA0

SIMATIC S7-300, front connector

For signal modules with screw
contacts, 20-pin
100 units per packing unit

Article No.
6ES7392-1AJ00-1AB0

SIMATIC S7-300, front connector

For signal modules with
spring-loaded contacts, 20-pin

Article No.
6ES7392-1BJ00-0AA0

SIMATIC S7-300, front connector

For signal modules with
spring-loaded contacts, 20-pin
100 units per packing unit

Article No.
6ES7392-1BJ00-1AB0

**SIMATIC S7, bus connector
(spare part)**

Article No.
6ES7390-0AA00-0AA0

**SIMATIC S7-300, labeling strip
(spare part)**

For modules with 20-pin front
connector,
10 units per packing unit

Article No.
6ES7392-2XX00-0AA0

**Labeling sheets for machine
labeling**

See page 5/314

Article No.**SIMATIC S7-300/ET 200M,
slot label**

Wheel with 19 marking nails
from 0 - 18 for knocking out
and clipping into the modules;
included in the scope of supply of
the S7-300 CPUs and interface
modules of the ET 200M.
Required only as spare part
P. unit = 1

Article No.
6ES7912-0AA00-0AA0

**SIMATIC S7, shield support
element 80 mm wide**

With 2 rows for 4 shield connection
clamps each

Article No.
6ES7390-5AA00-0AA0

Shield connection clamps**SIMATIC S7, shield connection
clamp**

For 2 cables with 2-6 mm diameter
2 units per packing unit

Article No.
6ES7390-5AB00-0AA0

**SIMATIC S7, shield connection
clamp**

For 1 cable with 3.8 mm diameter
2 units per packing unit

Article No.
6ES7390-5BA00-0AA0

**SIMATIC S7, shield connection
clamp**

For 1 cable with 4..13 mm diameter
2 units per packing unit

Article No.
6ES7390-5CA00-0AA0

**Connectable incremental
encoders 6FX2 001-2...**

See in SiePortal under
SIMODRIVE Sensor or
Motion Connect 500
(see also under
<https://www.siemens.com/simatic-technology>)

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

FM 350-1 counter module

Ordering data

Article No.

Signal cable

Preassembled for HTL and TTL encoder, without D-sub connector, UL/DESINA

Length code:

0 m

100 m

200 m

0 m

10 m

20 m

30 m

40 m

50 m

60 m

70 m

80 m

90 m

6FX5002-2CA12- ■ ■ ■ 0

1

2

3

A

B

C

D

E

F

G

H

J

K

Article No.

Signal cable

Preassembled for HTL and TTL encoder, without D-sub connector, UL/DESINA

Length code:

0 m

1 m

2 m

3 m

4 m

5 m

6 m

7 m

8 m

9 m

6FX5002-2CA12- ■ ■ ■ 0

A

B

C

D

E

F

G

H

J

K

Technical specifications

Article number	6ES7350-1AH03-0AE0
	FM350-1, counter mod. up to 500KHZ
Supply voltage	
Auxiliary voltage 1L+, load voltage 2L+	
• Rated value (DC)	24 V
Input current	
from load voltage 1L+ (without load), max.	40 mA
from backplane bus 5 V DC, max.	160 mA
Encoder supply	
5 V encoder supply	
• 5 V	Yes; 5.2 V ±2 %
• Output current, max.	300 mA
24 V encoder supply	
• 24 V	Yes; 1L+ (-3 V)
• Output current, max.	400 mA
Power loss	
Power loss, typ.	4.5 W
Digital inputs	
Number of digital inputs	3
Functions	1 for gate start, 1 for gate stop, 1 for setting the counter
Input voltage	
• for signal "0"	-28.8 ... +5V
• for signal "1"	+11 to +28.8V
Input current	
• for signal "1", typ.	9 mA
Digital outputs	
Number of digital outputs	2
Short-circuit protection	Yes; Clocked electronically
Limitation of inductive shutdown voltage to	2L+ (-39 V)
Output voltage	
• for signal "0", max.	3 V
• for signal "1", min.	2L+ (-1,5 V)

Article number	6ES7350-1AH03-0AE0
	FM350-1, counter mod. up to 500KHZ
Output current	
• for signal "1" rated value	0.5 A
• for signal "1" permissible range for 0 to 60 °C, min.	5 mA
• for signal "1" permissible range for 0 to 60 °C, max.	0.6 A
Encoder	
Connectable encoders	
• Incremental encoder (symmetrical)	Yes; With 2 pulse trains offset by 90°
• Incremental encoder (asymmetrical)	Yes
• 24 V initiator	Yes
• 24 V directional element	Yes; 1 pulse train, 1 direction level
Counter	
Number of counter inputs	1; 32 bit or ±31 bit
Counter input 5 V	
• Type	RS 422
• Terminating resistor	220 Ω
• Differential input voltage	1,3 V
• Counting frequency, max.	500 kHz
Counter input 24 V	
• Input voltage for signal "0"	-28.8 ... +5V
• Input voltage for signal "1"	+11 to +28.8V
• Input current for signal "1", typ.	9 mA
• Counting frequency, max.	200 kHz
• Minimum pulse width	2.5 μs
connection method	
required front connector	1x 20-pin
Dimensions	
Width	40 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	250 g

Overview



- 8-channel intelligent counter module for universal counting and measuring
- To directly connect 24 V incremental encoders, direction sensors, initiators or NAMUR encoders
- Check function with preselectable set points (number depends on mode)
- Integrated digital outputs for output of the response on reaching the comparison value
- Operating modes:
 - Continuous/single/periodic counting
 - Frequency/speed measurement
 - Cycle duration measurement
 - Dosing

Note:

Incremental encoder and preassembled connecting cables for counter and positioning function are offered under SIMODRIVE Sensor and Motion Connect 500, see under

<http://www.siemens.com/simatic-technology>.

Ordering data

SIMATIC S7-300, FM 350-2 counter module

8 channels, 20 kHz, 24 V encoder for counting, frequency measurement, speed measurement, cycle duration measurement, dosing incl. configuration package and electronic documentation on CD-ROM

Accessories**Front connectors****SIMATIC S7-300, front connector**

With screw contacts, 40-pin

SIMATIC S7-300, front connector

With screw contacts, 40-pin, 100 units per packing unit

SIMATIC S7-300, front connector

For signal modules with spring-loaded contacts, 40-pin

SIMATIC S7-300, front connector

For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit

SIMATIC S7, bus connector (spare part)**SIMATIC S7-300, labeling strip (spare part)**

For modules with 40-pin front connector, 10 units per packing unit

Labeling sheets for machine labeling**SIMATIC S7-300/ET 200M, slot label**

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1

SIMATIC S7, shield support element 80 mm wide

With 2 rows for 4 shield connection clamps each

Shield connection clamps**SIMATIC S7, shield connection clamp**

For 2 cables with 2-6 mm diameter 2 units per packing unit

Article No.

6ES7350-2AH01-0AE0

6ES7392-1AM00-0AA0

6ES7392-1AM00-1AB0

6ES7392-1BM01-0AA0

6ES7392-1BM01-1AB0

6ES7390-0AA00-0AA0

6ES7392-2XX10-0AA0

See page 5/314

6ES7912-0AA00-0AA0

6ES7390-5AA00-0AA0

6ES7390-5AB00-0AA0

Article No.

SIMATIC S7, shield connection clamp

For 1 cable with 3.8 mm diameter 2 units per packing unit

SIMATIC S7, shield connection clamp

For 1 cable with 4..13 mm diameter 2 units per packing unit

Signal cable

Preassembled for HTL and TTL encoder, without D-sub connector, UL/DESINA

0 m
100 m
200 m

0 m
10 m
20 m
30 m
40 m
50 m
60 m
70 m
80 m
90 m

0 m
1 m
2 m
3 m
4 m
5 m
6 m
7 m
8 m
9 m

6ES7390-5BA00-0AA0

6ES7390-5CA00-0AA0

6FX5002-2CA12-0

1
2
3
A
B
C
D
E
F
G
H
J
K

A
B
C
D
E
F
G
H
J
K

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

FM 350-2 counter module

Technical specifications

Article number	6ES7350-2AH01-0AE0 FM350-2, Counter Mod., 8 Channels, 20KHz
Supply voltage	
Auxiliary voltage 1L+, load voltage 2L+	
• Rated value (DC)	24 V
Input current	
from load voltage L+ (without load), max.	150 mA
from backplane bus 5 V DC, max.	100 mA
Encoder supply	
NAMUR encoder supply	
• 8.2 V	Yes
• Short-circuit protection	Yes
• Output current, max.	200 mA
Power loss	
Power loss, typ.	10 W
Digital inputs	
Number of digital inputs	8
Number of NAMUR inputs	8
Functions	1 each for gate start/ gate stop
Input voltage	
• for signal "0"	-3 to +5V
• for signal "1"	11 to 30.2 V
Input current	
• for signal "0", max. (permissible quiescent current)	2 mA
• for signal "1", typ.	9 mA
for NAMUR encoders	
- for signal "0", max.	1.2 mA
- for signal "1", min.	2.1 mA
Input delay (for rated value of input voltage)	
• Input frequency, max.	20 kHz
for standard inputs	
- at "0" to "1", max.	50 µs
for NAMUR inputs	
- at "0" to "1", max.	50 µs
Cable length	
• shielded, max.	100 m
Digital outputs	
Number of digital outputs	8
Short-circuit protection	Yes
Limitation of inductive shutdown voltage to	L+ (-40 V)
Output voltage	
• for signal "1", min.	L+ (-0.8 V)
Output current	
• for signal "1" rated value	0.5 A
• for signal "0" residual current, max.	0.5 mA
Switching frequency	
• with resistive load, max.	500 Hz
• with inductive load, max.	0.5 Hz

Article number	6ES7350-2AH01-0AE0 FM350-2, Counter Mod., 8 Channels, 20KHz
Total current of the outputs (per group)	
horizontal installation	
- up to 40 °C, max.	4 A
- up to 60 °C, max.	2 A
all other mounting positions	
- up to 40 °C, max.	2 A
Cable length	
• shielded, max.	600 m
Encoder	
Connectable encoders	
• Incremental encoder (asymmetrical)	Yes
• 24 V initiator	Yes
• 24 V directional element	Yes
• NAMUR encoder	Yes; to DIN 19 234
• 2-wire sensor	Yes
Interrupts/diagnostics/ status information	
Diagnostics function	Yes; Diagnostic information readable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
• Hardware interrupt	Yes; Parameterizable
Counter	
Number of counter inputs	8; 32 bit or ±31 bit
Counter input 24 V	
• Input voltage for signal "0"	-3 to +5V
• Input voltage for signal "1"	11 to 30.2 V
• Input current for signal "1", typ.	9 mA
• Counting frequency, max.	20 kHz; Incremental encoder: 10 kHz
connection method	
required front connector	1x 40-pin
Dimensions	
Width	80 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	460 g

5

Overview



- Two-channel positioning module for rapid traverse/creep speed drives
- 4 digital outputs per channel for motor control
- Incremental or synchronous-serial position feedback

Note:

We offer position measuring systems and preassembled connecting cables for counting and positioning functions under SIMODRIVE Sensor or Motion Connect 500, see under

<http://www.siemens.com/simatic-technology>.

Ordering data

Article No.

SIMATIC S7-300, positioning module FM 351 **6ES7351-1AH02-0AE0**

For quick/creep-speed drives incl. configuration package on CD

Accessories**Front connectors**

SIMATIC S7-300, front connector **6ES7392-1AJ00-0AA0**

For signal modules with screw contacts, 20-pin

SIMATIC S7-300, front connector **6ES7392-1AJ00-1AB0**

For signal modules with screw contacts, 20-pin
100 units per packing unit

SIMATIC S7-300, front connector **6ES7392-1BJ00-0AA0**

For signal modules with spring-loaded contacts, 20-pin

SIMATIC S7-300, front connector **6ES7392-1BJ00-1AB0**

For signal modules with spring-loaded contacts, 20-pin
100 units per packing unit

SIMATIC S7, bus connector (spare part) **6ES7390-0AA00-0AA0**

SIMATIC S7-300, labeling strip (spare part) **6ES7392-2XX00-0AA0**

For modules with 20-pin front connector,
10 units per packing unit

SIMATIC S7-300/ET 200M, slot label **6ES7912-0AA00-0AA0**

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part
P. unit = 1

Labeling sheets for machine labeling

See page 5/314

SIMATIC S7, shield support element 80 mm wide **6ES7390-5AA00-0AA0**

With 2 rows for 4 shield connection clamps each

Shield connection clamps

SIMATIC S7, shield connection clamp **6ES7390-5AB00-0AA0**

For 2 cables with 2-6 mm diameter
2 units per packing unit

SIMATIC S7, shield connection clamp **6ES7390-5BA00-0AA0**

For 1 cable with 3..8 mm diameter
2 units per packing unit

SIMATIC S7, shield connection clamp **6ES7390-5CA00-0AA0**

For 1 cable with 4..13 mm diameter
2 units per packing unit

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

FM 351 positioning module

Ordering data

Article No.

Signal cables

Preassembled for SSI absolute encoder, UL/DESINA

6FX50 ■ 2-2CC11- ■ ■ ■ ■

Preassembled for TTL encoder 6FX2001-1, UL/DESINA

6FX50 ■ 2-2CD01- ■ ■ ■ ■

Preassembled for TTL encoder 24 V, UL/DESINA

6FX50 ■ 2-2CD24- ■ ■ ■ ■

Not crimped

0

Module end crimped, connector case supplied

1

Motor end crimped, connector case supplied

4

0 m

1

100 m

2

200 m

3

0 m

A

10 m

B

20 m

C

30 m

D

40 m

E

50 m

F

60 m

G

70 m

H

80 m

J

90 m

K

Article No.

Signal cables

Preassembled for SSI absolute encoder, UL/DESINA

6FX50 ■ 2-2CC11- ■ ■ ■ ■

Preassembled for TTL encoder 6FX2001-1, UL/DESINA

6FX50 ■ 2-2CD01- ■ ■ ■ ■

Preassembled for TTL encoder 24 V, UL/DESINA

6FX50 ■ 2-2CD24- ■ ■ ■ ■

0 m

1 m

2 m

3 m

4 m

5 m

6 m

7 m

8 m

9 m

0.0 m

0.1 m

0.2 m

0.3 m

0.4 m

0.5 m

0.6 m

0.7 m

0.8 m

A

B

C

D

E

F

G

H

J

K

0

1

2

3

4

5

6

7

8

Technical specifications

Article number	6ES7351-1AH02-0AE0 FM351 positioning Mod. rapid/creep Feed
Supply voltage	
Rated value (DC)	24 V
Load voltage L+	
• Rated value (DC)	24 V
Input current	
Current consumption, max.	350 mA
from backplane bus 5 V DC, max.	150 mA
Encoder supply	
5 V encoder supply	
• 5 V	Yes
• Output current, max.	350 mA
• Cable length, max.	32 m
24 V encoder supply	
• 24 V	Yes
• Output current, max.	400 mA; Per channel
• Cable length, max.	100 m
Power loss	
Power loss, typ.	7.9 W
Digital inputs	
Number of digital inputs	8
Functions	Reference cams, reversing cams, flying actual value setting, start/stop positioning
Input voltage	
• Rated value (DC)	24 V
• for signal "0"	-3 to +5V
• for signal "1"	+11 to +30V

Article number	6ES7351-1AH02-0AE0 FM351 positioning Mod. rapid/creep Feed
Input current	
• for signal "0", max. (permissible quiescent current)	2 mA
• for signal "1", typ.	6 mA
Digital outputs	
Number of digital outputs	8
Functions	Rapid traverse, creep, run right, run left
Short-circuit protection	Yes
Output voltage	
• Rated value (DC)	24 V
• for signal "1", min.	UP - 0.8 V
Output current	
• for signal "1" permissible range for 0 to 60 °C, min.	5 mA; with UPmax
• for signal "1" permissible range for 0 to 60 °C, max.	600 mA; with UPmax
• for signal "0" residual current, max.	0.5 mA
Encoder	
Connectable encoders	
• Incremental encoder (symmetrical)	Yes
• Incremental encoder (asymmetrical)	Yes
• Absolute encoder (SSI)	Yes
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	2 mA; on signal "0", max. 2 mA; on signal "1", max. 6 mA

Technical specifications

Article number	6ES7351-1AH02-0AE0 FM351 positioning Mod. rapid/creep Feed
Encoder signals, incremental encoder (symmetrical)	
• Trace mark signals	A, notA, B, notB
• Zero mark signal	N, notN
• Input voltage	5 V difference signal (phys. RS 422)
• Input frequency, max.	0.5 MHz
Encoder signals, incremental encoder (asymmetrical)	
• Trace mark signals	A, B
• Zero mark signal	N
• Input voltage	24 V
• Input frequency, max.	50 kHz; 50 kHz for 25 m cable length; 25 kHz for 100 m cable length
Encoder signals, absolute encoder (SSI)	
• Input signal	5 V difference signal (phys. RS 422)
• Data signal	DATA, notDATA
• Clock signal	CL, notCL
• Telegram length, parameterizable	13 or 25 bit
• Clock frequency, max.	1.5 MHz
• Gray code	Yes
• Cable length, shielded, max.	200 m; At max. 188 kHz

Article number	6ES7351-1AH02-0AE0 FM351 positioning Mod. rapid/creep Feed
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	60 °C
connection method	
required front connector	1x 20-pin
Dimensions	
Width	80 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	550 g

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

FM 352 cam controllers

Overview



- Very high-speed electronic cam controller
- Low-cost alternative to mechanical cam controllers
- 32 cam tracks, 13 onboard digital outputs for direct output of actions
- Incremental or synchronous-serial position feedback

Note:

We offer position measuring systems and preassembled connecting cables for counting and positioning functions under SIMODRIVE Sensor or Motion Connect 500, see under

<http://www.siemens.com/simatic-technology>.

Ordering data

Article No.

SIMATIC S7-300, output cam controller, FM 352 **6ES7352-1AH02-0AE0**

Electronic incl. configuration package on CD

Accessories

Front connectors

SIMATIC S7-300, front connector **6ES7392-1AJ00-0AA0**

For signal modules with screw contacts, 20-pin

SIMATIC S7-300, front connector **6ES7392-1AJ00-1AB0**

For signal modules with screw contacts, 20-pin
100 units per packing unit

SIMATIC S7-300, front connector **6ES7392-1BJ00-0AA0**

For signal modules with spring-loaded contacts, 20-pin

SIMATIC S7-300, front connector **6ES7392-1BJ00-1AB0**

For signal modules with spring-loaded contacts, 20-pin
100 units per packing unit

SIMATIC S7, bus connector (spare part) **6ES7390-0AA00-0AA0**

SIMATIC S7-300, labeling strip (spare part) **6ES7392-2XX00-0AA0**

For modules with 20-pin front connector,
10 units per packing unit

Labeling sheets for machine labeling

See page 5/314

SIMATIC S7-300/ET 200M, slot label **6ES7912-0AA00-0AA0**

Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M.
Required only as spare part
P. unit = 1

SIMATIC S7, shield support element 80 mm wide **6ES7390-5AA00-0AA0**

With 2 rows for 4 shield connection clamps each

Shield connection clamps

SIMATIC S7, shield connection clamp **6ES7390-5AB00-0AA0**

For 2 cables with 2-6 mm diameter
2 units per packing unit

SIMATIC S7, shield connection clamp **6ES7390-5BA00-0AA0**

For 1 cable with 3..8 mm diameter
2 units per packing unit

SIMATIC S7, shield connection clamp **6ES7390-5CA00-0AA0**

For 1 cable with 4..13 mm diameter
2 units per packing unit

Ordering data

Signal cable

Preassembled for SSI absolute encoder, UL/DESINA

6FX50 ■ 2-2CC11- ■ ■ ■ ■

Preassembled for TTL encoder 6FX2001-1, UL/DESINA

6FX50 ■ 2-2CD01- ■ ■ ■ ■

Preassembled for TTL encoder 24 V, UL/DESINA

6FX50 ■ 2-2CD24- ■ ■ ■ ■

Not crimped

0

Module end crimped, connector case supplied

1

Motor end crimped, connector case supplied

4

0 m

1

100 m

2

200 m

3

0 m

A

10 m

B

20 m

C

30 m

D

40 m

E

50 m

F

60 m

G

70 m

H

80 m

J

90 m

K

Preassembled for SSI absolute encoder, UL/DESINA

6FX50 ■ 2-2CC11- ■ ■ ■ ■

Preassembled for TTL encoder 6FX2001-1, UL/DESINA

6FX50 ■ 2-2CD01- ■ ■ ■ ■

Preassembled for TTL encoder 24 V, UL/DESINA

6FX50 ■ 2-2CD24- ■ ■ ■ ■

0 m

A

1 m

B

2 m

C

3 m

D

4 m

E

5 m

F

6 m

G

7 m

H

8 m

J

9 m

K

0.0 m

0

0.1 m

1

0.2 m

2

0.3 m

3

0.4 m

4

0.5 m

5

0.6 m

6

0.7 m

7

0.8 m

8

Technical specifications

Article number	6ES7352-1AH02-0AE0 FM352 Electron. Cam-operated Control
Supply voltage	
Rated value (DC)	24 V
Input current	
from load voltage L+ (without load), max.	200 mA
from backplane bus 5 V DC, max.	100 mA
Encoder supply	
5 V encoder supply	
• 5 V	Yes
• Output current, max.	300 mA
• Cable length, max.	32 m
24 V encoder supply	
• 24 V	Yes
• Output current, max.	300 mA
• Cable length, max.	100 m
Power loss	
Power loss, typ.	8.1 W
Digital inputs	
Number of digital inputs	4
Functions	Reference point switch, set floating actual value/length measurement, brake release, enable track output no. 3
Input voltage	
• Rated value (DC)	24 V
• for signal "0"	-30 to +5 V
• for signal "1"	+11 to +30V

Article number	6ES7352-1AH02-0AE0 FM352 Electron. Cam-operated Control
Input current	
• for signal "0", max. (permissible quiescent current)	2 mA
• for signal "1", typ.	9 mA
Digital outputs	
Number of digital outputs	13
Functions	Cam track
Short-circuit protection	Yes
Output voltage	
• Rated value (DC)	24 V
• for signal "1", min.	UP - 0.8 V
Output current	
• for signal "1" permissible range for 0 to 60 °C, min.	5 mA; with UPmax
• for signal "1" permissible range for 0 to 60 °C, max.	600 mA; with UPmax
• for signal "0" residual current, max.	0.5 mA
Encoder	
Connectable encoders	
• Incremental encoder (symmetrical)	Yes
• Incremental encoder (asymmetrical)	Yes
• Absolute encoder (SSI)	Yes
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	2 mA

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

FM 352 cam controllers

Technical specifications

Article number	6ES7352-1AH02-0AE0 FM352 Electron. Cam-operated Control
Encoder signals, incremental encoder (symmetrical)	
• Trace mark signals	A, notA, B, notB
• Zero mark signal	N, notN
• Input voltage	5 V difference signal (phys. RS 422)
• Input frequency, max.	1 MHz
Encoder signals, incremental encoder (asymmetrical)	
• Trace mark signals	A, B
• Zero mark signal	N
• Input voltage	24 V
• Input frequency, max.	50 kHz; 50 kHz for 25 m cable length; 25 kHz for 100 m cable length
Encoder signals, absolute encoder (SSI)	
• Data signal	DATA, notDATA
• Clock signal	CL, notCL
• Telegram length, parameterizable	13 or 25 bit
• Clock frequency, max.	1 MHz
• Gray code	Yes
• Cable length, shielded, max.	320 m; at max. 125 kHz

Article number	6ES7352-1AH02-0AE0 FM352 Electron. Cam-operated Control
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	60 °C
connection method	
required front connector	1x 20-pin
Dimensions	
Width	80 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	550 g

Overview



- The FM 352-5 high-speed Boolean processor provides extremely fast binary control and also some of the fastest switching processes ever possible (cycle time: 1 µs).
- Programming is possible with LAD or FBD.
- The available set of statements comprises bit statements (partial statement set of STEP 7), timers, counters, frequency dividers, frequency generators, shift registers.
- 12 integral DI / 8 integral DO.
- 2 versions: sinking or sourcing digital outputs.
- 1 channel for connection of a 24-V incremental encoder, a 5-V incremental encoder (RS422) or an SSI absolute encoder.

Micro Memory Card required for use of the FM 352-5

Note:

We offer position measuring systems and preassembled connecting cables for counting and positioning functions under SIMODRIVE Sensor or Motion Connect 500, see under

<http://www.siemens.com/simatic-technology>.

Ordering data

FM 352-5 high-speed Boolean processor**SIMATIC S7-300, FM352-5 with NPN output**

High Speed Boolean processor, for high-speed linking, 12 DI, 8 DO, 1 encoder interface for RS422 incr./SSI encoders

6ES7352-5AH01-0AE0

SIMATIC S7-300, FM352-5 with PNP output

High Speed Boolean processor, for high-speed linking, 12 DI, 8 DO, 1 encoder interface for RS422 incr./SSI encoders

6ES7352-5AH11-0AE0

Micro Memory Card**SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200**

3.3 V Nflash, 128 KB

6ES7953-8LG31-0AA0

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

3.3 V Nflash, 512 KB

6ES7953-8LJ31-0AA0

SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200

3.3 V Nflash, 2 MB

6ES7953-8LL31-0AA0

Front connectors**SIMATIC S7-300, front connector**

With screw contacts, 40-pin

6ES7392-1AM00-0AA0

SIMATIC S7-300, front connector

With screw contacts, 40-pin, 100 units per packing unit

6ES7392-1AM00-1AB0

SIMATIC S7-300, front connector

For signal modules with spring-loaded contacts, 40-pin

6ES7392-1BM01-0AA0

SIMATIC S7-300, front connector

For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit

6ES7392-1BM01-1AB0

Signal cables

To HTL and TTL encoders, preassembled, without D-sub connector

6FX5002-2CA12-

0

To SSI absolute encoders 6FX2 001-5, preassembled, without D-sub connector

6FX5002-2CC12-

0

Length code:

0 m
100 m
200 m

1
2
3

0 m
10 m
20 m
30 m
40 m
50 m
60 m
70 m
80 m
90 m

A
B
C
D
E
F
G
H
J
K

0 m
1 m
2 m
3 m
4 m
5 m
6 m
7 m
8 m
9 m

A
B
C
D
E
F
G
H
J
K

0.0 m
0.1 m
0.2 m
0.3 m
0.4 m
0.5 m
0.6 m
0.7 m
0.8 m

0
1
2
3
4
5
6
7
8

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

FM 352-5 high-speed Boolean processor

Technical specifications

Article number	6ES7352-5AH01-0AE0 FM 352-5, Boolean Processor 12DI/8DO	6ES7352-5AH11-0AE0 FM 352-5 PNP, Boolean Processor 12DI/8DO
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	24 V
Input current		
from load voltage 1L+, max.	150 mA; typ. 60 mA	150 mA; typ. 60 mA
from load voltage 2L+ (without load), max.	200 mA; typ. 60 mA, DI/DO supply	200 mA; typ. 60 mA, DI/DO supply
from load voltage 3L+ (with encoder), max.	600 mA; typ. 80 mA plus encoder supply	600 mA; typ. 80 mA plus encoder supply
from load voltage 3L+ (without load), max.	200 mA; typ. 80 mA	200 mA; typ. 80 mA
from backplane bus 5 V DC, typ.	135 mA	135 mA
Encoder supply		
5 V encoder supply		
• 5 V	Yes	Yes
• Short-circuit protection	Yes; Electronic overload protection; no protection on applying a normal or counter voltage.	Yes; Electronic overload protection; no protection on applying a normal or counter voltage.
• Output current, max.	250 mA	250 mA
24 V encoder supply		
• 24 V	Yes	Yes
• Short-circuit protection	Yes; Overvoltage and overheating protection if overloaded; diagnostics if output reaches temperature limit; no protection on applying a normal or counter voltage	Yes; Overvoltage and overheating protection if overloaded; diagnostics if output reaches temperature limit; no protection on applying a normal or counter voltage
• Output current, max.	400 mA	400 mA
Power loss		
Power loss, typ.	6.5 W	6.5 W
Memory		
Type of memory	RAM	RAM
Memory size	128 kbyte; required for operation, MMC	128 kbyte; required for operation, MMC
Digital inputs		
Number of digital inputs	8; Standard and up to 12 with 24 V DC encoder inputs as digital inputs	8; Standard and up to 12 with 24 V DC encoder inputs as digital inputs
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal *0*	-30 to +5 V	-30 to +5 V
• for signal *1*	+11 to +30V	+11 to +30V
Input current		
• for signal *0*, max. (permissible quiescent current)	1.5 mA	1.5 mA
• for signal *1*, typ.	3.8 mA	3.8 mA
Input delay (for rated value of input voltage)		
• Input frequency (with a time delay of 0.1 ms), max.	200 kHz	200 kHz
• programmable digital filter delay	None, 5 μs, 10 μs, 15 μs, 20 μs, 50 μs, 1.6 ms	None, 5 μs, 10 μs, 15 μs, 20 μs, 50 μs, 1.6 ms
• Minimum pulse width for program reactions	1 μs, 5 μs, 10 μs, 15 μs, 20 μs, 50 μs, 1.6 ms	1 μs, 5 μs, 10 μs, 15 μs, 20 μs, 50 μs, 1.6 ms
for standard inputs		
- at *0* to *1*, max.	3 μs; typ. 1.5 μs	3 μs; typ. 1.5 μs
Cable length		
• shielded, max.	600 m	600 m

Technical specifications

Article number	6ES7352-5AH01-0AE0 FM 352-5, Boolean Processor 12DI/8DO	6ES7352-5AH11-0AE0 FM 352-5 PNP, Boolean Processor 12DI/8DO
Digital outputs		
Number of digital outputs	8	8
Current-sinking	Yes	No
Current-sourcing	No	Yes
Short-circuit protection	Yes; Overvoltage protection, thermal protection	Yes; Overvoltage protection, thermal protection
Limitation of inductive shutdown voltage to	2M -45 V typ., (-40 V to -55 V); comment: no protection against inductive kickback >55 mJ	2M -45 V typ., (-40 V to -55 V); comment: no protection against inductive kickback >55 mJ
Switching capacity of the outputs		
• on lamp load, max.	5 W	5 W
Output voltage		
• Rated value (DC)	24 V	24 V
• for signal "0", max.	28.8 V	28.8 V
• for signal "1", max.	0.5 V	0.5 V
Output current		
• for signal "1" rated value	0.5 A; At 60 °C	0.5 A; At 60 °C
• for signal "1" permissible range for 0 to 60 °C, min.	5 mA	5 mA
• for signal "1" permissible range for 0 to 60 °C, max.	600 mA	600 mA
• for signal "0" residual current, max.	1 mA	1 mA
Switching frequency		
• with resistive load, max.	100 kHz; 20 kHz at 0.5 A; 100 kHz at 0.25 A	100 kHz; 20 kHz at 0.5 A; 100 kHz at 0.25 A
• with inductive load, max.	2 Hz; 2 Hz at 0.5 A with external commutator diodes; 0.5 Hz at 0.5 A without external commutator diodes	2 Hz; 2 Hz at 0.5 A with external commutator diodes; 0.5 Hz at 0.5 A without external commutator diodes
• on lamp load, max.	10 Hz	10 Hz
Cable length		
• shielded, max.	600 m	600 m
Encoder		
Connectable encoders		
• Incremental encoder (symmetrical)	Yes	Yes
• Incremental encoder (asymmetrical)	Yes	Yes
• Absolute encoder (SSI)	Yes	Yes
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA
Encoder signals, incremental encoder (symmetrical)		
• Trace mark signals	A, notA, B, notB	A, notA, B, notB
• Zero mark signal	N, notN	N, notN
• Input voltage	5 V difference signal (phys. RS 422)	5 V difference signal (phys. RS 422)
• Input frequency, max.	500 kHz	500 kHz
• Cable length, shielded, max.	100 m; 100 m with 24 V supply and 500 kHz; 32 m with 5 V supply and 500 kHz	100 m; 100 m with 24 V supply and 500 kHz; 32 m with 5 V supply and 500 kHz
Encoder signals, incremental encoder (asymmetrical)		
• Trace mark signals	A, B	A, B
• Zero mark signal	N	N
• Input voltage	24 V	24 V
• Input frequency, max.	200 kHz	200 kHz
• Cable length, shielded, max.	50 m; Cable length, HTL incremental encoder, Siemens, type 6FX2001-4: 50 kHz, 25 m shielded, max., 25 kHz, 50 m shielded, max.	50 m; Cable length, HTL incremental encoder, Siemens, type 6FX2001-4: 50 kHz, 25 m shielded, max., 25 kHz, 50 m shielded, max.

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

FM 352-5 high-speed Boolean processor

Technical specifications

Article number	6ES7352-5AH01-0AE0 FM 352-5, Boolean Processor 12DI/8DO	6ES7352-5AH11-0AE0 FM 352-5 PNP, Boolean Processor 12DI/8DO
Encoder signals, absolute encoder (SSI)		
• Data signal	DATA, notDATA	DATA, notDATA
• Clock signal	CK, notCK	CK, notCK
• Telegram length, parameterizable	13 or 25 bit	13 or 25 bit
• Clock frequency, max.	1 MHz; 125 kHz, 250 kHz, 500 kHz or 1 MHz	1 MHz; 125 kHz, 250 kHz, 500 kHz or 1 MHz
• Cable length, shielded, max.	320 m; At 125 kHz	320 m; At 125 kHz
• Monoflop time	settable: 16/32/48/64 µs	settable: 16/32/48/64 µs
• Listening mode	Yes; one or two stations	Yes; one or two stations
• Multiturn	Yes; 25 bit message frame	Yes; 25 bit message frame
Encoder signal evaluation		
• Counting direction, forward	Yes	Yes
• Counting direction, backward	Yes	Yes
Response times		
Input- to output response time	5 V input to 24 V output, 0 filter: 1 to 4 µs (typ.); 24 V input to 24 V output, 0 filter: 2 to 6 µs (typ.)	5 V input to 24 V output, 0 filter: 1 to 4 µs (typ.); 24 V input to 24 V output, 0 filter: 2 to 6 µs (typ.)
Interfaces		
Point-to-point connection		
• Updating times	PLC interface: 1.7 ms	PLC interface: 1.7 ms
Interrupts/diagnostics/ status information		
Alarms		
• Diagnostic alarm	Yes; 1L, 2L, 3L missing; MMC error; output overload (8); encoder supply overload; differential wire break; parameterization error; SSI message frame overflow	Yes; 1L, 2L, 3L missing; MMC error; output overload (8); encoder supply overload; differential wire break; parameterization error; SSI message frame overflow
• Hardware interrupt	Yes; 8 available; for generation by user program	Yes; 8 available; for generation by user program
Counter		
Counting range, description	Counting range (16-bit counters): -32 768 to 32 767 (user-specific within this range); counting range (32-bit counters): -2 147 483 648 to 2 147 483 647 (user-specific within this range)	Counting range (16-bit counters): -32 768 to 32 767 (user-specific within this range); counting range (32-bit counters): -2 147 483 648 to 2 147 483 647 (user-specific within this range)
Counting range, lower limit	-2 147 483 648	-2 147 483 648
Counting range, upper limit	2 147 483 647	2 147 483 647
Counting mode		
• Counting mode, individual	Yes	Yes
• Counting mode, continuous	Yes	Yes
• Counting mode, periodic	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	0 °C	0 °C
• max.	60 °C	60 °C
configuration / header		
configuration / programming / header		
• Program cycle time (scan)	1 µs	1 µs
connection method		
required front connector	1x 40-pin	1x 40-pin
Dimensions		
Width	80 mm	80 mm
Height	125 mm	125 mm
Depth	120 mm	120 mm
Weights		
Weight, approx.	434 g; Module weight: approx. 434 g (with 1L connection and without I/O connection or MMC); shipping weight: approx. 500 g (with bus and 1L connection and without I/O connection or MMC)	434 g; Module weight: approx. 434 g (with 1L connection and without I/O connection or MMC); shipping weight: approx. 500 g (with bus and 1L connection and without I/O connection or MMC)

Overview



- 4-channel closed-loop controller module for universal control tasks
- Can be used for temperature, pressure, flow and level controls
- Convenient online self-optimization for temperature controls
- Predefined controller structures
- 2 control algorithms
- 2 versions:
 - FM 355 C as continuous controller;
 - FM 355 S as step or pulse controller
- With 4 analog outputs (FM 355 C) or 8 digital outputs (FM 355 S) for direct control of the most common actuators
- Continuation of control mode also possible with CPU stop or failure

Ordering data

Article No.

SIMATIC S7-300, controller module FM 355 C 4 channels, continuous, 4 AI+8 DI+4 AO including multi-language configuration package, manual and Getting Started (en, de, fr, it) on CD-ROM	6ES7355-0VH10-0AE0
SIMATIC S7-300, controller module FM 355 S 4 channels, step and pulse, 4 AI+8 DI+8 DO including multi-language configuration package, manual and Getting Started (en, de, fr, it) on CD-ROM	6ES7355-1VH10-0AE0
Front connectors	
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin	6ES7392-1AJ00-0AA0
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin 100 units per packing unit	6ES7392-1AJ00-1AB0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 20-pin	6ES7392-1BJ00-0AA0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 20-pin 100 units per packing unit	6ES7392-1BJ00-1AB0
SIMATIC S7, bus connector (spare part)	6ES7390-0AA00-0AA0
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0
Labeling sheets for machine labeling	See page 5/314
SIMATIC S7-300/ET 200M, slot label Wheel with 19 marking nails from 0 - 18 for knocking out and clipping into the modules; included in the scope of supply of the S7-300 CPUs and interface modules of the ET 200M. Required only as spare part P. unit = 1	6ES7912-0AA00-0AA0
SIMATIC S7, shield support element 80 mm wide With 2 rows for 4 shield connection clamps each	6ES7390-5AA00-0AA0
Shield connection clamps	
SIMATIC S7, shield connection clamp For 2 cables with 2-6 mm diameter 2 units per packing unit	6ES7390-5AB00-0AA0
SIMATIC S7, shield connection clamp For 1 cable with 3.8 mm diameter 2 units per packing unit	6ES7390-5BA00-0AA0
SIMATIC S7, shield connection clamp For 1 cable with 4..13 mm diameter 2 units per packing unit	6ES7390-5CA00-0AA0

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

FM 355 controller module

Technical specifications

Article number	6ES7355-0VH10-0AE0 Control unit FM355C, 4 chan.	6ES7355-1VH10-0AE0 Control unit FM355S, 4 chan.
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	24 V
Input current		
from load voltage L+ (without load), max.	310 mA; Typ. 260 mA	270 mA; typ. 220 mA
from backplane bus 5 V DC, max.	75 mA; typ. 50 mA	75 mA; typ. 50 mA
Power loss		
Power loss, typ.	6.5 W	5.5 W
Digital inputs		
Number of digital inputs	8	8
Input characteristic curve in accordance with IEC 61131, type 2	Yes	Yes
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal "0"	-3 to +5V	-3 to +5V
• for signal "1"	13 to 30V	13 to 30V
Input current		
• for signal "1", typ.	7 mA	7 mA
Cable length		
• shielded, max.	1 000 m	1 000 m
Digital outputs		
Number of digital outputs		8
Short-circuit protection		Yes; Electronic
Limitation of inductive shutdown voltage to		L+ (-1.5 V)
Switching capacity of the outputs		
• on lamp load, max.		5 W
Load resistance range		
• lower limit		240 Ω
• upper limit		4 kΩ
Output voltage		
• for signal "1", min.		L+ (-2.5 V)
Output current		
• for signal "1" rated value		100 mA
• for signal "1" permissible range for 0 to 60 °C, min.		5 mA
• for signal "1" permissible range for 0 to 60 °C, max.		150 mA
• for signal "0" residual current, max.		0.5 mA
Switching frequency		
• with resistive load, max.		100 Hz
• with inductive load, max.		0.5 Hz
• on lamp load, max.		100 Hz
Total current of the outputs (per group)		
all mounting positions		
- up to 60 °C, max.		400 mA
Cable length		
• shielded, max.		1 000 m
Analog inputs		
Number of analog inputs	4	4
permissible input voltage for voltage input (destruction limit), max.	30 V	30 V
permissible input current for current input (destruction limit), max.	40 mA	40 mA

Technical specifications

Article number	6ES7355-0VH10-0AE0	6ES7355-1VH10-0AE0
	Control unit FM355C, 4 chan.	Control unit FM355S, 4 chan.
Input ranges (rated values), voltages		
• 0 to +10 V	Yes	Yes
• -1.75 V to +11.75 V	Yes	Yes
• -80 mV to +80 mV	Yes	Yes
Input ranges (rated values), currents		
• 0 to 20 mA	Yes	Yes
• 0 to 23.5 mA	Yes	Yes
• -3.5 mA to +23.5 mA	Yes	Yes
• 4 mA to 20 mA	Yes	Yes
Input ranges (rated values), thermocouples		
• Type B	Yes	Yes
• Type J	Yes	Yes
• Type K	Yes	Yes
• Type R	Yes	Yes
• Type S	Yes	Yes
Input ranges (rated values), resistance thermometer		
• Pt 100	Yes	Yes
Thermocouple (TC)		
Temperature compensation		
- internal temperature compensation	Yes	Yes
- external temperature compensation with Pt100	Yes	Yes
Characteristic linearization		
• parameterizable	Yes	Yes
- for thermocouples	Type B, J, K, R, S	Type B, J, K, R, S
- for resistance thermometer	Pt100 (standard)	Pt100 (standard)
Cable length		
• shielded, max.	200 m; 50 m at 80 mV and thermocouples	200 m; 50 m at 80 mV and thermocouples
Analog outputs		
Number of analog outputs	4	
Voltage output, short-circuit protection	Yes	
Voltage output, short-circuit current, max.	25 mA	
Current output, no-load voltage, max.	18 V	
Output ranges, voltage		
• 0 to 10 V	Yes	
• -10 V to +10 V	Yes	
Output ranges, current		
• 0 to 20 mA	Yes	
• 4 mA to 20 mA	Yes	
Connection of actuators		
• for voltage output two-wire connection	Yes	
• for current output two-wire connection	Yes	
Load impedance (in rated range of output)		
• with voltage outputs, min.	1 k Ω	
• with voltage outputs, capacitive load, max.	1 μ F	
• with current outputs, max.	500 Ω	
• with current outputs, inductive load, max.	1 mH	

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

FM 355 controller module

Technical specifications

Article number	6ES7355-0VH10-0AE0 Control unit FM355C, 4 chan.	6ES7355-1VH10-0AE0 Control unit FM355S, 4 chan.
Cable length • shielded, max.	200 m; 50 m at 80 mV and thermocouples	
Analog value generation for the inputs		
Integration and conversion time/resolution per channel • Resolution with overrange (bit including sign), max.	14 bit; 12 bit or 14 bit, parameterizable	14 bit; 12 bit or 14 bit, parameterizable
Analog value generation for the outputs		
Settling time • for resistive load • for capacitive load • for inductive load	0.1 ms 3.3 ms 0.5 ms	
Encoder		
Connection of signal encoders • for voltage measurement • for current measurement as 4-wire transducer	Yes Yes	Yes Yes
Connectable encoders • 2-wire sensor - permissible quiescent current (2-wire sensor), max.	Yes 1.5 mA	Yes 1.5 mA
Errors/accuracies		
Operational error limit in overall temperature range • Voltage, relative to input range, (+/-) • Current, relative to input range, (+/-) • Resistance thermometer, relative to input range, (+/-) • Voltage, relative to output range, (+/-) • Current, relative to output range, (+/-)	0.6 %; ±0.6 to ±1 % 0.6 %; ±0.6 to ±1 % 0.6 %; ±0.6 to ±1 % 0.5 % 0.6 %	0.6 %; ±0.6 to ±1 % 0.6 %; ±0.6 to ±1 % 0.6 %; ±0.6 to ±1 %
Basic error limit (operational limit at 25 °C) • Voltage, relative to input range, (+/-) • Current, relative to input range, (+/-) • Resistance thermometer, relative to input range, (+/-) • Voltage, relative to output range, (+/-) • Current, relative to output range, (+/-)	0.4 %; 80 mV: ±0.6 %; 250 to 1 000 mV: ±0.4 %; 2.5 to 10 V: ±0.6 %; 3.2 to 20 mA: ±0.5 % 0.4 %; ±0.4 to ±0.6 % 0.4 %; ±0.4 to ±0.6 % 0.3 % 0.5 %	0.4 %; 80 mV: ±0.6 %; 250 to 1 000 mV: ±0.4 %; 2.5 to 10 V: ±0.6 %; 3.2 to 20 mA: ±0.5 % 0.4 %; ±0.4 to ±0.6 % 0.4 %; ±0.4 to ±0.6 %
Interrupts/diagnostics/status information Substitute values connectable	Yes; Parameterizable	Yes; Parameterizable
Integrated Functions		
Control technology • Number of closed-loop controllers	4	4
connection method required front connector	2x 20-pin	2x 20-pin
Dimensions		
Width	80 mm	80 mm
Height	125 mm	125 mm
Depth	120 mm	120 mm
Weights Weight, approx.	470 g	470 g

5

Overview



- 4-channel closed-loop controller module specifically for temperature controls
- Including integrated and easy-to-use online self-optimization
- Heating and cooling controllers as well as combined controllers with heating and active cooling function feasible
- Ready-to-use controller structures
- 2 versions:
 - FM 355-2 C as a continuous controller;
 - FM 355-2 S as step or pulse controllers
- With 4 analog outputs (FM 355-2 C) or 8 digital outputs (FM 355-2 S) to directly control the most common final control elements
- Continuation of control mode also possible with CPU stop or failure

Ordering data

Article No.

SIMATIC S7-300, FM 355-2 C temperature controller module

6ES7355-2CH00-0AE0

4 channels, continuous,
4 AI+8 DI+4 AO including
multi-language configuration
package, manual and Getting
Started (en, de, it) on CD-ROM

SIMATIC S7-300, FM 355-2S temperature controller module

6ES7355-2SH00-0AE0

4 channels, step and pulse,
4 AI+8 DI+8 DO including
multi-language configuration
package, manual and Getting
Started (en, de, it) on CD-ROM

Accessories**Front connectors****SIMATIC S7-300, front connector**

6ES7392-1AJ00-0AA0

For signal modules with screw
contacts, 20-pin

SIMATIC S7-300, front connector

6ES7392-1AJ00-1AB0

For signal modules with screw
contacts, 20-pin
100 units per packing unit

SIMATIC S7-300, front connector

6ES7392-1BJ00-0AA0

For signal modules with
spring-loaded contacts, 20-pin

SIMATIC S7-300, front connector

6ES7392-1BJ00-1AB0

For signal modules with
spring-loaded contacts, 20-pin
100 units per packing unit

SIMATIC S7, bus connector (spare part)

6ES7390-0AA00-0AA0

SIMATIC S7-300, labeling strip (spare part)

6ES7392-2XX00-0AA0

For modules with 20-pin front
connector,
10 units per packing unit

Labeling sheets for machine labeling

See page 5/314

SIMATIC S7-300/ET 200M, slot label

6ES7912-0AA00-0AA0

Wheel with 19 marking nails from
0 - 18 for knocking out and clipping
into the modules; included in the
scope of supply of the
S7-300 CPUs and interface
modules of the ET 200M.
Required only as spare part
P. unit = 1

SIMATIC S7, shield support element 80 mm wide, with 2 rows for 4 shield terminals each

6ES7390-5AA00-0AA0

Shield connection clamps**SIMATIC S7, shield connection clamp**

6ES7390-5AB00-0AA0

For 2 cables with 2-6 mm diameter
2 units per packing unit

SIMATIC S7, shield connection clamp

6ES7390-5BA00-0AA0

For 1 cable with 3..8 mm diameter
2 units per packing unit

SIMATIC S7, shield connection clamp

6ES7390-5CA00-0AA0

For 1 cable with 4..13 mm diameter
2 units per packing unit

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

FM 355-2 temperature controller module

Technical specifications

Article number	6ES7355-2CH00-0AE0 TEMP.-Control unit FM355-2C, 4 chan.	6ES7355-2SH00-0AE0 TEMP.-Control unit FM355-2S, 4 chan.
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	24 V
Input current		
from load voltage L+ (without load), max.	310 mA; Typ. 260 mA	270 mA; typ. 220 mA
from backplane bus 5 V DC, max.	75 mA; typ. 50 mA	75 mA; typ. 50 mA
Power loss		
Power loss, typ.	6.5 W	5.5 W
Digital inputs		
Number of digital inputs	8	8
Input characteristic curve in accordance with IEC 61131, type 2	Yes	Yes
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal *0*	-3 to +5V	-3 to +5V
• for signal *1*	13 to 30V	13 to 30V
Input current		
• for signal *1*, typ.	7 mA	7 mA
Cable length		
• shielded, max.	1 000 m	1 000 m
Digital outputs		
Number of digital outputs		8
Short-circuit protection		Yes; Electronic
Limitation of inductive shutdown voltage to		L+ (-1.5 V)
Switching capacity of the outputs		
• on lamp load, max.		5 W
Load resistance range		
• lower limit		240 Ω
• upper limit		4 kΩ
Output voltage		
• for signal *1*, min.		L+ (-2.5 V)
Output current		
• for signal *1* rated value		0.1 A
• for signal *1* permissible range for 0 to 60 °C, min.		5 mA
• for signal *1* permissible range for 0 to 60 °C, max.		150 mA
• for signal *0* residual current, max.		0.5 mA
Switching frequency		
• with resistive load, max.		100 Hz
• with inductive load, max.		0.5 Hz
• on lamp load, max.		100 Hz
Total current of the outputs (per group)		
all mounting positions		
- up to 60 °C, max.		400 mA
Cable length		
• shielded, max.		1 000 m
Analog inputs		
Number of analog inputs	4	4
permissible input voltage for voltage input (destruction limit), max.	20 V	20 V
permissible input current for current input (destruction limit), max.	40 mA	40 mA

Technical specifications

Article number	6ES7355-2CH00-0AE0	6ES7355-2SH00-0AE0
	TEMP.-Control unit FM355-2C, 4 chan.	TEMP.-Control unit FM355-2S, 4 chan.
Input ranges (rated values), voltages		
• 0 to +10 V	Yes	Yes
• -1.75 V to +11.75 V	Yes	Yes
Input ranges (rated values), currents		
• 0 to 20 mA	Yes	Yes
• 0 to 23.5 mA	Yes	Yes
• -3.5 mA to +23.5 mA	Yes	Yes
• 4 mA to 20 mA	Yes	Yes
Input ranges (rated values), thermocouples		
• Type B	Yes	Yes
• Type E	Yes	Yes
• Type J	Yes	Yes
• Type K	Yes	Yes
• Type R	Yes	Yes
• Type S	Yes	Yes
Input ranges (rated values), resistance thermometer		
• Pt 100	Yes	Yes
Thermocouple (TC)		
Temperature compensation		
- internal temperature compensation	Yes	Yes
- external temperature compensation with Pt100	Yes	Yes
Characteristic linearization		
• parameterizable	Yes	Yes
- for thermocouples	Type B, E, J, K, R, S	Type B, E, J, K, R, S
- for resistance thermometer	Pt100 (standard)	Pt100 (standard)
Cable length		
• shielded, max.	200 m; 50 m at 80 mV and thermocouples	200 m; 50 m at 80 mV and thermocouples
Analog outputs		
Number of analog outputs	4	
Voltage output, short-circuit protection	Yes	
Voltage output, short-circuit current, max.	25 mA	
Current output, no-load voltage, max.	18 V	
Output ranges, voltage		
• 0 to 10 V	Yes	
• -10 V to +10 V	Yes	
Output ranges, current		
• 0 to 20 mA	Yes	
• 4 mA to 20 mA	Yes	
Connection of actuators		
• for voltage output two-wire connection	Yes	
• for current output two-wire connection	Yes	
Load impedance (in rated range of output)		
• with voltage outputs, min.	1 k Ω	
• with voltage outputs, capacitive load, max.	1 μ F	
• with current outputs, max.	500 Ω	
• with current outputs, inductive load, max.	1 mH	

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

FM 355-2 temperature controller module

Technical specifications

Article number	6ES7355-2CH00-0AE0	6ES7355-2SH00-0AE0
	TEMP.-Control unit FM355-2C, 4 chan.	TEMP.-Control unit FM355-2S, 4 chan.
Cable length		
• shielded, max.	200 m; 50 m at 80 mV and thermocouples	
Analog value generation for the inputs		
Integration and conversion time/resolution per channel		
• Resolution with overrange (bit including sign), max.	14 bit	14 bit
Analog value generation for the outputs		
Settling time		
• for resistive load	0.1 ms	
• for capacitive load	3.3 ms	
• for inductive load	0.5 ms	
Encoder		
Connection of signal encoders		
• for voltage measurement	Yes	Yes
• for current measurement as 4-wire transducer	Yes	Yes
Connectable encoders		
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA
Errors/accuracies		
Operational error limit in overall temperature range		
• Voltage, relative to input range, (+/-)	0.6 %; ± 0.6 to ± 0.7 %	0.06 %; ± 0.06 to ± 0.7 %
• Current, relative to input range, (+/-)	0.6 %; ± 0.6 to ± 0.7 %	0.06 %; ± 0.06 to ± 0.7 %
• Resistance thermometer, relative to input range, (+/-)	0.6 %; ± 0.6 to ± 0.7 %	0.06 %; ± 0.06 to ± 0.7 %
• Voltage, relative to output range, (+/-)	0.5 %	
• Current, relative to output range, (+/-)	0.6 %	
Basic error limit (operational limit at 25 °C)		
• Voltage, relative to input range, (+/-)	0.04 %; ± 0.04 to ± 0.5 %	0.04 %; ± 0.04 to ± 0.5 %
• Current, relative to input range, (+/-)	0.04 %; ± 0.04 to ± 0.5 %	0.04 %; ± 0.04 to ± 0.5 %
• Resistance thermometer, relative to input range, (+/-)	0.04 %; ± 0.04 to ± 0.5 %	0.04 %; ± 0.04 to ± 0.5 %
• Voltage, relative to output range, (+/-)	0.4 %	
• Current, relative to output range, (+/-)	0.5 %	
Interrupts/diagnostics/status information		
Substitute values connectable	Yes; Parameterizable	Yes; Parameterizable
Integrated Functions		
Control technology		
• Number of closed-loop controllers	4	4
connection method		
required front connector	2x 20-pin	2x 20-pin
Dimensions		
Width	80 mm	80 mm
Height	125 mm	125 mm
Depth	120 mm	120 mm
Weights		
Weight, approx.	470 g	470 g

5

Overview



- Interface between max. 3 absolute encoders (SSI) and the CPU
- For provision of the displacement encoder values for further processing in STEP 7 programs
- Enables direct response of controller to encoder values in moving systems

Note:

We offer position measuring systems and preassembled connecting cables for counting and positioning functions under SIMODRIVE Sensor or Motion Connect 500, see under

<http://www.siemens.com/simatic-technology>.

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SIMATIC S7-300, signal module For 3 SSI encoders for reading in the positioning value with 2 FREEZE inputs, 1x 20-pin supports isochronous mode	6ES7338-4BC01-0AB0	Signal cable Preassembled for SSI absolute encoder 6FX2001-5, without D-sub connector, UL/DESINA	6FX5002-2CC12-
Accessories			
Front connectors			
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin	6ES7392-1AJ00-0AA0	0 m	1
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin 100 units per packing unit	6ES7392-1AJ00-1AB0	100 m	2
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 20-pin	6ES7392-1BJ00-0AA0	200 m	3
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 20-pin 100 units per packing unit	6ES7392-1BJ00-1AB0	0 m	A
SIMATIC S7-300, front door Raised for 32-channel SM, allows the connection of 1.3 mm ² /16 AWG conductors 5 units per packing unit	6ES7328-0AA00-7AA0	10 m	B
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0	20 m	C
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2	30 m	D
		40 m	E
		50 m	F
		60 m	G
		70 m	H
		80 m	J
		90 m	K
		0 m	A
		1 m	B
		2 m	C
		3 m	D
		4 m	E
		5 m	F
		6 m	G
		7 m	H
		8 m	J
		9 m	K
		0.0 m	0
		0.1 m	1
		0.2 m	2
		0.3 m	3
		0.4 m	4
		0.5 m	5
		0.6 m	6
		0.7 m	7
		0.8 m	8

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

SM 338 POS input module**Technical specifications**

Article number	6ES7338-4BC01-0AB0 SM 338, f. 3 SSI encoders
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
Input current	
from load voltage L+ (without load), max.	100 mA
from backplane bus 5 V DC, max.	160 mA
Encoder supply	
24 V encoder supply	
• 24 V	Yes; L+ (-0.8 V)
• Output current, max.	900 mA
Power loss	
Power loss, typ.	3 W
Digital inputs	
Input voltage	
• for signal "0"	-3 to +5V
• for signal "1"	11 to 30.2 V
Input current	
• for signal "0", max (permissible quiescent current)	2 mA
• for signal "1", typ.	9 mA
Input delay (for rated value of input voltage) for standard inputs	
- at "0" to "1", min.	300 µs
Cable length	
• shielded, max.	600 m

Article number	6ES7338-4BC01-0AB0 SM 338, f. 3 SSI encoders
Encoder	
Number of connectable encoders, max.	3
Connectable encoders	
• Absolute encoder (SSI)	Yes
• 2-wire sensor	Yes
Encoder signals, absolute encoder (SSI)	
• Cable length, shielded, max.	320 m; 320 m at 125 kHz; 160 m at 250 kHz; 60 m at 500 kHz; 20 m at 1 MHz
Interrupts/diagnostics/status information	
Alarms	
• Diagnostic alarm	Yes
connection method	
required front connector	20-pin
Dimensions	
Width	40 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	235 g

5

Overview



SIWAREX U is a versatile weighing module for all simple weighing and force measuring tasks. The compact module can be integrated into SIMATIC automation systems without any problems. Complete data access is then possible via the SIMATIC.

Ordering data

Ordering data	Article No.
SIWAREX U For SIMATIC S7 and ET 200M, incl. bus connector, weight 0.3 kg (0.661 lb) Single-channel version ¹⁾ for connecting one scale Two-channel version ²⁾ for connecting two scales	 7MH4950-1AA01 7MH4950-2AA01
SIWATOOL V4 & V7 Service and commissioning software for SIWAREX weighing modules	7MH4900-1AK01
SIWAREX U configuration package for PCS 7, version 8.0 Suitable for 7MH4950-xAA01 <ul style="list-style-type: none"> • Function block for CFC • Faceplate • Manual 	7MH4950-3AK62
SIWAREX PCS 7 AddOn Library for PCS 7 V8.x and V9.0 Supports PROFINET APL faceplates and function blocks for: <ul style="list-style-type: none"> • SIWAREX U • SIWAREX FTA • SIWAREX FTC_B (belt scale) • SIWAREX WP321 Classic faceplate and function block for: <ul style="list-style-type: none"> • SIWAREX FTC_L (Loss-in-weight) 	7MH4900-1AK61
SIWATOOL connection cable From SIWAREX U/CS with serial PC interface, for 9-pin PC interfaces (RS 232), length 3 m (9.84 ft)	7MH4607-8CA
Installation material (mandatory)	
20-pin front connector with screw contacts Required for each SIWAREX module	6ES7392-1AJ00-0AA0
Shield connection element Sufficient for two SIWAREX U modules	6ES7390-5AA00-0AA0

Ordering data	Article No.
Shield connection clamp Content: 2 units (suitable for cable with diameter 4 ... 13 mm / 0.16 ... 0.51 inch) Note: One shield connection clamp is required for each of the following: <ul style="list-style-type: none"> • Scale connection • RS 485 interface • RS 232 interface 	6ES7390-5CA00-0AA0
S7 DIN rail <ul style="list-style-type: none"> • 160 mm (6.30 inch) • 480 mm (18.90 inch) • 530 mm (20.87 inch) • 830 mm (32.68 inch) • 2 000 mm (78.74 inch) 	6ES7390-1AB60-0AA0 6ES7390-1AE80-0AA0 6ES7390-1AF30-0AA0 6ES7390-1AJ30-0AA0 6ES7390-1BC00-0AA0
Accessories (optional)	
Labeling strips (10 units, spare part)	6ES7392-2XX00-0AA0
SIWAREX EB extension box For extending sensor cables	7MH4710-2AA
SIWAREX JB junction box, aluminum housing For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes	7MH5001-0AA20

¹⁾ Compatible with 7MH4601-1AA01; supply of load cells changed to 6 V DC.

²⁾ Compatible with 7MH4601-1BA01; supply of load cells changed to 6 V DC.

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

SIWAREX U weighing electronics**Ordering data****Article No.****SIWAREX JB junction box, stainless steel housing**

For connecting up to 4 load cells in parallel

7MH5001-0AA00**SIWAREX JB junction box, stainless steel housing (ATEX)**

For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate)

7MH5001-0AA01**SIWAREX IS Ex interface**

For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately.

- With short-circuit current < 199 mA DC
- With short-circuit current < 137 mA DC

7MH4710-5BA**7MH4710-5CA****Cable (optional)****Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) – CY**

For connecting SIWAREX electronic to junction box (JB), extension box (EB), digital junction box (DB), Ex interface (IS) or between two extension boxes.

For permanent installation. Occasional bending is possible.

External diameter: approx. 10.8 mm (0.43 inch)

Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F)

Sold by the meter.

- Sheath color: orange
- Sheath color (for hazardous atmospheres): blue

7MH4702-8AG**7MH4702-8AF****Article No.****Remote displays (optional)**

The digital remote displays can be connected directly to SIWAREX U through a TTY interface.

The following remote displays can be used: S102, S302

Siebert Industrieelektronik GmbH
PO Box 1180
D-66565 Eppelborn
Tel.: +49 6806/980-0
Fax: +49 6806/980-999

Internet:
<https://www.siebert-group.com/en/>

Detailed information is available from the manufacturer.

Technical specifications

SIWAREX U	
Integration in automation systems	
<ul style="list-style-type: none"> S7-300 S7-1500 S7-400 (H) PCS 7 (H) Automation systems from other vendors Stand-alone (without SIMATIC CPU) 	Direct integration Through ET 200M Through ET 200M Through ET 200M Through ET 200M Possible with IM 153-1
Communication interfaces	<ul style="list-style-type: none"> SIMATIC S7 (P bus) RS 232 TTY
Connection of remote display (via serial TTY interface)	Gross, channel 1, 2 or default value 1, 2
Scale adjustment	Through SIMATIC (P bus) or PC using SIWATOOL U (RS 232)
Measuring properties	
Error limit according to DIN 1319-1 of full-scale value at 20 °C ± 10 K (68 °F ± 10 K)	0.05%
Internal resolution ADC	65 535
Data format weight values	2 bytes (fixed-point)
Number of measurements/second	50
Digital filter	0.05 ... 5 Hz (in 7 steps), mean value filter
Weighing functions	
Weight values	Gross
Limit values	2 (min./max.)
Zero-setting function	Per command
Load cells	Strain gauges in 4-wire or 6-wire system

SIWAREX U	
Load cell powering	
Supply voltage U_s (rated value)	6 V DC ¹⁾
Max. supply current	≤ 150 mA per channel
Permissible load resistance	<ul style="list-style-type: none"> R_{Lmin} > 40 Ω per channel R_{Lmax} < 4 010 Ω
With Ex(i) interface	<ul style="list-style-type: none"> R_{Lmin} > 87 Ω per channel R_{Lmax} < 4 010 Ω
Permissible load cell characteristic	Up to 4 mV/V
Max. distance of load cells	<ul style="list-style-type: none"> 500 m²⁾ 150/500 m for gas group IIC 500 m²⁾ for gas group IIB (see SIWAREX IS Manual)
Intrinsically-safe load cell powering	Optional (Ex interface) with SIWAREX IS
Auxiliary power supply	
Rated voltage	24 V DC
Max. power consumption	150 mA (single-channel) / 240 mA (dual-channel)
Current consumption on backplane bus	≤ 100 mA
Certification	ATEX 95, FM, cUL _{US} Haz. Loc.
IP degree of protection to EN 60529; IEC 60529	IP20
Climatic requirements	
T_{min} (IND) ... T_{max} (IND) (operating temperature)	
<ul style="list-style-type: none"> Horizontal installation Vertical installation 	0 ... +60 °C (32 ... 140 °F) 0 ... +40 °C (32 ... 104 °F)
EMC requirements	According to NAMUR NE21, Part 1; EN 61326
Dimensions	40 × 125 × 130 mm (1.58 × 4.92 × 5.12 inch)

¹⁾ Load cell supply changed to 6 V DC as compared to 7MH4601-1AA01 and 7MH4601-1BA01.

²⁾ Possible up to 1 000 m under certain conditions when using the recommended cable (accessories).

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

SIWAREX FTA weighing electronics

Overview



SIWAREX FTA (Flexible Technology, Automatic Weighing Instrument) is a versatile and flexible weighing module for industrial use. It can be used in both non-automatic and automatic weighing operation, for example the production of mixtures, and for filling, loading, monitoring and bag filling.

It has the corresponding scale approvals and is also suitable for weighing systems requiring official calibration.

The SIWAREX FTA function module is integrated in SIMATIC S7/PCS 7 and uses the features of this modern automation system, such as integrated communication, diagnostics and configuration tools.

5

Ordering data

Ordering data	Article No.	Ordering data	Article No.
<p>SIWAREX FTA Legal-for-trade electronic weighing systems for automatic scales for S7-300 and ET 200M.</p> <p>EC type approval 3 × 6000 d</p> <p>Applications: Dosing, filling, bagging, loading.</p> <p>Note: Observe approval conditions for applications requiring official calibration. We recommend using our calibration set and contacting our SIWAREX hotline.</p>	7MH4900-2AA01	<p>Configuration package SIWAREX FTA for SIMATIC PCS 7, Version 8.0 on CD-ROM</p> <ul style="list-style-type: none"> HSP hardware support package for integrating SIWAREX FTA/FTC in STEP 7 Function block for CFC Faceplate Manual 	7MH4900-2AK63
<p>SIPLUS FTA SIPLUS FTA -10 ... +60 °C with conformal coating based on 7MH4900-2AA01</p> <p>Legal-for-trade electronic weighing system for automatic scales for S7-300 and ET 200M. EU type approval 3 × 6000 d</p> <p>Applications: Dosing, filling, bagging, loading.</p> <p>Note: Observe approval conditions for applications requiring official calibration. We recommend using our calibration set and contacting our SIWAREX hotline.</p>	6AG1900-2AA01-4AA0	<p>SIWAREX PCS 7 AddOn Library for PCS 7 V8.x and V9.0</p> <p>Supports PROFINET</p> <p>APL faceplates and function blocks for:</p> <ul style="list-style-type: none"> SIWAREX U SIWAREX FTA SIWAREX FTC_B (belt scale) SIWAREX WP321 <p>Classic faceplate and function block for:</p> <ul style="list-style-type: none"> SIWAREX FTC_L (Loss-in-weight) 	7MH4900-1AK61
<p>SIWAREX FTA Equipment Manual</p> <p>Available in a range of languages</p> <p>Free download on the Internet at: http://www.siemens.com/weighing/documentation</p>		<p>Calibration set for SIWAREX FTA</p> <p>For verification of up to 5 scales comprising:</p> <ul style="list-style-type: none"> 3 × inscription foils for ID label 1 × protective film Guidelines for verification, verification certificates and approvals, editable label, SIWAREX FTA Equipment Manual on CD-ROM 	7MH4900-2AY10
<p>SIWAREX FTA "Getting Started"</p> <p>Sample software shows beginners how to program the scales in STEP 7.</p> <p>Free download on the Internet at: http://www.siemens.com/weighing/documentation</p>		<p>SIWATOOL connection cable</p> <p>From SIWAREX FTA with serial PC interface, for 9-pin PC interfaces (RS 232)</p> <ul style="list-style-type: none"> 2 m long (6.56 ft) 5 m long (16.40 ft) 	7MH4702-8CA 7MH4702-8CB
<p>SIWATOOL V4 & V7</p> <p>Service and commissioning software for SIWAREX weighing modules</p>	7MH4900-1AK01	<p>Front connector, 40-pin</p> <p>Required for each SIWAREX module</p> <ul style="list-style-type: none"> With screw contacts With spring-loaded terminals 	6ES7392-1AM00-0AA0 6ES7392-1BM01-0AA0

Ordering data	Article No.	Article No.
Shield connection element Sufficient for one SIWAREX FTA module	6ES7390-5AA00-0AA0	
Shield connection clamp Content: 2 units (suitable for cable with diameter 4 ... 13 mm / 0.16 ... 0.51 inch) Note: One shield connection clamp is required for each of the following: <ul style="list-style-type: none"> • Scale connection • RS 485 interface • RS 232 interface 	6ES7390-5CA00-0AA0	
S7 DIN rail <ul style="list-style-type: none"> • 160 mm (6.30 inch) • 480 mm (18.90 inch) • 530 mm (20.87 inch) • 830 mm (32.68 inch) • 2 000 mm (78.74 inch) 	6ES7390-1AB60-0AA0 6ES7390-1AE80-0AA0 6ES7390-1AF30-0AA0 6ES7390-1AJ30-0AA0 6ES7390-1BC00-0AA0	
MMC memory For data logging up to 32 MB, only for legal-for-trade applications R76, R51 and R107	7MH4900-2AY21	
Accessories		
SIWAREX EB extension box For extending sensor cables.	7MH4710-2AA	
SIWAREX JB junction box, aluminum housing For connecting up to 4 load cells in parallel, and for connecting several junction boxes	7MH5001-0AA20	
SIWAREX JB junction box, stainless steel housing For connecting up to 4 load cells in parallel.	7MH5001-0AA00	
SIWAREX JB junction box, stainless steel housing (ATEX) For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate).	7MH5001-0AA01	
		Ex interface SIWAREX IS For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately. <ul style="list-style-type: none"> • With short-circuit current < 199 mA DC • With short-circuit current < 137 mA DC
		7MH4710-5BA 7MH4710-5CA
		Cable (optional) Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) – CY For connecting SIWAREX electronic to junction box (JB), extension box (EB), digital junction box (DB), Ex interface (IS) or between two extension boxes. For permanent installation. Occasional bending is possible. External diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F) Sold by the meter. <ul style="list-style-type: none"> • Sheath color: orange • Sheath color (for hazardous atmospheres): blue
		7MH4702-8AG 7MH4702-8AF
		Remote displays (optional) The Siebert S102 and S302 remote digital displays can be directly connected to the SIWAREX FTA via an RS 485 interface. Siebert Industrieelektronik GmbH PO Box 1180 D-66565 Eppelborn Tel.: +49 6806/980-0 Fax: +49 6806/980-999 Internet: https://www.siebert-group.com/en/ Detailed information is available from the manufacturer.

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

SIWAREX FTA weighing electronics

Technical specifications

SIWAREX FTA	
Use in automation systems	
S7-300	Directly or via ET 200M
S7-1500	Through ET 200M
S7-400 (H)	Through ET 200M
PCS 7 (H)	Through ET 200M
Communication interfaces	
S7	Through backplane bus
RS 232	For SIWATOOL or printer connection
RS 485	For remote display or digital load cell
Module parameterization	
	Using SIMATIC S7 Using SIWATOOL FTA software (RS 232)
Measuring properties	
EC type approval as non automatic weighing instrument, trade class III	$3 \times 6\,000\,d \geq 0.5\ \mu\text{V/e}$
Internal resolution	16 million parts
Internal/external updating rate	400/100 Hz
Several parameterizable digital filters	
	Critically damped, Bessel, Butterworth (0.05 ... 20 Hz), mean-value filter
Weighing functions	
Non automatic weighing instrument	OIML R76
Automatic weighing machine	OIML R51, R61, R107
Load cells	
	Strain gauges in 4-wire or 6-wire system
3 characteristic value ranges	1, 2 or 4 mV/V
Load cell powering	
Supply voltage U_s (rated value)	10.3 V DC
Max. supply current	184 mA
Permissible load cell resistance	
• $R_{L\min}$	$> 56\ \Omega$
• $R_{L\max}$	$> 87\ \Omega$ with Ex interface $\leq 4\,010\ \Omega$

SIWAREX FTA	
Max. distance of load cells	
When using the recommended cable:	
Standard	1 000 m (3 280 ft)
In hazardous area ¹⁾	
• For gases of group IIC	300 m (984 ft)
• For gases of group IIB	1000 m (3 280 ft)
Connection to load cells in Ex zone 1	
	Optionally via SIWAREX IS Ex interface
Ex approvals zone 2 and safety	
	ATEX 95, FM, cUL _{US} Haz. Loc.
Auxiliary power supply	
Rated voltage	24 V DC
Max. power consumption	500 mA
Current consumption on backplane bus	Typ. 55 mA
Inputs/outputs	
Digital inputs	7 DI electrically isolated
Digital outputs	8 DO electrically isolated
Counter input	Up to 10 kHz
Analog output	
• Current range	0/4 ... 20 mA
• Updating rate	100 Hz
Approvals	
	EC type approval (CE, OIML R76)
	EU type-examination certificate according to MID (OIML R51, R61, R107)
Degree of protection according to EN 60529; IEC 60529	
	IP20
Climatic requirements	
T_{\min} (IND) ... T_{\max} (IND) (operating temperature)	
• Horizontal installation	-10 ... 60 °C (14 ... 140 °F)
• Vertical installation	-10 ... 40 °C (14 ... 104 °F)
EMC requirements	
	EN 61326, EN 45501, NAMUR NE21, Part 1
Dimensions	
	80 × 125 × 130 mm (3.15 × 4.92 × 5.12 inch)
Weight	
	600 g (0.44 lb)

¹⁾ For further details, see Ex interface, type SIWAREX IS.

Overview



The SIWAREX FTC (Flexible Technology for Continuous Weighing) is a versatile and flexible weighing module for belt scales, loss-in-weight feeders and solids flowmeters. It can also be used to record weights and measure force. The SIWAREX FTC function module is integrated in SIMATIC S7/PCS 7 and uses the features of this modern automation system, such as integrated communication, diagnostics and configuration tools.

Ordering data	Article No.	Ordering data	Article No.
SIWAREX FTC Electronic weighing system for S7-300 and ET 200M. Applications: Belt scales, force measurement, loss-in-weight scales and solids flowmeters	7MH4900-3AA01	SIWATOOL V4 & V7 Service and commissioning software for SIWAREX weighing modules	7MH4900-1AK01
SIWAREX FTC_B Equipment Manual for belt scales Available in a range of languages Free download on the Internet at: http://www.siemens.com/weighing/documentation		SIWAREX PCS 7 AddOn Library for PCS7 V8.x and V9.0 • Supports PROFINET APL faceplates and function blocks for: <ul style="list-style-type: none"> • SIWAREX U • SIWAREX FTA • SIWAREX FTC_B (belt scale) • SIWAREX WP321 	7MH4900-1AK61
SIWAREX FTC_L Equipment Manual for solids flowmeters and loss-in-weight scales Available in a range of languages Free download on the Internet at: http://www.siemens.com/weighing/documentation		Classic faceplate and function block for: <ul style="list-style-type: none"> • SIWAREX FTC_L (Loss-in-weight) 	
SIWAREX FTC "Getting Started" for belt scales Sample software shows beginners how to program the scales in STEP 7 for belt scale mode Free download on the Internet at: http://www.siemens.com/weighing/documentation		SIWATOOL connection cable from SIWAREX FTC with serial PC interface, for 9-pin PC interfaces (RS 232) <ul style="list-style-type: none"> • 2 m long (6.56 ft) • 5 m long (16.40 ft) 	7MH4702-8CA 7MH4702-8CB
SIWAREX FTC "Getting Started" for solids flowmeters Sample software shows beginners how to program the scales in STEP 7 for solids flowmeter mode Free download on the Internet at: http://www.siemens.com/weighing/documentation		40-pin front connector with screw contacts Required for each SIWAREX module <ul style="list-style-type: none"> • With screw contacts • With spring-loaded terminals 	6ES7392-1AM00-0AA0 6ES7392-1BM01-0AA0
SIWAREX FTC "Getting Started" for loss-in-weight scales Sample software shows beginners how to program the scales in STEP 7 for loss-in-weight scale mode Free download on the Internet at: http://www.siemens.com/weighing/documentation		Shield connection element Sufficient for one SIWAREX FTC module	6ES7390-5AA00-0AA0
		Shield connection clamp Content: 2 units (suitable for cable with diameter 4 ... 13 mm / 0.16 ... 0.51 inch) Note: One shield connection clamp is required for each of the following: <ul style="list-style-type: none"> • Scale connection • RS 485 interface • RS 232 interface 	6ES7390-5CA00-0AA0

SIMATIC S7-300 Advanced Controllers

I/O modules

Function modules

SIWAREX FTC weighing electronics

Ordering data

Article No.

S7 DIN rail

- 160 mm (6.30 inch)
- 480 mm (18.90 inch)
- 530 mm (20.87 inch)
- 830 mm (32.68 inch)
- 2 000 mm (78.74 inch)

6ES7390-1AB60-0AA0
6ES7390-1AE80-0AA0
6ES7390-1AF30-0AA0
6ES7390-1AJ30-0AA0
6ES7390-1BC00-0AA0

MMC memory

For data logging up to 32 MB, only for legal-for-trade applications R76, R51 and R107

7MH4900-2AY21

Accessories

SIWAREX EB extension box

For extending sensor cables.

7MH4710-2AA

SIWAREX JB junction box, aluminum housing

For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes.

7MH5001-0AA20

SIWAREX JB junction box, stainless steel housing

For connecting up to 4 load cells in parallel.

7MH5001-0AA00

SIWAREX JB junction box, stainless steel housing (ATEX)

For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate).

7MH5001-0AA01

Ex interface SIWAREX IS

For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately.

- With short-circuit current < 199 mA DC
- With short-circuit current < 137 mA DC

7MH4710-5BA

7MH4710-5CA

Article No.

Cable (optional)

Cable Li2Y 1 × 2 × 0.75 ST + 2 × (2 × 0.34 ST) – CY

For connecting SIWAREX electronic to junction box (JB), extension box (EB), digital junction box (DB), Ex interface (IS) or between two extension boxes.

For permanent installation. Occasional bending is possible.

External diameter: approx. 10.8 mm (0.43 inch)

Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F)

Sold by the meter.

- Sheath color: orange
- For hazardous atmospheres. Sheath color: blue

7MH4702-8AG

7MH4702-8AF

Remote display (optional)

The Siebert S102 and S302 remote digital displays can be directly connected to the SIWAREX FTC via an RS 485 interface. (not suitable for belt scale mode)

Siebert Industrieelektronik GmbH
PO Box 1180
D-66565 Eppelborn
Tel.: +49 6806/980-0
Fax: +49 6806/980-999

Internet:

<https://www.siebert-group.com/en/>

Detailed information is available from the manufacturer.

Technical specifications

SIWAREX FTC	
Use in automation systems	
S7-300	Directly or via ET 200M
S7-1500	Through ET 200M
S7-400 (H)	Through ET 200M
PCS 7 (H)	Through ET 200M
Communication interfaces	
S7	Through backplane bus
RS 232	For SIWATOOL or printer connection
RS 485	For remote display or digital load cell
Module parameterization	
	Using SIMATIC S7
	Using SIWATOOL FTC software (RS 232)
Measuring properties	
Accuracy according to EN 45501	$3 \times 6\,000 d \geq 0.5 \mu\text{V/e}$
Internal resolution	+/- 8 million parts
Internal/external updating rate	400/100 Hz
Several parameterizable digital filters	Critically damped, Bessel, Butterworth (0.05 ... 20 Hz), mean-value filter
Weighing functions	<ul style="list-style-type: none"> • Non automatic weighing instrument, force measurement • Belt scale • Loss-in-weight scale • Solids flowmeters
Load cells	Strain gauges in 4-wire or 6-wire system
3 characteristic value ranges	1, 2 or 4 mV/V
Load cell powering	
Supply voltage U_s (rated value)	10.3 V DC
Max. supply current	184 mA
Permissible load cell resistance	
• $R_{L\min}$	> 56 Ω
	> 87 Ω with Ex interface
• $R_{L\max}$	$\leq 4\,010 \Omega$

SIWAREX FTC	
Max. distance of load cells	
When using the recommended cable:	
Standard	1 000 m (3 280 ft)
In hazardous area ¹⁾	
• For gases of group IIC	300 m (984 ft)
• For gases of group IIB	1 000 m (3 280 ft)
Connection to load cells in Ex zone 1	Optionally via SIWAREX IS Ex interface
Ex approvals zone 2 and safety	ATEX 95, FM, cUL _{US} Haz. Loc.
Auxiliary power supply	
Rated voltage	24 V DC
Max. power consumption	500 mA
Current consumption on backplane bus	Typ. 55 mA
Inputs/outputs	
Digital inputs	7, electrically isolated
Digital outputs	8, electrically isolated
Counter input	Up to 10 kHz
Analog output	
• Current range	0/4 ... 20 mA
• Updating rate	100 Hz
Degree of protection according to EN 60529; IEC 60529	IP20
Climatic requirements	
T_{\min} (IND) ... T_{\max} (IND) (operating temperature)	
• Horizontal installation	-10 ... 60 °C (14 ... 140 °F)
• Vertical installation	-10 ... 40 °C (14 ... 104 °F)
EMC requirements	EN 61326, EN 45501, NAMUR NE21, Part 1
Dimensions	80 × 125 × 130 mm (3.15 × 4.92 × 5.12 inch)
Weight	600 g (0.44 lb)

¹⁾ For further details, see Ex interface, type SIWAREX IS.

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 function modules

SIPLUS S7-300 FM 350-1

Overview



- Single-channel, intelligent counter module for simple counting tasks
- For direct connection of incremental encoders
- Comparison function with 2 definable comparison values
- Integrated digital outputs for output of the response on reaching the comparison value
- Operating modes:
 - Continuous counting
 - Single counting
 - Periodic counting
- Special functions:
 - Set counter
 - Latch counter
- Start/stop counter by gate function

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

Article No.

SIPLUS S7-300 FM 350-1 counter module

With 1 channel, max. 500 kHz;
for incremental encoder

*For industrial applications with
extended ambient conditions*

Extended temperature range and
exposure to environmental
substances

6AG1350-1AH03-2AE0

Accessories

Mandatory

Front connector

20-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BJ00-0AA0
6ES7392-1BJ00-1AB0

Consumables

Bus connectors

1 unit (spare part)

6ES7390-0AA00-0AA0

Shield connection element

80 mm wide, with 2 rows for 4 shield
connection clamps each

6ES7390-5AA00-0AA0

Shield connection clamps

2 units

For 1 cable with 3 mm to 8 mm
diameter

6ES7390-5BA00-0AA0

For 1 cable with 4 mm to 13 mm
diameter

6ES7390-5CA00-0AA0

Label cover

10 units (spare part), for modules
with 20-pin front connector

6ES7392-2XY00-0AA0

Labeling strips

10 units (spare part), for modules
with 20-pin front connector

6ES7392-2XX00-0AA0

Slot number plates

Documentation

SIMATIC Manual Collection

Electronic manuals on DVD,
multi-language:
All manuals for
S7-1200/1500/200/300/400, LOGO!,
SIMATIC DP, PC, PG, STEP 7,
Engineering SW, Runtime SW,
SIMATIC HMI, SIMATIC NET,
SIMATIC IDENT

6ES7912-0AA00-0AA0

6ES7998-8XC01-8YE0

SIMATIC Manual Collection update service for 1 year

Current Manual Collection DVD and
the three subsequent updates

6ES7998-8XC01-8YE2

Technical specifications

Article number	6AG1350-1AH03-2AE0
Based on	6ES7350-1AH03-0AE0 SIPLUS S7-300 FM 350-1
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C; = Tmin
• max.	60 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *

Article number	6AG1350-1AH03-2AE0
Based on	6ES7350-1AH03-0AE0 SIPLUS S7-300 FM 350-1
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 function modules

SIPLUS S7-300 FM 350-2

Overview



- 8-channel intelligent counter module for universal counting and measuring tasks
- For the direct connection of 24 V incremental encoders, directional encoders, initiators or NAMUR encoders
- Comparison function with predefined comparison values (number depending on operating mode)
- Integrated digital outputs for output of the response on reaching the comparison value
- Operating modes:
 - Continuous / single / periodic counting
 - Frequency and speed control
 - Period measurement
 - Dosing

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

Article No.

SIPLUS S7-300 FM 350-2 counter module

With 8 channels, max. 20 kHz; for 24 V incremental encoders and NAMUR encoders; includes configuration package and electronic documentation on CD

Exposure to environmental substances

6AG1350-2AH01-4AE0

Accessories

Mandatory

Front connector

40-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BM01-0AA0
6ES7392-1BM01-1AB0

Consumables

Bus connectors

1 unit (spare part)

6ES7390-0AA00-0AA0

Shield connection clamps

2 units

For 2 cables with 2 mm to 6 mm diameter

6ES7390-5AB00-0AA0

For 1 cable with 3 mm to 8 mm diameter

6ES7390-5BA00-0AA0

For 1 cable with 4 mm to 13 mm diameter

6ES7390-5CA00-0AA0

Article No.

Label cover

10 units (spare part), for modules with 40-pin front connector

6ES7392-2XY10-0AA0

Labeling strips

10 units (spare part), for modules with 40-pin front connector

6ES7392-2XX10-0AA0

Slot number plates

6ES7912-0AA00-0AA0

Documentation

SIMATIC Manual Collection

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

SIMATIC Manual Collection update service for 1 year

Current Manual Collection DVD and the three subsequent updates

6ES7998-8XC01-8YE2

Technical specifications

Article number	6AG1350-2AH01-4AE0
Based on	6ES7350-2AH01-0AE0 SIPLUS S7-300 FM 350-2
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C; = Tmin
• max.	60 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *

Article number	6AG1350-2AH01-4AE0
Based on	6ES7350-2AH01-0AE0 SIPLUS S7-300 FM 350-2
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 function modules

SIPLUS SIWAREX U

Overview



SIPLUS SIWAREX U electronic weighing system

SIPLUS SIWAREX U is a flexible weighing module for all simple weighing and force measuring tasks. The compact module can be integrated into SIPLUS automation systems without any problems.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

SIPLUS SIWAREX U electronic weighing system

Article No.	6AG1 950-2AA01-4AA0
Article No. based on	7MH4 950-2AA01
Range of ambient temperature	0 ... +60 °C
Conformal coating	Coating of the printed-circuit boards and the electronic components
Technical data	The technical data of the standard product applies except for the ambient conditions.
Ambient conditions	
Relative humidity	100%, condensation/frost permissible. No commissioning in bedewed state.

For technical documentation on SIPLUS, see:

<http://www.siemens.com/siplus-extreme>

Ordering data

SIPLUS SIWAREX U

Weighing electronics system for SIPLUS S7 and ET 200M, incl. bus connector

Exposure to environmental substances

6AG1950-2AA01-4AA0

Accessories

Mandatory

Front connectors

20-pin, with spring-loaded contacts

- 1 unit
- 100 units

6ES7392-1BJ00-0AA0
6ES7392-1BJ00-1AB0

Consumables

Bus connectors

1 unit (spare part)

6ES7390-0AA00-0AA0

Shield connection clamps

2 units

For 2 cables with 2 mm to 6 mm diameter

6ES7390-5AB00-0AA0

For 1 cable with 3 mm to 8 mm diameter

6ES7390-5BA00-0AA0

For 1 cable with 4 mm to 13 mm diameter

6ES7390-5CA00-0AA0

Labeling strips

10 units (spare part)

6ES7392-2XX00-0AA0

Label cover

10 units (spare part)

6ES7392-2XY00-0AA0

Slot number plates

6ES7912-0AA00-0AA0

SIWAREX JB junction box, aluminum casing

For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes

7MH5001-0AA20

SIWAREX JB junction box, stainless steel enclosure

For connecting up to 4 load cells in parallel

7MH5001-0AA00

SIWAREX JB junction box, stainless steel enclosure (ATEX)

For connecting up to 4 load cells in parallel (for zone allocation, see manual or prototype test certificate).

7MH5001-0AA01

Ex interface, type SIWAREX IS

With ATEX approval, but without UL and FM approvals, for intrinsically safe connection of load cells

Incl. Equipment Manual

Suitable for SIWAREX U, CS, MS, FTA, FTC and CF weighing modules

Approved for use in the EU

- With short-circuit current < 199 mA DC
- With short-circuit current < 137 mA DC

7MH4710-5BA

7MH4710-5CA

Ordering data	Article No.	Article No.
Cables (optional)		
Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) – CY, orange sheath For connecting SIWAREX U, CS, MS, FTA, FTC and CF to the junction box (JB), extension box (EB) or Ex interface (Ex-I) or between two JB's; for fixed laying, occasional bending permitted, 10.8 mm (0.43 inch) outer diameter, for ambient temperature -40 ... +80 °C (-40 ... +176 °F)	7MH4702-8AG	<i>Configuration software</i> SIWATOOL V4 & V7 Service and commissioning software for SIWAREX weighing modules 7MH4900-1AK01
Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) – CY, blue sheath For connecting the junction box (JB) or extension box (EB) in a potentially explosive atmosphere to the Ex interface (Ex I), for fixed laying, occasional bending permitted, blue PVC insulating sleeve, approx. 10.8 mm (0.43 inch) outer diameter, for ambient temperature -40 ... +80 °C (-40 ... +176 °F)	7MH4702-8AF	SIWAREX U configuration package for PCS 7, Version 8.0 Suitable for 7MH4950-xAA01 • Function block for the CFC chart • Faceplate • Manual 7MH4950-3AK62
		SIWAREX PCS 7 AddOn Library for PCS 7 V8.x and V9.0 • Supports PROFINET • APL faceplates and function blocks for: - SIWAREX U - SIWAREX FTA - SIWAREX FTC_B (belt scales) - SIWAREX WP321 • Classic faceplate and function block for: - SIWAREX FTC_L (loss-in-weight) 7MH4900-1AK61
		<i>Documentation</i> SIMATIC Manual Collection Electronic manuals on DVD, multilingual: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT 6ES7998-8XC01-8YE0
		SIMATIC Manual Collection update service for 1 year Current Manual Collection DVD and the three subsequent updates 6ES7998-8XC01-8YE2

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 function modules

SIPLUS SIWAREX FTA

Overview



SIPLUS SIWAREX FTA (Flexible Technology, Automatic Weighing Instrument) is a versatile and flexible weighing module for industrial use. It can be used in both non-automatic and automatic weighing operation, for example the production of mixtures, and for filling, loading, monitoring and bag filling.

It has the corresponding scale approvals and is also suitable for legal-for-trade weighing systems.

The SIPLUS SIWAREX FTA function module is integrated in SIMATIC S7/PCS7 and uses the features of this modern automation system, such as integrated communication, diagnostics and configuration tools.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme specific information has been added.

SIPLUS SIWAREX FTA	
Article No.	6AG1900-2AA01-4AA0
Article No. based on	7MH4900-2AA01
Ambient temperature range	-25 ... +70 °C
Conformal coating	Coating of the printed circuit boards and the electronic components
Technical specifications	The technical specifications of the standard product apply, except for the ambient conditions.
Ambient conditions	
Relative humidity	100%, condensation/frost permissible. No commissioning under condensation conditions.
Biologically active substances, compliance with EN 60721-3-3	Class 3B2 mold, fungal and dry rot spores (excluding fauna). The supplied plug covers must remain in place over the unused interfaces during operation!
Chemically active substances, compliance with EN 60721-3-3	Class 3C4 incl. salt spray in accordance with EN60068-2-52 (degree of severity 3). The supplied plug covers must remain in place over the unused interfaces during operation!
Mechanically active substances, compliance with EN 60721-3-3	Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation!

Ordering data

SIPLUS SIWAREX FTA

Weighing electronics with official calibration capability for (automatic) scales for S7-300 and ET 200M EU type approval 3 x 6000 d
Application areas: Proportioning, filling, bagging, loading.
Notice: Observe approval conditions for applications requiring official calibration. We recommend using our calibration set and contacting our SIWAREX hotline.

Exposure to environmental substances

Accessories

Mandatory

MMC memory

For data recording up to 32 MB, only for R76, R51 and R107 applications with calibration capability

Front connector

40-pin

- With screw contacts
- With spring-loaded contacts

Article No.

6AG1900-2AA01-4AA0

7MH4900-2AY21

6ES7392-1AM00-0AA0
6ES7392-1BM01-1AB0

Article No.

Consumables

Bus connectors

1 unit (spare part)

Shield connection clamps

2 units; one shield connection clamp each is required for the weighing instrument connection, RS 485 interface and RS 232 interface

For 1 cable with 4 mm to 13 mm diameter

Shield connection element

Sufficient for one SIWAREX FTA module

SIWAREX JB junction box, aluminum casing

For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes

SIWAREX JB junction box, stainless steel enclosure

For connecting up to 4 load cells in parallel.

SIWAREX JB junction box, stainless steel enclosure (ATEX)

For parallel connection of up to 4 load cells (for zone allocation, see manual or special test certificate).

6ES7390-0AA00-0AA0

6ES7390-5CA00-0AA0

6ES7390-5AA00-0AA0

7MH5001-0AA20

7MH5001-0AA00

7MH5001-0AA01

Ordering data	Article No.	Article No.
<p>Ex interface, type SIWAREX IS</p> <p>For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of the load cells must be checked separately.</p> <ul style="list-style-type: none"> • With short-circuit current < 199 mA DC • With short-circuit current < 137 mA DC 	<p>7MH4710-5BA</p> <p>7MH4710-5CA</p>	<p>Calibration set for SIWAREX FTA</p> <p>For verification of up to 5 scales, comprising:</p> <ul style="list-style-type: none"> • 3 x inscription foil for labeling • 1 x protective film • Guidelines for verification, verification certificates and approvals, adaptable label, SIWAREX FTA Equipment Manual on CD-ROM
<p>Cables (optional)</p> <p>Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) – CY, orange sheath</p> <p>For connecting SIWAREX electronic weighing systems to junction boxes (JB), extension boxes (EB) and Ex interface or between two EBs. For permanent installation. Occasional bending is permitted.</p> <p>Outer diameter: approx. 10.8 mm (0.43 inch)</p> <p>Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F)</p> <p>Sold by the meter</p> <p>Sheath color: orange</p> <p>For hazardous areas. Sheath color: blue</p>	<p>7MH4702-8AG</p> <p>7MH4702-8AF</p>	<p>SIWATOOL connection cable</p> <p>From SIWAREX FTA with serial PC interface, for 9-pin PC interfaces (RS 232)</p> <ul style="list-style-type: none"> • Length 2 m (6.56 ft) • Length 5 m (16.40 ft) <p><i>Documentation</i></p> <p>SIWAREX FTA Equipment Manual</p> <p>Available in a range of languages</p> <p>Free download from the Internet at: http://www.siemens.com/weighing/documentation</p> <p>SIWAREX FTA "Getting started"</p> <p>Sample software shows beginners how to program the scales in STEP 7.</p> <p>Free download on the Internet at: http://www.siemens.com/weighing/documentation</p>
<p><i>Configuration software</i></p> <p>SIWATOOL V4 & V7</p> <p>Service and commissioning software for SIWAREX weighing modules</p>	<p>7MH4900-1AK01</p>	<p>SIMATIC Manual Collection</p> <p>Electronic manuals on DVD, multi-language:</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>
<p>SIWAREX PCS 7 AddOn Library for PCS 7 V8.x and V9.0</p> <ul style="list-style-type: none"> • Supports PROFINET <p>APL faceplates and function blocks for:</p> <ul style="list-style-type: none"> • SIWAREX U • SIWAREX FTA • SIWAREX FTC_B (belt scales) • SIWAREX WP321 <p>Classic faceplate and function block for:</p> <ul style="list-style-type: none"> • SIWAREX FTC_L (loss in weight) 	<p>7MH4900-1AK61</p>	<p>SIMATIC Manual Collection update service for 1 year</p> <p>Current Manual Collection DVD and the three subsequent updates</p>

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CP 340

Overview



- The economical complete solution for serial communication via point-to-point links.
- 3 versions with different transmission interfaces:
 - RS 232C (V.24)
 - 20 mA (TTY)
 - RS 422/RS 485 (X.27)
- Implemented protocols:
 - ASCII
 - 3964 (R) (not for RS 485)
 - Printer driver
- Simple parameterization via a parameterization tool integrated into STEP 7

Ordering data

Article No.

SIMATIC S7-300, CP 340 communications processor With RS232C interface (V.24) incl. configuration package on CD	6ES7340-1AH02-0AE0
RS 232 connecting cable SIMATIC S7/M7, cable For point-to-point connections RS-232C-RS232C, 9-pin D-sub socket respectively 5 m long	6ES7902-1AB00-0AA0
SIMATIC S7/M7, cable For point-to-point connections RS-232C-RS232C, 9-pin D-sub socket respectively 10 m long	6ES7902-1AC00-0AA0
SIMATIC S7/M7, cable For point-to-point connections RS-232C-RS-232C, 9-pin D-sub socket respectively 15 m long	6ES7902-1AD00-0AA0
SIMATIC S7-300, CP 340 communications processor With 20 mA interface (TTY) incl. configuration package on CD	6ES7340-1BH02-0AE0
20 mA (TTY) connecting cable SIMATIC S7/M7, cable For point-to-point connections TTY-TTY, 9-pole D-sub pins respectively 5 m long	6ES7902-2AB00-0AA0
SIMATIC S7/M7, cable For point-to-point connections TTY-TTY, 9-pole D-sub pins respectively 10 m long	6ES7902-2AC00-0AA0
SIMATIC S7/M7, cable For point-to-point connections TTY-TTY, 9-pole D-sub pins respectively 50 m long	6ES7902-2AG00-0AA0
SIMATIC S7-300, CP 340 communications processor With RS-422/485 interface incl. configuration package on CD	6ES7340-1CH02-0AE0
RS 422/485 connecting cable SIMATIC S7/M7, cable For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 5 m long	6ES7902-3AB00-0AA0
SIMATIC S7/M7, cable For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 10 m long	6ES7902-3AC00-0AA0
SIMATIC S7/M7, cable For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 50 m long	6ES7902-3AG00-0AA0

Technical specifications

Article number	6ES7340-1AH02-0AE0 CP340 w. RS232C interface (V.24)	6ES7340-1BH02-0AE0 CP340 w. 20MA interface (TTY)	6ES7340-1CH02-0AE0 CP340 w. RS422/485 interface
General information			
Product type designation	CP 340	CP 340	CP 340
Supply voltage			
Rated value (DC)			
• 24 V DC	No; Power supply via backplane bus 5V	No; Power supply via backplane bus 5V	No; Power supply via backplane bus 5V
Input current			
from backplane bus 5 V DC, max.	165 mA	190 mA	165 mA
Power loss			
Power loss, typ.	0.6 W	0.85 W	0.6 W
Interfaces			
Interfaces/bus type	RS 232C (V.24)	20 mA (TTY)	RS 422 / 485 (X.27)
Number of interfaces	1; Isolated	1; Isolated	1; Isolated
Transmission rate, min.	2.4 kbit/s	2.4 kbit/s	2.4 kbit/s
Transmission rate, max.	19.2 kbit/s	19.2 kbit/s	19.2 kbit/s
Point-to-point connection			
• Cable length, max.	15 m	1 000 m; 100 m active, 1 000 m passive	1 200 m
• supported printers	HP-Deskjet, HP-Laserjet, IBM-Proprinter, user-defined	HP-Deskjet, HP-Laserjet, IBM-Proprinter, user-defined	HP-Deskjet, HP-Laserjet, IBM-Proprinter, user-defined
• Connector type	9-pin sub D connector	9-pin sub D socket	15-pin sub D socket
Integrated protocol driver			
- 3964 (R)	Yes	Yes	Yes
- ASCII	Yes	Yes	Yes
- RK 512	No	No	No
- customer-specific drivers reloadable	No	No	No
Telegram length, max.			
- 3964 (R)	1 024 byte	1 024 byte	1 024 byte
- ASCII	1 024 byte	1 024 byte	1 024 byte
Transmission rate, 20 mA (TTY)			
- with 3964 (R) protocol, max.		19.2 kbit/s	
- with ASCII protocol, max.		9.6 kbit/s	
- with printer driver, max.		9.6 kbit/s	
Transmission rate, RS 422/485			
- with 3964 (R) protocol, max.			19.2 kbit/s
- with ASCII protocol, max.			9.6 kbit/s
- with printer driver, max.			9.6 kbit/s
Transmission speed, RS 232			
- with 3964 (R) protocol, max.	19.2 kbit/s		
- with ASCII protocol, max.	9.6 kbit/s		
- with printer driver, max.	9.6 kbit/s		
Ambient conditions			
Ambient temperature during operation			
• min.	0 °C	0 °C	0 °C
• max.	60 °C	60 °C	60 °C
Ambient temperature during storage/transportation			
• min.	-40 °C	-40 °C	-40 °C
• max.	70 °C	70 °C	70 °C
Software			
Block			
• FB length in RAM, max.	2 700 byte; Data communication, sending and receiving	2 700 byte; Data communication, sending and receiving	2 700 byte; Data communication, sending and receiving
connection method			
Design of electrical connection for supply voltage	Over backplane bus	Over backplane bus	Over backplane bus
Dimensions			
Width	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm
Depth	120 mm	120 mm	120 mm
Weights			
Weight, approx.	300 g	300 g	300 g

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CP 341

Overview



- For quick, high-performance serial data exchange via point-to-point coupling
- 3 versions with different transmission physics:
 - RS 232C (V.24),
 - 20 mA (TTY),
 - RS 422/RS 485 (X.27)
- Implemented protocols: ASCII, 3964 (R), RK 512
- The following protocols can also be loaded: Modbus RTU
- Simple parameter assignment using tool integrated in STEP 7

Ordering data

Ordering data	Article No.
SIMATIC S7-300, CP 341 communications processor With RS-232C interface (V.24) incl. configuration package on CD	6ES7341-1AH02-0AE0
RS 232 connecting cable	
SIMATIC S7/M7, cable For point-to-point connections RS-232C-RS232C, 9-pin D-sub socket respectively 5 m long	6ES7902-1AB00-0AA0
SIMATIC S7/M7, cable For point-to-point connections RS-232C-RS232C, 9-pin D-sub socket respectively 10 m long	6ES7902-1AC00-0AA0
SIMATIC S7/M7, cable For point-to-point connections RS-232C-RS-232C, 9-pin D-sub socket respectively 15 m long	6ES7902-1AD00-0AA0
SIMATIC S7-300, CP 341 communications processor With 20 mA interface (TTY) incl. configuration package on CD	6ES7341-1BH02-0AE0

Ordering data

Article No.

20 mA (TTY) connecting cable	
SIMATIC S7/M7, cable For point-to-point connections TTY-TTY, 9-pole D-sub pins respectively 5 m long	6ES7902-2AB00-0AA0
SIMATIC S7/M7, cable For point-to-point connections TTY-TTY, 9-pole D-sub pins respectively 10 m long	6ES7902-2AC00-0AA0
SIMATIC S7/M7, cable For point-to-point connections TTY-TTY, 9-pole D-sub pins respectively 50 m long	6ES7902-2AG00-0AA0
SIMATIC S7-300, CP 341 communications processor With RS-422/485 interface incl. configuration package on CD	6ES7341-1CH02-0AE0
RS 422/485 connecting cable	
SIMATIC S7/M7, cable For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 5 m long	6ES7902-3AB00-0AA0
SIMATIC S7/M7, cable For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 10 m long	6ES7902-3AC00-0AA0
SIMATIC S7/M7, cable For point-to-point connections RS-422-RS-422, 15-pole D-sub pins respectively 50 m long	6ES7902-3AG00-0AA0
Loadable drivers for CP 341	
SIMATIC S7, MODBUS Master V3.1 single license For 1 installation Runtime software, software and documentation on CD, hardware dongle, class A, 3 languages (en, de, fr), executable and STEP 7 from V4.02, reference hardware: CP 341 and CP 441-2	6ES7870-1AA01-0YA0
SIMATIC S7, MODBUS Master V3.1 single license For 1 installation Runtime software, without software and without documentation, hardware dongle, class A, 3 languages (en, de, fr), executable and STEP 7 from V4.02, reference hardware: CP 341 and CP 441-2	6ES7870-1AA01-0YA1
Modbus device (RTU format)	
SIMATIC S7, MODBUS device V3.1 single license For 1 installation Runtime software, software and documentation on CD, hardware dongle, class A, 3 languages (en, de, fr), executable and STEP 7 from V4.02, reference hardware: CP 341 and CP 441-2	6ES7870-1AB01-0YA0
SIMATIC S7, MODBUS device V3.1 single license For 1 installation Runtime software, without software and without documentation, hardware dongle, class A, 3 languages (en, de, fr), executable and STEP 7 from V4.02, reference hardware: CP 341 and CP 441-2	6ES7870-1AB01-0YA1

Technical specifications

Article number	6ES7341-1AH02-0AE0 CP 341 RS232C (V.24)	6ES7341-1BH02-0AE0 CP341 20mA-Interface (TTY)	6ES7341-1CH02-0AE0 CP341 RS422/485-Interface
General information			
Product type designation	CP 341	CP 341	CP 341
Supply voltage			
Rated value (DC)			
• 24 V DC	Yes	Yes	Yes
Input current			
from supply voltage L+, max.	100 mA	100 mA	100 mA
from backplane bus 5 V DC, max.	70 mA	70 mA	70 mA
Power loss			
Power loss, typ.	1.6 W	1.6 W	1.6 W
Interfaces			
Interfaces/bus type	RS 232C (V.24)	20 mA (TTY)	RS 422 / 485 (X.27)
Number of interfaces	1; Isolated	1; Isolated	1; Isolated
Transmission rate, min.	0.3 kbit/s	0.3 kbit/s	0.3 kbit/s
Transmission rate, max.	115.2 kbit/s	19.2 kbit/s	115.2 kbit/s
Point-to-point connection			
• Cable length, max.	15 m	1 000 m	1 200 m
• supported printers	Serial printers	Serial printers	Serial printers
• Connector type	9-pin sub D connector	9-pin sub D socket	15-pin sub D socket
Integrated protocol driver			
- 3964 (R)	Yes	Yes	Yes; not with RS 485
- ASCII	Yes	Yes	Yes
- RK 512	Yes	Yes	Yes; not with RS 485
Telegram length, max.			
- 3964 (R)	4 096 byte	4 096 byte	4 096 byte
- ASCII	4 096 byte	4 096 byte	4 096 byte
- RK 512	4 096 byte	4 096 byte	4 096 byte
Transmission rate, 20 mA (TTY)			
- with 3964 (R) protocol, max.		19.2 kbit/s	
- with ASCII protocol, max.		19.2 kbit/s	
- with printer driver, max.		19.2 kbit/s	
- with RK 512 protocol, max.		19.2 kbit/s	
Transmission rate, RS 422/485			
- with 3964 (R) protocol, max.			115.2 kbit/s
- with ASCII protocol, max.			115.2 kbit/s
- with printer driver, max.			115.2 kbit/s
- with RK 512 protocol, max.			115.2 kbit/s
Transmission speed, RS 232			
- with 3964 (R) protocol, max.	115.2 kbit/s		
- with ASCII protocol, max.	115.2 kbit/s		
- with printer driver, max.	115.2 kbit/s		
- with RK 512 protocol, max.	115.2 kbit/s		

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CP 341**Technical specifications**

Article number	6ES7341-1AH02-0AE0 CP 341 RS232C (V.24)	6ES7341-1BH02-0AE0 CP341 20mA-Interface (TTY)	6ES7341-1CH02-0AE0 CP341 RS422/485-Interface
Ambient conditions			
Ambient temperature during operation			
• min.	0 °C	0 °C	0 °C
• max.	60 °C	60 °C	60 °C
Ambient temperature during storage/transportation			
• min.	-40 °C	-40 °C	-40 °C
• max.	70 °C	70 °C	70 °C
Software			
Block			
• FB length in RAM, max.	6 100 byte; Data communication, sending and receiving	6 100 byte; Data communication, sending and receiving	6 100 byte; Data communication, sending and receiving
connection method			
Design of electrical connection for supply voltage	3 screw-type terminals: L+, M, GND	3 screw-type terminals: L+, M, GND	3 screw-type terminals: L+, M, GND
Dimensions			
Width	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm
Depth	120 mm	120 mm	120 mm
Weights			
Weight, approx.	300 g	300 g	300 g

5

Overview

- Drivers for Modbus protocol with RTU message format; communication as master or slave
- Downloadable onto CP 341 and CP 441-2 (6ES7 441-2AA05-0AE0)

Ordering data	Article No.	Ordering data	Article No.
Modbus Master V3.1 Task: Communication via Modbus protocol with RTU format, SIMATIC S7 as master Requirement: CP 341 or CP 441-2; STEP 7 V4.02 and higher Type of delivery: Driver program/documentation, English, German, French		SIMATIC S7, MODBUS device V3.1 single license For 1 installation Runtime software, software and documentation on CD, hardware dongle, class A, 3 languages (en, de, fr), executable and STEP 7 from V4.02, reference hardware: CP 341 and CP 441-2	6ES7870-1AB01-0YA0
SIMATIC S7, MODBUS Master V3.1 single license For 1 installation Runtime software, software and documentation on CD, hardware dongle, class A, 3 languages (en, de, fr), executable and STEP 7 from V4.02, reference hardware: CP 341 and CP 441-2	6ES7870-1AA01-0YA0	SIMATIC S7, MODBUS device V3.1 single license For 1 installation Runtime software, without software and without documentation, hardware dongle, class A, 3 languages (en, de, fr), executable and STEP 7 from V4.02, reference hardware: CP 341 and CP 441-2	6ES7870-1AB01-0YA1
SIMATIC S7, MODBUS Master V3.1 single license For 1 installation Runtime software, without software and without documentation, hardware dongle, class A, 3 languages (en, de, fr), executable and STEP 7 from V4.02, reference hardware: CP 341 and CP 441-2	6ES7870-1AA01-0YA1	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
Modbus device V3.1 Task: Communication via Modbus protocol with RTU format, SIMATIC S7 as device Requirement: CP 341 or CP 441-2; STEP 7 V4.02 and higher Type of delivery: Driver program/documentation, English, German, French		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

Loadable drivers for CP 441-2 and CP 341

Technical specifications

Parameterization software	Loadable drivers for CP 441-2 and CP 341
Type of license	Simple license, copy license
Target system	SIMATIC CP 341, SIMATIC CP 441-2
Technical specifications	Modbus Master <ul style="list-style-type: none"> • Modbus protocol with RTU format • Master/slave coupling: SIMATIC S7 is master • Function codes implemented: 01, 02, 03, 04, 05, 06, 07, 08, 11, 12, 15, 16 • No V.24 control and signal lines • CRC polynomial: $x^{16} + x^{15} + x^2 + 1$ • Interfaces: TTY (20 mA); V.24 (RS 232 C); X.27 (RS 422/485) 2-wire or 4-wire • Receive mailbox specified on BRCV • Character delay time 3.5 characters or multiple thereof • Broadcast message possible • Transmission rate 300 bit/s up to 76800 bit/s (TTY up to 19200 bit/s) • Character frame • With/without RS 485 operation for 2-wire connections • With/without modem operation (ignore smudge characters) • Response monitoring time 100 ms to 25.5 s in steps of 100 ms • Factor for the character delay time 1-10 • Default setting of receive line when using the X.27 interface module

Adjustable parameters

Adjustable parameters

Modbus slave
<ul style="list-style-type: none"> • Modbus protocol with RTU format • Master/slave coupling: SIMATIC S7 is slave • Function codes implemented: 01, 02, 03, 04, 05, 06, 08, 15, 16 • No V.24 control and signal line • CRC polynomial: $x^{16} + x^{15} + x^2 + 1$ • Interfaces: TTY (20 mA), V.24 (RS 232C), X.27 (RS 422/485) 2-wire or 4-wire • Communications FB 180, instance DB 180 (use of a multi-instance) • Conversion of the Modbus data address to S7 data areas. Data areas which can be processed: DB, bit memories, outputs, inputs, timers, counters • Character delay time 3.5 characters or multiple thereof • Transmission rate 300 bit/s up to 76800 bit/s (TTY up to 19200 bit/s) • Character frame • Slave address of CP (1 to 255) • With/without RS 485 operation for 2-wire connection • With/without modem operation (ignore smudge characters) • Factor for the character delay time 1-10 • Number of work DB (for FB processing) • Enabling of memory areas for writing by the master • Default setting of receive line when using the X.27 interface module • Conversion of Modbus addresses to S7 data areas

Overview



CP 343-2P/CP 343-2

More information

Manual for CP 343-2P/CP 343-2
see <https://support.industry.siemens.com/cs/ww/en/view/5581657>

For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser, see <https://support.industry.siemens.com/cs/ww/en/view/61892138>

AS-Interface block library for SIMATIC PCS 7 for easy connection of AS-Interface to PCS 7, see <https://support.industry.siemens.com/cs/ww/en/view/109759605>

AS-Interface I/O modules and other AS-Interface system components see Catalog IC 10 <https://www.siemens.com/ic10>

More information see <https://www.siemens.com/as-interface>

The CP 343-2P communications processor is the AS-Interface master for the SIMATIC S7-300 and the ET 200M distributed I/O station, with user-friendly parameterizing options.

The CP 343-2 is the basic version of the module.

The CP 343-2P/CP 343-2 has the following characteristics:

- Connection of up to 62 AS-Interface slaves
- Integrated analog value transmission
- Supports all AS-Interface master functions according to the AS-Interface specification V3.0
- Status displays of operating states and indication of the readiness for operation of connected slaves by means of LEDs in the front panel
- Fault indications (including AS-Interface voltage errors, configuration errors) by means of LEDs on the front plate.
- Compact enclosure in the design of the SIMATIC S7-300
- Suitable for AS-Interface with 30 V voltage and AS-i Power24V
- Additionally for CP 343-2P: Supports the configuration of the AS-Interface network with STEP 7

Design

The CP 343-2P/CP 343-2 is connected like an I/O module to the S7-300. It has:

- Two terminal connections for connecting the AS-Interface cable directly.
- LEDs in the front panel for indicating the operating state and the readiness for operation of all connected and activated slaves
- Pushbuttons for switching over the master operating state and for adopting the existing ACTUAL configuration of the AS-i slave as the TARGET configuration

Function

The CP 343-2P/CP 343-2 support all specified functions of the AS-Interface specification V3.0.

The CP 343-2P/CP 343-2 each occupy 16 bytes in the I/O address area of the SIMATIC S7-300. The digital I/O data of the standard slaves and A slaves is saved in this area. The digital I/O data of the B slaves and the analog I/O data can be accessed with the S7 system functions for read/write data records.

If required, master calls can be performed with the command interface, e.g. read/write parameters, read/write configuration.

For more information, see <https://support.industry.siemens.com/cs/ww/en/view/51678777>.

Notes on security:

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens products and solutions represent one component of such a concept.

For more information about the subject of industrial cybersecurity, see <https://www.siemens.com/cybersecurity-industry>.

Configuration

All connected AS-Interface slaves are configured at the press of a button. No further configuration of the CP is required.

Additionally for CP 343-2P

The CP 343-2P also supports configuring of the AS-Interface network with STEP 7. Specifying the AS-i configuration in HW-Config facilitates the setting of slave parameters and documentation of the plant. Uploading the ACTUAL configuration of an already configured AS-Interface network is also supported. The saved configuration cannot be overwritten at the press of a button and is therefore tamper-proof.

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CP 343-2P/CP 343-2

Benefits

- Shorter start-up times through simple configuration at the press of a button
- Design of flexible machine-related structures using the ET 200M distributed I/O system
- Enables diagnostics of the AS-Interface network
- Well suited also for complex applications thanks to connection options for 62 slaves and integral analog value processing
- Reduction of standstill and servicing times in the event of a fault thanks to the LED indicators:
 - Status of the AS-Interface network
 - Slaves connected and their readiness for operation
 - Monitoring of the AS-Interface voltage
- Lower costs for stock keeping and spare parts inventory because the CP can be used for the SIMATIC S7-300 and also for the ET 200M
- Additionally for CP 343-2P: Improved plant documentation and support for service assignments thanks to a description of the AS-Interface configuration in the STEP 7 project
- Simple operation with AS-Interface power supply unit (see <https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/8200165?tree=CatalogTree>) possible without restrictions
- Alternatively: No need for the AS-i power supply unit with AS-i Power24V. The AS-Interface cable is powered through an existing 24 V DC PELV power supply unit. An S22.5 AS-i data decoupling module (e.g. 3RK1901-1DE12-1AA0) is required for the decoupling, see <https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/10057533?tree=CatalogTree>.

Application

The CP 343-2P/CP 343-2 is the AS-Interface master connection for the SIMATIC S7-300 and the ET 200M.

Through connection to AS-Interface it is possible to access max. 248 DI/248 DQ per CP, using 62 A/B slaves with 4 DI/4 DQ each.

With the integrated analog value processing, it is easy to transmit analog signals. Up to 62 analog slaves with an A/B address (each with up to two channels) or up to 31 analog slaves with a standard address (each with up to four channels) are possible per CP.

The CP 343-2P is the further development of the CP 343-2 and contains its entire functionality. An existing STEP 7 user program for a CP 343-2 can thus be used without restrictions with a CP 343-2P. It is only in STEP 7 HW-Config that the two modules are configured differently, with the CP 343-2P offering additional options. This is why the CP 343-2P is recommended.

Ordering data

Article No.

CP 343-2P

communications processor

- Device version with expanded configuration options for connection of SIMATIC S7-300 and ET 200M to AS-Interface
- Configuration of the AS-i network using the SET key or STEP 7
- Without front connector
- Corresponds to AS-Interface specification V3.0
- Dimensions (W x H x D) mm: 40 x 125 x 120

6GK7343-2AH11-0XA0

CP 343-2

communications processor

- Basic version for connection of SIMATIC S7-300 and ET 200M to AS-Interface
- Configuration of the AS-i network using the SET key
- Without front connector
- Corresponds to AS-Interface specification V3.0
- Dimensions (W x H x D) mm: 40 x 125 x 120

6GK7343-2AH01-0XA0

Accessories

Front connector, 20-pin

- With screw terminals
- With spring-loaded terminals

6ES7392-1AJ00-0AA0

6ES7392-1BJ00-0AA0

AS-Interface addressing unit V3.0

- For AS-Interface modules and sensors and actuators with integrated AS-Interface according to AS-i specification V3.0
- For setting the AS-i address of standard slaves, and slaves with extended addressing mode (A/B slaves)
- With input/output test function and many other commissioning functions
- Battery operation with four type AA batteries (IEC LR6, NEDA 15)
- Degree of protection IP40
- Dimensions (W x H x D) mm: 84 x 195 x 35
- Scope of supply:
 - Addressing unit with four batteries
 - Addressing cable, with M12 plug to addressing plug (hollow plug), length 1.5 m

3RK1904-2AB02

Overview



DP-M	DP-S	FMS	PG/OP	S7/S5	
●	●		●	●	●

G...JK10...XX=10143

- PROFIBUS DP master or slave with electrical interface for connecting the SIMATIC S7-300 to PROFIBUS at up to 12 Mbps (including 45.45 Kbps)
- Communications services:
 - PROFIBUS DP
 - PG/OP communication (OP multiplexing)
 - S7 communication (client, server)
 - Open communication (SEND/RECEIVE)
- Easy configuration and programming over PROFIBUS
- Cross-network PG communication using S7 routing
- Modules can be replaced without the need for a PG

Ordering data

Article No.

CP 342-5 communications processor

6GK7342-5DA03-0XE0

Communications processor for electrical connection of SIMATIC S7-300 to PROFIBUS at up to 12 Mbps, with electronic manual on CD-ROM

Accessories**PROFIBUS FastConnect RS485 connection plug**

With 90° cable outlet; with insulation displacement terminals, max. transfer rate 12 Mbps

- Without programming device interface
- With programming device interface

6ES7972-0BA52-0XA0

6ES7972-0BB52-0XA0

PROFIBUS bus connector IP20

With connection to PPI, MPI, PROFIBUS

- Without programming device interface
- With programming device interface

6ES7972-0BA12-0XA0

6ES7972-0BB12-0XA0

PROFIBUS FC standard cable

2-core bus cable, shielded, special design for fast installation, sold by the meter; delivery unit: max. 1000 m, minimum order quantity 20 m

6XV1830-0EH10

PROFIBUS bus terminal 12M

Bus terminal for connection of PROFIBUS stations up to 12 Mbps with connecting cable

6GK1500-0AA10

SIMATIC S7-300 DM 370

6ES7370-0AA01-0AA0

Dummy module; used for module replacement

Technical specifications

Article number	6GK7342-5DA03-0XE0
product type designation	CP 342-5
transfer rate	
transfer rate	
• at the 1st interface according to PROFIBUS	9.6 kbit/s ... 12 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	0
number of electrical connections	
• at the 1st interface according to PROFIBUS	1
• for power supply	1
type of electrical connection	
• at the 1st interface according to PROFIBUS	9-pin Sub-D socket (RS485)
• for power supply	4-pole terminal block

Article number	6GK7342-5DA03-0XE0
product type designation	CP 342-5
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	5 V
supply voltage external	24 V
supply voltage external at DC rated value	24 V
relative positive tolerance at DC at 24 V	20 %
relative negative tolerance at DC at 24 V	15 %
consumed current	
• from backplane bus at DC at 5 V typical	0.15 A
• from external supply voltage at DC at 24 V typical	0.25 A
power loss [W]	6.75 W

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CP 342-5

Technical specifications

Article number	6GK7342-5DA03-0XE0
product type designation	CP 342-5
ambient conditions	
ambient temperature	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-300 single width
width	40 mm
height	125 mm
depth	120 mm
net weight	0.3 kg
product features, product functions, product components general	
number of units	
• per CPU maximum	4
performance data open communication	
number of possible connections for open communication by means of SEND/RECEIVE blocks maximum	16
data volume	
• as user data per connection for open communication by means of SEND/RECEIVE blocks maximum	240 byte
performance data PROFIBUS DP	
service as DP master	
• DPV0	Yes
number of DP slaves	
• on DP master operable	124
data volume	
• of the address range of the inputs as DP master total	2 160 byte
• of the address range of the outputs as DP master total	2 160 byte
• of the address range of the inputs per DP slave	244 byte
• of the address range of the outputs per DP slave	244 byte
• of the address range of the diagnostic data per DP slave	240 byte
service as DP slave	
• DPV0	Yes
data volume	
• of the address range of the inputs as DP slave total	240 byte
• of the address range of the outputs as DP slave total	240 byte

Article number	6GK7342-5DA03-0XE0
product type designation	CP 342-5
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	16
performance data multi-protocol mode	
number of active connections with multi-protocol mode	
• without DP maximum	32
• with DP maximum	28
performance data telecontrol	
protocol is supported	
• TCP/IP	No
product functions management, configuration, engineering	
configuration software	
• required	STEP 7 V5.1 SP2 or higher / STEP 7 Professional V12 (TIA Portal) or higher
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
• total	229.03 kg
• during manufacturing	17.48 kg
• during operation	211.2 kg
• after end of life	0.35 kg
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

5

Overview



DP-M	DP-S	FMS	PG/OP	S7/S5	
		●	●	●	●

G...JK10...XX...10146

Connection of SIMATIC S7-300 to PROFIBUS at up to 12 Mbps (including 45.45 Kbps)

- Communication services:
 - PG/OP communication
 - S7 communication
 - Open communication (SEND/RECEIVE)
 - PROFIBUS FMS
- Easy configuration and programming over PROFIBUS
- Can be easily integrated into the S7-300 system
- Cross-network PG communication using S7 routing
- Modules can be replaced without the need for a PG

Ordering data

Article No.

CP 343-5 communications processor

Communications processor for connection of S7-300 to PROFIBUS, FMS, open communication, PG/OP and S7 communication; with electronic manual on CD-ROM

6GK7343-5FA01-0XE0

Accessories**STEP 7 Version 5.7**

Target system:
SIMATIC S7-300/-400, SIMATIC C7
Requirement:
Windows 10 Professional/Enterprise
Windows Server 2016
Windows Server 2019

Type of delivery:
English, German, French,
Spanish, Italian;
incl. license key on USB flash drive,
with electronic documentation

- Floating license on DVD
- Floating license, download¹⁾; Software, license key and documentation as download; consignee email address required for delivery
- Rental license for 50 hours Software and documentation on DVD, license key on USB flash drive
- Rental license for 50 hours, download¹⁾; Software, license key and documentation as download; consignee email address required for delivery
- Upgrade floating license V5.3...5.6 to V5.7; on DVD
- Upgrade floating license V5.3...5.6 to V5.7, download¹⁾; Software, license key and documentation as download; consignee email address required for delivery
- STEP 7 V5.7 trial license; On DVD, operational for 21 days

6ES7810-4CC12-0YA5
6ES7810-4CE12-0YB5

6ES7810-4CC12-0YA6

6ES7810-4CE12-0YB6

6ES7810-4CC12-0YE5

6ES7810-4CE12-0YE5

6ES7810-4CC12-0YA7

PROFIBUS FastConnect RS485 bus connector

With 90° cable outlet; with insulation displacement terminals, max. transfer rate 12 Mbps (1 unit)

- Without programming device interface
- With programming device interface

6ES7972-0BA52-0XA0

6ES7972-0BB52-0XA0

PROFIBUS bus connector IP20

With connection to PPI, MPI, PROFIBUS

- Without programming device interface
- With programming device interface

6ES7972-0BA12-0XA0

6ES7972-0BB12-0XA0

PROFIBUS bus terminal 12M

6GK1500-0AA10

Bus terminal for connection of PROFIBUS stations up to 12 Mbps with connecting cable

SIMATIC S7-300 DM 370

6ES7370-0AA01-0AA0

Dummy module; used for module replacement

¹⁾ For up-to-date information and download availability, see: <https://www.siemens.com/tia-online-software-delivery>

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CP 343-5

Technical specifications

Article number	6GK7343-5FA01-0XE0
product type designation	CP 343-5
transfer rate	
transfer rate	
• at the 1st interface according to PROFIBUS	9.6 kbit/s ... 12 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	0
number of electrical connections	
• at the 1st interface according to PROFIBUS	1
• for power supply	1
type of electrical connection	
• at the 1st interface according to PROFIBUS	9-pin Sub-D socket (RS485)
• for power supply	4-pole terminal block
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	5 V
supply voltage	24 V
supply voltage external	24 V
supply voltage external at DC rated value	24 V
relative positive tolerance at DC at 24 V	20 %
relative negative tolerance at DC at 24 V	15 %
consumed current	
• from backplane bus at DC at 5 V typical	0.15 A
• from external supply voltage at DC at 24 V typical	0.25 A
power loss [W]	5 W
ambient conditions	
ambient temperature	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-300 single width
width	40 mm
height	125 mm
depth	120 mm
net weight	0.3 kg
fastening method	
• S7-300 rail mounting	Yes
product features, product functions, product components general	
number of units	
• per CPU maximum	4

Article number	6GK7343-5FA01-0XE0
product type designation	CP 343-5
performance data open communication	
number of possible connections for open communication by means of SEND/RECEIVE blocks maximum	16
data volume	
• as user data per connection for open communication by means of SEND/RECEIVE blocks maximum	240 byte
performance data FMS functions	
number of possible connections for FMS connection maximum	16
data volume of the variables	
• for READ job maximum	237 byte
• for WRITE and REPORT job maximum	233 byte
number of variables	
• configurable from server to FMS partner	256
• loadable from server to FMS partner	256
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	16
performance data multi-protocol mode	
number of active connections with multi-protocol mode	48
performance data telecontrol	
protocol is supported	
• TCP/IP	No
product functions management, configuration, engineering	
configuration software	
• required	STEP 7 V5.1 SP3 or higher and NCM S7 for PROFIBUS
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO ₂ eq]	
• total	229.03 kg
• during manufacturing	17.48 kg
• during operation	211.2 kg
• after end of life	0.35 kg
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

5

Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
	●	●	●			●	●

G. JK10...XX...10171

Communications processor for connecting a SIMATIC S7-300 to Industrial Ethernet networks, also as PROFINET IO Device.

The CP supports:

- PG/OP communication
- S7 communication
- Open communication (SEND/RECEIVE)
- PROFINET communication

Ordering data

Artikel-Nr.

CP 343-1 Lean communications processor**6GK7343-1CX10-0XE0**

For connecting SIMATIC S7-300 to Industrial Ethernet through TCP/IP and UDP, Multicast, S7 communication, open communication (SEND/RECEIVE), FETCH/WRITE, PROFINET IO Device, MRP, integrated 2-port switch ERTEC, comprehensive diagnostics facilities, module replacement without PG, SNMP, initial commissioning over LAN; with electronic manual on CD-ROM

Accessories**IE FC RJ45 plug 145**

RJ45 plug-in connector 2 x 2 for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 145° cable outlet

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB30-0AA0
6GK1901-1BB30-0AB0
6GK1901-1BB30-0AE0

IE FC TP standard cable GP 2 x 2 (type A)**6XV1840-2AH10**

4-core, shielded TP installation cable for connecting to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

IE FC stripping tool**6GK1901-1GA00**

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

CSM 377 compact switch module**6GK7377-1AA00-0AA0**

Unmanaged switch for connection of a SIMATIC S7-300 CPU, ET 200M, and up to three further nodes to Industrial Ethernet operating at 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, LED diagnostics, S7-300 module including electronic Equipment Manual on CD-ROM

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CP 343-1 Lean

Technical specifications

Article number	6GK7343-1CX10-0XE0
product type designation	CP 343-1 Lean
transfer rate	
transfer rate	
• at the 1st interface	10 ... 100 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	2
number of electrical connections	
• at the 1st interface according to Industrial Ethernet	2
• for power supply	1
type of electrical connection	
• of Industrial Ethernet interface	RJ45 port
• at the 1st interface according to Industrial Ethernet	RJ45 port
type of electrical connection	
• for power supply	2-pole plugable terminal block
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	5 V
supply voltage	24 V
supply voltage external	24 V
supply voltage external at DC rated value	24 V
relative positive tolerance at DC at 24 V	20 %
relative negative tolerance at DC at 24 V	15 %
consumed current	
• from backplane bus at DC at 5 V typical	0.2 A
• from external supply voltage at DC at 24 V typical	0.16 A
• from external supply voltage at DC at 24 V maximum	0.2 A
power loss [W]	5.8 W
ambient conditions	
ambient temperature	
• for vertical installation during operation	0 ... 40 °C
• for horizontally arranged busbars during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20

Article number	6GK7343-1CX10-0XE0
product type designation	CP 343-1 Lean
design, dimensions and weights	
module format	Compact module S7-300 single width
width	40 mm
height	125 mm
depth	120 mm
net weight	0.22 kg
fastening method	
• S7-300 rail mounting	Yes
performance data open communication	
number of possible connections for open communication by means of SEND/RECEIVE blocks maximum data volume	8
• as user data per ISO on TCP connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per TCP connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per UDP connection for open IE communication by means of SEND/RECEIVE blocks maximum	2 Kibyte
number of Multicast stations	8
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	4
service	
• of SIMATIC communication as server	Yes
performance data multi-protocol mode	
number of active connections with multi-protocol mode	12
performance data PROFINET communication as PN IO controller	
product function PROFINET IO controller	No

5

Technical specifications

Article number	6GK7343-1CX10-0XE0
product type designation	CP 343-1 Lean
performance data PROFINET communication as PN IO device	
product function PROFINET IO device	Yes
data volume	
• as user data for input variables as PROFINET IO device maximum	512 byte
• as user data for output variables as PROFINET IO device maximum	512 byte
• as user data for input variables for each sub-module as PROFINET IO device	240 byte
• as user data for output variables for each sub-module as PROFINET IO device	240 byte
• as user data for the consistency area for each sub-module	240 byte
number of submodules per PROFINET IO-Device	32
performance data telecontrol	
protocol is supported	
• TCP/IP	Yes
product functions management, configuration, engineering	
product function MIB support	Yes
protocol is supported	
• SNMP v1	Yes
• DCP	Yes
• LLDP	Yes
configuration software	
• required	STEP 7 V5.4 or higher / STEP 7 Professional V11 (TIA Portal) or higher
identification & maintenance function	
• I&MO - device-specific information	Yes
• I&M1 - higher level designation/location designation	Yes

Article number	6GK7343-1CX10-0XE0
product type designation	CP 343-1 Lean
product functions diagnostics	
product function web-based diagnostics	Yes
product functions switch	
product feature switch	Yes
product function	
• switch-managed	No
• with IRT PROFINET IO switch	No
• configuration with STEP 7	Yes
product functions redundancy	
product function	
• ring redundancy	Yes
• redundancy manager	No
protocol is supported Media Redundancy Protocol (MRP)	Yes
product functions security	
product function	
• password protection for Web applications	No
• ACL - IP-based	Yes
• ACL - IP-based for PLC/routing	No
• switch-off of non-required services	Yes
• blocking of communication via physical ports	Yes
• log file for unauthorized access	No
product functions time	
product function SICLOCK support	Yes
product function pass on time synchronization	Yes
protocol is supported	
• NTP	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CP 343-1

Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
●	●	●	●			●	●

G...IK10...10/147

Communications processor for connecting a SIMATIC S7-300/SINUMERIK 840D powerline to Industrial Ethernet networks, also as PROFINET IO Controller or IO Device.

The CP supports:

- PG/OP communication
- S7 communication
- Open communication (SEND/RECEIVE)
- PROFINET communication

Ordering data

Article No.

Article No.

CP 343-1 communications processor

For connection of SIMATIC S7-300 to Industrial Ethernet over ISO and TCP/IP; PROFINET IO Controller or PROFINET IO Device, MRP, integrated 2-port switch ERTEC; S7 communication, open communication (SEND/RECEIVE), FETCH/WRITE, with and without RFC 1006, multicast, DHCP, CPU clock synchronization via SIMATIC procedure and NTP, diagnostics, SNMP, access protection through IP access list, initialization over LAN 10/100 Mbps; with electronic manual on DVD

6GK7343-1EX30-0XE0

Accessories

IE FC RJ45 plug 180 x 2

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPUs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

IE FC RJ45 plug 145

RJ45 plug-in connector 2 x 2 for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 145° cable outlet

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB30-0AA0
6GK1901-1BB30-0AB0
6GK1901-1BB30-0AE0

IE FC TP standard cable GP 2 x 2 (type A)

4-core, shielded TP installation cable for connecting to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10

IE FC stripping tool

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

CSM 377 compact switch module

Unmanaged switch for connection of a SIMATIC S7-300 CPU, ET 200M, and up to three further nodes to Industrial Ethernet operating at 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, LED diagnostics, S7-300 module including electronic Equipment Manual on CD-ROM

6GK7377-1AA00-0AA0

SCALANCE XC206-2SFP Industrial Ethernet switch

Manageable Layer 2 IE switch; IEC 62443-4-2 certified; 6x 10/100 Mbps RJ45 ports; 2x 100/1000 Mbps SFP; 1x console port

6GK5206-2BS00-2AC2

Technical specifications

Article number	6GK7343-1EX30-0XE0
product type designation	CP 343-1
transfer rate	
transfer rate	
• at the 1st interface	10 ... 100 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	2
number of electrical connections	
• at the 1st interface according to Industrial Ethernet	2
• for power supply	1
type of electrical connection	
• of Industrial Ethernet interface	RJ45 port
• at the 1st interface according to Industrial Ethernet	RJ45 port
type of electrical connection	
• for power supply	2-pole plugable terminal block
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage 1 from backplane bus	5 V
supply voltage	24 V
supply voltage external	24 V
supply voltage external at DC rated value	24 V
relative positive tolerance at DC at 24 V	20 %
relative negative tolerance at DC at 24 V	15 %
consumed current	
• from backplane bus at DC at 5 V typical	0.2 A
• from external supply voltage at DC at 24 V typical	0.16 A
• from external supply voltage at DC at 24 V maximum	0.2 A
power loss [W]	5.8 W
ambient conditions	
ambient temperature	
• for vertical installation during operation	0 ... 40 °C
• for horizontally arranged busbars during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20

Article number	6GK7343-1EX30-0XE0
product type designation	CP 343-1
design, dimensions and weights	
module format	Compact module S7-300 single width
width	40 mm
height	125 mm
depth	120 mm
net weight	0.22 kg
fastening method	
• S7-300 rail mounting	Yes
performance data open communication	
number of possible connections for open communication by means of SEND/RECEIVE blocks maximum	16
data volume	
• as user data per ISO connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per ISO on TCP connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per TCP connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per UDP connection for open IE communication by means of SEND/RECEIVE blocks maximum	2 Kibyte
number of Multicast stations	16
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	16
performance data multi-protocol mode	
number of active connections with multi-protocol mode	32
performance data PROFINET communication as PN IO controller	
number of PN IO devices on PROFINET IO controller operable total	32
number of external PN IO lines with PROFINET per rack	1
data volume	
• as user data for input variables as PROFINET IO controller maximum	1 Kibyte
• as user data for output variables as PROFINET IO controller maximum	1 Kibyte
• as user data for input variables per PN IO device as PROFINET IO controller maximum	1 433 byte
• as user data for output variables per PN IO device as PROFINET IO controller maximum	1 433 byte
• as user data for input variables per PN IO device for each sub-module as PROFINET IO controller maximum	240 byte
• as user data for output variables per PN IO device for each sub-module as PROFINET IO controller maximum	240 byte

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CP 343-1

Technical specifications

Article number	6GK7343-1EX30-0XE0
product type designation	CP 343-1
performance data PROFINET communication as PN IO device	
product function PROFINET IO device	Yes
data volume	
• as user data for input variables as PROFINET IO device maximum	512 byte
• as user data for output variables as PROFINET IO device maximum	512 byte
• as user data for input variables for each sub-module as PROFINET IO device	240 byte
• as user data for output variables for each sub-module as PROFINET IO device	240 byte
• as user data for the consistency area for each sub-module	240 byte
number of submodules per PROFINET IO-Device	32
performance data telecontrol	
protocol is supported	
• TCP/IP	Yes
product functions management, configuration, engineering	
product function MIB support	Yes
protocol is supported	
• SNMP v1	Yes
• DCP	Yes
• LLDP	Yes
configuration software	
• required	STEP 7 V5.4 SP2 or higher / STEP 7 Professional V11 (TIA Portal) or higher
identification & maintenance function	
• I&MO - device-specific information	Yes
• I&M1 - higher level designation/location designation	Yes

Article number	6GK7343-1EX30-0XE0
product type designation	CP 343-1
product functions diagnostics	
product function web-based diagnostics	Yes
product functions switch	
product feature switch	Yes
product function	
• switch-managed	No
• with IRT PROFINET IO switch	Yes
• configuration with STEP 7	Yes
product functions redundancy	
product function	
• ring redundancy	Yes
• redundancy manager	No
protocol is supported Media Redundancy Protocol (MRP)	Yes
product functions security	
product function	
• password protection for Web applications	No
• ACL - IP-based	Yes
• ACL - IP-based for PLC/routing	No
• switch-off of non-required services	Yes
• blocking of communication via physical ports	Yes
• log file for unauthorized access	No
product functions time	
product function SICLOCK support	Yes
product function pass on time synchronization	Yes
protocol is supported	
• NTP	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

5

Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
●	●	●	●	●	●	●	●

Communications processor for connecting the SIMATIC S7-300/SINUMERIK 840D powerline to Industrial Ethernet networks, also as PROFINET IO controller and IO device.

The CP supports:

- PG/OP communication
- S7 communication
- Open communication (SEND/RECEIVE)
- PROFINET communication
- IT communication
- Security functionality, firewall and VPN

In addition, the CP 343-1 Advanced provides email functions and allows users to create their own Web pages - ideal support for maintenance and quality assurance. The Internet functions such as FTP even allow connection to the most diverse PC-based systems. This CP is therefore the bridge between the field level and the management level for the S7-300. The CP 343-1 Advanced connects seamlessly to the security structures of the office and IT world.

Note:

Critical restrictions to cyber security for CP 343-1 Advanced (6GK7343-1GX31-0XE0)

Parts of the CP firmware originate from third-party vendors who have discontinued maintenance for the supplied software components. Therefore, these components are no longer monitored for newly disclosed critical security vulnerabilities. For CPs purchased after June 2021, this means:

- Siemens can no longer ensure that the firmware does not contain any security-critical vulnerabilities.
- Siemens no longer publishes newly discovered security vulnerabilities as security advisories and no longer eliminates such vulnerabilities. This does not affect the functionality of the CP. It merely means that there is no longer any guarantee that the CP-secured networks are protected without restrictions. Siemens recommends the following measures:
 - Implement a state-of-the-art security concept for the entire plant. You can find more information here: <https://www.siemens.com/industrialsecurity>
 - Additionally secure the Internet access implemented via the CP using further security components, such as a SCALANCE S. In this case, the plant is adequately protected, even if there is a security-critical vulnerability in the CP.

Ordering data

Article No.

Article No.

CP 343-1 Advanced communications processor

For connecting the SIMATIC S7-300 CPU to Industrial Ethernet; 1 x 10/100/1000 Mbps; 2 x 10/100 Mbps (IE SWITCH); RJ 45 ports; TCP; UDP; ISO; PROFINET IO controller and device, S7 communication (client + server); open communication (SEND/RECEIVE); S7 routing; IP configuration via DHCP/block; extended web diagnostics; time synchronization; IP Access Control List; IP routing; FTP; email; PROFINET CBA; C-PLUG

- With Security (Firewall + VPN) and PROFinergy (Controller + Device)

6GK7343-1GX31-0XE0

Accessories**IE FC RJ45 plug 180 2 x 2**

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

IE FC RJ45 plug 145

RJ45 plug-in connector 2 x 2 for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 145° cable outlet

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB30-0AA0
6GK1901-1BB30-0AB0
6GK1901-1BB30-0AE0

IE FC RJ45 plug 4 x 2

RJ45 plug-in connector for Industrial Ethernet (10/100/1000/10000 Mbps, Cat6A) with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB12-2AA0
6GK1901-1BB12-2AB0
6GK1901-1BB12-2AE0

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CP 343-1 Advanced

Ordering data

Article No.	Article No.
IE FC TP standard cable GP 2 x 2 (type A) 4-core, shielded TP installation cable for connecting to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1840-2AH10
IE FC TP standard cable GP 4 x 2 8-core, shielded TP installation cable for connection to IE FC RJ45 modular outlet for universal applications; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m <ul style="list-style-type: none"> • AWG22, for connection to IE FC RJ45 modular outlet • AWG24, for connection to IE FC RJ45 plug 4 x 2 	6XV1870-2E 6XV1878-2A
IE FC stripping tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	6GK1901-1GA00
CSM 377 compact switch module Unmanaged switch for connection of a SIMATIC S7-300 CPU, ET 200M, and up to three further nodes to Industrial Ethernet operating at 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, LED diagnostics, S7-300 module including electronic Equipment Manual on CD-ROM	6GK7377-1AA00-0AA0
SCALANCE XC206-2SFP Industrial Ethernet switch Manageable Layer 2 IE switch; IEC 62443-4-2 certified; 6x 10/100 Mbps RJ45 ports; 2x 100/1000 Mbps SFP; 1x console port	6GK5206-2BS00-2AC2

5

Technical specifications

Article number	6GK7343-1GX31-0XE0	Article number	6GK7343-1GX31-0XE0
product type designation	CP 343-1 Advanced	product type designation	CP 343-1 Advanced
transfer rate		supply voltage, current consumption, power loss	
transfer rate		type of voltage of the supply voltage	DC
• at the 1st interface	10 ... 1 000 Mbit/s	supply voltage 1 from backplane bus	5 V
• at the 2nd interface	10 ... 100 Mbit/s	supply voltage external	24 V
interfaces		supply voltage external at DC rated value	24 V
number of interfaces according to Industrial Ethernet	3	relative positive tolerance at DC at 24 V	20 %
number of electrical connections		relative negative tolerance at DC at 24 V	15 %
• at the 1st interface according to Industrial Ethernet	1	consumed current	
• at the 2nd interface according to Industrial Ethernet	2	• from backplane bus at DC at 5 V typical	0.14 A
• for power supply	1	• from external supply voltage at DC at 24 V typical	0.48 A
type of electrical connection		• from external supply voltage at DC at 24 V maximum	0.62 A
• at the 1st interface according to Industrial Ethernet	RJ45 port	power loss [W]	14.7 W
• at the 2nd interface according to Industrial Ethernet	RJ45 port	ambient conditions	
type of electrical connection		ambient temperature	
• for power supply	2-pole plugable terminal block	• for vertical installation during operation	0 ... 40 °C
design of the removable storage		• for horizontally arranged busbars during operation	0 ... 60 °C
• C-PLUG	Yes	• during storage	-40 ... +70 °C
		• during transport	-40 ... +70 °C
		relative humidity	
		• at 25 °C without condensation during operation maximum	95 %
		protection class IP	IP20

Technical specifications

Article number	6GK7343-1GX31-0XE0
product type designation	CP 343-1 Advanced
design, dimensions and weights	
module format	Compact module
width	80 mm
height	125 mm
depth	120 mm
net weight	0.45 kg
fastening method	
• S7-300 rail mounting	Yes
performance data open communication	
number of possible connections for open communication by means of SEND/RECEIVE blocks maximum	16
data volume	
• as user data per ISO connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per ISO on TCP connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per TCP connection for open communication by means of SEND/RECEIVE blocks maximum	8 Kibyte
• as user data per UDP connection for open IE communication by means of SEND/RECEIVE blocks maximum	2 Kibyte
number of Multicast stations	16
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	16
performance data multi-protocol mode	
number of active connections with multi-protocol mode	48
performance data IT functions	
number of possible connections	
• as client by means of FTP maximum	10
• as server by means of FTP maximum	2
number of possible connections	
• as server by means of HTTP maximum	4
• as email client maximum	1
data volume as user data for email maximum	8 Kibyte
storage capacity of the user memory	
• as flash memory file system	28 Mibyte
• as RAM	30 Mibyte
number of possible write cycles of the flash memory cells	100 000

Article number	6GK7343-1GX31-0XE0
product type designation	CP 343-1 Advanced
performance data PROFINET communication as PN IO controller	
product function PROFINET IO controller	Yes
number of PN IO devices on PROFINET IO controller operable total	128
number of PN IO IRT devices on PROFINET IO controller operable	128
number of external PN IO lines with PROFINET per rack	1
data volume	
• as user data for input variables as PROFINET IO controller maximum	4 Kibyte
• as user data for output variables as PROFINET IO controller maximum	4 Kibyte
• as user data for input variables per PN IO device as PROFINET IO controller maximum	1 433 byte
• as user data for output variables per PN IO device as PROFINET IO controller maximum	1 433 byte
• as user data for input variables per PN IO device for each sub-module as PROFINET IO controller maximum	240 byte
• as user data for output variables per PN IO device for each sub-module as PROFINET IO controller maximum	240 byte
performance data PROFINET communication as PN IO device	
product function PROFINET IO device	Yes
data volume	
• as user data for input variables as PROFINET IO device maximum	1 024 byte
• as user data for output variables as PROFINET IO device maximum	1 024 byte
• as user data for input variables for each sub-module as PROFINET IO device	240 byte
• as user data for output variables for each sub-module as PROFINET IO device	240 byte
• as user data for the consistency area for each sub-module	240 byte
number of submodules per PROFINET IO-Device	32
performance data PROFINET CBA	
number of remote connection partners with PROFINET CBA	64
number of connections with PROFINET CBA total	1 000
data volume	
• as user data for digital inputs with PROFINET CBA maximum	8 Kibyte
• as user data for digital outputs with PROFINET CBA maximum	8 Kibyte
• as user data for arrays and data types in the case of acyclic transmission with PROFINET CBA maximum	8 Kibyte
• as user data for arrays and data types with PROFINET CBA with cyclical transfer maximum	250 byte
• as user data for arrays and data types with PROFINET CBA in the case of local interconnection maximum	2 400 byte

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CP 343-1 Advanced

Technical specifications

Article number	6GK7343-1GX31-0XE0
product type designation	CP 343-1 Advanced
performance data PROFINET CBA remote interconnection with acyclic transfer	
update time of the remote interconnections in the case of acyclic transmission with PROFINET CBA	100 ms
number of remote connections to input variables in the case of acyclic transmission with PROFINET CBA maximum	128
number of remote connections to output variables in the case of acyclic transmission with PROFINET CBA maximum	128
data volume	
• as user data for remote interconnections with input variables in the case of acyclic transmission with PROFINET CBA	8 Kibyte
• as user data for remote interconnections with output variables in the case of acyclic transmission with PROFINET CBA	8 Kibyte
performance data PROFINET CBA remote interconnection with cyclic transfer	
update time of the remote interconnections with cyclical transfer with PROFINET CBA	8 ms
number of remote connections to input variables with PROFINET CBA with cyclic transfer maximum	200
number of remote connections to output variables with cyclical transfer with PROFINET CBA maximum	200
data volume	
• as user data for remote interconnections with input variables with cyclical transfer with PROFINET CBA maximum	2 000 byte
• as user data for remote interconnections with output variables with cyclical transfer with PROFINET CBA maximum	2 000 byte
performance data PROFINET CBA HMI variables via PROFINET acyclic	
number of connectable HMI stations for HMI variables in the case of acyclic transmission with PROFINET CBA	3
update time of the HMI variables in the case of acyclic transmission with PROFINET CBA	500 ms
number of HMI variables in the case of acyclic transmission with PROFINET CBA maximum	200
data volume as user data for HMI variables in the case of acyclic transmission with PROFINET CBA maximum	8 Kibyte

Article number	6GK7343-1GX31-0XE0
product type designation	CP 343-1 Advanced
performance data PROFINET CBA device-internal interconnections	
number of internal connections with PROFINET CBA maximum	256
data volume of the internal connections with PROFINET CBA maximum	2 400 byte
performance data PROFINET CBA interconnections to constants	
number of connections with constants with PROFINET CBA maximum	200
data volume as user data for interconnections with constants with PROFINET CBA maximum	4 096 byte
performance data PROFINET CBA PROFIBUS proxy functionality	
product function with PROFINET CBA PROFIBUS proxy functionality	No
performance data telecontrol	
protocol is supported	
• TCP/IP	Yes
product functions management, configuration, engineering	
product function MIB support	Yes
protocol is supported	
• SNMP v1	Yes
• SNMP v3	Yes
• DCP	Yes
• LLDP	Yes
configuration software	
• required	STEP7 V5.5 SP2 HF1 or higher / STEP 7 Professional V12 (TIA Portal) or higher
• for PROFINET CBA required identification & maintenance function	SIMATIC iMap V3.0 SP4 and higher
• I&MO - device-specific information	Yes
• I&M1 - higher level designation/location designation	Yes
product functions diagnostics	
product function web-based diagnostics	Yes
product functions switch	
product feature switch	Yes
product function	
• switch-managed	No
• with IRT PROFINET IO switch	Yes
• configuration with STEP 7	Yes
product functions redundancy	
product function	
• ring redundancy	Yes
• redundancy manager	Yes
protocol is supported Media Redundancy Protocol (MRP)	Yes

5

Technical specifications

Article number	6GK7343-1GX31-0XE0
product type designation	CP 343-1 Advanced
product functions security	
firewall version	stateful inspection
product function with VPN connection	IPSec
type of encryption algorithms with VPN connection	AES-256, AES-192, AES-128, 3DES-168, DES-56
type of authentication procedure with VPN connection	Preshared key (PSK), X.509v3 certificates
type of hashing algorithms with VPN connection	MD5, SHA-1
number of possible connections with VPN connection	32
product function	
• password protection for Web applications	Yes
• ACL - IP-based	Yes
• ACL - IP-based for PLC/routing	Yes
• switch-off of non-required services	Yes
• blocking of communication via physical ports	Yes
• log file for unauthorized access	No

Article number	6GK7343-1GX31-0XE0
product type designation	CP 343-1 Advanced
product functions time	
product function SICLOCK support	Yes
product function pass on time synchronization	Yes
protocol is supported	
• NTP	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

CSM 377 unmanaged

Overview



- Unmanaged switch for connecting a SIMATIC S7-300 with integral PROFINET interface or an Industrial Ethernet CP or SIMATIC ET 200M to an Industrial Ethernet in an electrical line, tree or star structure
- As many as three additional nodes can be connected
- As an unmanaged switch, the CSM 377 is used for integrating small machines into existing automation networks or for the stand-alone operation of the machines
- Simple, space-saving attachment to SIMATIC S7-300 DIN rail due to design as single-width module in SIMATIC S7-300 format
- Low-cost solution for implementing small, local Ethernet networks
- Rugged, industry-standard node connections with PROFINET-compliant RJ45 plug connectors that latch onto the enclosure to offer additional strain and bending relief

Ordering data

Article No.

CSM 377 compact switch module

Unmanaged switch for connecting a SIMATIC S7-300, ET 200 M and up to three further nodes to Industrial Ethernet with 10/100 Mbps; 4 x RJ45 ports; external 24 V DC power supply, diagnostics on LEDs, S7-300 module including electronic Equipment Manual on CD-ROM

6GK7377-1AA00-0AA0

Accessories

IE FC TP standard cable GP 2 x 2 (type A)

4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10

IE FC RJ45 plug 180 2 x 2

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

IE FC stripping tool

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

Technical specifications

Article number	6GK7377-1AA00-0AA0
Product type designation	SCALANCE CSM 377
product type designation	
product brand name	SCALANCE
product type designation	CSM 377
transfer rate	
transfer rate	10 Mbit/s, 100 Mbit/s
interfaces for communication integrated	
number of electrical connections	
• for network components or terminal equipment	4
number of 100 Mbit/s SC ports	
• for multimode	0
interfaces other	
number of electrical connections	
• for power supply	1
type of electrical connection	
• for power supply	2-pole terminal block

Article number	6GK7377-1AA00-0AA0
Product type designation	SCALANCE CSM 377
supply voltage, current consumption, power loss	
type of voltage 1 of the supply voltage	DC
• supply voltage 1 rated value	24 V
• power loss [W] 1 rated value	1.6 W
• supply voltage 1 rated value	19.2 ... 28.8 V
• consumed current 1 maximum	0.07 A
• type of electrical connection 1 for power supply	2-pole terminal block
• product component 1 fusing at power supply input	Yes
• fuse protection type 1 at input for supply voltage	0.5 A / 60 V

Technical specifications

Article number	6GK7377-1AA00-0AA0
Product type designation	SCALANCE CSM 377
ambient conditions	
ambient temperature	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
design	SIMATIC S7-300 device design
width	40 mm
height	125 mm
depth	118 mm
net weight	0.2 kg
fastening method	
• 35 mm top hat DIN rail mounting	No
• wall mounting	No
• S7-300 rail mounting	Yes
• S7-1500 rail mounting	No
product functions management, configuration, engineering	
product function	
• multipoint mirroring	No
product function switch-managed	No
product functions redundancy	
product function	
• Parallel Redundancy Protocol (PRP)/operation in the PRP-network	Yes
• Parallel Redundancy Protocol (PRP)/Redundant Network Access (RNA)	No
standards, specifications, approvals	
reference code	
• according to IEC 81346-2	KF
• according to IEC 81346-2:2019	KFE

Article number	6GK7377-1AA00-0AA0
Product type designation	SCALANCE CSM 377
standards, specifications, approvals CE	
certificate of suitability CE marking	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability	
• ATEX	Yes
• UKEX	Yes
• IECEX	Yes
• ULhazloc approval	Yes
• CCC for hazardous zone according to GB standard	Yes
• FM registration	Yes
standards, specifications, approvals other	
certificate of suitability	EN 61000-6-2:2001, EN 61000-6-4:2001
• KC approval	No
• Regulatory Compliance Mark (RCM)	Yes
standards, specifications, approvals marine classification	
Marine classification association	
• American Bureau of Shipping Europe Ltd. (ABS)	Yes
• French marine classification society (BV)	Yes
• DNV GL	Yes
• Korean Register of Shipping (KRS)	Yes
• Lloyds Register of Shipping (LRS)	Yes
• Nippon Kaiji Kyokai (NK)	Yes
• Polski Rejestr Statkow (PRS)	Yes
• Royal Institution of Naval Architects (RINA)	Yes
product functions general	
Warranty period	5 a
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

TIM 3V-IE (for S7-300)

Overview



- SINAUT communications module TIM for SIMATIC S7-300 for use in a wide area network (WAN)
- IP communication via secure VPN (virtual private network) using the Internet
- Wireless communication via mobile wireless routers or wireless devices
- Wired communication via Ethernet, DSL, dialup modems or dedicated line modem
- Complete migration of existing wireless, dedicated line and dial-up technology to IP-based network
- Frame buffer for seamless recording of data
- Simple configuration and operation without specialist IT knowledge

Ordering data

TIM 3V-IE communications module

With an RS232 interface for SINAUT communication via a conventional WAN or an IP-based network (WAN or LAN)

Article No.

6NH7800-3BA00

SINAUT engineering software V5.5 OSD

Comprising

- SINAUT engineering software V5.5 for the PG
- SINAUT TD7 block library
- Electronic manual in German and English

6NH7997-0CE55-0AA0

STEP 7 Professional V19 engineering software

- SIMATIC STEP 7 Professional V19 floating license
- Upgrade SIMATIC STEP 7 Basic V11 ... V18 → V19 floating license

6ES7822-1AE23-0YA5

6ES7822-0AE23-0YE5

Accessories

IE FC TP standard cable GP 2 x 2 (type A)

4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10

Article No.

IE FC RJ45 plug 180

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables, with 180° cable outlet; for network components and CPs/CPU's with Industrial Ethernet interfaces

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

IE FC stripping tool

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

Technical specifications

Article number	6NH7800-3BA00
product type designation	TIM 3V-IE
transfer rate	
transfer rate	
• for Industrial Ethernet	10 ... 100 Mbit/s
• according to RS 232	50 ... 38 400 bit/s
interfaces	
number of interfaces according to Industrial Ethernet	1
number of electrical connections	
• for external data transmission according to RS 232	1
• for power supply	1
type of electrical connection	
• of Industrial Ethernet interface	RJ45 port
type of electrical connection	
• at interface 1 for external data transmission	9 pin Sub-D-connector (RS232)
• for power supply	2-pole plugable terminal block
design of the removable storage	
• C-PLUG	No
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage	24 V
supply voltage	20.4 ... 28.8 V
supply voltage external at DC rated value	24 V
supply voltage external at DC rated value	20.4 ... 28.8 V
relative symmetrical tolerance at DC	
• at 5 V	5 %
relative positive tolerance at DC at 24 V	5 %
relative negative tolerance at DC at 24 V	5 %
consumed current	
• from backplane bus at DC at 24 V maximum	0.2 A
• from external supply voltage at DC at 24 V maximum	0.2 A
power loss [W]	5.8 W
product extension optional backup battery	No

Article number	6NH7800-3BA00
product type designation	TIM 3V-IE
ambient conditions	
ambient temperature	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-300 single width
width	40 mm
height	125 mm
depth	120 mm
net weight	0.25 kg
product features, product functions, product components general	
number of units	
• per CPU maximum	1
• note	Number of TIM per S7-300
wire length	
• with RS 232 interface maximum	6 m
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	8
• with PG connections maximum	2
• with OP connections maximum	8
service	
• SINAUT ST7 via S7 communication	Yes
• PG/OP communication	Yes
performance data multi-protocol mode	
number of active connections with multi-protocol mode	12

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

TIM 3V-IE (for S7-300)

Technical specifications

Article number	6NH7800-3BA00
product type designation	TIM 3V-IE
performance data telecontrol	
suitability for use	
• node station	No
• substation	Yes
• TIM control center	No
• note	RS232 and Industrial Ethernet can not be operated in parallel
protocol is supported	
• DNP3	No
• SINAUT ST1 protocol	Yes
• SINAUT ST7 protocol	Yes
product function data buffering if connection is aborted	Yes; 16,000 data messages
storage capacity	
• of S7 CPU work memory for TD7onCPU mode data blocks on CPU required	20 Kibyte
• of S7 CPU work memory for TD7onTIM mode data blocks on TIM required	0 Kibyte
• note	TD7onCPU: at least 20 KB, actual requirement determined by data volume and functional scope TD7onTIM: 0 bytes in most favorable case
product feature buffered message frame memory	No
transmission format	
• for SINAUT ST1 protocol with polling 11 bit	Yes
• for SINAUT ST1 protocol with spontaneous 10-bit or 11-bit	Yes
• for SINAUT ST7 protocol with multi-master polling 10-bit	Yes
• for SINAUT ST7 protocol with polling or spontaneous 10-bit or 11-bit	Yes
operating mode for scanning of data transmission	
• with dedicated line/radio link with SINAUT ST1 protocol	Polling, polling with time slot procedure
• with dedicated line/radio link with SINAUT ST7 protocol	Polling, polling with time slot procedure, multi-master polling with time slot procedure
• with dial-up network with SINAUT ST1 protocol	spontaneous
• with dial-up network with SINAUT ST7 protocol	spontaneous
hamming distance	
• for SINAUT ST1 protocol	4
• for SINAUT ST7 protocol	4

Article number	6NH7800-3BA00
product type designation	TIM 3V-IE
product functions management, configuration, engineering	
configuration software	
• required	SINAUT ST7 ES
• for CPU configuring required SINAUT TD7 block library for CPU	Yes
• for PG configuring required SINAUT ST7 configuration software for PG	Yes
storage location of TIM configuration data	on the TIM
product functions security	
operating mode Virtual Private Network (VPN)	Yes; VPN operation as MSC client with MSC protocol and password protection only possible in conjunction with GPRS modem with MSC capability
type of authentication with Virtual Private Network PSK	Yes
product function	
• password protection for VPN	Yes
• MSC client via GPRS modem with MSC capability	Yes
protocol	
• is supported MSC protocol	No
key length for MSC with Virtual Private Network	128 bit
number of possible connections	
• as MSC client with VPN connection	1
• as MSC server with VPN connection	0
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

5

Overview



- SINAUT communications module TIM for SIMATIC S7-300 for use in wide area network (WAN) as station, node station, and control center
- IP communication via secure VPN (virtual private network) using the Internet
- Wireless communication via mobile wireless routers or wireless devices
- Wired communication via Ethernet, DSL, dialup modems or dedicated line modem
- Complete migration of existing wireless, dedicated line and dial-up technology to IP-based network
- Message frame memory for seamless recording of data and support of redundant communication paths
- Simple configuration and operation without specialist IT knowledge

5

Ordering data

Ordering data	Article No.	Ordering data	Article No.
TIM 3V-IE Advanced communications module With an RS232 interface and an RJ45 interface for SINAUT communication via a conventional WAN and an IP-based network (WAN or LAN)	6NH7800-3CA00	IE FC RJ45 plug 180 RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables, with 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interfaces <ul style="list-style-type: none"> • 1 pack = 1 unit • 1 pack = 10 units • 1 pack = 50 units 	6GK1901-1BB10-2AA0 6GK1901-1BB10-2AB0 6GK1901-1BB10-2AE0
SINAUT engineering software V5.5 OSD Comprising <ul style="list-style-type: none"> • SINAUT S77 engineering software V5.5 for the PG • SINAUT TD7 block library • Electronic manual in German and English 	6NH7997-0CE55-0AA0	IE FC stripping tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	6GK1901-1GA00
STEP 7 Professional V19 engineering software <ul style="list-style-type: none"> • SIMATIC STEP 7 Professional V19 floating license • Upgrade SIMATIC STEP 7 Basic V11 ... V18 → V19 floating license 	6ES7822-1AE23-0YA5 6ES7822-0AE23-0YE5		
Accessories IE FC TP standard cable GP 2 x 2 (type A) 4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1840-2AH10		

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

TIM 3V-IE Advanced (for S7-300)

Technical specifications

Article number	6NH7800-3CA00
product type designation	TIM 3V-IE Advanced
transfer rate	
transfer rate	
• for Industrial Ethernet	10 ... 100 Mbit/s
• according to RS 232	50 ... 38 400 bit/s
interfaces	
number of interfaces according to Industrial Ethernet	1
number of electrical connections	
• for external data transmission according to RS 232	1
• for power supply	1
type of electrical connection	
• of Industrial Ethernet interface	RJ45 port
type of electrical connection	
• at interface 1 for external data transmission	9 pin Sub-D-connector (RS232)
• for power supply	2-pole plugable terminal block
design of the removable storage	
• C-PLUG	No
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage	24 V
supply voltage	20.4 ... 28.8 V
supply voltage external at DC rated value	24 V
supply voltage external at DC rated value	20.4 ... 28.8 V
relative symmetrical tolerance at DC	
• at 5 V	5 %
relative positive tolerance at DC at 24 V	5 %
relative negative tolerance at DC at 24 V	5 %
consumed current	
• from backplane bus at DC at 24 V maximum	0.2 A
• from external supply voltage at DC at 24 V maximum	0.2 A
power loss [W]	5.8 W
product extension optional backup battery	No

Article number	6NH7800-3CA00
product type designation	TIM 3V-IE Advanced
ambient conditions	
ambient temperature	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-300 single width
width	40 mm
height	125 mm
depth	120 mm
net weight	0.25 kg
product features, product functions, product components general	
number of units	
• note	Number of TIMs per S7-300: multiple, number depends on the connection resources of the S7-300 CPU
wire length	
• with RS 232 interface maximum	6 m
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	24
• with PG connections maximum	4
• with OP connections maximum	20
service	
• SINAUT ST7 via S7 communication	Yes
• PG/OP communication	Yes
performance data multi-protocol mode	
number of active connections with multi-protocol mode	24

5

Technical specifications

Article number	6NH7800-3CA00
product type designation	TIM 3V-IE Advanced
performance data telecontrol	
suitability for use	
• node station	Yes
• substation	Yes
• TIM control center	Yes
• note	RS232 and Industrial Ethernet can be operated in parallel
protocol is supported	
• DNP3	No
• SINAUT ST1 protocol	Yes
• SINAUT ST7 protocol	Yes
product function data buffering if connection is aborted	Yes; 32,000 data messages
storage capacity	
• of S7 CPU work memory for TD7onCPU mode data blocks on CPU required	20 Kibyte
• of S7 CPU work memory for TD7onTIM mode data blocks on TIM required	0 Kibyte
• note	TD7onCPU: at least 20 KB, actual requirement determined by data volume and functional scope TD7onTIM: 0 bytes in most favorable case
product feature buffered message frame memory	No
transmission format	
• for SINAUT ST1 protocol with polling 11 bit	Yes
• for SINAUT ST1 protocol with spontaneous 10-bit or 11-bit	Yes
• for SINAUT ST7 protocol with multi-master polling 10-bit	Yes
• for SINAUT ST7 protocol with polling or spontaneous 10-bit or 11-bit	Yes
operating mode for scanning of data transmission	
• with dedicated line/radio link with SINAUT ST1 protocol	Polling, polling with time slot procedure
• with dedicated line/radio link with SINAUT ST7 protocol	Polling, polling with time slot procedure, multi-master polling with time slot procedure
• with dial-up network with SINAUT ST1 protocol	spontaneous
• with dial-up network with SINAUT ST7 protocol	spontaneous
hamming distance	
• for SINAUT ST1 protocol	4
• for SINAUT ST7 protocol	4

Article number	6NH7800-3CA00
product type designation	TIM 3V-IE Advanced
product functions management, configuration, engineering	
configuration software	
• required	SINAUT ST7 ES
• for CPU configuring required SINAUT TD7 block library for CPU	Yes
• for PG configuring required SINAUT ST7 configuration software for PG	Yes
storage location of TIM configuration data	on the TIM
product functions security	
operating mode Virtual Private Network (VPN)	Yes
type of authentication with Virtual Private Network PSK	Yes
product function	
• password protection for VPN	Yes
• MSC client via GPRS modem with MSC capability	Yes
protocol	
• is supported MSC protocol	Yes
• with Virtual Private Network MSC is supported	TCP/IP
key length for MSC with Virtual Private Network	128 bit
number of possible connections	
• as MSC client with VPN connection	1
• as MSC server with VPN connection	0
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

TIM 4R-IE (for S7-300/-400/PC)

Overview



- SINAUT communications module TIM with four interfaces for SIMATIC S7-300 or as self-contained unit for the S7-400 for use in the wide area network (WAN)
- For universal use in a SINAUT station, node station and control center
- Internet communication via integrated MSC-VPN tunnel with direct connection to DSL router or operation via IPsec VPN with additional SIMATIC NET components
- Wireless communication via mobile wireless routers or wireless devices
- Wired communication via Ethernet, DSL, dialup modems or dedicated line modem
- Complete migration of existing wireless, dedicated line and dial-up technology to IP-based network
- Message frame memory for seamless recording of data and support of redundant communication paths
- Simple configuration and operation without specialist IT knowledge

Ordering data

TIM 4R-IE communications module

With two combined RS232/RS485 interfaces for SINAUT communication via conventional WANs and two RJ45 interfaces for SINAUT communication via IP-based networks (WAN or LAN)

Article No.

6NH7800-4BA00

SINAUT engineering software V5.5 OSD

Comprising

- SINAUT ST7 engineering software V5.5 for the PG
- SINAUT TD7 block library
- Electronic manual in German and English

6NH7997-0CE55-0AA0

STEP 7 Professional V19 engineering software

- SIMATIC STEP 7 Professional V19 floating license
- Upgrade SIMATIC STEP 7 Basic V11 ... V18 → V19 floating license

6ES7822-1AE23-0YA5

6ES7822-0AE23-0YE5

Accessories

Buffer battery

3.6 V/2.3 Ah for TIM 4R-IE

6ES7971-0BA00

IE FC TP standard cable GP 2 x 2 (type A)

4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10

Article No.

IE FC RJ45 plug 180

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables, with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interfaces

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0

6GK1901-1BB10-2AB0

6GK1901-1BB10-2AE0

IE FC stripping tool

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

SITOP compact 24 V/0.6 A

1-phase power supply with wide-range input 85 ... 264 V AC/110 to 300 V DC, stabilized output voltage 24 V, rated output current value 0.6 A, slim design

6EP1331-5BA00

Technical specifications

Article number	6NH7800-4BA00
product type designation	TIM 4R-IE
transfer rate	
transfer rate	
• for Industrial Ethernet	10 ... 100 Mbit/s
• according to RS 232	50 ... 38 400 bit/s
interfaces	
number of interfaces according to Industrial Ethernet	2
number of electrical connections	
• for external data transmission according to RS 232	2
• for power supply	1
type of electrical connection	
• of Industrial Ethernet interface	RJ45 port
type of electrical connection	
• at interface 1 for external data transmission	9 pin Sub-D-connector, RS232 switchable to RS485
• at interface 2 for external data transmission	9-pole D-sub connector, RS232 can be switched to RS485
• for power supply	2-pole plugable terminal block
design of the removable storage	
• C-PLUG	Yes
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage	24 V
supply voltage	20.4 ... 28.8 V
supply voltage external at DC rated value	24 V
supply voltage external at DC rated value	20.4 ... 28.8 V
consumed current	
• from backplane bus at DC at 24 V maximum	0.2 A
• from external supply voltage at DC at 24 V maximum	0.17 A
power loss [W]	4.6 W
product extension optional backup battery	Yes
type of battery	Lithium AA / 3.6 V / 2.3 Ah
backup current	
• typical	100 µA
• maximum	160 µA

Article number	6NH7800-4BA00
product type designation	TIM 4R-IE
ambient conditions	
ambient temperature	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-300 double width
width	80 mm
height	125 mm
depth	120 mm
net weight	0.4 kg
product features, product functions, product components general	
number of units	
• note	Number of TIM 4R-IE per S7-300/S7-400: multiple, number depends on the connection resources of the CPU
wire length	
• with RS 232 interface maximum	6 m
• with RS 485 interface maximum	30 m
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	64
• with PG connections maximum	2
• with OP connections maximum	62
service	
• SINAUT ST7 via S7 communication	Yes
• PG/OP communication	Yes
performance data multi-protocol mode	
number of active connections with multi-protocol mode	128

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

TIM 4R-IE (for S7-300/-400/PC)

Technical specifications

Article number	6NH7800-4BA00
product type designation	TIM 4R-IE
performance data telecontrol	
suitability for use	
• node station	Yes
• substation	Yes
• TIM control center	Yes
protocol is supported	
• DNP3	No
• SINAUT ST1 protocol	Yes
• SINAUT ST7 protocol	Yes
product function data buffering if connection is aborted	Yes; 56,000 data messages
storage capacity	
• of S7 CPU work memory for TD7onCPU mode data blocks on CPU required	20 Kibyte
• of S7 CPU work memory for TD7onTIM mode data blocks on TIM required	0 Kibyte
• note	TD7onCPU: at least 20 KB, actual requirement determined by data volume and functional scope TD7onTIM: 0 bytes in most favorable case
product feature buffered message frame memory	Yes
transmission format	
• for SINAUT ST1 protocol with polling 11 bit	Yes
• for SINAUT ST1 protocol with spontaneous 10-bit or 11-bit	Yes
• for SINAUT ST7 protocol with multi-master polling 10-bit	Yes
• for SINAUT ST7 protocol with polling or spontaneous 10-bit or 11-bit	Yes
operating mode for scanning of data transmission	
• with dedicated line/radio link with SINAUT ST1 protocol	Polling, polling with time slot procedure
• with dedicated line/radio link with SINAUT ST7 protocol	Polling, polling with time slot procedure, multi-master polling with time slot procedure
• with dial-up network with SINAUT ST1 protocol	spontaneous
• with dial-up network with SINAUT ST7 protocol	spontaneous
hamming distance	
• for SINAUT ST1 protocol	4
• for SINAUT ST7 protocol	4

Article number	6NH7800-4BA00
product type designation	TIM 4R-IE
product functions management, configuration, engineering	
configuration software	
• required	SINAUT ST7 ES
• for CPU configuring required SINAUT TD7 block library for CPU	Yes
• for PG configuring required SINAUT ST7 configuration software for PG	Yes
storage location of TIM configuration data	on internal TIM flash memory, or on TIM in optional C-PLUG, or on MMC of the S7-300 CPU if TIM installed in S7-300 controller
product functions security	
operating mode Virtual Private Network (VPN)	Yes
type of authentication with Virtual Private Network PSK	Yes
product function	
• password protection for VPN	Yes
• MSC client via GPRS modem with MSC capability	Yes
protocol	
• is supported MSC protocol	Yes
• with Virtual Private Network MSC is supported	TCP/IP
key length for MSC with Virtual Private Network	128 bit
number of possible connections	
• as MSC client with VPN connection	1
• as MSC server with VPN connection	128
product functions time	
product component hardware real time clock	Yes
product feature hardware real time clock w. battery backup	Yes
accuracy of the hardware real time clock per day maximum	4 s
time synchronization	
• from NTP-server	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

5

Overview



In a station for the S7-CPU, the communications module TIM 3V-IE DNP3 (TeleControl Interface Module) handles the data exchange with the assigned master system SIMATIC PCS 7 TeleControl V8.0 using the open DNP3 protocol. The module additionally supports master and node functionality.

- With the S7-300 housing, the module can be fully integrated into the S7-300 system
- The module has an RS232 interface for the connection of an external modem for data transmission via a conventional WAN or the connection of a Modbus RTU slave to an S7-300 system
- The RJ45 port is used for data transmission via IP-based networks

5

Ordering data

**TIM 3V-IE DNP3
communications module**

With an RS232 interface for SINAUT communication via a conventional WAN and an IP-based network (WAN or LAN)

Article No.

6NH7803-3BA00-0AA0

**SINAUT engineering software
V5.5 OSD**

Consisting of

- SINAUT ST7 engineering software V5.5 for the PG
- SINAUT TD7 block library
- Electronic manual in German and English

6NH7997-0CE55-0AA0

Accessories**IE FC TP standard cable GP 2 x 2
(type A)**

4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10

Article No.

IE FC RJ45 plug 180

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables, with 180° cable outlet; for network components and CPs/CPU's with Industrial Ethernet interfaces

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

IE FC stripping tool

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

TIM 3V-IE DNP3 (for S7-300)

Technical specifications

Article number	6NH7803-3BA00-0AA0
product type designation	TIM 3V-IE DNP3
transfer rate	
transfer rate	
• for Industrial Ethernet	10 ... 100 Mbit/s
• according to RS 232	9 600 ... 38 400 bit/s
interfaces	
number of interfaces according to Industrial Ethernet	1
number of electrical connections	
• for external data transmission according to RS 232	1
• for power supply	1
type of electrical connection	
• of Industrial Ethernet interface	RJ45 port
type of electrical connection	
• at interface 1 for external data transmission	9 pin Sub-D-connector (RS232)
• for power supply	2-pole pluggable terminal block
design of the removable storage	
• C-PLUG	No
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage	24 V
supply voltage	20.4 ... 28.8 V
supply voltage external at DC rated value	24 V
supply voltage external at DC rated value	20.4 ... 28.8 V
consumed current	
• from backplane bus at DC at 24 V maximum	0.2 A
• from external supply voltage at DC at 24 V maximum	0.2 A
power loss [W]	5.8 W
product extension optional backup battery	No
ambient conditions	
ambient temperature	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
module format	Compact module S7-300 single width
width	40 mm
height	125 mm
depth	120 mm
net weight	0.25 kg

Article number	6NH7803-3BA00-0AA0
product type designation	TIM 3V-IE DNP3
product features, product functions, product components general	
number of units	
• note	Number of TIMs per S7-300: 1
wire length	
• with RS 232 interface maximum	6 m
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	3; only via LAN
• with PG connections maximum	2
• with OP connections maximum	1
service	
• PG/OP communication	Yes
performance data telecontrol	
suitability for use	
• node station	Yes
• substation	Yes
• TIM control center	Yes
protocol is supported	
• DNP3	Yes
• SINAUT ST1 protocol	No
• SINAUT ST7 protocol	No
• Modbus RTU	Yes
product function data buffering if connection is aborted	Yes; 64,000 data points with one master
number of DNP3 masters	
• for Ethernet maximum	8
• with RS 232 interface maximum	1
number of Modbus RTU slaves maximum	1
product functions management, configuration, engineering	
configuration software	
• required	SINAUT ST7 ES
storage location of TIM configuration data	on the CPU or TIM
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

5

Overview



In a station for the S7-CPU, the communications module TIM 4R-IE DNP3 (TeleControl Interface Module) handles the data traffic with the assigned SIMATIC PCS 7 TeleControl V8.0 master system using the open DNP3 protocol. In addition, the module now also supports master and node functionality.

- With the double-width S7-300 enclosure, the module can be fully integrated into the S7-300 system
- Can be connected as a stand-alone module to a SIMATIC S7-400 and SIMATIC S7-400 H System
- Two RS232/RS485 interfaces support connection of an external modem for data transmission via a conventional WAN or of a Modbus RTU slave to an S7-300 system
- The module has two RJ45 interfaces for data transmission via IP-based networks
- By using physically separate connection paths, the module permits media redundancy without loss of data during the switchover

5

Ordering data

**TIM 4R-IE DNP3
communications module**

With two combined RS232/RS485 interfaces for SINAUT communication via conventional WANs and two RJ45 interfaces for SINAUT communication via IP-based networks (WAN or LAN)

Article No.

6NH7803-4BA00-0AA0

**SINAUT engineering software
V5.5 OSD**

Consisting of

- SINAUT ST7 engineering software V5.5 for the PG
- SINAUT TD7 block library
- Electronic manual in German and English

6NH7997-0CE55-0AA0

Accessories**Buffer battery**

3.6 V/2.3 Ah for TIM 4R-IE DNP3

6ES7971-0BA00

**IE FC TP standard cable GP 2 x 2
(type A)**

4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10

Article No.

IE FC RJ45 plug 180

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables, with 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interfaces

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0

6GK1901-1BB10-2AB0

6GK1901-1BB10-2AE0

IE FC stripping tool

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

SITOP compact 24 V/0.6 A

1-phase power supply with wide-range input 85 ... 264 V AC/110 to 300 V DC, stabilized output voltage 24 V, rated output current value 0.6 A, slim design

6EP1331-5BA00

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

TIM 4R-IE DNP3 (for S7-300/-400)

Technical specifications

Article number	6NH7803-4BA00-0AA0
product type designation	TIM 4R-IE DNP3
transfer rate	
transfer rate	
• for Industrial Ethernet	10 ... 100 Mbit/s
• according to RS 232	9 600 ... 115 200 bit/s
interfaces	
number of interfaces according to Industrial Ethernet	2
number of electrical connections	
• for external data transmission according to RS 232	2
• for power supply	1
type of electrical connection	
• of Industrial Ethernet interface	RJ45 port
type of electrical connection	
• at interface 1 for external data transmission	9 pin Sub-D-connector, RS232 switchable to RS485
• at interface 2 for external data transmission	9-pole D-sub connector, RS232 can be switched to RS485
• for power supply	2-pole pluggable terminal block
design of the removable storage	
• C-PLUG	Yes
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage	24 V
supply voltage	20.4 ... 28.8 V
supply voltage external at DC rated value	24 V
supply voltage external at DC rated value	20.4 ... 28.8 V
consumed current	
• from backplane bus at DC at 24 V maximum	0.2 A
• from external supply voltage at DC at 24 V maximum	0.17 A
power loss [W]	4.6 W
product extension optional backup battery	Yes
type of battery	Lithium AA / 3.6 V / 2.3 Ah
backup current	
• typical	100 µA
• maximum	160 µA
ambient conditions	
ambient temperature	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20

Article number	6NH7803-4BA00-0AA0
product type designation	TIM 4R-IE DNP3
design, dimensions and weights	
module format	Compact module S7-300 double width
width	80 mm
height	125 mm
depth	120 mm
net weight	0.4 kg
product features, product functions, product components general	
number of units	
• note	Number of TIMs per S7-300 / S7-400: 1
wire length	
• with RS 232 interface maximum	6 m
• with RS 485 interface maximum	30 m
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	5; only via LAN
• with PG connections maximum	2
• with OP connections maximum	1
service	
• PG/OP communication	Yes
performance data telecontrol	
suitability for use	
• node station	Yes
• substation	Yes
• TIM control center	Yes
protocol is supported	
• DNP3	Yes
• SINAUT ST1 protocol	No
• SINAUT ST7 protocol	No
• Modbus RTU	Yes
product function data buffering if connection is aborted	Yes; 200,000 data points with one master
number of DNP3 masters	
• for Ethernet maximum	8
• with RS 232 interface maximum	1
number of Modbus RTU slaves maximum	1
product functions management, configuration, engineering	
configuration software	
• required	SINAUT ST7 ES
storage location of TIM configuration data	on the CPU or TIM
product functions time	
product component hardware real time clock	Yes
product feature hardware real time clock w. battery backup	Yes
accuracy of the hardware real time clock per day maximum	4 s
time synchronization	
• from NTP-server	Yes

5

Technical specifications

Article number	6NH7803-4BA00-0AA0
product type designation	TIM 4R-IE DNP3
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc

Article number	6NH7803-4BA00-0AA0
product type designation	TIM 4R-IE DNP3
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-300 Advanced Controllers

I/O modules

Communication

ASM 475

Overview



The ASM 475 is a powerful communications module for connecting the MOBY D, SIMATIC RF200, RF300 and SIMATIC MV400, MV500 identification systems to the S7-300 and ET 200M.

Ordering data

Ordering data	Article No.
ASM 475 communications module For SIMATIC S7-300 and ET 200M, parameterizable	6GT2002-0GA10
Accessories	
Front connector (1 x per ASM 475) <ul style="list-style-type: none"> with screw terminals with spring-loaded terminals 	6ES7392-1AJ00-0AA0 6ES7392-1BJ00-0AA0
Shield connection element (80 mm wide for 2 x ASM 475)	6ES7390-5AA00-0AA0
Shield connection clamp (1 x per reader cable) SIMATIC RF200 / RF300 / MV400 connecting cable Pre-assembled, between ASM 475 and RF200 / RF300 / MV400, IP65, straight connector, PUR material, trailable, available in following lengths ¹⁾ :	6ES7390-5BA00-0AA0
2 m	6GT2891-4EH20
5 m	6GT2891-4EH50
Extension cable SIMATIC RF200 / RF300 / MV400, PUR material, trailable, straight connector	
2 m	6GT2891-4FH20
5 m	6GT2891-4FH50
10 m	6GT2891-4FN10
20 m	6GT2891-4FN20
50 m	6GT2891-4FN50

¹⁾ The connecting cables can be extended using RF300 connecting cables of type 6GT2891-4Fxxx. These connecting cables are available in the lengths 2 m, 5 m, 10 m, 20 m and 50 m.

Technical specifications

Article number	6GT2002-0GA10
product type designation	ASM 475 communication module
suitability for operation	SIMATIC S7-300, ET200M together with RF200/300, MV400/500, MOBY D/E/I/U
transfer rate	
transfer rate at the point-to-point connection serial maximum	115.2 kbit/s
interfaces	
design of the interface for point-to-point connection	RS422
number of readers connectable	2
type of electrical connection	
<ul style="list-style-type: none"> of the backplane bus of the PROFIBUS interface of Industrial Ethernet interface for supply voltage 	S7-300 backplane bus (according to the head module) (according to the head module) Screw-type or spring-loaded terminals
design of the interface to the reader for communication	Screw-type or spring-loaded terminals
mechanical data	
material	Noryl
color	anthracite
supply voltage, current consumption, power loss	
supply voltage at DC	
<ul style="list-style-type: none"> rated value 	24 V 20 ... 30 V
<ul style="list-style-type: none"> consumed current at DC at 24 V without connected devices typical Consumed current from supply voltage 1L+ maximum 	0.1 A 1 A
ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> during operation during storage during transport 	0 ... 60 °C -40 ... +70 °C -40 ... +70 °C
protection class IP	IP20
shock resistance	According to IEC 61131-2
shock acceleration	150 m/s ²
vibrational acceleration	10 m/s ²
design, dimensions and weights	
width	40 mm
height	125 mm
depth	120 mm
net weight	0.2 kg
fastening method	S7-300 rack
wire length for RS 422 interface maximum	1 000 m

Technical specifications

Article number	6GT2002-0GA10
product type designation	ASM 475 communication module
product features, product functions, product components general	
display version	4 LEDs per reader connection, 2 LEDs for device status
product function addressable transponder file handler	Yes
protocol is supported	
• S7 communication	Yes
product functions management, configuration, engineering	
type of parameterization	Object manager, GSD
type of programming	FB 45, FB 55, FC 56 (FC 45/55 with limited functionality)
type of computer-switched communication	acyclic communication

Article number	6GT2002-0GA10
product type designation	ASM 475 communication module
standards, specifications, approvals	
certificate of suitability	CE, FCC, UL/CSA
accessories	
accessories	Front connector with screw-type or spring-loaded terminals
further information internet links	
internet link	
• to website: Image database	https://www.automation.siemens.com/bilddb
• to website: Industry Online Support	https://support.industry.siemens.com

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 communication

SIPLUS S7-300 CP 340**Overview**

- The low-cost, complete solution for serial communication over a point-to-point connection
- RS 232C (V.24) and RS 422/485 (X.27)
- Implemented protocols:
 - ASCII
 - 3964 (R) (not for RS 485)
 - Printer driver
- Simple parameterization using tool integrated in STEP 7

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data**SIPLUS S7-300 CP 340 communications module**

For industrial applications with extended ambient conditions

Extended temperature range and exposure to media

with 1 RS 232C (V.24) interface

with 1 RS 422/485 (X.27) interface

Article No.**6AG1340-1AH02-2AE0****6AG1340-1CH02-2AE0**

5

Technical specifications

Article number	6AG1340-1AH02-2AE0	6AG1340-1CH02-2AE0
Based on	6ES7340-1AH02-0AE0 SIPLUS S7-300 CP 340 RS232	6ES7340-1CH02-0AE0 SIPLUS S7-300 CP 340 RS422/485
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C; = Tmin	-25 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	60 °C; = Tmax
Ambient temperature during storage/transportation		
• min.	-40 °C	-40 °C
• max.	70 °C	70 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

Technical specifications

Article number	6AG1340-1AH02-2AE0	6AG1340-1CH02-2AE0
Based on	6ES7340-1AH02-0AE0 SIPLUS S7-300 CP 340 RS232	6ES7340-1CH02-0AE0 SIPLUS S7-300 CP 340 RS422/485
Resistance		
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 communication

SIPLUS S7-300 CP 341

Overview



- For fast, high-performance serial data exchange via point-to-point coupling
- Two versions with different physical transmission characteristics:
 - RS 232C (V.24),
 - RS 422/RS 485 (X.27)
- Implemented protocols: ASCII, 3964 (R), RK 512, customized protocols (can be reloaded)
- Simple parameter assignment using tool integrated in STEP 7

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

Article No.

SIPLUS S7-300 CP 341 communications processor

For industrial applications with extended ambient conditions

Extended temperature range and exposure to environmental substances

With RS 232 interface (V.24)

6AG1341-1AH02-7AE0

With RS 422/485 (X.27) interface

6AG1341-1CH02-7AE0

Accessories

Modbus Master V3.1

Task:

Communication via Modbus protocol with RTU format, SIMATIC S7 as master

Requirement:

CP 341 or CP 441-2;
STEP 7 V4.02 and higher

Type of delivery:

Driver program/documentation, English, German, French

Single license

6ES7870-1AA01-0YA0

Single license, without software and documentation

6ES7870-1AA01-0YA1

Modbus Slave V3.1

Task:

Communication via Modbus protocol with RTU format, SIMATIC S7 as slave

Requirement:

CP 341 or CP 441-2;
STEP 7 V4.02 and higher

Type of delivery:

Driver program/documentation, English, German, French

Single license

6ES7870-1AB01-0YA0

Single license, without software and documentation

6ES7870-1AB01-0YA1

Technical specifications

Article number	6AG1341-1AH02-7AE0	6AG1341-1CH02-7AE0
Based on	6ES7341-1AH02-0AE0 SIPLUS S7-300 CP 341 RS232C	6ES7341-1CH02-0AE0 SIPLUS S7-300 CP 341 RS422/485
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C; = Tmin	-25 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use
Ambient temperature during storage/transportation		
• min.	-40 °C	-40 °C
• max.	70 °C	70 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)

Technical specifications

Article number	6AG1341-1AH02-7AE0	6AG1341-1CH02-7AE0
Based on	6ES7341-1AH02-0AE0 SIPLUS S7-300 CP 341 RS232C	6ES7341-1CH02-0AE0 SIPLUS S7-300 CP 341 RS422/485
Resistance		
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 communication

SIPLUS CP 342-5

Overview



DP-M	DP-S	FMS	PG/OP	S7/S5
●	●		●	●

- PROFIBUS DP device with electrical interface for connecting the SIMATIC S7-300 to PROFIBUS at up to 12 Mbps (including 45.45 Kbps)
- Communications services:
- PROFIBUS DP
- PG/OP communication (OP multiplexing)
- S7 communication (client, server)
- Open communication (SEND/RECEIVE)
- Easy configuring and programming via PROFIBUS
- Cross-network PG communication using S7 routing
- Modules can be replaced without a PG

Note:

SIPLUS extreme products are based on Siemens Industry standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CP 342-5 communications processor

(Extended temperature range and exposure to environmental substances)

Communications processor for electrical connection of SIMATIC S7-300 to PROFIBUS at up to 12 Mbps, with electronic manual on CD-ROM

Ambient temperature range
-25 ... +70 °C

6AG1342-5DA03-7XE0

Accessories

See SIMATIC CP 342-5 communications processor, page 5/241

Technical specifications

Article number	6AG1342-5DA03-7XE0
Based on	6GK7342-5DA03-0XE0
product type designation	SIPLUS NET CP 342-5
ambient conditions	
ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
installation altitude at height above sea level maximum	5 000 m
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
relative humidity	
• with condensation according to IEC 60068-2-38 maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets
resistance to biologically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request
• conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
resistance to chemically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
• conformity according to EN 60721-3-6	Yes
resistance to mechanically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
• conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
protection class IP	IP20

Overview



ISO	TCP/ UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
	●	●	●			●	●

G_1K10_XX_10171

- Connection for the SIMATIC S7-300 to Industrial Ethernet (not for SINUMERIK)
 - 2 x RJ45 interface for 10/100 Mbps full/half duplex connection (with autosensing for automatic switchover and autocrossover function)
 - Integrated 2-port real-time switch ERTEC
 - Multi-protocol operation with TCP and UDP transport protocol and PROFINET IO
 - Keep Alive function
- Communications services:
 - Open communication (TCP/IP and UDP)
 - PG/OP communication
 - S7 communication (server)
 - PROFINET IO device
- Multicast for UDP
- Remote programming and initial commissioning is possible over Industrial Ethernet
- IT communication
 - Web function
- Integration into network management through SNMP
- Configuration with STEP 7
- Cross-network PG/OP communication by means of S7 routing
- Diagnostics possibilities in STEP 7 and via web browser

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CP 343-1 Lean communications processor

For connecting SIMATIC S7-300 to Industrial Ethernet through TCP/IP and UDP, Multicast, S7 communication, open communication (SEND/RECEIVE), FETCH/WRITE, PROFINET IO device, integral 2-port switch ERTEC, comprehensive diagnostics facilities, module replacement without programming device, SNMP, initial commissioning over LAN; with electronic manual on CD-ROM

For industrial applications with extended ambient conditions

Extended temperature range and exposure to environmental substances

6AG1343-1CX10-2XE0**Accessories***Consumables***IE FC RJ45 plug 180**

(Extended temperature range and exposure to environmental substances)

180° cable outlet

- 1 unit

6AG1901-1BB10-7AA0**IE FC TP standard cable GP 2 x 2 (type A)**

4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10**IE FC stripping tool**

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00*Programming tools***STEP 7 Version 5.7**

See chapter 12

STEP 7 Professional V19

See chapter 12

SOFTNET-S7 for Industrial Ethernet

See SiePortal

Software for S7 and open communication, incl. OPC server, PG/OP communication, and NCM PC/STEP 7 Professional V12, runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 communication

SIPLUS S7-300 CP 343-1 Lean**Technical specifications**

Article number	6AG1343-1CX10-2XE0	Article number	6AG1343-1CX10-2XE0
Based on	6GK7343-1CX10-0XE0	Based on	6GK7343-1CX10-0XE0
product type designation	SIPLUS NET CP343-1 LEAN	product type designation	SIPLUS NET CP343-1 LEAN
ambient conditions		resistance to chemically active substances	
ambient temperature			
• for vertical installation during operation	-25 ... +40 °C	• conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
• for horizontally arranged busbars during operation	-25 ... +60 °C		Yes
• during storage	-40 ... +70 °C	• conformity according to EN 60721-3-6	
• during transport	-40 ... +70 °C	resistance to mechanically active substances	
installation altitude at height above sea level maximum	5 000 m	• conformity according to EN 60721-3-6	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	• conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
relative humidity		coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
• with condensation according to IEC 60068-2-38 maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets	type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
resistance to biologically active substances		product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
• conformity according to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request	protection class IP	IP20
• conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)		

Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
●	●	●	●			●	●

- The connection of SIMATIC S7-300/SINUMERIK 840D powerline to Industrial Ethernet
 - 2 x RJ45 interface for 10/100 Mbps full/half-duplex connection with autosensing/autonegotiation and autocrossover function
 - Integrated 2-port real-time switch ERTEC
 - Multi-protocol operation with ISO, TCP, UDP transport protocol and PROFINET IO
 - Adjustable keep-alive function

- Communications services:
 - Open communication (ISO, TCP/IP, and UDP)
 - PROFINET IO controller or PROFINET IO device
 - PG/OP communication: Cross-network by means of S7 routing
 - S7 communication (client, server, multiplexing)
- Media redundancy (MRP); within an Ethernet network with ring topology, the CP supports the media redundancy procedure MRP (V2.2 or higher).
- Multicast for UDP
- IP address assignment via DHCP, simple PC tool or via the user program (e.g. HMI)
- Access protection via configurable access list
- Remote programming and commissioning via Industrial Ethernet
- Configuration with STEP 7
- Automatic setting of CPU clock setting over Ethernet with NTP or SIMATIC procedure
- Web diagnostics
- Integration in network management systems via SNMP (MIB2 diagnostics information)
- Diagnostics possibilities in STEP 7 and via web browser

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

Article No.

SIPLUS S7-300 CP 343-1 communications processor

For connection of SIMATIC S7-300 to Industrial Ethernet over ISO and TCP/IP; PROFINET IO controller or PROFINET IO device, MRP, integrated 2-port switch ERTEC; S7 communication, open communication (SEND/RECEIVE), FETCH/WRITE, with and without RFC 1006, multicast, DHCP, CPU clock synchronization via SIMATIC procedure and NTP, diagnostics, SNMP, access protection through IP access list, initialization over LAN 10/100 Mbps; with electronic manual on DVD

For industrial applications with extended ambient conditions

Extended temperature range and exposure to environmental substances

6AG1343-1EX30-7XE0

Accessories*Consumables***IE FC RJ45 plug 180**

(Extended temperature range and exposure to environmental substances)

180° cable outlet

- 1 unit

6AG1901-1BB10-7AA0

C-PLUG

6AG1900-0AB10-7AA0

Removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or engineering and application data; can be used for SIMATIC NET products with C-PLUG slot, -40 ... +70 °C, exposure to environmental substances

IE FC TP standard cable GP 2 x 2 (type A)

6XV1840-2AH10

4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

IE FC stripping tool

6GK1901-1GA00

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 communication

SIPLUS S7-300 CP 343-1

Ordering data

Article No.

Article No.

Communication within the application

SIPLUS SCALANCE XC-200 Industrial Ethernet switches

Industrial Ethernet switches with integrated SNMP access, web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; with integrated redundancy manager; incl. operating instructions, Industrial Ethernet network manual and configuration software on CD-ROM

Extended temperature range and exposure to environmental substances

Switches with PROFINET delivery state

- **SIPLUS SCALANCE XC206-2 (ST/BFOC)** with six RJ45 ports 10/100 Mbps and two ST/BFOC ports 100 Mbps

6AG1206-2BB00-7AC2

Programming tools

STEP 7 Version 5.7

See chapter 12

STEP 7 Professional V19

See chapter 12

SOFTNET-S7 for Industrial Ethernet

See SiePortal

Software for S7 and open communication, incl. OPC server, PG/OP communication, and NCM PC/STEP 7 Professional V12, runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A

5

Technical specifications

Article number	6AG1343-1EX30-7XE0
Based on	6GK7343-1EX30-0XE0
product type designation	SIPLUS NET CP 343-1
ambient conditions	
ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
installation altitude at height above sea level maximum	5 000 m
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
relative humidity	
• with condensation according to IEC 60068-2-38 maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets
resistance to biologically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request
• conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)

Article number	6AG1343-1EX30-7XE0
Based on	6GK7343-1EX30-0XE0
product type designation	SIPLUS NET CP 343-1
resistance to chemically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
• conformity according to EN 60721-3-6	Yes
resistance to mechanically active substances	
• conformity according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
• conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
protection class IP	IP20

Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7/S5
●	●	●	●	●	●	●	●

G...JK10...XX...10145

- The connection of SIMATIC S7-300/SINUMERIK 840D powerline to Industrial Ethernet
 - Multi-protocol operation with TCP and UDP transport protocol
 - Adjustable keep-alive function
- Two separate interfaces (integrated network separation):
 - Gigabit interface with one RJ45 port with 10/100/1 000 Mbps, full/half-duplex with auto-sensing capability
 - PROFINET interface with two RJ45 ports with 10/100 Mbps full/half-duplex with auto-sensing and auto-crossover functionality via integrated 2-port switch
- Communications services via both interfaces:
 - Open communication (TCP/IP and UDP): Multicast with UDP, including routing between both interfaces
 - PG/OP communication:
 - Cross-network by means of S7 routing
 - S7 communication (client, server, multiplexing) including routing between both interfaces
 - IT communication:
 - HTTP communication supports access to process data via own web pages;
 - e-mail client function, sending of e-mails directly from user program;
 - FTP communication supports program-controlled FTP client communication;
 - access to data blocks through FTP server

- Communications services via PROFINET interfaces:
 - PROFINET IO controller and IO device with real-time properties (RT and IRT)¹⁾
 - PROFINET CBA
 - IP address assignment via DHCP, simple PC tool or via program block (e.g. for HMI)
 - Configuration with STEP 7
- Media redundancy (MRP); within an Ethernet network with ring topology, the CP supports the media redundancy procedure MRP (V2.2 or higher).
- Access protection by means of configurable IP access list
- Module replacement without programming device; all information is stored on the C-PLUG (also file system for IT functions)
- Extensive diagnostic functions for all modules in the rack
- IT communication
 - Web function
 - E-mail function
 - FTP
- Integration into network management systems through the support of SNMP V1 MIB-II

- 1) possible combinations in parallel operation:
- IO controller with IRT and IO device with RT
 - IO controller with RT and IO device with IRT

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 communication

SIPLUS S7-300 CP 343-1 Advanced

Ordering data

Article No.

Article No.

SIPLUS S7-300 CP 343-1 Advanced communications processor

For connecting the SIMATIC S7-300 to Industrial Ethernet, PROFINET IO controller and IO Device with RT and IRT, MRP, PROFINET CBA, TCP/IP and UDP, S7 communication, open communication (SEND/RECEIVE), FETCH/WRITE with or without RFC 1006, diagnostics extensions, multicast, web server, HTML diagnostics, FTP server, FTP client, email client, CPU clock set via SIMATIC procedure and NTP, access protection via IP access list, SNMP, DHCP, initialization over LAN 10/100 Mbps; with electronic manual on DVD; C-PLUG included in scope of delivery

For industrial applications with extended ambient conditions

Exposure to environmental substances

6AG1343-1GX31-4XE0

Accessories

Consumables

IE FC RJ45 plug 180

(Extended temperature range and exposure to environmental substances)

180° cable outlet

- 1 unit

6AG1901-1BB10-7AA0

SIPLUS C-PLUG

6AG1900-0AB10-7AA0

Removable data storage medium for simple replacement of devices in the event of a fault; for storing configuration or engineering and application data; can be used for SIMATIC NET products with C-PLUG slot, -40 ... +70 °C, exposure to environmental substances

IE FC TP standard cable GP 2 x 2 (type A)

6XV1840-2AH10

4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

IE FC TP standard cable GP 4 x 2

8-wire, shielded TP installation cable for universal applications; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

- AWG22, for connection to IE FC RJ45 modular outlet

6XV1870-2E

- AWG24, for connecting to IE FC RJ45 plug 4 x 2, IE FC M12 plug PRO 4 x 2

6XV1878-2A

IE FC stripping tool

6GK1901-1GA00

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

Communication within the application

SIPLUS SCALANCE XC-200 Industrial Ethernet switches

Industrial Ethernet switches with integrated SNMP access, web diagnostics, copper cable diagnostics and PROFINET diagnostics for configuring line, star and ring topologies; with integrated redundancy manager; incl. operating instructions, Industrial Ethernet network manual and configuration software on CD-ROM

Extended temperature range and exposure to environmental substances

Switches with PROFINET delivery state

- **SIPLUS SCALANCE XC206-2 (ST/BFOC)** with six RJ45 ports 10/100 Mbps and two ST/BFOC ports 100 Mbps

6AG1206-2BB00-7AC2

Programming tools

STEP 7 Version 5.7

See chapter 12

STEP 7 Professional V19

See chapter 12

SOFTNET-S7 for Industrial Ethernet

See SiePortal

Software for S7 and open communication, incl. OPC server, PG/OP communication, and NCM PC/STEP 7 Professional V12, runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A

Technical specifications

Article number	6AG1343-1GX31-4XE0	Article number	6AG1343-1GX31-4XE0
Based on	6GK7343-1GX31-0XE0	Based on	6GK7343-1GX31-0XE0
product type designation	SIPLUS NET CP343-1 ADVANCED	product type designation	SIPLUS NET CP343-1 ADVANCED
ambient conditions		ambient conditions	
ambient temperature		resistance to chemically active substances	
• for vertical installation during operation	0 ... 40 °C	• conformity according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
• for horizontally arranged busbars during operation	0 ... 60 °C		Yes
• during storage	-40 ... +70 °C	• conformity according to EN 60721-3-6	
• during transport	-40 ... +70 °C	resistance to mechanically active substances	
installation altitude at height above sea level maximum	5 000 m	• conformity according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	• conformity according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
relative humidity		coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
• with condensation according to IEC 60068-2-38 maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets	type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
resistance to biologically active substances		product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
• conformity according to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request	protection class IP	IP20
• conformity according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)		

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 communication

SIPLUS TIM 3V-IE for WAN and Ethernet

Overview



- SINAUT communications module SIPLUS TIM for SIMATIC S7-300 for use in a wide area network (WAN)
- IP communication via secure VPN (virtual private network) using the Internet
- Wireless communication via GPRS router, GPRS modem, or radio devices
- Wired communication via Ethernet, DSL, dialup modems or dedicated line modem
- Complete migration of existing wireless, dedicated line and dial-up technology to IP-based network
- Message buffer for seamless recording of data
- Simple configuration and operation without specialist IT knowledge

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS S7.7 TIM 3V-IE communications module

With an RS232 interface for SINAUT communication via a conventional WAN or an IP-based network (WAN or LAN)

6AG1800-3BA00-7AA0

Accessories

Consumables

IE FC TP standard cable GP 2 x 2 (type A)

4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10

IE FC RJ45 plug 180

RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit, -40 ... +70 °C, exposure to environmental substances

6AG1901-1BB10-7AA0

IE FC stripping tool

Preadjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

Technical specifications

Article number	6AG1800-3BA00-7AA0	Article number	6AG1800-3BA00-7AA0
Based on	6NH7800-3BA00	Based on	6NH7800-3BA00
product type designation	SIPLUS SINAUT ST7, TIM 3V-IE	product type designation	SIPLUS SINAUT ST7, TIM 3V-IE
ambient conditions		resistance to chemically active substances	
ambient temperature		<ul style="list-style-type: none"> conformity according to EN 60721-3-3 	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
<ul style="list-style-type: none"> during operation during storage during transport 	-25 ... +70 °C -40 ... +70 °C -40 ... +70 °C	<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes
installation altitude at height above sea level maximum	5 000 m	resistance to mechanically active substances	
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
relative humidity		<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
<ul style="list-style-type: none"> with condensation according to IEC 60068-2-38 maximum 	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets	type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
resistance to biologically active substances		type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
<ul style="list-style-type: none"> conformity according to EN 60721-3-3 conformity according to EN 60721-3-6 	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
		protection class IP	IP20

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 communication

SIPLUS TIM 4R-IE for WAN and Ethernet

Overview



- SINAUT communications module SIPLUS TIM with four interfaces for SIMATIC S7-300 or as a self-contained device for S7-400 for use in a wide area network (WAN)
- For universal use in a SINAUT station, node station and control center
- Internet communication via integrated MSC-VPN tunnel with direct connection to DSL router or operation via IPsec VPN with additional SIMATIC NET components
- Wireless communication via GPRS router, GPRS modem, or radio devices
- Wired communication via Ethernet, DSL, dialup modems or dedicated line modem
- Complete migration of existing wireless, dedicated line and dial-up technology to IP-based network
- Message buffer for seamless recording of data and support of redundant communication paths
- Simple configuration and operation without specialist IT knowledge

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS S77 TIM 4R-IE communications module

With two combined RS232/RS485 interfaces for SINAUT communication via conventional WANs and two RJ45 interfaces for SINAUT communication via IP-based networks (WAN or LAN)

6AG1800-4BA00-7AA0

Accessories

Consumables

IE FC TP standard cable GP 2 x 2 (type A)

4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10

IE FC RJ45 plug 180

RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit, -40 ... +70 °C, exposure to environmental substances

6AG1901-1BB10-7AA0

IE FC stripping tool

Preadjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

Technical specifications

Article number	6AG1800-4BA00-7AA0	Article number	6AG1800-4BA00-7AA0
Based on	6NH7800-4BA00	Based on	6NH7800-4BA00
product type designation	PLUS SINAUT ST7, TIM 4R-IE	product type designation	PLUS SINAUT ST7, TIM 4R-IE
ambient conditions		resistance to chemically active substances	
ambient temperature		<ul style="list-style-type: none"> conformity according to EN 60721-3-3 	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
<ul style="list-style-type: none"> during operation during storage during transport 	-25 ... +70 °C -40 ... +70 °C -40 ... +70 °C	<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes
installation altitude at height above sea level maximum	5 000 m	resistance to mechanically active substances	
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
relative humidity		<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
<ul style="list-style-type: none"> with condensation according to IEC 60068-2-38 maximum 	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets	type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
resistance to biologically active substances		type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
<ul style="list-style-type: none"> conformity according to EN 60721-3-3 conformity according to EN 60721-3-6 	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
		protection class IP	IP20

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 communication

SIPLUS TIM 3V-IE DNP3**Overview**

In a station for the S7-CPU, the new SIPLUS TIM 3V-IE DNP3 communications module V3.0 (TeleControl Interface Module) handles the data traffic with the assigned master system SIMATIC PCS 7 TeleControl V8.0 using the open DNP3 protocol. In addition, the V3.0 module now also supports master and node functionality.

- With the S7-300 housing, the module can be fully integrated into the S7-300 system
- The module has an RS232 interface for the connection of an external modem for data transmission via a conventional WAN or the connection of a Modbus RTU slave to an S7-300 system
- The RJ45 port is used for data transmission via IP-based networks

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS TIM 3V-IE DNP3 communications module****6AG1803-3BA00-7AA0**

With an RS232 interface for SINAUT communication via a conventional WAN and an IP-based network (WAN or LAN)

Accessories*Consumables***IE FC TP standard cable GP 2 x 2 (type A)****6XV1840-2AH10**

4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compliant; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

IE FC RJ45 plug 180

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit, -40 ... +70 °C, exposure to environmental substances

6AG1901-1BB10-7AA0**IE FC stripping tool****6GK1901-1GA00**

Preadjusted stripping tool for fast stripping of Industrial Ethernet FC cables

Technical specifications

Article number	6AG1803-3BA00-7AA0	Article number	6AG1803-3BA00-7AA0
Based on	6NH7803-3BA00-0AA0	Based on	6NH7803-3BA00-0AA0
product type designation	SIPLUS NET TIM 3V-IE DNP3	product type designation	SIPLUS NET TIM 3V-IE DNP3
ambient conditions		resistance to chemically active substances	
ambient temperature		<ul style="list-style-type: none"> conformity according to EN 60721-3-3 	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
<ul style="list-style-type: none"> during operation during storage during transport 	-25 ... +70 °C -40 ... +70 °C -40 ... +70 °C	<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes
installation altitude at height above sea level maximum	5 000 m	resistance to mechanically active substances	
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
relative humidity		<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
<ul style="list-style-type: none"> with condensation according to IEC 60068-2-38 maximum 	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets	type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
resistance to biologically active substances		type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
<ul style="list-style-type: none"> conformity according to EN 60721-3-3 conformity according to EN 60721-3-6 	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
		protection class IP	IP20

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 communication

SIPLUS TIM 4R-IE DNP3

Overview



In a station for the S7-CPU, the SIPLUS communication module TIM 4R-IE DNP3 (TeleControl Interface Module) handles the data exchange with the assigned SIMATIC PCS7 TeleControl V8.0 master system using the open DNP3 protocol. In addition, the V3.0 module now also supports master and node functionality.

- With the double-width S7-300 housing, the module can be fully integrated into the S7-300 system
- Can be connected as a stand-alone module to a SIMATIC S7-400 and SIMATIC S7-400 H System
- Two RS232/RS485 interfaces support connection of an external modem for data transmission via a conventional WAN or of a Modbus RTU slave to an S7-300 system
- The module has two RJ45 interfaces for data transmission via IP-based networks
- By using physically separate connection paths, the module permits media redundancy without loss of data during the switchover

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS TIM 4R-IE DNP3 communications module

With two combined RS232/RS485 interfaces for SINAUT communication via conventional WANs and two RJ45 interfaces for SINAUT communication via IP-based networks (WAN or LAN)

6AG1803-4BA00-7AA0

Accessories

Consumables

IE FC TP standard cable GP 2 x 2 (type A)

4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10

IE FC RJ45 plug 180

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface

- 1 pack = 1 unit, -40 ... +70 °C, exposure to environmental substances

6AG1901-1BB10-7AA0

IE FC stripping tool

Preadjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00

Technical specifications

Article number	6AG1803-4BA00-7AA0	Article number	6AG1803-4BA00-7AA0
Based on	6NH7803-4BA00-0AA0	Based on	6NH7803-4BA00-0AA0
product type designation	SIPLUS NET TIM 4R-IE DNP3	product type designation	SIPLUS NET TIM 4R-IE DNP3
ambient conditions		resistance to chemically active substances	
ambient temperature		<ul style="list-style-type: none"> conformity according to EN 60721-3-3 	Yes; Class 3C4 (RH < 75 %) incl. salt spray in accordance with EN 60068-2-52 (Severity 3). The supplied plug covers must remain in place on the unused interfaces during operation.
<ul style="list-style-type: none"> during operation during storage during transport 	-25 ... +70 °C -40 ... +70 °C -40 ... +70 °C	<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes
installation altitude at height above sea level maximum	5 000 m	resistance to mechanically active substances	
ambient condition relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes; Class 3S4 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
relative humidity		<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes; Class 6S3 incl. sand, dust. The supplied plug covers must remain in place over the unused interfaces during operation.
<ul style="list-style-type: none"> with condensation according to IEC 60068-2-38 maximum 	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	coating for equipped printed circuit board according to EN 61086	Yes; Class 2 for high availability
chemical resistance to commercially available cooling lubricants	Yes; incl. airborne diesel and oil droplets	type of coating protection against pollution according to EN 60664-3	Yes; Protection of the type 1
resistance to biologically active substances		type of test of the coating according to MIL-I-46058C	Yes; Coating discoloration during service life possible
<ul style="list-style-type: none"> conformity according to EN 60721-3-3 	Yes; Class 3B2 mold and fungal spores (excluding fauna), Class 3B3 on request	product conformity of the coating Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, class A
<ul style="list-style-type: none"> conformity according to EN 60721-3-6 	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	protection class IP	IP20

SIMATIC S7-300 Advanced Controllers

I/O modules

Special modules

SM 374 simulator

Overview



- Simulator module for program testing during commissioning and ongoing operation
- For the simulation of sensor signals using switches
- For display of signal conditions on the outputs using LED
- Simulation of
 - 16 inputs or
 - 16 outputs or
 - 8 inputs and 8 outputs
- Function can be directly adjusted on the module using a screwdriver

Ordering data

Article No.

SIMATIC S7-300, simulator module SM 374 For simulating 16 inputs or 16 outputs or 8 inputs and 8 outputs 16 switches, 16 LEDs	6ES7374-2XH01-0AA0
Accessories	
SIMATIC S7, bus connector (spare part)	6ES7390-0AA00-0AA0
SIMATIC S7-300, labeling strip (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XX00-0AA0
SIMATIC S7, labeling cover (spare part) For modules with 20-pin front connector, 10 units per packing unit	6ES7392-2XY00-0AA0
Labeling sheets for machine labeling	
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX00-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX00-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX00-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX00-0AA0

Technical specifications

Article number	6ES7374-2XH01-0AA0 SM 374 Simulation unit 16I/16O
General information	
Product type designation	SM 374
Input current	
from backplane bus 5 V DC, max.	80 mA
Power loss	
Power loss, typ.	0.35 W
Digital inputs	
Number of digital inputs	16; Switch
Digital outputs	
Number of digital outputs	16; LEDs

Article number	6ES7374-2XH01-0AA0 SM 374 Simulation unit 16I/16O
Potential separation	
Potential separation digital inputs	No
<ul style="list-style-type: none"> • between the channels and backplane bus 	
Potential separation digital outputs	No
<ul style="list-style-type: none"> • between the channels and backplane bus 	
Dimensions	
Width	40 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	190 g

Overview



- Dummy module for reserving slots for non-parameterized signal modules
- Structure and address allocation is retained when replaced with a signal module

Ordering data

Article No.

SIMATIC S7-300, DM 370 dummy module 6ES7370-0AA01-0AA0

Dummy module; used for module replacement

Accessories

SIMATIC S7, bus connector (spare part) 6ES7390-0AA00-0AA0

SIMATIC S7-300, labeling strip (spare part) 6ES7392-2XX00-0AA0

For modules with 20-pin front connector,
10 units per packing unit

SIMATIC S7, labeling cover (spare part) 6ES7392-2XY00-0AA0

For modules with 20-pin front connector,
10 units per packing unit

Labeling sheets for machine labeling

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 6ES7392-2AX00-0AA0

10 labeling strips/sheet,
for signal modules (16 channels),
material: film, pre-perforated for
printing with laser printer,
10 sheets per packing unit

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 6ES7392-2BX00-0AA0

10 labeling strips/sheet,
for signal modules (16 channels),
material: film, pre-perforated for
printing with laser printer,
10 sheets per packing unit

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 6ES7392-2CX00-0AA0

10 labeling strips/sheet,
for signal modules (16 channels),
material: film, pre-perforated for
printing with laser printer,
10 sheets per packing unit

SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 6ES7392-2DX00-0AA0

10 labeling strips/sheet,
for signal modules (16 channels),
material: film, pre-perforated for
printing with laser printer,
10 sheets per packing unit

Technical specifications

Article number	6ES7370-0AA01-0AA0 DM 370 DUMMY module
General information	
Product type designation	DM 370
Input current	
from backplane bus 5 V DC, max.	5 mA
Power loss	
Power loss, max.	0.03 W
Digital inputs	
Number of digital inputs	0

Article number	6ES7370-0AA01-0AA0 DM 370 DUMMY module
Digital outputs	
Number of digital outputs	0
Dimensions	
Width	40 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	180 g

SIMATIC S7-300 Advanced Controllers

I/O modules

SIPLUS S7-300 special modules

SIPLUS S7-300 DM 370

Overview



- Dummy module for reserving slots for unconfigured signal modules
- Retention of design and address assignment when replacing with a signal module

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS S7-300 DM 370 dummy module

for use when replacing modules

Extended temperature range and exposure to media

6AG1370-0AA01-7AA0

Accessories

Consumables

Bus connectors

1 unit (spare part)

6ES7390-0AA00-0AA0

Labeling strips

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XX00-0AA0

Label cover

10 units (spare part)

For modules with 20-pin front connector

6ES7392-2XY00-0AA0

Labeling sheets for machine printing

For modules with 20-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

6ES7392-2AX00-0AA0

Light beige

6ES7392-2BX00-0AA0

Yellow

6ES7392-2CX00-0AA0

Red

6ES7392-2DX00-0AA0

Technical specifications

Article number	6AG1370-0AA01-7AA0
Based on	6ES7370-0AA01-0AA0 SIPLUS S7-300 dummy module
Ambient conditions	
Ambient temperature during operation	
• min.	-40 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *

Article number	6AG1370-0AA01-7AA0
Based on	6ES7370-0AA01-0AA0 SIPLUS S7-300 dummy module
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!

Overview



- For the simple and user-friendly connection of sensors and actuators to the S7-300 I/O modules
- For maintaining the wiring when replacing modules ("permanent wiring")
- With mechanical coding to avoid errors when replacing modules

Ordering data

Article No.

Ordering data	Article No.
Front connectors	
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin	6ES7392-1AJ00-0AA0
SIMATIC S7-300, front connector For signal modules with screw contacts, 20-pin 100 units per packing unit	6ES7392-1AJ00-1AB0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 20-pin	6ES7392-1BJ00-0AA0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 20-pin 100 units per packing unit	6ES7392-1BJ00-1AB0
SIMATIC S7-300, front connector With screw contacts, 40-pin	6ES7392-1AM00-0AA0
SIMATIC S7-300, front connector With screw contacts, 40-pin 100 units per packing unit	6ES7392-1AM00-1AB0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin	6ES7392-1BM01-0AA0
SIMATIC S7-300, front connector For signal modules with spring-loaded contacts, 40-pin 100 units per packing unit	6ES7392-1BM01-1AB0
SIMATIC S7-300, raised front door For 32-channel SM, allows the connection of 1.3 mm ² /16 AWG conductors 5 units per packing unit	6ES7328-0AA00-7AA0
SIMATIC S7-300, raised front door For safety modules, allows the connection of 1.3 mm ² /16 AWG cables 5 units per packing unit incl. labeling strips and cabling diagram (yellow)	6ES7328-7AA10-0AA0
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

SIMATIC S7-300 Advanced Controllers

I/O modules

Connection system

System cabling for SIMATIC S7-300 and ET 200M

Overview



Wiring of SIMATIC S7 I/O modules with the sensors/actuators is a significant factor with respect to time/cost overhead, configuring, control cabinet installation, procurement and ease of service.

With SIMATIC TOP connect system cabling, it is simple and quick to establish a reliable connection for your SIMATIC S7-300 or ET 200M.

With the TIA Selection Tool, a mouse click is all that is required to configure the connection from the SIMATIC S7 module to the I/O. The program automatically checks for plausibility and generates a parts list for the selected connection components that can then be ordered in the Industry Mall.

More information can be found on the Internet at

<http://www.siemens.com/tia-selection-tool>

Design

Two cabling variants are available for a wide range of control cabinet concepts:


Fully modular connection

Each component is individually inserted.

The system consists of:

- Front connector module
- Connecting cable
- Connection modules in the following versions: basic module, signal module and function module

Connection errors are thus practically excluded and installation overhead is minimized. Systematic connection of the SIMATIC system. The assembly work for the connecting cables is drastically reduced thanks to the use of pre-assembled cables sold by the meter.

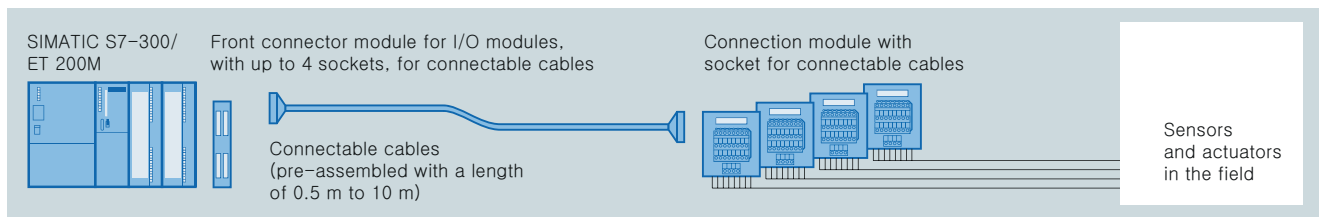

SIMATIC TOP connect for S7-300/ET 200M, fully modular connection

Flexible connection


Consisting of:

- Front connector with screw-type or crimp connection
- Front connector with fixed single cores
- Single cores also available with UL/CSA-certified cores

The blue wires are numbered sequentially and can be routed direct to each element in the control cabinet. The numbering of the single cores corresponds to the coding of the front connector contacts.

In comparison to conventional single wiring, there is a cost saving of 50% for assembly, since the single cores that have already been checked on the connector are fixed.

This eliminates the time-consuming assembly of up to 40 individual wires per module.

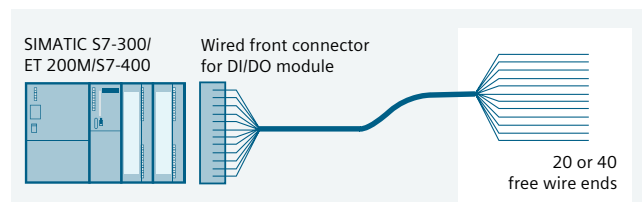

SIMATIC TOP connect for S7-300/ET 200M, flexible connection

Overview

The fully modular connection for connecting to the digital I/O modules of the SIMATIC S7-300 or ET 200M consists of modified front connectors, called front connector modules, preassembled connecting cables of various lengths, and terminal modules. Suitable components can be selected for the application in question and joined by means of simple plug-in connections. The terminal modules are used instead of conventional terminal blocks and act as the interface to the sensors and actuators.

Benefits

- Front connector module, connecting cable and terminal module are easy to plug in
- Fast, low-cost wiring
- For digital and analog signals, supply voltage can be connected to the front connector module or terminal module
- Reduction in wiring errors, clear control cabinet wiring
- Distribution of digital signals by byte or quadruple byte
- Each component can be replaced individually
- Pre-assembled cables can be used in different lengths

Design**Front connector module**

Modified front connectors, called front connector modules, are available for connecting to the module. These are plugged into the module to be wired instead of the front connector. Many different front connector module versions, for digital I/O modules, 24 V 2-ampère modules or analog I/O modules. The connecting cables are plugged into these front connector modules.

Connecting cable

There are different versions of the connecting cable.

As a pre-assembled 16-pin or 50-pin round cable (shielded or unshielded) it is available in lengths up to 10 m.

When assembled, there are one or two insulation displacement connectors (female ribbon connectors) at both ends of the cable.

The connecting cable connects the front connector module with the terminal module.

Terminal module

The system has both digital and analog terminal modules for connecting the I/O signals. These are snapped onto the DIN rail. The terminal modules with basic or signal functionality are available in 1-byte or 4-byte versions.

Terminal modules are available for two different connection methods: with push-in or screw-type terminals. The potential can be fed in at the terminal module or at the front connector module.


If other voltage or power levels are required in the field, the terminal module for TPRo or TPOo output signals is used. For the TPRo terminal module, relays are used for the implementation. For the TPOo terminal module, optocouplers are used for the implementation. This converts the 24 V DC output signal simply and reliably to another voltage or power level. If 230 V AC or 110 V AC input signals have to be transmitted to the controller in the field, a terminal module with relay TPRI is available that simply converts the 230/110 V AC signal to 24 V DC. This means that there is always the same voltage level on the module side.

Use with optocouplers for the TPRo relay modules

If higher switching frequencies of the relay terminal module are required for the output signals, the relay can simply be replaced with an optocoupler (note technical specifications) in order to increase the switching frequency.

Shield plate

The shield plate is latched onto the terminal module for three-wire initiators or optionally onto the terminal module for analog signals and then snapped onto the DIN rail with the terminal module. With the shield connection clamps, optimal shield connection is achieved between the shielded round-sheath ribbon cable or the shielded field cables and the grounded mounting rail.

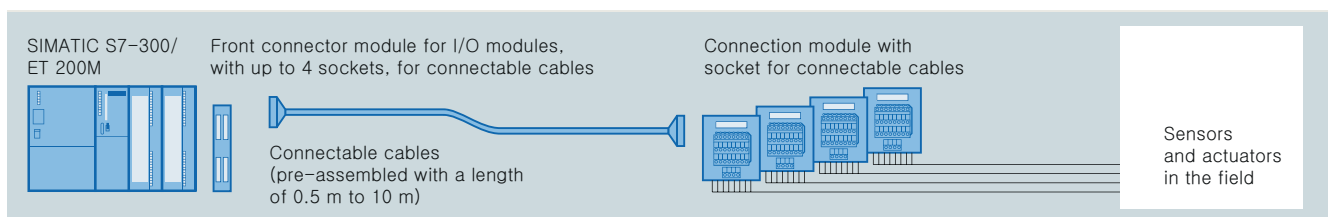

SIMATIC TOP connect for S7-300/ET 200M, fully modular connection

SIMATIC S7-300 Advanced Controllers

I/O modules

Connection system

System cabling for SIMATIC S7-300 and ET 200M > Fully modular connection

Ordering data

Article No.

Article No.

Front connector module¹⁾

Front connector module (compact CPU 312C)

Power supply via
• Screw terminals

6ES7921-3AK20-0AA0

Front connector module 40-pin

Power supply via
• Screw terminals

6ES7392-1AM00-0AA0

Front connector module (digital 2 x 8 I/O)

Power supply via
• Spring-loaded terminals
• Screw terminals

6ES7921-3AA00-0AA0
6ES7921-3AB00-0AA0

Front connector module (digital 4 x 8 I/O)

Power supply via
• Spring-loaded terminals
• Screw terminals

6ES7921-3AA20-0AA0
6ES7921-3AB20-0AA0

Front connector module (1 x 8 outputs) for 2-ampere digital outputs

Power supply via
• Spring-loaded terminals
• Screw terminals

6ES7921-3AC00-0AA0
6ES7921-3AD00-0AA0

Front connector module 20-pin (analog)

Power supply via
• Spring-loaded terminals

6ES7921-3AF00-0AA0

Front connector module 40-pin (analog)

Power supply via
• Spring-loaded terminals

6ES7921-3AF20-0AA0

¹⁾ The terminal assignments of these front connector modules are unambiguous, so dimension drawings can be omitted.

Connecting cables

Connecting cables for SIMATIC S7-300

Pre-assembled round cable

16-pin, 0.14 mm²

Unshielded

- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 2.5 m
- 3.0 m
- 4.0 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7923-0BA50-0CB0
6ES7923-0BB00-0CB0
6ES7923-0BB50-0CB0
6ES7923-0BC00-0CB0
6ES7923-0BC50-0CB0
6ES7923-0BD00-0CB0
6ES7923-0BE00-0CB0
6ES7923-0BF00-0CB0
6ES7923-0BG50-0CB0
6ES7923-0BJ00-0CB0
6ES7923-0CB00-0CB0

Shielded

- 1.0 m
- 2.0 m
- 2.5 m
- 3.0 m
- 4.0 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7923-0BB00-0DB0
6ES7923-0BC00-0DB0
6ES7923-0BC50-0DB0
6ES7923-0BD00-0DB0
6ES7923-0BE00-0DB0
6ES7923-0BF00-0DB0
6ES7923-0BG50-0DB0
6ES7923-0BJ00-0DB0
6ES7923-0CB00-0DB0Version 4 x 16 to 1 x 50-pin,
0.14 mm²

Unshielded

- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 2.5 m
- 3.0 m
- 4.0 m
- 5.0 m
- 6.5 m
- 8.0 m
- 10.0 m

6ES7923-5BA50-0EB0
6ES7923-5BB00-0EB0
6ES7923-5BB50-0EB0
6ES7923-5BC00-0EB0
6ES7923-5BC50-0EB0
6ES7923-5BD00-0EB0
6ES7923-5BE00-0EB0
6ES7923-5BF00-0EB0
6ES7923-5BG50-0EB0
6ES7923-5BJ00-0EB0
6ES7923-5CB00-0EB0

Ordering data

Article No.

Article No.

Connection modules

Connection module TP1

For 1-wire connection, for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0AA20-0AC0
6ES7924-0AA20-0AA0
6ES7924-0AA20-0BC0
6ES7924-0AA20-0BA0

For 1-wire connection, for 50-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-2AA20-0AC0
6ES7924-2AA20-0AA0
6ES7924-2AA20-0BC0
6ES7924-2AA20-0BA0

Connection module TP3

For 3-wire connection, for 16-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs
- Push-in terminals with LEDs and one isolating terminal per channel
- Screw-type terminals with LEDs and one isolating terminal per channel
- Push-in terminals with LEDs and fuse per channel
- Screw-type terminals with LEDs and fuse per channel

6ES7924-0CA20-0AC0
6ES7924-0CA20-0AA0
6ES7924-0CA20-0BC0
6ES7924-0CA20-0BA0
6ES7924-0CH20-0BC0
6ES7924-0CH20-0BA0
6ES7924-0CL20-0BC0
6ES7924-0CL20-0BA0

For 3-wire connection, for 50-pin connecting cables

- Push-in terminals without LEDs
- Screw-type terminals without LEDs
- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-2CA20-0AC0
6ES7924-2CA20-0AA0
6ES7924-2CA20-0BC0
6ES7924-2CA20-0BA0

Connection module TPPro

Relay module for 8 outputs, relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BD20-0BC0
6ES7924-0BD20-0BA0

Connection module TPRI

Relay module for 8 inputs (110 V AC), relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BG20-0BC0
6ES7924-0BG20-0BA0

Connection module TPRI

Relay module for 8 inputs (230 V AC), relay as normally open contact

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BE20-0BC0
6ES7924-0BE20-0BA0

Connection module TPOO

Optocoupler module for 8 outputs (max. 24 V DC/4 A)

- Push-in terminals with LEDs
- Screw-type terminals with LEDs

6ES7924-0BF20-0BC0
6ES7924-0BF20-0BA0

Connection module for digital output modules 2 A

Connection module TP2

- Push-in terminals without LEDs
- Screw-type terminals without LEDs

6ES7924-0BB20-0AC0
6ES7924-0BB20-0AA0

Connection module for analog modules

TPA connection module

- Push-in terminals without LEDs
- Screw-type terminals without LEDs

6ES7924-0CC21-0AC0
6ES7924-0CC21-0AA0

Accessories

Shield plate

For connection module 8 bits; Pck. unit = 4 units (for 16-pin connecting cable connection)

6ES7928-1AA20-4AA0

Shield connection clamp

For shield plate at SIMATIC end
PU = 10 units

6ES7590-5BA00-0AA0

For shield plate at field end,
2 x 2 to 6 mm

6ES7390-5AB00-0AA0

For shield plate at field end,
3 to 8 mm

6ES7390-5BA00-0AA0

For shield plate at field end,
4 to 13 mm

6ES7390-5CA00-0AA0

Relay

For TPPO 24 V DC, coil voltage 24 V DC, output 230 V AC, Pck. unit = 4 units

6ES7928-3AA20-4AA0

For TPRI 110 V AC, coil voltage 110 V AC, Pck. unit = 4 units

6ES7928-3EA20-4AA0

For TPRI 230 V AC, coil voltage 230 V AC, Pck. unit = 4 units

6ES7928-3BA20-4AA0

Solid-state relay for TPPO

Excitation voltage 24 V DC, output 230 V AC, Pck. unit = 4 units

6ES7928-3CA20-4AA0

Excitation voltage 24 V DC, output 60 V DC, Pck. unit = 4 units

6ES7928-3DA20-4AA0

Housing cover for connection module

TP1 8 bits, Pck. unit = 4 units

6ES7928-5AA20-4AA0

TP2 / TP3 / TPA 8 bits, Pck. unit = 4 units

6ES7928-5BA20-4AA0

TP3 32 bits, Pck. unit = 4 units

6ES7928-5CA20-4AA0

TP1 32 bits / TP3 switch / TPPO 8 bits, Pck. unit = 4 units

6ES7928-5DA20-4AA0

TPA 32 bits / TP3 fuse / TPRI / TPOO 8 bits, Pck. unit = 4 units

6ES7928-5EA20-4AA0

Fuses

0.6 A, Pck. unit = 10 units

6ES7928-6AA20-0AA0

SIMATIC S7-300 Advanced Controllers

I/O modules

Connection system

System cabling for SIMATIC S7-300 and ET 200M > Fully modular connection

Technical specifications for connector modules

Technical specifications of the front connector module

Rated operating voltage	24 V DC
Max. permissible operating voltage	60 V DC
Max. permissible continuous current	1 A
• Per connector pin	
Max. permissible total current	4 A/byte
Permissible ambient temperature	0 to +60 °C
Test voltage	0.5 kV, 50 Hz, 60 sec.
Clearances and creepage distances	IEC 664 (1980), IEC 664 A (1981), in accordance with DIN VDE 0110 (01.89), overvoltage class II, pollution degree 2

Wiring rules for the front connector modules

SIMATIC TOP connect front connector module, connection for potential infeed

	Spring-loaded connections	Screw-type system
Modules up to 4 connections		
Connectable cable cross-sections		
• Solid cables	No	
• Flexible cables with/without wire end ferrule	0.25 to 1.5 mm ²	
Number of cables per connection	1 or a combination of 2 wires up to 1.5 mm ² (total) in a common wire end ferrule	
Diameter of the cable insulation, max.	3.1 mm	
Stripped length of the cables		
• Without insulating collar	6 mm	
• With insulating collar	-	
Wire end ferrules according to DIN 46228		
• Without insulating collar	Form A, 5 to 7 mm long	
• With insulating collar 0.25 to 1.0 mm ²	-	
• With insulating collar 1.5 mm ²	-	
Blade width of the screwdriver	3.5 mm (cylindrical design)	
Tightening torque for connecting the cables	-	0.4 to 0.7 Nm

SIMATIC TOP connect front connector module, connection for potential infeed

	Spring-loaded connections	Screw-type system
Modules up to 8 connections		
Connectable cable cross-sections		
• Solid cables	No	
• Flexible cables with/without wire end ferrule	0.25 to 0.75 mm ²	
Number of cables per connection	1 or a combination of 2 wires up to 0.75 mm ² (total) in a common wire end ferrule	
Diameter of the cable insulation, max.	2.0 mm	
Stripped length of the cables		
• Without insulating collar	6 mm	
• With insulating collar	-	
Wire end ferrules according to DIN 46228		
• Without insulating collar	Form A, 5 to 7 mm long	
• With insulating collar 0.25 to 1.0 mm ²	-	
• With insulating collar 1.5 mm ²	-	
Blade width of the screwdriver	3.5 mm (cylindrical design)	
Tightening torque for connecting the cables	-	0.4 to 0.7 Nm

Technical specifications for connection cable

Technical specifications of connecting cable from SIMATIC S7 to connection module

Operating voltage	60 V DC
Continuous current per signal conductor	1 A
Max. total current	4 A/byte
Operating temperature	0 to +60 °C
Outer diameter of pre-assembled round cable in mm unshielded/shielded (16-pole)	Approx. 6.5/7.0

Overview



Flexible connection enables fast, direct connection of the SIMATIC S7-300/ET 200M input/output modules to the individual elements in the control cabinet.

Attached single cores reduce the wiring outlay.

Core cross-sections of 0.5 mm² allow higher currents, too.

Technical specifications

Front connector with single cores for 16 channels	
Rated operating voltage	24 V DC
Permissible continuous current with simultaneous load of all wires, max.	1.5 A
Permissible ambient temperature	0 to 60 °C
Core type	H05V-K or with UL 1007/1569; CSA TR64
Number of single cores	20
Core cross-section	0.5 mm ² ; Cu
Bundle diameter in mm	approx. 15
Core color	Blue, RAL 5010
Designation of cores	Numbered from 1 to 20 (front connector contact = core number)
Assembly	Screw-type or crimp contacts

Front connector with single cores for 32 channels	
Rated operating voltage	24 V DC
Permissible continuous current with simultaneous load of all wires, max.	1.5 A
Permissible ambient temperature	0 to 60 °C
Core type	H05V-K or with UL 1007/1569; CSA TR64
Number of single cores	40
Core cross-section	0.5 mm ² ; Cu
Bundle diameter in mm	approx. 17
Core color	Blue, RAL 5010
Designation of cores	Numbered from 1 to 40 (front connector contact = core number)
Assembly	Screw-type or crimp contacts

Ordering data

Article No.

Front connector with single wires for 16-channel digital modules SIMATIC S7-300, 20 x 0.5 mm²
Core type H05V-K
Screw version

Packaging unit: 1 unit

Length:

- 2.5 m
- 3.2 m
- 5 m
- Custom lengths

6ES7922-3BC50-0AB0
6ES7922-3BD20-0AB0
6ES7922-3BF00-0AB0
On request

Packaging unit: 5 units

Length:

- 2.5 m
- 3.2 m
- 5.0 m

6ES7922-3BC50-5AB0
6ES7922-3BD20-5AB0
6ES7922-3BF00-5AB0

Crimp version

Packaging unit: 1 unit

Length:

- 2.5 m
- 3.2 m
- 5.0 m
- Custom lengths

6ES7922-3BC50-0AF0
6ES7922-3BD20-0AF0
6ES7922-3BF00-0AF0
On request

Core type UL/CSA-certified
Screw version

Packaging unit: 1 unit

Length:

- 3.2 m
- 5.0 m

6ES7922-3BD20-0UB0
6ES7922-3BF00-0UB0

Front connector with single wires for 32-channel digital modules SIMATIC S7-300, 40 x 0.5 mm²
Core type H05V-K
Screw version

Packaging unit: 1 unit

Length:

- 2.5 m
- 3.2 m
- 5.0 m
- Custom lengths

6ES7922-3BC50-0AC0
6ES7922-3BD20-0AC0
6ES7922-3BF00-0AC0
On request

Packaging unit: 5 units

Length:

- 2.5 m
- 3.2 m
- 5.0 m

6ES7922-3BC50-5AC0
6ES7922-3BD20-5AC0
6ES7922-3BF00-5AC0

Crimp version

Packaging unit: 1 unit

Length:

- 2.5 m
- 3.2 m
- 5.0 m
- Custom lengths

6ES7922-3BC50-0AG0
6ES7922-3BD20-0AG0
6ES7922-3BF00-0AG0
On request

Core type UL/CSA-certified
Screw version

Packaging unit: 1 unit

Length:

- 3.2 m
- 5.0 m

6ES7922-3BD20-0UC0
6ES7922-3BF00-0UC0

SIMATIC S7-300 Advanced Controllers

I/O modules

Connection system

System cabling for SIMATIC S7-300 and ET 200M > Front connectors with crimp connections

Design

The front connector is available in two versions:

The 20-pin front connector comprises:

- 20 crimp contact connections for the wiring
- Strain relief for the cables
- Unlocking button for unlatching the front connector when replacing the module
- Receptacle for coding element attachment; there are two coding elements with attachments on the module. The attachments latch into the front connector when inserted for the first time.

The 40-pin front connector comprises:

- 40 crimp contact connections for the wiring
- Strain relief for the cables
- Locking screw for fixing and detaching the front connector when the module is replaced
- Receptacle for coding element attachment; there is one two coding element with attachment on the module. The attachment latches into the front connector when inserted for the first time.

Integration

Use of the 20-pole front connector with

- 16-channel signal modules
- Function modules
- CPU 312 IFM

Use of the 40-pole front connector with

- 32-channel signal modules
- Compact CPUs

Ordering data

Article No.

Front connector 20-pin, crimp version without crimp contacts

Packing unit 100 units

6ES7921-3AH00-1AA0

Front connector 40-pin, crimp version without crimp contacts

Packing unit 100 units

6ES7921-3AH20-1AA0

Accessories

Crimp contacts for front connectors

6XX3070

Packing unit 250 units

Crimping tool

6XX3071

For crimping the crimp contacts

Overview



The design and functionality of the SIMATIC PS307 single-phase load power supply (system and load current supply) with automatic range switching of the input voltage are an optimal match to the SIMATIC S7-300 PLC. The supply to the CPU is quickly established by means of the connecting comb that is supplied with the system and load current supply. It is also possible to provide a 24 V supply to other S7-300 system components, input/output circuits of the input/output modules and, if necessary, the sensors and actuators. Comprehensive certifications such as UL and GL enable universal use (does not apply to outdoor use).

Ordering data

Article No.

PS307 load current supply, 2 A	6ES7307-1BA01-0AA0
incl. connecting comb Input: 120/230 V AC Output: 24 V DC/2 A	
SIMATIC S7-300 Outdoor, 2 A	6ES7305-1BA80-0AA0
Stabilized power supply PS305 Input: 24 ... 110 V DC Output: 24 V DC/2 A	
PS307 load current supply, 5 A	6ES7307-1EA01-0AA0
incl. connecting comb Input: 120/230 V AC Output: 24 V DC/5 A	
SIMATIC S7-300 Outdoor, 5 A	6ES7307-1EA80-0AA0
PS307 stabilized power supply Input: 120/230 V AC Output: 24 V DC/5 A	
PS307 load current supply, 10 A	6ES7307-1KA02-0AA0
Input: 120/230 V AC Output: 24 V DC/10 A	
Accessories	
SIMATIC S7-300 mounting adapter	6EP1971-1BA00
For snapping the new PS307 onto a 35 mm DIN rail (EN 60715) Spare part	
SIMATIC S7-300 mounting adapter	6ES7390-6BA00-0AA0
For snapping the PS307 onto a 35 mm DIN rail	

Technical specifications

Article number	6ES7307-1BA01-0AA0	6ES7305-1BA80-0AA0	6ES7307-1EA01-0AA0	6ES7307-1EA80-0AA0	6ES7307-1KA02-0AA0
product brand name	PS 307	PS 305 Outdoor	PS 307	PS 307 Outdoor	PS 307
type of current supply	24 V/2 A	24 V/2 A	24 V/5 A	24 V/5 A	24 V/10 A
input					
type of the power supply network	1-phase AC	DC voltage	1-phase AC	1-phase AC	1-phase AC
supply voltage at AC	Automatic range selection		Automatic range selection	Set by means of selector switch on the device	Automatic range selection
supply voltage	120 V/230 V		120 V/230 V	120 V/230 V	120 V/230 V
input voltage 1 at AC	85 ... 132 V		85 ... 132 V	93 ... 132 V	85 ... 132 V
input voltage 2 at AC	170 ... 264 V		170 ... 264 V	187 ... 264 V	170 ... 264 V
supply voltage at DC		24 ... 110 V			
input voltage at DC		16.8 ... 138 V			
wide range input	No	Yes	No	No	No
overvoltage overload capability	$2.3 \times V_{in \text{ rated}}, 1.3 \text{ ms}$	154 V; 0.1 s	$2.3 \times V_{in \text{ rated}}, 1.3 \text{ ms}$	$2.3 \times V_{in \text{ rated}}, 1.3 \text{ ms}$	$2.3 \times V_{in \text{ rated}}, 1.3 \text{ ms}$
buffering time for rated value of the output current in the event of power failure minimum	20 ms	10 ms	20 ms	20 ms	20 ms
operating condition of the mains buffering	at $V_{in} = 93/187 \text{ V}$	at $V_{in \text{ rated}}$	at $V_{in} = 93/187 \text{ V}$	at $V_{in} = 93/187 \text{ V}$	at $V_{in} = 93/187 \text{ V}$
line frequency	50 Hz/60 Hz		50 Hz/60 Hz	50 Hz/60 Hz	50 Hz/60 Hz
line frequency	47 ... 63 Hz		47 ... 63 Hz	47 ... 63 Hz	47 ... 63 Hz
input current					
• at rated input voltage 24 V		2.4 A			
• at rated input voltage 110 V		0.6 A			
• at rated input voltage 120 V	0.9 A		2.3 A	2.1 A	4.2 A
• at rated input voltage 230 V	0.5 A		1.2 A	1.2 A	1.9 A
current limitation of inrush current at 25 °C maximum	22 A	20 A	20 A	45 A	55 A

SIMATIC S7-300 Advanced Controllers

Power supplies

1-phase, 24 V DC (for S7-300 and ET 200M)

Technical specifications

Article number	6ES7307-1BA01-0AA0	6ES7305-1BA80-0AA0	6ES7307-1EA01-0AA0	6ES7307-1EA80-0AA0	6ES7307-1KA02-0AA0
product brand name	PS 307	PS 305 Outdoor	PS 307	PS 307 Outdoor	PS 307
type of current supply	24 V/2 A	24 V/2 A	24 V/5 A	24 V/5 A	24 V/10 A
duration of inrush current limiting at 25 °C					
• maximum	3 ms	10 ms	3 ms	3 ms	3 ms
I ² t value maximum	1 A ² ·s	5 A ² ·s	1.2 A ² ·s	1.8 A ² ·s	3.3 A ² ·s
fuse protection type	T 1.6 A/250 V (not accessible)	T 6.3 A/250 V (not accessible)	T 3,15 A/250 V (not accessible)	T 3,15 A/250 V (not accessible)	T 6.3 A/250 V (not accessible)
fuse protection type in the feeder	Recommended miniature circuit breaker: 3 A characteristic C	Recommended miniature circuit breaker: from 10 A characteristic C, suitable for DC	Recommended miniature circuit breaker: from 6 A characteristic C	Recommended miniature circuit breaker: from 10 A characteristic C or from 6 A characteristic D	Recommended miniature circuit breaker: from 10 A characteristic C
output					
voltage curve at output	Controlled, isolated DC voltage	Controlled, isolated DC voltage	Controlled, isolated DC voltage	Controlled, isolated DC voltage	Controlled, isolated DC voltage
output voltage at DC rated value	24 V	24 V	24 V	24 V	24 V
output voltage					
• at output 1 at DC rated value	24 V	24 V	24 V	24 V	24 V
	24 V	24 V	24 V	24 V	24 V
output voltage adjustable	No; -	No; -	No; -	No; -	No; -
relative overall tolerance of the voltage	3 %	3 %	3 %	3 %	3 %
relative control precision of the output voltage					
• on slow fluctuation of input voltage	0.1 %	0.2 %	0.1 %	0.2 %	0.1 %
• on slow fluctuation of ohm loading	0.2 %	0.4 %	0.5 %	0.4 %	0.5 %
residual ripple					
• maximum	50 mV	150 mV	50 mV	150 mV	50 mV
• typical	5 mV	30 mV	10 mV	40 mV	15 mV
voltage peak					
• maximum	150 mV	240 mV	150 mV	240 mV	150 mV
• typical	20 mV	150 mV	20 mV	90 mV	60 mV
display version for normal operation	Green LED for 24 V OK	Green LED for 24 V OK	Green LED for 24 V OK	Green LED for 24 V OK	Green LED for 24 V OK
behavior of the output voltage when switching on	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)	No overshoot of V_{out} (soft start)
response delay maximum	2 s	3 s	2 s	3 s	2 s
voltage increase time of the output voltage					
• typical	10 ms	5 ms	10 ms	100 ms	10 ms
output current					
• rated value	2 A	2 A	5 A	5 A	10 A
• rated range	0 ... 2 A	0 ... 3 A; 3 A up to +60°C at $V_{in} > 24 V$	0 ... 5 A	0 ... 5 A	0 ... 10 A
	0.0 ... 2.4 A	0.0 ... 2.4 A	5 A	5 A	10 A
supplied active power typical	48 W	48 W	120 W	120 W	240 W
short-term overload current					
• on short-circuiting during the start-up typical	9 A	9 A	20 A	20 A	38 A
• at short-circuit during operation typical	9 A	9 A	20 A	20 A	38 A
duration of overloading capability for excess current					
• on short-circuiting during the start-up	90 ms	270 ms	100 ms	180 ms	80 ms
• at short-circuit during operation	90 ms	270 ms	100 ms	80 ms	80 ms
bridging of equipment	Yes	Yes	Yes	No	Yes
number of parallel-switched equipment resources	2	2			
efficiency in percent	84 %	75 %	87 %	84 %	90 %
power loss [W]					
• at rated output voltage for rated value of the output current typical	9 W	16 W	18 W	23 W	27 W

Technical specifications

Article number	6ES7307-1BA01-0AA0	6ES7305-1BA80-0AA0	6ES7307-1EA01-0AA0	6ES7307-1EA80-0AA0	6ES7307-1KA02-0AA0
product brand name	PS 307	PS 305 Outdoor	PS 307	PS 307 Outdoor	PS 307
type of current supply	24 V/2 A	24 V/2 A	24 V/5 A	24 V/5 A	24 V/10 A
closed-loop control					
relative control precision of the output voltage with rapid fluctuation of the input voltage by +/- 15% typical	0.1 %	0.3 %	0.1 %	0.3 %	0.1 %
relative control precision of the output voltage load step of resistive load 50/100/50 % typical	0.8 %	2.5 %	1 %	3 %	2 %
setting time					
• load step 50 to 100% typical	0.5 ms	2.5 ms	0.3 ms	0.2 ms	
• load step 100 to 50% typical	0.5 ms	2.5 ms	0.3 ms	0.2 ms	
setting time					
• maximum	1 ms	5 ms		5 ms	0.1 ms
protection and monitoring					
design of the overvoltage protection	Additional control loop, shutdown at < 28.8 V, automatic restart	Additional control loop, shutdown at approx. 30 V, automatic restart	Additional control loop, shutdown at < 28.8 V, automatic restart	Additional control loop, shutdown at approx. 30 V, automatic restart	Additional control loop, shutdown at < 28.8 V, automatic restart
property of the output short-circuit proof	Yes	Yes	Yes	Yes	Yes
design of short-circuit protection	Electronic shutdown, automatic restart	Electronic shutdown, automatic restart	Electronic shutdown, automatic restart	Electronic shutdown, automatic restart	Electronic shutdown, automatic restart
response value current limitation	2.2 ... 2.6 A	3.3 ... 3.9 A	5.5 ... 6.5 A	5.5 ... 6.5 A	11 ... 12 A
enduring short circuit current RMS value					
• maximum	2 A	2 A	7 A	5 A	12 A
safety					
galvanic isolation between input and output	Yes	Yes	Yes	Yes	Yes
galvanic isolation	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178	Safety extra low output voltage U_{out} according to EN 60950-1 and EN 50178, creepage distances and clearances > 5 mm	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178	Safety extra low output voltage U_{out} according to EN 60950-1 and EN 50178, creepage distances and clearances > 5 mm	Safety extra-low output voltage U_{out} acc. to EN 60950-1 and EN 50178
operating resource protection class	Class I	Class I	Class I	Class I	Class I
leakage current					
• maximum	3.5 mA		3.5 mA	3.5 mA	3.5 mA
• typical	0.5 mA		0.5 mA	0.3 mA	0.6 mA
protection class IP standard	IP20	IP20	IP20	IP20	IP20
• for emitted interference	EN 55022 Class B	EN 55011 Class A	EN 55022 Class B	EN 55011 Class A	EN 55022 Class B
• for mains harmonics limitation	not applicable	not applicable	EN 61000-3-2	-	EN 61000-3-2
• for interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2
standards, specifications, approvals					
certificate of suitability	Yes	Yes	Yes	Yes	Yes
• CE marking	Yes	Yes	Yes	Yes	Yes
• UL approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 142), File E143289	Yes; UL-Listed (UL 508), File E143289; CSA (CSA C22.2 No. 142)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 142), File E143289	Yes; UL-Listed (UL 508), File E143289; CSA (CSA C22.2 No. 142)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 142), File E143289
• CSA approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 142), File E143289	Yes; UL-Listed (UL 508), File E143289, CSA (CSA C22.2 No. 142)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 142), File E143289	Yes; UL-Listed (UL 508), File E143289, CSA (CSA C22.2 No. 142)	Yes; cULus-Listed (UL 508, CSA C22.2 No. 142), File E143289
• EAC approval	Yes	Yes	Yes	Yes	Yes
• NEC Class 2	No	No	No	No	No
type of certification					
• BIS			Yes; R-41183539		Yes; R-41183539
• CB-certificate	Yes	No	Yes	No	Yes
MTBF at 40 °C	2 320 078 h	964 506 h	2 480 589 h	2 231 610 h	1 504 280 h

SIMATIC S7-300 Advanced Controllers

Power supplies

1-phase, 24 V DC (for S7-300 and ET 200M)

Technical specifications

Article number	6ES7307-1BA01-0AA0	6ES7305-1BA80-0AA0	6ES7307-1EA01-0AA0	6ES7307-1EA80-0AA0	6ES7307-1KA02-0AA0
product brand name	PS 307	PS 305 Outdoor	PS 307	PS 307 Outdoor	PS 307
type of current supply	24 V/2 A	24 V/2 A	24 V/5 A	24 V/5 A	24 V/10 A
standards, specifications, approvals hazardous environments					
certificate of suitability					
• IECEx	Yes; IECEx Ex nA nC IIC T4 Gc	No	Yes; IECEx Ex nA nC IIC T3 Gc	No	Yes; IECEx Ex nA nC IIC T3 Gc
• ATEX	Yes; ATEX (EX) II 3G Ex nA nC IIC T4 Gc	No	Yes; ATEX (EX) II 3G Ex nA nC IIC T3 Gc	No	Yes; ATEX (EX) II 3G Ex nA nC IIC T3 Gc
• ULhazloc approval	Yes	No	Yes	No	Yes
• cCSAus, Class 1, Division 2	No	No	No	No	No
• FM registration	Yes; Class I, Div. 2, Group ABCD, T4	No	Yes; Class I, Div. 2, Group ABCD, T4	No	Yes; Class I, Div. 2, Group ABCD, T4
standards, specifications, approvals marine classification					
shipbuilding approval	Yes	No	Yes	No	Yes
Marine classification association					
• American Bureau of Shipping Europe Ltd. (ABS)	No	No	No	No	No
• French marine classification society (BV)	No	No	No	No	No
• Det Norske Veritas (DNV)	No	No	No	No	No
• Lloyds Register of Shipping (LRS)	Yes	No	Yes	No	Yes
standards, specifications, approvals Environmental Product Declaration					
Environmental Product Declaration	Yes	Yes	Yes	Yes	Yes
Global Warming Potential [CO2 eq]					
• total	289.8 kg	512.2 kg	575.4 kg	731.2 kg	861.1 kg
• during manufacturing	7.9 kg	11.2 kg	11.8 kg	11.2 kg	15.8 kg
• during operation	281.5 kg	500.5 kg	563.1 kg	719.5 kg	844.6 kg
• after end of life	0.25 kg	0.36 kg	0.38 kg	0.36 kg	0.5 kg
ambient conditions					
ambient temperature					
• during operation	0 ... 60 °C; with natural convection	-25 ... +70 °C; with natural convection	0 ... 60 °C; with natural convection	-25 ... +70 °C; with natural convection	0 ... 60 °C; with natural convection
• during transport	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
environmental category according to IEC 60721	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K5, transient condensation permitted	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K5, transient condensation permitted	Climate class 3K3, 5 ... 95% no condensation
connection method					
type of electrical connection	screw terminal	screw terminal	screw terminal	screw terminal	screw terminal
• at input	L, N, PE: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L+1, M1, PE: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L, N, PE: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L, N, PE: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded	L, N, PE: 1 screw terminal each for 0.5 ... 2.5 mm ² single-core/finely stranded
• at output	L+, M: 2 screw terminals each for 0.5 ... 2.5 mm ²	L+, M: 3 screw terminals each for 0.5 ... 2.5 mm ²	L+, M: 3 screw terminals each for 0.5 ... 2.5 mm ²	L+, M: 3 screw terminals each for 0.5 ... 2.5 mm ²	L+, M: 4 screw terminals each for 0.5 ... 2.5 mm ²
• for auxiliary contacts	-	-	-	-	-
mechanical data					
width × height × depth of the enclosure	40 mm × 125 mm × 120 mm	80 mm × 125 mm × 120 mm	60 mm × 125 mm × 120 mm	80 mm × 125 mm × 120 mm	80 mm × 125 mm × 120 mm
installation width × mounting height	40 mm × 205 mm	80 mm × 225 mm	60 mm × 205 mm	80 mm × 225 mm	80 mm × 205 mm
required spacing					
• top	40 mm	50 mm	40 mm	50 mm	40 mm
• bottom	40 mm	50 mm	40 mm	50 mm	40 mm
• left	0 mm	0 mm	0 mm	0 mm	0 mm
• right	0 mm	0 mm	0 mm	0 mm	0 mm

5

SIMATIC S7-300 Advanced Controllers

Power supplies

1-phase, 24 V DC (for S7-300 and ET 200M)**Technical specifications**

Article number	6ES7307-1BA01-0AA0	6ES7305-1BA80-0AA0	6ES7307-1EA01-0AA0	6ES7307-1EA80-0AA0	6ES7307-1KA02-0AA0
product brand name	PS 307	PS 305 Outdoor	PS 307	PS 307 Outdoor	PS 307
type of current supply	24 V/2 A	24 V/2 A	24 V/5 A	24 V/5 A	24 V/10 A
fastening method	Can be mounted onto S7 rail	Can be mounted onto S7 rail	Can be mounted onto S7 rail	Can be mounted onto S7 rail	Can be mounted onto S7 rail
<ul style="list-style-type: none"> • standard rail mounting • S7 rail mounting • wall mounting 	No	No	No	No	No
housing can be lined up	Yes	Yes	Yes	Yes	Yes
net weight	0.4 kg	0.57 kg	0.6 kg	0.57 kg	0.8 kg
accessories					
mechanical accessories	Mounting adapter for standard mounting rail (6EP1971-1BA00)	Mounting adapter for standard mounting rail (6ES7390-6BA00-0AA0)	Mounting adapter for standard mounting rail (6EP1971-1BA00)	Mounting adapter for standard mounting rail (6ES7390-6BA00-0AA0)	Mounting adapter for standard mounting rail (6EP1971-1BA00)
additional information					
other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

SIMATIC S7-300 Advanced Controllers

SIPLUS power supplies

1-phase, 24 V DC (for S7-300 and ET200M)**Overview**

The design and functionality of the SIPLUS PS 305 and PS 307 1-phase load power supplies (system and load current supply) with automatic range switchover of the input voltage are an optimal match for the SIMATIC S7-300 in design and functionality. By means of the connecting comb that is supplied with the system and load current supply, the supply to the CPU is quickly established. It is also possible to provide a 24 V supply to other S7-300 system components, input/output circuits of the input/output modules and, if necessary, the sensors and actuators. Comprehensive certifications, such as UL, ATEX or GL facilitate universal use (does not apply to outdoor use).

Note:

SIPLUS extreme products are based on Siemens standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS power supplies****SIPLUS S7-300 PS 305****6AG1305-1BA80-2AA0**

(Extended temperature range and medial exposure)

Input: 24 ... 110 V DC
Output: 24 V DC/2 A**SIPLUS S7-300 PS 307 5 A****6AG1307-1EA01-7AA0**

(Extended temperature range and medial exposure)

Incl. connection bracket
120/230 V AC; 24 V DC
Output current 5 A
(dimensions 60 x 125 x 120)**SIPLUS S7-300 PS 307 10 A****6AG1307-1KA02-7AA0**

(Extended temperature range and medial exposure)

Incl. connection bracket
120/230 V AC; 24 V DC
Output current 10 A
(dimensions 80 x 125 x 120)**SIPLUS S7-300 PS 305****6AG1305-1BA80-2AA0**

(Extended temperature range and medial exposure)

Input: 24 ... 110 V DC
Output: 24 V DC/2 A**Accessories****SIMATIC S7-300 mounting adapter****6EP1971-1BA00**

For snapping the PS 307 onto a 35 mm DIN rail (EN 60715)

Spare part

SIMATIC S7-300 mounting adapter; for snapping the PS 307 onto 35 mm DIN rails

6ES7390-6BA00-0AA0

Technical specifications

Article number	6AG1305-1BA80-2AA0	6AG1307-1EA01-7AA0	6AG1307-1KA02-7AA0
Based on	6ES7305-1BA80-0AA0 SIPLUS S7-300 PS 305 2 A (EN50155)	6ES7307-1EA01-0AA0 SIPLUS PS307 AC 120/230V / DC 24 V/5 A	6ES7307-1KA02-0AA0 SIPLUS PS307 10A
Ambient conditions			
Ambient temperature during operation			
<ul style="list-style-type: none"> min. max. 	-25 °C; = Tmin 70 °C; = Tmax; for use on railway vehicles according to EN 50155, the rated temperature range -25 ... +55 °C (T1) or 60 °C @ UL/UL hazardous use applies	-25 °C; = Tmin 70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	-25 °C; = Tmin 70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use
Altitude during operation relating to sea level			
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 75 V DC	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 75 V DC	2 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); above 2 000 m max. 75 V DC
Relative humidity			
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance			
Use in stationary industrial systems			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on land craft, rail vehicles and special-purpose vehicles			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-5 to chemically active substances according to EN 60721-3-5 to mechanically active substances according to EN 60721-3-5 	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); * Yes; Class 5S3 incl. sand, dust; *	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); * Yes; Class 5S3 incl. sand, dust; *	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); * Yes; Class 5S3 incl. sand, dust; *
Use on ships/at sea			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology			
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

Interface modules

IM 360/361/365 interface modules

Overview



- For connection of the SIMATIC S7-300 rack in multi-tier configurations
- IM 365:
For configuring central controllers and max. 1 expansion unit. Limited use of modules in the expansion unit (e.g. no CPs and FMs)
- IM 360/IM 361:
For configuring central controllers and max. 3 expansion units. Unlimited selection of modules in the expansion unit

Ordering data

Ordering data	Article No.
SIMATIC S7-300, IM 360 interface module In the central processing unit rack for connection of max. 3 extension racks, with communication bus	6ES7360-3AA01-0AA0
SIMATIC S7-300, IM 361 interface module In the extension rack for connection to central processing unit rack (IM360), supply voltage 24 V DC, with C bus	6ES7361-3CA01-0AA0

Ordering data

Article No.

Connecting cable SIMATIC S7-300, connecting cable between IM 360/IM 361 Length: 1 m	6ES7368-3BB01-0AA0
SIMATIC S7-300, connecting cable between IM 360/IM 361 Length 2.5 m	6ES7368-3BC51-0AA0
SIMATIC S7-300, connecting cable between IM 360/IM 361 Length 5 m	6ES7368-3BF01-0AA0
SIMATIC S7-300, connecting cable between IM 360/IM 361 Length 10 m	6ES7368-3CB01-0AA0
SIMATIC S7-300, IM 365 interface module For connection of an extension rack, without communication bus, 2 modules + connecting cable 1 m	6ES7365-0BA01-0AA0
SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice	6ES7998-8XC01-8YE2

Technical specifications

Article number	6ES7360-3AA01-0AA0	6ES7361-3CA01-0AA0	6ES7365-0BA01-0AA0
	Interf. mod. IM360 in CC, with K-Bus	IM 361 Interface Module in ER,with K-Bus	Interf. mod. IM365, w/o K-Bus
Supply voltage			
Rated value (DC)			
• 24 V DC		Yes	
Input current			
from supply voltage L+, max.		500 mA	
from backplane bus 5 V DC, max.	350 mA		100 mA
Power loss			
Power loss, typ.	2 W	5 W	0.5 W
Hardware configuration			
Number of interfaces per CPU, max.	1	3	1; 1 pair
Dimensions			
Width	40 mm	80 mm	40 mm
Height	125 mm	125 mm	125 mm
Depth	120 mm	120 mm	120 mm
Weights			
Weight, approx.	225 g	505 g	580 g

Overview



- SIPLUS IM 365:
For configuration of 1 central controller and max. 1 expansion unit

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

SIPLUS S7-300 IM 365 interface module

For expansion of S7-300 with max. 1 EU; 2 modules with permanent connecting cable (1 m)

Extended temperature range and exposure to media

Article No.

6AG1365-0BA01-2AA0

Technical specifications

Article number	6AG1365-0BA01-2AA0
Based on	6ES7365-0BA01-0AA0 SIPLUS S7-300 IM 365
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C; = Tmin
• max.	60 °C; = Tmax
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *

Article number	6AG1365-0BA01-2AA0
Based on	6ES7365-0BA01-0AA0 SIPLUS S7-300 IM 365
Use on land craft, rail vehicles and special-purpose vehicles	
- to biologically active substances according to EN 60721-3-5	Yes; Class 5B2 mold, fungus and dry rot spores (with the exception of fauna); Class 5B3 on request
- to chemically active substances according to EN 60721-3-5	Yes; Class 5C3 (RH < 75 %) incl. salt spray acc. to EN 50155 (ST2); *
- to mechanically active substances according to EN 60721-3-5	Yes; Class 5S3 incl. sand, dust; *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!

SIMATIC S7-300 Advanced Controllers

Accessories

Mounting rail, Labeling sheets

Overview Mounting rail



- The mechanical rack for SIMATIC S7-300
- For accommodating the modules
- Can be attached to walls

Ordering data

Article No.

Mounting rail	Article No.
SIMATIC S7-300, mounting rail Length: 160 mm	6ES7390-1AB60-0AA0
SIMATIC S7-300, mounting rail Length: 482.6 mm	6ES7390-1AE80-0AA0
SIMATIC S7-300, mounting rail Length: 530 mm	6ES7390-1AF30-0AA0
SIMATIC S7-300, mounting rail Length: 830 mm	6ES7390-1AJ30-0AA0
SIMATIC S7-300, mounting rail Length: 2000 mm	6ES7390-1BC00-0AA0

Overview Labeling sheets

Labeling sheets

- Film sheets for the application-specific labeling of SIMATIC S7-300 I/O modules using standard laser printers
- Plain color films, tear-resistant, dirt-repellent
- Simple handling:
 - perforated labeling sheets in DIN A4 format for easy separation of the labeling strips.
 - the separated strips can be attached directly onto the I/O modules.
- Different colors to distinguish between different module types or preferred applications:
The labeling sheets are available in the following colors: petrol, light beige, red, and yellow. Yellow is reserved for fail-safe systems.

Label cover

- Petrol-colored film
- For sealing and fixing of custom labeling strips on normal paper
- Accessories, 10 units

Ordering data

Article No.

Labeling sheets	Article No.
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX00-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX00-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX00-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (16 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX00-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Petrol 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2AX10-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Light beige 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2BX10-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Yellow 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2CX10-0AA0
SIMATIC S7-300, 10 DIN A4 labeling sheets, color: Red 10 labeling strips/sheet, for signal modules (32 channels), material: film, pre-perforated for printing with laser printer, 10 sheets per packing unit	6ES7392-2DX10-0AA0

Technical specifications

Labeling sheets for S7-300	
Dimensions	DIN A4
Labeling strips per sheet, pre-perforated	10
Weight, approx.	0.1 kg

SIMATIC S7-400 Advanced Controllers



6/2

6/2

6/5

Overview

SIMATIC S7-400

I/O modules

SIMATIC S7-400 Advanced Controllers

Overview

SIMATIC S7-400

Overview

SIMATIC S7-400:
The powerful controller for system solutions in the manufacturing and process industries

Within the controller family, the SIMATIC S7-400 is designed for system solutions in the manufacturing and process automation industry.

- The modularly designed S7-400H can be flexibly adapted to your requirements. The redundant configuration further increases system availability.
- An additional protective coating (conformal coating) on the circuit board optimally protects the modules against external influences and makes them durable.
- The S7-400H stands out thanks to its long-term availability.
- Safety engineering, SIMATIC F-systems and standard automation can be integrated into a single automation system.
- The configuration of the distributed I/O of the S7-400 can be modified during operation. In addition signal modules can be removed and inserted while live (hot swapping). This makes it very easy to expand the system or replace modules in the event of a fault.
- Storage of the entire project data, including symbols and comments, on the CPU simplifies service and maintenance calls.



SIMATIC S7-400, CPU	412-5H ⁴⁾	414-5H ⁴⁾	416-5H ⁴⁾	417-5H ⁴⁾
Work memory	1 MB	4 MB	16 MB	32 MB
Processing times (ns)				
Bit/word/ fixed point/floating point	31.25/31.25/ 31.25/62.5	18.75/18.75/ 18.75/37.5	12.5/12.5/ 12.5/25	7.5/7.5/ 7.5/15
Timers/counters	2048/2048	2048/2048	2048/2048	2048/2048
Address ranges				
Digital inputs/outputs	65536 each	65536 each	131072 each	131072 each
Analog inputs/outputs	4096 each	4096 each	8192 each	8192 each
DP interfaces				
Number of MPI/DP interfaces	1	1	1	1
Number of DP interfaces	1	1	1	1
Number of DP slaves per MPI/DP	32	32	32	32
Number of DP slaves per DP	64	96	125	125
Plug-in interface modules	—	—	—	—
Data set gateway	●	●	●	●
PN interfaces				
Number of PN interfaces	1 (2 ports)	1 (2 ports)	1 (2 ports)	1 (2 ports)
PROFINET IO	●	●	●	●
PROFINET with IRT	—	—	—	—
PROFINET CBA	—	—	—	—
TCP/IP	●	●	●	●
UDP	●	●	●	●
Web server	—	—	—	—
ISO-on-TCP (RFC 1006)	●	●	●	●
Mounting dimensions				
W x H x D (mm)	50 x 290 x 219	50 x 290 x 219	50 x 290 x 219	50 x 290 x 219

— = cannot be used/not available
 ● = can be used/available

⁴⁾ also as SIPLUS extreme component for corrosive atmosphere/condensation

Overview

- The S7-400 is especially suitable for data-intensive tasks in the process industry. High processing speeds and deterministic response times guarantee short machine cycle times on high-speed machines in the manufacturing industry. The high-speed backplane bus of S7-400 ensures efficient linking of central I/O modules.
- The S7-400 is used preferably to coordinate complete plants and to control lower-level devices/stations; this is guaranteed by the high communication power and the integral interfaces.
- The performance is scalable thanks to a graded range of CPUs; Interfaces for the PROFIBUS/PROFINET connection ensure optimal connectivity.
- To further increase ruggedness and durability in the harsh everyday industrial environment, the S7-400 has a "G3" conformal coating.



SIMATIC S7-400, CPU	412-1 / 412-2	412-2 PN ⁴⁾	414-2 / 414-3	414-3 PN/DP ⁴⁾	416-2 / 416-3 ⁴⁾	416-3 PN/DP ⁴⁾	417-4 ⁴⁾
Work memory	512KB/ 1 ¹⁾ MB	1 MB	2/4 ²⁾ MB	4 MB	8/16 ³⁾ MB	16 MB	32 MB
Processing times (ns)							
Bit/word/ fixed point/floating point	31.25/31.25/ 31.25/62.5	31.25/31.25/ 31.25/62.5	18.75/18.75/ 18.75/37.5	18.75/18.75/ 18.75/37.5	12.5/12.5/ 12.5/25	12.5/12.5/ 12.5/25	7.5/7.5/ 7.5/15
Timers/counters	2048/2048	2048/2048	2048/2048	2048/2048	2048/2048	2048/2048	2048/2048
Address range							
Digital inputs/outputs	32768 each	32768 each	65536 each	65536 each	131072 each	131072 each	131072 each
Analog inputs/outputs	2048 each	2048 each	4096 each	4096 each	8192 each	8192 each	8192 each
DP interfaces							
Number of MPI/DP interfaces	1	1	1	1	1	1	1
Number of DP interfaces	— / 1 ¹⁾	—	1	—	1	1	1
Number of DP slaves per MPI/DP	32	32	32	32	32	32	32
Number of DP slaves per DP	64	—	96 each	125 each	125 each	125 each	125 each
Plug-in interface modules	—	—	— / 1 x DP ²⁾	1 x DP	— / 1 x DP ³⁾	1 x DP	2 x DP
Data set gateway	●	●	●	●	●	●	●
PN interfaces							
Number of PN interfaces	—	1 (2 ports)	—	1 (2 ports)	—	1 (2 ports)	—
PROFINET IO	—	●	—	●	—	●	—
PROFINET with IRT	—	●	—	●	—	●	—
PROFINET CBA	—	●	—	●	—	●	—
TCP/IP	—	●	—	●	—	●	—
UDP	—	●	—	●	—	●	—
Web server	—	●	—	●	—	●	—
ISO-on-TCP (RFC 1006)	—	●	—	●	—	●	—
Mounting dimensions							
W x H x D (mm)	25 x 290 x 219	25 x 290 x 219	25 x 290 x 219 50 x 290 x 219 ²⁾	50 x 290 x 219	25 x 290 x 219 50 x 290 x 219 ³⁾	50 x 290 x 219	50 x 290 x 219

— = cannot be used/not available
● = can be used/available

¹⁾ CPU 412-2

²⁾ CPU 414-3

³⁾ CPU 416-3

⁴⁾ also as SIPLUS extreme component for corrosive atmosphere/condensation

SIMATIC S7-400 Advanced Controllers

Overview

SIMATIC S7-400

Overview

- Safety engineering and standard automation can be integrated into a single S7-400.
- For demanding, safety-oriented automation in mechanical engineering with S7 Distributed Safety.
- Many S7-400 components are also available in a SIPLUS extreme version for extreme environmental conditions, e.g. for use where there is a corrosive atmosphere/condensation. For more detailed information, visit www.siemens.com/siplus-extreme

For more information, refer to:

www.siemens.com/simatic-s7-400

Detailed information on SIMATIC S7-400, see **Catalog ST 400** in the Siemens Industry Online Support:

www.siemens.com/industry-catalogs



SIMATIC S7-400, CPU	414F-3 PN/DP	416F-2	416F-3 PN/DP
Work memory	4 MB	8 MB	16 MB
Processing times (ns)			
Bit/word/ fixed point/floating point	18.75/18.75/ 18.75/37.5	12.5/12.5/ 12.5/25	12.5/12.5/ 12.5/25
Timers/counters	2048/2048	2048/2048	2048/2048
Address ranges			
Digital inputs/outputs	65536 each	131072 each	131072 each
Analog inputs/outputs	4096 each	8192 each	8192 each
DP interfaces			
Number of MPI/DP interfaces	1	1	1
Number of DP interfaces	1	1	1
Number of DP slaves per MPI/DP	32	32	32
Number of DP slaves per DP	125 each	125	125 each
Plug-in interface modules	1 x DP	—	1 x DP
Data set gateway	●	●	●
PN interfaces			
Number of PN interfaces	1 (2 ports)	—	1 (2 ports)
PROFINET IO	●	—	●
PROFINET with IRT	●	—	●
PROFINET CBA	●	—	●
TCP/IP	●	—	●
UDP	●	—	●
Web server	●	—	●
ISO-on-TCP (RFC 1006)	●	—	●
Mounting dimensions			
W x H x D (mm)	50 x 290 x 219	25 x 290 x 219	50 x 290 x 219

— = cannot be used/not available

● = can be used/available

Overview

Digital modules

SM 421 digital input module

Article No.



- Digital inputs for the SIMATIC S7-400
 - For connecting switches and 2-wire proximity switches (BEROs)
- Detailed information on SIMATIC S7-400, see **Catalog ST 400** in Siemens Industry Online Support: www.siemens.com/industry-catalogs

16 inputs, 24 V DC, with hardware/ diagnostics interrupt

32 inputs, 24 V DC

32 inputs, 120 V UC

16 inputs, 120/230 V UC, inputs according to IEC 1131-2 Type 2

16 inputs, 24 to 60 V UC, with hardware/ diagnostics interrupt

6ES7421-7BH01-0AB0**6ES7421-1BL01-0AA0****6ES7421-1EL00-0AA0****6ES7421-1FH20-0AA0****6ES7421-7DH00-0AB0**

SM 422 digital output module

Article No.



- Digital outputs for the SIMATIC S7-400
 - For connecting solenoid valves, contactors, small-power motors, lamps and motor starters
- Detailed information on SIMATIC S7-400, see **Catalog ST 400** in Siemens Industry Online Support: www.siemens.com/industry-catalogs

16 outputs, 120/230 V AC, 2 A

6 outputs, relay contacts

16 outputs, 24 V DC, 2 A

32 outputs, 24 V DC, 0.5 A

32 outputs; 24 V DC, 0.5 A; with diagnostics

6ES7422-1FH00-0AA0**6ES7422-1HH00-0AA0****6ES7422-1BH11-0AA0****6ES7422-1BL00-0AA0****6ES7422-7BL00-0AB0**

Analog modules

SM 431 analog input module

Article No.



- Analog inputs for the SIMATIC S7-400
 - For connecting voltage sensors and current sensors, thermocouples, resistors and resistance thermometers
 - Resolution 13 to 16 bit
- Detailed information on SIMATIC S7-400, see **Catalog ST 400** in Siemens Industry Online Support: www.siemens.com/industry-catalogs

16 inputs, non-floating, 13 bit

8 inputs, floating, 14 bit

8 inputs, floating, 13 bit

8 inputs, floating, 14 bit, with linearization

16 inputs, floating, 16 bit, hardware interrupt capability

8 inputs, floating, 16 bit, hardware interrupt capability, for thermocouples (I, U)

8 inputs, floating, 16 bit, hardware interrupt capability, for thermal resistors

6ES7431-0HH00-0AB0**6ES7431-1KF20-0AB0****6ES7431-1KF00-0AB0****6ES7431-1KF10-0AB0****6ES7431-7QH00-0AB0****6ES7431-7KF00-0AB0****6ES7431-7KF10-0AB0**

SM 432 analog output module

Article No.



- Analog outputs for the SIMATIC S7-400
 - For connecting analog actuators
- Detailed information on SIMATIC S7-400, see **Catalog ST 400** in Siemens Industry Online Support: www.siemens.com/industry-catalogs

8 outputs, floating, 13 bit





6ES7432-1HF00-0AB0

SIMATIC S7-400 Advanced Controllers

Overview

I/O modules

Overview

Function modules			
FM 450-1 counter module			
			Article No.
	<ul style="list-style-type: none"> Two-channel, intelligent counter module for simple counting tasks For direct connection of incremental encoders Comparison function with 2 definable comparison values Integrated digital outputs for outputting the reaction on reaching the comparison values <p>Detailed information on SIMATIC S7-400, see Catalog ST 400 in Siemens Industry Online Support: www.siemens.com/industry-catalogs</p>	With 2 channels, max. 500 kHz; for incremental encoders	6ES7450-1AP01-0AE0
FM 451 positioning module			
			Article No.
	<p>The three-channel FM 451 positioning module takes over the adjustment of mechanical axes for rapid traverse/creep speed drives. The module is designed for positioning adjusting and tooling axes, preferably with standard motors, controlled via contactors or frequency converters.</p> <ul style="list-style-type: none"> Three-channel positioning module for rapid traverse/creep speed drives 4 digital outputs per channel for motor control Incremental or synchronous-serial position feedback <p>Detailed information on SIMATIC S7-400, see Catalog ST 400 in Siemens Industry Online Support: www.siemens.com/industry-catalogs</p>	For rapid traverse and creep speed drives	6ES7451-3AL00-0AE0
FM 452 cam controller			
			Article No.
	<ul style="list-style-type: none"> Very high-speed electronic cam controller Low-cost alternative to mechanical cam controllers 32 cam tracks, 16 onboard digital outputs for direct output of actions Incremental or synchronous-serial position feedback <p>Detailed information on SIMATIC S7-400, see Catalog ST 400 in Siemens Industry Online Support: www.siemens.com/industry-catalogs</p>		6ES7452-1AH00-0AE0
FM 453 positioning module			
			Article No.
	<p>The FM 453 is an intelligent, three-channel module designed for a wide range of positioning tasks using servo and/or stepper motors.</p> <ul style="list-style-type: none"> It can be used for simple point-to-point positioning tasks as well as for complex traverse profiles with the most stringent demands for dynamic response, accuracy, and velocity. It is the ideal solution for positioning tasks in machines with high clock rates and for multi-axis machines. Up to 3 independent motors can be controlled <p>Detailed information on SIMATIC S7-400, see Catalog ST 400 in Siemens Industry Online Support: www.siemens.com/industry-catalogs</p>	with 3 channels/axes	6ES7453-3AH00-0AE0

Overview

Function modules

FM 455 controller module

Article No.



The FM 455 controller module is the intelligent 16-channel controller module for universal control tasks. It can be used, for example, for temperature control, pressure control, flow control or level control.

- Convenient online self-optimization for temperature controls
- Ready-to-use controller structures
- 2 control algorithms
- 2 versions:
 - FM 455 C as continuous controller
 - FM 455 S as step or pulse controller

- With 16 analog outputs (FM 455 C) or 32 digital outputs (FM 455 S) for actuators

Detailed information on SIMATIC S7-400, see **Catalog ST 400** in Siemens Industry Online Support:

www.siemens.com/industry-catalogs

With 16 analog outputs for 16 continuous controllers

6ES7455-0VS00-0AE0

With 32 digital outputs for 16 step or pulse controllers

6ES7455-1VS00-0AE0

SIMATIC S7-400 Advanced Controllers

Notes

6

**7/2****based on ET 200SP**Standard CPUs

7/2 CPU 1510SP-1 PN

7/7 CPU 1512SP-1 PN

7/12 CPU 1514SP-2 PN

SIPLUS standard CPUs

7/18 SIPLUS CPU 1510SP-1 PN

7/23 SIPLUS CPU 1512SP-1 PN

Fail-safe CPUs

7/28 CPU 1510SP F-1 PN

7/33 CPU 1512SP F-1 PN

7/38 CPU 1514SP F-2 PN

SIPLUS fail-safe CPUs

7/44 SIPLUS CPU 1510SP F-1 PN

7/48 SIPLUS CPU 1512SP F-1 PN

Technology CPUs

7/53 CPU 1514SP T-2 PN

7/58 CPU 1514SP TF-2 PN

ET 200SP Open ControllersStandard CPUs

7/63 - CPU 1515SP PC2

Fail-safe CPUs

7/69 - CPU 1515SP PC2 F

Technology-CPU

7/75 - CPU 1515SP PC2 T

7/80 - CPU 1515SP PC2 TF

SIPLUS ET 200SP Open ControllersSIPLUS standard CPUs

7/84 - SIPLUS CPU 1515SP PC2

SIPLUS fail-safe CPUs

7/91 - SIPLUS CPU 1515SP PC2 F

7/95**based on ET 200pro**Standard CPUs

7/95 IM 154-8 PN/DP CPU

7/99 CPU 1513pro-2 PN

7/103 CPU 1516pro-2 PN

Fail-safe CPUs

7/107 IM 154-8 F PN/DP CPU

7/112 CPU 1513pro F-2 PN

7/116 CPU 1516pro F-2 PN

Distributed Controllers

based on ET 200SP
Standard CPUs

CPU 1510SP-1 PN

Overview



- CPU 1510SP-1 PN for SIMATIC ET 200SP based on S7-1500 CPU 1511-1 PN
- For high-performance control solutions using ET 200SP
- Increase in availability of systems and machines
- PROFINET IO controller for up to 64 IO devices
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO controller
- PROFINET shared I-Device for 4 controllers
- PROFINET IO IRT interface with integrated 3-port switch
- Isochronous mode on PROFINET
- With multiple communication options: PG/OP communication, PROFINET IO, open IE communication (TCP, ISO-on-TCP and UDP), web server and S7 communication (with loadable FBs)
- OPC UA server and client (data access) as runtime option for easy connection of the SIMATIC ET 200SP to third-party devices/systems
- Optional PROFIBUS DP master for 125 PROFIBUS DP slaves (with CM DP module 6ES7545-5DA00-0AB0)
- Optional PROFIBUS DP slave (with CM DP module 6ES7545-5DA00-0AB0)
- Configuration control (option handling)
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes

Note:

SIMATIC Memory Card required for operation of the CPU. The BusAdapter is not included in scope of supply and is to be ordered separately.

Ordering data

Article No.

SIMATIC DP, CPU 1510SP-1 PN for ET 200SP

6ES7510-1DK03-0AB0

Central processing unit with 200 KB work memory for program and 1 MB for data, 1st interface: PROFINET IRT with 3-port switch, 25 ns bit performance, SIMATIC Memory Card required, BusAdapter required for ports 1 and 2
Observe the approvals and certificates according to entry 109817615 at support.industry.siemens.com!

Accessories

SIMATIC DP, CM PROFIBUS DP

6ES7545-5DA00-0AB0

For ET 200SP CPU module w. PROFIBUS DP interface (9-pin D-sub socket) DP master for 125 DP devices, DP device

SIMATIC Memory Card

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS

6ES7954-8LC03-0AA0

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LE03-0AA0

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LF03-0AA0

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU

6ES7954-8LL03-0AA0

3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LP04-0AA0

3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LT03-0AA0

3.3 V Flash, 32 GB

DIN rail 35 mm

SIMATIC, DIN rail 35 mm

6ES5710-8MA11

Length: 483 mm for 19" cabinets

SIMATIC, DIN rail 35 mm

6ES5710-8MA21

Length: 530 mm for 600 mm cabinets

SIMATIC, DIN rail 35 mm

6ES5710-8MA31

Length: 830 mm for 900 mm cabinets

SIMATIC, DIN rail 35 mm

6ES5710-8MA41

Length 2 m

SIMATIC S7-1500, grounding screw

6ES7590-5AA00-0AA0

For connecting PE to the S7-1500 mounting rail; essential for 2000 mm mounting rail 20 units per packing unit

SIMATIC ET 200SP, BusAdapter BA 2xRJ45

6ES7193-6AR00-0AA0

2 RJ45 sockets

SIMATIC ET 200SP, BusAdapter BA 2xFC

6ES7193-6AF00-0AA0

2x FastConnect connection

SIMATIC ET 200SP, BusAdapter BA 2xSCRJ

6ES7193-6AP00-0AA0

2 SCRJ FO connections

Ordering data	Article No.	Ordering data	Article No.
SIMATIC ET 200SP, BusAdapter BA SCRJ/RJ45 Media converter FOC-CU 1x SCRJ FO connection and 1x RJ45 connection	6ES7193-6AP20-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC ET 200SP, BusAdapter: BA SCRJ/FC Media converter FOC-CU 1x SCRJ FO connection and 1x FastConnect (FC) connection	6ES7193-6AP40-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC ET 200SP, 160 reference designation labels 10 sheets (160 labels), for BA, BU, IM and I/O modules	6ES7193-6LF30-0AW0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
Labeling strips		Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC ET 200SP, 500 labeling strips, light gray Roll of 500 strips	6ES7193-6LR10-0AA0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC ET 200SP, 500 labeling strips, yellow Roll of 500 strips	6ES7193-6LR10-0AG0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 1 unit.	6GK1901-1BB20-2AA0
SIMATIC ET 200SP, 1000 labeling strips, light gray 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AA0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 10 units.	6GK1901-1BB20-2AB0
SIMATIC ET 200SP, 1000 labeling strips, yellow 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AG0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 50 units.	6GK1901-1BB20-2AE0
IE FC RJ45 plugs		Manuals for ET 200SP distributed I/O system ET 200SP library: ET 200SP Manual Collection, comprising system manual, product information, and device manuals Manuals are available as PDF files on the Internet under https://www.siemens.com/ simatic-docu .	6GK1901-1GA00
Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0

Distributed Controllers

based on ET 200SP
Standard CPUs

CPU 1510SP-1 PN

Ordering data

Article No.

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

Current Manual Collection DVD and the three subsequent updates

6ES7998-8XC01-8YE2

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

Article No.

SIMATIC STEP 7 Prof. V19; floating license; Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive

Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>

6ES7822-1AA23-0YA5

SIMATIC STEP 7 Prof. V19, floating license download; Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾

Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>
Consignee email address required for delivery

6ES7822-1AE23-0YA5

Spare parts

Connector, female, 2x2-pole, ET 200SP, interface module, KP32F

PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded 10 units per packing unit

6ES7193-4JB00-0AA0

SIMATIC ET 200SP, spare part 5 covers

For BusAdapter interface of the ET 200SP CPU

6ES7591-3AA00-0AA0

SIMATIC ET 200SP, spare part server module

For ET 200SP

6ES7193-6PA00-0AA0

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7510-1DK03-0AB0 CPU 1510SP-1 PN, 200KB Prog., 1MB Data
General information	
Product type designation	CPU 1510SP-1 PN
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7510-1DJ01-0AB0
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated (for program)	200 kbyte
• integrated (for data)	1 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	25 ns
for word operations, typ.	32 ns
for fixed point arithmetic, typ.	42 ns
for floating point arithmetic, typ.	170 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Address space per module	
• Address space per module, max.	288 byte; For input and output data respectively
Address space per station	
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day	
Clock	
• Type	Hardware clock

Article number	6ES7510-1DK03-0AB0 CPU 1510SP-1 PN, 200KB Prog., 1MB Data
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P3; opt. X1 P1 and X1 P2 via BusAdapter BA 2x RJ45
• Number of ports	3; 1. integr. + 2. via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFlenergy	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	128
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFlenergy	Yes; per user program
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program

Distributed Controllers

based on ET 200SP
Standard CPUs

CPU 1510SP-1 PN

Technical specifications

Article number	6ES7510-1DK03-0AB0 CPU 1510SP-1 PN, 200KB Prog., 1MB Data
2. Interface	
Interface types	
• RS 485	Yes; Via CM DP module
• Number of ports	1
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols	
Number of connections	
• Number of connections, max.	128; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	1 120
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Article number	6ES7510-1DK03-0AB0 CPU 1510SP-1 PN, 200KB Prog., 1MB Data
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C; No condensation
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/ password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	100 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	265 g

Overview



- CPU 1512SP-1 PN for SIMATIC ET 200SP based on S7-1500 CPU 1513-1 PN
- For applications with medium requirements in terms of program scope and processing speed, for distributed configurations via PROFINET IO or PROFIBUS DP.
- Increase in availability of systems and machines
- PROFINET IO controller for up to 128 IO devices
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO controller
- PROFINET shared I-Device for 4 controllers
- PROFINET IO IRT interface with integrated 3-port switch
- Isochronous mode on PROFINET
- With multiple communication options: PG/OP communication, PROFINET IO, open IE communication (TCP, ISO-on-TCP and UDP), web server and S7 communication (with loadable FBs)
- OPC UA server and client (data access) as runtime option for easy connection of the SIMATIC ET 200SP to third-party devices/systems
- Optional PROFIBUS DP master for 125 PROFIBUS DP slaves (with CM DP module 6ES7545-5DA00-0AB0)
- Optional PROFIBUS DP slave (with CM DP module 6ES7545-5DA00-0AB0)
- Configuration control (option handling)
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes

Note:

SIMATIC Memory Card required for operation of the CPU. BusAdapter is not included in scope of delivery and is to be ordered separately.

Ordering data

Article No.

SIMATIC DP, CPU 1512SP-1 PN for ET 200SP

6ES7512-1DM03-0AB0

Central processing unit with 400 KB work memory for program and 2 MB for data, 1st interface: PROFINET IRT with 3-port switch, 25 ns bit performance, SIMATIC Memory Card required, BusAdapter required for ports 1 and 2

Observe the approvals and certificates according to entry 109817615 at support.industry.siemens.com!

Accessories**SIMATIC DP, CM PROFIBUS DP for ET 200SP**

6ES7545-5DA00-0AB0

CPU module with PROFIBUS DP interface (9-pin D-sub socket) DP master for 125 DP devices, DP device

SIMATIC Memory Card**SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS**

6ES7954-8LC03-0AA0

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LE03-0AA0

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS

6ES7954-8LF03-0AA0

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU

6ES7954-8LL03-0AA0

3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LP04-0AA0

3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU

6ES7954-8LT03-0AA0

3.3 V Flash, 32 GB

DIN rail 35 mm**SIMATIC, DIN rail 35 mm,**

6ES710-8MA11

Length: 483 mm for 19" cabinets

SIMATIC, DIN rail 35 mm

6ES710-8MA21

Length: 530 mm for 600 mm cabinets

SIMATIC, DIN rail 35 mm

6ES710-8MA31

Length: 830 mm for 900 mm cabinets

SIMATIC, DIN rail 35 mm

6ES710-8MA41

Length 2 m

SIMATIC S7-1500, grounding screw

6ES7590-5AA00-0AA0

For connecting PE to the S7-1500 mounting rail; essential for 2000 mm mounting rail 20 units per packing unit

SIMATIC ET 200SP, BusAdapter BA 2xRJ45

6ES7193-6AR00-0AA0

2 RJ45 sockets

SIMATIC ET 200SP, BusAdapter BA 2xFC

6ES7193-6AF00-0AA0

2x FastConnect connection

Distributed Controllers

based on ET 200SP
Standard CPUs

CPU 1512SP-1 PN

Ordering data	Article No.	Ordering data	Article No.
SIMATIC ET 200SP, BusAdapter BA 2xSCRJ 2 SCRJ FO connections	6ES7193-6AP00-0AA0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 50 units.	6GK1901-1BB20-2AE0
SIMATIC ET 200SP, BusAdapter BA SCRJ/RJ45 Media converter FOC-CU 1x SCRJ FO connection and 1x RJ45 connection	6ES7193-6AP20-0AA0	IE FC RJ45 plug 180	
SIMATIC ET 200SP, BusAdapter: BA SCRJ/FC Media converter FOC-CU 1x SCRJ FO connection and 1x FastConnect (FC) connection	6ES7193-6AP40-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
SIMATIC BusAdapter BA 2xLC 2x LC glass fiber-optic cable connections	6ES7193-6AG00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC BusAdapter: BA LC/RJ45 Media converter glass FOC/CU 1x LC FO connection and 1x RJ45 connection	6ES7193-6AG20-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AE0
SIMATIC BusAdapter: BA LC/FC Media converter glass FOC/CU 1x LC FO connection and 1x FastConnect (FC) connection	6ES7193-6AG40-0AA0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC ET 200SP, 160 reference designation labels 10 sheets (160 labels), for BA, BU, IM and I/O modules	6ES7193-6LF30-0AW0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
Labeling strips		Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC ET 200SP, 500 labeling strips, light gray Roll of 500 strips	6ES7193-6LR10-0AA0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00
SIMATIC ET 200SP, 500 labeling strips, yellow Roll of 500 strips	6ES7193-6LR10-0AG0		
SIMATIC ET 200SP, 1000 labeling strips, light gray 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AA0		
SIMATIC ET 200SP, 1000 labeling strips, yellow 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AG0		
IE FC RJ45 plugs			
Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 1 unit.	6GK1901-1BB20-2AA0		
Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 10 units.	6GK1901-1BB20-2AB0		

Ordering data	Article No.	Article No.
<p>Manuals for ET 200SP distributed I/O system</p> <p>ET 200SP library: ET 200SP Manual Collection, comprising system manual, product information, and device manuals</p> <p>Manuals can be downloaded from the Internet as PDF files under https://www.siemens.com/simatic-docu.</p>		
<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT</p>	6ES7998-8XC01-8YE0	
<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>	6ES7998-8XC01-8YE2	
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement:</p> <p>Windows 10 (64-bit)</p> <ul style="list-style-type: none"> Windows 10 Home Version 22H2w Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		
<p>SIMATIC STEP 7 Prof. V19; floating license; Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive</p> <p>Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>		6ES7822-1AA23-0YA5
<p>SIMATIC STEP 7 Prof. V19, floating license download; Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾</p> <p>Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>		6ES7822-1AE23-0YA5
<p>Spare parts</p>		
<p>Connector, female, 2x2-pole, ET 200SP, interface module, KP32F</p> <p>PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded 10 units per packing unit</p>		6ES7193-4JB00-0AA0
<p>SIMATIC ET 200SP, spare part 5 covers</p> <p>For BusAdapter interface of the ET 200SP CPU</p>		6ES7591-3AA00-0AA0
<p>SIMATIC ET 200SP, spare part server module</p> <p>For ET 200SP</p>		6ES7193-6PA00-0AA0

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Distributed Controllers

based on ET 200SP
Standard CPUs

CPU 1512SP-1 PN

Technical specifications

Article number	6ES7512-1DM03-0AB0 CPU 1512SP-1 PN, 400KB Prog., 2MB Data
General information	
Product type designation	CPU 1512SP-1 PN
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7512-1DK01-0AB0
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated (for program)	400 kbyte
• integrated (for data)	2 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	25 ns
for word operations, typ.	32 ns
for fixed point arithmetic, typ.	42 ns
for floating point arithmetic, typ.	170 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Address space per module	
• Address space per module, max.	288 byte; For input and output data respectively
Address space per station	
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day	
Clock	
• Type	Hardware clock

Article number	6ES7512-1DM03-0AB0 CPU 1512SP-1 PN, 400KB Prog., 2MB Data
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P3; opt. X1 P1 and X1 P2 via BusAdapter BA 2x RJ45
• Number of ports	3; 1. integr. + 2. via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFlenergy	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	128
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFlenergy	Yes; per user program
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program

Technical specifications

Article number	6ES7512-1DM03-0AB0 CPU 1512SP-1 PN, 400KB Prog., 2MB Data
2. Interface	
Interface types	
• RS 485	Yes; Via CM DP module
• Number of ports	1
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols	
Number of connections	
• Number of connections, max.	128; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	1 120
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Article number	6ES7512-1DM03-0AB0 CPU 1512SP-1 PN, 400KB Prog., 2MB Data
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C; No condensation
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	100 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	265 g

Distributed Controllers

based on ET 200SP
Standard CPUs

CPU 1514SP-2 PN

Overview



- CPU 1514SP-2 PN for SIMATIC ET 200SP based on S7-1500 CPU 1515-2 PN
- For applications with medium/high requirements regarding program scope, networking and processing speed, for distributed configuration via PROFINET IO or PROFIBUS DP
- Increase in availability of systems and machines. The additional integrated PROFINET interface with separate IP address can be used for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device, for example.
- PROFINET IO controller for up to 128 IO devices
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO controller
- PROFINET shared I-Device for 4 controllers
- PROFINET IO IRT interface with integrated 3-port switch
- Additional PROFINET interface with separate IP address
- Isochronous mode on PROFINET
- With multiple communication options: PG/OP communication, PROFINET IO, open IE communication (TCP, ISO-on-TCP and UDP), web server and S7 communication (with loadable FBs)
- OPC UA server and client (data access) as runtime option for easy connection of the SIMATIC ET 200SP to third-party devices/systems
- Optional PROFIBUS DP master for 125 PROFIBUS DP slaves (with CM DP module 6ES7545-5DA00-0AB0)
- Optional PROFIBUS DP slave (with CM DP module 6ES7545-5DA00-0AB0)
- Configuration control (option handling)
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes

Note:

SIMATIC Memory Card required for operation of the CPU. BusAdapter is not included in scope of delivery and is to be ordered separately.

Ordering data

Article No.

SIMATIC DP, CPU 1514SP-2 PN for ET 200SP **6ES7514-2DN03-0AB0**

Central processing unit with 600 KB work memory for program and 3.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 6 ns bit performance, SIMATIC Memory Card required, BusAdapter required for 1st interface
Observe the approvals and certificates according to entry 109818872 at support.industry.siemens.com!

Accessories

SIMATIC DP, CM PROFIBUS DP **6ES7545-5DA00-0AB0**
For ET 200SP CPU module w. PROFIBUS DP interface (9-pin D-sub socket) DP master for 125 DP devices, DP device

SIMATIC Memory Card

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS **6ES7954-8LC03-0AA0**
3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LE03-0AA0**
3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LF03-0AA0**
3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU **6ES7954-8LL03-0AA0**
3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LP04-0AA0**
3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LT03-0AA0**
3.3 V Flash, 32 GB

DIN rail 35 mm

SIMATIC, DIN rail 35 mm **6ES5710-8MA11**
Length: 483 mm for 19" cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA21**
Length: 530 mm for 600 mm cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA31**
Length: 830 mm for 900 mm cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA41**
Length 2 m

SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail **6ES7590-5AA00-0AA0**
Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit

SIMATIC ET 200SP, BusAdapter BA 2xRJ45 **6ES7193-6AR00-0AA0**
2 RJ45 sockets

SIMATIC ET 200SP, BusAdapter BA 2xFC **6ES7193-6AF00-0AA0**
2x FastConnect connection

Ordering data	Article No.	Article No.	
SIMATIC ET 200SP, BusAdapter BA 2xSCRJ 2 SCRJ FO connections	6ES7193-6AP00-0AA0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 50 units.	6GK1901-1BB20-2AE0
SIMATIC ET 200SP, BusAdapter BA SCRJ/RJ45 Media converter FOC-CU 1x SCRJ FO connection and 1x RJ45 connection	6ES7193-6AP20-0AA0	IE FC RJ45 plug 180	
SIMATIC ET 200SP, BusAdapter: BA SCRJ/FC Media converter FOC-CU 1x SCRJ FO connection and 1x FastConnect (FC) connection	6ES7193-6AP40-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
SIMATIC BusAdapter BA 2xLC 2x LC glass fiber-optic cable connections	6ES7193-6AG00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	
SIMATIC BusAdapter: BA LC/RJ45 Media converter glass FOC/CU 1x LC FO connection and 1x RJ45 connection	6ES7193-6AG20-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC BusAdapter: BA LC/FC Media converter glass FOC/CU 1x LC FO connection and 1x FastConnect (FC) connection	6ES7193-6AG40-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	
SIMATIC ET 200SP, 160 reference designation labels 10 sheets (160 labels), for BA, BU, IM and I/O modules	6ES7193-6LF30-0AW0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
Labeling strips		Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC ET 200SP, 500 labeling strips, light gray Roll of 500 strips	6ES7193-6LR10-0AA0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles) Delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
SIMATIC ET 200SP, 500 labeling strips, yellow Roll of 500 strips	6ES7193-6LR10-0AG0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC ET 200SP, 1000 labeling strips, light gray 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AA0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 1 unit.	
SIMATIC ET 200SP, 1000 labeling strips, yellow 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AG0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 10 units.	6GK1901-1BB20-2AB0
IE FC RJ45 plugs		Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.	6GK1901-1GA00

Distributed Controllers

based on ET 200SP
Standard CPUs

CPU 1514SP-2 PN

Ordering data

Manuals for ET 200SP distributed I/O system

ET 200SP library:
ET 200SP Manual Collection,
comprising system manual, product
information, and device manuals

Manuals can be downloaded from
the Internet as PDF files under
[https://www.siemens.com/simatic-
docu](https://www.siemens.com/simatic-docu).

SIMATIC Manual Collection on DVD, 5 languages

All manuals for
S7-1200/1500/200/300/400,
LOGO!, SIMATIC DP, PC, PG,
STEP 7, Engineering SW,
Runtime SW, SIMATIC HMI,
SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this
contract, you receive all software
versions for one year. The contract
is automatically extended for one
more year unless it is canceled
three months before expiration.
Delivery and service period:
1 year from date of invoice

Current Manual Collection DVD and
the three subsequent updates

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

- Windows 11 (64-bit)
- Windows 11 Home Version 21H2
 - Windows 11 Home Version 22H2
 - Windows 11 Professional Version 21H2
 - Windows 11 Professional Version 22H2
 - Windows 11 Enterprise 21H2
 - Windows 11 Enterprise 22H2

- Windows Server (64-bit)
- Windows Server 2016 Standard (full installation)
 - Windows Server 2019 Standard (full installation)
 - Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

Article No.

6ES7998-8XC01-8YE0

6ES7998-8XC01-8YE2

Article No.

6ES7822-1AA23-0YA5

SIMATIC STEP 7 Prof. V19; floating license; Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive

Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>

SIMATIC STEP 7 Prof. V19, floating license download; Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾

Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>
Consignee email address required for delivery

Spare parts

Connector, female, 2x2-pole, ET 200SP, interface module, KP32F

PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded 10 units per packing unit

SIMATIC ET 200SP, spare part 5 covers

For BusAdapter interface of the ET 200SP CPU

SIMATIC ET 200SP, spare part server module

For ET 200SP

6ES7822-1AE23-0YA5

6ES7193-4JB00-0AA0

6ES7591-3AA00-0AA0

6ES7193-6PA00-0AA0

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7514-2DN03-0AB0 CPU 1514SP-2 PN, 600KB Prog.,3,5MB Data
General information	
Product type designation	CPU 1514SP-2 PN
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V18 (FW V3.0)
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated (for program)	600 kbyte
• integrated (for data)	3.5 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	6 ns
for word operations, typ.	7 ns
for fixed point arithmetic, typ.	9 ns
for floating point arithmetic, typ.	37 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Address space per module	
• Address space per module, max.	288 byte; For input and output data respectively
Address space per station	
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day	
Clock	
• Type	Hardware clock
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P1 and X1 P2 via BusAdapter BA 2x RJ45
• Number of ports	2; via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12

Article number	6ES7514-2DN03-0AB0 CPU 1514SP-2 PN, 600KB Prog.,3,5MB Data
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes
PROFINET IO Controller Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFIenergy	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFIenergy	Yes; per user program
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program
2. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X2
• Number of ports	1
• integrated switch	No

Distributed Controllers

based on ET 200SP
Standard CPUs

CPU 1514SP-2 PN

Technical specifications

Article number	6ES7514-2DN03-0AB0 CPU 1514SP-2 PN, 600KB Prog.,3,5MB Data
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	No
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- Direct data exchange	No
- IRT	No
- PROFlenergy	Yes; per user program
- Prioritized startup	No
- Number of connectable I/O Devices, max.	32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable I/O Devices for RT, max.	32
- of which in line, max.	32
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	No
- PROFlenergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program
3. Interface	
Interface types	
• RS 485	Yes; Via CM DP module
• Number of ports	1
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET

Article number	6ES7514-2DN03-0AB0 CPU 1514SP-2 PN, 600KB Prog.,3,5MB Data
Protocols	
Number of connections	
• Number of connections, max.	192; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	2 400
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Technical specifications

Article number	6ES7514-2DN03-0AB0 CPU 1514SP-2 PN, 600KB Prog.,3,5MB Data
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C; No condensation
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- GRAPH	Yes

Article number	6ES7514-2DN03-0AB0 CPU 1514SP-2 PN, 600KB Prog.,3,5MB Data
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	100 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	265 g

Distributed Controllers

based on ET 200SP
SIPLUS standard CPUs

SIPLUS CPU 1510SP-1 PN

Overview



- SIPLUS CPU 1510SP-1 PN for SIPLUS ET 200SP based on SIPLUS S7-1500 CPU 1511-1 PN
- For high-performance control solutions using ET 200SP
- Increase in availability of systems and machines
- PROFINET IO controller for up to 64 IO devices
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET I/O controller
- PROFINET shared I-device for 4 controllers
- PROFINET IO IRT interface with integrated 3-port switch
- Isochronous mode on PROFINET
- With multiple communication options: PG/OP communication, PROFINET IO, open IE communication (TCP, ISO-on-TCP and UDP), web server and S7 communication (with loadable FBs)
- Optional PROFIBUS DP device for 125 PROFIBUS DP devices (with CM DP module 6ES7545-5DA00-0AB0)
- Optional PROFIBUS DP device (with CM DP module 6ES7545-5DA00-0AB0)
- Configuration control (option handling)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders

Note:

SIMATIC Memory Card required for operation of the CPU.
The BusAdapter is not included in the scope of supply and is to be ordered separately.
No BusAdapter can be inserted with the variant for the temperature range -40...+70 °C.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1510SP-1 PN

(Extended temperature range and exposure to environmental substances)

Work memory 100 KB for program, 750 KB for data, PROFINET IO IRT interface; SIMATIC Memory Card required

Temperature range -40 ... +60 °C

6AG1510-1DJ01-2AB0

Temperature range -40 ... +70 °C; No BusAdapter can be inserted

6AG1510-1DJ01-7AB0

Accessories

BusAdapter BA 2xRJ45

(Extended temperature range and exposure to environmental substances)

6AG1193-6AR00-7AA0

BusAdapter BA 2xFC for increased vibration and EMC loads

(Extended temperature range and exposure to environmental substances)

6AG1193-6AF00-7AA0

IE FC RJ45 plugs

RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables

IE FC RJ45 plug 180

(Extended temperature range and exposure to environmental substances)

180° cable outlet

1 unit

6AG1901-1BB10-7AA0

SIPLUS Mounting Kit ET 200SP

Mounting accessories for use with increased mechanical vibration and shock loads. Not approved for SIPLUS CPU 6AG1510-1DJ01-7AB0 and BusAdapter BA 2xRJ45

6AG1193-6AA00-0AA0

Other accessories

See SIMATIC ET 200SP CPU 1510SP-1 PN, page 7/2

Technical specifications

Article number	6AG1510-1DJ01-2AB0 SIPLUS ET 200SP CPU 1510SP-1 PN	6AG1510-1DJ01-7AB0 SIPLUS ET 200SP CPU 1510SP-1 PN
General information		
Product type designation	CPU 1510SP-1 PN	CPU 1510SP-1 PN
Engineering with		
• STEP 7 TIA Portal configurable/integrated from version	see entry ID: 109746275	see entry ID: 109746275
Supply voltage		
Rated value (DC)	24 V	24 V
Memory		
Work memory		
• integrated (for program)	100 kbyte	100 kbyte
• integrated (for data)	750 kbyte	750 kbyte
Load memory		
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte	32 Gbyte
CPU processing times		
for bit operations, typ.	72 ns	72 ns
for word operations, typ.	86 ns	86 ns
for fixed point arithmetic, typ.	115 ns	115 ns
for floating point arithmetic, typ.	461 ns	461 ns
Counters, timers and their retentivity		
S7 counter		
• Number	2 048	2 048
IEC counter		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times		
• Number	2 048	2 048
IEC timer		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity		
Flag		
• Size, max.	16 kbyte	16 kbyte
Address area		
I/O address area		
• Inputs	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image
Address space per module		
• Address space per module, max.	288 byte; For input and output data respectively	288 byte; For input and output data respectively
Address space per station		
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day		
Clock		
• Type	Hardware clock	Hardware clock
1. Interface		
Interface types		
• RJ 45 (Ethernet)	Yes; X1 P3; opt. X1 P1 and X1 P2 via BusAdapter BA 2x RJ45	Yes; X1 P3
• Number of ports	3; 1. integr. + 2. via BusAdapter	1
• integrated switch	Yes	
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12	No
Protocols		
• IP protocol	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0	No

Distributed Controllers

based on ET 200SP
SIPLUS standard CPUs

SIPLUS CPU 1510SP-1 PN

Technical specifications

Article number	6AG1510-1DJ01-2AB0 SIPLUS ET 200SP CPU 1510SP-1 PN	6AG1510-1DJ01-7AB0 SIPLUS ET 200SP CPU 1510SP-1 PN
PROFINET IO Controller		
Services		
- PG/OP communication	Yes	Yes
- Isochronous mode	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes	Yes
- PROFlenergy	Yes; per user program	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	64; In total, up to 256 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	64; In total, up to 256 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64	64
- Number of connectable IO Devices for RT, max.	64	64
- of which in line, max.	64	64
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device		
Services		
- PG/OP communication	Yes	Yes
- Isochronous mode	No	No
- IRT	Yes	Yes
- PROFlenergy	Yes; per user program	Yes; per user program
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program
2. Interface		
Interface types		
• RS 485	Yes; Via CM DP module	Yes; Via CM DP module
• Number of ports	1	1
Protocols		
• PROFIBUS DP master	Yes	Yes
• PROFIBUS DP slave	Yes	Yes
• SIMATIC communication	Yes	Yes
PROFIBUS DP master		
• Number of DP slaves, max.	125; In total, up to 256 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	125; In total, up to 256 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols		
Number of connections		
• Number of connections, max.	96; via integrated interfaces of the CPU and connected CPs / CMs	96; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode		
Media redundancy		
- Media redundancy	Yes; only via BusAdapter	No
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	No
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	No
- MRPD	Yes; Requirement: IRT	No
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	
- Number of stations in the ring, max.	50	

Technical specifications

Article number	6AG1510-1DJ01-2AB0 SIPLUS ET 200SP CPU 1510SP-1 PN	6AG1510-1DJ01-7AB0 SIPLUS ET 200SP CPU 1510SP-1 PN
SIMATIC communication		
• S7 routing	Yes	Yes
OPC UA		
• OPC UA Client	Yes	Yes
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space
• Alarms and Conditions	Yes	Yes
Supported technology objects		
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	800	800
• Required Motion Control resources		
- per speed-controlled axis	40	40
- per positioning axis	80	80
- per synchronous axis	160	160
- per external encoder	80	80
- per output cam	20	20
- per cam track	160	160
- per probe	40	40
Controller		
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring		
• High-speed counter	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-25 °C; = Tmin	-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax	50 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance		
Coolants and lubricants		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	No
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Use on land craft, rail vehicles and special-purpose vehicles		
- Against mechanical environmental conditions acc. to EN 60721-3-5	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
- against mechanical environmental conditions in agriculture acc. to ISO 15003	Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	

Distributed Controllers

based on ET 200SP
SIPLUS standard CPUs

SIPLUS CPU 1510SP-1 PN

Technical specifications

Article number	6AG1510-1DJ01-2AB0 SIPLUS ET 200SP CPU 1510SP-1 PN	6AG1510-1DJ01-7AB0 SIPLUS ET 200SP CPU 1510SP-1 PN
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust (with the exception of oil droplets in the air); *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Configuration		
Configuration / programming		
Programming language		
- LAD	Yes	Yes
- FBD	Yes	Yes
- STL	Yes	Yes
- SCL	Yes	Yes
- GRAPH	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Copy protection	Yes	Yes
• Block protection	Yes	Yes
Access protection		
• protection of confidential configuration data	Yes	Yes
• Protection level: Write protection	Yes	Yes
• Protection level: Read/write protection	Yes	Yes
• Protection level: Complete protection	Yes	Yes
Dimensions		
Width	100 mm	100 mm
Height	117 mm	117 mm
Depth	75 mm	75 mm
Weights		
Weight, approx.	310 g	470 g

Overview



- SIPLUS CPU 1512SP-1 PN for SIPLUS ET 200SP based on SIPLUS S7-1500 CPU 1513-1 PN
- For applications with average requirements regarding the program scope and processing speed, for distributed setup via PROFINET IO or PROFIBUS DP.
- Increase in availability of systems and machines
- PROFINET IO controller for up to 128 IO devices
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET I/O controller
- PROFINET shared I-device for 4 controllers
- PROFINET IO IRT interface with integrated 3-port switch
- Isochronous mode on PROFINET
- With multiple communication options: PG/OP communication, PROFINET IO, open IE communication (TCP, ISO-on-TCP and UDP), web server and S7 communication (with loadable FBs)
- Optional PROFIBUS DP device for 125 PROFIBUS DP devices (with CM DP module 6ES7545-5DA00-0AB0)
- Optional PROFIBUS DP device (with CM DP module 6ES7545-5DA00-0AB0)
- Configuration control (option handling)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders

Note:

SIMATIC Memory Card required for operation of the CPU. BusAdapter is not included in scope of supply and is to be ordered separately.

No BusAdapter can be inserted with the variant for the temperature range -40...+70 °C.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1512SP-1 PN

(Extended temperature range and exposure to environmental substances)

Work memory 200 KB for program, 1 MB for data, PROFINET IO IRT interface; SIMATIC Memory Card required

Temperature range -40 ... +60 °C

6AG1512-1DK01-2AB0

Temperature range -40 ... +70 °C; No BusAdapter can be inserted

6AG1512-1DK01-7AB0**Accessories****BusAdapter BA 2xRJ45****6AG1193-6AR00-7AA0**

(Extended temperature range and exposure to environmental substances)

BusAdapter BA 2xFC for increased vibration and EMC loads**6AG1193-6AF00-7AA0**

(Extended temperature range and exposure to environmental substances)

IE FC RJ45 plugs

RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables

IE FC RJ45 plug 180

180° cable outlet

1 unit

6AG1901-1BB10-7AA0**SIPLUS Mounting Kit ET 200SP****6AG1193-6AA00-0AA0**

Mounting accessories for use with increased mechanical vibration and shock loads. Not approved for SIPLUS CPU 6AG1512-1DK01-7AB0 and BusAdapter BA 2xRJ45

Other accessories

See SIMATIC ET 200SP, CPU 1512SP-1 PN, page 7/7

Distributed Controllers

based on ET 200SP
SIPLUS standard CPUs

SIPLUS CPU 1512SP-1 PN

Technical specifications

Article number	6AG1512-1DK01-2AB0 SIPLUS ET 200SP CPU 1512SP-1 PN	6AG1512-1DK01-7AB0 SIPLUS ET 200SP CPU 1512SP-1 PN
General information		
Product type designation	CPU 1512SP-1 PN	CPU 1512SP-1 PN
Engineering with		
• STEP 7 TIA Portal configurable/integrated from version	see entry ID: 109746275	see entry ID: 109746275
Supply voltage		
Rated value (DC)	24 V	24 V
Memory		
Work memory		
• integrated (for program)	200 kbyte	200 kbyte
• integrated (for data)	1 Mbyte	1 Mbyte
Load memory		
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte	32 Gbyte
CPU processing times		
for bit operations, typ.	48 ns	48 ns
for word operations, typ.	58 ns	58 ns
for fixed point arithmetic, typ.	77 ns	77 ns
for floating point arithmetic, typ.	307 ns	307 ns
Counters, timers and their retentivity		
S7 counter		
• Number	2 048	2 048
IEC counter		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 timer		
• Number	2 048	2 048
IEC timer		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity		
Flag		
• Size, max.	16 kbyte	16 kbyte
Address area		
I/O address area		
• Inputs	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image
Address space per module		
• Address space per module, max.	288 byte; For input and output data respectively	288 byte; For input and output data respectively
Address space per station		
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day		
Clock		
• Type	Hardware clock	Hardware clock
1. Interface		
Interface types		
• RJ 45 (Ethernet)	Yes; X1 P3; opt. X1 P1 and X1 P2 via BusAdapter BA 2x RJ45	Yes; X1 P3
• Number of ports	3; 1. integr. + 2. via BusAdapter	1
• integrated switch	Yes	
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x M12, BA 2x FC, BA 2x LC, BA LC/RJ45, BA LC/FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC,	No
Protocols		
• IP protocol	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0	No

Technical specifications

Article number	6AG1512-1DK01-2AB0 SIPLUS ET 200SP CPU 1512SP-1 PN	6AG1512-1DK01-7AB0 SIPLUS ET 200SP CPU 1512SP-1 PN
PROFINET IO Controller		
Services		
- PG/OP communication	Yes	Yes
- Isochronous mode	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes	Yes
- PROFlenergy	Yes; per user program	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64	64
- Number of connectable IO Devices for RT, max.	128	128
- of which in line, max.	128	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device		
Services		
- PG/OP communication	Yes	Yes
- Isochronous mode	No	No
- IRT	Yes	Yes
- PROFlenergy	Yes; per user program	Yes; per user program
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program
2. Interface		
Interface types		
• RS 485	Yes; Via CM DP module	Yes; Via CM DP module
• Number of ports	1	1
Protocols		
• PROFIBUS DP master	Yes	Yes
• PROFIBUS DP slave	Yes	Yes
• SIMATIC communication	Yes	Yes
PROFIBUS DP master		
• Number of DP slaves, max.	125; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	125; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols		
Number of connections		
• Number of connections, max.	128; via integrated interfaces of the CPU and connected CPs / CMs	128; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode		
Media redundancy		
- Media redundancy	Yes; only via BusAdapter	No
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	No
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	No
- MRPD	Yes; Requirement: IRT	No
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	
- Number of stations in the ring, max.	50	

Distributed Controllers

based on ET 200SP
SIPLUS standard CPUs

SIPLUS CPU 1512SP-1 PN

Technical specifications

Article number	6AG1512-1DK01-2AB0 SIPLUS ET 200SP CPU 1512SP-1 PN	6AG1512-1DK01-7AB0 SIPLUS ET 200SP CPU 1512SP-1 PN
SIMATIC communication		
• S7 routing	Yes	Yes
OPC UA		
• OPC UA Client	Yes	Yes
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space
• Alarms and Conditions	Yes	Yes
Supported technology objects		
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	800	800
• Required Motion Control resources		
- per speed-controlled axis	40	40
- per positioning axis	80	80
- per synchronous axis	160	160
- per external encoder	80	80
- per output cam	20	20
- per cam track	160	160
- per probe	40	40
Controller		
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring		
• High-speed counter	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin	-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax	50 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance		
Coolants and lubricants		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	No
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Use on land craft, rail vehicles and special-purpose vehicles		
- Against mechanical environmental conditions acc. to EN 60721-3-5	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
- against mechanical environmental conditions in agriculture acc. to ISO 15003	Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	

Technical specifications

Article number	6AG1512-1DK01-2AB0 SIPLUS ET 200SP CPU 1512SP-1 PN	6AG1512-1DK01-7AB0 SIPLUS ET 200SP CPU 1512SP-1 PN
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust (with the exception of oil droplets in the air); *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Configuration		
Configuration / programming		
Programming language		
- LAD	Yes	Yes
- FBD	Yes	Yes
- STL	Yes	Yes
- SCL	Yes	Yes
- GRAPH	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Copy protection	Yes	Yes
• Block protection	Yes	Yes
Access protection		
• protection of confidential configuration data	Yes	Yes
• Protection level: Write protection	Yes	Yes
• Protection level: Read/write protection	Yes	Yes
• Protection level: Complete protection	Yes	Yes
Dimensions		
Width	100 mm	100 mm
Height	117 mm	117 mm
Depth	75 mm	75 mm
Weights		
Weight, approx.	310 g	470 g

Distributed Controllers

based on ET 200SP
Fail-safe CPUs

CPU 1510SP F-1 PN

Overview



- CPU 1510SP F-1 PN for SIMATIC ET 200SP based on S7-1500 CPU 1511F-1 PN
- For high-performance control solutions using ET 200SP
- Increase in availability of systems and machines
- Supports PROFIsafe in centralized and distributed configuration
- PROFINET IO controller for up to 64 IO devices
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO controller
- PROFINET shared I-Device for 4 controllers
- PROFINET IO IRT interface with integrated 3-port switch
- Isochronous mode on PROFINET
- With multiple communication options: PG/OP communication, PROFINET IO, open IE communication (TCP, ISO-on-TCP and UDP), web server and S7 communication (with loadable FBs)
- OPC UA server and client (data access) as runtime option for easy connection of the SIMATIC ET 200SP to third-party devices/systems
- Optional PROFIBUS master for 125 PROFIBUS DP slaves (with CM DP module 6ES7545-5DA00-0AB0)
- Configuration control (option handling)
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes

Note:

SIMATIC Memory Card required for operation of the CPU.

The BusAdapter is not included in the scope of supply and must be ordered separately.

Ordering data

Article No.

SIMATIC DP, CPU 1510SP F-1 PN for ET 200SP **6ES7510-1SK03-0AB0**

Central processing unit with 300 KB work memory for program and 1 MB for data, 1st interface: PROFINET IRT with 3-port switch, 25 ns bit performance, SIMATIC Memory Card required, BusAdapter required for ports 1 and 2
Observe the approvals and certificates according to entry 109817615 at support.industry.siemens.com!

Accessories

SIMATIC DP, CM PROFIBUS DP **6ES7545-5DA00-0AB0**

For ET 200SP CPU module w. PROFIBUS DP interface (9-pin D-sub socket) DP master for 125 DP devices, DP device

SIMATIC Memory Card

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS **6ES7954-8LC03-0AA0**

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LE03-0AA0**

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LF03-0AA0**

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU **6ES7954-8LL03-0AA0**

3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LP04-0AA0**

3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LT03-0AA0**

3.3 V Flash, 32 GB

DIN rail 35 mm

SIMATIC, DIN rail 35 mm **6ES5710-8MA11**

Length: 483 mm for 19" cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA21**

Length: 530 mm for 600 mm cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA31**

Length: 830 mm for 900 mm cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA41**

Length 2 m

SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail **6ES7590-5AA00-0AA0**

Absolutely necessary for the 2000 mm mounting rail
20 units per packing unit

SIMATIC ET 200SP, BusAdapter BA 2xRJ45 **6ES7193-6AR00-0AA0**

2 RJ45 sockets

SIMATIC ET 200SP, BusAdapter BA 2xFC **6ES7193-6AF00-0AA0**

2x FastConnect connection

SIMATIC ET 200SP, BusAdapter BA 2xSCRJ **6ES7193-6AP00-0AA0**

2 SCRJ FO connections

Ordering data	Article No.	Article No.
SIMATIC ET 200SP, BusAdapter BA SCRJ/RJ45 Media converter FOC-CU 1x SCRJ FO connection and 1x RJ45 connection	6ES7193-6AP20-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.
SIMATIC ET 200SP, BusAdapter: BA SCRJ/FC Media converter FOC-CU 1x SCRJ FO connection and 1x FastConnect (FC) connection	6ES7193-6AP40-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.
SIMATIC ET 200SP, 160 reference designation labels 10 sheets (160 labels), for BA, BU, IM and I/O modules	6ES7193-6LF30-0AW0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.
Labeling strips		Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.
SIMATIC ET 200SP, 500 labeling strips, light gray Roll of 500 strips	6ES7193-6LR10-0AA0	Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.
SIMATIC ET 200SP, 500 labeling strips, yellow Roll of 500 strips	6ES7193-6LR10-0AG0	Industrial Ethernet FastConnect stripping tool Stripping tool for fast stripping of insulation from the IE FastConnect cables.
SIMATIC ET 200SP, 1000 labeling strips, light gray 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AA0	Manuals for ET 200SP distributed I/O system ET 200SP library: ET 200SP Manual Collection, comprising system manual, product information, and device manuals Manuals are available as PDF files on the Internet under http://www.siemens.com/simatic-docu .
SIMATIC ET 200SP, 1000 labeling strips, yellow 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AG0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT
IE FC RJ45 plugs		
Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 1 unit.	6GK1901-1BB20-2AA0	
Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 10 units.	6GK1901-1BB20-2AB0	
Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 50 units.	6GK1901-1BB20-2AE0	
IE FC RJ45 plug 180		
Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0	

Distributed Controllers

based on ET 200SP

Fail-safe CPUs

CPU 1510SP F-1 PN

Ordering data

Article No.

Article No.

SIMATIC Manual Collection on DVD, 5 languages

Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice

6ES7998-8XC01-8YE2

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSC
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

- Windows 11 (64-bit)
- Windows 11 Home Version 21H2
 - Windows 11 Home Version 22H2
 - Windows 11 Professional Version 21H2
 - Windows 11 Professional Version 22H2
 - Windows 11 Enterprise 21H2
 - Windows 11 Enterprise 22H2

- Windows Server (64-bit)
- Windows Server 2016 Standard (full installation)
 - Windows Server 2019 Standard (full installation)
 - Windows Server 2022 Standard (full installation)

Type of delivery:
9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

SIMATIC STEP 7 Prof. V19; floating license; Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive

Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool>

6ES7822-1AA23-0YA5

SIMATIC STEP 7 Prof. V19, floating license download; Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾

Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at <https://www.siemens.com/compatool> Consignee email address required for delivery

6ES7822-1AE23-0YA5

STEP 7 Safety Advanced V19

Task:
Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O
Requirement:
STEP 7 Professional V19

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F
Content: 1x USB

6ES7833-1FA23-0YA5

SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾

Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery

6ES7833-1FA23-0YH5

Spare parts

Connector, female, 2x2-pole, ET 200SP, interface module, KP32F

PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded 10 units per packing unit

6ES7193-4JB00-0AA0

SIMATIC ET 200SP, spare part 5 covers

For BusAdapter interface of the ET 200SP CPU

6ES7591-3AA00-0AA0

SIMATIC ET 200SP, spare part server module

For ET 200SP

6ES7193-6PA00-0AA0

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7510-1SK03-0AB0 CPU1510SP F-1 PN, 300KB Prog., 1MB Data
General information	
Product type designation	CPU 1510SP F-1 PN
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7510-1SJ01-0AB0
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated (for program)	300 kbyte
• integrated (for data)	1 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	25 ns
for word operations, typ.	32 ns
for fixed point arithmetic, typ.	42 ns
for floating point arithmetic, typ.	170 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Address space per module	
• Address space per module, max.	288 byte; For input and output data respectively
Address space per station	
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day	
Clock	
• Type	Hardware clock
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P3; opt. X1 P1 and X1 P2 via BusAdapter BA 2x RJ45
• Number of ports	3; 1. integr. + 2. via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12

Article number	6ES7510-1SK03-0AB0 CPU1510SP F-1 PN, 300KB Prog., 1MB Data
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes
PROFINET IO Controller Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFIenergy	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	128
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFIenergy	Yes; per user program
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program
2. Interface	
Interface types	
• RS 485	Yes; Via CM DP module
• Number of ports	1
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET

Distributed Controllers

based on ET 200SP
Fail-safe CPUs

CPU 1510SP F-1 PN

Technical specifications

Article number	6ES7510-1SK03-0AB0 CPU1510SP F-1 PN, 300KB Prog., 1MB Data
Protocols	
Number of connections	
• Number of connections, max.	128; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	1 120
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Article number	6ES7510-1SK03-0AB0 CPU1510SP F-1 PN, 300KB Prog., 1MB Data
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C; No condensation
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Write protection for Failsafe	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	100 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	265 g

7

Overview



- CPU 1512SP F-1 PN for SIMATIC ET 200SP based on S7-1500 CPU 1513F-1 PN
- For applications with medium requirements in terms of program scope and processing speed, for distributed configurations via PROFINET IO or PROFIBUS DP.
- Increase in availability of systems and machines
- Supports PROFI-safe in centralized and distributed configuration
- PROFINET IO controller for up to 128 IO devices
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO controller
- PROFINET shared I-Device for 4 controllers
- PROFINET IO IRT interface with integrated 3-port switch
- Isochronous mode on PROFINET
- With multiple communication options: PG/OP communication, PROFINET IO, open IE communication (TCP, ISO-on-TCP and UDP), web server and S7 communication (with loadable FBs)
- OPC UA server and client (data access) as runtime option for easy connection of the SIMATIC ET 200SP to third-party devices/systems
- Optional PROFIBUS master for 125 PROFIBUS DP slaves (with CM DP module 6ES7545-5DA00-0AB0)
- Configuration control (option handling)
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes

Note:

SIMATIC Memory Card required for operation of the CPU.

The BusAdapter is not included in the scope of supply and must be ordered separately.

Ordering data

Article No.

SIMATIC DP, CPU 1512SP F-1 PN for ET 200SP **6ES7512-1SM03-0AB0**

Central processing unit with 600 KB work memory for program and 2 MB for data, 1st interface: PROFINET IRT with 3-port switch, 25 ns bit performance, SIMATIC Memory Card required, BusAdapter required for ports 1 and 2 Observe the approvals and certificates according to entry 109817615 at support.industry.siemens.com!

Accessories**SIMATIC DP, CM PROFIBUS DP for ET 200SP CPU** **6ES7545-5DA00-0AB0**

Module with PROFIBUS DP interface (9-pin D-sub socket) DP master for 125 DP devices, DP device

SIMATIC Memory Card**SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS** **6ES7954-8LC03-0AA0**

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LE03-0AA0**

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LF03-0AA0**

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU **6ES7954-8LL03-0AA0**

3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LP04-0AA0**

3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LT03-0AA0**

3.3 V Flash, 32 GB

DIN rail 35 mm**SIMATIC, DIN rail 35 mm** **6ES5710-8MA11**

Length: 483 mm for 19" cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA21**

Length: 530 mm for 600 mm cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA31**

Length: 830 mm for 900 mm cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA41**

Length 2 m

SIMATIC S7-1500, grounding screw for connecting PE to the S7-1500 mounting rail **6ES7590-5AA00-0AA0**

Absolutely necessary for the 2000 mm mounting rail 20 units per packing unit

SIMATIC ET 200SP, BusAdapter BA 2xRJ45 **6ES7193-6AR00-0AA0**

2 RJ45 sockets

SIMATIC ET 200SP, BusAdapter BA 2xFC **6ES7193-6AF00-0AA0**

2x FastConnect connection

SIMATIC ET 200SP, BusAdapter BA 2xSCRJ **6ES7193-6AP00-0AA0**

2 SCRJ FO connections

Distributed Controllers

based on ET 200SP

Fail-safe CPUs

CPU 1512SP F-1 PN

Ordering data	Article No.	Article No.	
SIMATIC ET 200SP, BusAdapter BA SCRJ/RJ45 Media converter FOC-CU 1x SCRJ FO connection and 1x RJ45 connection	6ES7193-6AP20-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC ET 200SP, BusAdapter: BA SCRJ/FC Media converter FOC-CU 1x SCRJ FO connection and 1x FastConnect (FC) connection	6ES7193-6AP40-0AA0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC ET 200SP, 160 reference designation labels 10 sheets (160 labels), for BA, BU, IM and I/O modules	6ES7193-6LF30-0AW0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
Labeling strips		Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC ET 200SP, 500 labeling strips, light gray Roll of 500 strips	6ES7193-6LR10-0AA0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 1 unit.	6GK1901-1GA00
SIMATIC ET 200SP, 500 labeling strips, yellow Roll of 500 strips	6ES7193-6LR10-0AG0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 10 units.	6GK1901-1BB20-2AB0
SIMATIC ET 200SP, 1000 labeling strips, light gray 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AA0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 50 units.	6GK1901-1BB20-2AE0
SIMATIC ET 200SP, 1000 labeling strips, yellow 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AG0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
IE FC RJ45 plugs		SIMATIC Manual Collection on DVD, 5 languages Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice Current Manual Collection DVD and the three subsequent updates	6ES7998-8XC01-8YE2
Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 1 unit.	6GK1901-1BB20-2AA0	Manuals for ET 200SP distributed I/O system ET 200SP library: ET 200SP Manual Collection, comprising system manual, product information, and device manuals Manuals are available as PDF files on the Internet under http://www.siemens.com/simatic-docu .	
Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 10 units.	6GK1901-1BB20-2AB0		
Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 50 units.	6GK1901-1BB20-2AE0		
IE FC RJ45 plug 180			
Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0		
Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0		

Ordering data	Article No.	Article No.
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement:</p> <p>Windows 10 (64-bit)</p> <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O</p> <p>Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>
<p>SIMATIC STEP 7 Prof. V19; floating license; Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive</p> <p>Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB</p>
<p>SIMATIC STEP 7 Prof. V19, floating license download; Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾</p> <p>Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery</p>
		<p>Spare parts</p>
		<p>Connector, female, 2x2-pole, ET 200SP, interface module, KP32F</p> <p>PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded 10 units per packing unit</p>
		<p>SIMATIC ET 200SP, spare part 5 covers</p> <p>For BusAdapter interface of the ET 200SP CPU</p>
		<p>SIMATIC ET 200SP, spare part server module</p> <p>For ET 200SP</p>

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Distributed Controllers

based on ET 200SP

Fail-safe CPUs

CPU 1512SP F-1 PN

Technical specifications

Article number	6ES7512-1SM03-0AB0 CPU 1512SP F-1 PN, 600KB Prog./2MB Data
General information	
Product type designation	CPU 1512SP F-1 PN
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V18 (FW V3.0); with older TIA Portal versions configurable as 6ES7 512-1SK01-0AB0
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated (for program)	600 kbyte
• integrated (for data)	2 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	25 ns
for word operations, typ.	32 ns
for fixed point arithmetic, typ.	42 ns
for floating point arithmetic, typ.	170 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Address space per module	
• Address space per module, max.	288 byte; For input and output data respectively
Address space per station	
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day	
Clock	
• Type	Hardware clock

Article number	6ES7512-1SM03-0AB0 CPU 1512SP F-1 PN, 600KB Prog./2MB Data
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P3; opt. X1 P1 and X1 P2 via BusAdapter BA 2x RJ45
• Number of ports	3; 1. integr. + 2. via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFlenergy	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	128
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFlenergy	Yes; per user program
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program

Technical specifications

Article number	6ES7512-1SM03-0AB0 CPU 1512SP F-1 PN, 600KB Prog./2MB Data
2. Interface	
Interface types	
• RS 485	Yes; Via CM DP module
• Number of ports	1
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols	
Number of connections	
• Number of connections, max.	128; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	1 120
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Article number	6ES7512-1SM03-0AB0 CPU 1512SP F-1 PN, 600KB Prog./2MB Data
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C; No condensation
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Write protection for Failsafe	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	100 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	265 g

Distributed Controllers

based on ET 200SP

Fail-safe CPUs

CPU 1514SP F-2 PN

Overview

- CPU 1514SP F21 PN for SIMATIC ET 200SP based on S7-1500 CPU 1515F-2 PN
- For applications with medium/high requirements regarding program scope, networking and processing speed, for distributed configuration via PROFINET IO or PROFIBUS DP
- Increase in availability of systems and machines. The additional integrated PROFINET interface with separate IP address can be used for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device, for example.
- Supports PROFI-safe in centralized and distributed configuration
- PROFINET IO controller for up to 128 IO devices
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO controller
- PROFINET shared I-Device for 4 controllers
- PROFINET IO IRT interface with integrated 3-port switch
- Additional PROFINET interface with separate IP address
- Isochronous mode on PROFINET
- With multiple communication options: PG/OP communication, PROFINET IO, open IE communication (TCP, ISO-on-TCP and UDP), web server and S7 communication (with loadable FBs)
- OPC UA server and client (data access) as runtime option for easy connection of the SIMATIC ET 200SP to third-party devices/systems
- Optional PROFIBUS master for 125 PROFIBUS DP slaves (with CM DP module 6ES7545-5DA00-0AB0)
- Configuration control (option handling)
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing), support for external encoders, output cams/cam tracks and probes

Note:

SIMATIC Memory Card required for operation of the CPU.

The BusAdapter is not included in the scope of supply and must be ordered separately.

Ordering data

Article No.

SIMATIC DP, CPU 1514SP F-2 PN for ET 200SP **6ES7514-2SN03-0AB0**

Central processing unit with 900 KB work memory for program and 3.5 MB for data, 1st interface: PROFINET IRT with 2-port switch, 2nd interface: PROFINET RT, 6 ns bit performance, SIMATIC Memory Card required, BusAdapter required for 1st interface Observe the approvals and certificates according to entry 109818872 at support.industry.siemens.com!

Accessories

SIMATIC DP, CM PROFIBUS DP **6ES7545-5DA00-0AB0**

For ET 200SP CPU module w. PROFIBUS DP interface (9-pin D-sub socket) DP master for 125 DP devices, DP device

SIMATIC Memory Card

SIMATIC S7, memory card for S7-1x 00 CPU/SINAMICS **6ES7954-8LC03-0AA0**

3.3 V Flash, 4 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LE03-0AA0**

3.3 V Flash, 12 MB

SIMATIC S7, memory card for S7-1x00 CPU/SINAMICS **6ES7954-8LF03-0AA0**

3.3 V Flash, 24 MB

SIMATIC S7, memory card for S7-1x00 CPU **6ES7954-8LL03-0AA0**

3.3 V Flash, 256 MB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LP04-0AA0**

3.3 V Flash, 2 GB

SIMATIC S7, memory card for S7-1x 00 CPU **6ES7954-8LT03-0AA0**

3.3 V Flash, 32 GB

DIN rail 35 mm

SIMATIC, DIN rail 35 mm **6ES5710-8MA11**

Length: 483 mm for 19" cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA21**

Length: 530 mm for 600 mm cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA31**

Length: 830 mm for 900 mm cabinets

SIMATIC, DIN rail 35 mm **6ES5710-8MA41**

Length 2 m

SIMATIC S7-1500, grounding screw **6ES7590-5AA00-0AA0**

For connecting PE to the S7-1500 mounting rail; essential for 2000 mm mounting rail 20 units per packing unit

SIMATIC ET 200SP, BusAdapter BA 2XRJ45 2x RJ45 sockets

6ES7193-6AR00-0AA0

SIMATIC ET 200SP, BusAdapter BA 2xFC 2x FastConnect connections

6ES7193-6AF00-0AA0

Ordering data	Article No.	Ordering data	Article No.
SIMATIC ET 200SP, BusAdapter BA 2xSCRJ 2 SCRJ FO connections	6ES7193-6AP00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.	6GK1901-1BB10-2AB0
SIMATIC ET 200SP, BusAdapter BA SCRJ/RJ45 Media converter FOC-CU 1x SCRJ FO connection and 1x RJ45 connection	6ES7193-6AP20-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.	6GK1901-1BB10-2AE0
SIMATIC ET 200SP, BusAdapter: BA SCRJ/FC Media converter FOC-CU 1x SCRJ FO connection and 1x FastConnect (FC) connection	6ES7193-6AP40-0AA0	Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A) TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m, minimum order quantity 20 m.	6XV1840-2AH10
SIMATIC ET 200SP, 160 reference designation labels 10 sheets (160 labels), for BA, BU, IM and I/O modules	6ES7193-6LF30-0AW0	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C) TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat 5E, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.	6XV1840-3AH10
Labeling strips		Industrial Ethernet FC TP marine cable TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat 5E, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.	6XV1840-4AH10
SIMATIC ET 200SP, 500 labeling strips, light gray Roll of 500 strips	6ES7193-6LR10-0AA0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 1 unit.	6GK1901-1BB20-2AA0
SIMATIC ET 200SP, 500 labeling strips, yellow Roll of 500 strips	6ES7193-6LR10-0AG0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 10 units.	6GK1901-1BB20-2AB0
SIMATIC ET 200SP, 1000 labeling strips, light gray 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AA0	Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 50 units.	6GK1901-1BB20-2AE0
SIMATIC ET 200SP, 1000 labeling strips, yellow 10 sheets DIN A4, perforated, paper, 180 g/sqm	6ES7193-6LA10-0AG0	IE FC RJ45 plug 180	
IE FC RJ45 plugs		Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0
Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 1 unit.	6GK1901-1BB20-2AA0	Manuals for ET 200SP distributed I/O system ET 200SP library: ET 200SP Manual Collection, comprising system manual, product information, and device manuals Manuals are available as PDF files on the Internet under https://www.siemens.com/simatic-docu .	6GK1901-1GA00
Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 10 units.	6GK1901-1BB20-2AB0	SIMATIC Manual Collection on DVD, 5 languages All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
Industrial Ethernet FastConnect RJ45 plug 90 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 90° cable outlet 1 pack = 50 units.	6GK1901-1BB20-2AE0		
IE FC RJ45 plug 180			
Industrial Ethernet FastConnect RJ45 plug 180 2x 2 RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.	6GK1901-1BB10-2AA0		

Distributed Controllers

based on ET 200SP

Fail-safe CPUs

CPU 1514SP F-2 PN

Ordering data	Article No.	Article No.
<p>SIMATIC Manual Collection on DVD, 5 languages</p> <p>Software Update Service, under this contract, you receive all software versions for one year. The contract is automatically extended for one more year unless it is canceled three months before expiration. Delivery and service period: 1 year from date of invoice</p>	6ES7998-8XC01-8YE2	
<p>STEP 7 Professional V19</p> <p>Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC</p> <p>Requirement:</p> <ul style="list-style-type: none"> Windows 10 (64-bit) <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC <p>Windows 11 (64-bit)</p> <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 <p>Windows Server (64-bit)</p> <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) <p>Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download</p>		<p>STEP 7 Safety Advanced V19</p> <p>Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O</p> <p>Requirement: STEP 7 Professional V19</p> <p>Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p>
<p>SIMATIC STEP 7 Prof. V19; floating license; Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive</p> <p>Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool</p>	6ES7822-1AA23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software; floating license for 1 user; license key on USB flash drive</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F Content: 1x USB</p>
<p>SIMATIC STEP 7 Prof. V19, floating license download; Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾</p> <p>Class A, 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, SIMATIC S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery</p>	6ES7822-1AE23-0YA5	<p>SIMATIC S7, F-programming tool; STEP 7 Safety Advanced V19; Engineering software, floating license for 1 user; license key for download¹⁾</p> <p>Class A, 2 languages (en, de); runs with TIA Portal V19 STEP 7 Professional V19; for configuring SIMATIC S7-1200F/1500F, SIMATIC S7-1500F SW Controller, SIMATIC S7-300F/400F/WinAC F; Consignee email address required for delivery</p>
		<p>Spare parts</p>
		<p>Connector, female, 2x2-pole, ET 200SP, interface module, KP32F</p> <p>PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded 10 units per packing unit</p>
		<p>SIMATIC ET 200SP, spare part 5 covers</p> <p>For BusAdapter interface of the ET 200SP CPU</p>
		<p>SIMATIC ET 200SP, spare part server module</p> <p>For ET 200SP</p>

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7514-2SN03-0AB0 CPU 1514SP F-2 PN, 900KbProg,3,5MbData
General information	
Product type designation	CPU 1514SP F-2 PN
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V18 (FW V3.0)
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated (for program)	900 kbyte
• integrated (for data)	3.5 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	6 ns
for word operations, typ.	7 ns
for fixed point arithmetic, typ.	9 ns
for floating point arithmetic, typ.	37 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Address space per module	
• Address space per module, max.	288 byte; For input and output data respectively
Address space per station	
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day	
Clock	
• Type	Hardware clock

Article number	6ES7514-2SN03-0AB0 CPU 1514SP F-2 PN, 900KbProg,3,5MbData
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P1 and X1 P2 via BusAdapter BA 2x RJ45
• Number of ports	2; via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFlenergy	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFlenergy	Yes; per user program
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program

Distributed Controllers

based on ET 200SP

Fail-safe CPUs

CPU 1514SP F-2 PN

Technical specifications

Article number	6ES7514-2SN03-0AB0 CPU 1514SP F-2 PN, 900KbProg.3,5MbData
2. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X2
• Number of ports	1
• integrated switch	No
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	No
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- Direct data exchange	No
- IRT	No
- PROFIenergy	Yes; per user program
- Prioritized startup	No
- Number of connectable IO Devices, max.	32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.	32
- of which in line, max.	32
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	No
- PROFIenergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program

Article number	6ES7514-2SN03-0AB0 CPU 1514SP F-2 PN, 900KbProg.3,5MbData
3. Interface	
Interface types	
• RS 485	Yes; Via CM DP module
• Number of ports	1
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols	
Number of connections	
• Number of connections, max.	192; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes

7

Technical specifications

Article number	6ES7514-2SN03-0AB0 CPU 1514SP F-2 PN, 900KbProg.3,5MbData
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	2 400
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C; No condensation
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual

Article number	6ES7514-2SN03-0AB0 CPU 1514SP F-2 PN, 900KbProg.3,5MbData
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Write protection for Failsafe	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	100 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	265 g

Distributed Controllers

based on ET 200SP
SIPLUS fail-safe CPUs

SIPLUS CPU 1510SP F-1 PN

Overview



- SIPLUS CPU 1510SP F-1 PN for SIPLUS ET 200SP based on S7-1500 CPU 1511F-1 PN
- For high-performance control solutions using ET 200SP
- Increase in availability of systems and machines
- Supports PROFIsafe in centralized and distributed configuration
- PROFINET IO controller for up to 64 IO devices
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET I/O controller
- PROFINET shared I-device for 4 controllers
- PROFINET IO IRT interface with integrated 3-port switch
- Isochronous mode on PROFINET
- With multiple communication options: PG/OP communication, PROFINET IO, open IE communication (TCP, ISO-on-TCP and UDP), web server and S7 communication (with loadable FBs)
- Optional PROFIBUS device for 125 PROFIBUS DP devices (with CM DP module 6ES7545-5DA00-0AB0)
- Configuration control (option handling)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders

Note:

SIMATIC Memory Card required for operation of the CPU.

The BusAdapter is not included in the scope of supply and must be ordered separately.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1510SP F-1 PN

6AG1510-1SJ01-2AB0

(Extended temperature range and exposure to environmental substances)

Work memory 150 KB for program, 750 KB for data, PROFINET IO IRT interface; SIMATIC Memory Card required

Accessories

SIPLUS BusAdapter BA 2xRJ45

6AG1193-6AR00-7AA0

SIPLUS BusAdapter BA 2xFC

6AG1193-6AF00-7AA0

IE FC RJ45 plugs

RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables

IE FC RJ45 plug 180

(Extended temperature range and exposure to environmental substances)

180° cable outlet

1 unit

6AG1901-1BB10-7AA0

SIPLUS Mounting Kit ET 200SP

6AG1193-6AA00-0AA0

Mounting accessories for use with increased mechanical vibration and shock loads. Not approved for SIPLUS BusAdapter BA 2xRJ45

Other accessories

See SIMATIC ET 200SP, CPU 1510 F-1 PN, page 7/28

Technical specifications

Article number	6AG1510-1SJ01-2AB0 SIPLUS ET 200SP CPU 1510SP F-1PN
General information	
Product type designation	CPU 1510SP F-1 PN
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	see entry ID: 109746275
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated (for program)	150 kbyte
• integrated (for data)	750 kbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	72 ns
for word operations, typ.	86 ns
for fixed point arithmetic, typ.	115 ns
for floating point arithmetic, typ.	461 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Address space per module	
• Address space per module, max.	288 byte; For input and output data respectively
Address space per station	
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day	
Clock	
• Type	Hardware clock

Article number	6AG1510-1SJ01-2AB0 SIPLUS ET 200SP CPU 1510SP F-1PN
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P3; opt. X1 P1 and X1 P2 via BusAdapter BA 2x RJ45
• Number of ports	3; 1. integr. + 2. via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0
PROFINET IO Controller Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFlenergy	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	64; In total, up to 256 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	64
- of which in line, max.	64
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFlenergy	Yes; per user program
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program

Distributed Controllers

based on ET 200SP
SIPLUS fail-safe CPUs

SIPLUS CPU 1510SP F-1 PN

Technical specifications

Article number	6AG1510-1SJ01-2AB0 SIPLUS ET 200SP CPU 1510SP F-1PN
2. Interface	
Interface types	
• RS 485	Yes; Via CM DP module
• Number of ports	1
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125; In total, up to 256 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols	
Number of connections	
• Number of connections, max.	96; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space
• Alarms and Conditions	Yes
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	800
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Article number	6AG1510-1SJ01-2AB0 SIPLUS ET 200SP CPU 1510SP F-1PN
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax
• vertical installation, min.	-25 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)

Technical specifications

Article number	6AG1510-1SJ01-2AB0 SIPLUS ET 200SP CPU 1510SP F-1PN
Remark	* The supplied plug covers must remain in place over the unused interfaces during operation!
Remark	- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Article number	6AG1510-1SJ01-2AB0 SIPLUS ET 200SP CPU 1510SP F-1PN
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Write protection for Failsafe	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	100 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	310 g

Distributed Controllers

based on ET 200SP
SIPLUS fail-safe CPUs

SIPLUS CPU 1512SP F-1 PN

Overview



- SIPLUS CPU 1512SP F-1 PN for SIPLUS ET 200SP based on S7-1500 CPU 1513F-1 PN
- For applications with average requirements regarding the program scope and processing speed, for distributed setup via PROFINET IO or PROFIBUS DP.
- Increase in availability of systems and machines
- Supports PROFIsafe in centralized and distributed configuration
- PROFINET IO controller for up to 128 IO devices
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET I/O controller
- PROFINET shared I-device for 4 controllers
- PROFINET IO IRT interface with integrated 3-port switch
- Isochronous mode on PROFINET
- With multiple communication options: PG/OP communication, PROFINET IO, open IE communication (TCP, ISO-on-TCP and UDP), web server and S7 communication (with loadable FBs)
- Optional PROFIBUS device for 125 PROFIBUS DP devices (with CM DP module 6ES7545-5DA00-0AB0)
- Configuration control (option handling)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders

Note:

SIMATIC Memory Card required for operation of the CPU.

The BusAdapter is not included in the scope of supply and must be ordered separately.

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CPU 1512SP F-1 PN

(Extended temperature range and exposure to environmental substances)

Work memory 300 KB for program, 1 MB for data, PROFINET IO IRT interface, SIMATIC Memory Card required

Temperature range -25...+60 °C

6AG1512-1SK01-2AB0

Temperature range -40...+70 °C; No BusAdapter can be inserted

6AG1512-1SK01-7AB0

Accessories

SIPLUS BusAdapter BA 2xRJ45

6AG1193-6AR00-7AA0

SIPLUS BusAdapter BA 2xFC

6AG1193-6AF00-7AA0

IE FC RJ45 plugs

RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables

IE FC RJ45 plug 180

(Extended temperature range and exposure to environmental substances)

180° cable outlet

1 unit

6AG1901-1BB10-7AA0

SIPLUS Mounting Kit ET 200SP

6AG1193-6AA00-0AA0

Mounting accessories for use with increased mechanical vibration and shock loads. Not approved for SIPLUS BusAdapter 2xBA RJ45

Other accessories

See SIMATIC ET 200SP, CPU 1512 F-1 PN, page 7/33

Technical specifications

Article number	6AG1512-1SK01-2AB0 SIPLUS ET 200SP CPU 1512SP F-1 PN	6AG1512-1SK01-7AB0 SIPLUS ET 200SP CPU 1512SP F-1 PN
General information		
Product type designation	CPU 1512SP F-1 PN	CPU 1512SP F-1 PN
Engineering with		
• STEP 7 TIA Portal configurable/integrated from version	see entry ID: 109746275	see entry ID: 109746275
Supply voltage		
Rated value (DC)	24 V	24 V
Memory		
Work memory		
• integrated (for program)	300 kbyte	300 kbyte
• integrated (for data)	1 Mbyte	1 Mbyte
Load memory		
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte	32 Gbyte
CPU processing times		
for bit operations, typ.	48 ns	48 ns
for word operations, typ.	58 ns	58 ns
for fixed point arithmetic, typ.	77 ns	77 ns
for floating point arithmetic, typ.	307 ns	307 ns
Counters, timers and their retentivity		
S7 counter		
• Number	2 048	2 048
IEC counter		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times		
• Number	2 048	2 048
IEC timer		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity		
Flag		
• Size, max.	16 kbyte	16 kbyte
Address area		
I/O address area		
• Inputs	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image
Address space per module		
• Address space per module, max.	288 byte; For input and output data respectively	288 byte; For input and output data respectively
Address space per station		
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day		
Clock		
• Type	Hardware clock	Hardware clock
1. Interface		
Interface types		
• RJ 45 (Ethernet)	Yes; X1 P3; opt. X1 P1 and X1 P2 via BusAdapter BA 2x RJ45	Yes; X1 P3
• Number of ports	3; 1. integr. + 2. via BusAdapter	1
• integrated switch	Yes	
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12	No
Protocols		
• IP protocol	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0	No

Distributed Controllers

based on ET 200SP
SIPLUS fail-safe CPUs

SIPLUS CPU 1512SP F-1 PN

Technical specifications

Article number	6AG1512-1SK01-2AB0 SIPLUS ET 200SP CPU 1512SP F-1PN	6AG1512-1SK01-7AB0 SIPLUS ET 200SP CPU 1512SP F-1 PN
PROFINET IO Controller		
Services		
- PG/OP communication	Yes	Yes
- Isochronous mode	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes	Yes
- PROFlenergy	Yes; per user program	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64	64
- Number of connectable IO Devices for RT, max.	128	128
- of which in line, max.	128	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device		
Services		
- PG/OP communication	Yes	Yes
- Isochronous mode	No	No
- IRT	Yes	Yes
- PROFlenergy	Yes; per user program	Yes; per user program
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program
2. Interface		
Interface types		
• RS 485	Yes; Via CM DP module	Yes; Via CM DP module
• Number of ports	1	1
Protocols		
• PROFIBUS DP master	Yes	Yes
• PROFIBUS DP slave	Yes	Yes
• SIMATIC communication	Yes	Yes
PROFIBUS DP master		
• Number of DP slaves, max.	125; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	125; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols		
Number of connections		
• Number of connections, max.	128; via integrated interfaces of the CPU and connected CPs / CMs	128; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode		
Media redundancy		
- Media redundancy	Yes; only via BusAdapter	No
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	No
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	No
- MRPD	Yes; Requirement: IRT	No
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	
- Number of stations in the ring, max.	50	
SIMATIC communication		
• S7 routing	Yes	Yes

Technical specifications

Article number	6AG1512-1SK01-2AB0 SIPLUS ET 200SP CPU 1512SP F-1PN	6AG1512-1SK01-7AB0 SIPLUS ET 200SP CPU 1512SP F-1 PN
OPC UA		
• OPC UA Client	Yes	Yes
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space
Supported technology objects		
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	800	800
• Required Motion Control resources		
- per speed-controlled axis	40	40
- per positioning axis	80	80
- per synchronous axis	160	160
- per external encoder	80	80
- per output cam	20	20
- per cam track	160	160
- per probe	40	40
Controller		
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring		
• High-speed counter	Yes	Yes
Standards, approvals, certificates		
Highest safety class achievable in safety mode		
Probability of failure (for service life of 20 years and repair time of 100 hours)		
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09	< 1.00E-09
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-25 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-25 °C; = Tmin	-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax	50 °C; = Tmax
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Relative humidity		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance		
Coolants and lubricants		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	No
Use in stationary industrial systems		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	

Distributed Controllers

based on ET 200SP
SIPLUS fail-safe CPUs

SIPLUS CPU 1512SP F-1 PN

Technical specifications

Article number	6AG1512-1SK01-2AB0 SIPLUS ET 200SP CPU 1512SP F-1PN	6AG1512-1SK01-7AB0 SIPLUS ET 200SP CPU 1512SP F-1 PN
Use on land craft, rail vehicles and special-purpose vehicles		
- Against mechanical environmental conditions acc. to EN 60721-3-5	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
- against mechanical environmental conditions in agriculture acc. to ISO 15003	Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust (with the exception of oil droplets in the air); *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Configuration		
Configuration / programming		
Programming language		
- LAD	Yes; incl. failsafe	Yes; incl. failsafe
- FBD	Yes; incl. failsafe	Yes; incl. failsafe
- STL	Yes	Yes
- SCL	Yes	Yes
- GRAPH	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Copy protection	Yes	Yes
• Block protection	Yes	Yes
Access protection		
• Protection level: Write protection	Yes	Yes
• Protection level: Read/write protection	Yes	Yes
• Protection level: Complete protection	Yes	Yes
Dimensions		
Width	100 mm	100 mm
Height	117 mm	117 mm
Depth	75 mm	75 mm
Weights		
Weight, approx.	310 g	470 g

Overview



- The CPU for applications with medium to high requirements regarding program/data storage in the SIMATIC ET 200SP T Controller product range
- Medium to high processing speed for binary and floating-point arithmetic
- PROFINET IO IRT interface with 2-port switch, corresponding BusAdapter required
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO Controller
- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Isochronous mode with PROFINET IO IRT
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes. Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

The BusAdapter is not included in the scope of supply and must be ordered separately.

Ordering data

Article No.

CPU 1514SP T-2 PN 900 KB work memory for program, 3.5 MB for data, PROFINET IRT interface with 2-port switch, Ethernet interface; SIMATIC Memory Card required	6ES7514-2VN03-0AB0
Accessories	
CM DP for ET 200SP CPU PROFIBUS DP master/device with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps	6ES7545-5DA00-0AB0
SIMATIC Memory Card	
4 MB	6ES7954-8LC03-0AA0
12 MB	6ES7954-8LE03-0AA0
24 MB	6ES7954-8LF03-0AA0
256 MB	6ES7954-8LL03-0AA0
2 GB	6ES7954-8LP04-0AA0
32 GB	6ES7954-8LT03-0AA0
DIN rail 35 mm	
• Length: 483 mm for 19" cabinets	6ES5710-8MA11
• Length: 483 mm for 600 mm cabinets	6ES5710-8MA21
• Length: 830 mm for 900 mm cabinets	6ES5710-8MA31
• Length 2 m	6ES5710-8MA41
PE connection element for 2000 mm mounting rail 20 units	6ES7590-5AA00-0AA0
BusAdapter BA 2xRJ45	6ES7193-6AR00-0AA0
BusAdapter BA 2xFC for increased vibration and EMC loads	6ES7193-6AF00-0AA0
Equipment labeling plate 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter	6ES7193-6LF30-0AW0
Labeling strips	
500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0
1000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AA0
1000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AG0
IE FC RJ45 plugs RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables	
IE FC RJ45 plug 90 90° cable outlet	
1 unit	6GK1901-1BB20-2AA0
10 units	6GK1901-1BB20-2AB0
50 units	6GK1901-1BB20-2AE0

Distributed Controllers

based on ET 200SP
Technology CPUs

CPU 1514SP T-2 PN

Ordering data

IE FC RJ45 plug 180

180° cable outlet

1 unit

10 units

50 units

Article No.

6GK1901-1BB10-2AA0

6GK1901-1BB10-2AB0

6GK1901-1BB10-2AE0

IE FC TP standard cable GP 2x2

6XV1840-2AH10

4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

IE FC TP trailing cable 2 x 2 (type C)

6XV1840-3AH10

4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug 180/90 for use in cable carriers; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

IE FC TP marine cable 2 x 2 (type B)

6XV1840-4AH10

4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug 180/90 with marine approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

IE FC stripping tool

6GK1901-1GA00

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
- Windows 10 Professional Version 22H2
- Windows 10 Enterprise Version 2009/20H2
- Windows 10 Enterprise Version 21H2
- Windows 10 Enterprise Version 22H2
- Windows 10 Enterprise 2016 LTSC
- Windows 10 Enterprise 2019 LTSC
- Windows 10 Enterprise 2021 LTSC
- Windows 11 (64-bit)
- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

STEP 7 Professional V19, floating license

6ES7822-1AA23-0YA5

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

STEP 7 Professional V19, floating license download ¹⁾

6ES7822-1AE23-0YA5

Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

The system requirements specification can be found at <https://www.siemens.com/compatool>

Consignee email address required for delivery

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multilingual:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

Spare parts

Power supply connector

Spare part; for connecting the 24 V DC supply voltage

- With push-in terminals; 10 units

6ES7193-4JB00-0AA0

Cover for BusAdapter interface

6ES7591-3AA00-0AA0

5 units

Server module

6ES7193-6PA00-0AA0

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7514-2VN03-0AB0 CPU 1514SP T-2 PN, 900KB Prg., 3,5MB Dat
General information	
Product type designation	CPU 1514SP T-2 PN
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V18 (FW V3.0)
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated (for program)	900 kbyte
• integrated (for data)	3.5 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	6 ns
for word operations, typ.	7 ns
for fixed point arithmetic, typ.	9 ns
for floating point arithmetic, typ.	37 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Address space per module	
• Address space per module, max.	288 byte; For input and output data respectively
Address space per station	
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day	
Clock	
• Type	Hardware clock

Article number	6ES7514-2VN03-0AB0 CPU 1514SP T-2 PN, 900KB Prg., 3,5MB Dat
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P1 and X1 P2 via BusAdapter BA 2x RJ45
• Number of ports	2; via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFlenergy	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFlenergy	Yes; per user program
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program

Distributed Controllers

based on ET 200SP
Technology CPUs

CPU 1514SP T-2 PN

Technical specifications

Article number	6ES7514-2VN03-0AB0 CPU 1514SP T-2 PN, 900KB Prg., 3,5MB Dat
2. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X2
• Number of ports	1
• integrated switch	No
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	No
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- Direct data exchange	No
- IRT	No
- PROFlenergy	Yes; per user program
- Prioritized startup	No
- Number of connectable IO Devices, max.	32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.	32
- of which in line, max.	32
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	No
- PROFlenergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program

Article number	6ES7514-2VN03-0AB0 CPU 1514SP T-2 PN, 900KB Prg., 3,5MB Dat
3. Interface	
Interface types	
• RS 485	Yes; Via CM DP module
• Number of ports	1
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols	
Number of connections	
• Number of connections, max.	192; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes

7

Technical specifications

Article number	6ES7514-2VN03-0AB0 CPU 1514SP T-2 PN, 900KB Prg., 3,5MB Dat
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	2 400
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
• Number of available Extended Motion Control resources for technology objects	120
• Required Extended Motion Control resources	
- per cam (1 000 points and 50 segments)	2
- per cam (10 000 points and 50 segments)	20
- for each set of kinematics	30
- Per leading axis proxy	3
• kinematics functions	
- kinematics with up to 4 interpolating axes	Yes; max. 3D + orientation
- kinematics with 5 or more interpolating axes	No
- user-defined kinematics	No
- SIMATIC Safe Kinematics	No
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Article number	6ES7514-2VN03-0AB0 CPU 1514SP T-2 PN, 900KB Prg., 3,5MB Dat
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C; No condensation
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	100 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	265 g

Distributed Controllers

based on ET 200SP
Technology CPUs

CPU 1514SP TF-2 PN

Overview



- The CPU for standard and fail-safe applications with medium to high requirements regarding program/data storage in the SIMATIC ET 200SP T Controller product range
- Medium to high processing speed for binary and floating-point arithmetic
- PROFINET IO IRT interface with 2-port switch, corresponding BusAdapter required
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or third-party PROFINET IO Controller
- Additional PROFINET interface with separate IP address for network separation, for connecting further PROFINET IO RT devices, or for high-speed communication as an I-Device
- OPC UA Server and Client as runtime option for the easy connection of SIMATIC S7-1500 to third-party devices/systems with the functions:
 - OPC UA Data Access
 - OPC UA Security
 - OPC UA Methods Call
 - Support of OPC UA Companion specifications
 - OPC UA Alarms & Conditions
- Isochronous mode with PROFINET IO IRT
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes. Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.
- SIMATIC Motion Interpreter – Technology objects for programming and controlling axes and kinematics
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Integrated web server for diagnostics with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

The BusAdapter is not included in the scope of supply and must be ordered separately.

Ordering data

Article No.

CPU 1514SP TF-2 PN 900 KB work memory for program, 3.5 MB for data, PROFINET IRT interface with 2-port switch, Ethernet interface; SIMATIC Memory Card required	6ES7514-2WN03-0AB0
Accessories CM DP for ET 200SP CPU PROFIBUS DP master/device with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps	6ES7545-5DA00-0AB0
SIMATIC Memory Card 4 MB 12 MB 24 MB 256 MB 2 GB 32 GB	6ES7954-8LC03-0AA0 6ES7954-8LE03-0AA0 6ES7954-8LF03-0AA0 6ES7954-8LL03-0AA0 6ES7954-8LP04-0AA0 6ES7954-8LT03-0AA0
DIN rail 35 mm • Length: 483 mm for 19" cabinets • Length: 483 mm for 600 mm cabinets • Length: 830 mm for 900 mm cabinets • Length 2 m	6ES710-8MA11 6ES710-8MA21 6ES710-8MA31 6ES710-8MA41
PE connection element for 2000 mm mounting rail 20 units	6ES7590-5AA00-0AA0
BusAdapter BA 2xRJ45	6ES7193-6AR00-0AA0
BusAdapter BA 2xFC for increased vibration and EMC loads	6ES7193-6AF00-0AA0
Equipment labeling plate 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter	6ES7193-6LF30-0AW0
Labeling strips 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer 500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer 1000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer 1000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer	6ES7193-6LR10-0AA0 6ES7193-6LR10-0AG0 6ES7193-6LA10-0AA0 6ES7193-6LA10-0AG0
IE FC RJ45 plugs RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables	
IE FC RJ45 plug 90 90° cable outlet 1 unit 10 units 50 units	6GK1901-1BB20-2AA0 6GK1901-1BB20-2AB0 6GK1901-1BB20-2AE0

Ordering data	Article No.	Ordering data	Article No.
IE FC RJ45 plug 180 180° cable outlet 1 unit 10 units 50 units	6GK1901-1BB10-2AA0 6GK1901-1BB10-2AB0 6GK1901-1BB10-2AE0	STEP 7 Professional V19, floating license Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.	6ES7822-1AA23-0YA5
IE FC TP standard cable GP 2x2 4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1840-2AH10	STEP 7 Professional V19, floating license download ¹⁾ Engineering software in the TIA Portal; software, documentation and license key for downloading ¹⁾ ; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.	6ES7822-1AE23-0YA5
IE FC TP trailing cable 2 x 2 (type C) 4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug 180/90 for use in cable carriers; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1840-3AH10	The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery	
IE FC TP marine cable 2 x 2 (type B) 4-wire, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug 180/90 with marine approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1840-4AH10	STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.	
IE FC stripping tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	6GK1901-1GA00	Floating license for 1 user; license key on USB flash drive Floating license for 1 user; license key for download ¹⁾ ; Email address required for delivery	6ES7833-1FA23-0YA5 6ES7833-1FA23-0YH5
STEP 7 Professional V19 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H2 • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC • Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download		SIMATIC Manual Collection Electronic manuals on DVD, multilingual: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, FC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0
		SIMATIC Manual Collection update service for 1 year Current Manual Collection DVD and the three subsequent updates	6ES7998-8XC01-8YE2

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Distributed Controllers

based on ET 200SP
Technology CPUs

CPU 1514SP TF-2 PN

Ordering data

Spare parts

Power supply connector

Spare part; for connecting the 24 V DC supply voltage

- With push-in terminals; 10 units

Article No.

6ES7193-4JB00-0AA0

Article No.

Cover for BusAdapter interface

5 units

Server module

6ES7591-3AA00-0AA0

6ES7193-6PA00-0AA0

Technical specifications

Article number	6ES7514-2WN03-0AB0 CPU 1514SP TF-2 PN, 900KB Prg, 3,5MB Dat
General information	
Product type designation	CPU 1514SP TF-2 PN
Engineering with	V18 (FW V3.0)
• STEP 7 TIA Portal configurable/integrated from version	
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated (for program)	900 kbyte
• integrated (for data)	3.5 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	6 ns
for word operations, typ.	7 ns
for fixed point arithmetic, typ.	9 ns
for floating point arithmetic, typ.	37 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Address space per module	
• Address space per module, max.	288 byte; For input and output data respectively
Address space per station	
• Address space per station, max.	2 560 byte; for central inputs and outputs; depending on configuration; 2 048 bytes for ET 200SP modules + 512 bytes for ET 200AL modules
Time of day	
Clock	
• Type	Hardware clock

Article number	6ES7514-2WN03-0AB0 CPU 1514SP TF-2 PN, 900KB Prg, 3,5MB Dat
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P1 and X1 P2 via BusAdapter BA 2x RJ45
• Number of ports	2; via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x M12
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes
PROFINET IO Controller Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFINET energy	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data

Technical specifications

Article number	6ES7514-2WN03-0AB0 CPU 1514SP TF-2 PN, 900KB Prg, 3,5MB Dat
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFlenergy	Yes; per user program
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program
2. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X2
• Number of ports	1
• integrated switch	No
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	No
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- Direct data exchange	No
- IRT	No
- PROFlenergy	Yes; per user program
- Prioritized startup	No
- Number of connectable IO Devices, max.	32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.	32
- of which in line, max.	32
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data

Article number	6ES7514-2WN03-0AB0 CPU 1514SP TF-2 PN, 900KB Prg, 3,5MB Dat
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	No
- PROFlenergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program
3. Interface	
Interface types	
• RS 485	Yes; Via CM DP module
• Number of ports	1
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
Protocols	
Number of connections	
• Number of connections, max.	192; via integrated interfaces of the CPU and connected CPs / CMs
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes

Distributed Controllers

based on ET 200SP
Technology CPUs

CPU 1514SP TF-2 PN

Technical specifications

Article number	6ES7514-2WN03-0AB0 CPU 1514SP TF-2 PN, 900KB Prg, 3,5MB Dat
OPC UA	
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	2 400
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
• Number of available Extended Motion Control resources for technology objects	120
• Required Extended Motion Control resources	
- per cam (1 000 points and 50 segments)	2
- per cam (10 000 points and 50 segments)	20
- for each set of kinematics	30
- Per leading axis proxy	3
• kinematics functions	
- kinematics with up to 4 interpolating axes	Yes; max. 3D + orientation
- kinematics with 5 or more interpolating axes	No
- user-defined kinematics	No
- SIMATIC Safe Kinematics	No
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Article number	6ES7514-2WN03-0AB0 CPU 1514SP TF-2 PN, 900KB Prg, 3,5MB Dat
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C; No condensation
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Write protection for Failsafe	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	100 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	265 g

Overview



- Turnkey all-in-one solution with preinstalled SIMATIC S7-1500 Software Controller Standard and optional preinstalled WinCC Runtime Advanced
- Central expansion via ET 200SP modules (station width up to 1 m or up to 64 modules)
- SIMATIC Hypervisor:
For separating the Windows or Linux operating system from control functions
- Quad-core processor for optimal use of the Hypervisor
- Swappable flash memory (CFast card) for operating system, runtime and project data
- Integrated DisplayPort; 2x USB 3.0; 2 x USB 2.0 port
- 2 PROFINET interfaces: X1 via PN-IO BusAdapter (RJ45 or FC) with 2 ports; X2: GB Ethernet interface (RJ45)
- PROFINET IRT
- Open Ethernet communication (TCP/IP, UDP, ISO-on-TCP)
- Web server functionality for information, status, diagnostics and user-defined web pages
- PROFIBUS DP communication optionally via CM DP Module as DP master
- Configuration control (option handling)
- Improved know-how and copy protection; Security Integrated
- Integrated system diagnostics
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes with support for external encoders
- Trace function
- Especially suitable for high data volumes and user-specific, open applications
- Integration of control functions and applications implemented in C/C++ (using SIMATIC ODK-1500S Open Development Kit)

Ordering data

Article No.

SIMATIC ET 200SP Open Controller CPU 1515SP PC2

Type of delivery:
English, German, Chinese, Italian, French, Spanish

Industrial OS and S7-1500 Software Controller CPU 1505SP preinstalled, 128 GB CFast card

- CPU 1515SP PC2 (8 GB RAM)

6ES7677-2DB43-0GB1

Windows 10 IoT Enterprise 64-bit and S7-1500 Software Controller CPU 1505SP preinstalled, 128 GB CFast card

- CPU 1515SP PC2 (48 GB RAM)

6ES7677-2DB42-0GB1

Windows 10 IoT Enterprise 64-bit and S7-1500 Software Controller CPU 1505SP preinstalled, 128 GB CFast card

- CPU 1515SP PC2 + HMI 128PT
- CPU 1515SP PC2 + HMI 512PT
- CPU 1515SP PC2 + HMI 2048PT

6ES7677-2DB42-0GK0

6ES7677-2DB42-0GL0

6ES7677-2DB42-0GM0

Accessories

BusAdapter BA 2xRJ45 **6ES7193-6AR00-0AA0**

BusAdapter BA 2xFC **6ES7193-6AF00-0AA0**

BusAdapter BA 2xSCRJ **6ES7193-6AP00-0AA0**

BusAdapter BA SCRJ/RJ45 **6ES7193-6AP20-0AA0**

BusAdapter BA SCRJ/FC **6ES7193-6AP40-0AA0**

For increased vibration and EMC loads

BusAdapter BA 2XLC **6ES7193-6AG00-0AA0**

BusAdapter BA LC/RJ45 **6ES7193-6AG20-0AA0**

BusAdapter BA LC/FC **6ES7193-6AG40-0AA0**

CM DP for ET 200SP CPU **6ES7545-5DA00-0AB0**

PROFIBUS DP master with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps

Server module **6ES7193-6PA00-0AA0**

Spare part

Power supply connector **6ES7193-4JB00-0AA0**

Spare part; for connecting the 24 V DC supply voltage; with push-in terminals (10 units)

Equipment labeling plate **6ES7193-6LF30-0AW0**

10 sheets of 16 labels

Labeling strips

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AA0

1000 labeling strips DIN A4, light gray, card, for inscription with laser printer

6ES7193-6LA10-0AA0

Distributed Controllers

based on ET 200SP

ET 200SP Open Controllers

Standard CPUs > CPU 1515SP PC2

Ordering data

Article No.

Article No.

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

Windows 10 (64-bit)

- Windows 10 Home Version 22H2
- Windows 10 Professional Version 22H2
- Windows 10 Enterprise Version 2009/20H2
- Windows 10 Enterprise Version 21H2
- Windows 10 Enterprise Version 22H2
- Windows 10 Enterprise 2016 LTSC
- Windows 10 Enterprise 2019 LTSC
- Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

STEP 7 Professional V19, floating license

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

6ES7822-1AA23-0YA5

STEP 7 Professional V19, floating license download ¹⁾

Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

The system requirements specification can be found at <https://www.siemens.com/compatool>

Consignee email address required for delivery

6ES7822-1AE23-0YA5

SIMATIC ODK 1500S

Open Development Kit V2.5 for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; supplied on DVD, license key (floating license) on USB flash drive

6ES7806-2CD03-0YA0

Open Development Kit V2.5 for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; software download including license key (floating license) ¹⁾

6ES7806-2CD03-0YG0

Email address required for delivery

WinCC Advanced V19

Engineering software in the TIA Portal; in 6 languages: en, de, fr, es, it, zh; for configuring SIMATIC Panels, WinCC Runtime Advanced, WinCC Unified PC Runtime

- Floating license; software and documentation on DVD; license key on USB flash drive
- Floating license; software, documentation and license key for download ¹⁾; Email address required for delivery

6AV2102-0AA02-3AA5

6AV2102-0AA02-3AH5

¹⁾ Up-to-date information and download availability can be found at <https://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7677-2DB42-0GB1 CPU1515SP PC2	6ES7677-2DB43-0GB1 CPU1515SP PC2 - IndOS
General information		
Product type designation	CPU 1515SP PC2	CPU1515SP PC2 - IndOS
Engineering with		
• STEP 7 TIA Portal configurable/integrated from version	V19	V19
Installed software		
• Visualization	No	No
• Control	S7-1500 Software Controller CPU 1505SP	S7-1500 Software Controller CPU 1505SP
Supply voltage		
Rated value (DC)	24 V	24 V
Processor		
Processor type	Intel Atom E3940, 1.6 GHz, 4 cores	Intel Atom E3940, 1.6 GHz, 4 cores
Memory		
Type of memory	DDR3L	DDR3L
Main memory	8 GB RAM	8 GB RAM
CFast memory card	Yes; 128 GB flash memory	Yes; 128 GB flash memory
Work memory		
• integrated (for program)	2 Mbyte	2 Mbyte
• integrated (for data)	7.5 Mbyte	7.5 Mbyte
• integrated (for CPU function library of CPU Runtime)	20 Mbyte	20 Mbyte
Load memory		
• integrated (on PC mass storage)	320 Mbyte	320 Mbyte
Counters, timers and their retentivity		
S7 counter		
• Number	2 048	2 048
IEC counter		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times		
• Number	2 048	2 048
IEC timer		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity		
Flag		
• Size, max.	16 kbyte	16 kbyte
Address area		
I/O address area		
• Inputs	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image
Hardware configuration		
Integrated power supply	Yes	Yes
Time of day		
Clock		
• Type	Hardware clock	Hardware clock
• Hardware clock (real-time)	Yes; Resolution: 1 s	Yes; Resolution: 1 s
Interfaces		
Number of industrial Ethernet interfaces	2	2
Number of RS 485 interfaces	1; Via CM DP module	1; Via CM DP module
Number of USB interfaces	4; 2x USB 2.0, 2x USB 3.0 on front side	4; 2x USB 2.0, 2x USB 3.0 on front side
Number of SD card slots	1	1
Video interfaces		
• Graphics interface	1x DisplayPort	1x DisplayPort
1. Interface		
Interface type	PROFINET	PROFINET
automatic detection of transmission rate	Yes	Yes
Autonegotiation	Yes	Yes
Autocrossing	Yes	Yes
Number of connections	88	88

Distributed Controllers

based on ET 200SP

ET 200SP Open Controllers

Standard CPUs > CPU 1515SP PC2

Technical specifications

Article number	6ES7677-2DB42-0GB1 CPU1515SP PC2	6ES7677-2DB43-0GB1 CPU1515SP PC2 - IndOS
Interface types		
• RJ 45 (Ethernet)	Yes; Via BusAdapter BA 2x RJ45	Yes; Via BusAdapter BA 2x RJ45
- Transmission rate, max.	100 Mbit/s	100 Mbit/s
- Industrial Ethernet status LED	Yes	Yes
• Number of ports	2	2
• integrated switch	Yes	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x M12, BA 2x FC, BA 2x LC, BA LC/RJ45, BA LC/FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x M12, BA 2x FC, BA 2x LC, BA LC/RJ45, BA LC/FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC
Protocols		
• IP protocol	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy	Yes	Yes
PROFINET IO Controller		
Services		
- Isochronous mode	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs	500 µs
- IRT	Yes	Yes
- PROFlenergy	Yes	Yes
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128	128
- Of which IO devices with IRT, max.	64	64
- of which in line, max.	64	64
- Number of connectable IO Devices for RT, max.	128	128
- of which in line, max.	128	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8	8
- IO Devices changing during operation (partner ports), supported	Yes	Yes
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1	1
Address area		
- Inputs, max.	8 kbyte	8 kbyte
- Outputs, max.	8 kbyte	8 kbyte
PROFINET IO Device		
Services		
- Isochronous mode	No	No
- IRT	Yes	Yes
- PROFlenergy	Yes; per user program	Yes; per user program
- Prioritized startup	Yes	Yes
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program
- PROFINET Security Class	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only

Technical specifications

Article number	6ES7677-2DB42-0GB1 CPU1515SP PC2	6ES7677-2DB43-0GB1 CPU1515SP PC2 - IndOS
2. Interface		
Interface type	Integrated Ethernet interface	Integrated Ethernet interface
automatic detection of transmission rate	Yes	Yes
Autonegotiation	Yes	Yes
Autocrossing	Yes	Yes
Interface types		
• RJ 45 (Ethernet)	Yes; Integrated	Yes; Integrated
- Transmission rate, max.	1 000 Mbit/s	1 000 Mbit/s
- Industrial Ethernet status LED	No	No
• Number of ports	1	1
3. Interface		
Interface type	PROFIBUS with CM DP	PROFIBUS with CM DP
Number of connections	44	44
Interface types		
• RS 485	Yes	Yes
Protocols		
• PROFIBUS DP master	Yes	Yes
• PROFIBUS DP slave	Yes	Yes
• SIMATIC communication	Yes	Yes
PROFIBUS DP master		
• Number of DP slaves, max.	125	125
Services		
- Equidistance	No	No
- Isochronous mode	No	No
Address area		
- Inputs, max.	8 kbyte	8 kbyte
- Outputs, max.	8 kbyte	8 kbyte
Protocols		
Number of connections		
• Number of connections, max.	88	88
Redundancy mode		
Media redundancy		
- Media redundancy	Yes; only via BusAdapter	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50
SIMATIC communication		
• S7 routing	Yes	Yes
OPC UA		
• OPC UA Client	Yes; Data access (read, write), method call	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space
• Alarms and Conditions	Yes	Yes
Supported technology objects		
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	2 400	2 400
• Required Motion Control resources		
- per speed-controlled axis	40	40
- per positioning axis	80	80
- per synchronous axis	160	160
- per external encoder	80	80
- per output cam	20	20
- per cam track	160	160
- per probe	40	40

Distributed Controllers

based on ET 200SP


ET 200SP Open Controllers

Standard CPUs > CPU 1515SP PC2

Technical specifications

Article number	6ES7677-2DB42-0GB1 CPU1515SP PC2	6ES7677-2DB43-0GB1 CPU1515SP PC2 - IndOS
Controller		
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring		
• High-speed counter	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C	-20 °C
• horizontal installation, min.	-20 °C	-20 °C
• horizontal installation, max.	60 °C; from 55°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card max. 10% load; SD card not used	60 °C; from 55°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card max. 10% load; SD card not used
• vertical installation, min.	-20 °C	-20 °C
• vertical installation, max.	50 °C; from 45°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card and SD card; max. 10% load	50 °C; from 45°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card and SD card; max. 10% load
Operating systems		
pre-installed operating system	Windows 10 IoT Enterprise 2021 LTSC	SIMATIC Industrial OS
Configuration		
Configuration / programming		
Programming language		
- LAD	Yes	Yes
- FBD	Yes	Yes
- STL	Yes	Yes
- SCL	Yes	Yes
- CFC	No	No
- GRAPH	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Copy protection	Yes	Yes
• Block protection	Yes	Yes
Access protection		
• protection of confidential configuration data	Yes	Yes
• Protection level: Write protection	Yes	Yes
• Protection level: Read/write protection	Yes	Yes
• Protection level: Complete protection	Yes	Yes
• User administration	Yes; device-wide	Yes; device-wide
• Number of users	100	100
Open Development interfaces		
• Size of ODK SO file, max.	5.8 Mbyte	5.8 Mbyte
Peripherals/Options		
SD card	Optionally for additional mass storage	Optionally for additional mass storage
Dimensions		
Width	160 mm	160 mm
Height	117 mm	117 mm
Depth	75 mm	75 mm
Weights		
Weight, approx.	0.83 kg	0.83 kg

Overview

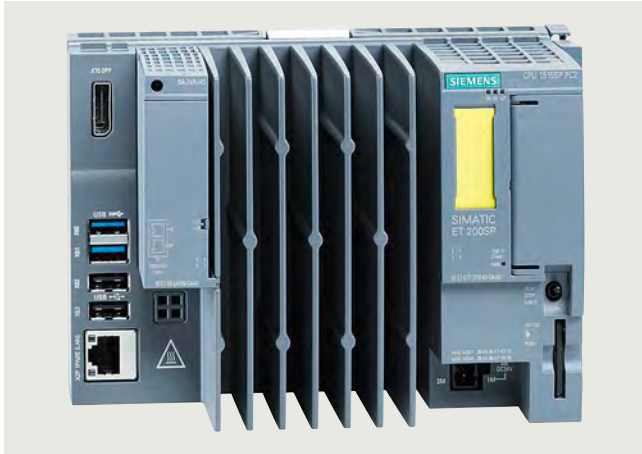

- Turnkey all-in-one solution with preinstalled fail-safe SIMATIC S7-1500 Software Controller and optional preinstalled WinCC Runtime Advanced
- Fail-safe versions make it possible to control machines or plants in a fail-safe environment. This makes it possible to address applications which require an SIL3 (Safety Integrity Level) safety class according to IEC 61508 2nd Edition or a PL e (Performance Level) according to ISO 13849.
- Central expansion via ET 200SP modules (station width up to 1 m or up to 64 modules)
- SIMATIC Hypervisor:
For separating the Windows or Linux operating system from control functions
- Quad-core processor for optimal use of the Hypervisor
- Swappable flash memory (CFast card) for operating system, runtime and project data
- Integrated DisplayPort; 2x USB 3.0; 2x USB 2.0 port
- 2 PROFINET interfaces: X1 via PN-IO BusAdapter (RJ45 or FC) with 2 ports; X2: GB Ethernet interface (RJ45)
- PROFINET IRT
- Open Ethernet communication (TCP/IP, UDP, ISO-on-TCP)
- Web server functionality for information, status, diagnostics and user-defined web pages
- PROFIBUS DP communication optionally via CM DP Module as DP master
- Configuration control (option handling)
- Improved know-how and copy protection; Security Integrated
- Integrated system diagnostics
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes with support for external encoders
- Trace function
- Especially suitable for high data volumes and user-specific, open applications
- Integration of control functions and applications implemented in C/C++ (using SIMATIC ODK-1500S Open Development Kit)

Ordering data

Article No.

SIMATIC ET 200SP Open Controller CPU 1515SP PC2 F (+ HMI)

Type of delivery:
English, German, Chinese, Italian,
French, Spanish

Industrial OS and S7-1500 Software
Controller CPU 1505SP F
preinstalled, 128 GB CFast card

- CPU 1515SP PC2 F (8 GB RAM)

6ES7677-2SB43-0GB1

Windows 10 IoT Enterprise 64-bit
and S7-1500 Software Controller
CPU 1505SP F preinstalled,
128 GB CFast card

- CPU 1515SP PC2 F (8 GB RAM)

6ES7677-2SB42-0GB1

Windows 10 IoT Enterprise 64-bit
and S7-1500 Software Controller
CPU 1505SP F preinstalled,
128 GB CFast card

- CPU 1515SP PC2 F + HMI 128PT
(8 GB RAM)

6ES7677-2SB42-0GK0

- CPU 1515SP PC2 F + HMI 512PT
(8 GB RAM)

6ES7677-2SB42-0GL0

- CPU 1515SP PC2 F + HMI 2048PT
(8 GB RAM)

6ES7677-2SB42-0GM0

Accessories

BusAdapter BA 2xRJ45

6ES7193-6AR00-0AA0

BusAdapter BA 2xFC

6ES7193-6AF00-0AA0

BusAdapter BA 2xSCRJ

6ES7193-6AP00-0AA0

BusAdapter BA SCRJ/RJ45

6ES7193-6AP20-0AA0

BusAdapter BA SCRJ/FC

6ES7193-6AP40-0AA0

For increased vibration and
EMC loads

BusAdapter BA 2XLC

6ES7193-6AG00-0AA0

BusAdapter BA LC/RJ45

6ES7193-6AG20-0AA0

BusAdapter BA LC/FC

6ES7193-6AG40-0AA0

CM DP for ET 200SP CPU

6ES7545-5DA00-0AB0

PROFIBUS DP master with
electrical interface for connecting
the ET 200SP CPUs to
PROFIBUS at up to 12 Mbps

Server module

6ES7193-6PA00-0AA0

Spare part

Power supply connector

6ES7193-4JB00-0AA0

Spare part; for connecting the
24 V DC supply voltage;
with push-in terminals (10 units)

Equipment labeling plate

6ES7193-6LF30-0AW0

10 sheets of 16 labels

Labeling strips

6ES7193-6LR10-0AA0

500 labeling strips on roll,
light gray, for inscription with
thermal transfer roll printer

6ES7193-6LA10-0AA0

1000 labeling strips DIN A4,
light gray, card, for inscription
with laser printer

6ES7193-6LA10-0AA0

Distributed Controllers

based on ET 200SP

ET 200SP Open Controllers

Fail-safe CPUs > CPU 1515SP PC2 F

Ordering data

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

Windows 10 (64-bit)

- Windows 10 Home Version 22H2
- Windows 10 Professional Version 22H2
- Windows 10 Enterprise Version 2009/20H2
- Windows 10 Enterprise Version 21H2
- Windows 10 Enterprise Version 22H2
- Windows 10 Enterprise 2016 LTSC
- Windows 10 Enterprise 2019 LTSC
- Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

STEP 7 Professional V19, floating license

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

Article No.

6ES7822-1AA23-0YA5

Article No.

STEP 7 Professional V19, floating license download ¹⁾

Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

The system requirements specification can be found at <https://www.siemens.com/compatool>

Consignee email address required for delivery

6ES7822-1AE23-0YA5

SIMATIC ODK 1500S

Open Development Kit V2.5 for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; supplied on DVD, license key (floating license) on USB flash drive

6ES7806-2CD03-0YA0

Open Development Kit V2.5 for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; software download including license key (floating license) ¹⁾

6ES7806-2CD03-0YG0

Email address required for delivery

WinCC Advanced V19

Engineering software in the TIA Portal; in 6 languages: en, de, fr, es, it, zh; for configuring SIMATIC Panels, WinCC Runtime Advanced, WinCC Unified PC Runtime

- Floating license; software and documentation on DVD; license key on USB flash drive

6AV2102-0AA02-3AA5

- Floating license; software, documentation and license key for download ¹⁾; Email address required for delivery

6AV2102-0AA02-3AH5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7677-2SB42-0GB1	6ES7677-2SB43-0GB1
	CPU1515SP PC2 F	CPU1515SP PC2 F - IndOS
General information		
Product type designation	CPU 1515SP PC2 F	CPU1515SP PC2 F - IndOS
Engineering with		
• STEP 7 TIA Portal configurable/integrated from version	V19	V19
Installed software		
• Visualization	No	No
• Control	S7-1500 Software Controller CPU 1505SP F	S7-1500 Software Controller CPU 1505SP F
Supply voltage		
Rated value (DC)	24 V	24 V
Processor		
Processor type	Intel Atom E3940, 1.6 GHz, 4 cores	Intel Atom E3940, 1.6 GHz, 4 cores
Memory		
Type of memory	DDR3L	DDR3L
Main memory	8 GB RAM	8 GB RAM
CFast memory card	Yes; 128 GB flash memory	Yes; 128 GB flash memory

Technical specifications

Article number	6ES7677-2SB42-0GB1 CPU1515SP PC2 F	6ES7677-2SB43-0GB1 CPU1515SP PC2 F - IndOS
Work memory		
• integrated (for program)	3 Mbyte	3 Mbyte
• integrated (for data)	7.5 Mbyte	7.5 Mbyte
• integrated (for CPU function library of CPU Runtime)	20 Mbyte	20 Mbyte
Load memory		
• integrated (on PC mass storage)	320 Mbyte	320 Mbyte
Counters, timers and their retentivity		
S7 counter		
• Number	2 048	2 048
IEC counter		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times		
• Number	2 048	2 048
IEC timer		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity		
Flag		
• Size, max.	16 kbyte	16 kbyte
Address area		
I/O address area		
• Inputs	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image
Hardware configuration		
Integrated power supply	Yes	Yes
Time of day		
Clock		
• Type	Hardware clock	Hardware clock
• Hardware clock (real-time)	Yes; Resolution: 1 s	Yes; Resolution: 1 s
Interfaces		
Number of industrial Ethernet interfaces	2	2
Number of RS 485 interfaces	1; Via CM DP module	1; Via CM DP module
Number of USB interfaces	4; 2x USB 2.0, 2x USB 3.0 on front side	4; 2x USB 2.0, 2x USB 3.0 on front side
Number of SD card slots	1	1
Video interfaces		
• Graphics interface	1x DisplayPort	1x DisplayPort
1. Interface		
Interface type	PROFINET	PROFINET
automatic detection of transmission rate	Yes	Yes
Autonegotiation	Yes	Yes
Autocrossing	Yes	Yes
Number of connections	88	88
Interface types		
• RJ 45 (Ethernet)	Yes; Via BusAdapter BA 2x RJ45	Yes; Via BusAdapter BA 2x RJ45
- Transmission rate, max.	100 Mbit/s	100 Mbit/s
- Industrial Ethernet status LED	Yes	Yes
• Number of ports	2	2
• integrated switch	Yes	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x M12, BA 2x FC, BA 2x LC, BA LC/RJ45, BA LC/FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x M12, BA 2x FC, BA 2x LC, BA LC/RJ45, BA LC/FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC

Distributed Controllers

based on ET 200SP

ET 200SP Open Controllers

Fail-safe CPUs > CPU 1515SP PC2 F

Technical specifications

Article number	6ES7677-2SB42-0GB1 CPU1515SP PC2 F	6ES7677-2SB43-0GB1 CPU1515SP PC2 F - IndOS
Protocols		
• IP protocol	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy	Yes	Yes
PROFINET IO Controller		
Services		
- Isochronous mode	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs	500 µs
- IRT	Yes	Yes
- PROFIenergy	Yes	Yes
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128	128
- Of which IO devices with IRT, max.	64	64
- of which in line, max.	64	64
- Number of connectable IO Devices for RT, max.	128	128
- of which in line, max.	128	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8	8
- IO Devices changing during operation (partner ports), supported	Yes	Yes
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1	1
Address area		
- Inputs, max.	8 kbyte	8 kbyte
- Outputs, max.	8 kbyte	8 kbyte
PROFINET IO Device		
Services		
- Isochronous mode	No	No
- IRT	Yes	Yes
- PROFIenergy	Yes; per user program	Yes; per user program
- Prioritized startup	Yes	Yes
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program
- PROFINET Security Class	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only
2. Interface		
Interface type	Integrated Ethernet interface	Integrated Ethernet interface
automatic detection of transmission rate	Yes	Yes
Autonegotiation	Yes	Yes
Autocrossing	Yes	Yes
Interface types		
• RJ 45 (Ethernet)	Yes; Integrated	Yes; Integrated
- Transmission rate, max.	1 000 Mbit/s	1 000 Mbit/s
- Industrial Ethernet status LED	No	No
• Number of ports	1	1

Technical specifications

Article number	6ES7677-2SB42-0GB1 CPU1515SP PC2 F	6ES7677-2SB43-0GB1 CPU1515SP PC2 F - IndOS
3. Interface		
Interface type	PROFIBUS with CM DP	PROFIBUS with CM DP
Number of connections	44	44
Interface types		
• RS 485	Yes	Yes
Protocols		
• PROFIBUS DP master	Yes	Yes
• PROFIBUS DP slave	Yes	Yes
• SIMATIC communication	Yes	Yes
PROFIBUS DP master		
• Number of DP slaves, max.	125	125
Services		
- Equidistance	No	No
- Isochronous mode	No	No
Address area		
- Inputs, max.	8 kbyte	8 kbyte
- Outputs, max.	8 kbyte	8 kbyte
Protocols		
Number of connections		
• Number of connections, max.	88	88
Redundancy mode		
Media redundancy		
- Media redundancy	Yes; only via BusAdapter	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50
SIMATIC communication		
• S7 routing	Yes	Yes
OPC UA		
• OPC UA Client	Yes; Data access (read, write), method call	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space
• Alarms and Conditions	Yes	Yes
Supported technology objects		
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	2 400	2 400
• Required Motion Control resources		
- per speed-controlled axis	40	40
- per positioning axis	80	80
- per synchronous axis	160	160
- per external encoder	80	80
- per output cam	20	20
- per cam track	160	160
- per probe	40	40
Controller		
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring		
• High-speed counter	Yes	Yes

Distributed Controllers

based on ET 200SP

ET 200SP Open Controllers

Fail-safe CPUs > CPU 1515SP PC2 F

Technical specifications

Article number	6ES7677-2SB42-0GB1 CPU1515SP PC2 F	6ES7677-2SB43-0GB1 CPU1515SP PC2 F - IndOS
Standards, approvals, certificates		
Highest safety class achievable in safety mode		
• Performance level according to ISO 13849-1	PLe	PLe
• SIL acc. to IEC 61508	SIL 3	Up to SIL 3
Probability of failure (for service life of 20 years and repair time of 100 hours)		
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09 1/h	< 1.00E-09
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C	-20 °C
• horizontal installation, min.	-20 °C	-20 °C
• horizontal installation, max.	60 °C; from 55°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card max. 10% load; SD card not used	60 °C; from 55°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card max. 10% load; SD card not used
• vertical installation, min.	-20 °C	-20 °C
• vertical installation, max.	50 °C; from 45°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card and SD card; max. 10% load	50 °C; from 45°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card and SD card; max. 10% load
Operating systems		
pre-installed operating system	Windows 10 IoT Enterprise 2021 LTSC	SIMATIC Industrial OS
Configuration		
Configuration / programming		
Programming language		
- LAD	Yes; incl. failsafe	Yes; incl. failsafe
- FBD	Yes; incl. failsafe	Yes; incl. failsafe
- STL	Yes	Yes
- SCL	Yes	Yes
- CFC	No	No
- GRAPH	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Copy protection	Yes	Yes
• Block protection	Yes	Yes
Access protection		
• protection of confidential configuration data	Yes	Yes
• Protection level: Write protection	Yes	Yes
• Protection level: Read/write protection	Yes	Yes
• Protection level: Write protection for Failsafe	Yes	Yes
• Protection level: Complete protection	Yes	Yes
• User administration	Yes; device-wide	Yes; device-wide
• Number of users	100	100
Open Development interfaces		
• Size of ODK SO file, max.	5.8 Mbyte	5.8 Mbyte
Peripherals/Options		
SD card	Optionally for additional mass storage	Optionally for additional mass storage
Dimensions		
Width	160 mm	160 mm
Height	117 mm	117 mm
Depth	75 mm	75 mm
Weights		
Weight, approx.	0.83 kg	0.83 kg

7

Overview



ET 200SP Open Controller CPU, 1515SP PC2 T combines robustness and compact dimensions with the flexibility of centralized or decentralized communication in the highest industrial functionality. Furthermore, the CPU offers the entire value added of the ET 200SP system, the S7-1500 controller family and the TIA world together.

- Rugged, compact control system
- Combines the functions of an ET 200SP controller with those of a PC-based platform
- Turnkey all-in-one solution with preinstalled SIMATIC S7-1500 Software Controller T and optional preinstalled WinCC Runtime Advanced
- High performance automation tasks with the use of new generation Intel Quad Core processors
- Connects high-level language applications and processes high data volumes with support from SIMATIC ODK 1500S
- PROFINET IO IRT interface with 2-port switch (corresponding BusAdapter required)
- Isochronous mode with PROFINET IO IRT
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes.
Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Increased number of Motion Control resources (5,120 credits) from version 30.1 of the Software Controller and TIA Portal V19 Update 1

7

Ordering data

SIMATIC ET 200SP Open Controller CPU 1515SP PC2 T

ET 200SP central module with Windows 10 IoT Enterprise 64-bit and preinstalled SIMATIC S7-1500 Software Controller (with WinCC RT Advanced option); 8 GB RAM, 128 GB CFast card; with extended Motion Control functionality

Type of delivery:
English, German, Chinese, Italian, French, Spanish

- CPU 1515SP PC2 T

With preinstalled WinCC RT Advanced

- CPU 1515SP PC2 T + HMI 128PT
- CPU 1515SP PC2 T + HMI 512PT
- CPU 1515SP PC2 T + HMI 2048PT

Article No.

6ES7677-2VB42-0GB1

6ES7677-2VB42-0GK0

6ES7677-2VB42-0GL0

6ES7677-2VB42-0GM0

Accessories

BusAdapter BA 2xRJ45 6ES7193-6AR00-0AA0

BusAdapter BA 2xFC 6ES7193-6AF00-0AA0

BusAdapter BA 2xSCRJ 6ES7193-6AP00-0AA0

BusAdapter BA SCRJ/RJ45 6ES7193-6AP20-0AA0

BusAdapter BA SCRJ/FC 6ES7193-6AP40-0AA0

For increased vibration and EMC loads

BusAdapter BA 2XLC 6ES7193-6AG00-0AA0

BusAdapter BA LC/RJ45 6ES7193-6AG20-0AA0

BusAdapter BA LC/FC 6ES7193-6AG40-0AA0

CM DP for ET 200SP CPU 6ES7545-5DA00-0AB0

PROFIBUS DP master with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps

Article No.

Server module

6ES7193-6PA00-0AA0

Spare part

Power supply connector

6ES7193-4JB00-0AA0

Spare part; for connecting the 24 V DC supply voltage; with push-in terminals (10 units)

Equipment labeling plate

6ES7193-6LF30-0AA0

10 sheets of 16 labels

Labeling strips

6ES7193-6LR10-0AA0

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

6ES7193-6LA10-0AA0

1000 labeling strips DIN A4, light gray, card, for inscription with laser printer

Distributed Controllers

based on ET 200SP

ET 200SP Open Controllers

Technology-CPU > CPU 1515SP PC2 T

Ordering data

Article No.

Article No.

STEP 7 Professional V19

Target system:
SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

Windows 10 (64-bit)

- Windows 10 Home Version 22H2
- Windows 10 Professional Version 22H2
- Windows 10 Enterprise Version 2009/20H2
- Windows 10 Enterprise Version 21H2
- Windows 10 Enterprise Version 22H2
- Windows 10 Enterprise 2016 LTSC
- Windows 10 Enterprise 2019 LTSC
- Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

STEP 7 Professional V19, floating license

Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

6ES7822-1AA23-0YA5

STEP 7 Professional V19, floating license download ¹⁾

Engineering software in the TIA Portal; software, documentation and license key for downloading¹⁾; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.

The system requirements specification can be found at <https://www.siemens.com/compatool>

Consignee email address required for delivery

6ES7822-1AE23-0YA5

SIMATIC ODK 1500S

Open Development Kit V2.5 for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; supplied on DVD, license key (floating license) on USB flash drive

6ES7806-2CD03-0YA0

Open Development Kit V2.5 for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; software download including license key (floating license) ¹⁾

6ES7806-2CD03-0YG0

Email address required for delivery

WinCC Advanced V19

Engineering software in the TIA Portal; in 6 languages: en, de, fr, es, it, zh; for configuring SIMATIC Panels, WinCC Runtime Advanced, WinCC Unified PC Runtime

- Floating license; software and documentation on DVD; license key on USB flash drive
- Floating license; software, documentation and license key for download ¹⁾; Email address required for delivery

6AV2102-0AA02-3AA5

6AV2102-0AA02-3AH5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7677-2VB42-0GB1 CPU1515SP PC2 T
General information	
Product type designation	CPU 1515SP PC2 T
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V19
Installed software	
• Visualization	No
• Control	S7-1500 Software Controller CPU 1505SP T
Supply voltage	
Rated value (DC)	24 V
Processor	
Processor type	Intel Atom E3940, 1.6 GHz, 4 cores
Memory	
Type of memory	DDR3L
Main memory	8 GB RAM
CFast memory card	Yes; 128 GB flash memory
Work memory	
• integrated (for program)	3 Mbyte
• integrated (for data)	7.5 Mbyte
• integrated (for CPU function library of CPU Runtime)	20 Mbyte
Load memory	
• integrated (on PC mass storage)	320 Mbyte
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Hardware configuration	
Integrated power supply	Yes
Time of day	
Clock	
• Type	Hardware clock
• Hardware clock (real-time)	Yes; Resolution: 1 s
Interfaces	
Number of industrial Ethernet interfaces	2
Number of RS 485 interfaces	1; Via CM DP module
Number of USB interfaces	4; 2x USB 2.0, 2x USB 3.0 on front side
Number of SD card slots	1
Video interfaces	
• Graphics interface	1x DisplayPort

Article number	6ES7677-2VB42-0GB1 CPU1515SP PC2 T
1. Interface	
Interface type	PROFINET
automatic detection of transmission rate	Yes
Autonegotiation	Yes
Autocrossing	Yes
Number of connections	88
Interface types	
• RJ 45 (Ethernet)	Yes; Via BusAdapter BA 2x RJ45
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	2
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x M12, BA 2x FC, BA 2x LC, BA LC/RJ45, BA LC/FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes
PROFINET IO Controller Services	
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs
- IRT	Yes
- PROFIenergy	Yes
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128
- Of which IO devices with IRT, max.	64
- of which in line, max.	64
- Number of connectable IO Devices for RT, max.	128
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- IO Devices changing during operation (partner ports), supported	Yes
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte

Distributed Controllers

based on ET 200SP

ET 200SP Open Controllers

Technology-CPU > CPU 1515SP PC2 T

Technical specifications

Article number	6ES7677-2VB42-0GB1 CPU1515SP PC2 T
PROFINET IO Device	
Services	
- Isochronous mode	No
- IRT	Yes
- PROFINergy	Yes; per user program
- Prioritized startup	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program
- PROFINET Security Class	SNMP Configuration and DCP Read Only
2. Interface	
Interface type	Integrated Ethernet interface
automatic detection of transmission rate	Yes
Autonegotiation	Yes
Autocrossing	Yes
Interface types	
• RJ 45 (Ethernet)	Yes; Integrated
- Transmission rate, max.	1 000 Mbit/s
- Industrial Ethernet status LED	No
• Number of ports	1
3. Interface	
Interface type	PROFIBUS with CM DP
Number of connections	44
Interface types	
• RS 485	Yes
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125
Services	
- Equidistance	No
- Isochronous mode	No
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte
Protocols	
Number of connections	
• Number of connections, max.	88
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes

Article number	6ES7677-2VB42-0GB1 CPU1515SP PC2 T
OPC UA	
• OPC UA Client	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space
• Alarms and Conditions	Yes
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	5 120
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
• Number of available Extended Motion Control resources for technology objects	120
• Required Extended Motion Control resources	
- per cam (1 000 points and 50 segments)	2
- per cam (10 000 points and 50 segments)	20
- for each set of kinematics	30
- Per leading axis proxy	3
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• horizontal installation, min.	-20 °C
• horizontal installation, max.	60 °C; from 55°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card max. 10% load; SD card not used
• vertical installation, min.	-20 °C
• vertical installation, max.	50 °C; from 45°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card and SD card; max. 10% load
Operating systems	
pre-installed operating system	Windows 10 IoT Enterprise 2021 LTSC

Technical specifications

Article number	6ES7677-2VB42-0GB1 CPU1515SP PC2 T
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- CFC	No
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
• User administration	Yes; device-wide
• Number of users	100
Open Development interfaces	
• Size of ODK SO file, max.	5.8 Mbyte

Article number	6ES7677-2VB42-0GB1 CPU1515SP PC2 T
Peripherals/Options	
SD card	Optionally for additional mass storage
Dimensions	
Width	160 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	0.83 kg


Distributed Controllers

based on ET 200SP

ET 200SP Open Controllers

Technology-CPU > CPU 1515SP PC2 TF

Overview

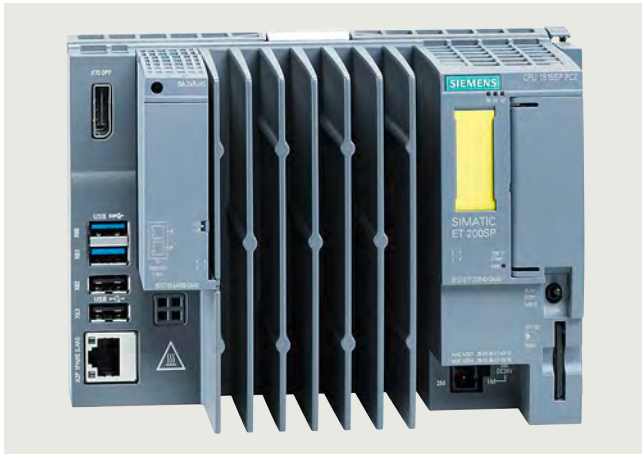

ET 200SP Open Controller, CPU 1515SP PC2 TF, combines robustness and compact dimensions with the flexibility of centralized or decentralized communication in the highest industrial functionality. Furthermore, the CPU offers the entire value added of the ET 200SP system, the S7-1500 controller family and the TIA world together.

- Rugged, compact control system
- Combines the functions of an ET 200SP controller with those of a PC-based platform
- Turnkey all-in-one solution with preinstalled fail-safe SIMATIC S7-1500 Software Controller TF and optional preinstalled WinCC Runtime Advanced
- Can be used up to safety class SIL3 (Safety Integrity Level) according to IEC 61508 2nd Edition or PL e (Performance Level) according to ISO 13849
- High performance automation tasks with the use of Intel Quad Core processors
- Connects high-level language applications and processes high data volumes with support from SIMATIC ODK 1500S
- PROFINET IO IRT interface with 2-port switch (corresponding BusAdapter required)
- Isochronous mode with PROFINET IO IRT
- Integrated Motion Control functionalities for controlling speed-controlled, positioning and synchronized axes (gearing and camming), support for external encoders, output cams/cam tracks and probes. Technology object for controlling kinematics with up to 4 interpolating axes, e.g. Cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA.
- Cross-PLC synchronous operation for synchronization of multiple SIMATIC S7-1500T Controllers
- Increased number of Motion Control resources (5,120 credits) from version 30.1 of the Software Controller and TIA Portal V19 Update 1

Ordering data

SIMATIC ET 200SP Open Controller CPU 1515SP PC2 TF

Fail-safe ET 200SP central module with Windows 10 IoT Enterprise 64-bit and preinstalled fail-safe SIMATIC S7-1500 Software Controller (with WinCC RT Advanced option); 8 GB RAM, 128 GB CFast card; with extended Motion Control functionality

Type of delivery:

English, German, Chinese, Italian, French, Spanish

- CPU 1515SP PC2 TF

With preinstalled WinCC RT Advanced

- CPU 1515SP PC2 TF + HMI 128PT
- CPU 1515SP PC2 TF + HMI 512PT
- CPU 1515SP PC2 TF + HMI 2048PT

Accessories

Accessories	Article No.
BusAdapter BA 2xRJ45	6ES7193-6AR00-0AA0
BusAdapter BA 2xFC	6ES7193-6AF00-0AA0
BusAdapter BA 2xSCRJ	6ES7193-6AP00-0AA0
BusAdapter BA SCRJ/RJ45	6ES7193-6AP20-0AA0
BusAdapter BA SCRJ/FC	6ES7193-6AP40-0AA0
For increased vibration and EMC loads	
BusAdapter BA 2XLC	6ES7193-6AG00-0AA0
BusAdapter BA LC/RJ45	6ES7193-6AG20-0AA0
BusAdapter BA LC/FC	6ES7193-6AG40-0AA0

Article No.

CM DP for ET 200SP CPU

PROFIBUS DP master with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps

6ES7545-5DA00-0AB0

Server module

Spare part

6ES7193-6PA00-0AA0

Power supply connector

Spare part; for connecting the 24 V DC supply voltage; with push-in terminals (10 units)

6ES7193-4JB00-0AA0

Equipment labeling plate

10 sheets of 16 labels

6ES7193-6LF30-0AA0

Labeling strips

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AA0

1000 labeling strips DIN A4, light gray, card, for inscription with laser printer

6ES7193-6LA10-0AA0

Ordering data	Article No.	Article No.	
STEP 7 Professional V19 Target system: SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC Requirement: Windows 10 (64-bit) <ul style="list-style-type: none"> Windows 10 Home Version 22H2 Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) Type of delivery: 9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download		STEP 7 Professional V19, floating license download ¹⁾ Engineering software in the TIA Portal; software, documentation and license key for downloading ¹⁾ ; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels. The system requirements specification can be found at https://www.siemens.com/compatool Consignee email address required for delivery	6ES7822-1AE23-0YA5
		SIMATIC ODK 1500S Open Development Kit V2.5 for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; supplied on DVD, license key (floating license) on USB flash drive Open Development Kit V2.5 for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; software download including license key (floating license) ¹⁾ Email address required for delivery	6ES7806-2CD03-0YA0 6ES7806-2CD03-0YG0
STEP 7 Professional V19, floating license Engineering software in the TIA Portal; software and documentation on DVD; license key on USB flash drive; Class A; 9 languages: en, de, zh included, fr, es, it, ru, ja, ko as download; for configuration of SIMATIC S7-1200/1500, S7-300/400/WinAC, SIMATIC Basic Panels, SIMATIC Unified Basic Panels.	6ES7822-1AA23-0YA5	WinCC Advanced V19 Engineering software in the TIA Portal; in 6 languages: en, de, fr, es, it, zh; for configuring SIMATIC Panels, WinCC Runtime Advanced, WinCC Unified PC Runtime <ul style="list-style-type: none"> Floating license; software and documentation on DVD; license key on USB flash drive Floating license; software, documentation and license key for download¹⁾; Email address required for delivery 	6AV2102-0AA02-3AA5 6AV2102-0AA02-3AH5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7677-2WB42-0GB1
	CPU1515SP PC2 TF
General information	
Product type designation	CPU 1515SP PC2 TF
Engineering with	
<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/integrated from version 	V19
Installed software	
<ul style="list-style-type: none"> Visualization Control 	No S7-1500 Software Controller CPU 1505SP TF
Supply voltage	
Rated value (DC)	24 V
Processor	
Processor type	Intel Atom E3940, 1.6 GHz, 4 cores
Memory	
Type of memory	DDR3L
Main memory	8 GB RAM
CFlash memory card	Yes; 128 GB flash memory

Article number	6ES7677-2WB42-0GB1
	CPU1515SP PC2 TF
Work memory	
<ul style="list-style-type: none"> integrated (for program) integrated (for data) integrated (for CPU function library of CPU Runtime) 	3 Mbyte 7.5 Mbyte 20 Mbyte
Load memory	
<ul style="list-style-type: none"> integrated (on PC mass storage) 	320 Mbyte
Counters, timers and their retentivity	
S7 counter	
<ul style="list-style-type: none"> Number 	2 048
IEC counter	
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)
S7 times	
<ul style="list-style-type: none"> Number 	2 048
IEC timer	
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)

Distributed Controllers

based on ET 200SP

ET 200SP Open Controllers

Technology-CPU > CPU 1515SP PC2 TF

Technical specifications

Article number	6ES7677-2WB42-0GB1 CPU1515SP PC2 TF
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Hardware configuration	
Integrated power supply	Yes
Time of day	
Clock	
• Type	Hardware clock
• Hardware clock (real-time)	Yes; Resolution: 1 s
Interfaces	
Number of industrial Ethernet interfaces	2
Number of RS 485 interfaces	1; Via CM DP module
Number of USB interfaces	4; 2x USB 2.0, 2x USB 3.0 on front side
Number of SD card slots	1
Video interfaces	
• Graphics interface	1x DisplayPort
1. Interface	
Interface type	PROFINET
automatic detection of transmission rate	Yes
Autonegotiation	Yes
Autocrossing	Yes
Number of connections	88
Interface types	
• RJ 45 (Ethernet)	Yes; Via BusAdapter BA 2x RJ45
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	2
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; compatible BusAdapters: BA 2x RJ45, BA 2x M12, BA 2x FC, BA 2x LC, BA LC/RJ45, BA LC/FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes
PROFINET IO Controller	
Services	
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs
- IRT	Yes
- PROFlenergy	Yes
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128
- Of which IO devices with IRT, max.	64
- of which in line, max.	64

Article number	6ES7677-2WB42-0GB1 CPU1515SP PC2 TF
- Number of connectable IO Devices for RT, max.	128
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- IO Devices changing during operation (partner ports), supported	Yes
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte
PROFINET IO Device	
Services	
- Isochronous mode	No
- IRT	Yes
- PROFlenergy	Yes; per user program
- Prioritized startup	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program
- PROFINET Security Class	SNMP Configuration and DCP Read Only
2. Interface	
Interface type	Integrated Ethernet interface
automatic detection of transmission rate	Yes
Autonegotiation	Yes
Autocrossing	Yes
Interface types	
• RJ 45 (Ethernet)	Yes; Integrated
- Transmission rate, max.	1 000 Mbit/s
- Industrial Ethernet status LED	No
• Number of ports	1
3. Interface	
Interface type	PROFIBUS with CM DP
Number of connections	44
Interface types	
• RS 485	Yes
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125
Services	
- Equidistance	No
- Isochronous mode	No
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte

Technical specifications

Article number	6ES7677-2WB42-0GB1 CPU1515SP PC2 TF
Protocols	
Number of connections	
• Number of connections, max.	88
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via BusAdapter
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space
• Alarms and Conditions	Yes
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	5 120
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
• Number of available Extended Motion Control resources for technology objects	120
• Required Extended Motion Control resources	
- per cam (1 000 points and 50 segments)	2
- per cam (10 000 points and 50 segments)	20
- for each set of kinematics	30
- Per leading axis proxy	3
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3

Article number	6ES7677-2WB42-0GB1 CPU1515SP PC2 TF
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09 1/h
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• horizontal installation, min.	-20 °C
• horizontal installation, max.	60 °C; from 55°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card max. 10% load; SD card not used
• vertical installation, min.	-20 °C
• vertical installation, max.	50 °C; from 45°C: with max. 32 ET 200SP modules; 4x 0.3 A USB load; CFast memory card and SD card; max. 10% load
Operating systems	
pre-installed operating system	Windows 10 Enterprise 2021 LTSC
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- CFC	No
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Write protection for Failsafe	Yes
• Protection level: Complete protection	Yes
• User administration	Yes; device-wide
• Number of users	100
Open Development interfaces	
• Size of ODK SO file, max.	5.8 Mbyte
Peripherals/Options	
SD card	Optionally for additional mass storage
Dimensions	
Width	160 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	0.83 kg

Distributed Controllers

based on ET 200SP

SIPLUS ET 200SP Open Controllers

SIPLUS standard CPUs > SIPLUS CPU 1515SP PC2

Overview



SIPLUS ET 200SP Open Controller, SIPLUS CPU 1515SP PC2, combines robustness and compact dimensions with the flexibility of centralized or decentralized communication in the highest industrial functionality. Furthermore, the CPU offers the entire value added of the SIPLUS ET 200SP system, the SIPLUS S7-1500 controller family and the TIA world together.

- Rugged, compact control system
- Combines the functions of a SIPLUS ET 200SP controller with those of a PC-based platform
- Turnkey all-in-one controller
- High performance automation tasks with the use of new generation Intel Quad Core processors
- Connects high-level language applications and processes high data volumes with support from SIMATIC ODK 1500S

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS ET 200SP Open Controller CPU 1515SP PC2

SIPLUS ET 200SP CPU with Windows 10 IoT Enterprise 64-bit and preinstalled SIMATIC S7-1500 Software Controller; 8 GB RAM, 30 GB CFast card

Type of delivery:

- SIPLUS ET 200SP CPU 1515SP PC2

6AG1677-2DB42-2GB0

For areas with exceptional exposure to environmental substances (conformal coating); ambient temperature -40 ... +60 °C

- SIPLUS ET 200SP CPU 1515SP PC2 Spare

6AG1677-2DB40-2AA0

Spare part, without CFast card

- SIPLUS ET 200SP CPU 1515SP PC2 L

6AG1677-2DB40-2GB0

8 GB RAM, 128 GB CFast card, Ready4Linux,

For areas with exceptional exposure to environmental substances (conformal coating); ambient temperature -40 ... +60 °C

Accessories

BusAdapter BA 2xRJ45

(Extended temperature range and exposure to environmental substances)

6AG1193-6AR00-7AA0

SIPLUS BusAdapter BA 2xFC

(Extended temperature range and exposure to environmental substances)

6AG1193-6AF00-7AA0

BusAdapter BA 2xSCRJ

(Extended temperature range and exposure to environmental substances)

6AG1193-6AP00-2AA0

BusAdapter BA 2xLC

(Extended temperature range and exposure to environmental substances)

6AG1193-6AG00-2AA0

SIPLUS Mounting Kit ET 200SP

Mounting accessories for use with increased mechanical vibration and shock loads. Not approved for SIPLUS BusAdapter BA 2xRJ45

6AG1193-6AA00-0AA0

Other accessories

See SIMATIC CPU 1515SP PC2, page 7/63

Distributed Controllers

based on ET 200SP
SIPLUS ET 200SP Open Controllers

SIPLUS standard CPUs > SIPLUS CPU 1515SP PC2

Technical specifications

Article number	6AG1677-2DB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2AA0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2GB0 SIPLUS ET 200SP CPU 1515SP PC2 L
General information			
Product type designation	CPU 1515SP PC2	CPU 1515SP PC2	CPU 1515SP PC2 L
Engineering with			
• STEP 7 TIA Portal configurable/integrated from version	see entry ID: 109746275	see entry ID: 109746275	see entry ID: 109746275
Installed software			
• Visualization	No	No	No
• Control	S7-1500 Software Controller CPU 1505SP	No	S7-1500 Software Controller CPU 1505SP
Supply voltage			
Rated value (DC)	24 V	24 V	24 V
Processor			
Processor type	Intel Atom E3940, 1.6 GHz, 4 cores	Intel Atom E3940, 1.6 GHz, 4 cores	Intel Atom E3940, 1.6 GHz, 4 cores
Memory			
Type of memory	DDR3L	DDR3L	DDR3L
Main memory	8 GB RAM	8 GB RAM	8 GB RAM
CFast memory card	Yes; 30 GB flash memory	No	Yes; 128 GB flash memory
Work memory			
• integrated (for program)	1 Mbyte		1 Mbyte
• integrated (for data)	5 Mbyte		5 Mbyte
• integrated (for CPU function library of CPU Runtime)	20 Mbyte		20 Mbyte
Load memory			
• integrated (on PC mass storage)	320 Mbyte		320 Mbyte
CPU processing times			
for bit operations, typ.	10 ns		10 ns
for word operations, typ.	12 ns		12 ns
for fixed point arithmetic, typ.	16 ns		16 ns
for floating point arithmetic, typ.	64 ns		64 ns
Counters, timers and their retentivity			
S7 counter			
• Number	2 048		2 048
IEC counter			
• Number	Any (only limited by the main memory)		Any (only limited by the main memory)
S7 times			
• Number	2 048		2 048
IEC timer			
• Number	Any (only limited by the main memory)		Any (only limited by the main memory)
Data areas and their retentivity			
Flag			
• Size, max.	16 kbyte		16 kbyte
Address area			
I/O address area			
• Inputs	32 kbyte; All inputs are in the process image		16 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image		16 kbyte; All outputs are in the process image
Hardware configuration			
Integrated power supply	Yes	Yes	Yes
Time of day			
Clock			
• Type	Hardware clock	Hardware clock	Hardware clock
• Hardware clock (real-time)	Yes; Resolution: 1 s	Yes; Resolution: 1 s	Yes; Resolution: 1 s
Interfaces			
Number of industrial Ethernet interfaces	2	2	2
Number of RS 485 interfaces	1; Via CM DP module	1; Via CM DP module	1; Via CM DP module
Number of USB interfaces	4; 2x USB 2.0, 2x USB 3.0 on front side	4; 2x USB 2.0, 2x USB 3.0 on front side	4; 2x USB 2.0, 2x USB 3.0 on front side
Number of SD card slots	1	1	1

Distributed Controllers

based on ET 200SP

SIPLUS ET 200SP Open Controllers

SIPLUS standard CPUs > SIPLUS CPU 1515SP PC2

Technical specifications

Article number	6AG1677-2DB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2AA0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2GB0 SIPLUS ET 200SP CPU 1515SP PC2 L
Video interfaces			
• Graphics interface	1x DisplayPort	1x DisplayPort	1x DisplayPort
1. Interface			
Interface type	PROFINET	PROFINET	PROFINET
automatic detection of transmission rate	Yes		Yes
Autonegotiation	Yes		Yes
Autocrossing	Yes		Yes
Number of connections	88		88
Interface types			
• RJ 45 (Ethernet)	Yes; Via BusAdapter BA 2x RJ45	Yes; Via BusAdapter BA 2x RJ45	Yes; Via BusAdapter BA 2x RJ45
- Transmission rate, max.	100 Mbit/s	100 Mbit/s	100 Mbit/s
- Industrial Ethernet status LED	Yes	Yes	Yes
• Number of ports	2	2	2
• integrated switch	Yes	Yes	Yes
• BusAdapter (PROFINET)	Yes; Compatible BusAdapter: BA 2x RJ45, BA 2x FC, BA 2x SCRJ (from FS03, V2.2), BA SCRJ / RJ45 (from FS03, V3.1), BA SCRJ / FC (from FS03, V3.1), BA 2x LC (from FS03, V3.3), BA LC / RJ45 (from FS03, V3.3), BA LC / FC (from FS03, V3.3)	Yes; Compatible BusAdapter: BA 2x RJ45, BA 2x FC, BA 2x SCRJ (from FS03, V2.2), BA SCRJ / RJ45 (from FS03, V3.1), BA SCRJ / FC (from FS03, V3.1), BA 2x LC (from FS03, V3.3), BA LC / RJ45 (from FS03, V3.3), BA LC / FC (from FS03, V3.3)	Yes; Compatible BusAdapter: BA 2x RJ45, BA 2x FC, BA 2x SCRJ (from FS03, V2.2), BA SCRJ / RJ45 (from FS03, V3.1), BA SCRJ / FC (from FS03, V3.1), BA 2x LC (from FS03, V3.3), BA LC / RJ45 (from FS03, V3.3), BA LC / FC (from FS03, V3.3)
Protocols			
• PROFINET IO Controller	Yes		Yes
• PROFINET IO Device	Yes		Yes
• SIMATIC communication	Yes		Yes
• Open IE communication	Yes		Yes
• Web server	Yes		Yes
PROFINET IO Controller			
Services			
- Isochronous mode	Yes		Yes
- shortest clock pulse	500 µs		500 µs
- IRT	Yes		Yes
- PROFIenergy	Yes		Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)		Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices, max.	128		128
- Of which IO devices with IRT, max.	64		64
- of which in line, max.	64		64
- Number of connectable IO Devices for RT, max.	128		128
- of which in line, max.	128		128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8		8
- IO Devices changing during operation (partner ports), supported	Yes		Yes
- Number of IO Devices per tool, max.	8		8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data		The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data

7

Technical specifications

Article number	6AG1677-2DB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2AA0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2GB0 SIPLUS ET 200SP CPU 1515SP PC2 L
Address area			
- Inputs, max.	8 kbyte		8 kbyte
- Outputs, max.	8 kbyte		8 kbyte
PROFINET IO Device			
Services			
- Isochronous mode	No		No
- shortest clock pulse	500 µs		500 µs
- IRT	Yes		Yes
- PROFinergy	Yes		Yes
- Prioritized startup	Yes		Yes
- Shared device	Yes		Yes
- Number of IO Controllers with shared device, max.	4		4
- Asset management record	Yes		Yes
2. Interface			
Interface type	Integrated Ethernet interface	Integrated Ethernet interface	Integrated Ethernet interface
automatic detection of transmission rate	Yes		Yes
Autonegotiation	Yes		Yes
Autocrossing	Yes		Yes
Interface types			
• RJ 45 (Ethernet)	Yes; Integrated	Yes; Integrated	Yes; Integrated
- Transmission rate, max.	1 000 Mbit/s	1 000 Mbit/s	1 000 Mbit/s
- Industrial Ethernet status LED	No	No	No
• Number of ports	1	1	1
3. Interface			
Interface type	PROFIBUS with CM DP		
Number of connections	44		
Interface types			
• RS 485	Yes		
Protocols			
• PROFIBUS DP master	Yes		
• PROFIBUS DP slave	Yes		
• SIMATIC communication	Yes		
PROFIBUS DP master			
• Number of DP slaves, max.	125		
Services			
- Equidistance	No		
- Isochronous mode	No		
Address area			
- Inputs, max.	8 kbyte		
- Outputs, max.	8 kbyte		
Protocols			
Number of connections			
• Number of connections, max.	88		88
Redundancy mode			
Media redundancy			
- MRP	Yes		
- MRPD	Yes		
- Switchover time on line break, typ.	200 ms		200 ms
- Number of stations in the ring, max.	50		50
SIMATIC communication			
• S7 routing	Yes		No
OPC UA			
• OPC UA Client	Yes; From SW CPU 1505SP V2.6		Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), runtime license required		Yes; Data access (read, write, subscribe), runtime license required

Distributed Controllers

based on ET 200SP

SIPLUS ET 200SP Open Controllers

SIPLUS standard CPUs > SIPLUS CPU 1515SP PC2

Technical specifications

Article number	6AG1677-2DB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2AA0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2GB0 SIPLUS ET 200SP CPU 1515SP PC2 L
Supported technology objects			
Motion Control	Yes		Yes
• Number of available Motion Control resources for technology objects	2 400		2 400
• Required Motion Control resources			
- per speed-controlled axis	40; per axis		40; per axis
- per positioning axis	80; per axis		80; per axis
- per synchronous axis	160; per axis		160; per axis
- per external encoder	80; per external encoder		80; per external encoder
- per output cam	20; per cam		20; per cam
- per cam track	160; per cam track		160; per cam track
- per probe	40; per probe		40; per probe
Controller			
• PID_Compact	Yes; Universal PID controller with integrated optimization		Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves		Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature		Yes; PID controller with integrated optimization for temperature
Counting and measuring			
• High-speed counter	Yes		Yes
Ambient conditions			
Ambient temperature during operation			
• min.	-40 °C; = Tmin	-40 °C; = Tmin	-40 °C; = Tmin
• max.	up to 55 °C with max. 64 ET 200SP modules, max. 2x 900 mA USB load and max. 2x 500 mA USB load; up to 60 °C with max. 32 ET 200SP modules and 4x 500 mA USB load; FS06 or higher: up to 70 °C with max. 16 ET 200SP modules, 4x 100 mA USB load and no visualization	up to 55 °C with max. 64 ET 200SP modules, max. 2x 900 mA USB load and max. 2x 500 mA USB load; up to 60 °C with max. 32 ET 200SP modules and 4x 500 mA USB load; FS06 or higher: up to 70 °C with max. 16 ET 200SP modules, 4x 100 mA USB load and no visualization	up to 55 °C with max. 64 ET 200SP modules, max. 2x 900 mA USB load and max. 2x 500 mA USB load; up to 60 °C with max. 32 ET 200SP modules and 4x 500 mA USB load; FS06 or higher: up to 70 °C with max. 16 ET 200SP modules, 4x 100 mA USB load and no visualization
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin	-40 °C; = Tmin	-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax; with max. 32 ET 200SP modules and max. 4x 500 mA USB load	50 °C; = Tmax; with max. 32 ET 200SP modules and max. 4x 500 mA USB load	50 °C; = Tmax; with max. 32 ET 200SP modules and max. 4x 500 mA USB load
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Technical specifications

Article number	6AG1677-2DB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2AA0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2GB0 SIPLUS ET 200SP CPU 1515SP PC2 L
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Operating systems			
pre-installed operating system	Windows 10 IoT Enterprise 2016 LTSP, 64bit, MUI		No
Configuration			
Configuration / programming			
Programming language			
- LAD	Yes		Yes
- FBD	Yes		Yes
- STL	Yes		Yes
- SCL	Yes		Yes
- CFC	No		No
- GRAPH	Yes		Yes
Know-how protection			
• User program protection/password protection	Yes		Yes
• Copy protection	Yes		Yes
• Block protection	Yes		Yes
Access protection			
• Protection level: Write protection	Yes		Yes
• Protection level: Read/write protection	Yes		Yes
• Protection level: Complete protection	Yes		Yes

Distributed Controllers

based on ET 200SP

SIPLUS ET 200SP Open Controllers

SIPLUS standard CPUs > SIPLUS CPU 1515SP PC2

Technical specifications


Article number	6AG1677-2DB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2AA0 SIPLUS ET 200SP CPU1515SP PC2	6AG1677-2DB40-2GB0 SIPLUS ET 200SP CPU 1515SP PC2 L
Open Development interfaces			
• Size of ODK SO file, max.	5.8 Mbyte		5.8 Mbyte
Peripherals/Options			
SD card	Optionally for additional mass storage	Optionally for additional mass storage	Optionally for additional mass storage
Dimensions			
Width	160 mm	160 mm	160 mm
Height	117 mm	117 mm	117 mm
Depth	75 mm	75 mm	75 mm
Weights			
Weight, approx.	0.83 kg	0.83 kg	0.83 kg

Distributed Controllers

based on ET 200SP
SIPLUS ET 200SP Open Controllers

SIPLUS fail-safe CPUs > SIPLUS CPU 1515SP PC2 F

Overview

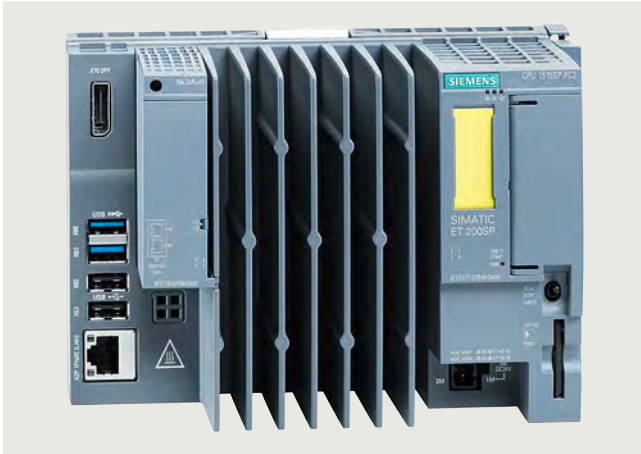

SIPLUS ET 200SP Open Controller, SIPLUS CPU 1515SP PC2 F, combines robustness and compact dimensions with the flexibility of centralized or decentralized communication in the highest industrial functionality. Furthermore, the CPU offers the entire value added of the SIPLUS ET 200SP system, the SIPLUS S7-1500 controller family and the TIA world together.

- Rugged, compact control system
- Combines the functions of a SIPLUS ET 200SP controller with those of a PC-based platform
- Turnkey all-in-one controller
- Can be used up to safety class SIL3 (Safety Integrity Level) according to IEC 61508 2nd Edition or PL e (Performance Level) according to ISO 13849
- High performance automation tasks with the use of new generation Intel Quad Core processors
- Connects high-level language applications and processes high data volumes with support from SIMATIC ODK 1500S

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS ET 200SP Open Controller CPU 1515SP PC2 F

(Extended temperature range and exposure to environmental substances)

Fail-safe ET 200SP CPU with Windows 10 IoT Enterprise 64-bit and preinstalled SIMATIC S7-1500 Failsafe Software Controller (with WinCC RT Advanced option); 8 GB RAM, 30 GB CFast card;

Type of delivery:
en, de, fr, es, it, zh

- SIPLUS CPU 1515SP PC2 F

6AG1677-2SB42-2GB0

Accessories

BusAdapter BA 2xRJ45

(Extended temperature range and exposure to environmental substances)

6AG1193-6AR00-7AA0

SIPLUS BusAdapter BA 2xFC

(Extended temperature range and exposure to environmental substances)

6AG1193-6AF00-7AA0

BusAdapter BA 2xSCRJ

(Extended temperature range and exposure to environmental substances)

6AG1193-6AP00-2AA0

BusAdapter BA 2xLC

(Extended temperature range and exposure to environmental substances)

6AG1193-6AG00-2AA0

SIPLUS Mounting Kit ET 200SP

Mounting accessories for use with increased mechanical vibration and shock loads. Not approved for SIPLUS BusAdapter BA 2xRJ45

6AG1193-6AA00-0AA0

Other accessories

See SIMATIC CPU 1515SP PC2 F, page 7/69

Distributed Controllers

based on ET 200SP

SIPLUS ET 200SP Open Controllers

SIPLUS fail-safe CPUs > SIPLUS CPU 1515SP PC2 F

Technical specifications

Article number	6AG1677-2SB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2 F
General information	
Product type designation	CPU 1515SP PC2 F
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	see entry ID: 109746275
Installed software	
• Visualization	No
• Control	S7-1500 Software Controller CPU 1505SP F
Supply voltage	
Rated value (DC)	24 V
Processor	
Processor type	Intel Atom E3940, 1.6 GHz, 4 cores
Memory	
Type of memory	DDR3L
Main memory	8 GB RAM
CFast memory card	Yes; 30 GB flash memory
Work memory	
• integrated (for program)	1.5 Mbyte
• integrated (for data)	5 Mbyte
• integrated (for CPU function library of CPU Runtime)	20 Mbyte
Load memory	
• integrated (on PC mass storage)	320 Mbyte
CPU processing times	
for bit operations, typ.	10 ns
for word operations, typ.	12 ns
for fixed point arithmetic, typ.	16 ns
for floating point arithmetic, typ.	64 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Hardware configuration	
Integrated power supply	Yes
Time of day	
Clock	
• Type	Hardware clock
• Hardware clock (real-time)	Yes; Resolution: 1 s
Interfaces	
Number of industrial Ethernet interfaces	2
Number of RS 485 interfaces	1; Via CM DP module
Number of USB interfaces	4; 2x USB 2.0, 2x USB 3.0 on front side
Number of SD card slots	1

Article number	6AG1677-2SB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2 F
Video interfaces	
• Graphics interface	1x DisplayPort
1. Interface	
Interface type	PROFINET
automatic detection of transmission rate	Yes
Autonegotiation	Yes
Autocrossing	Yes
Number of connections	88
Interface types	
• RJ 45 (Ethernet)	Yes; Via BusAdapter BA 2x RJ45
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	2
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; Compatible BusAdapter: BA 2x RJ45, BA 2x FC, BA 2x SCRJ (from FS03, V2.2), BA SCRJ / RJ45 (from FS03, V3.1), BA SCRJ / FC (from FS03, V3.1), BA 2x LC (from FS03, V3.3), BA LC / RJ45 (from FS03, V3.3), BA LC / FC (from FS03, V3.3)
Protocols	
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes
• Web server	Yes
PROFINET IO Controller Services	
- Isochronous mode	Yes
- shortest clock pulse	500 µs
- IRT	Yes
- PROFIenergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices, max.	128
- Of which IO devices with IRT, max.	64
- of which in line, max.	64
- Number of connectable IO Devices for RT, max.	128
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- IO Devices changing during operation (partner ports), supported	Yes
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte

Technical specifications

Article number	6AG1677-2SB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2 F
PROFINET IO Device	
Services	
- Isochronous mode	No
- shortest clock pulse	500 µs
- IRT	Yes
- PROFinergy	Yes
- Prioritized startup	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
2. Interface	
Interface type	Integrated Ethernet interface
automatic detection of transmission rate	Yes
Autonegotiation	Yes
Autocrossing	Yes
Interface types	
• RJ 45 (Ethernet)	Yes; Integrated
- Transmission rate, max.	1 000 Mbit/s
- Industrial Ethernet status LED	No
• Number of ports	1
3. Interface	
Interface type	PROFIBUS with CM DP
Number of connections	44
Interface types	
• RS 485	Yes
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125
Services	
- Equidistance	No
- Isochronous mode	No
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte
Protocols	
Number of connections	
• Number of connections, max.	88
Redundancy mode	
Media redundancy	
- MRP	Yes
- MRPD	Yes
- Switchover time on line break, typ.	200 ms
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; From SW CPU 1505SP V2.6
• OPC UA Server	Yes; Data access (read, write, subscribe), runtime license required

Article number	6AG1677-2SB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2 F
Supported technology objects	
Motion Control	Yes
• Number of available Motion Control resources for technology objects	2 400
• Required Motion Control resources	
- per speed-controlled axis	40; per axis
- per positioning axis	80; per axis
- per synchronous axis	160; per axis
- per external encoder	80; per external encoder
- per output cam	20; per cam
- per cam track	160; per cam track
- per probe	40; per probe
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09 1/h
Ambient conditions	
Ambient temperature during operation	
• min.	-40 °C; = Tmin
• max.	Up to 60 °C with max. 32 ET 200SP modules; up to 55 °C with max. 64 ET 200SP modules
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax; with max. 32 ET 200SP modules
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air

Distributed Controllers

based on ET 200SP

SIPLUS ET 200SP Open Controllers

SIPLUS fail-safe CPUs > SIPLUS CPU 1515SP PC2 F

Technical specifications

Article number	6AG1677-2SB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2 F
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Article number	6AG1677-2SB42-2GB0 SIPLUS ET 200SP CPU1515SP PC2 F
Operating systems	
pre-installed operating system	Windows 10 IoT Enterprise 2016 LTSB, 64bit, MUI
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- CFC	No
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
Open Development interfaces	
• Size of ODK SO file, max.	5.8 Mbyte
Peripherals/Options	
SD card	Optionally for additional mass storage
Dimensions	
Width	160 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	0.83 kg

7

Overview

- CPU with PLC functionality equivalent to S7-315-2 PN/DP provides distributed intelligence for preprocessing
- Interface module for exchanging pre-processed I/O data between the ET 200pro and a higher-level master/IO controller via PROFIBUS DP/PROFINET IO
- PROFINET IO controller for operating distributed I/O on PROFINET
- Component-based Automation (CBA) on PROFINET
- PROFINET proxy for intelligent devices on PROFIBUS DP in Component-based Automation (CBA)
- PROFINET interface with 3-port switch
- Isochronous mode on PROFIBUS or PROFINET
- Integrated web server with the option of creating user-defined web pages
- CPU with PLC functionality equivalent to S7-315-2 PN/DP provides distributed intelligence for preprocessing
- Fast, simple and end-to-end programming of a system with modular programs via STEP 7
- Fail-safe IM 154-8F PN/DP CPU PROFIsafe available

Note:

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data	Article No.		Article No.
IM 154-8 PN/DP CPU interface module, V3.2 PROFINET IO controller for operating distributed I/Os on PROFINET, with integrated PLC functionality.	6ES7154-8AB01-0AB0		
Accessories			
MMC 64 KB ¹⁾ For program backup.	6ES7953-8LF31-0AA0	Industrial Ethernet FC RJ45 plug 180 RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet	
MMC 128 KB ¹⁾ For program backup.	6ES7953-8LG31-0AA0	<ul style="list-style-type: none"> • 1 unit • 10 units • 50 units 	6GK1901-1BB10-2AA0 6GK1901-1BB10-2AB0 6GK1901-1BB10-2AE0
MMC 512 KB ¹⁾ For program backup.	6ES7953-8LJ31-0AA0	Industrial Ethernet FastConnect installation cables	
MMC 2 MB ¹⁾ For program backup and/or firmware updates.	6ES7953-8LL31-0AA0	<ul style="list-style-type: none"> • FastConnect standard cable • FastConnect trailing cable • FastConnect marine cable 	6XV1840-2AH10 6XV1840-3AH10 6XV1840-4AH10
MMC 4 MB ¹⁾ For program backup.	6ES7953-8LM32-0AA0	Industrial Ethernet FastConnect installation cables	
MMC 8 MB ¹⁾ For program backup.	6ES7953-8LP31-0AA0	<ul style="list-style-type: none"> • IE FC TP trailing cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m. • IE TP torsion cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m. 	6XV1870-2D 6XV1870-2F
Connection module For CPU IM154-8 PN/DP, with 4 x M12 and 2 x 7/8", for connecting PROFINET and PROFIBUS DP.	6ES7194-4AN00-0AA0	Industrial Ethernet FastConnect Stripping tool	6GK1901-1GA00

¹⁾ An MMC is essential for operating the CPU

Distributed Controllers

based on ET 200pro
Standard CPUs

IM 154-8 PN/DP CPU

Ordering data

Article No.

Article No.

IE connecting cable M12-180/M12-180

- Pre-assembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (4-pin, D-coded), degree of protection IP65/IP67, in various lengths:

- 0.3 m
- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m
- 20 m
- 30 m
- 40 m
- 50 m

- PROFINET M12 trailing connecting cable, pre-assembled at both ends with angled M12 plugs (male contact insert), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

- PROFINET M12 trailing connecting cable, pre-assembled at one end with angled M12 plug (male contact insert at one end, other end open), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

6XV1870-8AE30
6XV1870-8AE50
6XV1870-8AH10
6XV1870-8AH15
6XV1870-8AH20
6XV1870-8AH30
6XV1870-8AH50
6XV1870-8AN10
6XV1870-8AN15
6XV1870-8AN20
6XV1870-8AN30
6XV1870-8AN40
6XV1870-8AN50

3RK1902-2NB30
3RK1902-2NB50
3RK1902-2NC10

3RK1902-2HB30
3RK1902-2HB50
3RK1902-2HC10

IE FC M12 plug PRO

PROFINET M12 plug connector, D-coded with fast connection system, axial cable outlet.

- 1 unit
- 8 units
- PROFINET M12 plug connector, D-coded, angled.

6GK1901-0DB20-6AA0
6GK1901-0DB20-6AA8
3RK1902-2DA00

IE panel feedthrough

Cabinet bushing for converting from the M12 connection system (D-coded, IP65/IP67) to the RJ45 connection system (IP20), 1 pack = 5 units.

6GK1901-0DM20-2AA5

7/8" connecting cable to power supply

- 5-wire, 5 x 1.5 mm², trailable, pre-assembled with two 7/8" connectors (axial cable outlet), 5-pin, up to 50 m, in various lengths:

- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m

- Other special lengths with 90° or 180° cable outlet.

- Trailing power cable, 5 x 1.5 mm², pre-assembled at both ends with 7/8" angled plugs (female contact insert at one end, male contact insert at the other end), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

- Trailing power cable, 5 x 1.5 mm², pre-assembled at one end with 7/8" angled plug with female contact insert (socket at one end, other end open), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

Power line

5-wire, 5 x 1.5 mm², trailing type, sold by the meter, minimum order quantity 20 m, maximum order quantity 1000 m.

7/8" connection plug

For ET 200eco, with axial cable outlet

- With male contact insert, 5-pack
- With female contact insert, 5-pack
- Angled, with female contact insert, 1 unit
- Angled, with male contact insert, 1 unit

7/8" cover cap, 10 per pack

Twisted pair cables 4x2 with RJ45 plugs

0.5 m
1 m
2 m
6 m
10 m

Crossed twisted pair cables 4x2 with RJ45 plugs

0.5 m
1 m
2 m
6 m
10 m

6XV1822-5BH15
6XV1822-5BH20
6XV1822-5BH30
6XV1822-5BH50
6XV1822-5BN10
6XV1822-5BN15

See under
<https://support.automation.siemens.com/WW/view/en/26999294>.

3RK1902-3NB30
3RK1902-3NB50
3RK1902-3NC10

3RK1902-3GB30
3RK1902-3GB50
3RK1902-3GC10

6XV1830-8AH10

6GK1905-0FA00
6GK1905-0FB00
3RK1902-3DA00

3RK1902-3BA00

6ES7194-3JA00-0AA0

6XV1870-3QE50
6XV1870-3QH10
6XV1870-3QH20
6XV1870-3QH60
6XV1870-3QN10

6XV1870-3RE50
6XV1870-3RH10
6XV1870-3RH20
6XV1870-3RH60
6XV1870-3RN10

Ordering data	Article No.	Article No.
M12 sealing cap For protection of unused M12 connections with ET 200pro	3RX9802-0AA00	PROFIBUS FC standard cable GP 6XV1830-0EH10 Standard type with special design for quick mounting, 2-wire, shielded. Sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m.
M12 sealing caps with female thread 5 units	6ES7194-4JD60-0AA0	PROFIBUS FC trailing cable 6XV1830-3EH10 2-wire, shielded.
PROFIBUS M12 connecting cable Pre-assembled, with two 5-pin M12 plugs/sockets, up to 100 m, in various lengths:		PROFIBUS FC food cable 6XV1830-0GH10 2-wire, shielded. Sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m.
1.5 m	6XV1830-3DH15	PROFIBUS FC robust cable 6XV1830-0JH10 2-wire, shielded Sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m.
2.0 m	6XV1830-3DH20	PROFIBUS M12 connection plug 5-pin, B-coded, metal housing, 1 pack = 5 units. • Female contact insert
3.0 m	6XV1830-3DH30	6GK1905-0EB00
5.0 m	6XV1830-3DH50	
10 m	6XV1830-3DN10	
15 m	6XV1830-3DN15	
Other special lengths with 90° or 180° cable outlet	See under https://support.automation.siemens.com/WWW/view/en/26999294 .	
M12 bus termination connector for PROFIBUS, female contact insert	6GK1905-0ED00	
M12 bus termination connector for PROFIBUS, male contact insert	6GK1905-0EC00	
M12 plug connector, axial outlet, with male contact insert	6GK1905-0EA00	

Technical specifications

Article number	6ES7154-8AB01-0AB0 ET 200pro: IM 154-8 PN/DP CPU, 384KB
General information	
Product function	
• Isochronous mode	Yes; Via PROFIBUS DP or PROFINET interface
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated	384 kbyte
• expandable	No
Load memory	
• Plug-in (MMC), max.	8 Mbyte
CPU processing times	
for bit operations, typ.	0.05 µs
for word operations, typ.	0.09 µs
for fixed point arithmetic, typ.	0.12 µs
for floating point arithmetic, typ.	0.45 µs
Counters, timers and their retentivity	
S7 counter	
• Number	256
IEC counter	
• present	Yes
S7 times	
• Number	256
IEC timer	
• present	Yes

Article number	6ES7154-8AB01-0AB0 ET 200pro: IM 154-8 PN/DP CPU, 384KB
Data areas and their retentivity	
Flag	
• Size, max.	2 048 byte
Address area	
I/O address area	
• Inputs	2 048 byte
• Outputs	2 048 byte
Process image	
• Inputs, adjustable	2 048 byte
• Outputs, adjustable	2 048 byte
Time of day	
Clock	
• Hardware clock (real-time)	Yes
Operating hours counter	
• Number	1
Interfaces	
Interfaces/bus type	1x MPI/PROFIBUS DP, 1x PROFINET (3 ports)
1. Interface	
Interface type	Integrated RS 485 interface
Interface types	
• RS 485	Yes
Protocols	
• MPI	Yes
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• Point-to-point connection	No
PROFIBUS DP master	
• Number of DP slaves, max.	124

Distributed Controllers

based on ET 200pro
Standard CPUs

IM 154-8 PN/DP CPU

Technical specifications

Article number	6ES7154-8AB01-0AB0 ET 200pro: IM 154-8 PN/DP CPU, 384KB
2. Interface	
Interface type	PROFINET
Interface types	
• Number of ports	3
Protocols	
• MPI	No
• PROFINET IO Controller	Yes; Also simultaneously with IO-Device functionality
• PROFINET IO Device	Yes; Also simultaneously with IO Controller functionality
• PROFINET CBA	Yes
• PROFIBUS DP master	No
• PROFIBUS DP slave	No
PROFINET IO Controller	
Services	
- Number of connectable IO Devices, max.	128
- Of which IO devices with IRT, max.	64
- Number of IO Devices with IRT and the option "high flexibility"	128
- Number of connectable IO Devices for RT, max.	128
Protocols	
SIMATIC communication	
• S7 routing	Yes
Open IE communication	
• TCP/IP	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.	8
• ISO-on-TCP (RFC1006)	Yes
- Number of connections, max.	8
• UDP	Yes
- Number of connections, max.	8
Web server	
• supported	Yes

Article number	6ES7154-8AB01-0AB0 ET 200pro: IM 154-8 PN/DP CPU, 384KB
Communication functions	
PG/OP communication	Yes
Global data communication	
• supported	Yes
S7 basic communication	
• communication function / S7 basic communication	Yes
S7 communication	
• supported	Yes
Number of connections	
• overall	16
Degree and class of protection	
IP degree of protection	IP65/67
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- CFC	Yes
- GRAPH	Yes
- HiGraph®	Yes
Know-how protection	
• User program protection/password protection	Yes
• Block encryption	Yes; With S7 block Privacy
Dimensions	
Width	135 mm
Height	130 mm
Depth	65 mm; 60 mm without cover for RJ45 socket; 65 mm with cover for RJ45 socket
Weights	
Weight, approx.	720 g

7

Overview



- CPU 1513pro-2 PN for SIMATIC ET 200pro based on S7-1500 CPU 1513-1 PN
- For applications with medium requirements on the program scope and processing speed, for distributed setup via PROFINET IO.
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or non-Siemens PROFINET IO controller
- PROFINET shared I-Device for 4 controllers
- PROFINET IO RT/IRT interface with integrated 3-port switch
- Additional PROFINET IO RT interface with separate IP address
- Isochronous mode on PROFINET
- Integrated motion control functionalities for controlling speed-controlled and positioning axes, support for external encoders, output cams/cam tracks and probes
- OPC UA server and client (data access) as runtime option for the easy connection of SIMATIC ET 200pro to non-Siemens devices/systems
- Integrated web server with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data

Article No.

CPU 1513pro-2 PN	6ES7513-2PL00-0AB0
300 KB work memory for program, 1.5 MB for data, PROFINET IO IRT interface, PROFINET IO RT interface, SIMATIC Memory Card required	
Accessories	
SIMATIC Memory Card	
4 MB ¹⁾	6ES7954-8LC03-0AA0
12 MB ¹⁾	6ES7954-8LE03-0AA0
24 MB ¹⁾	6ES7954-8LF03-0AA0
256 MB ¹⁾	6ES7954-8LL03-0AA0
2 GB ¹⁾	6ES7954-8LP04-0AA0
32 GB ¹⁾	6ES7954-8LT03-0AA0
Connection module	6ES7194-4AP00-0AA0
CM CPU 2PN M12 / 7/8"; With 3 x M12 and 2 x 7/8", for connecting 2 x PROFINET	
Industrial Ethernet FC RJ45 plug 180	
RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet	
<ul style="list-style-type: none"> • 1 unit • 10 units • 50 units 	6GK1901-1BB10-2AA0 6GK1901-1BB10-2AB0 6GK1901-1BB10-2AE0
Industrial Ethernet FastConnect installation cables	
<ul style="list-style-type: none"> • FastConnect standard cable • FastConnect trailing cable • FastConnect marine cable 	6XV1840-2AH10 6XV1840-3AH10 6XV1840-4AH10
Industrial Ethernet FastConnect installation cables	
<ul style="list-style-type: none"> • IE FC TP trailing cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m. 	6XV1870-2D
<ul style="list-style-type: none"> • IE TP torsion cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m. 	6XV1870-2F
Industrial Ethernet FastConnect	
Stripping tool	6GK1901-1GA00

¹⁾ An MMC is essential for operating the CPU

Distributed Controllers

based on ET 200pro
Standard CPUs

CPU 1513pro-2 PN

Ordering data

IE connecting cable M12-180/M12-180

- Preassembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (D-coded), degree of protection IP65/IP67, in various lengths:

- 0.3 m
- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m
- 20 m
- 30 m
- 40 m
- 50 m

6XV1870-8AE30
6XV1870-8AE50
6XV1870-8AH10
6XV1870-8AH15
6XV1870-8AH20
6XV1870-8AH30
6XV1870-8AH50
6XV1870-8AN10
6XV1870-8AN15
6XV1870-8AN20
6XV1870-8AN30
6XV1870-8AN40
6XV1870-8AN50

- PROFINET M12 trailing connecting cable, preassembled at both ends with angled M12 plugs (male contact insert), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

3RK1902-2NB30
3RK1902-2NB50
3RK1902-2NC10

- PROFINET M12 trailing connecting cable, preassembled at one end with angled M12 plug (male contact insert at one end, other end open), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

3RK1902-2HB30
3RK1902-2HB50
3RK1902-2HC10

IE FC M12 plug PRO

PROFINET M12 plug connector, D-coded with fast connection system, axial cable outlet.

- 1 unit
- 8 units
- PROFINET M12 plug connector, D-coded, angled.

6GK1901-0DB20-6AA0
6GK1901-0DB20-6AA8
3RK1902-2DA00

IE panel feedthrough

Cabinet bushing for converting from the M12 connection system (D-coded, IP65/IP67) to the RJ45 connection system (IP20), 1 pack = 5 units.

6GK1901-0DM20-2AA5

7/8" connecting cable to power supply

- 5-wire, 5 x 1.5 mm², trailable, preassembled with two 7/8" connectors (axial cable outlet), 5-pin, up to 50 m, in various lengths:

- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m

6XV1822-5BH15
6XV1822-5BH20
6XV1822-5BH30
6XV1822-5BH50
6XV1822-5BN10
6XV1822-5BN15

See under
<http://support.automation.siemens.com/WWW/view/en/26999294>.

- Trailing power cable, 5 x 1.5 mm², preassembled at both ends with 7/8" angled plugs (female contact insert at one end, male contact insert at the other end), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

3RK1902-3NB30
3RK1902-3NB50
3RK1902-3NC10

- Trailing power cable, 5 x 1.5 mm², preassembled at one end with 7/8" angled plug with female contact insert (socket at one end, other end open), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

3RK1902-3GB30
3RK1902-3GB50
3RK1902-3GC10

Power cable

5-wire, 5 x 1.5 mm², trailing type, sold by the meter, minimum order quantity 20 m, maximum order quantity 1000 m.

6XV1830-8AH10

7/8" connection plug

For ET 200eco, with axial cable outlet

- With male contact insert, 5-pack
- With female contact insert, 5-pack
- Angled, with female contact insert, 1 unit
- Angled, with male contact insert, 1 unit

6GK1905-0FA00
6GK1905-0FB00
3RK1902-3DA00

3RK1902-3BA00

7/8" cover cap, 10 per pack

6ES7194-3JA00-0AA0

Twisted pair cables 4x2 with RJ45 plugs

0.5 m
1 m
2 m
6 m
10 m

6XV1870-3QE50
6XV1870-3QH10
6XV1870-3QH20
6XV1870-3QH60
6XV1870-3QN10

Crossed twisted pair cables 4x2 with RJ45 plugs

0.5 m
1 m
2 m
6 m
10 m

6XV1870-3RE50
6XV1870-3RH10
6XV1870-3RH20
6XV1870-3RH60
6XV1870-3RN10

M12 sealing cap

For protection of unused M12 connections with ET 200pro

3RX9802-0AA00

M12 sealing caps with female thread

5 units

6ES7194-4JD60-0AA0

Technical specifications

Article number	6ES7513-2PL00-0AB0 ET 200pro: CPU 1513pro-2 PN
General information	
Product type designation	CPU 1513pro-2 PN
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V16
Memory	
Work memory	
• integrated (for program)	300 kbyte
• integrated (for data)	1.5 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	40 ns
for word operations, typ.	48 ns
for fixed point arithmetic, typ.	64 ns
for floating point arithmetic, typ.	256 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Time of day	
Clock	
• Type	Hardware clock
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P3
• Number of ports	3; 2x M12 + 1x RJ45
• integrated switch	Yes
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0

Article number	6ES7513-2PL00-0AB0 ET 200pro: CPU 1513pro-2 PN
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFINergy	Yes
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-I, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	128
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFINergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes; per user program
2. Interface	
Interface types	
• RJ 45 (Ethernet)	No
• Number of ports	1; 1x M12
• integrated switch	No
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	No

Distributed Controllers

based on ET 200pro
Standard CPUs

CPU 1513pro-2 PN

Technical specifications

Article number	6ES7513-2PL00-0AB0 ET 200pro: CPU 1513pro-2 PN
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- Direct data exchange	No
- IRT	No
- PROFinergy	Yes
- Prioritized startup	No
- Number of connectable I/O Devices, max.	32; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable I/O Devices for RT, max.	32
- of which in line, max.	32
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	No
- PROFinergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes; per user program
Protocols	
Number of connections	
• Number of connections, max.	128; Via integrated interfaces of the CPU
Redundancy mode	
Media redundancy	
- MRP	Yes; as MRP redundancy manager and/or MRP client
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data access (read, write), method call, custom address space
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space; embedded 2017 UA server profile V1.02

Article number	6ES7513-2PL00-0AB0 ET 200pro: CPU 1513pro-2 PN
Supported technology objects	
Motion Control	Yes; Note: The number of axes affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	800
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C
• horizontal installation, max.	55 °C
• vertical installation, min.	-25 °C
• vertical installation, max.	55 °C
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	135 mm
Height	130 mm
Depth	65 mm
Weights	
Weight, approx.	614 g

Overview



- CPU 1516pro-2 PN for SIMATIC ET 200pro based on S7-1500 CPU 1516-3 PN/DP
- For applications with high requirements on the program scope and processing speed, for distributed setup via PROFINET IO
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or non-Siemens PROFINET IO controller
- PROFINET shared I-Device for 4 controllers
- PROFINET IO RT/IRT interface with integrated 3-port switch
- Additional PROFINET IO RT interface with separate IP address
- Isochronous mode on PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, output cams/cam tracks and probes
- OPC UA Server and Client (Data Access) as runtime option for the easy connection of SIMATIC ET 200pro to non-Siemens devices/systems
- Integrated web server with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU

Ordering data

Article No.

CPU 1516pro-2 PN **6ES7516-2PN00-0AB0**

1 MB work memory for program, 5 MB for data, PROFINET IO IRT interface, PROFINET IO RT interface; SIMATIC Memory Card required

Accessories**SIMATIC Memory Card**

4 MB¹⁾ **6ES7954-8LC03-0AA0**
 12 MB¹⁾ **6ES7954-8LE03-0AA0**
 24 MB¹⁾ **6ES7954-8LF03-0AA0**
 256 MB¹⁾ **6ES7954-8LL03-0AA0**
 2 GB¹⁾ **6ES7954-8LP04-0AA0**
 32 GB¹⁾ **6ES7954-8LT03-0AA0**

Connection module

6ES7194-4AP00-0AA0

CM CPU 2PN M12 / 7/8";
With 3 x M12 and 2 x 7/8", for connecting 2 x PROFINET

Industrial Ethernet FC RJ45 plug 180

RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet

- 1 unit
- 10 units
- 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

Industrial Ethernet FastConnect installation cables

- FastConnect standard cable
- FastConnect trailing cable
- FastConnect marine cable

6XV1840-2AH10
6XV1840-3AH10
6XV1840-4AH10

Industrial Ethernet FastConnect installation cables

- IE FC TP trailing cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m.
- IE TP torsion cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m.

6XV1870-2D
6XV1870-2F

Industrial Ethernet FastConnect

Stripping tool

6GK1901-1GA00

¹⁾ An MMC is essential for operating the CPU

Distributed Controllers

based on ET 200pro
Standard CPUs

CPU 1516pro-2 PN

Ordering data

Article No.

Article No.

IE connecting cable M12-180/M12-180

- Preassembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (4-pin, D-coded), degree of protection IP65/IP67, in various lengths:

- 0.3 m
- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m
- 20 m
- 30 m
- 40 m
- 50 m

6XV1870-8AE30
6XV1870-8AE50
6XV1870-8AH10
6XV1870-8AH15
6XV1870-8AH20
6XV1870-8AH30
6XV1870-8AH50
6XV1870-8AN10
6XV1870-8AN15
6XV1870-8AN20
6XV1870-8AN30
6XV1870-8AN40
6XV1870-8AN50

- PROFINET M12 trailing connecting cable, preassembled at both ends with angled M12 plugs (male contact insert), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

3RK1902-2NB30
3RK1902-2NB50
3RK1902-2NC10

- PROFINET M12 trailing connecting cable, preassembled at one end with angled M12 plug (male contact insert at one end, other end open), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

3RK1902-2HB30
3RK1902-2HB50
3RK1902-2HC10

IE FC M12 plug PRO

PROFINET M12 plug connector, D-coded with fast connection system, axial cable outlet.

- 1 unit
- 8 units
- PROFINET M12 plug connector, D-coded, angled.

6GK1901-0DB20-6AA0
6GK1901-0DB20-6AA8
3RK1902-2DA00

IE panel feedthrough

Cabinet bushing for converting from the M12 connection system (D-coded, IP65/IP67) to the RJ45 connection system (IP20), 1 pack = 5 units.

6GK1901-0DM20-2AA5

7/8" connecting cable to power supply

5-wire, 5 x 1.5 mm², trailable, preassembled with two 7/8" connectors (axial cable outlet), 5-pin, up to 50 m, in various lengths:

- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m
- Other special lengths with 90° or 180° cable outlet.

6XV1822-5BH15
6XV1822-5BH20
6XV1822-5BH30
6XV1822-5BH50
6XV1822-5BN10
6XV1822-5BN15
See under
<https://support.automation.siemens.com/WW/view/en/26999294>.

- Trailing power cable, 5 x 1.5 mm², preassembled at both ends with 7/8" angled plugs (female contact insert at one end, male contact insert at the other end), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

3RK1902-3NB30
3RK1902-3NB50
3RK1902-3NC10

- Trailing power cable, 5 x 1.5 mm², preassembled at one end with 7/8" angled plug with female contact insert (socket at one end, other end open), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

3RK1902-3GB30
3RK1902-3GB50
3RK1902-3GC10

Power cable

5-wire, 5 x 1.5 mm², trailing type, sold by the meter, minimum order quantity 20 m, maximum order quantity 1000 m.

6XV1830-8AH10

7/8" connection plug

For ET 200eco, with axial cable outlet

- With male contact insert, 5-pack
- With female contact insert, 5-pack
- Angled, with female contact insert, 1 unit
- Angled, with male contact insert, 1 unit

6GK1905-0FA00
6GK1905-0FB00
3RK1902-3DA00

3RK1902-3BA00

7/8" cover cap, 10 per pack

6ES7194-3JA00-0AA0

Twisted pair cables 4x2 with RJ45 plugs

0.5 m
1 m
2 m
6 m
10 m

6XV1870-3QE50
6XV1870-3QH10
6XV1870-3QH20
6XV1870-3QH60
6XV1870-3QN10

Crossed twisted pair cables 4x2 with RJ45 plugs

0.5 m
1 m
2 m
6 m
10 m

6XV1870-3RE50
6XV1870-3RH10
6XV1870-3RH20
6XV1870-3RH60
6XV1870-3RN10

M12 sealing cap

For protection of unused M12 connections with ET 200pro

3RX9802-0AA00

M12 sealing caps with female thread

5 units

6ES7194-4JD60-0AA0

Technical specifications

Article number	6ES7516-2PN00-0AB0 ET 200pro: CPU 1516PRO-2 PN
General information	
Product type designation	CPU 1516pro-2 PN
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V17 (FW V2.9) / V14 (FW V2.0) or higher
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated (for program)	1 Mbyte
• integrated (for data)	5 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	10 ns
for word operations, typ.	12 ns
for fixed point arithmetic, typ.	16 ns
for floating point arithmetic, typ.	64 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Time of day	
Clock	
• Type	Hardware clock
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P3
• Number of ports	3; 2x M12 + 1x RJ45
• integrated switch	Yes
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0

Article number	6ES7516-2PN00-0AB0 ET 200pro: CPU 1516PRO-2 PN
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFINergy	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFINergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program
2. Interface	
Interface types	
• RJ 45 (Ethernet)	No
• Number of ports	1; 1x M12
• integrated switch	No
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	No

Distributed Controllers

based on ET 200pro
Standard CPUs

CPU 1516pro-2 PN

Technical specifications

Article number	6ES7516-2PN00-0AB0 ET 200pro: CPU 1516PRO-2 PN
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- Direct data exchange	No
- IRT	No
- PROFinergy	Yes; per user program
- Prioritized startup	No
- Number of connectable IO Devices, max.	32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.	32
- of which in line, max.	32
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	No
- PROFinergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program
Protocols	
Number of connections	
• Number of connections, max.	128; Via integrated interfaces of the CPU
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via 1st interface (X1)
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space
• Alarms and Conditions	Yes

Article number	6ES7516-2PN00-0AB0 ET 200pro: CPU 1516PRO-2 PN
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	2 400
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C
• horizontal installation, max.	55 °C
• vertical installation, min.	-25 °C
• vertical installation, max.	55 °C
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	135 mm
Height	130 mm
Depth	65 mm
Weights	
Weight, approx.	614 g

Overview



- Interface module for SIMATIC ET 200pro with integrated fail-safe CPU
- CPU with PLC functionality equivalent to CPU S7-315F PN/DP; with distributed intelligence for preprocessing
- For constructing a fail-safe automation system for plants with increased safety requirements
- Complies with safety requirements up to SIL 3 according to IEC 61508, IEC 62061 and PL e according to ISO 13849.1:2006
- For high-performance control solutions in ET 200pro
- Increase in availability of systems and machines
- Integral web server with the option of creating user-defined web pages
- Isochronous mode on PROFIBUS or PROFINET
- PROFINET IO controller for up to 128 IO devices
- PROFINET interface with integrated 3-port switch
- With multiple communication options: PG/OP communication, PROFINET IO, PROFINET CBA, open IE communication (TCP, ISO-on-TCP and UDP), web server and S7-communication (with loadable FBs)
- Fast, simple and end-to-end programming of a system with modular programs via STEP 7
- Compact SIMATIC Micro Memory Card (MMC)

Note:

SIMATIC Micro Memory Card required for operation of CPU.

Ordering data

Article No.

IM 154-8 F PN/DP CPU interface module, V3.2

Fail-safe PROFINET IO controller for operating distributed I/O on PROFINET, with integrated PLC functionality.

- 512 KB work memory
- 1.5 MB work memory

6ES7154-8FB01-0AB0
6ES7154-8FX00-0AB0

S7 Distributed Safety V5.4 SP5 Update 2 programming toolTask:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used

Floating license for 1 user, software and documentation on DVD; license key on USB flash drive

6ES7833-1FC02-0YA5

Floating license for 1 user, software, documentation and license key for download¹⁾; Email address required for delivery

6ES7833-1FC02-0YH5

S7 Distributed Safety upgrade

From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive

6ES7833-1FC02-0YE5

STEP 7 Safety Advanced V19Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O

Requirement:

STEP 7 Professional V19

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user; license key on USB flash drive

6ES7833-1FA23-0YA5

Floating license for 1 user, license key for download¹⁾; Email address required for delivery

6ES7833-1FA23-0YH5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Distributed Controllers

based on ET 200pro

Fail-safe CPUs

IM 154-8 F PN/DP CPU

Ordering data	Article No.	Article No.
Accessories		
SIMATIC Micro Memory Cards		
MMC 64 KB ²⁾ For program backup.	6ES7953-8LF31-0AA0	
MMC 128 KB ²⁾ For program backup.	6ES7953-8LG31-0AA0	
MMC 512 KB ²⁾ For program backup.	6ES7953-8LJ31-0AA0	
MMC 2 MB ²⁾ For program backup and/or firmware updates.	6ES7953-8LL31-0AA0	
MMC 4 MB ²⁾ For program backup.	6ES7953-8LM32-0AA0	
MMC 8 MB ²⁾ For program backup.	6ES7953-8LP31-0AA0	
Connection module For CPU IM154-8 PN/DP, with 4 x M12 and 2 x 7/8", for connecting PROFINET and PROFIBUS DP.	6ES7194-4AN00-0AA0	
Industrial Ethernet FC RJ45 plug 90 RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 90° cable outlet. • 1 unit • 10 units	6GK1901-1BB20-2AA0 6GK1901-1BB20-2AB0	
Industrial Ethernet FC RJ45 plug 180 RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet • 1 unit • 10 units • 50 units	6GK1901-1BB10-2AA0 6GK1901-1BB10-2AB0 6GK1901-1BB10-2AE0	
Industrial Ethernet FastConnect installation cables • FastConnect standard cable • FastConnect trailing cable • FastConnect marine cable	6XV1840-2AH10 6XV1840-3AH10 6XV1840-4AH10	
		Industrial Ethernet FastConnect installation cables • IE FC TP trailing cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m. 6XV1870-2D • IE TP torsion cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m. 6XV1870-2F
		Industrial Ethernet FastConnect Stripping tool 6GK1901-1GA00
		IE connecting cable M12-180/M12-180 • Pre-assembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (D-coded), degree of protection IP65/IP67, in various lengths: - 0.3 m - 0.5 m - 1.0 m - 15 m - 2.0 m - 3.0 m - 5.0 m - 10 m - 15 m - 20 m - 30 m - 40 m - 50 m • PROFINET M12 trailing connecting cable, pre-assembled at both ends with angled M12 plugs (male contact insert), in various lengths: - 3.0 m - 5.0 m - 10 m • PROFINET M12 trailing connecting cable, pre-assembled at one end with angled M12 plug (male contact insert at one end, other end open), in various lengths: - 3.0 m - 5.0 m - 10 m 6XV1870-8AE30 6XV1870-8AE50 6XV1870-8AH10 6XV1870-8AH15 6XV1870-8AH20 6XV1870-8AH30 6XV1870-8AH50 6XV1870-8AN10 6XV1870-8AN15 6XV1870-8AN20 6XV1870-8AN30 6XV1870-8AN40 6XV1870-8AN50 3RK1902-2NB30 3RK1902-2NB50 3RK1902-2NC10 3RK1902-2HB30 3RK1902-2HB50 3RK1902-2HC10
		IE FC M12 plug PRO PROFINET M12 plug connector, D-coded with fast connection system, axial cable outlet. • 1 unit • 8 units • PROFINET M12 plug connector, D-coded, angled 6GK1901-0DB20-6AA0 6GK1901-0DB20-6AA8 3RK1902-2DA00
		IE panel feedthrough Cabinet bushing for converting from the M12 connection system (D-coded, IP65/IP67) to the RJ45 connection system (IP20), 1 pack = 5 units 6GK1901-0DM20-2AA5

²⁾ An MMC is essential for operating the CPU

Ordering data	Article No.	Article No.
7/8" connecting cable to power supply <ul style="list-style-type: none"> 5-wire, 5 x 1.5 mm², trailable, pre-assembled with two 7/8" connectors (axial cable outlet), 5-pin, up to 50 m, in various lengths: <ul style="list-style-type: none"> - 1.5 m - 2.0 m - 3.0 m - 5.0 m - 10 m - 15 m Other special lengths with 90° or 180° cable outlet 	6XV1822-5BH15 6XV1822-5BH20 6XV1822-5BH30 6XV1822-5BH50 6XV1822-5BN10 6XV1822-5BN15 See under http://support.automation.siemens.com/WW/view/en/26999294 .	M12 sealing cap For protection of unused M12 connections with ET 200pro
<ul style="list-style-type: none"> Trailing power cable, 5 x 1.5 mm², pre-assembled at both ends with 7/8" angled plugs (female contact insert at one end, male contact insert at the other end), in various lengths: <ul style="list-style-type: none"> - 3.0 m - 5.0 m - 10 m Trailing power cable, 5 x 1.5 mm², pre-assembled at one end with 7/8" angled plug with female contact insert (socket at one end, other end open), in various lengths: <ul style="list-style-type: none"> - 3.0 m - 5.0 m - 10 m 	3RK1902-3NB30 3RK1902-3NB50 3RK1902-3NC10	M12 sealing caps with female thread 5 units
Power line 5-wire, 5 x 1.5 mm ² , trailing type, sold by the meter, minimum order quantity 20 m, maximum order quantity 1000 m.	6XV1830-8AH10	PROFIBUS M12 connecting cable Pre-assembled, with two 5-pin M12 plugs/sockets, up to 100 m, in various lengths: <ul style="list-style-type: none"> 1.5 m 2.0 m 3.0 m 5.0 m 10 m 15 m Other special lengths with 90° or 180° cable outlet
7/8" connection plug For ET 200eco, with axial cable outlet <ul style="list-style-type: none"> • With male contact insert, 5-pack • With female contact insert, 5-pack • Angled, with female contact insert, 1 unit • Angled, with male contact insert, 1 unit 	6GK1905-0FA00 6GK1905-0FB00 3RK1902-3DA00 3RK1902-3BA00	M12 bus termination connector for PROFIBUS, female contact insert 6GK1905-0ED00
7/8" cover cap, 10 per pack	6ES7194-3JA00-0AA0	M12 bus termination connector for PROFIBUS, male contact insert 6GK1905-0EC00
Twisted pair cables 4x2 with RJ45 plugs 0.5 m 1 m 2 m 6 m 10 m	6XV1870-3QE50 6XV1870-3QH10 6XV1870-3QH20 6XV1870-3QH60 6XV1870-3QN10	M12 plug connector, axial outlet, with male contact insert 6GK1905-0EA00
Crossed twisted pair cables 4x2 with RJ45 plugs 0.5 m 1 m 2 m 6 m 10 m	6XV1870-3RE50 6XV1870-3RH10 6XV1870-3RH20 6XV1870-3RH60 6XV1870-3RN10	PROFIBUS FC standard cable GP Standard type with special design for quick mounting, 2-wire, shielded. Sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m.
		PROFIBUS FC trailing cable 2-wire, shielded.
		PROFIBUS FC food cable 2-wire, shielded. Sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m.
		PROFIBUS FC robust cable 2-wire, shielded. Sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m.
		PROFIBUS M12 connection plug 5-pin, B-coded, metal enclosure, 1 pack = 5 units. <ul style="list-style-type: none"> • Female contact insert
		6GK1905-0EB00

Distributed Controllers

based on ET 200pro

Fail-safe CPUs

IM 154-8 F PN/DP CPU

Technical specifications

Article number	6ES7154-8FB01-0AB0 ET 200pro: IM 154-8F PN/DP CPU, 512KB	6ES7154-8FX00-0AB0 ET 200pro: IM 154-8FX PN/DP CPU, 1,5MB
General information		
Product function		
• Isochronous mode	Yes; Via PROFIBUS DP or PROFINET interface	Yes; Via PROFIBUS DP or PROFINET interface
Supply voltage		
Rated value (DC)	24 V	24 V
Memory		
Work memory		
• integrated	512 kbyte	1 536 kbyte
• expandable	No	No
Load memory		
• Plug-in (MMC), max.	8 Mbyte	8 Mbyte
CPU processing times		
for bit operations, typ.	0.05 µs	0.025 µs
for word operations, typ.	0.09 µs	0.03 µs
for fixed point arithmetic, typ.	0.12 µs	0.04 µs
for floating point arithmetic, typ.	0.45 µs	0.16 µs
Counters, timers and their retentivity		
S7 counter		
• Number	256	256
IEC counter		
• present	Yes	Yes
S7 times		
• Number	256	256
IEC timer		
• present	Yes	Yes
Data areas and their retentivity		
Flag		
• Size, max.	2 048 byte	2 048 byte
Address area		
I/O address area		
• Inputs	2 048 byte	2 048 byte
• Outputs	2 048 byte	2 048 byte
Process image		
• Inputs, adjustable	2 048 byte	2 048 byte
• Outputs, adjustable	2 048 byte	2 048 byte
Time of day		
Clock		
• Hardware clock (real-time)	Yes	Yes
Operating hours counter		
• Number	1	1
1. Interface		
Interface type	Integrated RS 485 interface	Integrated RS 485 interface
Interface types		
• RS 485	Yes	Yes
Protocols		
• MPI	Yes	Yes
• PROFIBUS DP master	Yes	Yes
• PROFIBUS DP slave	Yes	Yes
• Point-to-point connection	No	No
PROFIBUS DP master		
• Number of DP slaves, max.	124	124
2. Interface		
Interface type	PROFINET	PROFINET
Interface types		
• Number of ports	3	3

Technical specifications

Article number	6ES7154-8FB01-0AB0 ET 200pro: IM 154-8F PN/DP CPU, 512KB	6ES7154-8FX00-0AB0 ET 200pro: IM 154-8FX PN/DP CPU, 1,5MB
Protocols		
• MPI	No	No
• PROFINET IO Controller	Yes; Also simultaneously with IO-Device functionality	Yes; Also simultaneously with IO-Device functionality
• PROFINET IO Device	Yes; Also simultaneously with IO Controller functionality	Yes; Also simultaneously with IO Controller functionality
• PROFINET CBA	Yes	Yes
• PROFIBUS DP master	No	No
• PROFIBUS DP slave	No	No
PROFINET IO Controller		
Services		
- Number of connectable IO Devices, max.	128	128
- Of which IO devices with IRT, max.	64	64
- Number of IO Devices with IRT and the option "high flexibility"	128	128
- Number of connectable IO Devices for RT, max.	128	128
Protocols		
SIMATIC communication		
• S7 routing	Yes	Yes
Open IE communication		
• TCP/IP	Yes; via integrated PROFINET interface and loadable FBs	Yes; via integrated PROFINET interface and loadable FBs
- Number of connections, max.	8	8
• ISO-on-TCP (RFC1006)	Yes	Yes
- Number of connections, max.	8	8
• UDP	Yes	Yes
- Number of connections, max.	8	8
Web server		
• supported	Yes	Yes
Communication functions		
PG/OP communication	Yes	Yes
Global data communication		
• supported	Yes	Yes
S7 basic communication		
• communication function / S7 basic communication	Yes	Yes
S7 communication		
• supported	Yes	Yes
Number of connections		
• overall	16	16
Degree and class of protection		
IP degree of protection	IP65/67	IP65/67
Configuration		
Configuration / programming		
Programming language		
- LAD	Yes	Yes
- FBD	Yes	Yes
- STL	Yes	Yes
- SCL	Yes	Yes
- CFC	Yes	Yes
- GRAPH	Yes	Yes
- HiGraph®	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Block encryption	Yes; With S7 block Privacy	Yes; With S7 block Privacy
Dimensions		
Width	135 mm	135 mm
Height	130 mm	130 mm
Depth	65 mm; 60 mm without cover for RJ45 socket; 65 mm with cover for RJ45 socket	65 mm; 60 mm without cover for RJ45 socket; 65 mm with cover for RJ45 socket
Weights		
Weight, approx.	720 g	720 g

Distributed Controllers

based on ET 200pro
Fail-safe CPUs

CPU 1513pro F-2 PN

Overview



- Fail-safe CPU 1513pro F-2 PN for SIMATIC ET 200pro based on S7-1500 CPU 1513F-1 PN
- For applications with medium requirements on the program scope and processing speed, for distributed setup via PROFINET IO.
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PLe according to ISO 13849
- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or non-Siemens PROFINET IO controller
- PROFIsafe in centralized and distributed configurations
- PROFINET shared I-Device for 4 controllers
- PROFINET IO RT/IRT interface with integrated 3-port switch
- Additional PROFINET IO RT interface with separate IP address
- Isochronous mode on PROFINET
- Integrated motion control functionalities for controlling speed-controlled and positioning axes, support for external encoders
- OPC UA server and client (data access) as runtime option for the easy connection of SIMATIC ET 200pro to non-Siemens devices/systems
- Integrated web server with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data

Article No.

CPU 1513pro F-2 PN **6ES7513-2GL00-0AB0**

450 KB work memory for program, 1.5 MB for data, PROFINET IO IRT interface, PROFINET IO RT interface, SIMATIC Memory Card required

Accessories

SIMATIC Memory Card

4 MB¹⁾ **6ES7954-8LC03-0AA0**
 12 MB¹⁾ **6ES7954-8LE03-0AA0**
 24 MB¹⁾ **6ES7954-8LF03-0AA0**
 256 MB¹⁾ **6ES7954-8LL03-0AA0**
 2 GB¹⁾ **6ES7954-8LP04-0AA0**
 32 GB¹⁾ **6ES7954-8LT03-0AA0**

Connection module

CM CPU 2PN M12 / 7/8";
 With 3 x M12 and 2 x 7/8", for connecting 2 x PROFINET

Industrial Ethernet FC RJ45 plug 180

RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet

- 1 unit
- 10 units
- 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

Industrial Ethernet FastConnect installation cables

- FastConnect standard cable
- FastConnect trailing cable
- FastConnect marine cable

6XV1840-2AH10
6XV1840-3AH10
6XV1840-4AH10

Industrial Ethernet FastConnect installation cables

- **IE FC TP trailing cable GP 2 x 2;** sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m.
- **IE TP torsion cable GP 2 x 2;** sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m.

6XV1870-2D
6XV1870-2F

Industrial Ethernet FastConnect

Stripping tool

6GK1901-1GA00

¹⁾ An MMC is essential for operating the CPU

Ordering data	Article No.	Article No.
IE connecting cable M12-180/M12-180 Preassembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (4-pin, D-coded), degree of protection IP65/IP67, in various lengths: <ul style="list-style-type: none"> • 0.3 m • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m • 20 m • 30 m • 40 m • 50 m PROFINET M12 trailing connecting cable, preassembled at both ends with angled M12 plugs (male contact insert), in various lengths: <ul style="list-style-type: none"> • 3.0 m • 5.0 m • 10 m PROFINET M12 trailing connecting cable, preassembled at one end with angled M12 plug (male contact insert at one end, other end open), in various lengths: <ul style="list-style-type: none"> • 3.0 m • 5.0 m • 10 m 	6XV1870-8AE30 6XV1870-8AE50 6XV1870-8AH10 6XV1870-8AH15 6XV1870-8AH20 6XV1870-8AH30 6XV1870-8AH50 6XV1870-8AN10 6XV1870-8AN15 6XV1870-8AN20 6XV1870-8AN30 6XV1870-8AN40 6XV1870-8AN50 3RK1902-2NB30 3RK1902-2NB50 3RK1902-2NC10 3RK1902-2HB30 3RK1902-2HB50 3RK1902-2HC10	Trailing power cable, 5 x 1.5 mm ² , preassembled at both ends with 7/8" angled plugs (female contact insert at one end, male contact insert at the other end), in various lengths: <ul style="list-style-type: none"> • 3.0 m • 5.0 m • 10 m 3RK1902-3NB30 3RK1902-3NB50 3RK1902-3NC10 Trailing power cable, 5 x 1.5 mm ² , preassembled at one end with 7/8" angled plug with female contact insert (socket at one end, other end open), in various lengths: <ul style="list-style-type: none"> • 3.0 m • 5.0 m • 10 m 3RK1902-3GB30 3RK1902-3GB50 3RK1902-3GC10 Power cable 6XV1830-8AH10 5-wire, 5 x 1.5 mm ² , trailing type, sold by the meter, minimum order quantity 20 m, maximum order quantity 1000 m. 7/8" connection plug For ET 200eco, with axial cable outlet <ul style="list-style-type: none"> • With male contact insert, 5-pack • With female contact insert, 5-pack • Angled, with female contact insert, 1 unit • Angled, with male contact insert, 1 unit 6GK1905-0FA00 6GK1905-0FB00 3RK1902-3DA00 3RK1902-3BA00 7/8" cover cap, 10 per pack 6ES7194-3JA00-0AA0 Twisted pair cables 4x2 with RJ45 plugs 0.5 m 6XV1870-3QE50 1 m 6XV1870-3QH10 2 m 6XV1870-3QH20 6 m 6XV1870-3QH60 10 m 6XV1870-3QN10 Crossed twisted pair cables 4x2 with RJ45 plugs 0.5 m 6XV1870-3RE50 1 m 6XV1870-3RH10 2 m 6XV1870-3RH20 6 m 6XV1870-3RH60 10 m 6XV1870-3RN10 M12 sealing cap 3RX9802-0AA00 For protection of unused M12 connections with ET 200pro M12 sealing caps with female thread 6ES7194-4JD60-0AA0 5 units
IE FC M12 plug PRO PROFINET M12 plug connector, D-coded with fast connection system, axial cable outlet. <ul style="list-style-type: none"> • 1 unit • 8 units • PROFINET M12 plug connector, D-coded, angled. 	6GK1901-0DB20-6AA0 6GK1901-0DB20-6AA8 3RK1902-2DA00	
IE panel feedthrough Cabinet bushing for converting from the M12 connection system (D-coded, IP65/IP67) to the RJ45 connection system (IP20), 1 pack = 5 units.	6GK1901-0DM20-2AA5	
7/8" connecting cable to power supply 5-wire, 5 x 1.5 mm ² , trailable, preassembled with two 7/8" connectors (axial cable outlet), 5-pin, up to 50 m, in various lengths: <ul style="list-style-type: none"> • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m • Other special lengths with 90° or 180° cable outlet. 	6XV1822-5BH15 6XV1822-5BH20 6XV1822-5BH30 6XV1822-5BH50 6XV1822-5BN10 6XV1822-5BN15 See under http://support.automation.siemens.com/WWW/view/en/26999294 .	

Distributed Controllers

based on ET 200pro
Fail-safe CPUs

CPU 1513pro F-2 PN

Technical specifications

Article number	6ES7513-2GL00-0AB0 ET 200pro: CPU 1513pro F-2 PN
General information	
Product type designation	CPU 1513pro F-2 PN
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V16
Memory	
Work memory	
• integrated (for program)	450 kbyte
• integrated (for data)	1.5 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte
CPU processing times	
for bit operations, typ.	40 ns
for word operations, typ.	48 ns
for fixed point arithmetic, typ.	64 ns
for floating point arithmetic, typ.	256 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P3
• Number of ports	3; 2x M12 + 1x RJ45
• integrated switch	Yes
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0

Article number	6ES7513-2GL00-0AB0 ET 200pro: CPU 1513pro F-2 PN
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFINergy	Yes
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	128; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	128
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFINergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes; per user program
2. Interface	
Interface types	
• RJ 45 (Ethernet)	No
• Number of ports	1; 1x M12
• integrated switch	No
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	No

Technical specifications

Article number	6ES7513-2GL00-0AB0 ET 200pro: CPU 1513pro F-2 PN
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- Direct data exchange	No
- IRT	No
- PROFlenergy	Yes
- Prioritized startup	No
- Number of connectable IO Devices, max.	32; In total, up to 512 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.	32
- of which in line, max.	32
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	No
- PROFlenergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes; per user program
Protocols	
Number of connections	
• Number of connections, max.	128; Via integrated interfaces of the CPU
Redundancy mode	
Media redundancy	
- MRP	Yes; as MRP redundancy manager and/or MRP client
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space
Supported technology objects	
Motion Control	Yes; Note: The number of axes affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER

Article number	6ES7513-2GL00-0AB0 ET 200pro: CPU 1513pro F-2 PN
• Number of available Motion Control resources for technology objects	800
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C
• horizontal installation, max.	55 °C
• vertical installation, min.	-25 °C
• vertical installation, max.	55 °C
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	135 mm
Height	130 mm
Depth	65 mm
Weights	
Weight, approx.	614 g

Distributed Controllers

based on ET 200pro
Fail-safe CPUs

CPU 1516pro F-2 PN

Overview



- Fail-safe CPU 1516pro F-2 PN for SIMATIC ET 200pro based on S7-1500 CPU 1516F-3 PN/DP
- For applications with high requirements on the program scope and processing speed, for distributed setup via PROFINET IO
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PLe according to ISO 13849

- PROFINET IO controller for operating distributed I/O on PROFINET
- PROFINET I-Device for connecting the CPU as an intelligent PROFINET device with a SIMATIC or non-Siemens PROFINET IO controller
- Supports PROFIsafe in centralized and distributed configurations
- PROFINET shared I-Device for 4 controllers
- PROFINET IO RT/IRT interface with integrated 3-port switch
- Additional PROFINET IO RT interface with separate IP address
- Isochronous mode on PROFINET
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders
- OPC UA Server and Client (Data Access) as runtime option for the easy connection of SIMATIC ET 200pro to non-Siemens devices/systems
- Integrated web server with the option of creating user-defined web pages

Note:

SIMATIC Memory Card required for operation of the CPU.

Ordering data

CPU 1516pro F-2 PN

1.5 MB work memory for program, 5 MB for data, PROFINET IO IRT interface, PROFINET IO RT interface; SIMATIC Memory Card required

Accessories

SIMATIC Memory Card

4 MB¹⁾

12 MB¹⁾

24 MB¹⁾

256 MB¹⁾

2 GB¹⁾

32 GB¹⁾

Connection module

CM CPU 2PN M12 / 7/8";

With 3 x M12 and 2 x 7/8", for connecting 2 x PROFINET

Industrial Ethernet FC RJ45 plug 180

RJ45 connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet

- 1 unit
- 10 units
- 50 units

Industrial Ethernet FastConnect installation cables

- FastConnect standard cable
- FastConnect trailing cable
- FastConnect marine cable

Article No.

6ES7516-2GN00-0AB0

6ES7954-8LC03-0AA0

6ES7954-8LE03-0AA0

6ES7954-8LF03-0AA0

6ES7954-8LL03-0AA0

6ES7954-8LP04-0AA0

6ES7954-8LT03-0AA0

6ES7194-4AP00-0AA0

6GK1901-1BB10-2AA0

6GK1901-1BB10-2AB0

6GK1901-1BB10-2AE0

6XV1840-2AH10

6XV1840-3AH10

6XV1840-4AH10

Article No.

Industrial Ethernet FastConnect installation cables

- IE FC TP trailing cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m.

6XV1870-2D

- IE TP torsion cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m.

6XV1870-2F

Industrial Ethernet FastConnect

Stripping tool

6GK1901-1GA00

IE connecting cable M12-180/M12-180

Preassembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (4-pin, D-coded), degree of protection IP65/IP67, in various lengths:

- 0.3 m
- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m
- 20 m
- 30 m
- 40 m
- 50 m

6XV1870-8AE30

6XV1870-8AE50

6XV1870-8AH10

6XV1870-8AH15

6XV1870-8AH20

6XV1870-8AH30

6XV1870-8AH50

6XV1870-8AN10

6XV1870-8AN15

6XV1870-8AN20

6XV1870-8AN30

6XV1870-8AN40

6XV1870-8AN50

PROFINET M12 trailing connecting cable, preassembled at both ends with angled M12 plugs (male contact insert), in various lengths:

- 3.0 m
- 5.0 m
- 10 m

3RK1902-2NB30

3RK1902-2NB50

3RK1902-2NC10

¹⁾ An MMC is essential for operating the CPU

Ordering data	Article No.	Article No.
PROFINET M12 trailing connecting cable, preassembled at one end with angled M12 plug (male contact insert at one end, other end open), in various lengths: <ul style="list-style-type: none"> • 3.0 m • 5.0 m • 10 m 	3RK1902-2HB30 3RK1902-2HB50 3RK1902-2HC10	Trailing power cable, 5 x 1.5 mm ² , preassembled at one end with 7/8" angled plug with female contact insert (socket at one end, other end open), in various lengths: <ul style="list-style-type: none"> • 3.0 m • 5.0 m • 10 m
IE FC M12 plug PRO PROFINET M12 plug connector, D-coded with fast connection system, axial cable outlet. <ul style="list-style-type: none"> • 1 unit • 8 units PROFINET M12 plug connector, D-coded, angled.	6GK1901-0DB20-6AA0 6GK1901-0DB20-6AA8 3RK1902-2DA00	Power cable 5-wire, 5 x 1.5 mm ² , trailing type, sold by the meter, minimum order quantity 20 m, maximum order quantity 1000 m.
IE panel feedthrough Cabinet bushing for converting from the M12 connection system (D-coded, IP65/IP67) to the RJ45 connection system (IP20), 1 pack = 5 units.	6GK1901-0DM20-2AA5	7/8" connection plug For ET 200eco, with axial cable outlet <ul style="list-style-type: none"> • With male contact insert, 5-pack • With female contact insert, 5-pack • Angled, with female contact insert, 1 unit • Angled, with male contact insert, 1 unit
7/8" connecting cable to power supply 5-wire, 5 x 1.5 mm ² , trailable, preassembled with two 7/8" connectors (axial cable outlet), 5-pin, up to 50 m, in various lengths: <ul style="list-style-type: none"> • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m • Other special lengths with 90° or 180° cable outlet. Trailing power cable, 5 x 1.5 mm ² , preassembled at both ends with 7/8" angled plugs (female contact insert at one end, male contact insert at the other end), in various lengths: <ul style="list-style-type: none"> • 3.0 m • 5.0 m • 10 m 	6XV1822-5BH15 6XV1822-5BH20 6XV1822-5BH30 6XV1822-5BH50 6XV1822-5BN10 6XV1822-5BN15 See under http://support.automation.siemens.com/WWW/view/en/26999294 .	7/8" cover cap , 10 per pack Twisted pair cables 4x2 with RJ45 plugs 0.5 m 1 m 2 m 6 m 10 m Crossed twisted pair cables 4x2 with RJ45 plugs 0.5 m 1 m 2 m 6 m 10 m M12 sealing cap For protection of unused M12 connections with ET 200pro M12 sealing caps with female thread 5 units
	3RK1902-3NB30 3RK1902-3NB50 3RK1902-3NC10	6XV1830-8AH10 6GK1905-0FA00 6GK1905-0FB00 3RK1902-3DA00 3RK1902-3BA00 6ES7194-3JA00-0AA0 6XV1870-3QE50 6XV1870-3QH10 6XV1870-3QH20 6XV1870-3QH60 6XV1870-3QN10 6XV1870-3RE50 6XV1870-3RH10 6XV1870-3RH20 6XV1870-3RH60 6XV1870-3RN10 3RX9802-0AA00 6ES7194-4JD60-0AA0

Technical specifications

Article number	6ES7516-2GN00-0AB0
	ET 200pro: CPU 1516PRO F-2 PN
General information	
Product type designation	CPU 1516pro F-2 PN
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V17 (FW V2.9) / V14 (FW V2.0) or higher
Supply voltage	
Rated value (DC)	24 V
Memory	
Work memory	
• integrated (for program)	1.5 Mbyte
• integrated (for data)	5 Mbyte
Load memory	
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte

Article number	6ES7516-2GN00-0AB0
	ET 200pro: CPU 1516PRO F-2 PN
CPU processing times	
for bit operations, typ.	10 ns
for word operations, typ.	12 ns
for fixed point arithmetic, typ.	16 ns
for floating point arithmetic, typ.	64 ns
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048

Distributed Controllers

based on ET 200pro
Fail-safe CPUs

CPU 1516pro F-2 PN

Technical specifications

Article number	6ES7516-2GN00-0AB0 ET 200pro: CPU 1516PRO F-2 PN
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image
Time of day	
Clock	
• Type	Hardware clock
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; X1 P3
• Number of ports	3; 2x M12 + 1x RJ45
• integrated switch	Yes
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- IRT	Yes
- PROFlenergy	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices
- Number of connectable I/O Devices, max.	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data

Article number	6ES7516-2GN00-0AB0 ET 200pro: CPU 1516PRO F-2 PN
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFlenergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program
2. Interface	
Interface types	
• RJ 45 (Ethernet)	No
• Number of ports	1; 1x M12
• integrated switch	No
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	No
PROFINET IO Controller	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- Direct data exchange	No
- IRT	No
- PROFlenergy	Yes; per user program
- Prioritized startup	No
- Number of connectable IO Devices, max.	32; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.	32
- of which in line, max.	32
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data

Technical specifications

Article number	6ES7516-2GN00-0AB0 ET 200pro: CPU 1516PRO F-2 PN
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	No
- PROFlenergy	Yes; per user program
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- activation/deactivation of I-devices	Yes; per user program
- Asset management record	Yes; per user program
Protocols	
Number of connections	
• Number of connections, max.	128; Via integrated interfaces of the CPU
Redundancy mode	
Media redundancy	
- Media redundancy	Yes; only via 1st interface (X1)
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space
• Alarms and Conditions	Yes
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	800
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Article number	6ES7516-2GN00-0AB0 ET 200pro: CPU 1516PRO F-2 PN
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C
• horizontal installation, max.	55 °C
• vertical installation, min.	-25 °C
• vertical installation, max.	55 °C
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
Dimensions	
Width	135 mm
Height	130 mm
Depth	65 mm
Weights	
Weight, approx.	614 g

Distributed Controllers

Notes

7

**8/2****SIMATIC S7-1500 Software Controllers**

8/2

Standard CPUs

8/2

CPU 1507S Windows

8/9

CPU 1507S Linux

8/13

CPU 1508S Windows

8/19

CPU 1508S Linux

8/23

Fail-safe CPUs

8/23

CPU 1507S F Windows

8/30

CPU 1507S F Linux

8/35

CPU 1508S F Windows

8/42

CPU 1508S F Linux

8/47

Technology CPUs

8/47

CPU 1508S T

8/51

CPU 1508S TF

8/55

Add-on applications

8/55

ODK 1500S SQL driver

8/55

ODK 1500S XML Data Access driver

8/56

ODK 1500S FileServer

8/56

ODK 1500S SMX driver

8/56


ODK 1500S serial driver

Software Controllers

SIMATIC S7-1500 Software Controllers Standard CPUs

CPU 1507S Windows

Overview

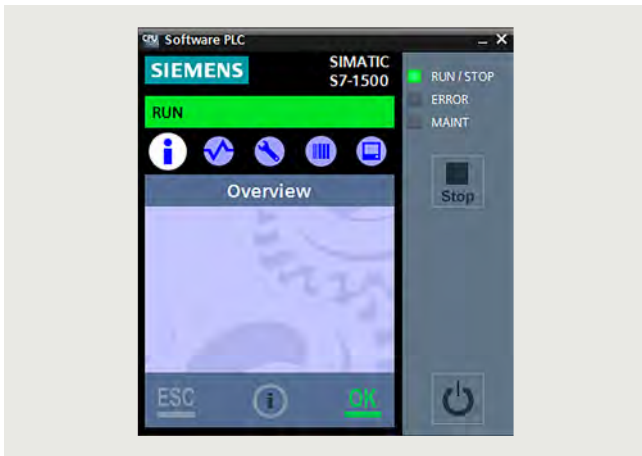

- SIMATIC S7-1500 Software Controller with Windows for implementing the functions of a SIMATIC S7-1500 Controller on a SIMATIC IPC
- For use as a PC-based controller in machines with distributed I/O via PROFINET
- For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET connections
- Execution of functions and algorithms implemented with high-level languages under Windows (C/C++, C#, VB) and locally in the CPU 1507S (C/C++)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes (motion control functionalities require PROFINET IRT capability via CP 1625 and a PCIe slot on the IPC)
- Integrated web server for diagnostics with the option of creating user-defined web pages
- OPC UA server (data access) and client as Runtime option for easy connection of the SIMATIC S7-1500 Software Controller to Windows applications or non-Siemens devices/systems

New in version V30.1

- Optimized for PC-based control tasks with the IPC BX-39A Microbox PC and the IPC PX-39A (Pro) Panel PC
- Support for the current IPC generation SIMATIC IPC227G and IPC277G (Pro)
- Can also be used on the IPC427E and IPC627E Box PCs, the IPC477E (Pro) and IPC677E Panel PCs, and the IPC647E and IPC847E Rack PCs
- Support of UEFI boot and M.2 SSD on all IPC platforms
- Improved commissioning:
The resource allocation for the SIMATIC S7-1500 Software Controller, e.g. the interfaces used for PROFINET, is now set using a separate tool and no longer with the two-stage download from STEP 7. This permits a flexible choice of IPC without modifying the STEP 7 project
- Communication between Windows applications and the SIMATIC S7-1500 Software Controller is achieved via pure TCP/IP links. Communication with the SIMATIC S7-1500 Software Controller is possible directly through the PC interfaces on the Windows side ("bridging")
- No direct support from PROFIBUS, PROFIBUS support is only possible with an additional plug-in card.
- In order to use the SIMATIC S7-1500 Software Controller V30.1 instead of a previous version (e.g. V21.9), changes in configuration and installation are required.

Ordering data

Article No.

Article No.

SIMATIC S7-1500 Software Controller CPU 1507S

For implementing the function of an S7-1500 Controller on SIMATIC IPCs

Target system:

Optimized for PC-based control tasks with IPC BX-39A Microbox PC and IPC PX-39A (Pro) Panel PC; Can also be used with IPC277G (Pro) Panel PC, IPC477E (Pro) Panel PC, IPC677E Panel PC, IPC227G Box PC, IPC427E Box PC, IPC627E Box PC, IPC647E Rack PC, IPC847E Rack PC

Requirement:

Windows 10 (64-bit) with UEFI boot; for supported Windows 10 version, see Technical specifications

Type of delivery:

en, de, fr, es, it, zh

- Version V30.1 for Windows; Single license for one installation Software on DVD, license key on USB flash drive
- Version V30.1 for Windows; Single license for one installation; Software download including license key ¹⁾
- Version V30.1 for Windows; Upgrade license for one installation; For upgrading existing installations with CPU 1507S Version 2; Software download including license key ¹⁾
- Version V21.9; Single license for one installation; Software on DVD, license key on USB flash drive
- Version V21.9; Single license for one installation; Software download including license key ¹⁾

6ES7672-7AC02-0YA0

6ES7672-7AC02-0YG0

6ES7672-7AC02-0YK0

6ES7672-7AC01-0YA0

6ES7672-7AC01-0YG0

Ordering data	Article No.	Article No.
Accessories		
SIMATIC IPC		
<ul style="list-style-type: none"> SIMATIC IPC BX-39A Microbox PC SIMATIC IPC PX-39A Panel PC SIMATIC IPC PX-39A Pro Panel PC SIMATIC IPC227G Nanobox PC SIMATIC IPC277G Panel PC SIMATIC IPC277G Pro Panel PC SIMATIC IPC427E Microbox PC SIMATIC IPC477E Panel PC SIMATIC IPC477E Pro Panel PC SIMATIC IPC627E Box PC SIMATIC IPC677E Panel PC SIMATIC IPC647E Rack PC SIMATIC IPC847E Rack PC 	6AG4142-.....-.... 6AV7242-.....-.... 6AV7252-.....-.... 6ES7647-8C.....-.... 6AV7886-0.....-.... 6AV7886-1.....-.... 6AG4141-.....-.... 6AV7241-.....-.... 6AV7251-.....-.... 6AG4131-3.....-.... 6AV7261-.....-.... 6AG4112-3.....-.... 6AG4114-3.....-....	
CP 1625 communications processor	6ES7648-2CF10-1AA0	
PCI Express x1 card for connecting PROFINET with IRT to the SIMATIC S7-1500 Software Controller		
		CP 5622 communications processor
		PCI Express x1 card (32-bit) for connecting a programming device or PC to PROFIBUS (can only be used with version V21.9)
		CP 5623 communications processor
		PCI Express x1 card (32-bit) for connection to PROFIBUS incl. DP-Base software with NCM PC; DP-RAM interface for DP master or DP device, incl. PG and FDL protocols; single license for 1 installation, Runtime software, software and electronic manual on CD-ROM, Conformance Class A; for operating system support see SIMATIC NET software en/de (can only be used with version V21.9)

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7672-7AC01-0YA0	6ES7672-7AC02-0YA0
	SIMATIC Software Controller CPU 1507S	SIMATIC Software Controller CPU 1507S
General information		
Product type designation	CPU 1507S	CPU 1507S
Engineering with		
<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/integrated from version 	V17	V19
Memory		
Work memory		
<ul style="list-style-type: none"> integrated (for program) integrated (for data) integrated (for CPU function library of CPU Runtime) 	5 Mbyte 20 Mbyte 50 Mbyte	5 Mbyte 20 Mbyte 50 Mbyte
Load memory		
<ul style="list-style-type: none"> integrated (on PC mass storage) 	320 Mbyte	320 Mbyte
CPU processing times		
for bit operations, typ.	1 ns; On IPC427E, Intel Xeon processor	1 ns; On IPC427E, Intel Xeon processor
for word operations, typ.	2 ns; On IPC427E, Intel Xeon processor	2 ns; On IPC427E, Intel Xeon processor
for fixed point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor	2 ns; On IPC427E, Intel Xeon processor
for floating point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor	2 ns; On IPC427E, Intel Xeon processor
Counters, timers and their retentivity		
S7 counter		
<ul style="list-style-type: none"> Number 	2 048	2 048
IEC counter		
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times		
<ul style="list-style-type: none"> Number 	2 048	2 048
IEC timer		
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity		
Flag		
<ul style="list-style-type: none"> Size, max. 	16 kbyte	16 kbyte
Address area		
I/O address area		
<ul style="list-style-type: none"> Inputs Outputs 	32 kbyte 32 kbyte	32 kbyte 32 kbyte
Time of day		
Clock		
<ul style="list-style-type: none"> Type 	Software clock, synchronizable, no battery backup	Software clock, synchronizable, no battery backup

Software Controllers

SIMATIC S7-1500 Software Controllers Standard CPUs

CPU 1507S Windows

Technical specifications

Article number	6ES7672-7AC01-0YA0 SIMATIC Software Controller CPU 1507S	6ES7672-7AC02-0YA0 SIMATIC Software Controller CPU 1507S
Interfaces		
Number of interfaces	3	3
1. Interface		
Interface type	CP 1625	CP 1625
Number of connections	128	128
Interface types		
• RJ 45 (Ethernet)	Yes	Yes
- Transmission rate, max.	100 Mbit/s	100 Mbit/s
- Industrial Ethernet status LED	Yes	Yes
• Number of ports	2	2
• integrated switch	Yes	Yes
Protocols		
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0
PROFINET IO Controller		
Services		
- Isochronous mode	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs	500 µs
- IRT	Yes	Yes
- PROFIenergy	Yes	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625
- Number of connectable IO Devices, max.	256	256
- Of which IO devices with IRT, max.	64	64
- Number of connectable IO Devices for RT, max.	256	256
- of which in line, max.	256	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8	8
- IO Devices changing during operation (partner ports), supported	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class		1
Address area		
- Inputs, max.	8 kbyte	8 kbyte
- Outputs, max.	8 kbyte	8 kbyte

Technical specifications

Article number	6ES7672-7AC01-0YA0 SIMATIC Software Controller CPU 1507S	6ES7672-7AC02-0YA0 SIMATIC Software Controller CPU 1507S
PROFINET IO Device		
Services		
- PG/OP communication	Yes	Yes
- Isochronous mode	No	No
- IRT	Yes	Yes
- PROFINET energy	Yes	Yes
- Prioritized startup	Yes; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)	Yes; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- Asset management record	Yes	Yes
- PROFINET Security Class		SNMP Configuration and DCP Read Only
2. Interface		
Interface type	Onboard PROFINET / IE interface X2/X3 of the SIMATIC IPC, Intel Springville i210T	Onboard PROFINET / IE interface X2/X3 of the SIMATIC IPC, Intel Springville i210T
Number of connections	128	128
Interface types		
• RJ 45 (Ethernet)	Yes	Yes
- Transmission rate, max.	100 Mbit/s	100 Mbit/s
- Industrial Ethernet status LED	Yes	Yes
• Number of ports	1	1
• integrated switch	No	No
Protocols		
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• PROFIBUS DP master		No
• PROFIBUS DP slave		No
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes	Yes
• Web server	Yes	Yes
• Media redundancy	No	No
PROFINET IO Controller		
Services		
- Isochronous mode	No	No
- IRT	No	No
- PROFINET energy	Yes	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices for RT, max.	128	128
- of which in line, max.	128	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8	8
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class		1
Address area		
- Inputs, max.	8 kbyte	8 kbyte
- Outputs, max.	8 kbyte	8 kbyte

Software Controllers

SIMATIC S7-1500 Software Controllers Standard CPUs

CPU 1507S Windows

Technical specifications

Article number	6ES7672-7AC01-0YA0 SIMATIC Software Controller CPU 1507S	6ES7672-7AC02-0YA0 SIMATIC Software Controller CPU 1507S
PROFINET IO Device		
Services		
- Isochronous mode	No	No
- IRT	No	No
- PROFINergy	Yes	Yes
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- Asset management record	Yes	Yes
- PROFINET Security Class		SNMP Configuration and DCP Read Only
3. Interface		
Interface type	PROFIBUS with CP 5622, CP 5622 onboard	
Number of connections	44	
Interface types		
• RS 485	Yes	
Protocols		
• PROFIBUS DP master	Yes	
• PROFIBUS DP slave	No	
• SIMATIC communication	Yes; no PG/STEP 7 connection possible	
PROFIBUS DP master		
• Number of DP slaves, max.	64	
Services		
- Equidistance	No	
- Isochronous mode	No	
Address area		
- Inputs, max.	8 kbyte	
- Outputs, max.	8 kbyte	
4. Interface		
Interface type	PROFIBUS with CP 5623	
Number of connections	44	
Interface types		
• RS 485	Yes	
Protocols		
• PROFIBUS DP master	Yes	
• PROFIBUS DP slave	No	
• SIMATIC communication	Yes; no PG/STEP 7 connection possible	
PROFIBUS DP master		
• Number of DP slaves, max.	125	
Protocols		
Number of connections		
• Number of connections, max.	128	128
Redundancy mode		
Media redundancy		
- MRP	Yes	Yes
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50
SIMATIC communication		
• S7 routing	Yes	Yes; not via Windows interfaces
OPC UA		
• OPC UA Client	Yes; Data access (read, write), method call	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space

Technical specifications

Article number	6ES7672-7AC01-0YA0 SIMATIC Software Controller CPU 1507S	6ES7672-7AC02-0YA0 SIMATIC Software Controller CPU 1507S
Supported technology objects		
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	4 800	4 800
• Required Motion Control resources		
- per speed-controlled axis	40	40
- per positioning axis	80	80
- per synchronous axis	160	160
- per external encoder	80	80
- per output cam	20	20
- per cam track	160	160
- per probe	40	40
Controller		
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring		
• High-speed counter	Yes	Yes
Hardware requirement		
Hardware required	SIMATIC IPC2x7E, IPC4x7D/E, IPC6x7D/E, IPC8x7D/E	SIMATIC IPC227G, IPC277G (Pro), IPC427E, IPC477E (Pro), IPC BX-39A, IPC PX-39A (Pro), IPC627E, IPC677E, IPC647E, IPC847E
Processor		
• Single-core processor	No	No
• Single-core processor with hyper-threading	No	No
• Multi-core processor	Yes	Yes
• Multi-core processor with hyper-threading	Yes	Yes
• occupied cores	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S
Memory		
• Work memory, min.	4 Gbyte	8 Gbyte
• Hard disk memory required for installation	720 Mbyte	720 Mbyte
• Temporary hard disk memory for installation	230 Mbyte	230 Mbyte
• Hard disk memory required at runtime	400 Mbyte	561 Mbyte
Operating systems		
Runs under operating system		
• Windows 7	Yes; Professional, Enterprise, Ultimate (32 bit and 64 bit); Windows Embedded Standard 7 with delivery image of the SIMATIC IPC	No
• Windows 10	Yes; Windows 10 Enterprise 2016 LTSC, 64-bit, MUI on IPC2x7E, IPC4x7E, IPC6x7D, IPC8x7D; Windows 10 Enterprise 2019 LTSC 64-bit, MUI on IPC2x7E, IPC4x7E, IPC6x7E, IPC8x7E	Yes; Windows 10 Enterprise 2019 LTSC and 2021 LTSC, 64-bit, MUI

Software Controllers


SIMATIC S7-1500 Software Controllers
Standard CPUs

CPU 1507S Windows

Technical specifications

Article number	6ES7672-7AC01-0YA0 SIMATIC Software Controller CPU 1507S	6ES7672-7AC02-0YA0 SIMATIC Software Controller CPU 1507S
Configuration		
Configuration / programming		
Programming language		
- LAD	Yes	Yes
- FBD	Yes	Yes
- STL	Yes	Yes
- SCL	Yes	Yes
- CFC	No	Yes
- GRAPH	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Copy protection	Yes	Yes
• Block protection	Yes	Yes
Access protection		
• protection of confidential configuration data		Yes
• Protection level: Write protection	Yes	Yes
• Protection level: Read/write protection	Yes	Yes
• Protection level: Complete protection	Yes	Yes
• User administration		Yes
• Number of users		100
Open Development interfaces		
• Size of ODK SO file, max.	9.8 Mbyte	9.8 Mbyte

Overview

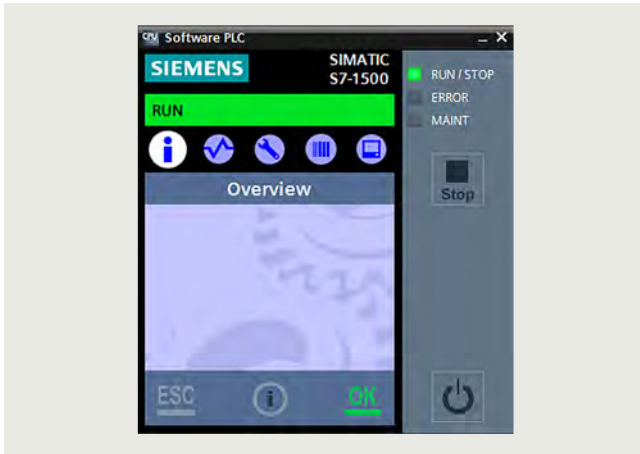

- SIMATIC S7-1500 Software Controller V30.1 with Linux (Industrial OS 3.2.4 or higher) as operating system, for implementing the functions of a SIMATIC S7-1500 controller on SIMATIC IPC
- For use as a PC-based controller in machines with distributed I/O via PROFINET
- For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET connections
- Execution of functions and algorithms implemented with high-level languages (C++/Python) on Linux (Industrial OS 3.2.4 or higher) using the Realtime Information Backbone (RIB)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages
- OPC UA server (data access) and client as Runtime option for easy connection of the SIMATIC S7-1500 Software Controller to Windows applications or non-Siemens devices/systems

New in version V30.1: General Sales Release Linux (Industrial OS 3.2.4 or higher)

- Optimized for PC-based control tasks with the IPC BX-39A Microbox PC and the IPC PX-39A (Pro) Panel PC
- Support for the current IPC generation SIMATIC IPC227G and IPC277G (Pro)
- Can also be used on the Box PCs IPC427E and IPC627E, the Panel PCs IPC477E (Pro) and IPC677E, and the Rack PCs IPC647E and IPC847E
- Support of UEFI boot and M.2 SSD on all IPC platforms
- Improved commissioning:
The resource allocation for the SIMATIC S7-1500 Software Controller, e.g. the interfaces used for PROFINET, is now set using a separate tool and no longer with the two-stage download from STEP 7. This permits a flexible choice of IPC without modifying the STEP 7 project
- Communication between Windows applications and the SIMATIC S7-1500 Software Controller is achieved via pure TCP/IP links. Communication with the SIMATIC S7-1500 Software Controller is possible directly through the PC interfaces on the Windows side ("bridging")
- No direct support from PROFIBUS, PROFIBUS support is only possible with an additional plug-in card.
- In order to use the SIMATIC S7-1500 Software Controller V30.1 instead of a previous version (e.g. V21.9), changes in configuration and installation are required.

Ordering data

Article No.

Article No.

SIMATIC S7-1500 Software Controller CPU 1507S

For implementing the function of an S7-1500 Controller on SIMATIC IPCs with Linux as operating system (Industrial OS 3.2.4 or higher)

Target system:

Optimized for PC-based control tasks with IPC BX-39A Microbox PC and IPC PX-39A (Pro) Panel PC; Can also be used with IPC277G (Pro) Panel PC, IPC477E (Pro) Panel PC, IPC677E Panel PC, IPC227G Box PC, IPC427E Box PC, IPC627E Box PC, IPC647E Rack PC, IPC847E Rack PC

Requirement:

Linux (Industrial OS 3.2.4 or higher) with UEFI boot;

For supported Linux version, see Technical specifications

Type of delivery:

en, de, fr, es, it, zh

- Version V30.1 for Linux; Single license for one installation; software download including license key ¹⁾

6ES7672-7AD02-0YG0

Accessories

SIMATIC IPC

- SIMATIC IPC BX-39A Microbox PC
- SIMATIC IPC PX-39A Panel PC
- SIMATIC IPC PX-39A Pro Panel PC
- SIMATIC IPC227G Nanobox PC
- SIMATIC IPC277G Panel PC
- SIMATIC IPC277G Pro Panel PC
- SIMATIC IPC427E Microbox PC
- SIMATIC IPC477E Panel PC
- SIMATIC IPC477E Pro Panel PC
- SIMATIC IPC627E Box PC
- SIMATIC IPC677E Panel PC
- SIMATIC IPC647E Rack PC
- SIMATIC IPC847E Rack PC

6AG4142-.....-....
6AV7242-.....-....
6AV7252-.....-....
6ES7647-8C.....-....
6AV7886-0.....-....
6AV7886-1.....-....
6AG4141-.....-....
6AV7241-.....-....
6AV7251-.....-....
6AG4131-3.....-....
6AV7261-.....-....
6AG4112-3.....-....
6AG4114-3.....-....

Software Controllers

SIMATIC S7-1500 Software Controllers Standard CPUs

CPU 1507S Linux

Ordering data

CP 1625 communications processor

PCI Express x1 card for connecting PROFINET with IRT to the SIMATIC S7-1500 Software Controller

6ES7648-2CF10-1AA0

CP 5622 communications processor

PCI Express x1 card (32-bit) for connecting a programming device or PC to PROFIBUS (can only be used with version V21.9)

6GK1562-2AA00

CP 5623 communications processor

PCI Express x1 card (32-bit) for connection to PROFIBUS incl. DP-Base software with NCM PC; DP-RAM interface for DP master or DP device, incl. PG and FDL protocols; single license for 1 installation, Runtime software, software and electronic manual on CD-ROM, Conformance Class A; for operating system support see SIMATIC NET software en/de (can only be used with version V21.9)

Article No.

6GK1562-3AA00

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7672-7AD02-0YG0 SIMATIC Soft. Control CPU 1507S Linux DL
General information	
Product type designation	CPU 1507S
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V19
Memory	
Work memory	
• integrated (for program)	5 Mbyte
• integrated (for data)	20 Mbyte
• integrated (for CPU function library of CPU Runtime)	50 Mbyte
Load memory	
• integrated (on PC mass storage)	320 Mbyte
CPU processing times	
for bit operations, typ.	1 ns; On IPC427E, Intel Xeon processor
for word operations, typ.	2 ns; On IPC427E, Intel Xeon processor
for fixed point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor
for floating point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)

Article number	6ES7672-7AD02-0YG0 SIMATIC Soft. Control CPU 1507S Linux DL
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte
• Outputs	32 kbyte
Time of day	
Clock	
• Type	Software clock, synchronizable, no battery backup
Interfaces	
Number of interfaces	3
1. Interface	
Interface type	CP 1625
Number of connections	128
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	2
• integrated switch	Yes
Protocols	
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0

Technical specifications

Article number	6ES7672-7AD02-0YG0 SIMATIC Soft. Control CPU 1507S Linux DL
PROFINET IO Controller	
Services	
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs
- IRT	Yes
- PROFIenergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625
- Number of connectable IO Devices, max.	256
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- IO Devices changing during operation (partner ports), supported	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFIenergy	Yes
- Prioritized startup	Yes; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
- PROFINET Security Class	SNMP Configuration and DCP Read Only

Article number	6ES7672-7AD02-0YG0 SIMATIC Soft. Control CPU 1507S Linux DL
2. Interface	
Interface type	Onboard PROFINET / IE interface X2/X3 of the SIMATIC IPC, Intel Springville i210T
Number of connections	128
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	1
• integrated switch	No
Protocols	
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• PROFIBUS DP master	No
• PROFIBUS DP slave	No
• SIMATIC communication	Yes
• Open IE communication	Yes
• Web server	Yes
• Media redundancy	No
PROFIBUS DP master	
• Number of DP slaves, max.	Profibus interface is not available.
Services	
- Equidistance	No
- Isochronous mode	No
PROFINET IO Controller	
Services	
- Isochronous mode	No
- IRT	No
- PROFIenergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices for RT, max.	128
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte

Software Controllers

SIMATIC S7-1500 Software Controllers Standard CPUs


CPU 1507S Linux

Technical specifications

Article number	6ES7672-7AD02-0YGO SIMATIC Soft. Control CPU 1507S Linux DL
PROFINET IO Device	
Services	
- Isochronous mode	No
- IRT	No
- PROFinergy	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
Protocols	
Number of connections	
• Number of connections, max.	128
Redundancy mode	
Media redundancy	
- MRP	Yes
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes; not via Linux interfaces
OPC UA	
• OPC UA Client	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	4 800
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Article number	6ES7672-7AD02-0YGO SIMATIC Soft. Control CPU 1507S Linux DL
Hardware requirement	
Hardware required	SIMATIC IPC2x7G, IPC4x7E, BX-39A, PX-39A
Processor	
• Single-core processor	No
• Single-core processor with hyper-threading	No
• Multi-core processor	Yes
• Multi-core processor with hyper-threading	Yes
• occupied cores	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S
Memory	
• Work memory, min.	8 Gbyte
• Hard disk memory required for installation	3 Gbyte
• Temporary hard disk memory for installation	300 Mbyte
• Hard disk memory required at runtime	1 700 Mbyte
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- CFC	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
• User administration	Yes
• Number of users	100
Open Development interfaces	
• Size of ODK SO file, max.	9.8 Mbyte

Overview

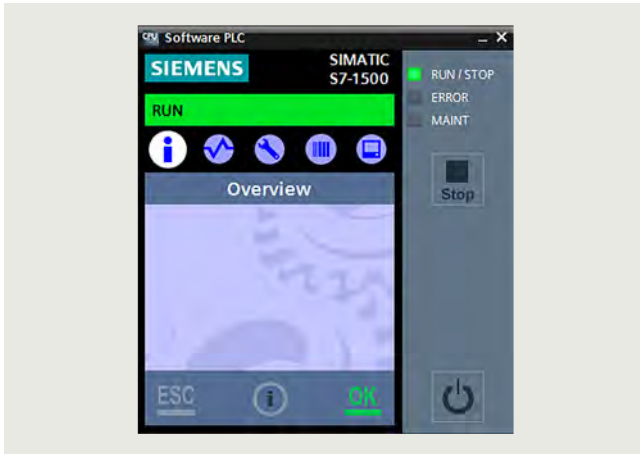

- SIMATIC S7-1500 Software Controller with Windows for implementing the functions of a SIMATIC S7-1500 Controller on a SIMATIC IPC
- For use with control applications with increased requirements for program and data memory
- For use as a PC-based controller in machines with distributed I/O via PROFINET
- For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET connections
- Optimized for PC-based control tasks with the IPC627E Box PC, the IPC677E Panel PC, and the IPC647E and IPC847E Rack PCs
- Execution of functions and algorithms implemented with high-level languages under Windows (C/C++, C#, VB) and locally in the CPU 1508S (C/C++)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes (motion control functionalities require PROFINET IRT capability via CP 1625 and a PCIe slot on the IPC)
- OPC UA server (data access) and client as Runtime option for easy connection of the SIMATIC S7-1500 Software Controller to Windows applications or non-Siemens devices/systems

New in V30.1

- Support for the current IPC generation SIMATIC IPC427E, IPC477E as well as SIMATIC IPC BX-39A and PX-39A
- Support of UEFI boot and M.2 SSD on all IPC platforms
- Improved commissioning:
The resource allocation for the SIMATIC S7-1500 Software Controller, e.g. the interfaces used for PROFINET, is now set using a separate tool and no longer with the two-stage download from STEP 7. This permits a flexible choice of IPC without modifying the STEP 7 project
- Communication between Windows applications and the SIMATIC S7-1500 Software Controller is achieved via pure TCP/IP links. Communication with the SIMATIC S7-1500 Software Controller is possible directly through the PC interfaces on the Windows side ("bridging")
- No direct support from PROFIBUS, PROFIBUS support is only possible with an additional plug-in card
- In order to use the SIMATIC S7-1500 Software Controller V30.1 instead of a previous version (e.g. V21.9), changes in configuration and installation are required.

Ordering data

Article No.

Article No.

SIMATIC S7-1500 Software Controller CPU 1508S

For implementing the function of a SIMATIC S7-1500 Controller on a SIMATIC IPC

Target system:

Optimized for PC-based control tasks with:

IPC677E Panel PC,
IPC627E Box PC,
IPC647E Rack PC,
IPC847E Rack PC;
Can also be used with:
IPC477E Panel PC,
IPC PX-39A Panel PC,
IPC427E Box PC,
IPC BX-39A Box PC;

Requirement:

Windows 10 (64-bit) with UEFI boot;
For supported Windows 10 version, see Technical specifications

Type of delivery:

en, de, fr, es, it, zh

- Version V30.1 for Windows;
Single license for one installation
Software on DVD, license key on
USB flash drive
- Version V30.1 for Windows;
Single license for one installation;
Software download including
license key ¹⁾
- Version V30.1 for Windows;
Upgrade license for one installation;
For upgrading existing
installations with CPU 1508S
Version 2
Software download including
license key ¹⁾
- Version V21.9;
Single license for one installation
Software and documentation on
DVD, license key on USB flash
drive
- Version V21.9;
Single license for one installation;
Software download including
license key ¹⁾

6ES7672-8AC02-0YA0

6ES7672-8AC02-0YG0

6ES7672-8AC02-0YK0

6ES7672-8AC01-0YA0

6ES7672-8AC01-0YG0

Software Controllers

SIMATIC S7-1500 Software Controllers Standard CPUs

CPU 1508S Windows

Ordering data

Article No.	Article No.
Accessories SIMATIC IPC <ul style="list-style-type: none"> SIMATIC IPC627E Box PC SIMATIC IPC677E Panel PC SIMATIC IPC427E Microbox PC SIMATIC IPC477E Panel PC SIMATIC IPC BX-39A Microbox PC SIMATIC IPC PX-39A Panel PC SIMATIC IPC647E Rack PC SIMATIC IPC847E Rack PC For more information, see Catalog ST 80 / ST PC	CP 1625 communications processor PCI Express x1 card for connecting PROFINET with IRT to the SIMATIC S7-1500 Software Controller
6AG4131-3.....-.... 6AV7261-.....-.... 6AG4141-.....-.... 6AV7241-.....-.... 6AG4142-.....-.... 6AV7242-.....-.... 6AG4112-3.....-.... 6AG4114-3.....-....	CP 5622 communications processor PCI Express x1 card (32-bit) for connecting a programming device or PC to PROFIBUS (can only be used with version V21.9)
6ES7648-2CF10-1AA0	CP 5623 communications processor PCI Express x1 card (32-bit) for connection to PROFIBUS incl. DP-Base software with NCM PC; DP-RAM interface for DP master or DP device, incl. PG and FDL protocols; single license for 1 installation, Runtime software, software and electronic manual on CD-ROM, Conformance Class A; for operating system support see SIMATIC NET software; en/de (can only be used with version V21.9)
	6GK1562-2AA00
	6GK1562-3AA00

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7672-8AC01-0YA0	6ES7672-8AC02-0YA0
	SIMATIC Software Controller CPU 1508S	SIMATIC Software Controller CPU 1508S
General information		
Product type designation	CPU 1508S	CPU 1508S
Engineering with		
<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/integrated from version 	V17	V19
Memory		
Work memory		
<ul style="list-style-type: none"> integrated (for program) integrated (for data) integrated (for CPU function library of CPU Runtime) 	10 Mbyte 100 Mbyte 50 Mbyte	10 Mbyte 100 Mbyte 50 Mbyte
Load memory		
<ul style="list-style-type: none"> integrated (on PC mass storage) 	1 024 Mbyte	1 024 Mbyte
CPU processing times		
for bit operations, typ. for word operations, typ. for fixed point arithmetic, typ. for floating point arithmetic, typ.	1 ns; On IPC427E, Intel Xeon processor 2 ns; On IPC427E, Intel Xeon processor 2 ns; On IPC427E, Intel Xeon processor 2 ns; On IPC427E, Intel Xeon processor	1 ns; On IPC427E, Intel Xeon processor 2 ns; On IPC427E, Intel Xeon processor 2 ns; On IPC427E, Intel Xeon processor 2 ns; On IPC427E, Intel Xeon processor
Counters, timers and their retentivity		
S7 counter		
<ul style="list-style-type: none"> Number 	2 048	2 048
IEC counter		
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times		
<ul style="list-style-type: none"> Number 	2 048	2 048
IEC timer		
<ul style="list-style-type: none"> Number 	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity		
Flag		
<ul style="list-style-type: none"> Size, max. 	16 kbyte	16 kbyte
Address area		
I/O address area		
<ul style="list-style-type: none"> Inputs Outputs 	32 kbyte 32 kbyte	32 kbyte 32 kbyte
Time of day		
Clock		
<ul style="list-style-type: none"> Type 	Software clock, synchronizable, no battery backup	Software clock, synchronizable, no battery backup
Interfaces		
Number of interfaces	3	3

Technical specifications

Article number	6ES7672-8AC01-0YA0 SIMATIC Software Controller CPU 1508S	6ES7672-8AC02-0YA0 SIMATIC Software Controller CPU 1508S
1. Interface		
Interface type	CP 1625	CP 1625
Number of connections	192	192
Interface types		
• RJ 45 (Ethernet)	Yes	Yes
- Transmission rate, max.	100 Mbit/s	100 Mbit/s
- Industrial Ethernet status LED	Yes	Yes
• Number of ports	2	2
• integrated switch	Yes	Yes
Protocols		
• IP protocol	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy		Yes; MRP Automanager according to IEC 62439-2 Edition 2.0
PROFINET IO Controller		
Services		
- Isochronous mode	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs	500 µs
- IRT	Yes	Yes
- PROFlenergy	Yes	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625
- Number of connectable IO Devices, max.	256; the maximal amount of supported devices on all interfaces (PN/PB) is 384 in total	256; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+128+125), but it is accepted to be limited to 384
- Of which IO devices with IRT, max.	64	64
- Number of connectable IO Devices for RT, max.	256	256
- of which in line, max.	256	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8	8
- IO Devices changing during operation (partner ports), supported	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class		1
Address area		
- Inputs, max.	16 kbyte	16 kbyte
- Outputs, max.	16 kbyte	16 kbyte
PROFINET IO Device		
Services		
- Isochronous mode	No	No
- IRT	Yes	Yes
- PROFlenergy	Yes	Yes
- Prioritized startup	Yes	Yes
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- Asset management record	Yes	Yes
- PROFINET Security Class		SNMP Configuration and DCP Read Only

Software Controllers

SIMATIC S7-1500 Software Controllers Standard CPUs

CPU 1508S Windows

Technical specifications

Article number	6ES7672-8AC01-0YA0 SIMATIC Software Controller CPU 1508S	6ES7672-8AC02-0YA0 SIMATIC Software Controller CPU 1508S
2. Interface		
Interface type	Onboard PROFINET / IE interface X2 of the SIMATIC IPC, Intel Springville i210T	Onboard PROFINET / IE interface X2 of the SIMATIC IPC, Intel Springville i210T
Number of connections	192	192
Interface types		
• RJ 45 (Ethernet)	Yes	Yes
- Transmission rate, max.	100 Mbit/s	100 Mbit/s
- Industrial Ethernet status LED	Yes	Yes
• Number of ports	1	1
• integrated switch	No	No
Protocols		
• IP protocol	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• PROFIBUS DP master		No
• PROFIBUS DP slave		No
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes	Yes
• Web server	Yes	Yes
• Media redundancy	No	No
PROFINET IO Controller		
Services		
- Isochronous mode	No	No
- IRT	No	No
- PROFinergy	Yes	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices for RT, max.	128; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+128+125), but it is accepted to be limited to 384	128; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+128+125), but it is accepted to be limited to 384
- of which in line, max.	128	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8	8
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class		1
Address area		
- Inputs, max.	8 kbyte	8 kbyte
- Outputs, max.	8 kbyte	8 kbyte
PROFINET IO Device		
Services		
- Isochronous mode	No	No
- IRT	No	No
- PROFinergy	Yes	Yes
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- Asset management record	Yes	Yes
- PROFINET Security Class		SNMP Configuration and DCP Read Only
3. Interface		
Interface type	PROFIBUS with CP 5622, CP 5622 onboard	
Number of connections	44	
Interface types		
• RS 485	Yes	

Technical specifications

Article number	6ES7672-8AC01-0YA0 SIMATIC Software Controller CPU 1508S	6ES7672-8AC02-0YA0 SIMATIC Software Controller CPU 1508S
Protocols		
• PROFIBUS DP master	Yes	
• PROFIBUS DP slave	No	
• SIMATIC communication	Yes; no PG/STEP 7 connection possible	
PROFIBUS DP master		
• Number of DP slaves, max.	64	
Services		
- Equidistance	No	
- Isochronous mode	No	
Address area		
- Inputs, max.	8 kbyte	
- Outputs, max.	8 kbyte	
4. Interface		
Interface type	PROFIBUS with CP 5623	
Number of connections	44	
Interface types		
• RS 485	Yes	
Protocols		
• PROFIBUS DP master	Yes	
• PROFIBUS DP slave	No	
• SIMATIC communication	Yes; no PG/STEP 7 connection possible	
PROFIBUS DP master		
• Number of DP slaves, max.	125	
Protocols		
Number of connections		
• Number of connections, max.	192	192
Redundancy mode		
Media redundancy		
- MRP	Yes	Yes
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50
SIMATIC communication		
• S7 routing	Yes	Yes
OPC UA		
• OPC UA Client	Yes; Data access (read, write), method call	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space
Supported technology objects		
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	4 800	4 800
• Required Motion Control resources		
- per speed-controlled axis	40	40
- per positioning axis	80	80
- per synchronous axis	160	160
- per external encoder	80	80
- per output cam	20	20
- per cam track	160	160
- per probe	40	40
Controller		
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring		
• High-speed counter	Yes	Yes

Software Controllers


SIMATIC S7-1500 Software Controllers Standard CPUs

CPU 1508S Windows

Technical specifications

Article number	6ES7672-8AC01-0YA0 SIMATIC Software Controller CPU 1508S	6ES7672-8AC02-0YA0 SIMATIC Software Controller CPU 1508S
Hardware requirement		
Hardware required	SIMATIC IPC4x7E, IPC6x7D/E, IPC8x7D/E	SIMATIC IPC427E, IPC477E (Pro), IPC BX-39A, IPC PX-39A (Pro), IPC627E, IPC677E, IPC647E, IPC847E
Processor		
• Single-core processor	No	No
• Single-core processor with hyper-threading	No	No
• Multi-core processor	Yes	Yes
• Multi-core processor with hyper-threading	Yes	Yes
• occupied cores	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S
Memory		
• Work memory, min.	8 Gbyte	8 Gbyte
• Hard disk memory required for installation	720 Mbyte	720 Mbyte
• Temporary hard disk memory for installation	230 Mbyte	230 Mbyte
• Hard disk memory required at runtime	1 000 Mbyte	1 661 Mbyte
Operating systems		
Runs under operating system		
• Windows 7	Yes; Professional, Enterprise, Ultimate (32 bit and 64 bit); Windows Embedded Standard 7 with delivery image of the SIMATIC IPC	No
• Windows 10	Yes; Windows 10 Enterprise 2016 LTSC, 64-bit, MUI on IPC2x7E, IPC4x7E, IPC6x7D, IPC8x7D; Windows 10 Enterprise 2019 LTSC 64-bit, MUI on IPC2x7E, IPC4x7E, IPC6x7E, IPC8x7E	Yes; Windows 10 Enterprise 2019 LTSC and 2021 LTSC, 64-bit, MUI
Configuration		
Configuration / programming		
Programming language		
- LAD	Yes	Yes
- FBD	Yes	Yes
- STL	Yes	Yes
- SCL	Yes	Yes
- CFC	No	Yes
- GRAPH	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Copy protection	Yes	Yes
• Block protection	Yes	Yes
Access protection		
• protection of confidential configuration data		Yes
• Protection level: Write protection	Yes	Yes
• Protection level: Read/write protection	Yes	Yes
• Protection level: Complete protection	Yes	Yes
• User administration		Yes
• Number of users		100
Open Development interfaces		
• Size of ODK SO file, max.	9.8 Mbyte	9.8 Mbyte

Overview

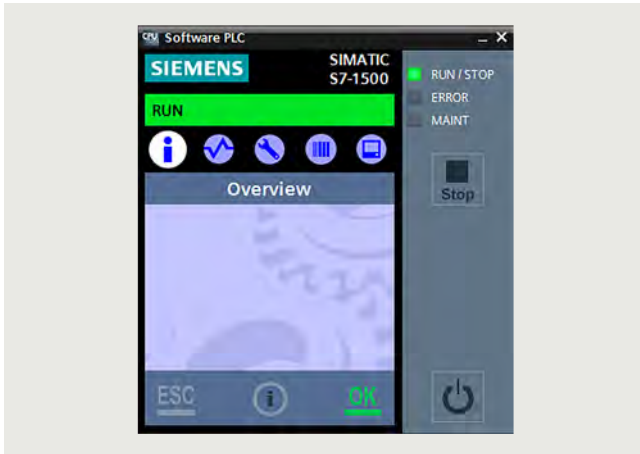

- The SIMATIC S7-1500 Software Controller with Linux (Industrial OS 3.2.4 or higher) as operating system, for implementing the functions of a SIMATIC S7-1500 controller on SIMATIC IPC
- For use with control applications with increased requirements for program and data memory
- For use as a PC-based controller in machines with distributed I/O via PROFINET
- For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET connections
- Optimized for PC-based control tasks with the IPC627E Box PC, the IPC677E Panel PC, and the IPC647E and IPC847E Rack PCs
- Execution of functions and algorithms implemented with high-level languages (C++, Python) on Linux (Industrial OS 3.2.4 or higher) using the Realtime Information Backbone (RIB)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes (motion control functionalities require PROFINET IRT capability via CP 1625 and a PCIe slot on the IPC)
- OPC UA server (data access) and client as Runtime option for easy connection of the SIMATIC S7-1500 Software Controller to Linux applications or third-party devices/systems

New with V30.1, General Sales Release Linux (Industrial OS 3.2.4 or higher)

- Support for the current IPC generation SIMATIC IPC427E, IPC477E as well as SIMATIC IPC BX-39A and PX-39A
- Support of UEFI boot and M.2 SSD on all IPC platforms
- Improved commissioning:
The resource allocation for the SIMATIC S7-1500 Software Controller, e.g. the interfaces used for PROFINET, is now set using a separate tool and no longer with the two-stage download from STEP 7. This permits a flexible choice of IPC without modifying the STEP 7 project
- Communication between Linux applications and the SIMATIC S7-1500 Software Controller is achieved via pure TCP/IP links. Communication with the SIMATIC S7-1500 Software Controller is possible directly through the PC interfaces on the Linux side ("bridging")
- No direct support from PROFIBUS, PROFIBUS support is only possible with an additional plug-in card
- In order to use the SIMATIC S7-1500 Software Controller V30.1 instead of a previous version (e.g. V21.9), changes in configuration and installation are required.

Ordering data

Article No.

Article No.

SIMATIC S7-1500 Software Controller CPU 1508S

For implementing the function of a SIMATIC S7-1500 Controller on a SIMATIC IPC with Linux as operating system (Industrial OS 3.2.4 or higher)

Target system:

Optimized for PC-based control tasks with:

IPC677E Panel PC,
IPC627E Box PC,
IPC647E Rack PC,
IPC847E Rack PC;
Can also be used with:
IPC477E Panel PC,
IPC PX-39A Panel PC,
IPC427E Box PC,
IPC BX-39A Box PC;

Requirement:

Linux (Industrial OS 3.2.4 or higher) with UEFI boot;

Type of delivery:

en, de, fr, es, it, zh

- Version V30.1 for Linux; Single license for one installation; software download including license key ¹⁾

6ES7672-8AD02-0YG0

Accessories

SIMATIC IPC

- SIMATIC IPC627E Box PC
- SIMATIC IPC677E Panel PC
- SIMATIC IPC427E Microbox PC
- SIMATIC IPC477E Panel PC
- SIMATIC IPC BX-39A Microbox PC
- SIMATIC IPC PX-39A Panel PC
- SIMATIC IPC647E Rack PC
- SIMATIC IPC847E Rack PC

For more information, see Catalog ST 80 / ST PC

6AG4131-3....-....
6AV7261-.....-....
6AG4141-.....-....
6AV7241-.....-....
6AG4142-.....-....
6AV7242-.....-....
6AG4112-3....-....
6AG4114-3....-....

Software Controllers

SIMATIC S7-1500 Software Controllers Standard CPUs

CPU 1508S Linux

Ordering data

CP 1625 communications processor

PCI Express x1 card for connecting PROFINET with IRT to the SIMATIC S7-1500 Software Controller

6ES7648-2CF10-1AA0

CP 5622 communications processor

PCI Express x1 card (32-bit) for connecting a programming device or PC to PROFIBUS (can only be used with version V21.9)

6GK1562-2AA00

CP 5623 communications processor

PCI Express x1 card (32-bit) for connection to PROFIBUS incl. DP-Base software with NCM PC; DP-RAM interface for DP master or DP device, incl. PG and FDL protocols; single license for 1 installation, Runtime software, software and electronic manual on CD-ROM, Conformance Class A; for operating system support see SIMATIC NET software; en/de (can only be used with version V21.9)

Article No.

6GK1562-3AA00

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7672-8AD02-0YG0 SIMATIC Software Controller CPU 1508S DL
General information	
Product type designation	CPU 1508S
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V19
Memory	
Work memory	
• integrated (for program)	10 Mbyte
• integrated (for data)	100 Mbyte
• integrated (for CPU function library of CPU Runtime)	50 Mbyte
Load memory	
• integrated (on PC mass storage)	1 024 Mbyte
CPU processing times	
for bit operations, typ.	1 ns; On IPC427E, Intel Xeon processor
for word operations, typ.	2 ns; On IPC427E, Intel Xeon processor
for fixed point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor
for floating point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)

Article number	6ES7672-8AD02-0YG0 SIMATIC Software Controller CPU 1508S DL
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte
• Outputs	32 kbyte
Time of day	
Clock	
• Type	Software clock, synchronizable, no battery backup
Interfaces	
Number of interfaces	3
1. Interface	
Interface type	CP 1625
Number of connections	192
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	2
• integrated switch	Yes
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0

Technical specifications

Article number	6ES7672-8AD02-0YG0 SIMATIC Software Controller CPU 1508S DL
PROFINET IO Controller	
Services	
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs
- IRT	Yes
- PROFINergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625
- Number of connectable IO Devices, max.	256; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+128+125), but it is accepted to be limited to 384
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- IO Devices changing during operation (partner ports), supported	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	16 kbyte
- Outputs, max.	16 kbyte
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFINergy	Yes
- Prioritized startup	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
- PROFINET Security Class	SNMP Configuration and DCP Read Only

Article number	6ES7672-8AD02-0YG0 SIMATIC Software Controller CPU 1508S DL
2. Interface	
Interface type	Onboard PROFINET / IE interface X2 of the SIMATIC IPC, Intel Springville i210T
Number of connections	192
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	1
• integrated switch	No
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• PROFIBUS DP master	No
• PROFIBUS DP slave	No
• SIMATIC communication	Yes
• Open IE communication	Yes
• Web server	Yes
• Media redundancy	No
PROFIBUS DP master	
• Number of DP slaves, max.	Profibus interface is not available.
Services	
- Equidistance	No
- Isochronous mode	No
PROFINET IO Controller	
Services	
- Isochronous mode	No
- IRT	No
- PROFINergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices for RT, max.	128; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+128+125), but it is accepted to be limited to 384
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte

Software Controllers

SIMATIC S7-1500 Software Controllers Standard CPUs

CPU 1508S Linux

Technical specifications

Article number	6ES7672-8AD02-0YG0 SIMATIC Software Controller CPU 1508S DL
PROFINET IO Device	
Services	
- Isochronous mode	No
- IRT	No
- PROFinergy	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
- PROFINET Security Class	SNMP Configuration and DCP Read Only
Protocols	
Number of connections	
• Number of connections, max.	192
Redundancy mode	
Media redundancy	
- MRP	Yes
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	4 800
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Article number	6ES7672-8AD02-0YG0 SIMATIC Software Controller CPU 1508S DL
Hardware requirement	
Hardware required	SIMATIC IPC427E, IPC477E (Pro), IPC BX-39A, IPC PX-39A (Pro)
Processor	
• Single-core processor	No
• Single-core processor with hyper-threading	No
• Multi-core processor	Yes
• Multi-core processor with hyper-threading	Yes
• occupied cores	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S
Memory	
• Work memory, min.	8 Gbyte
• Hard disk memory required for installation	3 Gbyte
• Temporary hard disk memory for installation	300 Mbyte
• Hard disk memory required at runtime	1 700 Mbyte
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- CFC	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
• User administration	Yes
• Number of users	100
Open Development interfaces	
• Size of ODK SO file, max.	9.8 Mbyte

Overview



- Integrated web server for diagnostics with the option of creating user-defined web pages
 - OPC UA server (data access) and client as Runtime option for easy connection of the SIMATIC S7-1500 Software Controller to Windows applications or non-Siemens devices/systems
- New in version V30.1
- Support for new IPC generations
 - Optimized for PC-based control tasks with the IPC BX-39A Microbox PC and the IPC PX-39A (Pro) Panel PC
 - Support for the current IPC generation SIMATIC IPC227G and IPC277G
 - Can also be used on the IPC427E and IPC627E Box PCs, the IPC477E (Pro) and IPC677E Panel PCs, and the IPC647E and IPC847E Rack PCs
 - Support of UEFI boot and M.2 SSD on all IPC platforms
 - Improved commissioning:
The resource allocation for the SIMATIC S7-1500 Software Controller, e.g. the interfaces used for PROFINET, is now set using a separate tool and no longer with the two-stage download from STEP 7. This permits a flexible choice of IPC without modifying the STEP 7 project
 - Communication between Windows applications and the SIMATIC S7-1500 Software Controller is achieved via pure TCP/IP links. Communication with the SIMATIC S7-1500 Software Controller is possible directly through the PC interfaces on the Windows side ("bridging")
 - Safety functions possible on IPC without NVRAM
 - No direct support from PROFIBUS, PROFIBUS support is only possible with an additional plug-in card.
 - In order to use the SIMATIC S7-1500 Software Controller V30.1 instead of a previous version (e.g. V21.9), changes in the configuration and installation are required.
- SIMATIC S7-1500 Software Controller with Windows as operating system for implementing the functions of a SIMATIC S7-1500 Controller on a SIMATIC IPC
 - For use as a PC-based controller in machines with distributed I/O via PROFINET
 - For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET connections
 - Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
 - Supports PROFIsafe in distributed configurations
 - Can also be used on the IPC227G, IPC427E and IPC627E Box PCs, the IPC277G, IPC477E and IPC677E Panel PCs, and the IPC647E and IPC847E Rack PCs
 - Execution of functions and algorithms implemented with high-level languages under Windows (C/C++, C#, VB) and locally in the CPU 1507S F (C/C++)
 - Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes (motion control functionalities require PROFINET IRT capability via CP 1625 and a PCIe slot on the IPC)

Software Controllers

SIMATIC S7-1500 Software Controllers Fail-safe CPUs

CPU 1507S F Windows

Ordering data

Article No.

SIMATIC S7-1500 Software Controller CPU 1507S F

For implementing the function of a fail-safe S7-1500 Controller on SIMATIC IPCs

Target system:

Optimized for PC-based control tasks with IPC BX-39A Microbox PC and IPC PX-39A (Pro) Panel PC; Can also be used with IPC277G (Pro) Panel PC, IPC477E (Pro) Panel PC, IPC677E Panel PC, IPC227G Box PC, IPC427E Box PC, IPC627E Box PC, IPC647E Rack PC, IPC847E Rack PC.

Requirement:

Windows 10 (64-bit) with UEFI boot; For supported Windows 10 versions, see Technical specifications;

For optimum fail-safe operation, IPC configurations with NVRAM are recommended (requirement for use of version V21.9).

Type of delivery:

en, de, fr, es, it, zh

- Version V30.1 for Windows; Single license for one installation Software on DVD, license key on USB flash drive
- Version V30.1 for Windows; Single license for one installation; Software download including license key ¹⁾
- Version V30.1 for Windows; Upgrade license for one installation. For upgrading existing installations with CPU 1507S F Version 2; Software download including license key ¹⁾
- Version V21.9; Single license for one installation Software on DVD, license key on USB flash drive; Note: for safety functions, IPC with NVRAM are absolutely necessary
- Version V21.9; Single license for one installation; Software download including license key ¹⁾ Note: for safety functions, IPC with NVRAM are absolutely necessary

6ES7672-7FC02-0YA0

6ES7672-7FC02-0YG0

6ES7672-7FC02-0YK0

6ES7672-7FC01-0YA0

6ES7672-7FC01-0YG0

Article No.

Accessories

SIMATIC IPC

- SIMATIC IPC BX-39A Microbox PC
- SIMATIC IPC PX-39A Panel PC
- SIMATIC IPC PX-39A Pro Panel PC
- SIMATIC IPC227G Nanobox PC
- SIMATIC IPC277G Panel PC
- SIMATIC IPC277G Pro Panel PC
- SIMATIC IPC427E Microbox PC
- SIMATIC IPC477E Panel PC
- SIMATIC IPC477E Pro Panel PC
- SIMATIC IPC627E Box PC
- SIMATIC IPC677E Panel PC
- IPC647E Rack PC
- IPC847E Rack PC

6AG4142-.....-.....

6AV7242-.....-.....

6AV7252-.....-.....

6ES7647-8C.....-.....

6AV7886-0.....-.....

6AV7886-1.....-.....

6AG4141-.....-.....

6AV7241-.....-.....

6AV7251-.....-.....

6AG4131-3.....-.....

6AG4112-3.....-.....

6AG4114-3.....-.....

CP 1625

communications processor

PCI Express x1 card for connecting PROFINET with IRT to the SIMATIC S7-1500 Software Controller

6ES7648-2CF10-1AA0

CP 5622

communications processor

PCI Express x1 card (32-bit) for connecting a programming device or PC to PROFIBUS (can only be used with version V21.9)

6GK1562-2AA00

CP 5623

communications processor

PCI Express x1 card (32-bit) for connection to PROFIBUS incl. DP-Base software with NCM PC; DP-RAM interface for DP master or DP device, incl. PG and FDL protocols; single license for 1 installation, Runtime software, software and electronic manual on CD-ROM, Conformance Class A; for operating system support see SIMATIC NET software; en/de (can only be used with version V21.9)

6GK1562-3AA00

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7672-7FC01-0YA0 SIMATIC Failsafe SW Ctrl CPU 1507S F	6ES7672-7FC02-0YA0 SIMATIC Failsafe SW Ctrl CPU 1507S F
General information		
Product type designation	CPU 1507S F	CPU 1507S F
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	V17	V19
Memory		
Work memory		
• integrated (for program)	7.5 Mbyte	7.5 Mbyte
• integrated (for data)	20 Mbyte	20 Mbyte
• integrated (for CPU function library of CPU Runtime)	50 Mbyte	50 Mbyte
Load memory		
• integrated (on PC mass storage)	320 Mbyte	320 Mbyte
CPU processing times		
for bit operations, typ.	1 ns; On IPC427E, Intel Xeon processor	1 ns; On IPC427E, Intel Xeon processor
for word operations, typ.	2 ns; On IPC427E, Intel Xeon processor	2 ns; On IPC427E, Intel Xeon processor
for fixed point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor	2 ns; On IPC427E, Intel Xeon processor
for floating point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor	2 ns; On IPC427E, Intel Xeon processor
Counters, timers and their retentivity		
S7 counter		
• Number	2 048	2 048
IEC counter		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times		
• Number	2 048	2 048
IEC timer		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity		
Flag		
• Size, max.	16 kbyte	16 kbyte
Address area		
I/O address area		
• Inputs	32 kbyte	32 kbyte
• Outputs	32 kbyte	32 kbyte
Time of day		
Clock		
• Type	Software clock, synchronizable, no battery backup	Software clock, synchronizable, no battery backup
Interfaces		
Number of interfaces	3	3
1. Interface		
Interface type	CP 1625	CP 1625
Number of connections	128	128
Interface types		
• RJ 45 (Ethernet)	Yes	Yes
- Transmission rate, max.	100 Mbit/s	100 Mbit/s
- Industrial Ethernet status LED	Yes	Yes
• Number of ports	2	2
• integrated switch	Yes	Yes
Protocols		
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy		Yes; MRP Automanager according to IEC 62439-2 Edition 2.0

Software Controllers

SIMATIC S7-1500 Software Controllers Fail-safe CPUs

CPU 1507S F Windows

Technical specifications

Article number	6ES7672-7FC01-0YA0 SIMATIC Failsafe SW Ctrl CPU 1507S F	6ES7672-7FC02-0YA0 SIMATIC Failsafe SW Ctrl CPU 1507S F
PROFINET IO Controller		
Services		
- Isochronous mode	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs	500 µs
- IRT	Yes	Yes
- PROFIenergy	Yes	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625
- Number of connectable IO Devices, max.	256	256
- Of which IO devices with IRT, max.	64	64
- Number of connectable IO Devices for RT, max.	256	256
- of which in line, max.	256	256
- Number of IO Devices that can be simultaneously activated/ deactivated, max.	8	8
- IO Devices changing during operation (partner ports), supported	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class		1
Address area		
- Inputs, max.	8 kbyte	8 kbyte
- Outputs, max.	8 kbyte	8 kbyte
PROFINET IO Device		
Services		
- PG/OP communication	Yes	Yes
- Isochronous mode	No	No
- IRT	Yes	Yes
- PROFIenergy	Yes	Yes
- Prioritized startup	Yes; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)	Yes; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- Asset management record	Yes	Yes
- PROFINET Security Class		SNMP Configuration and DCP Read Only
2. Interface		
Interface type	Onboard PROFINET / IE interface X2/X3 of the SIMATIC IPC, Intel Springville i210T	Onboard PROFINET / IE interface X2/X3 of the SIMATIC IPC, Intel Springville i210T
Number of connections	128	128
Interface types		
• RJ 45 (Ethernet)	Yes	Yes
- Transmission rate, max.	100 Mbit/s	100 Mbit/s
- Industrial Ethernet status LED	Yes	Yes
• Number of ports	1	1
• integrated switch	No	No

Technical specifications

Article number	6ES7672-7FC01-0YA0 SIMATIC Failsafe SW Ctrl CPU 1507S F	6ES7672-7FC02-0YA0 SIMATIC Failsafe SW Ctrl CPU 1507S F
Protocols		
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• PROFIBUS DP master		No
• PROFIBUS DP slave		No
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes	Yes
• Web server	Yes	Yes
• Media redundancy	No	No
PROFINET IO Controller		
Services		
- Isochronous mode	No	No
- IRT	No	No
- PROFIenergy	Yes	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices for RT, max.	128	128
- of which in line, max.	128	128
- Number of IO Devices that can be simultaneously activated/ deactivated, max.	8	8
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class		1
Address area		
- Inputs, max.	8 kbyte	8 kbyte
- Outputs, max.	8 kbyte	8 kbyte
PROFINET IO Device		
Services		
- Isochronous mode	No	No
- IRT	No	No
- PROFIenergy	Yes	Yes
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- Asset management record	Yes	Yes
3. Interface		
Interface type	PROFIBUS with CP 5622, CP 5622 onboard	
Number of connections	44	
Interface types		
• RS 485	Yes	
Protocols		
• PROFIBUS DP master	Yes	
• PROFIBUS DP slave	No	
• SIMATIC communication	Yes; no PG/STEP 7 connection possible	
PROFIBUS DP master		
• Number of DP slaves, max.	64	
Services		
- Equidistance	No	
- Isochronous mode	No	
Address area		
- Inputs, max.	8 kbyte	
- Outputs, max.	8 kbyte	

Software Controllers

SIMATIC S7-1500 Software Controllers Fail-safe CPUs

CPU 1507S F Windows

Technical specifications

Article number	6ES7672-7FC01-0YA0 SIMATIC Failsafe SW Ctrl CPU 1507S F	6ES7672-7FC02-0YA0 SIMATIC Failsafe SW Ctrl CPU 1507S F
4. Interface		
Interface type	PROFIBUS with CP 5623	
Number of connections	44	
Interface types		
• RS 485	Yes	
Protocols		
• PROFIBUS DP master	Yes	
• PROFIBUS DP slave	No	
• SIMATIC communication	Yes; no PG/STEP 7 connection possible	
PROFIBUS DP master		
• Number of DP slaves, max.	125	
Protocols		
Number of connections		
• Number of connections, max.	128	128
Redundancy mode		
Media redundancy		
- MRP	Yes	Yes
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50
SIMATIC communication		
• S7 routing	Yes	Yes; not via Windows interfaces
OPC UA		
• OPC UA Client	Yes; Data access (read, write), method call	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space
Supported technology objects		
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	4 800	4 800
• Required Motion Control resources		
- per speed-controlled axis	40	40
- per positioning axis	80	80
- per synchronous axis	160	160
- per external encoder	80	80
- per output cam	20	20
- per cam track	160	160
- per probe	40	40
Controller		
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring		
• High-speed counter	Yes	Yes
Standards, approvals, certificates		
Highest safety class achievable in safety mode		
• Performance level according to ISO 13849-1	PLe	PLe
• SIL acc. to IEC 61508	SIL 3	SIL 3
Probability of failure (for service life of 20 years and repair time of 100 hours)		
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09	< 1.00E-09

Technical specifications

Article number	6ES7672-7FC01-0YA0 SIMATIC Failsafe SW Ctrl CPU 1507S F	6ES7672-7FC02-0YA0 SIMATIC Failsafe SW Ctrl CPU 1507S F
Hardware requirement		
Hardware required	SIMATIC IPC2x7E, IPC4x7D/E, IPC627D, IPC677D, IPC827D: configurations with NVRAM required; IPC6x7E, IPC8x7E	SIMATIC IPC227G, IPC277G (Pro), IPC427E, IPC477E (Pro), IPC BX-39A, IPC PX-39A (Pro), IPC627E, IPC677E, IPC647E, IPC847E
Processor		
• Single-core processor	No	No
• Single-core processor with hyper-threading	No	No
• Multi-core processor	Yes	Yes
• Multi-core processor with hyper-threading	Yes	Yes
• occupied cores	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S
Memory		
• Work memory, min.	4 Gbyte	8 Gbyte
• Hard disk memory required for installation	720 Mbyte	720 Mbyte
• Temporary hard disk memory for installation	230 Mbyte	230 Mbyte
• Hard disk memory required at runtime	400 Mbyte	561 Mbyte
Operating systems		
Runs under operating system		
• Windows 7	Yes; Professional, Enterprise, Ultimate (32 bit and 64 bit); Windows Embedded Standard 7 with delivery image of the SIMATIC IPC	No
• Windows 10	Yes; Windows 10 Enterprise 2016 LTSC, 64-bit, MUI on IPC2x7E, IPC4x7E, IPC6x7D, IPC8x7D; Windows 10 Enterprise 2019 LTSC 64-bit, MUI on IPC2x7E, IPC4x7E, IPC6x7E, IPC8x7E	Yes; Windows 10 Enterprise 2019 LTSC and 2021 LTSC, 64-bit, MUI
Configuration		
Configuration / programming		
Programming language		
- LAD	Yes; incl. failsafe	Yes; incl. failsafe
- FBD	Yes; incl. failsafe	Yes; incl. failsafe
- STL	Yes	Yes
- SCL	Yes	Yes
- CFC	No	Yes
- GRAPH	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Copy protection	Yes	Yes
• Block protection	Yes	Yes
Access protection		
• protection of confidential configuration data		Yes
• Protection level: Write protection	Yes	Yes
• Protection level: Read/write protection	Yes	Yes
• Protection level: Write protection for Failsafe	Yes	Yes
• Protection level: Complete protection	Yes	Yes
• User administration		Yes
• Number of users		100
Open Development interfaces		
• Size of ODK SO file, max.	9.8 Mbyte	9.8 Mbyte

Software Controllers

SIMATIC S7-1500 Software Controllers Fail-safe CPUs

CPU 1507S F Linux

Overview



- SIMATIC S7-1500 Software Controller V30.1 with Linux (Industrial OS 3.2.4 or higher) as operating system for implementing the functions of a SIMATIC S7-1500 Controller on SIMATIC IPC
- Use as a PC-based SIMATIC controller in machines with distributed I/O via PROFINET
- For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET connections
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- Supports PROFIsafe in distributed configurations
- Can also be used on the IPC227G, IPC427E and IPC627E Box PCs, the IPC277G, IPC477E and IPC677E Panel PCs, and the IPC647E and IPC847E Rack PCs
- Execution of functions and algorithms implemented with high-level languages (C++/Python) on Linux (Industrial OS 3.2.4 or higher) using the Realtime Information Backbone (RIB)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes (motion control functionalities require PROFINET IRT capability via CP 1625 and a PCIe slot on the IPC)
- Integrated web server for diagnostics with the option of creating user-defined web pages
- OPC UA server (data access) and client as Runtime option for easy connection of the SIMATIC S7-1500 Software Controller to Linux applications or third-party devices/systems

New in version V30.1: General Sales Release Linux (Industrial OS 3.2.4 or higher)

- Support for new IPC generations
- Optimized for PC-based control tasks with the IPC BX-39A Microbox PC and the IPC PX-39A (Pro) Panel PC
- Support for the current IPC generation SIMATIC IPC227G and IPC277G
- Can also be used on the IPC427E and IPC627E Box PCs, the IPC477E (Pro) and IPC677E Panel PCs, and the IPC647E and IPC847E Rack PCs
- Support of UEFI boot and M.2 SSD on all IPC platforms
- Improved commissioning:
The resource allocation for the SIMATIC S7-1500 Software Controller, e.g. the interfaces used for PROFINET, is now set using a separate tool and no longer with the two-stage download from STEP 7. This permits a flexible choice of IPC without modifying the STEP 7 project
- Communication between Linux applications and the SIMATIC S7-1500 Software Controller is achieved via pure TCP/IP links. Communication with the SIMATIC S7-1500 Software Controller is possible directly through the PC interfaces on the Linux side ("bridging")
- Safety functions possible on IPC without NVRAM
- No direct support from PROFIBUS, PROFIBUS support is only possible with an additional plug-in card.
- In order to use the SIMATIC S7-1500 Software Controller V30.1 instead of a previous version (e.g. V21.9), changes in the configuration and installation are required.

Ordering data	Article No.	Article No.
<p>SIMATIC S7-1500 Software Controller CPU 1507S F</p> <p>For implementing the function of a fail-safe S7-1500 Controller on SIMATIC IPCs with Linux as operating system (Industrial OS 3.2.4 or higher)</p> <p>Target system: Optimized for PC-based control tasks with IPC BX-39A Microbox PC and IPC PX-39A (Pro) Panel PC; Can also be used with IPC277G (Pro) Panel PC, IPC477E (Pro) Panel PC, IPC677E Panel PC, IPC227G Box PC, IPC427E Box PC, IPC627E Box PC, IPC647E Rack PC, IPC847E Rack PC.</p> <p>Requirement: Linux (Industrial OS 3.2.4 or higher) with UEFI boot; For supported Linux versions, see Technical specifications; For optimal fail-safe operation, IPC configurations with NVRAM are recommended</p> <p>Type of delivery: en, de, fr, es, it, zh</p> <ul style="list-style-type: none"> Version V30.1 for Linux; Single license for one installation; software download including license key ¹⁾ 	6ES7672-7FD02-0YG0	<p>Accessories</p> <p>SIMATIC IPC</p> <ul style="list-style-type: none"> SIMATIC IPC BX-39A Microbox PC 6AG4142-.....-..... SIMATIC IPC PX-39A Panel PC 6AV7242-.....-..... SIMATIC IPC PX-39A Pro Panel PC 6AV7252-.....-..... SIMATIC IPC227G Nanobox PC 6ES7647-8C.....-..... SIMATIC IPC277G Panel PC 6AV7886-0.....-..... SIMATIC IPC277G Pro Panel PC 6AV7886-1.....-..... SIMATIC IPC427E Microbox PC 6AG4141-.....-..... SIMATIC IPC477E Panel PC 6AV7241-.....-..... SIMATIC IPC477E Pro Panel PC 6AV7251-.....-..... SIMATIC IPC627E Box PC 6AG4131-3.....-..... SIMATIC IPC677E Panel PC 6AV7261-.....-..... IPC647E Rack PC 6AG4112-3.....-..... IPC847E Rack PC 6AG4114-3.....-..... <p>CP 1625 communications processor</p> <p>PCI Express x1 card for connecting PROFINET with IRT to the SIMATIC S7-1500 Software Controller</p> <p>6ES7648-2CF10-1AA0</p> <p>CP 5622 communications processor</p> <p>PCI Express x1 card (32-bit) for connecting a programming device or PC to PROFIBUS (can only be used with version V21.9)</p> <p>6GK1562-2AA00</p> <p>CP 5623 communications processor</p> <p>PCI Express x1 card (32-bit) for connection to PROFIBUS incl. DP-Base software with NCM PC; DP-RAM interface for DP master or DP device, incl. PG and FDL protocols; single license for 1 installation, Runtime software, software and electronic manual on CD-ROM, Conformance Class A; for operating system support see SIMATIC NET software; en/de (can only be used with version V21.9)</p> <p>6GK1562-3AA00</p>

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7672-7FD02-0YG0 SIMATIC SW Ctrl CPU 1507S F Linux DL	Article number	6ES7672-7FD02-0YG0 SIMATIC SW Ctrl CPU 1507S F Linux DL
General information		for floating point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor
Product type designation	CPU 1507S F	Counters, timers and their retentivity	
Engineering with		S7 counter	
• STEP 7 TIA Portal configurable/integrated from version	V18	• Number	2 048
Memory		IEC counter	
Work memory		• Number	Any (only limited by the main memory)
• integrated (for program)	7.5 Mbyte	S7 times	
• integrated (for data)	20 Mbyte	• Number	2 048
• integrated (for CPU function library of CPU Runtime)	50 Mbyte	IEC timer	
Load memory		• Number	Any (only limited by the main memory)
• integrated (on PC mass storage)	320 Mbyte	Data areas and their retentivity	
CPU processing times		Flag	
for bit operations, typ.	1 ns; On IPC427E, Intel Xeon processor	• Size, max.	16 kbyte
for word operations, typ.	2 ns; On IPC427E, Intel Xeon processor	Address area	
for fixed point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor	I/O address area	
		• Inputs	32 kbyte
		• Outputs	32 kbyte

Software Controllers

SIMATIC S7-1500 Software Controllers Fail-safe CPUs

CPU 1507S F Linux

Technical specifications

Article number	6ES7672-7FD02-0YG0 SIMATIC SW Ctrl CPU 1507S F Linux DL
Time of day	
Clock	
• Type	Software clock, synchronizable, no battery backup
Interfaces	
Number of interfaces	3
1. Interface	
Interface type	CP 1625
Number of connections	128
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	2
• integrated switch	Yes
Protocols	
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0
PROFINET IO Controller	
Services	
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs
- IRT	Yes
- PROFlenergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625
- Number of connectable IO Devices, max.	256
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- IO Devices changing during operation (partner ports), supported	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte

Article number	6ES7672-7FD02-0YG0 SIMATIC SW Ctrl CPU 1507S F Linux DL
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFlenergy	Yes
- Prioritized startup	Yes; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
- PROFINET Security Class	SNMP Configuration and DCP Read Only
2. Interface	
Interface type	Onboard PROFINET / IE interface X2/X3 of the SIMATIC IPC, Intel Springville i210T
Number of connections	128
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	1
• integrated switch	No
Protocols	
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• PROFIBUS DP master	No
• PROFIBUS DP slave	No
• SIMATIC communication	Yes
• Open IE communication	Yes
• Web server	Yes
• Media redundancy	No
PROFIBUS DP master	
• Number of DP slaves, max.	Profibus interface is not available.
Services	
- Equidistance	No
- Isochronous mode	No

Technical specifications

Article number	6ES7672-7FD02-0YG0 SIMATIC SW Ctrl CPU 1507S F Linux DL
PROFINET IO Controller	
Services	
- Isochronous mode	No
- IRT	No
- PROFinergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices for RT, max.	128
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte
PROFINET IO Device	
Services	
- Isochronous mode	No
- IRT	No
- PROFinergy	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
- PROFINET Security Class	SNMP Configuration and DCP Read Only
Protocols	
Number of connections	
• Number of connections, max.	128
Redundancy mode	
Media redundancy	
- MRP	Yes
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes; not via Linux interfaces
OPC UA	
• OPC UA Client	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space

Article number	6ES7672-7FD02-0YG0 SIMATIC SW Ctrl CPU 1507S F Linux DL
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	4 800
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09
Hardware requirement	
Hardware required	SIMATIC IPC227G, IPC277G (Pro), IPC427E, IPC477E (Pro), IPC BX-39A, IPC PX-39A (Pro)
Processor	
• Single-core processor	No
• Single-core processor with hyper-threading	No
• Multi-core processor	Yes
• Multi-core processor with hyper-threading	Yes
• occupied cores	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S
Memory	
• Work memory, min.	8 Gbyte
• Hard disk memory required for installation	3 Gbyte
• Temporary hard disk memory for installation	300 Mbyte
• Hard disk memory required at runtime	1 700 Mbyte

Software Controllers

SIMATIC S7-1500 Software Controllers


Fail-safe CPUs

CPU 1507S F Linux

Technical specifications

Article number	6ES7672-7FD02-0YG0 SIMATIC SW Ctrl CPU 1507S F Linux DL
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- CFC	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Write protection for Failsafe	Yes
• Protection level: Complete protection	Yes
• User administration	Yes
• Number of users	100
Open Development interfaces	
• Size of ODK SO file, max.	9.8 Mbyte

Overview

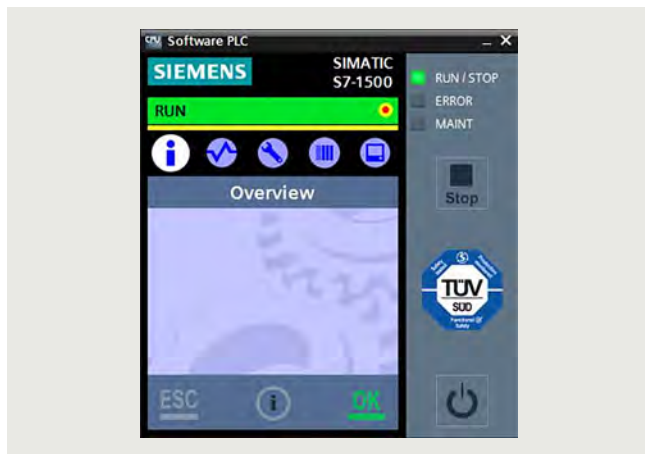

- SIMATIC S7-1500 Software Controller with Windows as operating system for implementing the functions of a SIMATIC S7-1500 Controller on a SIMATIC IPC
- For use with control applications with increased requirements for program and data memory
- For use as a PC-based controller in machines with distributed I/O via PROFINET
- For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET connections
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- Supports PROFIsafe in distributed configurations
- Optimized for PC-based control tasks with the IPC627E Box PC, the IPC677E Panel PC, and the IPC647E and IPC847E Rack PCs
- Execution of functions and algorithms implemented with high-level languages under Windows (C/C++, C#, VB) and locally in the CPU 1508S F (C/C++)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes (motion control functionalities require PROFINET IRT capability via CP 1625 and a PCIe slot on the IPC)
- Integrated web server for diagnostics with the option of creating user-defined web pages
- OPC UA server (data access) and client as Runtime option for easy connection of the SIMATIC S7-1500 Software Controller to Windows applications or non-Siemens devices/systems

New in version V30.1

- Support for the current IPC generation SIMATIC IPC427E, IPC477E as well as SIMATIC IPC BX-39A and PX-39A
- Support of UEFI boot and M.2 SSD on all IPC platforms
- Improved commissioning:
The resource allocation for the SIMATIC S7-1500 Software Controller, e.g. the interfaces used for PROFINET, is now set using a separate tool and no longer with the two-stage download from STEP 7. This permits a flexible choice of IPC without modifying the STEP 7 project
- Communication between Windows applications and the SIMATIC S7-1500 Software Controller is achieved via pure TCP/IP links. Communication with the SIMATIC S7-1500 Software Controller is possible directly through the PC interfaces on the Windows side ("bridging")
- Safety functions possible on IPC without NVRAM
- No direct support from PROFIBUS, PROFIBUS support is only possible with an additional plug-in card
- In order to use the SIMATIC S7-1500 Software Controller V30.1 instead of a previous version (e.g. V21.9), changes in the configuration and installation are required.

Software Controllers

SIMATIC S7-1500 Software Controllers Fail-safe CPUs

CPU 1508S F Windows

Ordering data

Article No.

Article No.

SIMATIC S7-1500 Software Controller CPU 1508S F

For implementing the function of a fail-safe S7-1500 Controller on a SIMATIC IPC

Target system:

Optimized for PC-based control tasks with:

IPC677E Panel PC,
IPC627E Box PC,
IPC647E Rack PC,
IPC847E Rack PC;

Can also be used with:

IPC477E Panel PC,
IPC PX-39A Panel PC,
IPC427E Box PC,
IPC BX-39A Box PC;

Requirement:

Windows 10 (64-bit) with UEFI boot; for supported Windows 10 versions, see Technical specifications.

For optimum fail-safe operation, IPC configurations with NVRAM are recommended (requirement for use of version V21.9).

Type of delivery:

en, de, fr, es, it, zh

- Version V30.1 for Windows; Single license for one installation Software on DVD, license key on USB flash drive
- Version V30.1 for Windows; Single license for one installation; Software download including license key ¹⁾
- Version V30.1 for Windows; Upgrade license for one installation For upgrading existing installations with CPU 1508S F Version 2 Software download including license key ¹⁾
- Version V29.1 for Windows; Single license for one installation Software and documentation on DVD, license key on USB flash drive
Note:
for safety functions, IPC with NVRAM are absolutely necessary
- Version V29.1 for Windows; Single license for one installation; Software download including license key ¹⁾
Note:
for safety functions, IPC with NVRAM are absolutely necessary

6ES7672-8FC02-0YA0

6ES7672-8FC02-0YG0

6ES7672-8FC02-0YK0

6ES7672-8FC01-0YA0

6ES7672-8FC01-0YG0

Accessories

SIMATIC IPC

- SIMATIC IPC627E Box PC
- SIMATIC IPC677E Panel PC
- SIMATIC IPC647E Rack PC
- SIMATIC IPC847E Rack PC
- SIMATIC IPC427E Microbox PC
- SIMATIC IPC477E Panel PC
- SIMATIC IPC BX-39A Microbox PC
- SIMATIC IPC PX-39A Panel PC

For more information, see Catalog ST 80 / ST PC

6AG4131-3....-....

6AV7261-.....-....

6AG4112-3....-....

6AG4114-3....-....

6AG4141-.....-....

6AV7241-.....-....

6AG4142-.....-....

6AV7242-.....-....

CP 1625

communications processor

PCI Express x1 card for connecting PROFINET with IRT to the SIMATIC S7-1500 Software Controller

6ES7648-2CF10-1AA0

CP 5622

communications processor

PCI Express x1 card (32-bit) for connecting a programming device or PC to PROFIBUS (can only be used with version V21.9)

6GK1562-2AA00

CP 5623

communications processor

PCI Express x1 card (32-bit) for connection to PROFIBUS incl. DP-Base software with NCM PC; DP-RAM interface for DP master or DP device, incl. PG and FDL protocols; single license for 1 installation, Runtime software, software and electronic manual on CD-ROM, Conformance Class A; for operating system support see SIMATIC NET software; en/de (can only be used with version V21.9)

6GK1562-3AA00

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7672-8FC01-0YA0 SIMATIC Failsafe SW Ctrl CPU 1508S F	6ES7672-8FC02-0YA0 SIMATIC Failsafe SW Ctrl CPU 1508S F
General information		
Product type designation	CPU 1508S F	CPU 1508S F
Engineering with		
• STEP 7 TIA Portal configurable/integrated from version	V17	V19
Memory		
Work memory		
• integrated (for program)	12.5 Mbyte	12.5 Mbyte
• integrated (for data)	100 Mbyte	100 Mbyte
• integrated (for CPU function library of CPU Runtime)	50 Mbyte	50 Mbyte
Load memory		
• integrated (on PC mass storage)	1 024 Mbyte	1 024 Mbyte
CPU processing times		
for bit operations, typ.	1 ns; On IPC427E, Intel Xeon processor	1 ns; On IPC427E, Intel Xeon processor
for word operations, typ.	2 ns; On IPC427E, Intel Xeon processor	2 ns; On IPC427E, Intel Xeon processor
for fixed point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor	2 ns; On IPC427E, Intel Xeon processor
for floating point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor	2 ns; On IPC427E, Intel Xeon processor
Counters, timers and their retentivity		
S7 counter		
• Number	2 048	2 048
IEC counter		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times		
• Number	2 048	2 048
IEC timer		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity		
Flag		
• Size, max.	16 kbyte	16 kbyte
Address area		
I/O address area		
• Inputs	32 kbyte	32 kbyte
• Outputs	32 kbyte	32 kbyte
Time of day		
Clock		
• Type	Software clock, synchronizable, no battery backup	Software clock, synchronizable, no battery backup
Interfaces		
Number of interfaces	3	3
1. Interface		
Interface type	CP 1625	CP 1625
Number of connections	192	192
Interface types		
• RJ 45 (Ethernet)	Yes	Yes
- Transmission rate, max.	100 Mbit/s	100 Mbit/s
- Industrial Ethernet status LED	Yes	Yes
• Number of ports	2	2
• integrated switch	Yes	Yes
Protocols		
• IP protocol		Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy		Yes; MRP Automanager according to IEC 62439-2 Edition 2.0

Software Controllers

SIMATIC S7-1500 Software Controllers Fail-safe CPUs

CPU 1508S F Windows

Technical specifications

Article number	6ES7672-8FC01-0YA0 SIMATIC Failsafe SW Ctrl CPU 1508S F	6ES7672-8FC02-0YA0 SIMATIC Failsafe SW Ctrl CPU 1508S F
PROFINET IO Controller		
Services		
- Isochronous mode	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs	500 µs
- IRT	Yes	Yes
- PROFIenergy	Yes	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625
- Number of connectable IO Devices, max.	256; the maximal amount of supported devices on all interfaces (PN/PB) is 384 in total	256; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+128+125), but it is accepted to be limited to 384
- Of which IO devices with IRT, max.	64	64
- Number of connectable IO Devices for RT, max.	256	256
- of which in line, max.	256	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8	8
- IO Devices changing during operation (partner ports), supported	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class		1
Address area		
- Inputs, max.	16 kbyte	16 kbyte
- Outputs, max.	16 kbyte	16 kbyte
PROFINET IO Device		
Services		
- Isochronous mode	No	No
- IRT	Yes	Yes
- PROFIenergy	Yes	Yes
- Prioritized startup	Yes	Yes
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- Asset management record	Yes	Yes
- PROFINET Security Class		SNMP Configuration and DCP Read Only
2. Interface		
Interface type	Onboard PROFINET / IE interface X2 of the SIMATIC IPC, Intel Springville i210T	Onboard PROFINET / IE interface X2 of the SIMATIC IPC, Intel Springville i210T
Number of connections	192	192
Interface types		
• RJ 45 (Ethernet)	Yes	Yes
- Transmission rate, max.	100 Mbit/s	100 Mbit/s
• Number of ports	1	1
• integrated switch	No	No

Technical specifications

Article number	6ES7672-8FC01-0YA0 SIMATIC Failsafe SW Ctrl CPU 1508S F	6ES7672-8FC02-0YA0 SIMATIC Failsafe SW Ctrl CPU 1508S F
Protocols		
• IP protocol		Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• PROFIBUS DP master		No
• PROFIBUS DP slave		No
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes	Yes
• Web server	Yes	Yes
• Media redundancy	No	No
PROFINET IO Controller		
Services		
- Isochronous mode	No	No
- IRT	No	No
- PROFIenergy	Yes	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices for RT, max.	128; the maximal amount of supported devices on all interfaces (PN/PB) is 384 in total	128; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+128+125), but it is accepted to be limited to 384
- of which in line, max.	128	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8	8
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class		1
Address area		
- Inputs, max.	8 kbyte	8 kbyte
- Outputs, max.	8 kbyte	8 kbyte
PROFINET IO Device		
Services		
- Isochronous mode	No	No
- IRT	No	No
- PROFIenergy	Yes	Yes
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- Asset management record	Yes	Yes
- PROFINET Security Class		SNMP Configuration and DCP Read Only
3. Interface		
Interface type	PROFIBUS with CP 5622, CP 5622 onboard	
Number of connections	44	
Protocols		
• PROFIBUS DP master	Yes	
• PROFIBUS DP slave	No	
• SIMATIC communication	Yes	
PROFIBUS DP master		
• Number of DP slaves, max.	64	
Services		
- Equidistance	No	
- Isochronous mode	No	
Address area		
- Inputs, max.	8 kbyte	
- Outputs, max.	8 kbyte	

Software Controllers

SIMATIC S7-1500 Software Controllers

Fail-safe CPUs

CPU 1508S F Windows

Technical specifications

Article number	6ES7672-8FC01-0YA0 SIMATIC Failsafe SW Ctrl CPU 1508S F	6ES7672-8FC02-0YA0 SIMATIC Failsafe SW Ctrl CPU 1508S F
4. Interface		
Interface type	PROFIBUS with CP 5623	
Number of connections	44	
Interface types		
• RS 485	Yes	
Protocols		
• PROFIBUS DP master	Yes	
• PROFIBUS DP slave	No	
• SIMATIC communication	Yes; no PG/STEP 7 connection possible	
PROFIBUS DP master		
• Number of DP slaves, max.	125	
Protocols		
Number of connections		
• Number of connections, max.	192	192
Redundancy mode		
Media redundancy		
- MRP	Yes	Yes
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50
SIMATIC communication		
• S7 routing	Yes	Yes
OPC UA		
• OPC UA Client	Yes; Data access (read, write), method call	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space	Yes; Data access (read, write, subscribe), method call, custom address space
Supported technology objects		
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	4 800	4 800
• Required Motion Control resources		
- per speed-controlled axis	40	40
- per positioning axis	80	80
- per synchronous axis	160	160
- per external encoder	80	80
- per output cam	20	20
- per cam track	160	160
- per probe	40	40
Controller		
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring		
• High-speed counter	Yes	Yes
Standards, approvals, certificates		
Highest safety class achievable in safety mode		
• Performance level according to ISO 13849-1	PLe	PLe
• SIL acc. to IEC 61508	SIL 3	SIL 3
Probability of failure (for service life of 20 years and repair time of 100 hours)		
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09	< 1.00E-09

Technical specifications

Article number	6ES7672-8FC01-0YA0	6ES7672-8FC02-0YA0
	SIMATIC Failsafe SW Ctrl CPU 1508S F	SIMATIC Failsafe SW Ctrl CPU 1508S F
Hardware requirement		
Hardware required	SIMATIC IPC4x7E, IPC627D, IPC677D, IPC827D, configurations with NVRAM required; IPC6x7E, IPC847E	SIMATIC IPC427E, IPC477E (Pro), IPC BX-39A, IPC PX-39A (Pro), IPC627E, IPC677E, IPC647E, IPC847E
Processor		
• Single-core processor	No	No
• Single-core processor with hyper-threading	No	No
• Multi-core processor	Yes	Yes
• Multi-core processor with hyper-threading	Yes	Yes
• occupied cores	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S
Memory		
• Work memory, min.	8 Gbyte	8 Gbyte
• Hard disk memory required for installation	720 Mbyte	720 Mbyte
• Temporary hard disk memory for installation	230 Mbyte	230 Mbyte
• Hard disk memory required at runtime	1 000 Mbyte	1 661 Mbyte
Operating systems		
Runs under operating system		
• Windows 7	Yes; Professional, Enterprise, Ultimate (32 bit and 64 bit); Windows Embedded Standard 7 with delivery image of the SIMATIC IPC	No
• Windows 10	Yes; Windows 10 Enterprise 2016 LTSC, 64-bit, MUI on IPC2x7E, IPC4x7E, IPC6x7D, IPC8x7D; Windows 10 Enterprise 2019 LTSC 64-bit, MUI on IPC2x7E, IPC4x7E, IPC6x7E, IPC8x7E	Yes; Windows 10 Enterprise 2019 LTSC and 2021 LTSC, 64-bit, MUI
Configuration		
Configuration / programming		
Programming language		
- LAD	Yes; incl. failsafe	Yes; incl. failsafe
- FBD	Yes; incl. failsafe	Yes; incl. failsafe
- STL	Yes	Yes
- SCL	Yes	Yes
- CFC	No	Yes
- GRAPH	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Copy protection	Yes	Yes
• Block protection	Yes	Yes
Access protection		
• protection of confidential configuration data		Yes
• Protection level: Write protection	Yes	Yes
• Protection level: Read/write protection	Yes	Yes
• Protection level: Write protection for Failsafe	Yes	Yes
• Protection level: Complete protection	Yes	Yes
• User administration		Yes
• Number of users		100
Open Development interfaces		
• Size of ODK SO file, max.	9.8 Mbyte	9.8 Mbyte

Software Controllers

SIMATIC S7-1500 Software Controllers Fail-safe CPUs

CPU 1508S F Linux

Overview



- SIMATIC S7-1500 Software Controller V30.1 with Linux (Industrial OS 3.2.4 or higher) as operating system for implementing the functions of a SIMATIC S7-1500 Controller on SIMATIC IPC
- For use with control applications with increased requirements for program and data memory
- For use as a PC-based controller in machines with distributed I/O via PROFINET
- For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET connections
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- Supports PROFIsafe in distributed configurations
- Optimized for PC-based control tasks with the IPC627E Box PC, the IPC677E Panel PC, and the IPC647E and IPC847E Rack PCs
- Execution of functions and algorithms implemented with high-level languages (C++/Python) on Linux (Industrial OS 3.2.4 or higher) using the Realtime Information Backbone (RIB)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes (motion control functionalities require PROFINET IRT capability via CP 1625 and a PCIe slot on the IPC)
- Integrated web server for diagnostics with the option of creating user-defined web pages
- OPC UA server (data access) and client as Runtime option for easy connection of the SIMATIC S7-1500 Software Controller to Windows applications or non-Siemens devices/systems

New in version V30.1: General Sales Release Linux (Industrial OS 3.2.4 or higher)

- Support for the current IPC generation SIMATIC IPC427E, IPC477E as well as SIMATIC IPC BX-39A and PX-39A
- Support of UEFI boot and M.2 SSD on all IPC platforms
- Improved commissioning:
The resource allocation for the SIMATIC S7-1500 Software Controller, e.g. the interfaces used for PROFINET, is now set using a separate tool and no longer with the two-stage download from STEP 7. This permits a flexible choice of IPC without modifying the STEP 7 project
- Communication between Linux applications and the SIMATIC S7-1500 Software Controller is achieved via pure TCP/IP links. Communication with the SIMATIC S7-1500 Software Controller is possible directly through the PC interfaces on the Linux side ("bridging")
- Safety functions possible on IPC without NVRAM
- No direct support from PROFIBUS, PROFIBUS support is only possible with an additional plug-in card
- In order to use the SIMATIC S7-1500 Software Controller V30.1 instead of a previous version (e.g. V21.9), changes in the configuration and installation are required.

Ordering data	Article No.	Article No.
<p>SIMATIC S7-1500 Software Controller CPU 1508S F</p> <p>For implementing the function of a fail-safe S7-1500 Controller on a SIMATIC IPC with Linux as operating system (Industrial OS 3.2.4 or higher)</p> <p>Target system: Optimized for PC-based control tasks with: IPC677E Panel PC, IPC627E Box PC, IPC647E Rack PC, IPC847E Rack PC; Can also be used with: IPC477E Panel PC, IPC PX-39A Panel PC, IPC427E Box PC, IPC BX-39A Box PC;</p> <p>Requirement: Linux (Industrial OS 3.2.4 or higher) with UEFI boot; For supported Linux versions, see Technical specifications; For optimal fail-safe operation, IPC configurations with NVRAM are recommended</p> <p>Type of delivery: en, de, fr, es, it, zh</p> <ul style="list-style-type: none"> Version V30.1 for Windows; Single license for one installation; Software download including license key ¹⁾ 	6ES7672-8FD02-0YG0	<p>Accessories</p> <p>SIMATIC IPC</p> <ul style="list-style-type: none"> SIMATIC IPC627E Box PC 6AG4131-3....-.... SIMATIC IPC677E Panel PC 6AV7261-.....-.... SIMATIC IPC647E Rack PC 6AG4112-3....-.... SIMATIC IPC847E Rack PC 6AG4114-3....-.... SIMATIC IPC427E Microbox PC 6AG4141-.....-.... SIMATIC IPC477E Panel PC 6AV7241-.....-.... SIMATIC IPC BX-39A Microbox PC 6AG4142-.....-.... SIMATIC IPC PX-39A Panel PC 6AV7242-.....-.... <p>For more information, see Catalog ST 80 / ST PC</p> <p>CP 1625 communications processor 6ES7648-2CF10-1AA0</p> <p>PCI Express x1 card for connecting PROFINET with IRT to the SIMATIC S7-1500 Software Controller</p> <p>CP 5622 communications processor 6GK1562-2AA00</p> <p>PCI Express x1 card (32-bit) for connecting a programming device or PC to PROFIBUS (can only be used with version V21.9)</p> <p>CP 5623 communications processor 6GK1562-3AA00</p> <p>PCI Express x1 card (32-bit) for connection to PROFIBUS incl. DP-Base software with NCM PC; DP-RAM interface for DP master or DP device, incl. PG and FDL protocols; single license for 1 installation, Runtime software, software and electronic manual on CD-ROM, Conformance Class A; for operating system support see SIMATIC NET software; en/de (can only be used with version V21.9)</p>

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7672-8FD02-0YG0 SIMATIC Failsafe SW Ctrl CPU 1508S F DL	Article number	6ES7672-8FD02-0YG0 SIMATIC Failsafe SW Ctrl CPU 1508S F DL
General information		Counters, timers and their retentivity	
Product type designation	CPU 1508S F	S7 counter	
Engineering with		• Number	2 048
• STEP 7 TIA Portal configurable/integrated from version	V19	IEC counter	
Memory		• Number	Any (only limited by the main memory)
Work memory		S7 times	
• integrated (for program)	12.5 Mbyte	• Number	2 048
• integrated (for data)	100 Mbyte	IEC timer	
• integrated (for CPU function library of CPU Runtime)	50 Mbyte	• Number	Any (only limited by the main memory)
Load memory		Data areas and their retentivity	
• integrated (on PC mass storage)	1 024 Mbyte	Flag	
CPU processing times		• Size, max.	16 kbyte
for bit operations, typ.	1 ns; On IPC427E, Intel Xeon processor	Address area	
for word operations, typ.	2 ns; On IPC427E, Intel Xeon processor	I/O address area	
for fixed point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor	• Inputs	32 kbyte
for floating point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor	• Outputs	32 kbyte
		Time of day	
		Clock	
		• Type	Software clock, synchronizable, no battery backup

Software Controllers

SIMATIC S7-1500 Software Controllers Fail-safe CPUs

CPU 1508S F Linux

Technical specifications

Article number	6ES7672-8FD02-0YG0 SIMATIC Failsafe SW Ctrl CPU 1508S F DL
Interfaces	
Number of interfaces	3
1. Interface	
Interface type	CP 1625
Number of connections	192
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	2
• integrated switch	Yes
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0
PROFINET IO Controller	
Services	
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs
- IRT	Yes
- PROFlenergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625
- Number of connectable IO Devices, max.	256; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+128+125), but it is accepted to be limited to 384
- Of which IO devices with IRT, max.	64
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- IO Devices changing during operation (partner ports), supported	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	16 kbyte
- Outputs, max.	16 kbyte

Article number	6ES7672-8FD02-0YG0 SIMATIC Failsafe SW Ctrl CPU 1508S F DL
PROFINET IO Device	
Services	
- PG/OP communication	Yes
- Isochronous mode	No
- IRT	Yes
- PROFlenergy	Yes
- Prioritized startup	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
- PROFINET Security Class	SNMP Configuration and DCP Read Only
2. Interface	
Interface type	Onboard PROFINET / IE interface X2 of the SIMATIC IPC, Intel Springville i210T
Number of connections	192
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	1
• integrated switch	No
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• PROFIBUS DP master	No
• PROFIBUS DP slave	No
• SIMATIC communication	Yes
• Open IE communication	Yes
• Web server	Yes
• Media redundancy	No
PROFIBUS DP master	
• Number of DP slaves, max.	Profibus interface is not available.
Services	
- Equidistance	No
- Isochronous mode	No

Technical specifications

Article number	6ES7672-8FD02-0YG0 SIMATIC Failsafe SW Ctrl CPU 1508S F DL
PROFINET IO Controller	
Services	
- Isochronous mode	No
- IRT	No
- PROFinenergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices for RT, max.	128; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+128+125), but it is accepted to be limited to 384
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte
PROFINET IO Device	
Services	
- Isochronous mode	No
- IRT	No
- PROFinenergy	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
- PROFINET Security Class	SNMP Configuration and DCP Read Only
Protocols	
Number of connections	
• Number of connections, max.	192
Redundancy mode	
Media redundancy	
- MRP	Yes
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space

Article number	6ES7672-8FD02-0YG0 SIMATIC Failsafe SW Ctrl CPU 1508S F DL
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	4 800
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09

Software Controllers


SIMATIC S7-1500 Software Controllers Fail-safe CPUs

CPU 1508S F Linux

Technical specifications

Article number	6ES7672-8FD02-0YG0 SIMATIC Failsafe SW Ctrl CPU 1508S F DL
Hardware requirement	
Hardware required	SIMATIC IPC427E, IPC477E (Pro), IPC BX-39A, IPC PX-39A (Pro)
Processor	
• Single-core processor	No
• Single-core processor with hyper-threading	No
• Multi-core processor	Yes
• Multi-core processor with hyper-threading	Yes
• occupied cores	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S
Memory	
• Work memory, min.	8 Gbyte
• Hard disk memory required for installation	3 Gbyte
• Temporary hard disk memory for installation	300 Mbyte
• Hard disk memory required at runtime	1 700 Mbyte
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- CFC	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Write protection for Failsafe	Yes
• Protection level: Complete protection	Yes
• User administration	Yes
• Number of users	100
Open Development interfaces	
• Size of ODK SO file, max.	9.8 Mbyte

Overview

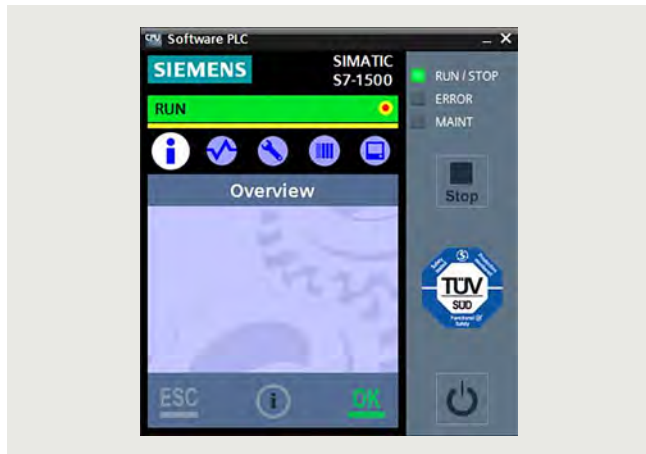

For the Software Controller CPU 1508S T, generally the same product information as for the CPU 1508S apply. Differences are specified in the product overview or the operating instructions. Special features of the CPU 1508S T compared to the standard CPU result from the optimization for Motion Control applications in the high-end range.

The main differences are:

- Adjustments to the quantity structure, e.g. data storage, Motion Control resources, IRT participants (see Technical specifications)
- Focus on real-time applications and performance of PLC applications as opposed to the performance of Windows applications.
- Parallel and independent operation of the Windows operating system and the PLC application is possible. However, a forced restart of the Windows system (e.g. after Windows update) will also cause the PLC (Windows SMIs) to restart
- Supported IPC hardware:
 - IPC 627E Box with Intel Core i7
 - IPC 677E Panel with Intel Core i7

Ordering data

Article No.

Article No.

<p>Software Controller CPU 1508S T</p> <p>For the implementation of a technology controller on SIMATIC IPC</p> <p>Target system: Optimized for PC-based control tasks with Box PC SIMATIC IPC627E and Panel PC SIMATIC IPC677E</p> <p>Requirements: Windows 10 (64-bit) with UEFI boot; for supported Windows 10 version, see Technical specifications</p> <p>Type of delivery: en, de, fr, es, it, zh</p>	<p>6ES7672-8TC02-0YA0</p>
<p>SIMATIC S7-1500, software Software Controller CPU 1508S T</p> <p>Single license for 1 installation, Runtime software Class A; Runtime software, software and documentation on DVD, license key on USB flash drive; 6 languages (en, de, it, fr, es, zh), runs on Windows 10 Reference hardware: IPC627E (i7)</p>	<p>6ES7672-8TC02-0YG0</p>
<p>SIMATIC S7-1500, software Software Controller CPU 1508S T</p> <p>Single license for 1 installation, Runtime software Class A; Runtime software, software, documentation and license key download¹⁾; 6 languages (de, en, it, fr, es, zh); runs on Windows 10; Reference hardware: IPC627E (i7) ***** Consignee email address required for delivery</p>	<p>6ES7672-8TC02-0YG0</p>

<p>Accessories</p> <p>SIMATIC IPC627E (Box PC)</p> <p>UHD graphics onboard; DP/DVI-D; 3x Gigabit Ethernet (IE/PN); 6x USB 3.1 Gen. 2; 1x serial (COM 1); RAID controller on board; watchdog, temperature and fan monitoring</p>	<p>6AG4131-3.....-....</p>
<p>SIMATIC IPC677E (Panel PC)</p> <p>UHD graphics onboard; DP/DVI-D; 3x Gigabit Ethernet (IE/PN); 6x USB 3.1 Gen. 2; 1x serial (COM 1); RAID controller on board; watchdog, temperature and fan monitoring</p>	<p>6AV7261-.....-....</p>

¹⁾ Up-to-date information and download availability can be found at <https://www.siemens.com/tia-online-software-delivery>.

Software Controllers

SIMATIC S7-1500 Software Controllers Technology CPUs

CPU 1508S T

Technical specifications

Article number	6ES7672-8TC02-0YA0 SIMATIC Software Controller CPU 1508S T
General information	
Product type designation	CPU 1508S T
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V19
Memory	
Work memory	
• integrated (for program)	12.5 Mbyte
• integrated (for data)	32 Mbyte
• integrated (for CPU function library of CPU Runtime)	50 Mbyte; Note: The "CPU function library of the CPU" are C/C++ blocks for the user program that were created using the SIMATIC ODK 1500S or Target 1500S.
Load memory	
• integrated (on PC mass storage)	1 024 Mbyte
CPU processing times	
for bit operations, typ.	1 ns; On IPC427E, Intel Xeon processor
for word operations, typ.	2 ns; On IPC427E, Intel Xeon processor
for fixed point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor
for floating point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte
• Outputs	32 kbyte
Time of day	
Clock	
• Type	Software clock, synchronizable, no battery backup
Interfaces	
Number of interfaces	3
1. Interface	
Interface type	CP 1625
Number of connections	192
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	2
• integrated switch	Yes

Article number	6ES7672-8TC02-0YA0 SIMATIC Software Controller CPU 1508S T
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0
PROFINET IO Controller Services	
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs
- IRT	Yes
- PROFINergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625
- Number of connectable IO Devices, max.	256; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+128+125), but it is accepted to be limited to 384
- Of which IO devices with IRT, max.	256; over CP1625 with DFP
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8
- IO Devices changing during operation (partner ports), supported	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	16 kbyte
- Outputs, max.	16 kbyte
PROFINET IO Device Services	
- Isochronous mode	No
- IRT	Yes
- PROFINergy	Yes
- Prioritized startup	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
- PROFINET Security Class	SNMP Configuration and DCP Read Only

Technical specifications

Article number	6ES7672-8TC02-0YA0 SIMATIC Software Controller CPU 1508S T
2. Interface	
Interface type	Onboard PROFINET / IE interface X2 of the SIMATIC IPC, Intel Springville i210T
Number of connections	192
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	1
• integrated switch	No
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• PROFIBUS DP master	No
• PROFIBUS DP slave	No
• SIMATIC communication	Yes
• Open IE communication	Yes
• Web server	Yes
• Media redundancy	No
PROFINET IO Controller	
Services	
- Isochronous mode	No
- IRT	No
- PROFlenergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices for RT, max.	128; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+ 128+125), but it is accepted to be limited to 384
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/ deactivated, max.	8
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte

Article number	6ES7672-8TC02-0YA0 SIMATIC Software Controller CPU 1508S T
PROFINET IO Device	
Services	
- Isochronous mode	No
- IRT	No
- PROFlenergy	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
- PROFINET Security Class	SNMP Configuration and DCP Read Only
Protocols	
Number of connections	
• Number of connections, max.	192
Redundancy mode	
Media redundancy	
- MRP	Yes
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space

Software Controllers

SIMATIC S7-1500 Software Controllers Technology CPUs


CPU 1508S T

Technical specifications

Article number	6ES7672-8TC02-0YA0 SIMATIC Software Controller CPU 1508S T
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	24 800
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
• Number of available Extended Motion Control resources for technology objects	768
• Required Extended Motion Control resources	
- per cam (1 000 points and 50 segments)	2
- per cam (10 000 points and 50 segments)	20
- for each set of kinematics	30
- Per leading axis proxy	3
• kinematics functions	
- kinematics with up to 4 interpolating axes	Yes
- kinematics with 5 or more interpolating axes	No
• Positioning axis	
- Number of positioning axes, max.	310
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes

Article number	6ES7672-8TC02-0YA0 SIMATIC Software Controller CPU 1508S T
Hardware requirement	
Processor	
• Single-core processor	No
• Single-core processor with hyper-threading	No
• Multi-core processor	Yes
• Multi-core processor with hyper-threading	Yes
• occupied cores	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S
Memory	
• Work memory, min.	8 Gbyte
• Hard disk memory required for installation	720 Mbyte
• Temporary hard disk memory for installation	230 Mbyte
• Hard disk memory required at runtime	1 661 Mbyte
Operating systems	
Runs under operating system	
• Windows 10	Yes; Windows 10 Enterprise 2019 LTSC
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes
- FBD	Yes
- STL	Yes
- SCL	Yes
- CFC	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Complete protection	Yes
• User administration	Yes
• Number of users	100
Open Development interfaces	
• Size of ODK SO file, max.	9.8 Mbyte

Overview

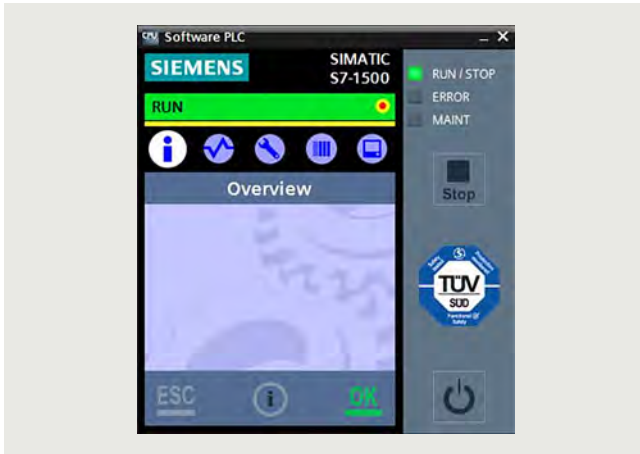

For the Software Controller CPU 1508S TF, generally the same product information as for the CPU 1508S F apply. Differences are specified in the product overview or the operating instructions. Special features of the CPU 1508S TF compared to the failsafe CPU result from the optimization for Motion Control applications in the high-end range.

The main differences are:

- Adjustments to the quantity structure, e.g. data storage, Motion Control resources, IRT participants (see Technical specifications)
- Focus on real-time applications and performance of PLC applications as opposed to the performance of Windows applications
- Parallel and independent operation of the Windows operating system and the PLC application is possible. However, a forced restart of the Windows system (e.g. after Windows update) will also cause the PLC (Windows SMIs) to restart
- Supported IPC hardware:
 - IPC 627E Box with Intel Core i7
 - IPC 677E Panel with Intel Core i7

Ordering data

Article No.

Software Controller CPU 1508S TF

For the implementation of a fail-safe technology controller on SIMATIC IPC

Target system:

Optimized for PC-based control tasks with Box PC SIMATIC IPC627E and Panel PC SIMATIC IPC677E

Requirements:

Windows 10 (64-bit) with UEFI boot; for supported Windows 10 version, see Technical specifications

Type of delivery:

en, de, fr, es, it, zh

SIMATIC S7-1500, software Software Controller CPU 1508S TF

6ES7672-8UC02-0YA0

Single license for 1 installation, Runtime software Class A; Runtime software, software, and documentation on DVD, license key on USB flash drive; 6 languages (en, de, it, fr, es, zh), Runs on Windows 10
Reference hardware: IPC627E (i7)

SIMATIC S7-1500, software Software Controller CPU 1508S TF

6ES7672-8UC02-0YG0

Single license for 1 installation, Runtime software Class A; Runtime software, software, documentation and license key download¹⁾; 6 languages (de, en, it, fr, es, zh); runs on Windows 10; Reference hardware: IPC627E (i7); Consignee email address required for delivery

Accessories

SIMATIC IPC627E (Box PC)

6AG4131-3.....

UHD graphics onboard; DP/DVI-D; 3x Gigabit Ethernet (IE/PN); 6x USB 3.1 Gen. 2; 1x serial (COM 1); RAID controller on board; watchdog, temperature and fan monitoring

SIMATIC IPC677E (Panel PC)

6AV7261-.....

UHD graphics onboard; DP/DVI-D; 3x Gigabit Ethernet (IE/PN); 6x USB 3.1 Gen. 2; 1x serial (COM 1); RAID controller on board; watchdog, temperature and fan monitoring

¹⁾ Up-to-date information and download availability can be found at <https://www.siemens.com/tia-online-software-delivery>.

Software Controllers

SIMATIC S7-1500 Software Controllers Technology CPUs

CPU 1508S TF

Technical specifications

Article number	6ES7672-8UC02-0YA0 SIMATIC Software Controller CPU 1508S TF
General information	
Product type designation	CPU 1508S TF
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V19
Memory	
Work memory	
• integrated (for program)	12.5 Mbyte
• integrated (for data)	32 Mbyte
• integrated (for CPU function library of CPU Runtime)	50 Mbyte; Note: The "CPU function library of the CPU" are C/C++ blocks for the user program that were created using the SIMATIC ODK 1500S or Target 1500S.
Load memory	
• integrated (on PC mass storage)	1 024 Mbyte
CPU processing times	
for bit operations, typ.	1 ns; On IPC427E, Intel Xeon processor
for word operations, typ.	2 ns; On IPC427E, Intel Xeon processor
for fixed point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor
for floating point arithmetic, typ.	2 ns; On IPC427E, Intel Xeon processor
Counters, timers and their retentivity	
S7 counter	
• Number	2 048
IEC counter	
• Number	Any (only limited by the main memory)
S7 times	
• Number	2 048
IEC timer	
• Number	Any (only limited by the main memory)
Data areas and their retentivity	
Flag	
• Size, max.	16 kbyte
Address area	
I/O address area	
• Inputs	32 kbyte
• Outputs	32 kbyte
Time of day	
Clock	
• Type	Software clock, synchronizable, no battery backup
Interfaces	
Number of interfaces	3
1. Interface	
Interface type	CP 1625
Number of connections	192
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	2
• integrated switch	Yes

Article number	6ES7672-8UC02-0YA0 SIMATIC Software Controller CPU 1508S TF
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes; Optionally also encrypted
• Web server	Yes
• Media redundancy	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0
PROFINET IO Controller Services	
- Isochronous mode	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs
- IRT	Yes
- PROFINergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205) or CP1625
- Number of connectable IO Devices, max.	256; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+128+125), but it is accepted to be limited to 384
- Of which IO devices with IRT, max.	256; over CP1625 with DFP
- Number of connectable IO Devices for RT, max.	256
- of which in line, max.	256
- Number of IO Devices that can be simultaneously activated/ deactivated, max.	8
- IO Devices changing during operation (partner ports), supported	Yes; the CPU and changing IO devices must be separated by a switch (e.g. SCALANCE X205)
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	16 kbyte
- Outputs, max.	16 kbyte
PROFINET IO Device Services	
- Isochronous mode	No
- IRT	Yes
- PROFINergy	Yes
- Prioritized startup	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
- PROFINET Security Class	SNMP Configuration and DCP Read Only

Technical specifications

Article number	6ES7672-8UC02-0YA0 SIMATIC Software Controller CPU 1508S TF
2. Interface	
Interface type	Onboard PROFINET / IE interface X2 of the SIMATIC IPC, Intel Springville i210T
Number of connections	192
Interface types	
• RJ 45 (Ethernet)	Yes
- Transmission rate, max.	100 Mbit/s
- Industrial Ethernet status LED	Yes
• Number of ports	1
• integrated switch	No
Protocols	
• IP protocol	Yes; IPv4
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• PROFIBUS DP master	No
• PROFIBUS DP slave	No
• SIMATIC communication	Yes
• Open IE communication	Yes
• Web server	Yes
• Media redundancy	No
PROFINET IO Controller	
Services	
- Isochronous mode	No
- IRT	No
- PROFlenergy	Yes
- Prioritized startup	Yes; max. 32 PROFINET devices; if you want to use the "Prioritized startup" functionality in STEP 7 for the PROFINET interface of the CPU, the CPU and the device must be separated by means of a switch (e.g. SCALANCE X205)
- Number of connectable IO Devices for RT, max.	128; the maximal amount of supported devices on all interfaces (PN/PB) is 384 (256+128) in total; theoretically it should be 509 (256+ 128+125), but it is accepted to be limited to 384
- of which in line, max.	128
- Number of IO Devices that can be simultaneously activated/ deactivated, max.	8
- Number of IO Devices per tool, max.	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1
Address area	
- Inputs, max.	8 kbyte
- Outputs, max.	8 kbyte

Article number	6ES7672-8UC02-0YA0 SIMATIC Software Controller CPU 1508S TF
PROFINET IO Device	
Services	
- Isochronous mode	No
- IRT	No
- PROFlenergy	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
- Asset management record	Yes
- PROFINET Security Class	SNMP Configuration and DCP Read Only
Protocols	
Number of connections	
• Number of connections, max.	192
Redundancy mode	
Media redundancy	
- MRP	Yes
- MRPD	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50
SIMATIC communication	
• S7 routing	Yes
OPC UA	
• OPC UA Client	Yes; Data access (read, write), method call
• OPC UA Server	Yes; Data access (read, write, subscribe), method call, custom address space

Software Controllers

SIMATIC S7-1500 Software Controllers Technology CPUs

CPU 1508S TF

Technical specifications

Article number	6ES7672-8UC02-0YA0 SIMATIC Software Controller CPU 1508S TF
Supported technology objects	
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool or SIZER
• Number of available Motion Control resources for technology objects	24 800
• Required Motion Control resources	
- per speed-controlled axis	40
- per positioning axis	80
- per synchronous axis	160
- per external encoder	80
- per output cam	20
- per cam track	160
- per probe	40
• Number of available Extended Motion Control resources for technology objects	768
• Required Extended Motion Control resources	
- per cam (1 000 points and 50 segments)	2
- per cam (10 000 points and 50 segments)	20
- for each set of kinematics	30
- Per leading axis proxy	3
• kinematics functions	
- kinematics with up to 4 interpolating axes	Yes
- kinematics with 5 or more interpolating axes	No
• Positioning axis	
- Number of positioning axes, max.	310
Controller	
• PID_Compact	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature
Counting and measuring	
• High-speed counter	Yes
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Probability of failure (for service life of 20 years and repair time of 100 hours)	
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09

Article number	6ES7672-8UC02-0YA0 SIMATIC Software Controller CPU 1508S TF
Hardware requirement	
Processor	
• Single-core processor	No
• Single-core processor with hyper-threading	No
• Multi-core processor	Yes
• Multi-core processor with hyper-threading	Yes
• occupied cores	1; For multicore processors with activated Hyper-Threading, one complete physical core is reserved for the CPU 1507S
Memory	
• Work memory, min.	8 Gbyte
• Hard disk memory required for installation	720 Mbyte
• Temporary hard disk memory for installation	230 Mbyte
• Hard disk memory required at runtime	1 661 Mbyte
Operating systems	
Runs under operating system	
• Windows 10	Yes; Windows 10 Enterprise 2019 LTSC
Configuration	
Configuration / programming	
Programming language	
- LAD	Yes; incl. failsafe
- FBD	Yes; incl. failsafe
- STL	Yes
- SCL	Yes
- CFC	Yes
- GRAPH	Yes
Know-how protection	
• User program protection/password protection	Yes
• Copy protection	Yes
• Block protection	Yes
Access protection	
• protection of confidential configuration data	Yes
• Protection level: Write protection	Yes
• Protection level: Read/write protection	Yes
• Protection level: Write protection for Failsafe	Yes
• Protection level: Complete protection	Yes
• User administration	Yes
• Number of users	100
Open Development interfaces	
• Size of ODK SO file, max.	9.8 Mbyte

Overview ODK 1500S SQL driver

Note

This catalog entry contains non-binding information on a supplementary application software for the SIMATIC S7-1500 Software Controller and the SIMATIC ET 200SP Open Controller.

Overview

The ODK 1500S SQL driver enables direct access to an SQL database from the PLC program. In this case the database can be installed on the same computer as the S7-1500 Software Controller or in the network.

- Direct data exchange with SQL-based database by means of SQL commands from the PLC program
- Connection to SQL-based database on the same PC or to database servers in the network

Technical specifications

Supported SQL commands	<ul style="list-style-type: none"> • SELECT • INSERT • UPDATE • DELETE
Supported data types	All standard SQL data types
System requirements	SIMATIC IPC with S7-1500 Software Controller or SIMATIC ET 200SP Open Controller STEP 7 in the TIA Portal V13 SP1
<ul style="list-style-type: none"> • Runtime PC • Engineering 	

More information

If you are interested, please contact your sales representative under <http://www.automation.siemens.com/partner/>.

You can find Service and Support under <https://support.industry.siemens.com/cs/ww/en/view/109479140>.

Overview ODK 1500S XML Data Access driver

Note

This catalog entry contains non-binding information about supplementary application software for the SIMATIC S7-1500 Software Controller and the SIMATIC ET 200SP Open Controller.

Overview

With the function blocks of the ODK 1500S XML Data Access driver it is possible to access specific information in XML files in the Windows file system from the PLC program.

XPath expressions are used for accessing XML file elements since they provide the highest possible flexibility for processing XML data. This means that extremely large XML files can be edited, too.

The driver offers the following functionality:

- XML data can be read into and processed in the PLC.
- XML data can be modified and written back to the XML file.

Technical specifications

System requirements	SIMATIC IPC with SIMATIC S7-1500 Software Controller or SIMATIC ET 200SP Open Controller STEP 7 in TIA Portal V13 SP1
<ul style="list-style-type: none"> • Runtime PC • Engineering 	

More information

If you are interested, please contact your sales representative under <http://www.automation.siemens.com/partner/>.

You can find Service and Support under <https://support.industry.siemens.com/cs/ww/en/view/109479496>.

Software Controllers

SIMATIC S7-1500 Software Controllers Add-on applications

ODK 1500S FileServer, ODK 1500S SMX driver, ODK 1500S serial driver

Overview ODK 1500S FileServer

Note

This catalog entry contains non-binding information about supplementary application software for the SIMATIC S7-1500 Software Controller and the SIMATIC ET 200SP Open Controller.

Overview

The ODK 1500S FileServer enhances the SIMATIC S7-1500 Software Controller file function with an option enabling direct access to the Windows file system of the PC from the STEP 7 program.

The driver enables reading and writing of data blocks in/from files in structured form. Various file formats are supported.

There are also FBs available for handling files (e.g. renaming, deleting).

Technical specifications

Supported file formats	<ul style="list-style-type: none"> • CSV • ASCII • Windows-INI • XML ¹⁾ • Binary
System requirements	SIMATIC IPC with SIMATIC S7-1500 Software Controller or SIMATIC ET 200SP Open Controller STEP 7 in TIA Portal V13 SP1
<ul style="list-style-type: none"> • Runtime PC • Engineering 	

¹⁾ The XML format is predefined. A DB can be saved and read in as an XML file. It is not possible to parse any particular XML file.

More information

If you are interested, please contact your sales representative under <http://www.automation.siemens.com/partner/>.

You can find Service and Support under <https://support.industry.siemens.com/cs/ww/en/view/109479497>.

Overview ODK 1500S SMX driver

Note

This catalog entry contains non-binding information about supplementary application software for the SIMATIC S7-1500 Software Controller and the SIMATIC ET 200SP Open Controller.

Overview

The ODK 1500S SMX driver permits access from a Windows user program to data of the PLC program. A shared memory which can be accessed by the PLC and user program is set up for this purpose. The ODK 1500S simplifies the changeover to the SIMATIC S7-1500 Software Controller of applications that previously used the SMX interface of the SIMATIC WinAC RTX.

More information

If you are interested, please contact your sales representative under <http://www.automation.siemens.com/partner/>.

You can find Service and Support under <https://support.industry.siemens.com/cs/ww/en/view/109741583>.

Overview ODK 1500S serial driver

Note

This catalog entry contains non-binding information about supplementary application software for the SIMATIC S7-1500 Software Controller and the SIMATIC ET 200SP Open Controller.

Overview

The ODK 1500S serial driver enables serial communication from the STEP 7 user program via the integrated serial interface of a SIMATIC IPC or, depending on the application environment, via a USB-to-serial adapter. All serial interfaces of the PC are supported, which are addressed in Windows as COM n interface, e.g. RS232, RS422 or RS485.

More information

If you are interested, please contact your sales representative under <http://www.automation.siemens.com/partner/>.

You can find Service and Support under <https://support.industry.siemens.com/cs/ww/en/view/109479259>.

Drive Controllers



9/2

Introduction

9/3

Technology CPUs

9/3


CPU 1504D TF, CPU 1507D TF

Drive Controllers

Introduction

Drive Controllers

Overview

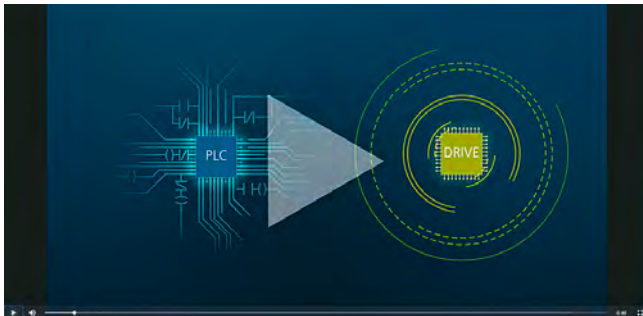

SIMATIC Drive Controller Video

https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6138318810001



The SIMATIC Drive Controller is available in two performance classes and meets even the most demanding Motion Control needs with the two fail-safe technology CPUs (CPU 1504D TF and CPU 1507D TF).

The fail-safe CPUs permit the processing of standard and safety programs on the same controller.

As technology CPUs, they also have extensive Motion Control functions such as:

- Speed and positioning axes
- Synchronous operation functions
 - Synchronizing with/without specifying the synchronization position
 - Actual value coupling
 - Shifting of the master value at following axis
 - Camming
 - Cross-PLC synchronous operation
- Cam
- Up to 4 encoder or measuring systems as actual position for position control
- Cyclic specification of the motion vector from the application (MotionIn interface)
- Kinematics
 - With up to 4 interpolating axes (e.g. cartesian portal, delta picker, roller picker, articulated arm, cylindrical robot, tripod picker and SCARA)
 - User-defined kinematics with up to 4 interpolating axes
 - Up to 6 interpolating axes with the additional Motion Control package "S7-1500T Motion Control KinPlus"
- External encoders, output cams and measuring inputs

The extensive integrated interfaces and technology I/Os are consistently available in all performance classes and enable the efficient implementation of compact and modular automation solutions with Motion Control based on the SINAMICS S120 drive system.

Thanks to fast system response times, the SIMATIC Drive Controller is the ideal solution wherever axes with high configuration limits and the shortest cycle times for high machine cycle rates and optimum product quality through deterministic and reproducible machine behavior are required.

The SIMATIC Drive Controller is configured in TIA Portal V16 or higher with the SIMATIC STEP 7 Professional engineering software and SINAMICS Startdrive.

The SIMATIC Drive Controller can be extended with components from the modular SINAMICS S120 drive system and SIMATIC automation components such as HMI and I/O systems. Additional drive systems such as e.g. SINAMICS S210 or SINAMICS G can easily be integrated via PROFINET.

Overview
CPU 1504D TF


CPU 1504D TF

- For standard and fail-safe applications with medium requirements for program scope and processing speed
- Ultra-compact due to the integration of fail-safe SIMATIC S7-1500 technology CPU, SINAMICS S120 drive control and technology I/Os in a single device
- Extensive integrated communication interfaces and technology I/Os for the efficient implementation of automation solutions with Motion Control
- Tried-and-tested engineering in TIA Portal

CPU 1507D TF


CPU 1507D TF

- For standard and fail-safe applications with high to very high requirements for program scope and processing speed
- Ultra-compact due to the integration of fail-safe SIMATIC S7-1500 technology CPU, SINAMICS S120 drive control and technology I/Os in a single device
- Extensive integrated communication interfaces and technology I/Os for the efficient implementation of automation solutions with Motion Control
- Tried-and-tested engineering in TIA Portal

Ordering data
Article No.
**SIMATIC S7-1500
Drive Controller CPU 1504D TF**

With SINAMICS S120 Integrated;
Fail-safe technology CPU;
Work memory: 4 MB for program,
6 MB for data;
Interfaces: 12 DI, 16 DI/DQ,
4 DRIVE-CLiQ, 3 PROFINET;
3+1+1 ports, 1 PROFIBUS;
SIMATIC Memory Card required

6ES7615-4DF10-0AB0
**SIMATIC S7-1500
Drive Controller CPU 1507D TF**

With SINAMICS S120 Integrated;
Fail-safe technology CPU;
Work memory: 15 MB for program,
40 MB for data;
Interfaces: 12 DI, 16 DI/DQ,
4 DRIVE-CLiQ, 3 PROFINET;
3+1+1 ports, 1 PROFIBUS;
SIMATIC Memory Card required

6ES7615-7DF10-0AB0
Accessories
SIMATIC Memory Card ¹⁾

- 4 MB
- 12 MB
- 24 MB
- 256 MB
- 2 GB
- 32 GB

6ES7954-8LC04-0AA0
6ES7954-8LE04-0AA0
6ES7954-8LF04-0AA0
6ES7954-8LL04-0AA0
6ES7954-8LP04-0AA0
6ES7954-8LT04-0AA0
Article No.
S7-1500T Motion Control KinPlus

For up to 6 interpolating axes with
CPU 1507D TF

- Motion Control package S7-1500T Motion Control KinPlus ³⁾
- SIMATIC Memory Card 2 GB for S7-1500T Motion Control KinPlus
- SIMATIC Memory Card 32 GB for S7-1500T Motion Control KinPlus

6ES7823-0KE00-1AA0
6ES7954-8LP80-0AA0
6ES7954-8LT80-0AA0

Drive licenses for integrated drive control

Safety Integrated Extended Functions

Certificate of License (CoL) for a SINAMICS S120 axis

- CoL in electronic form ³⁾
Email address required for delivery

6SL3074-0AA10-0AH0
Safety Integrated Advanced Functions

Certificate of License (CoL) for a SINAMICS S120 axis

- CoL in electronic form ³⁾
Email address required for delivery

6SL3074-0AA20-0AH0

¹⁾ When using the integrated SINAMICS S120 drive control, a memory card size of at least 12 MB is recommended (at least 24 MB for extensive DCC use, e.g. with a DCB Extension Library). A memory card size of at least 256 MB is required for firmware updates.

³⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Drive Controllers

Technology CPUs

CPU 1504D TF, CPU 1507D TF

Ordering data	Article No.	Article No.
Cogging torque compensation Certificate of License (CoL) for a SINAMICS S120 axis • CoL in electronic form ³⁾ Email address required for delivery	6SL3074-0AA15-0AH0	<i>Accessories for PROFIBUS (interface X126)</i> PROFIBUS RS485 bus connector With angular cable outlet (35°) with screw-type connection, max. transfer rate 12 Mbps • Without programming device/ PC interface • With programming device/ PC interface
Advanced Position Control (APC) Certificate of License (CoL) for a SINAMICS S120 axis • CoL in electronic form ³⁾ Email address required for delivery	6SL3074-0AA05-0AH0	PROFIBUS FastConnect RS485 bus connector With angular cable outlet (35°) with insulation displacement technology, max. transfer rate 12 Mbps • Without programming device/ PC interface • With programming device/ PC interface
Advanced Synchronous Reluctance Control Certificate of License (CoL) for a SINAMICS S120 axis • CoL in electronic form ³⁾ Email address required for delivery	6SL3074-0AA06-0AH0	FastConnect cables for PROFIBUS (sold by the meter; max. delivery unit 1000 m; minimum order quantity 20 m) • FC standard cable GP • FC robust cable • FC flexible cable • FC trailing cable, sheath color: Petrol • FC trailing cable, sheath color: Violet • FC food cable • FC ground cable • FC FRNC cable GP
Technology Extension VIBX (Vibration Extinction) Certificate of License (CoL) per SINAMICS Integrated • CoL in electronic form ³⁾ Email address required for delivery	6SL3077-0AA00-5AH0	<i>Accessories for PROFINET (interface X150 and X160; X130 only up to 100 Mbps)</i> IE FC RJ45 plug 145 145° cable outlet (10/100 Mbps) • 1 unit • 10 units • 50 units
Technology Extension SERVCOUPL (Servo Coupling) Certificate of License (CoL) per SINAMICS Integrated • CoL in electronic form ³⁾ Email address required for delivery	6SL3077-0AA00-8AH0	FastConnect cables for Industrial Ethernet/PROFINET (sold by the meter; max. delivery unit 1000 m; minimum order quantity 20 m) • IE FC standard cable GP 2x2 • IE FC flexible cable GP 2x2 • IE FC trailing cable GP 2x2 • IE FC trailing cable 2x2 • IE FC marine cable 2x2
DCB Extension Library Certificate of License (CoL) per SINAMICS Integrated • CoL in electronic form ³⁾ Email address required for delivery For further SINAMICS licenses (Controller Parameter Adaption, dynamic network support, line droop control, DC-DC-Converter, Polygonal Line, Setpoint Generator and Rail Control), see the SIMATIC Drive Controller System Manual.	6SL3077-0AA00-0AH0	<i>Accessories for PROFINET²⁾ (interface X130, for up to 1000 Mbps)</i> IE FC RJ45 plug 180 180° cable outlet (10/100/1000 Mbps) • 1 unit • 10 units • 50 units
<i>Control licenses</i> SIMATIC OPC UA S7-1500 Small Required for CPU 1504D TF Single Runtime License • License certificate for OPC UA Server (Data Access and OPC UA Client) • Download incl. license certificate for OPC UA Server (Data Access and OPC UA Client) ³⁾ Email address required for delivery	6ES7823-0BA00-1BA0 6ES7823-0BE00-1BA0	FastConnect cables for Industrial Ethernet/PROFINET (sold by the meter; max. delivery unit 1000 m; minimum order quantity 20 m) • IE FC standard cable GP 4x2 • IE FC flexible cable GP 4x2
SIMATIC OPC UA S7-1500 Large Required for CPU 1507D TF Single Runtime License • License certificate for OPC UA Server (Data Access and OPC UA Client) • Download incl. license certificate for OPC UA Server (Data Access and OPC UA Client) ³⁾ Email address required for delivery	6ES7823-0BA00-1DA0 6ES7823-0BE00-1DA0	• 6XV1830-0EH10 • 6XV1830-0JH10 • 6XV1831-2K • 6XV1830-3EH10 • 6XV1831-2L • 6XV1830-0GH10 • 6XV1830-3FH10 • 6XV1830-0LH10

²⁾ The Ethernet interface X130 supports 10, 100 and 1000 Mbps. For 1000 Mbps, 8-wire cables (4x2) and the 180° FastConnect plug in 1000 Mbps version must be used.

³⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Article No.
<i>Other accessories</i>		
PROFIBUS FastConnect stripping tool Pre-adjusted stripping tool for fast stripping of PROFIBUS FastConnect bus cables	6GK1905-6AA00	Engineering software The following engineering software is required for the SIMATIC Drive Controller: <ul style="list-style-type: none"> STEP 7 Professional V19 for configuring the control functionality STEP 7 Safety Advanced V19 for creating safety-related programs S7-PLCSIM Advanced V6.0 for simulation and validation of the control functionality SINAMICS Startdrive Basic V19⁴⁾ or SINAMICS Startdrive Advanced V19 for configuring the integrated drive control (SINAMICS Integrated) SINAMICS DCC V19 (option package for SINAMICS Startdrive) for the graphical configuration of control, computing and logic blocks
IE FC stripping tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	6GK1901-1GA00	
Dust protection blanking plugs For sealing unused DRIVE-CLiQ and PROFINET ports; blanking plug (50 units)	6SL3066-4CA00-0AA0	
<i>Spare parts</i>		
Bottom cover	6ES7615-0AC10-0AA0	
Top cover	6ES7615-0AC10-1AA0	Documentation SIMATIC Manual Collection Electronic manuals on DVD, multilingual 6ES7998-8XC01-8YE0
Spacer	6SL3064-1BB00-0AA0	
Terminal Kit <ul style="list-style-type: none"> 3 x I/O plug for X122/X132/X142 1 x 24 V plug for X124 5 x DRIVE-CLiQ blanking cover 	6SL3064-2CB00-0AA0	
		SIMATIC Manual Collection Update service for 1 year Current Manual Collection DVD and the three subsequent updates 6ES7998-8XC01-8YE2

⁴⁾ The SINAMICS Startdrive Basic commissioning tool is available for free on the internet under <https://www.siemens.com/startdrive>.

Technical specifications

Article number	6ES7615-4DF10-0AB0 SIMATIC Drive Controller, CPU 1504D TF	6ES7615-7DF10-0AB0 SIMATIC Drive Controller, CPU 1507D TF
General information		
Product type designation	CPU 1504D TF	CPU 1507D TF
Engineering with		
• STEP 7 TIA Portal configurable/integrated from version	V19 (FW V3.1) / V16 (FW V2.8) or higher	V19 (FW V3.1) / V16 (FW V2.8) or higher
Integrated drive control		
• Number of axes for servo control, max.	6	6
• Number of axes for vector control, max.	6	6
• Number of axes for V/f control, max.	12	12
• Remark	alternative control modes; drive control based on SINAMICS S120 CU320-2 (firmware version V5.x); functional subset compared to CU320-2: no free function blocks, ... ; for details, see the manual	alternative control modes; drive control based on SINAMICS S120 CU320-2 (firmware version V5.x); functional subset compared to CU320-2: no free function blocks, ... ; for details, see the manual
Supply voltage		
Rated value (DC)	24 V	24 V

Drive Controllers

Technology CPUs

CPU 1504D TF, CPU 1507D TF

Technical specifications

Article number	6ES7615-4DF10-0AB0 SIMATIC Drive Controller, CPU 1504D TF	6ES7615-7DF10-0AB0 SIMATIC Drive Controller, CPU 1507D TF
Memory		
Work memory		
• integrated (for program)	4 Mbyte	15 Mbyte
• integrated (for data)	6 Mbyte	40 Mbyte
Load memory		
• Plug-in (SIMATIC Memory Card), required	12 Mbyte; Recommended at least when integrated drive is used	12 Mbyte; Recommended at least when integrated drive is used
• Plug-in (SIMATIC Memory Card), max.	32 Gbyte	32 Gbyte
Counters, timers and their retentivity		
S7 counter		
• Number	2 048	2 048
IEC counter		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
S7 times		
• Number	2 048	2 048
IEC timer		
• Number	Any (only limited by the main memory)	Any (only limited by the main memory)
Data areas and their retentivity		
Flag		
• Size, max.	16 kbyte	16 kbyte
Address area		
I/O address area		
• Inputs	32 kbyte; All inputs are in the process image	32 kbyte; All inputs are in the process image
• Outputs	32 kbyte; All outputs are in the process image	32 kbyte; All outputs are in the process image
Time of day		
Clock		
• Type	Hardware clock	Hardware clock
Digital inputs		
integrated channels (DI)	28; max. depending on parameterization	28; max. depending on parameterization
Digital outputs		
integrated channels (DO)	16; max. depending on parameterization	16; max. depending on parameterization
Digital outputs, parameterizable	Yes; 8 DI/DQ (X122/X132, SINAMICS Integrated) + 8 DI/DQ (X142, PLC)	Yes; 8 DI/DQ (X122/X132, SINAMICS Integrated) + 8 DI/DQ (X142, PLC)
Short-circuit protection	Yes; electronic/thermal	Yes; electronic/thermal
1. Interface		
Interface types		
• RJ 45 (Ethernet)	Yes; X150	Yes; X150
• Number of ports	3	3
• integrated switch	Yes	Yes
Protocols		
• IP protocol	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy	Yes	Yes

Technical specifications

Article number	6ES7615-4DF10-0AB0 SIMATIC Drive Controller, CPU 1504D TF	6ES7615-7DF10-0AB0 SIMATIC Drive Controller, CPU 1507D TF
PROFINET IO Controller		
Services		
- Isochronous mode	Yes	Yes
- Direct data exchange	Yes; Requirement: IRT and isochronous mode (MRPD optional)	Yes; Requirement: IRT and isochronous mode (MRPD optional)
- shortest clock pulse	500 µs	250 µs
- IRT	Yes	Yes
- PROFIenergy	Yes; per user program	Yes; per user program
- Prioritized startup	Yes; Max. 32 PROFINET devices	Yes; Max. 32 PROFINET devices
- Number of connectable IO Devices, max.	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	256; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Of which IO devices with IRT, max.	64	64
- Number of connectable IO Devices for RT, max.	256	256
- of which in line, max.	256	256
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1	1
PROFINET IO Device		
Services		
- Isochronous mode	No	No
- shortest clock pulse	500 µs	250 µs
- IRT	Yes	Yes
- PROFIenergy	Yes; per user program	Yes; per user program
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program
- PROFINET Security Class	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only
2. Interface		
Interface types		
• RJ 45 (Ethernet)	Yes; X160	Yes; X160
• Number of ports	1	1
• integrated switch	No	No
Protocols		
• IP protocol	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	Yes	Yes
• PROFINET IO Device	Yes	Yes
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes
• Media redundancy	No	No

Drive Controllers

Technology CPUs

CPU 1504D TF, CPU 1507D TF

Technical specifications

Article number	6ES7615-4DF10-0AB0 SIMATIC Drive Controller, CPU 1504D TF	6ES7615-7DF10-0AB0 SIMATIC Drive Controller, CPU 1507D TF
PROFINET IO Controller		
Services		
- Isochronous mode	No	No
- Direct data exchange	No	No
- IRT	No	No
- PROFIenergy	Yes; per user program	Yes; per user program
- Prioritized startup	No	No
- Number of connectable IO Devices, max.	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	128; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET
- Number of connectable IO Devices for RT, max.	128	128
- of which in line, max.	128	128
- Number of IO Devices that can be simultaneously activated/deactivated, max.	8; in total across all interfaces	8; in total across all interfaces
- Number of IO Devices per tool, max.	8	8
- Updating times	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data	The minimum value of the update time also depends on communication share set for PROFINET IO, on the number of IO devices, and on the quantity of configured user data
- PROFINET Security Class	1	1
PROFINET IO Device		
Services		
- Isochronous mode	No	No
- IRT	No	No
- PROFIenergy	Yes; per user program	Yes; per user program
- Prioritized startup	No	No
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	4	4
- activation/deactivation of I-devices	Yes; per user program	Yes; per user program
- Asset management record	Yes; per user program	Yes; per user program
- PROFINET Security Class	SNMP Configuration and DCP Read Only	SNMP Configuration and DCP Read Only
3. Interface		
Interface types		
• RJ 45 (Ethernet)	Yes; X130	Yes; X130
• Number of ports	1	1
• integrated switch	No	No
Protocols		
• IP protocol	Yes; IPv4	Yes; IPv4
• PROFINET IO Controller	No	No
• PROFINET IO Device	No	No
• SIMATIC communication	Yes	Yes
• Open IE communication	Yes; Optionally also encrypted	Yes; Optionally also encrypted
• Web server	Yes	Yes
4. Interface		
Interface types		
• RS 485	Yes; X126	Yes; X126
• Number of ports	1	1
Protocols		
• PROFIBUS DP master	Yes	Yes
• PROFIBUS DP slave	No	No
• SIMATIC communication	Yes	Yes
PROFIBUS DP master		
• Number of DP slaves, max.	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET	125; In total, up to 1 000 distributed I/O devices can be connected via AS-i, PROFIBUS or PROFINET

Technical specifications

Article number	6ES7615-4DF10-0AB0 SIMATIC Drive Controller, CPU 1504D TF	6ES7615-7DF10-0AB0 SIMATIC Drive Controller, CPU 1507D TF
Protocols		
Number of connections		
• Number of connections, max.	384; Via integrated interfaces of the CPU	384; Via integrated interfaces of the CPU
Redundancy mode		
Media redundancy		
- Media redundancy	only via interface X150	only via interface X150
- MRP	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client	Yes; MRP Automanager according to IEC 62439-2 Edition 2.0, MRP Manager; MRP Client
- MRP interconnection, supported	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0	Yes; as MRP ring node according to IEC 62439-2 Edition 3.0
- MRPD	Yes; Requirement: IRT	Yes; Requirement: IRT
- Switchover time on line break, typ.	200 ms; For MRP, bumpless for MRPD	200 ms; For MRP, bumpless for MRPD
- Number of stations in the ring, max.	50	50
SIMATIC communication		
• S7 routing	Yes	Yes
OPC UA		
• OPC UA Client	Yes; Data Access (registered Read/Write), Method Call	Yes; Data Access (registered Read/Write), Method Call
• OPC UA Server	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space	Yes; Data Access (Read, Write, Subscribe), Method Call, Alarms & Condition (A&C), Custom Address Space
• Alarms and Conditions	Yes	Yes
Supported technology objects		
Motion Control	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool	Yes; Note: The number of technology objects affects the cycle time of the PLC program; selection guide via the TIA Selection Tool
• Number of available Motion Control resources for technology objects	3 200	12 800
• Required Motion Control resources		
- per speed-controlled axis	40	40
- per positioning axis	80	80
- per synchronous axis	160	160
- per external encoder	80	80
- per output cam	20	20
- per cam track	160	160
- per probe	40	40
• Number of available Extended Motion Control resources for technology objects	160	420
• Required Extended Motion Control resources		
- per cam (1 000 points and 50 segments)	2	2
- per cam (10 000 points and 50 segments)	20	20
- for each set of kinematics	30	30
- per Interpreter	60	60
- Per leading axis proxy	3	3
• kinematics functions		
- kinematics with up to 4 interpolating axes	Yes; max. 3D + orientation	Yes; max. 3D + orientation
- kinematics with 5 or more interpolating axes	No	Yes; only with S7-1500T Motion Control KinPlus, as of TIA Portal V18 / FW V3.0
- user-defined kinematics	Yes	Yes
- SIMATIC Safe Kinematics	No	Yes; optional, SIMATIC Safe Kinematics V17 or higher
Controller		
• PID_Compact	Yes; Universal PID controller with integrated optimization	Yes; Universal PID controller with integrated optimization
• PID_3Step	Yes; PID controller with integrated optimization for valves	Yes; PID controller with integrated optimization for valves
• PID-Temp	Yes; PID controller with integrated optimization for temperature	Yes; PID controller with integrated optimization for temperature
Counting and measuring		
• High-speed counter	Yes	Yes


Drive Controllers

Technology CPUs


CPU 1504D TF, CPU 1507D TF

Technical specifications

Article number	6ES7615-4DF10-0AB0 SIMATIC Drive Controller, CPU 1504D TF	6ES7615-7DF10-0AB0 SIMATIC Drive Controller, CPU 1507D TF
Standards, approvals, certificates		
Highest safety class achievable in safety mode		
Probability of failure (for service life of 20 years and repair time of 100 hours)		
- Low demand mode: PFDavg in accordance with SIL2	< 14.00E-04	< 14.00E-04
- Low demand mode: PFDavg in accordance with SIL3	< 2.00E-05 PLd (if exclusively F-CPU is used)	< 2.00E-05 PLd (if exclusively F-CPU is used)
- High demand/continuous mode: PFH in accordance with SIL2	< 14.00E-09	< 14.00E-09
- High demand/continuous mode: PFH in accordance with SIL3	if exclusively F-CPU is used: < 1.00E-09 (at a site altitude of up to 3000 m); < 2.00E-09 (at a site altitude of more than 3000 m and up to 4000 m)	if exclusively F-CPU is used: < 1.00E-09 (at a site altitude of up to 3000 m); < 2.00E-09 (at a site altitude of more than 3000 m and up to 4000 m)
Ambient conditions		
Ambient temperature during operation		
• min.	0 °C	0 °C
• max.	55 °C	55 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	4 000 m; as of an altitude of 2000 m, the maximum ambient air temperature is reduced by 7 °C per 1000 m; see SINAMICS documentation for SINAMICS S120 drive components	4 000 m; as of an altitude of 2000 m, the maximum ambient air temperature is reduced by 7 °C per 1000 m; see SINAMICS documentation for SINAMICS S120 drive components
• Ambient air temperature-barometric pressure-altitude	Permissible air pressure: 620 hPa ... 1 060 hPa	Permissible air pressure: 620 hPa ... 1 060 hPa
Configuration / header		
Configuration / programming		
Programming language		
- LAD	Yes; incl. failsafe	Yes; incl. failsafe
- FBD	Yes; incl. failsafe	Yes; incl. failsafe
- STL	Yes	Yes
- SCL	Yes	Yes
- CFC	No	No
- GRAPH	Yes	Yes
Know-how protection		
• User program protection/password protection	Yes	Yes
• Copy protection	Yes	Yes
• Block protection	Yes	Yes
Access protection		
• protection of confidential configuration data	Yes	Yes
• Protection level: Write protection	Yes	Yes
• Protection level: Read/write protection	Yes	Yes
• Protection level: Write protection for Failsafe	Yes	Yes
• Protection level: Complete protection	Yes	Yes
• User administration	Yes	Yes
Dimensions		
Width	50 mm	50 mm
Height	300 mm	300 mm
Depth	226 mm; 270 mm with spacer (included in scope of supply)	226 mm; 270 mm with spacer (included in scope of supply)
Weights		
Weight, approx.	2 400 g	2 400 g
Other		
Note:	The SIMATIC Drive Controller deviates from the usual SIMATIC S7-1500 ambient conditions and specifications as well as the available approvals and certificates because of the drive design. For details, see the SIMATIC Drive Controller device and system manual. Operation is without fan.	The SIMATIC Drive Controller deviates from the usual SIMATIC S7-1500 ambient conditions and specifications as well as the available approvals and certificates because of the drive design. For details, see the SIMATIC Drive Controller device and system manual. Operation is without fan.

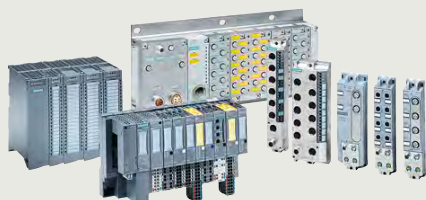

10/4	Introduction	10/177	- SCALANCE W761 RJ45 for the control cabinet
10/4	I/O systems	10/182	- SCALANCE W722 RJ45 for the control cabinet
10/5	SIMATIC ET 200 systems for the control cabinet	10/187	- SCALANCE W721 RJ45 for the control cabinet
10/5	SIMATIC ET 200SP	10/192	- SIPLUS CM PtP serial interface
10/9	Interface modules	10/194	- SIPLUS CM 4x IO-Link
10/21	SIPLUS interface modules	10/196	- SIPLUS ET 200SP CM CAN
10/24	<u>I/O modules</u>	10/198	- SIPLUS CM DP for ET 200SP CPU
10/24	Digital input modules	10/200	- Digital F-input modules
10/34	Digital output modules	10/204	- Digital F-output modules
10/51	Analog input modules	10/208	- Digital F-output module relay
10/71	Analog output modules	10/210	- Analog F-input modules
10/79	SIPLUS digital inputs	10/214	- Special fail-safe modules
10/83	SIPLUS digital outputs	10/217	- Fail-safe technology modules
10/89	SIPLUS analog inputs	10/221	- SIPLUS digital F-input modules
10/96	SIPLUS analog outputs	10/223	- SIPLUS digital F-output modules
10/100	Technology modules	10/226	- SIPLUS digital F-output module relay
10/100	- TM Count 1x24V counter module	10/228	- SIPLUS analog F-input modules
10/104	- TM PosInput 1 counter and position detection module	10/231	- SIPLUS special fail-safe modules
10/108	- TM Timer DIDQ 10x24V time-based IO module	10/233	- Fail-safe communication
10/111	- TM Pulse 2x24V pulse output module	10/233	- F-CM AS-i Safety ST for SIMATIC ET 200SP
10/114	- TM PTO 2x24V interface module for PTO (Pulse Train Output)	10/236	Ex I/O modules
10/117	- TM StepDrive 24...48V/5A stepper motor control (Phytron Co.)	10/237	ET 200SP motor starters
10/118	- F-TM ServoDrive HF	10/246	<u>Pneumatics</u>
10/120	- F-TM ServoDrive ST	10/246	AirLINE SP valve terminal type 8647 (Bürkert Co.)
10/123	- F-TM StepDrive ST	10/247	Power supplies
10/125	- SIMATIC ET 200SP ECC charging controllers	10/247	1-phase, 24 V DC (for SIMATIC ET 200SP)
10/131	- TM SIWAREX WP321 ST weighing electronics	10/251	<u>BaseUnits</u>
10/134	- TM SIWAREX WP341 HF weighing electronics	10/257	<u>SIPLUS BaseUnits</u>
10/137	- TM SIWAREX WP351 HF weighing electronics	10/265	<u>BusAdapters</u>
10/139	- SIPLUS TM Count 1x24V counter module	10/270	<u>SIPLUS BusAdapters</u>
10/141	- SIPLUS TM PosInput 1 counter and position detection module	10/274	<u>Accessories</u>
10/143	- SIPLUS TM Timer DIDQ 10x24 V time-based IO module	10/277	SIMATIC ET 200SP HA
10/145	- SIPLUS TM Pulse 2x24V pulse output module	10/278	Interface module
10/147	- SIPLUS ET 200SP ECC charging controllers	10/280	Digital I/O modules
10/149	- SIPLUS SIWAREX WP321	10/285	Analog I/O modules
10/151	- CM PtP serial interface	10/292	Analog/digital module
10/154	- CM 4x IO-Link	10/295	Technology modules
10/158	- CM 1xDALI	10/300	Fail-safe I/O-modules
10/160	- CM CAN	10/301	Ex I/O modules
10/162	- CM AS-i Master ST for SIMATIC ET 200SP	10/306	Carrier modules
10/166	- CM DP for ET 200SP CPU	10/309	Terminal blocks
10/168	- CP 1542SP-1	10/314	BusAdapters
10/171	- CP 1543SP-1	10/316	Additional I/O modules
10/174	- CP 1542SP-1 IRC	10/317	SIMATIC ET 200MP
		10/319	<u>Interface modules</u>
		10/319	IM 155-5 PN
		10/326	IM 155-5 DP
		10/328	SIPLUS IM 155-5 PN
		10/330	SIPLUS IM 155-5 DP
		10/331	<u>I/O modules</u>
		10/332	<u>Active backplane bus</u>
		10/334	<u>SIPLUS extreme active backplane bus</u>

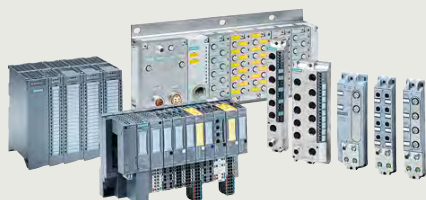**10/335 SIMATIC ET 200M**

- 10/336 [Interface modules](#)
- 10/336 IM 153-1/153-2
- 10/339 IM 153-4 PN
- 10/342 SIPLUS ET 200M IM 153-1/153-2
- 10/345 SIPLUS ET 200M IM 153-4 PN IO
- 10/347 I/O modules
- 10/347 Digital modules, analog modules
- 10/348 Analog input module with HART
- 10/350 Analog output module with HART
- 10/352 Ex-analog input module with HART
- 10/354 Ex-analog output module with HART
- 10/356 SIPLUS S7-300 analog input module with HART
- 10/357 SIPLUS S7-300 analog output module with HART
- 10/358 F-digital/analog modules, Ex modules
- 10/359 Function modules
- 10/361 Special modules, Communication, Power supplies

10/362 SIMATIC ET 200iSP

- 10/363 Power supply unit
- 10/365 Interface modules
- 10/367 Digital electronic modules
- 10/374 Analog electronic modules
- 10/376 Safety-related electronic modules
- 10/379 Watchdog module
- 10/380 RS 485-iS coupler
- 10/382 Stainless steel wall enclosures

10/383 SIMATIC ET 200 systems without control cabinet**10/383 SIMATIC ET 200pro**

- 10/384 [Interface modules](#)
- 10/384 IM 154-1 and IM 154-2
- 10/387 IM 154-3 PN and IM 154-4 PN
- 10/391 [I/O modules](#)
- 10/391 Digital expansion modules
- 10/397 Analog expansion modules
- 10/403 [Communication](#)
- 10/403 IO-Link master modules
- 10/404 [Fail-safe expansion modules](#)
- 10/404 Fail-safe digital expansion modules
- 10/406 PM-E power module
- 10/408 PM-O power module output
- 10/409 ET 200pro pneumatic interface
- 10/411 RF170C
- 10/413 [Power supplies](#)
- 10/413 3-phase, 24 V DC (ET200pro PS, IP67)
- 10/416 [ET 200pro motor starters](#)
- 10/431 [SIMATIC ET 200pro FC-2 frequency converters](#)

- 10/434 [ET 200pro software](#)
- 10/434 Motor Starter ES
- 10/436 [Add-on products for ET 200pro](#)
- 10/436 EtherNet/IP interface module

10/437 SIMATIC ET 200AL

- 10/438 [Interface modules](#)
- 10/438 IM 157-1 MF
- 10/441 IM 157-1 PN
- 10/443 IM 157-1 DP
- 10/445 [I/O modules](#)
- 10/445 Digital I/O modules
- 10/452 Analog I/O modules
- 10/458 Fail-safe I/O modules
- 10/461 Communication
- 10/461 - CM IO-Link
- 10/463 IO-Link I/O modules
- 10/469 [Accessories](#)
- 10/469 Cables and connectors
- 10/485 Labels

10/486 SIMATIC ET 200eco PN

- 10/487 [I/O devices](#)
- 10/487 Digital I/O devices
- 10/505 Analog I/O devices
- 10/516 TM PosInput 2 counter and position detection module
- 10/521 Fail-safe I/O device
- 10/524 IO-Link master
- 10/537 [Accessories](#)
- 10/537 Mounting rail, labels
- 10/538 Connector cover

**10/539 PROFIBUS components****10/539** Diagnostics

10/539 Diagnostic repeater for PROFIBUS DP

10/541 SIPLUS diagnostic repeater
for PROFIBUS10/543 PROFIBUS DP ASICs**10/545 PROFINET components**10/545 ERTEC Enhanced Real-Time
Ethernet Controller

10/547 Development kits

10/548 PROFINET driver

**10/550 Network components for PROFIBUS
Electrical networks (RS 485)**

10/550 Active RS 485 terminating element

10/551 RS 485 repeater for PROFIBUS

10/552 SIPLUS DP active RS 485 terminating
element

10/554 SIPLUS RS 485 repeater

10/556 Gateways

10/556 PN/PN coupler

10/559 PN/CAN LINK

10/561 SIPLUS PN/CAN LINK

10/563 PN/J1939 LINK

10/565 PN/BACnet LINK

10/567 PN/M-Bus LINK

10/569 DP/DP coupler

10/570 SIMATIC CFU

10/572 SIMATIC CFU CIO HART edition

10/579 SIMATIC CFU PA edition

10/584 SIMATIC CFU DIQ edition

10/589 BusAdapters

10/591 Accessories

10/592 Data enablers

10/592 FDE Industrial Data Enabler

Overview



SIMATIC ET 200 offers the right solution for every application

With SIMATIC ET 200 a wide range of distributed I/O systems is available - for solutions in the control cabinet or without a control cabinet directly at the machine, as well as for applications in hazardous areas. The modular design makes it possible to scale and expand the ET 200 systems simply and in small stages. Already integrated add-on modules reduce costs and at the same time offer a widely diverse range of possible applications. You can choose from many different combination options: digital and analog inputs/outputs, intelligent modules with CPU functionality, safety engineering, motor starters, pneumatic devices, frequency converters, as well as various different technology modules (e.g. for counting, positioning).

Communication over PROFINET and PROFIBUS, uniform engineering, transparent diagnostic possibilities as well as optimal interfacing to SIMATIC Controllers and HMI units prove the unique integration of Totally Integrated Automation.

MultiFieldbus

With the MultiFieldbus you can easily and flexibly use different fieldbus systems with SIMATIC ET 200. Due to support of the PROFINET, EtherNet/IP and Modbus/TCP protocols, the MultiFieldbus is designed for use on a wide range of Ethernet controllers.

PROFINET

PROFINET is the open, cross-vendor Industrial Ethernet standard (IEC 61158/61784) for automation.

Based on Industrial Ethernet, PROFINET enables direct communication between field devices (IO devices) and controllers (IO Controllers), up to and including the solution of isochronous drive controls for Motion Control applications.

As PROFINET is based on Standard Ethernet according to IEEE 802.3, any devices from the field level to the management level can be connected.

In this way, PROFINET enables system-wide communication, supports plant-wide engineering and applies IT standards, such as web server or FTP, right down to field level. Tried and tested fieldbus systems, such as PROFIBUS or AS-Interface, can be easily integrated without any modification to the existing devices.

PROFIBUS

PROFIBUS is the international standard (IEC 61158/61784) for the field level. It is the only fieldbus to allow communication both in manufacturing applications and in process-oriented applications.

PROFIBUS is used to connect field devices, e.g. distributed I/O devices or drives, to automation systems such as SIMATIC S7, SIMOTION, SINUMERIK, or PCs.

PROFIBUS is standardized in accordance with IEC 61158 and is a high-performance, open and rugged fieldbus system with short response times. PROFIBUS is available in different forms for various applications.

PROFIBUS DP (distributed I/O)

PROFIBUS DP is used for connecting distributed field devices, e.g. SIMATIC ET 200, or drives with extremely fast response times. PROFIBUS DP is used when sensors/actuators are distributed at the machine or in the plant (e.g. field level).

AS-Interface

AS-Interface is the international standard (IEC 62026/EN 50295) which, as an alternative to the cable harness, links especially cost-effective sensors and actuators for the field level by means of a two-wire line. This two-wire line is also used to supply the individual stations with power. This makes the AS-Interface the ideal partner for PROFINET and PROFIBUS DP.

AS-i communications modules in ET 200SP enable the flexible combination of AS-Interface and distributed I/O. AS-Interface transmits standard data and safety data up to PL e / SIL 3 in the same AS-i network. AS-Interface is not only suitable for efficient transmission of digital and analog standard I/O signals but also ideal for the user-friendly connection of EMERGENCY STOP buttons and protective doors.

IO-Link

The communication standard IO-Link permits the intelligent connection of sensors and switchgear to the control level. IO-Link facilitates the integration of all components in the control cabinet and on the field level - for maximum integration and seamless communication on the final meters to the process.

IO-Link solutions from Siemens ensure maximum precision and cost-effectiveness in any production system. IO-Link is completely integrated in Totally Integrated Automation (TIA) and offers many advantages.

- The open standard permits the networking of devices from different manufacturers
- Simple wiring facilitates the installation process
- Reduced wiring effort saves time and money during installation
- Efficient engineering facilitates configuration and commissioning
- High-speed diagnostics ensures short plant standstill times and high plant availability
- High process transparency permits, for example, efficient energy management

Overview



SIMATIC ET 200SP video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6140549987001

SIMATIC ET 200SP



The scalable SIMATIC ET 200SP I/O system is a highly flexible, modular I/O system with degree of protection IP20. Via interface modules, it can exchange IO data of the connected I/O modules with a higher-level PLC. The following interface variants are available for this purpose:

- MultiFieldbus: IM 155-6MF with the Ethernet-based protocols PROFINET, EtherNet/IP and Modbus TCP
- PROFINET: IM 155-6 PN
- PROFIBUS: IM 155-6 DP

Alternatively, as further head-end stations, various PLC, F-PLC and Open Controllers are available as compact S7-1500 Controllers (Distributed Controllers). ET 200SP components in SIPLUS version meet extreme requirements and have a high degree of robustness.

An extensive range of I/O modules, including fail-safe and Ex versions, enable the flexible connection of sensors and actuators:

- Digital input modules (DI), with color coding white
- Digital output modules (DO), with color coding black
- Analog input modules (AI), with color coding light blue
- Analog output modules (AO), with color coding dark blue
- Technology modules (TM), with color coding turquoise
- Communications modules (CM), with color coding light gray
- Special modules, with color coding mint green
- Motor starters as direct-on-line starters (DS) and reversing starters (RS), also as F-variant in each case
- Pneumatics

Apart from the standard type of delivery in single-unit packaging, selected I/O modules and BaseUnits are also available in a pack of 10 units.

The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

Compact design

- Modular configuration with up to 64 modules
- System-integrated, self-assembling potential groups, potential group supply without power module with infeed of supply voltage via light BaseUnits
- Small size and highly flexible due to the modular design and comprehensive product range
- Up to 16 channels per module
- Permanent wiring
- Hot swapping: Module replacement without tools in RUN
- Startup and operation with slot gaps (free spaces)

Flexible connection system

- Flexible fieldbus connection via BusAdapter (RJ45, M12, FastConnect, plastic or glass fiber-optic cables single-mode or multimode), also as integrated media converter
- Push-in terminals for cross-sections up to 1.5 mm² with wire end ferrule, and up to 2.5 mm² without wire end ferrule
- BaseUnits for 1-wire or direct multi-wire connection
- PotDis module for system-integrated and space-saving provision of additional potential terminals
- Optimum accessibility for wiring due to spring release and measuring tap next to the conductor opening
- System-integrated, space-saving shielding for installation without tools



SIMATIC ET 200SP shielding video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6196729280001

I/O systems

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

Overview

Safety Integrated

- Easy integration of fail-safe modules
- Easy F parameter assignment via software
- Group-by-group disconnection of non-fail-safe modules

High performance

- Isochronous PROFINET
- Internal data transfer with up to 100 Mbps
- Record analog values and output as of 50 µs
- Record digital values and output as of 1 µs

High-performance technology

- Modules for the functions Servodrive, Counting, Positioning, Weighing, Output cams, PWM, Force measurement, Flow measurement, etc.

Energy efficiency

- Energy Meter for recording electrical variables
- System-integrated PROFIenergy with interval substitute values

Extended functions

- Configuration control: application-based adaptation of the actual configuration via user software (option handling)
- Time-based IO: time stamping of the signals to the µs
- MSI/MSO: Simultaneous access to I/O data from up to 4 PLCs
- MtM: Direct data exchange between IO modules (**Module-to-Module** communication)
- Oversampling: n-fold acquisition or output of digital and analog signals within a PN cycle
- Adaptation of measuring range: increased resolution by adapting the measuring range to a limited section of a measuring range supported by the analog input module
- Scaling of measured values: permits the transmission of the analog value normalized to the required physical value as a REAL value (32-bit floating point)

Communication standards

- PROFINET IO
- EtherNet/IP
- Modbus TCP
- PROFIBUS DP V0/V1
- ET connection for connecting the ET 200AL (IP67)
- IO-Link V1.1
- CAN
- DALI
- AS-Interface
- Point-to-point (RS232, RS485, RS422)
- Freeport
- 3964(R)
- USS
- DMX
- Modbus RTU (master/slave)

CPU

- PROFINET connection with 3 ports
- IO Controller and PN IO device
- Optional expansion as DP master/slave
- Also as fail-safe variant and Open Controller

Labeling of I/O modules

- Meaningful labeling on the front of the I/O modules
 - Module type in plain text including function class, e.g. "DI 8x24VDC HF"
 - Article No.
 - 2D matrix code with article and serial number (with call via the "Industry Online Support" app, direct link to the support page of the module)
 - Hardware functional status and firmware version
 - Suitable BU type for the respective I/O module
 - Color code of the suitable color-coding plate
 - Connection diagram
- Optionally expandable with
 - Labeling strips
 - Equipment labeling plate

Overview of ET 200SP components

Basic components	Function
CPU	The CPU: <ul style="list-style-type: none"> • Executes the user program • Is used as IO Controller, I-Device on PROFINET IO, or as standalone CPU • Connects the ET 200SP with the IO devices or the IO Controller • Exchanges data with the I/O modules via the backplane bus. Further functions of the CPU: <ul style="list-style-type: none"> • Communication via PROFIBUS DP (in combination with the CM DP communications module, the CPU can be used as DP master or slave) • Integrated web server • Integrated technology • Integrated trace functionality • Integrated system diagnostics • Integrated safety

Basic components	Function
Open Controller	As the first controller of this type, the SIMATIC ET 200SP Open Controller combines the functions of a PC-based Software Controller with visualization, PC applications and central I/Os (inputs/outputs) in a single, compact device. <ul style="list-style-type: none"> • All in one • High system availability • Compact and modular • Rugged • User-friendly design • Efficient engineering in TIA Portal
Interface modules with MultiFieldbus interface (IM 155-6 MF)	The MF interface module: <ul style="list-style-type: none"> • Supports the three Ethernet protocols PROFINET IO, EtherNet IP and Modbus TCP • Is easy to configure via MultiFieldbus Configuration Tool (MFCT) • Connects ET 200SP with the IO Controller • Exchanges data with the I/O modules via the backplane bus.

Overview

Basic components	Function
Interface modules for PROFINET IO (IM 155-6 PN)	The interface module: <ul style="list-style-type: none"> Is used as IO Device on PROFINET IO Connects ET 200SP with the IO Controller Exchanges data with the I/O modules via the backplane bus.
Interface module for PROFIBUS DP (IM 155-6 DP)	The interface module: <ul style="list-style-type: none"> Is used as DP slave on PROFIBUS DP Connects ET 200SP with the DP master Exchanges data with the I/O modules via the backplane bus.
SIMATIC BusAdapter (BA)	SIMATIC BusAdapters permit the free selection of the connection system and physical connection for head-end stations with PROFINET or MultiFieldbus interface. Various variants are available for the connection of copper cables or plastic and glass fiber-optic cables. Hybrid copper/fiber-optic variants are also available as integrated media converters. Cable length between 2 stations: max. 100 m (copper), max. 50 m (POF), max 100 m (PCF), max. 3 km (multimode glass fiber-optic cable), max. 20 km (single-mode glass fiber-optic cable). For expanding the station with the I/O system ET 200AL via ET connection, the BA-Send BusAdapter is available
BaseUnit (BU)	The BaseUnits provide the electrical and mechanical connection for the ET 200SP components. <ul style="list-style-type: none"> Bright BaseUnits permit a new potential group up to max. 10 A Dark BaseUnits forward the self-assembling voltage busbars P1, P2 and AUX from the left to the right BaseUnit. Suitable BaseUnits with 12 to 28 terminals are available for different connection systems (single or direct multi-conductor connection) and functions. The I/O module is plugged onto the desired BaseUnit and determines the potential assignment of the terminals on the BaseUnit. For expanding the station with the I/O system ET 200AL via ET connection, the BaseUnit BU-Send is available.

Basic components	Function
Potential distributor modules (PotDis BU, PotDis TB)	With the potential distributor modules for SIMATIC ET 200SP, additional potentials required within an ET 200SP station can be set up quickly and in a space-saving manner. Due to the free combinability of PotDis-BUs and PotDis-TBs, the potential distributor modules allow a large number of design variants and thus simple adaptation to individual needs. Within the station, existing potentials can be multiplied or even new potential groups can be formed. With 36 terminals per 15 mm width, the PotDis modules require very little space without compromising on the conductor cross-sections (maximum 2.5 mm ²). They allow the connection of voltages up to 48 V DC with a maximum current carrying capacity of 10 A, and with the PotDis TB-BR-W even up to 230 V AC/10 A as well as the possibility to connect a protective conductor.
I/O modules and fail-safe I/O modules	The I/O module determines the function at the terminals. The PLC detects the current process state via the connected sensors and triggers corresponding responses via the connected actuators. Some I/O modules feature extended functions, in part they are also designed as individual operating mode. I/O modules are divided into the following module types; the fail-safe versions are identified by a preceding 'F-' and a yellow module case: <ul style="list-style-type: none"> DI (digital input) DQ (digital output) AI (analog input) AQ (analog output) TM (technology modules) CM (communications modules) SM (special modules)
Protective cover (BU cover)	The ET 200SP system can be operated with any number of slot gaps (BU slot without I/O module). Applications for this include: <ul style="list-style-type: none"> partial commissioning prewired, and currently unequipped options To protect against damage, such slot gaps must be covered by a BU cover. Within the BU cover, an equipment labeling plate can be kept for the possible later use of an I/O module. Versions: <ul style="list-style-type: none"> for BaseUnits with a width of 15 mm for BaseUnits with a width of 20 mm

I/O systems

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200SP

Overview

Basic components	Function
Server module	The server module concludes the setup of an ET 200SP station. On the server module there are holders for 3 spare fuses (5 × 20 mm). The server module is included in the scope of supply of all head-end stations.
DIN rail according to EN 60715	The DIN rail is the module rack of the ET 200SP I/O system. ET 200SP is mounted on the DIN rail.
SIMATIC system rail	For a redundant R1 setup of the ET 200SP I/O system, mounting on the SIMATIC system rail is mandatory.
Coding element	<p>When plugging an I/O module onto a BaseUnit for the first time, the coding element moves from the I/O module to the BaseUnit. There it prevents the destruction of the ET 200SP components in the event of a subsequent module replacement with incorrectly selected I/O module.</p> <p>The coding element is available in two versions:</p> <ul style="list-style-type: none"> • Mechanical coding element • Electronic coding element: additionally features an electronic, re-writable memory for the redundant storage of module-specific configuration data (e.g. F target address for fail-safe modules, parameter data for IO-Link master). Thus these data are automatically backed up during a module replacement.
System-integrated shield connection	<p>The shield connection permits the connection of cable shields. Compared to external shield supports, the system offers the following advantages:</p> <ul style="list-style-type: none"> • Quick installation without tools by plugging the shield connection element onto the BaseUnit • Automatic low-impedance connection to the functional grounding (DIN rail) • Optimized EMC properties by separating the supply voltage lines from the signal cables by means of the shield connection element and short, unshielded cable lengths • Requires little space
Labeling strips	<p>Optionally, for system-specific marking the head-end stations and I/O modules can be equipped with labeling strips (13 × 31 mm). The labeling strips can be inscribed mechanically. Labeling strips are available in two versions in the colors light gray and yellow:</p> <ul style="list-style-type: none"> • 500 strips on the roll, for printing on thermal-transfer printers. Core diameter 40 mm, outer diameter 70 mm, width 62 mm. • 10 DIN A4 sheets with 100 strips each, card 180 g/mm², perforated, for printing with a laser printer direct from TIA Portal or via print templates.

Basic components	Function
Equipment labeling plate	<p>Optionally, one equipment labeling plate each can be plugged onto head-end stations, BusAdapters, BaseUnits, potential distributor modules (PotDis BU and PotDis TB), and I/O modules. Equipment labeling plates are supplied in packs of 10 sheets with 16 labels each. The labels can be printed with thermal-transfer card printers or plotters, or stickers can be attached to them. Advantages compared to labels that are attached directly:</p> <ul style="list-style-type: none"> • The inscription on the front is not covered • Simple label replacement when replacing a module • No parallax errors when marking the BaseUnits on the mounting plate <p>The size of the inscribable area of the labels is 14.8 × 10.5 mm (W × H)</p>
Color-coded labels	<p>The I/O modules that are plugged onto the BaseUnits determine the potentials connected at the process terminals. The +/- potentials can optionally be identified using module-specific color-coded labels. The potentials of the AUX and add-on terminals as well as potential distributor modules can also be marked using color-coded labels. Color-coded labels are supplied in packs of 10 or 50 labels. Advantages of the color-coded labels:</p> <ul style="list-style-type: none"> • Quick installation (one label for marking up to 16 terminals) • Avoidance of wiring errors • Simple detection of potentials during servicing

Overview



SIMATIC ET 200SP MultiFieldbus video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6144272396001



Thanks to their wide scope of functions, the interface modules of the scalable SIMATIC ET 200SP I/O system, even in their basic versions, cover a wide range of applications. The basic functions of the interface modules include:

- Short data update times of typically 1 ms
- Single Hot Swap (withdrawing and insertion of an I/O module during operation without impairing the communication with the remaining modules)
- Operation with gaps (empty BaseUnits)
- Complete diagnostic support, extending to channel-by-channel diagnostics
- Configuration control / option handling (adaptation of the actual configuration via user program)
- Device replacement without programming device, with automatic re-initialization, with and without topological configuring
- I&M data 0 to 3 (electronic rating plate with non-volatile storage of plant data)
- Firmware update
- Pluggable 24 V DC supply connection
- Mains/voltage failure buffering time of at least 5 ms or 10 ms
- Labeling option via optional labeling strips and equipment labeling plates

When using PROFINET interface modules, the following basic functions are also included:

- Media redundancy (MRP)
- Integrated 2-port switch
- Freely selectable connection system (Standard function class and above) and physical connection (High Feature function class and above) by means of SIMATIC BusAdapters, also as system-integrated media converter from fiber-optic to copper cable. Can also be used for interface modules with MultiFieldbus interface.
- Reset button for simple return to factory settings without the need for programming device
- Automatic synchronization of the backplane bus to the PROFINET cycle to minimize the response time fluctuations (jitter)

Listed below is a short overview of the interface modules available for the ET 200SP, showing the essential differences. An up-to-date, clear and more precise comparison of functions of the different interface modules is offered by the TIA Selection Tool.

SIMATIC IM 155-6 DP High Feature with PROFIBUS connection

- Max. 32 I/O modules, also PROFIsafe modules with complete diagnostic support.
- Expansion option with max. 16 modules from the ET 200AL series using the BU-Send BaseUnit and the BA-Send BusAdapter
- Max. 244 bytes in each case for input and output data per module and per station
- Data update time: typ. 5 ms
- PROFIBUS connection via 9-pin D-sub socket
- Package includes server module and PROFIBUS connector with PG socket

SIMATIC IM 155-6 PN Basic with PROFINET connection

- Max. 12 I/O modules, no PROFIsafe modules, with complete diagnostic support
- Max. 32 bytes in each case for input and output data per module and per station
- Data update time: typ. 1 ms
- PROFINET connection via 2 integrated RJ45 sockets (integrated 2-port switch)
- Package includes server module

SIMATIC IM 155-6 PN Standard with a PROFINET interface for SIMATIC BusAdapters

- Two types of delivery:
 - As package with IM155-6PN ST, with pre-assembled BA 2xRJ45 BusAdapter, including server module
 - As package with IM155-6PN ST, without BusAdapter, including server module
- Max. 32 I/O modules, also PROFIsafe modules, with complete diagnostic support
- Expansion option with max. 16 modules from the ET 200AL series using the BU-Send BaseUnit and the BA-Send BusAdapter
- Max. 288 bytes in each case for input and output data per module and max. 1440 bytes per station (depending on configuration)
- Data update time: typ. 1 ms
- Selection of the type of connection of the PROFINET by means of SIMATIC BusAdapter (BusAdapter for copper cables only)

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Interface modules > IM 155-6

Overview

SIMATIC IM 155-6 PN/2 High Feature, 2-port IM with one slot for SIMATIC BusAdapters

- Max. 64 I/O modules, also PROFI-safe modules, with complete diagnostic support
- Expansion option with max. 16 modules from the ET 200AL series using the BU-Send BaseUnit and the BA-Send BusAdapter
- Max. 288 bytes in each case for input and output data per module and max. 1440 bytes per station (depending on configuration)
- Fast data refresh time from 250 µs, also in isochronous mode
- S2 system redundancy
- Choice of connection type and physical connection of the PROFINET by means of SIMATIC BusAdapter. All BusAdapters with a connection for copper and/or fiber-optic cables can be used; BusAdapter must be ordered separately
- Package includes server module

SIMATIC IM 155-6 MF High Feature, MultiFieldbus IM with two slots for SIMATIC BusAdapters

Differences from the 2-port IM 155-6 PN/2 High Feature:

- Multi-protocol capability
Operation on Ethernet controllers via the PROFINET, EtherNet/IP and Modbus protocols
- Compatible with IM 155-6 MF High Feature (as of 6ES7155-6AU01-0CN0);
Exception: Isochronous mode and prioritized startup
- Shared device:
Simultaneous access from different controllers via different Ethernet protocols PROFINET, EtherNet/IP and Modbus TCP
- Local data links:
Deterministic, easy-to-configure data exchange between controllers, also via different Ethernet protocols PROFINET, EtherNet/IP and Modbus TCP

SIMATIC IM 155-6 PN/3 High Feature, 3-port IM with two slots for SIMATIC BusAdapters

Additional functions compared with 2-port IM 155-6 PN/2 High Feature:

- Second slot for SIMATIC BusAdapter, max. 3 ports can be used
- Local IO data coupling between up to 4 controllers

SIMATIC IM 155-6 PN High Speed with a PROFINET interface for SIMATIC BusAdapters

- Max. 30 I/O modules, also PROFI-safe modules, with complete diagnostic support
- Max. 32 bytes in each case for input and output data per module and max. 968 bytes per station (depending on configuration)
- Fast data refresh time from isochronous mode from 125 µs
- Performance upgrade for PROFINET
- Choice of connection type and physical connection of the PROFINET by means of SIMATIC BusAdapter. All BusAdapters with a connection for copper and/or fiber-optic cables can be used; BusAdapter must be ordered separately
- Package includes server module

SIMATIC IM 155-6 PN R1 redundant interface module



SIMATIC ET 200SP R1 with two IM 155-6 PN R1, BaseUnit M0, BusAdapter, and system rail

- Can be used for high availability applications in combination with SIMATIC S7-1500H and TIA Portal
- Redundancy via two identical ET 200SP interface modules, which are selected as required
- Interface module switchover possible during operation
- SIMATIC system rail absolutely necessary

Ordering data	Article No.	Article No.
IM 155-6 MF High Feature MultiFieldbus interface module 2-port IM with server module, without SIMATIC BusAdapter; PROFINET, EtherNet/IP and Modbus TCP	6ES7155-6MU00-0CN0	SIMATIC BA SCRJ/RJ45 BusAdapter 6ES7193-6AP20-0AA0 For PROFINET interface modules from High Feature function class or above; with media converter FOC-Cu; for increased vibration and EMC loads; max. cable length 50 m (POF, copper) or 100 m (PCF)
PROFINET interface module IM 155-6 PN Basic With server module; two integrated RJ45 sockets	6ES7155-6AR00-0AN0	SIMATIC BA SCRJ/FC BusAdapter 6ES7193-6AP40-0AA0 For PROFINET interface modules from High Feature function class or above; with media converter FOC-Cu; for increased vibration and EMC loads; max. cable length 50 m (POF, copper) or 100 m (PCF)
PROFINET interface module IM 155-6 PN Standard With server module	6ES7155-6AA02-0BN0	SIMATIC BA 2XLC BusAdapter 6ES7193-6AG00-0AA0 For PROFINET interface modules from High Feature function class or above; with LC fiber-optic connection; for increased vibration and EMC load capacity; max. cable length 2 km
• With mounted SIMATIC BA 2xRJ45 BusAdapter • Without SIMATIC BusAdapter	6ES7155-6AU02-0BN0	SIMATIC BA LC/RJ45 BusAdapter 6ES7193-6AG20-0AA0 For PROFINET interface modules from High Feature function class or above; with media converter FOC-Cu; for increased vibration and EMC loads; max. cable length 2 km (glass) or 50 m (copper)
PROFINET interface module IM 155-6 PN/2 High Feature 2-port IM, with server module, without SIMATIC BusAdapter	6ES7155-6AU01-0CN0	SIMATIC BA LC/FC BusAdapter 6ES7193-6AG40-0AA0 For PROFINET interface modules from High Feature function class or above; with media converter FOC-Cu; for increased vibration and EMC loads; max. cable length 2 km (glass) or 50 m (copper)
PROFINET interface module IM 155-6 PN/3 High Feature 3-port IM, with server module, without SIMATIC BusAdapter	6ES7155-6AU30-0CN0	SIMATIC BA 2xLC-LD BusAdapter 6ES7193-6AG50-0AA0 For IM 155-6 PN HF, IM 155-6 PN R1; 2 x LC-LD connections
PROFINET interface module IM 155-6 PN High Speed With server module, without SIMATIC BusAdapter	6ES7155-6AU00-0DN0	SIMATIC BA LC-LD/RJ45 BusAdapter 6ES7193-6AG60-0AA0 For IM 155-6 PN HF, IM 155-6 PN R1; with media converter glass FOC - copper; 1 x LC-LD connection, 1 x RJ45 connection
PROFIBUS interface module IM 155-6 DP High Feature With server module, with PROFIBUS plug with PG socket	6ES7155-6BA01-0CN0	SIMATIC BA LC-LD/M12 BusAdapter 6ES7193-6AG70-0AA0 For IM 155-6 PN HF, IM 155-6 PN R1; with media converter glass FOC - copper; 1 x LC-LD connection, 1 x M12 connection
Redundant PROFINET interface module IM 155-6 PN R1 2-port IM, with server module, without SIMATIC BusAdapter, R1 redundancy	6ES7155-6AU00-0HM0	Station expansion with IP67 I/O system ET 200AL
Accessories		ET 200SP BA-Send 1 x FC BusAdapter 6ES7193-6AS00-0AA0
Strain relief for the PROFINET 3cable System-integrated strain relief for High Feature PN interface modules (5 units)	6ES7193-6RA00-1AN0	BaseUnit BU-Send 6ES7193-6BN00-0NE0
SIMATIC BA 2xRJ45 BusAdapter For PROFINET interface modules, standard function class or above; max. cable length 50 m	6ES7193-6AR00-0AA0	
SIMATIC BA 2xFC BusAdapter For PROFINET interface modules, standard function class or above; for increased vibration and EMC loads; max. cable length 50 m	6ES7193-6AF00-0AA0	
BA 2xM12 BusAdapter For IM 155-6PN ST, HF; 2 x M12 push-pull sockets, D-coding, also suitable for standard M12. For PROFINET	6ES7193-6AM00-0AA0	
SIMATIC BA 2xSCRJ BusAdapter For PROFINET interface modules from High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load capacity; max. cable length 50 m (POF) or 100 m (PCF)	6ES7193-6AP00-0AA0	

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Interface modules > IM 155-6**

Ordering data	Article No.	Article No.
Other accessories		SIMATIC Manual Collection
Labeling strips		6ES7998-8XC01-8YE0
500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0	Electronic manuals on DVD, multilingual: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0	
1000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AA0	SIMATIC Manual Collection update service for 1 year
1000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AG0	6ES7998-8XC01-8YE2
		Current Manual Collection DVD and the three subsequent updates
Equipment labeling plate	6ES7193-6LF30-0AW0	Spare parts
10 sheets of 16 labels, for printing with thermal transfer card printer or plotter		Server module
		6ES7193-6PA00-0AA0
SIMATIC system rail		Terminates an ET 200SP station; included in the scope of supply of the interface modules, CPUs and Open Controllers
With DIN rail according to EN 60715 (35 × 7.5), with 6 mm profile grooves, B-type		Power supply connector for ET 200SP head-end stations (interface module, CPU and Open Controller)
• Length: 482.6 mm for 19" cabinets	6ES7193-6MR00-0AA0	For connecting the 24 V DC supply voltage, push-in version; included in scope of supply of the head-end station
• Length: 530 mm for 600 mm cabinets	6ES7193-6MR00-0BA0	
• Length: 830 mm for 900 mm cabinets	6ES7193-6MR00-0CA0	
• Length 2 m	6ES7193-6MR00-0DA0	With push-in terminals (10 units)
Mounting rail 35 mm		6ES7193-4JB00-0AA0
• Length: 483 mm for 19" cabinets	6ES5710-8MA11	
• Length: 530 mm for 600 mm cabinets	6ES5710-8MA21	
• Length: 830 mm for 900 mm cabinets	6ES5710-8MA31	
• Length 2 m	6ES5710-8MA41	
Manuals for ET 200SP distributed I/O system		
SIMATIC ET 200SP Manual Collection: PDF file with the following content:		
• Basic information System manual, product information, overview tables, correction information or manual supplements		
• Device-specific information Device manuals for the interface modules, PLC, OC and I/O modules, including fail-safe and motor starters		
• Comprehensive information Function manuals		
The ET 200SP Manual Collection can be downloaded from the Internet as a PDF file under https://support.industry.siemens.com/cs/ww/en/view/84133942 .		

Technical specifications

Article number	6ES7155-6MU00-0CN0 ET 200SP, IM155-6MF HF
General information	
Product type designation	IM 155-6 MF HF
Product function	
• I&M data	Yes; I&M0 to I&M3
• Module swapping during operation (hot swapping)	Yes; Multi-hot swapping
• Isochronous mode	No
• Tool changer	Yes; Docking station and docking unit
• Local coupling, IO data	Yes
- Number of coupling modules	6; 1x output + max. 5x input
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	via IM155-6PN/2 HF in compatibility mode
• STEP 7 configurable/integrated from version	via IM155-6PN/2 HF in compatibility mode
• PROFINET from GSD version/GSD revision	GSDML V2.3
• Multi Fieldbus Configuration Tool (MFCT)	from V1.3
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Short-circuit protection	Yes
Address area	
Address space per station	
• Address space per station, max.	1 440 byte
Hardware configuration	
Rack	
• Quantity of operable ET 200SP modules, max.	64
• Quantity of operable ET 200AL modules, max.	16
Submodules	
• Number of submodules per station, max.	256
Interfaces	
Number of PROFINET interfaces	1; 2 ports (switch)
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; with BusAdapter
• Number of ports	2; with BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes
Protocols	
• PROFINET IO Device	Yes
• Open IE communication	Yes
• Media redundancy	Yes; PROFINET MRP client
PROFINET IO Device	
Services	
- IRT	No
- PROFInergy	Yes
- Prioritized startup	No
- Shared device	Yes
- Number of IO Controllers with shared device, max.	14; 2x PN controller + 2x EtherNet/IP scanner + 10x Modbus TCP master

Article number	6ES7155-6MU00-0CN0 ET 200SP, IM155-6MF HF
Interface types	
RJ 45 (Ethernet)	
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 100 Mbps	Yes
• Autonegotiation	Yes
• Autocrossing	Yes
Protocols	
Modbus TCP	Yes
Number of connections	
• Number of M2M communication relationships/connections, max.	16
Redundancy mode	
• PROFINET system redundancy (S2)	Yes; NAP S2
• H-Sync forwarding	Yes
Media redundancy	
- MRP	Yes
- MRPD	No
EtherNet/IP	
Services	
- CIP Implicit Messaging	Yes
- CIP Explicit Messaging	Yes
- CIP Safety	No
- Configuration control via Explicit Messaging	No
- Shared device	Yes; 2x PN controller + 2x EtherNet/IP scanner + 10x Modbus TCP master
- Number of scanners with shared device, max.	2
Updating times	
- Requested Packet Interval (RPI)	2 ms
Address area	
- Address space per module, max.	288 byte; (246 byte outputs / 288 byte inputs)
- ForwardOpen (Class1 & 32 bit Header)	500 byte; (246 byte outputs / 500 byte inputs)
- LargeForwardOpen (Class3)	4 002 byte
Connections	
- Number of rack connections	2
Modbus TCP	
Services	
- read coils (code=1)	Yes
- read discrete inputs (code=2)	Yes
- Read Holding Registers (Code=3)	Yes
- write single coil (code=5)	Yes
- write multiple coils (code=15)	Yes
- Write Multiple Registers (Code=16)	Yes
- Parameter change by master	Yes
- Modbus TCP Security Protocol	No
Address space per station	
- Address space per station, max.	500 byte; (246 byte outputs / 500 byte inputs)
- Access-consistent address space	250 byte; (246 byte outputs / 250 byte inputs)

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Interface modules > IM 155-6

Technical specifications

Article number	6ES7155-6MU00-0CN0 ET 200SP, IM155-6MF HF
Updating time	
- I/O request interval	2 ms
Connections	
- Number of connections per slave	9; (1x inputs / 2x outputs / 4x volatile registers / 2x Device Info)
Open IE communication	
• TCP/IP	Yes
• UDP	Yes
• SNMP	Yes
• LLDP	Yes
• ARP	Yes
• IGMP	Yes
• Multicast	Yes
• Broadcast	Yes
• IPv4	Yes
• IPv6	No
Interrupts/diagnostics/ status information	
Status indicator	Yes
Alarms	Yes
Diagnostics function	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• NS LED	Yes; green/red LED
• MS LED	Yes; green/red LED
• IO LED	Yes; red-green-yellow LED
• Connection display LINK TX/RX	Yes; 2x green link LEDs on BusAdapter

Article number	6ES7155-6MU00-0CN0 ET 200SP, IM155-6MF HF
Standards, approvals, certificates	
Network loading class	3
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C; No condensation
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
connection method	
ET-Connection	
• via BU/BA Send	Yes; + 16 ET 200AL modules
Mechanics/material	
Strain relief	Yes; Optional
Dimensions	
Width	50 mm
Height	117 mm
Depth	74 mm
Weights	
Weight, approx.	120 g; without BusAdapter

Article number	6ES7155-6AR00-0A00 ET 200SP, IM155-6PN Basic	6ES7155-6AA01-0B00 ET 200SP, IM155-6PN ST incl. BA 2xRJ45	6ES7155-6AA02-0B00 ET 200SP, IM 155-6 PN ST incl. BA 2xRJ45	6ES7155-6AU01-0B00 ET 200SP, IM155-6PN ST	6ES7155-6AU02-0B00 ET 200SP, IM 155-6 PN ST
General information					
Product type designation	IM 155-6 PN BA	IM155-6PN ST, including BusAdapter BA 2x RJ45		IM 155-6 PN ST	IM 155-6 PN ST
Product function					
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M4	Yes; I&M0 to I&M3	Yes; I&M0 to I&M4
• Module swapping during operation (hot swapping)	Yes; Single hot swapping	Yes; Single hot swapping	Yes; Multi-hot swapping	Yes; Single hot swapping	Yes; Multi-hot swapping
• Isochronous mode	No	No	No	No	No
Engineering with					
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1	V14	V18	V14	V18
• STEP 7 configurable/ integrated from version	V5.5 SP4	V5.5 SP4		V5.5 SP4	
• PROFINET from GSD version/ GSD revision	GSDML V2.31	GSDML V2.35	GSDML V2.43	GSDML V2.35	GSDML V2.43
Supply voltage					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes	Yes
Short-circuit protection	Yes	Yes	Yes	Yes	Yes
Input current					
Current consumption (rated value)		450 mA	350 mA	450 mA	350 mA
Address area					
Address space per station					
• Address space per station, max.	32 byte	512 byte	1 440 byte	512 byte	1 440 byte

Technical specifications

Article number	6ES7155-6AR00-0AN0	6ES7155-6AA01-0BN0	6ES7155-6AA02-0BN0	6ES7155-6AU01-0BN0	6ES7155-6AU02-0BN0
	ET 200SP, IM155-6PN Basic	ET 200SP, IM155-6PN ST incl. BA 2xRJ45	ET 200SP, IM 155-6 PN ST incl. BA 2xRJ45	ET 200SP, IM155-6PN ST	ET 200SP, IM 155-6 PN ST
Hardware configuration					
Rack					
• Quantity of operable ET 200SP modules, max.	12	32	32	32	32
• Quantity of operable ET 200AL modules, max.	0	16	16	16	16
Submodules					
• Number of submodules per station, max.		256	256	256	256
Interfaces					
Number of PROFINET interfaces	1; 2 ports (switch)	1; 2 ports (switch)	1; 2 ports (switch)	1; 2 ports (switch)	1; 2 ports (switch)
1. Interface					
Interface types					
• RJ 45 (Ethernet)	Yes; 2 integrated RJ45 ports	Yes; with BusAdapter	Yes; with BusAdapter	Yes	Yes; with BusAdapter
• Number of ports	2	2; with BusAdapter	2; with BusAdapter	2	2; with BusAdapter
• integrated switch	Yes	Yes	Yes	Yes	Yes
• BusAdapter (PROFINET)	No	Yes; BA 2x RJ45, BA 2x FC, BA 2x M12	Yes; BA 2x RJ45, BA 2x FC, BA 2x M12	Yes; BA 2x RJ45, BA 2x FC, BA 2x M12	Yes; BA 2x RJ45, BA 2x FC, BA 2x M12
Protocols					
• PROFINET IO Device	Yes	Yes	Yes	Yes	Yes
• Open IE communication	Yes	Yes	Yes	Yes	Yes
• Media redundancy	Yes; PROFINET MRP	Yes; PROFINET MRP client	Yes; PROFINET MRP client	Yes; PROFINET MRP	Yes; PROFINET MRP client
PROFINET IO Device					
Services					
- IRT	No	Yes; 250 µs to 4 ms in 125 µs frame	Yes; 250 µs to 4 ms in 125 µs frame	Yes; 250 µs to 4 ms in 125 µs frame	Yes; 250 µs to 4 ms in 125 µs frame
- PROFinergy	No	Yes	Yes	Yes	Yes
- Prioritized startup	No	Yes	Yes	Yes	Yes
- Shared device	No	Yes	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.		2	4	2	4
Interface types					
RJ 45 (Ethernet)					
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 100 Mbps	Yes	Yes	Yes	Yes	Yes
• Autonegotiation	Yes	Yes	Yes	Yes	Yes
• Autocrossing	Yes	Yes	Yes	Yes	Yes
Protocols					
Modbus TCP	No	No	No	No	No
Redundancy mode					
• PROFINET system redundancy (S2)	No	No	No	No	No
Media redundancy					
- MRP	Yes	Yes	Yes	Yes	Yes
- MRPD	No	No	No	No	No
Open IE communication					
• TCP/IP	Yes	Yes	Yes	Yes	Yes
• SNMP	Yes	Yes	Yes	Yes	Yes
• LLDP	Yes	Yes	Yes	Yes	Yes

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Interface modules > IM 155-6****Technical specifications**

Article number	6ES7155-6AR00-0AN0	6ES7155-6AA01-0BN0	6ES7155-6AA02-0BN0	6ES7155-6AU01-0BN0	6ES7155-6AU02-0BN0
	ET 200SP, IM155-6PN Basic	ET 200SP, IM155-6PN ST incl. BA 2xRJ45	ET 200SP, IM 155-6 PN ST incl. BA 2xRJ45	ET 200SP, IM155-6PN ST	ET 200SP, IM 155-6 PN ST
Interrupts/diagnostics/ status information					
Status indicator	Yes	Yes	Yes	Yes	Yes
Alarms	Yes	Yes	Yes	Yes	Yes
Diagnostics function	Yes	Yes	Yes	Yes	Yes
Diagnostics indication LED					
• RUN LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Connection display LINK TX/RX	Yes; 2x green link LEDs on BusAdapter	Yes; 2x green link LEDs on BusAdapter	Yes; 2x green link LEDs on BusAdapter	Yes; 2x green link LEDs on BusAdapter	Yes; 2x green link LEDs on BusAdapter
Standards, approvals, certificates					
Network loading class	2	2	3	2	3
product functions / security / header					
PROFINET Security Class			1		1
signed firmware update			Yes		Yes
Secure Boot					No
safely removing data			Yes		Yes
data integrity			Yes		Yes
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation	-30 °C; No condensation
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
connection method					
ET-Connection					
• via BU/BA Send	No	Yes; + 16 ET 200AL modules	Yes; + 16 ET 200AL modules	Yes; + 16 ET 200AL modules	Yes; + 16 ET 200AL modules
Mechanics/material					
Strain relief			Yes; Optional		Yes; Optional
Dimensions					
Width	35 mm	50 mm	50 mm	50 mm	50 mm
Height	117 mm	117 mm	117 mm	117 mm	117 mm
Depth	74 mm	74 mm	74 mm	74 mm	74 mm
Weights					
Weight, approx.	125 g	147 g; without BusAdapter	120 g; without BusAdapter	147 g; without BusAdapter	120 g; without BusAdapter

Technical specifications

Article number	6ES7155-6AU01-0CN0 ET 200SP, IM155-6PN/2 HF	6ES7155-6AU30-0CN0 ET 200SP, IM155-6PN/3 HF	6ES7155-6AU00-0DN0 ET 200SP, IM155-6PN HS	6ES7155-6BA01-0CN0 ET 200SP, IM155-6DP HF incl. DP-Connect.
General information				
Product type designation	IM 155-6 PN/2 HF	IM 155-6 PN/3 HF	IM 155-6 PN HS	IM 155-6 DP HF
Product function				
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Module swapping during operation (hot swapping)	Yes; Multi-hot swapping	Yes; Multi-hot swapping	Yes; Multi-hot swapping	Yes; Multi-hot swapping
• Isochronous mode	Yes	Yes	Yes	No
• Tool changer	Yes; Docking station and docking unit	Yes; Docking station and docking unit		
• Local coupling, IO data		Yes		
- Number of coupling modules		16		
- Number of coupling submodules per module		4		
Engineering with				
• STEP 7 TIA Portal configurable/integrated from version	V15.1	V15.1	V14	V15 SP1
• STEP 7 configurable/integrated from version	Configurable via GSD file	Configurable via GSD file	V5.5 SP4	As of V5.5 SP4, only up to FW V3.1
• PROFIBUS from GSD version/GSD revision				One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/GSD revision	GSDML V2.34	GSDML V2.34	GSDML V2.32	
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes
Short-circuit protection	Yes	Yes	Yes	Yes
Input current				
Current consumption (rated value)		175 mA; At 24 V, 2 slots 2x RJ45 BusAdapter, no I/O modules		
Address area				
Address space per station				
• Address space per station, max.	1 440 byte	1 440 byte	968 byte	244 byte
Hardware configuration				
Rack				
• Quantity of operable ET 200SP modules, max.	64	64	30	32
• Quantity of operable ET 200AL modules, max.	16	16	0	16
Submodules				
• Number of submodules per station, max.	256	256	125	
Interfaces				
Number of PROFINET interfaces	1; 2 ports (switch)	1; 3 ports (switch)	1; 2 ports (switch)	
Number of PROFIBUS interfaces				1
1. Interface				
Interface types				
• RJ 45 (Ethernet)	Yes	Yes	Yes	
• RS 485				Yes
• Number of ports	2; via BusAdapter	3; Via 2 BusAdapter slots	2	
• integrated switch	Yes	Yes	Yes	
• BusAdapter (PROFINET)	Yes; BA 2x RJ45, BA 2x FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC, BA 2x LC, BA LC/RJ45, BA LC/FC	Yes; BA 2x RJ45, BA 2x FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC, BA 2x LC, BA LC/RJ45, BA LC/FC	Yes; BA 2x RJ45, BA 2x FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC, BA 2x LC, BA LC/RJ45, BA LC/FC	
• Output current of the interface, max.				90 mA
Protocols				
• PROFINET IO Device	Yes	Yes	Yes	
• PROFIBUS DP slave				Yes
• Open IE communication	Yes	Yes	Yes	
• Media redundancy	Yes; PROFINET MRP	Yes; PROFINET MRP	Yes; As MRP or MRPD client; max. 50 or 30 devices in the ring	

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Interface modules > IM 155-6****Technical specifications**

Article number	6ES7155-6AU01-0CN0 ET 200SP, IM155-6PN/2 HF	6ES7155-6AU30-0CN0 ET 200SP, IM155-6PN/3 HF	6ES7155-6AU00-0DN0 ET 200SP, IM155-6PN HS	6ES7155-6BA01-0CN0 ET 200SP, IM155-6DP HF incl. DP-Connect.
PROFINET IO Device				
Services				
- IRT	Yes; 250 µs to 4 ms in 125 µs frame	Yes; 250 µs to 4 ms in 125 µs frame	Yes	
- PROFIenergy	Yes	Yes	Yes	
- Prioritized startup	Yes	Yes	Yes	
- Shared device	Yes	Yes	Yes	
- Number of IO Controllers with shared device, max.	4	4	4	
Interface types				
RJ 45 (Ethernet)				
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	
• 100 Mbps	Yes	Yes	Yes	
• Autonegotiation	Yes	Yes	Yes	
• Autocrossing	Yes	Yes	Yes	
RS 485				
• Transmission rate, max.				12 Mbit/s
Protocols				
Modbus TCP	No	No	No	No
Number of connections				
• Number of MtM communication relationships/connections, max.	16	16		
Redundancy mode				
• PROFINET system redundancy (S2)	Yes; NAP S2	Yes; NAP S2	No	
• H-Sync forwarding	Yes	Yes	Yes	
Media redundancy				
- MRP	Yes	Yes	Yes	
- MRPD	No	No	Yes	
Open IE communication				
• TCP/IP	Yes	Yes	Yes	No
• SNMP	Yes	Yes	Yes	
• LLDP	Yes	Yes	Yes	
PROFIBUS DP				
Services				
- SYNC capability				Yes
- FREEZE capability				Yes
- DPV0				Yes
- DPV1				Yes
Isochronous mode				
Equidistance	Yes	Yes	Yes	
shortest clock pulse	250 µs	250 µs	125 µs	
max. cycle	4 ms	4 ms	4 ms	
Bus cycle time (TDP), min.	250 µs	250 µs	125 µs	
Interrupts/diagnostics/ status information				
Status indicator	Yes	Yes	Yes	Yes
Alarms	Yes	Yes	Yes	Yes
Diagnostics function	Yes	Yes	Yes	Yes
Diagnostics indication LED				
• RUN LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Connection display LINK TX/RX	Yes; 2x green link LEDs on BusAdapter	Yes; 2x green link LEDs on BusAdapter	Yes; 2x green link LEDs on BusAdapter	
• Connection display DP				Yes; green DP LED

Technical specifications

Article number	6ES7155-6AU01-0CNO ET 200SP, IM155-6PN/2 HF	6ES7155-6AU30-0CNO ET 200SP, IM155-6PN/3 HF	6ES7155-6AU00-0DNO ET 200SP, IM155-6PN HS	6ES7155-6BA01-0CNO ET 200SP, IM155-6DP HF incl. DP-Connect.
Standards, approvals, certificates				
Network loading class	3	3	3	
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C; No condensation	-30 °C; No condensation	-25 °C; No condensation	-25 °C; No condensation
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; No condensation	-30 °C; No condensation	-25 °C; No condensation	-25 °C; No condensation
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
connection method				
ET-Connection				
• via BU/BA Send	Yes; + 16 ET 200AL modules	Yes; + 16 ET 200AL modules	No	Yes; + 16 ET 200AL modules
Mechanics/material				
Strain relief	Yes; Optional	Yes; Optional		
Dimensions				
Width	50 mm	100 mm	50 mm	50 mm
Height	117 mm	117 mm	117 mm	117 mm
Depth	74 mm	74 mm	74 mm	74 mm
Weights				
Weight, approx.	120 g; without BusAdapter	220 g; without BusAdapter	147 g; without BusAdapter	150 g

Article number	6ES7155-6AU00-0HMO ET 200SP, IM 155-6 PN R1
General information	
Product type designation	IM 155-6 PN R1
Product function	
• I&M data	Yes; I&M0 to I&M3
• Module swapping during operation (hot swapping)	Yes; Multi-hot swapping
• Isochronous mode	No
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V18
• PROFINET from GSD version/GSD revision	GSDML V2.42
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Short-circuit protection	Yes
Address area	
Address space per station	
• Address space per station, max.	1 440 byte
Hardware configuration	
Rack	
• Quantity of operable ET 200SP modules, max.	64
• Quantity of operable ET 200AL modules, max.	0
Submodules	
• Number of submodules per station, max.	256
Interfaces	
Number of PROFINET interfaces	1; 2 ports (switch)

Article number	6ES7155-6AU00-0HMO ET 200SP, IM 155-6 PN R1
1. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes
• Number of ports	2
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; BA 2x RJ45, BA 2x M12, BA 2x FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC, BA 2x LC, BA LC/RJ45, BA LC/FC, BA 2x LC-LD, BA LC-LD/RJ45, BA LC-LD/M12
Protocols	
• PROFINET IO Device	Yes
• Open IE communication	Yes
• Media redundancy	Yes
PROFINET IO Device Services	
- IRT	No
- PROFINET energy	No
- Prioritized startup	No
- Shared device	No
Interface types	
RJ 45 (Ethernet)	
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 100 Mbps	Yes
• Autonegotiation	Yes
• Autocrossing	Yes
Protocols	
Modbus TCP	No
Redundancy mode	
• PROFINET system redundancy (S2)	No
• PROFINET system redundancy (R1)	Yes
• H-Sync forwarding	Yes

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Interface modules > IM 155-6**Technical specifications**

Article number	6ES7155-6AU00-0HM0 ET 200SP, IM 155-6 PN R1
Media redundancy	
- MRP	Yes
- MRPD	No
Open IE communication	
• TCP/IP	Yes
• SNMP	Yes
• LLDP	Yes
Interrupts/diagnostics/ status information	
Status indicator	Yes
Alarms	Yes
Diagnostics function	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• ACT LED	Yes; green LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Connection display LINK TX/RX	Yes; 2x green link LEDs on BusAdapter

Article number	6ES7155-6AU00-0HM0 ET 200SP, IM 155-6 PN R1
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C; No condensation
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
connection method	
ET-Connection	
• via BU/BA Send	No
Dimensions	
Width	50 mm
Height	138 mm
Depth	89 mm
Weights	
Weight, approx.	192 g; without BusAdapter

Overview



Thanks to their wide scope of functions, the interface modules of the scalable SIMATIC ET 200SP I/O system, even in their basic versions, cover a wide range of applications. The basic functions of the interface modules include:

- Short data update times of typically 1 ms
- Single Hot Swap (withdrawing and insertion of an I/O module during operation without impairing the communication with the remaining modules)
- Operation with gaps (empty BaseUnits)
- Complete diagnostic support, extending to channel-by-channel diagnostics
- Configuration control / option handling (adaptation of the actual configuration via user program)
- Device replacement without programming device, with automatic re-initialization, with and without topological configuring
- I&M data 0 to 3 (electronic rating plate with non-volatile storage of plant data)
- Firmware update
- Pluggable 24 V DC supply connection
- Mains/voltage failure buffering time of at least 5 ms or 10 ms
- Labeling option via optional labeling strips and equipment labeling plates

When using PROFINET interface modules, the following basic functions are also included:

- Media redundancy (MRP)
- Integrated 2-port switch
- Freely selectable connection system (Standard function class and above) and physical connection (High Feature function class and above) by means of SIMATIC BusAdapters, also as system-integrated media converter from fiber-optic to copper cable. Can also be used for interface modules with MultiFieldbus interface.
- Reset button for simple return to factory settings without the need for programming device
- Automatic synchronization of the backplane bus to the PROFINET cycle to minimize the response time fluctuations (jitter)

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS PROFINET IM 155-6 PN Standard interface module

(Extended temperature range and exposure to environmental substances)

IM 155-6 PN ST, with server module and installed BusAdapter BA 2xRJ45, plus extended mains buffering time

6AG1155-6AA01-7BN0

IM 155-6PN ST, including server module, without BusAdapter, plus extended mains buffering time

6AG1155-6AU01-7BN0

SIPLUS High Feature interface module

(Extended temperature range and exposure to environmental substances)

IM 155-6 DP HF, with server module, with multi-hot-swap, including PROFIBUS connector

6AG1155-6BA01-7CN0

IM 155-6 PN HF, incl. server module, without BusAdapter

- Temperature range -40...+60 °C
- Temperature range -40...+70 °C

6AG1155-6AU01-2CN0
6AG1155-6AU01-7CN0**SIPLUS PROFINET IM 155-6 PN R1 redundant interface module**

2-port interface module, with server module, without SIMATIC BusAdapter, R1 redundancy

6AG1155-6AU00-7HM0

Accessories**SIPLUS Mounting Kit ET 200SP**

Mounting accessories for use with increased mechanical vibration and shock loads. Not approved for SIPLUS BusAdapter BA 2xRJ45

6AG1193-6AA00-0AA0

Other accessories

See SIMATIC ET 200SP, IM 155-6 interface module, page 10/11

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Interface modules > SIPLUS interface modules****Technical specifications**

Article number	6AG1155-6AA01-7BN0	6AG1155-6AU00-7HM0	6AG1155-6AU01-2CN0	6AG1155-6AU01-7CN0	6AG1155-6AU01-7BN0	6AG1155-6BA01-7CN0
Based on	6ES7155-6AA01-0BN0 SIPLUS ET 200SP IM155-6PN ST / BA	6ES7155-6AU00-0HM0 SIPLUS ET 200SP IM155-6PN R1	6ES7155-6AU01-0CN0 SIPLUS ET 200SP IM155-6PN HF	6ES7155-6AU01-0CN0 SIPLUS ET 200SP IM155-6PN HF	6ES7155-6AU01-0BN0 SIPLUS ET 200SP IM155-6PN ST	6ES7155-6BA01-0CN0 SIPLUS ET 200SP IM155-6DP HF
Ambient conditions						
Ambient temperature during operation						
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	60 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin	-40 °C; = Tmin	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin	-40 °C; = Tmin (incl. condensation/frost)
• vertical installation, max.	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax
Altitude during operation relating to sea level						
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity						
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance						
Coolants and lubricants						
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems						
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3			Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Technical specifications

Article number	6AG1155-6AA01-7BNO	6AG1155-6AU00-7HMO	6AG1155-6AU01-2CNO	6AG1155-6AU01-7CNO	6AG1155-6AU01-7BNO	6AG1155-6BA01-7CNO
Based on	6ES7155-6AA01-0BNO	6ES7155-6AU00-0HMO	6ES7155-6AU01-0CNO	6ES7155-6AU01-0CNO	6ES7155-6AU01-0BNO	6ES7155-6BA01-0CNO
	SIPLUS ET 200SP IM155-6PN ST / BA	SIPLUS ET 200SP IM155-6PN R1	SIPLUS ET 200SP IM155-6PN HF	SIPLUS ET 200SP IM155-6PN HF	SIPLUS ET 200SP IM155-6PN ST	SIPLUS ET 200SP IM155-6DP HF
Use on ships/at sea						
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6			Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology						
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark						
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating						
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Digital input modules

Overview



- 4, 8 and 16-channel digital input (DI) modules
- Apart from the standard type of delivery in single-unit packaging, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

For different requirements, the digital input modules offer:

- Function classes Basic, Standard, High Feature and High Speed as well as fail-safe DI (see "Fail-safe I/O modules")
- BaseUnits for single or multiple-conductor connection with automatic slot coding
- Potential distributor modules for system-integrated expansion with additional potential terminals
- Individual system-integrated potential group formation with self-assembling voltage busbars (a separate power module is no longer required for ET 200SP)

- Option of connecting sensors compliant with IEC 61131 type 1, 2 or 3 (module-dependent) for rated voltages of up to 24 V DC or 230 V AC
- PNP (sinking input) and NPN (sourcing input) versions
- Clear labeling on front of module
- LEDs for diagnostics, status, supply voltage and faults (e.g. wire break/short-circuit)
- Electronically readable and non-volatile writable nameplate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
 - MSI operating mode (simultaneous reading of input data from as many as three other controllers)
 - Counting operating mode (multi-channel counter for pulse generators with 32-bit counting width and up to 10 kHz counting frequency)
 - Oversampling operating mode (n-fold equidistant acquisition of digital values within one PN cycle for increasing the time resolution for slow CPU cycles)
 - Parameterizable input delay time
 - Isochronous mode (simultaneous equidistant reading of all input channels)
 - Hardware interrupts
 - Pulse stretching
 - Re-parameterization during operation
 - Firmware update
 - Diagnosis of wire break and short-circuit (on channel or module basis)
 - Value status (optional binary validity information of the input signal in the process image)
 - Supports the PROFlenergy profile
- Optional accessories
 - Labeling strips (film or card)
 - Equipment labeling plate
 - Color-coded label with module-specific CC code
 - Shield terminal

A quick and clear comparison of the functions of the different DI modules is offered by the TIA Selection Tool.

Overview of digital input modules

Digital input	Pkg. unit	Article No.	CC code	BU type
DI 16 x 24 V DC ST	1	6ES7131-6BH01-0BA0	CC00	A0
DI 16 x 24 V DC ST	10	6ES7131-6BH01-2BA0	CC00	A0
DI 8 x 24 V DC BA	1	6ES7131-6BF01-0AA0	CC01	A0
DI 8 x 24 V DC BA	10	6ES7131-6BF01-2AA0	CC01	A0
DI 8 x 24 V DC SRC BA	1	6ES7131-6BF61-0AA0	CC02	A0
DI 8 x 24 V DC ST	1	6ES7131-6BF01-0BA0	CC01	A0
DI 8 x 24 V DC ST	10	6ES7131-6BF01-2BA0	CC01	A0
DI 8 x 24 V DC HF	1	6ES7131-6BF00-0CA0	CC01	A0
DI 8 x 24 V DC HF	10	6ES7131-6BF00-2CA0	CC01	A0
DI 8 x NAMUR HF	1	6ES7131-6TF00-0CA0	CC01	A0
DI 8 x 24 V DC HS	1	6ES7131-6BF00-0DA0	CC01	A0
With three operating modes: • High-speed isochronous DI • 4 pulse counters, 32-bit, 10 kHz • Oversampling				
DI 4 x 120 ... 230 V AC ST	1	6ES7131-6FD01-0BB1	CC41	B1
DI 8 x 24 V AC ... 48 V UC	1	6ES7131-6CF00-0AU0	CC20	U0

Overview

Overview of BaseUnits

BaseUnit	Pkg. unit	Article No.	CC codes for process terminals	CC codes for AUX terminals
BU type A0 • New potential group (light) • 16 process terminals • With 10 AUX terminals	1	6ES7193-6BP20-0DA0	CC00 to CC05	CC71 to CC73
BU type A0 • New potential group (light) • 16 process terminals • With 10 AUX terminals	10	6ES7193-6BP20-2DA0	CC00 to CC05	CC71 to CC73
BU type A0 • New potential group (light) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0DA0	CC00 to CC05	--
BU type A0 • New potential group (light) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2DA0	CC00 to CC05	--
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • With 10 AUX terminals	1	6ES7193-6BP20-0BA0	CC00 to CC05	CC71 to CC73
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • With 10 AUX terminals	10	6ES7193-6BP20-2BA0	CC00 to CC05	CC71 to CC73
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0BA0	CC00 to CC05	--
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2BA0	CC00 to CC05	--
BU type B1 • Forwarding of the potential group (dark) • 12 process terminals • 2 x 2 (1L, 2L, 1N, 2N) direct infeed module • Without AUX terminals	1	6ES7193-6BP20-0BB1	CC41	--
BU type B1 • Forwarding of the potential group (dark) • 12 process terminals • 2 x 2 (1L, 2L, 1N, 2N) direct infeed module • Without AUX terminals	10	6ES7193-6BP20-2BB1	CC41	--
BU type U0 • New potential group (light) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0DU0	CC00	--
BU type U0 • New potential group (light) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2DU0	CC00	--
BU type U0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0BU0	CC00	--
BU type U0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2BU0	CC00	--

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Digital input modules

Overview

Overview of potential distributor modules

Potential distributor module	Pkg. unit	Article No.	CC codes for process terminals
PotDis BU Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP1	CC00, CC62
PotDis BU Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP1	CC00, CC62
PotDis BU Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP2	CC00, CC63
PotDis BU Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP2	CC00, CC63
PotDis TB Type BR-W, 18x internally bridged terminals, without reference to P1, P2 or AUX, (total current max. 10 A)	1	6ES7193-6TP00-0TP0	CC10 to CC13
PotDis TB Type P1-R, 18x P1 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP1	CC10, CC12
PotDis TB Type P2-B, 18x P2 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP2	CC10, CC13
PotDis TB Type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX	1	6ES7193-6TP00-0TN0	CC10

Ordering data

Digital input modules

Types of delivery:
Apart from the standard type of delivery in single-unit package, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

The number of modules required is the number of modules ordered. The pack type is selected by selecting the Article No. Packs of 10 can therefore only be ordered in integer multiples of 10.

Digital input module
DI 8x24VDC Basic, BU type A0, color code CC01

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10

Digital input module
DI 8x24VDC Source Input, Basic, BU type A0, color code CC02; PU: 1 unit

6ES7131-6BF01-0AA0
6ES7131-6BF01-2AA0

6ES7131-6BF61-0AA0

Digital input module
DI 8x24VDC Standard, BU type A0, color code CC01

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10

Digital input module
DI 16 x 24 V DC Standard, BU type A0, color code CC00

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10

Digital input module DI 8x24VDC High Feature, BU type A0, color code CC01, channel-specific diagnostics, isochronous mode, shared input (MSI); PU: 1 unit

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10

6ES7131-6BF01-0BA0
6ES7131-6BF01-2BA0

6ES7131-6BH01-0BA0
6ES7131-6BH01-2BA0

6ES7131-6BF00-0CA0
6ES7131-6BF00-2CA0

Ordering data	Article No.	Article No.
Digital input module DI 8x24VDC High Speed, BU type A0, color code CC01; 3 operating modes (fast isochronous DI, 4 pulse counters 32-bit 10 kHz, oversampling); PU: 1 unit	6ES7131-6BF00-0DA0	BU20-P12+A0+4B BU type B1; BaseUnit (dark) with 12 process terminals to the module; for continuing the potential group; 1 unit • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10
Digital input module DI 8xNAMUR High Feature, BU type A0, color code CC01; PU: 1 unit	6ES7131-6TF00-0CA0	6ES7193-6BP20-0BB1 6ES7193-6BP20-2BB1
Digital input module DI 4x120VAC-230VAC Standard, BU type B1, color code CC41; PU: 1 unit	6ES7131-6FD01-0BB1	BU20-P16+A0+2D BU type U0; BaseUnit (light) with 16 process terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10
Digital input module DI 8x24VAC-48VUC Basic, BU type U0, color code CC20, module diagnostics, PU: 1 unit	6ES7131-6CF00-0AU0	6ES7193-6BP00-0DU0 6ES7193-6BP00-2DU0
Suitable BaseUnits		
BU15-P16+A10+2D BU type A0; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10	6ES7193-6BP20-0DA0 6ES7193-6BP20-2DA0	BU20-P16+A0+2B BU type U0; BaseUnit (dark) with 16 process terminals to the module; for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10
BU15-P16+A0+2D BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10	6ES7193-6BP00-0DA0 6ES7193-6BP00-2DA0	Potential distributor modules
BU15-P16+A10+2B BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10	6ES7193-6BP00-0BA0 6ES7193-6BP20-2BA0	PotDis BU PotDis BU, type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A) PotDis BU, type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group PotDis BU, type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A) PotDis BU, type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group
BU15-P16+A0+2B BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10	6ES7193-6BP00-0BA0 6ES7193-6BP00-2BA0	PotDis TB PotDis TB, type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A) PotDis TB, type P1-R, 18x P1 potential, (total current max. 10 A) PotDis TB, type P2-B, 18x P2 potential, (total current max. 10 A) PotDis TB, type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX
		6ES7193-6UP00-0DP1 6ES7193-6UP00-0BP1 6ES7193-6UP00-0DP2 6ES7193-6UP00-0BP2
		6ES7193-6TP00-0TP0 6ES7193-6TP00-0TP1 6ES7193-6TP00-0TP2 6ES7193-6TP00-0TN0

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Digital input modules

Ordering data	Article No.	Article No.
Accessories		
Equipment labeling plate 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter	6ES7193-6LF30-0AW0	
Labeling strips 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0	
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0	
1000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AA0	
1000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AG0	
BU cover For covering empty slots (gaps); 5 units • 15 mm wide • 20 mm wide	6ES7133-6CV15-1AM0 6ES7133-6CV20-1AM0	
Shield connection 5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding	6ES7193-6SC20-1AM0	
Color-coded labels for 15 mm-wide BaseUnits Color code CC00, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16), 10 units	6ES7193-6CP00-2MA0	
Color code CC00, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16), 50 units	6ES7193-6CP00-4MA0	
Color code CC01, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units	6ES7193-6CP01-2MA0	
Color code CC01, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 50 units	6ES7193-6CP01-4MA0	
Color code CC02, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 10 units	6ES7193-6CP02-2MA0	
Color code CC02, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 50 units	6ES7193-6CP02-4MA0	
Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A); 10 units	6ES7193-6CP71-2AA0	
Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A); 10 units	6ES7193-6CP72-2AA0	
Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 10 units	6ES7193-6CP73-2AA0	
Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 50 units	6ES7193-6CP73-4AA0	
Color-coded labels for 20 mm-wide BaseUnits Color code CC41, for 16 process terminals, BU type B1, gray (terminals 1 to 4), red (terminals 5 to 8), blue (terminals 9 to 12); 10 units	6ES7193-6CP41-2MB0	
Color-coded labels for PotDis BU Color code CC62, for 16 process terminals, PotDis BU type P1, red (terminals 1 to 16); 10 units	6ES7193-6CP62-2MA0	
Color code CC63, for 16 process terminals, PotDis BU type P2, blue (terminals 1 to 16); 10 units	6ES7193-6CP63-2MA0	
Color-coded labels for PotDis TB Color code CC10, for 18 process terminals, PotDis TB, gray (terminals 1 to 18); 10 units	6ES7193-6CP10-2MT0	
Color code CC11, for 18 process terminals, PotDis TB, yellow-green (terminals 1 to 18); 10 units	6ES7193-6CP11-2MT0	
Color code CC12, for 18 process terminals, PotDis TB, type P1 and BR, red (terminals 1 to 18); 10 units	6ES7193-6CP12-2MT0	
Color code CC13, for 18 process terminals, PotDis TB, type P2 and BR, blue (terminals 1 to 18); 10 units	6ES7193-6CP13-2MT0	
Mechanical coding elements For automatic coding of I/O modules; spare part. 20 units Type A Type B Type C Type D	6ES7193-6KA00-3AA0 6ES7193-6KB00-3AA0 6ES7193-6KC00-3AA0 6ES7193-6KD00-3AA0	

Technical specifications

Article number	6ES7131-6BF01-0AA0 ET 200SP, DI 8x 24V DC Basic, PU 1	6ES7131-6BF61-0AA0 ET 200SP, DI 8x 24V DC SRC BA	6ES7131-6BF01-0BA0 ET 200SP, DI 8x 24V DC ST, PU 1	6ES7131-6BH01-0BA0 ET 200SP, DI 16x 24V DC ST, PU 1
General information				
Product type designation	DI 8x24VDC BA	DI 8x24 VDC SRC BA	DI 8x24 VDC ST	DI 16x24VDC ST
Product function				
• Isochronous mode	No	No	No	No
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V14	V14	V14	V14
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 or higher	V5.5 SP3
• PCS 7 configurable/ integrated from version			V8.1 SP1	V8.1 SP1
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3
Operating mode				
• DI	Yes	Yes	Yes	Yes
• Counter	No	No	No	No
• Oversampling	No	No	No	No
• MSI	No	No	No	No
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes
Encoder supply				
Number of outputs	8		8	
Short-circuit protection	Yes; per module	No	Yes; per module	
24 V encoder supply				
• 24 V	Yes		Yes	No
• Short-circuit protection	Yes		Yes	
• Output current, max.			700 mA	
• Output current per channel, max.	700 mA		700 mA	
• Output current per module, max.	700 mA		700 mA	
Digital inputs				
Number of digital inputs	8	8	8	16
Digital inputs, parameterizable	Yes	Yes	Yes	Yes
Source/sink input	P-reading	Sourcing	P-reading	P-reading
Input characteristic curve in accordance with IEC 61131, type 1	Yes	Yes		
Input characteristic curve in accordance with IEC 61131, type 2	Yes			
Input characteristic curve in accordance with IEC 61131, type 3	Yes		Yes	Yes
Input voltage				
• Rated value (DC)	24 V	24 V	24 V	24 V
• for signal "0"	-30 to +5 V	30 V to -5 V (reference potential is L+)	-30 to +5 V	-30 to +5 V
• for signal "1"	+11 to +30V	-11 V to -30 V (reference potential is L+)	+11 to +30V	+11 to +30V
Input current				
• for signal "1", typ.	6.8 mA	6 mA	2.5 mA	2.5 mA
Input delay (for rated value of input voltage) for standard inputs				
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Digital input modules****Technical specifications**

Article number	6ES7131-6BF01-0AA0 ET 200SP, DI 8x 24V DC Basic, PU 1	6ES7131-6BF61-0AA0 ET 200SP, DI 8x 24V DC SRC BA	6ES7131-6BF01-0BA0 ET 200SP, DI 8x 24V DC ST, PU 1	6ES7131-6BH01-0BA0 ET 200SP, DI 16x 24V DC ST, PU 1
Encoder				
Connectable encoders				
• 2-wire sensor	Yes	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	2 mA	1.5 mA	1.5 mA	1.5 mA
Interrupts/diagnostics/ status information				
Diagnostics function	Yes	Yes	Yes	Yes
Alarms				
• Diagnostic alarm	Yes	Yes	Yes	Yes
Diagnoses				
• Diagnostic information readable	Yes	Yes	Yes	Yes
• Monitoring the supply voltage	Yes	Yes	Yes	Yes
- parameterizable	Yes	Yes	Yes	Yes
• Monitoring of encoder power supply	No	No	Yes; Module-by-module, optional protective circuit for preventing wire-break diagnostics in the case of simple encoder contacts: 25 kOhm to 45 kOhm	No
• Wire-break	No	No	Yes; Module-wise	Yes; Module-by-module, optional protective circuit for preventing wire-break diagnostics in the case of simple encoder contacts: 25 kOhm to 45 kOhm
• Short-circuit	No	No	Yes; Module-wise	No
• Group error	Yes	Yes	Yes	Yes
Diagnostics indication LED				
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation				
Potential separation channels				
• between the channels and backplane bus	Yes	Yes	Yes	Yes
Standards, approvals, certificates				
Suitable for safety functions	No	No	No	No
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS02
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS02
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions				
Width	15 mm	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm
Weights				
Weight, approx.	28 g	28 g	28 g	28 g

Technical specifications

Article number	6ES7131-6BF00-0CA0 ET 200SP, DI 8x24VDC HF, PU 1	6ES7131-6BF00-0DA0 ET 200SP, DI 8x24VDC High Speed	6ES7131-6TF00-0CA0 ET 200SP, DI 8xNAMUR HF	6ES7131-6FD01-0BB1 ET 200SP, DI 4x 120...230V AC ST	6ES7131-6CF00-0AU0 ET 200SP, DI 8x 24VAC...48VUC BA, PU 1
General information					
Product type designation	DI 8x24 V DC HF	DI 8x24 V DC HS	DI 8xNAMUR HF	DI 4x120 ... 230 V AC ST	DI 8x24VAC/48VUC BA
Product function					
• Isochronous mode	Yes	Yes	No	No	No
Engineering with					
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1 / -	V13 SP1	V13 / V13	V14	V15
• STEP 7 configurable/ integrated from version	V5.5 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3	V5.6
• PCS 7 configurable/ integrated from version	V8.1 SP1				
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	GSD Revision 5	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3
Operating mode					
• DI	Yes	Yes	Yes	Yes	Yes
• Counter	No	Yes	No	No	No
• Oversampling	No	Yes	No	No	No
• MSI	Yes	No	No	No	No
Supply voltage					
Rated value (DC)	24 V	24 V	24 V		48 V
Rated value (AC)				230 V	48 V; 24 V/48 V; 50 Hz/60 Hz
Reverse polarity protection	Yes	Yes	Yes	No	Yes
Encoder supply					
Number of outputs	8		8	4	8
Short-circuit protection	Yes		Yes	No; when using BU type B1, a fuse with 10 A tripping current must be provided	Yes; Per module, 5x 20 mm fuse, 2 A/250 V, quick-response, replaceable
Output current					
• up to 60 °C, max.				10 A	1 A
24 V encoder supply					
• 24 V	Yes	Yes	No		No
• Short-circuit protection	Yes; per channel, electronic	Yes; per module, electronic	No		
• Output current, max.		700 mA			
• Output current per channel, max.	700 mA				
• Output current per module, max.	700 mA				
Digital inputs					
Number of digital inputs	8	8	8; NAMUR	4	8
Digital inputs, parameterizable	Yes		Yes		
Source/sink input	P-reading	P-reading			P-reading
Input characteristic curve in accordance with IEC 61131, type 1					Yes
Input characteristic curve in accordance with IEC 61131, type 2					No
Input characteristic curve in accordance with IEC 61131, type 3	Yes			Yes	No
Pulse extension	Yes; Pulse duration from 4 µs	Yes	Yes; 0.5 s, 1 s, 2 s		No
• Length	2 s; 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s	2 s; 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s			
Edge evaluation	Yes; rising edge, falling edge, edge change		Yes; rising edge, falling edge, edge change		
Signal change flutter			Yes; 2 to 32 signal changes		
Flutter observation window			Yes; 0.5 s, 1 s to 100 s in 1-s steps		

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Digital input modules

Technical specifications

Article number	6ES7131-6BF00-0CA0 ET 200SP, DI 8x24VDC HF, PU 1	6ES7131-6BF00-0DA0 ET 200SP, DI 8x24VDC High Speed	6ES7131-6TF00-0CA0 ET 200SP, DI 8xNAMUR HF	6ES7131-6FD01-0BB1 ET 200SP, DI 4x 120..230V AC ST	6ES7131-6CF00-0AU0 ET 200SP, DI 8x 24VAC..48VUC BA, PU 1
Digital input functions, parameterizable					
<ul style="list-style-type: none"> Gate start/stop Freely usable digital input Counter Digital input with oversampling 		Yes			
Input voltage					
<ul style="list-style-type: none"> Rated value (DC) Rated value (AC) for signal *0* for signal *1* 	24 V	24 V	8.2 V	230 V	
	-30 to +5 V	-30 to +5 V		0V AC to 40V AC	AC/DC < 10 V
	+11 to +30V	+11 to +30V		74 V AC to 264 V AC	AC > 14 V, DC > 34 V
Input current					
<ul style="list-style-type: none"> for signal *1*, typ. 	2.5 mA	6 mA		10.8 mA	3.5 mA
for 10 k switched contact					
- for signal *0*, min.			0.35 mA		
- for signal *0*, max.			1.2 mA		
- for signal *1*, min.			2.1 mA		
- for signal *1*, max.			7 mA		
for unswitched contact					
- for signal *0*, max. (permissible quiescent current)			0.5 mA		
- for signal *1*, typ.			8 mA		
for NAMUR encoders					
- for signal *0*, min.			0.35 mA		
- for signal *0*, max.			1.2 mA		
- for signal *1*, min.			2.1 mA		
- for signal *1*, max.			7 mA		
Input delay (for rated value of input voltage)					
<ul style="list-style-type: none"> tolerated changeover time for changeover contacts 			300 ms		
for standard inputs					
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms	No	No	No
for interrupt inputs					
- parameterizable		Yes			
for technological functions					
- parameterizable		Yes			
for NAMUR inputs					
- at *0* to *1*, max.			12 ms		
- at *1* to *0*, max.			12 ms		
Encoder					
Connectable encoders					
<ul style="list-style-type: none"> NAMUR encoder/changeover contact according to EN 60947 Single contact / changeover contact unconnected Single contact / changeover contact connected with 10 kΩ 2-wire sensor - permissible quiescent current (2-wire sensor), max. 	Yes	Yes	Yes	Yes	Yes
	1.5 mA	1.5 mA			
Isochronous mode					
Filtering and processing time (TCI), min.	420 µs				
Bus cycle time (TDP), min.	500 µs	125 µs			

Technical specifications

Article number	6ES7131-6BF00-0CA0 ET 200SP, DI 8x24VDC HF, PU 1	6ES7131-6BF00-0DA0 ET 200SP, DI 8x24VDC High Speed	6ES7131-6TF00-0CA0 ET 200SP, DI 8xNAMUR HF	6ES7131-6FD01-0BB1 ET 200SP, DI 4x 120..230V AC ST	6ES7131-6CF00-0AU0 ET 200SP, DI 8x 24VAC..48VUC BA, PU 1
Interrupts/diagnostics/ status information					
Diagnostics function	Yes	Yes	Yes		Yes
Alarms					
• Diagnostic alarm	Yes; channel by channel	Yes	Yes; channel by channel	No	Yes
• Hardware interrupt	Yes; Parameterizable, channels 0 to 7	Yes	Yes; Parameterizable, channels 0 to 7	No	
Diagnoses					
• Diagnostic information readable	Yes	Yes	Yes		Yes
• Monitoring the supply voltage	Yes	Yes	Yes	No	Yes
- parameterizable	Yes	Yes	Yes		
• Monitoring of encoder power supply	Yes; channel by channel	Yes; Module-wise	No		Yes
• Wire-break	Yes; Channel by channel, optional protective circuit for preventing wire-break diagnostics in the case of simple encoder contacts: 25 kOhm to 45 kOhm	No	Yes; channel by channel	No	
• Short-circuit	Yes; channel by channel	Yes; Module-wise	Yes; channel by channel	No	
• Group error					Yes
Diagnostics indication LED					
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	No	Yes; red LED	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation					
Potential separation channels					
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes
Standards, approvals, certificates					
Suitable for safety functions	No	No	No	No	No
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-30 °C; < 0 °C as of FS07	-30 °C; < 0 °C as of FS04	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS07	-30 °C; < 0 °C as of FS04	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m
Dimensions					
Width	15 mm	15 mm	15 mm	20 mm	20 mm
Height	73 mm	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm	58 mm
Weights					
Weight, approx.	28 g	28 g	32 g	36 g	40 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Digital output modules

Overview



- 4, 8 and 16-channel digital output (DQ) modules
 - Apart from the standard type of delivery in single-unit packaging, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.
- For different requirements, the digital output modules offer:
- Function classes Basic, Standard, High Feature and High Speed as well as fail-safe DQ (see "Fail-safe I/O modules")
 - BaseUnits for single or multiple-conductor connection with automatic slot coding
 - Potential distributor modules for system-integrated expansion with potential terminals
 - Individual system-integrated potential group formation with self-assembling voltage busbars (a separate power module is no longer required for ET 200SP)
 - Option of connecting actuators with rated load voltages of up to 120 V DC or 230 V AC and load currents of up to 5 A (depending on module)

- Relay modules
 - NO contact or changeover contact
 - for load or signal voltages (coupling relay)
 - with manual operation (as simulation module for inputs and outputs, jog mode for commissioning or emergency operation on failure of PLC)
- PNP (sourcing output) and NPN (sinking output) versions
- Clear labeling on front of module
- LEDs for diagnostics, status, supply voltage and faults
- Electronically readable and non-volatile writable nameplate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
 - MSO operating mode (simultaneous reading of output data from as many as three other PLCs)
 - Pulse width modulation operating mode (output value as pulse-pause ratio of between 0.0% and 100.0% for controlling the output current)
 - Oversampling operating mode (n-fold equidistant output of digital values within a PN cycle for the precise time control of an output or a sequence of output values)
 - Isochronous mode (simultaneous equidistant output of all output channels)
 - Output of substitute value in the event of communication interruptions (0, 1 or last value retained)
 - Re-parameterization during operation
 - Firmware update
 - Valve control (output signal does not switch automatically after a set pickup time to a current-saving PWM output)
 - Diagnostics of wire break and short-circuit (on channel or module basis)
 - Value status (optional binary validity information of the output signal in the process image)
 - Supports the PROFlenergy profile
- Optional accessories
 - Labeling strips (film or card)
 - Equipment labeling plate
 - Color-coded label with module-specific CC code
 - Shield terminal

A quick and clear comparison of the functions of the different DQ modules is offered by the TIA Selection Tool.

Overview

Overview of digital output modules

Digital output	Pkg. unit	Article No.	CC code	BU type
DQ 16 x 24 V DC/0.5 A BA	1	6ES7132-6BH00-0AA0	CC00	A0
DQ 16 x 24 V DC/0.5 A BA	10	6ES7132-6BH00-2AA0	CC00	A0
DQ 16 x 24 V DC/0.5 A ST	1	6ES7132-6BH01-0BA0	CC00	A0
DQ 16 x 24 V DC/0.5 A ST	10	6ES7132-6BH01-2BA0	CC00	A0
DQ 16 x 24 V DC/0.5 A HF	1	6ES7132-6BH00-0CA0	CC00	A0
DQ 8 x 24 V DC/0.5 A SNK BA	1	6ES7132-6BF61-0AA0	CC01	A0
DQ 8 x 24 V DC/0.5 A BA	1	6ES7132-6BF01-0AA0	CC02	A0
DQ 8 x 24 V DC/0.5 A BA	10	6ES7132-6BF01-2AA0	CC02	A0
DQ 8 x 24 V DC/0.5 A ST	1	6ES7132-6BF01-0BA0	CC02	A0
DQ 8 x 24 V DC/0.5 A ST	10	6ES7132-6BF01-2BA0	CC02	A0
DQ 8 x 24 V DC/0.5 A HF	1	6ES7132-6BF00-0CA0	CC02	A0
DQ 8 x 24 V DC/0.5 A HF	10	6ES7132-6BF00-2CA0	CC02	A0
DQ 4 x 24 V DC/2 A ST	1	6ES7132-6BD20-0BA0	CC02	A0
DQ 4 x 24 V DC/2 A ST	10	6ES7132-6BD20-2BA0	CC02	A0
DQ 4 x 24 V DC/2 A HF	1	6ES7132-6BD20-0CA0	CC02	A0
DQ 4 x 24 V DC/2 A HS	1	6ES7132-6BD20-0DA0	CC02	A0
With three operating modes:				
• Fast isochronous DQ with valve control				
• Pulse width modulation				
• Oversampling				
DQ 4 x 24 ... 230 V AC/2 A ST	1	6ES7132-6FD00-0BB1	CC41	B0, B1
DQ 4 x 24 ... 230 V AC/2 A ST	10	6ES7132-6FD00-2BB1	CC41	B0, B1
DQ 4 x 24 ... 230 V AC/2 A HF	1	6ES7132-6FD00-0CU0	CC20	U0
With two operating modes:				
• DQ				
• PC: Power control via phase angle, half-wave or full-wave control				
RQ 4 x 24 V UC/2 A CO ST	1	6ES7132-6GD51-0BA0	--	A0
RQ 4 x 120 V DC-230 V AC/5 A NO ST	1	6ES7132-6HD01-0BB1	--	B0, B1
RQ 4 x 120 V DC-230 V AC/5 A NO ST	10	6ES7132-6HD01-2BB1	--	B0, B1
RQ MA 4 x 120 V DC ... 230 V AC/5 A NO ST	1	6ES7132-6MD00-0BB1	--	B0, B1

Overview of BaseUnits

BaseUnit	Pkg. unit	Article No.	CC codes for process terminals	CC codes for AUX terminals
BU type A0 • New potential group (light) • 16 process terminals • With 10 AUX terminals	1	6ES7193-6BP20-0DA0	CC01 to CC05	CC71 to CC73
BU type A0 • New potential group (light) • 16 process terminals • With 10 AUX terminals	10	6ES7193-6BP20-2DA0	CC01 to CC05	CC71 to CC73
BU type A0 • New potential group (light) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0DA0	CC01 to CC05	--
BU type A0 • New potential group (light) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2DA0	CC01 to CC05	--
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • With 10 AUX terminals	1	6ES7193-6BP20-0BA0	CC01 to CC05	CC71 to CC73

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Digital output modules****Overview**

BaseUnit	Pkg. unit	Article No.	CC codes for process terminals	CC codes for AUX terminals
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • With 10 AUX terminals	10	6ES7193-6BP20-2BA0	CC01 to CC05	CC71 to CC73
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0BA0	CC01 to CC05	--
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2BA0	CC01 to CC05	--
BU type B0 • Forwarding of the potential group (dark) • 12 process terminals • With 4 AUX terminals	1	6ES7193-6BP20-0BB0	CC41	CC81 to CC83
BU type B0 • Forwarding of the potential group (dark) • 12 process terminals • With 4 AUX terminals	10	6ES7193-6BP20-0BB0	CC41	CC81 to CC83
BU type B1 • Forwarding of the potential group (dark) • 12 process terminals • 2 x 2 (1L, 2L, 1N, 2N) direct infeed module • Without AUX terminals	1	6ES7193-6BP20-0BB1	CC41	--
BU type B1 • Forwarding of the potential group (dark) • 12 process terminals • 2 x 2 (1L, 2L, 1N, 2N) direct infeed module • Without AUX terminals	10	6ES7193-6BP20-2BB1	CC41	--
BU type U0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0BU0	CC20	--
BU type U0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2BU0	CC20	--
BU type U0 • New potential group (light) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0DU0	CC20	--
BU type U0 • New potential group (light) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2DU0	CC20	--

Overview

Overview of potential distributor modules

Potential distributor module	Pkg. unit	Article No.	CC codes for process terminals
PotDis BU Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP1	CC00, CC62
PotDis BU Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP1	CC00, CC62
PotDis BU Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP2	CC00, CC63
PotDis BU Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP2	CC00, CC63
PotDis TB Type BR-W, 18x internally bridged terminals, without reference to P1, P2 or AUX, (total current max. 10 A)	1	6ES7193-6TP00-0TP0	CC10 to CC13
PotDis TB Type P1-R, 18x P1 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP1	CC10, CC12
PotDis TB Type P2-B, 18x P2 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP2	CC10, CC13
PotDis TB Type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX	1	6ES7193-6TP00-0TN0	CC10

10

Ordering data

Digital output modules

Types of delivery:
Apart from the standard type of delivery in single-unit packaging, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

The number of modules required is the number of modules ordered. The pack type is selected by selecting the Article No. Packs of 10 can therefore only be ordered in integer multiples of 10.

Digital output module
DQ 16x24VDC/0.5A Basic,
BU type A0, color code CC00

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7132-6BH00-0AA0
6ES7132-6BH00-2AA0

Digital output module
DQ 16x24VDC/0.5A Standard,
sourcing output, BU type A0,
color code CC00

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7132-6BH01-0BA0
6ES7132-6BH01-2BA0

Digital output module
DQ 16x24VDC/0.5A High Feature,
sourcing output, BU type A0,
color code CC00

- Pack of 1 unit

6ES7132-6BH00-0CA0

Digital output module
DQ 8x24VDC/0.5A Sink output,
Basic, BU type A0, color code CC01

- Pack of 1 unit

6ES7132-6BF61-0AA0

Digital output module
DQ 8x24VDC/0.5A Basic,
BU type A0, color code CC02

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7132-6BF01-0AA0
6ES7132-6BF01-2AA0

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Digital output modules****Ordering data****Article No.****Article No.**

Digital output module
DQ 8x24VDC/0.5A Standard,
BU type A0, color code CC02

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7132-6BF01-0BA0
6ES7132-6BF01-2BA0

Digital output module
DQ 8x24VDC/0.5A High Feature,
BU type A0, color code CC02

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7132-6BF00-0CA0
6ES7132-6BF00-2CA0

Digital output module
DQ 4x24VDC/2A Standard,
BU type A0, color code CC02

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7132-6BD20-0BA0
6ES7132-6BD20-2BA0

Digital output module
DQ 4x24VDC/2A High Feature,
BU type A0, color code CC02,
channel-specific diagnostics,
isochronous mode,
shared output (MSO)

- Pack of 1 unit

6ES7132-6BD20-0CA0

Digital output module
DQ 4x24VDC/2A High Speed,
BU type A0, color code CC02,
3 operating modes
(fast isochronous DQ with valve
control, pulse width modulation,
oversampling)

- Pack of 1 unit

6ES7132-6BD20-0DA0

Digital output module
DQ 4x24VAC...230VAC/2A
Standard for BU type B1,
color code CC41

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7132-6FD00-0BB1
6ES7132-6FD00-2BB1

Digital output module
DQ 4x24VAC...230VAC/2A
High Feature for BU type U0,
color code CC20,
2 operating modes:
DQ and PC (power control via
phase angle, half-wave and
full-wave control)

- Pack of 1 unit

6ES7132-6FD00-0CU0

Signal relay module
RQ CO 4x24VUC/2A Standard,
changeover contact, BU type A0,
color code CC00

- Pack of 1 unit

6ES7132-6GD51-0BA0

Relay module
RQ NO 4x120VDC-230VAC/5A
Standard, NO contact,
BU type B0, B1

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7132-6HD01-0BB1
6ES7132-6HD01-2BB1

Relay module
RQ NO 4x120VDC-230VAC/5A
Standard, NO contact,
with manual operation,
BU type B0, B1

6ES7132-6MD00-0BB1

Relay module
RQ CO 3x120V DC..230VAC/5A
Standard, changeover contact,
isolated, BU type U0,
color code CC20

6ES7132-6HC50-0BU0

Relay module
RQ COni 3x120V DC..230VAC/5A
Standard, changeover contact,
non-isolated, BU type U0,
color code CC20

6ES7132-6HC70-0BU0

Suitable BaseUnits**BU15-P16+A10+2D**

BU type A0; BaseUnit (light)
with 16 process terminals (1 ... 16)
to the module and an additional
10 internally jumpered AUX
terminals (1 A to 10 A);
for starting a new potential group
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7193-6BP20-0DA0
6ES7193-6BP20-2DA0

BU15-P16+A0+2D

BU type A0; BaseUnit (light)
with 16 process terminals to
the module;
for starting a new potential group
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7193-6BP00-0DA0
6ES7193-6BP00-2DA0

BU15-P16+A10+2B

BU type A0; BaseUnit (dark)
with 16 process terminals (1...16)
to the module and an additional
10 internally bridged AUX terminals
(1 A to 10 A); for continuing the
potential group

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7193-6BP20-0BA0
6ES7193-6BP20-2BA0

BU15-P16+A0+2B

BU type A0; BaseUnit (dark)
with 16 process terminals to
the module; for continuing the
potential group

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7193-6BP00-0BA0
6ES7193-6BP00-2BA0

Ordering data	Article No.	Article No.
BU20-P12+A4+0B BU type B0; BaseUnit (dark) with 12 process terminals (1 ... 12) to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the potential group <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 	6ES7193-6BP20-0BB0 6ES7193-6BP20-2BB0	PotDis TB PotDis TB, type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A) PotDis TB, type P1-R, 18x P1 potential, (total current max. 10 A) PotDis TB, type P2-B, 18x P2 potential, (total current max. 10 A) PotDis TB, type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX
BU20-P12+A0+4B BU type B1; BaseUnit (dark) with 12 process terminals to the module; for continuing the potential group <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 	6ES7193-6BP20-0BB1 6ES7193-6BP20-2BB1	Accessories Equipment labeling plate 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter Labeling strips 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer 500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer 1000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer 1000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer
BU20-P16+A0+2D BU type U0; BaseUnit (light) with 16 process terminals to the module; for starting a new potential group (max. 10 A) <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 	6ES7193-6BP00-0DU0 6ES7193-6BP00-2DU0	BU cover For covering empty slots (gaps); 5 units <ul style="list-style-type: none"> • 15 mm wide • 20 mm wide
BU20-P16+A0+2B BU type U0; BaseUnit (dark) with 16 process terminals to the module; for continuing the potential group <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 	6ES7193-6BP00-0BU0 6ES7193-6BP00-2BU0	Shield connection 5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding
Potential distributor modules PotDis BU PotDis BU, type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A) PotDis BU, type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group PotDis BU, type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A) PotDis BU, type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	6ES7193-6UP00-0DP1 6ES7193-6UP00-0BP1 6ES7193-6UP00-0DP2 6ES7193-6UP00-0BP2	Color-coded labels for 15 mm-wide BaseUnits Color code CC00, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units Color code CC00, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 50 units Color code CC01, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units Color code CC01, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 50 units Color code CC02, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 10 units Color code CC02, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 50 units
		6ES7193-6TP00-0TP0 6ES7193-6TP00-0TP1 6ES7193-6TP00-0TP2 6ES7193-6TP00-0TN0 6ES7193-6LF30-0AW0 6ES7193-6LR10-0AA0 6ES7193-6LR10-0AG0 6ES7193-6LA10-0AA0 6ES7193-6LA10-0AG0 6ES7133-6CV15-1AM0 6ES7133-6CV20-1AM0 6ES7193-6SC20-1AM0 6ES7193-6CP00-2MA0 6ES7193-6CP00-4MA0 6ES7193-6CP01-2MA0 6ES7193-6CP01-4MA0 6ES7193-6CP02-2MA0 6ES7193-6CP02-4MA0

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Digital output modules

Ordering data	Article No.	Article No.
Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A); 10 units	6ES7193-6CP71-2AA0	Color-coded labels for PotDis TB
Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A); 10 units	6ES7193-6CP72-2AA0	Color code CC10, for 18 process terminals, PotDis TB, gray (terminals 1 to 18); 10 units
Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 10 units	6ES7193-6CP73-2AA0	Color code CC11, for 18 process terminals, PotDis TB, yellow-green (terminals 1 to 18); 10 units
Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 50 units	6ES7193-6CP73-4AA0	Color code CC12, for 18 process terminals, PotDis TB, type P1 and BR, red (terminals 1 to 18); 10 units
Color-coded labels for 20 mm-wide BaseUnits		Color code CC13, for 18 process terminals, PotDis TB, type P2 and BR, blue (terminals 1 to 18); 10 units
Color code CC41, for 16 process terminals, BU type B1, gray (terminals 1 to 4), red (terminals 5 to 8), blue (terminals 9 to 12); 10 units	6ES7193-6CP41-2MB0	Mechanical coding elements
Color code CC81, for 4 AUX terminals, BU type B0, yellow/green (terminals 1 A to 4 A); 10 units	6ES7193-6CP81-2AB0	For automatic coding of I/O modules; spare part. 20 units
Color code CC82, for 4 AUX terminals, BU type B0, red (terminals 1 A to 4 A); 10 units	6ES7193-6CP82-2AB0	Type A
Color code CC83, for 4 AUX terminals, BU type B0, blue (terminals 1 A to 4 A); 10 units	6ES7193-6CP83-2AB0	Type B
Color-coded labels for PotDis BU		Type C
Color code CC62, for 16 process terminals, PotDis BU type P1, red (terminals 1 to 16); 10 units	6ES7193-6CP62-2MA0	Type D
Color code CC63, for 16 process terminals, PotDis BU type P2, blue (terminals 1 to 16); 10 units	6ES7193-6CP63-2MA0	
		6ES7193-6KA00-3AA0
		6ES7193-6KB00-3AA0
		6ES7193-6KC00-3AA0
		6ES7193-6KD00-3AA0

Technical specifications

Article number	6ES7132-6BF61-0AA0	6ES7132-6BH00-0AA0	6ES7132-6BH01-0BA0	6ES7132-6BF01-0AA0	6ES7132-6BF01-0BA0	6ES7132-6BH00-0CA0
	ET 200SP, DQ 8x 24VDC/0,5A SINK BA, PU 1	ET 200SP, DQ 16x24VDC/0,5A BA, PU 1	ET 200SP, DQ 16x 24V DC/0,5A ST, PU 1	ET 200SP, DQ 8x 24V DC/0,5A Basic, PU 1	ET 200SP, DQ 8x 24V DC/0,5A ST, PU 1	ET 200SP, DQ 16x24VDC/0,5A HF, PU 1
General information						
Product type designation	DQ 8x24VDC/0,5A SNK BA	DQ 16x24VDC/0,5A BA	DQ 16x24VDC/0,5A ST	DQ 8x24VDC/0,5A BA	DQ 8x24VDC/0,5A ST	DQ 16x24VDC/0,5A HF
Product function						
• Isochronous mode	No	No	No	No	No	Yes
Engineering with						
• STEP 7 TIA Portal configurable/ integrated from version	V14	V14	V14	V14	V14	STEP 7 V18 or higher with HSP 0416
• STEP 7 configurable/ integrated from version	V5.5 SP3	STEP 7 V5.5 or higher	V5.5 SP3	V5.5 SP3	V5.5 SP3 or higher	V5.5 SP3 or higher
• PCS 7 configurable/ integrated from version			V8.1 SP1		V8.1 SP1	
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.43

Technical specifications

Article number	6ES7132-6BF61-0AA0	6ES7132-6BH00-0AA0	6ES7132-6BH01-0BA0	6ES7132-6BF01-0AA0	6ES7132-6BF01-0BA0	6ES7132-6BH00-0CA0
	ET 200SP, DQ 8x 24VDC/0,5A SINK BA, PU 1	ET 200SP, DQ 16x24VDC/0,5A BA, PU 1	ET 200SP, DQ 16x 24V DC/0,5A ST, PU 1	ET 200SP, DQ 8x 24V DC/0,5A Basic, PU 1	ET 200SP, DQ 8x 24V DC/0,5A ST, PU 1	ET 200SP, DQ 16x24VDC/0,5A HF, PU 1
Operating mode						
• DQ	Yes	Yes	Yes	Yes	Yes	Yes
• DQ with energy-saving function	No	No	No	No	No	No
• PWM	No	No	No	No	No	No
• Cam control (switching at comparison values)						No
• Oversampling	No	No	No	No	No	No
• MSO	No	No	No	No	No	Yes
Supply voltage						
Rated value (DC)	24 V	24 V	24 V	24 V	24 V	24 V
Reverse polarity protection		Yes	Yes	Yes	Yes	Yes
Digital outputs						
Type of digital output	Sink output (NPN)	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)
Number of digital outputs	8	16	16	8	8	16
Current-sinking	Yes	No	No			No
Current-sourcing		Yes	Yes	Yes	Yes	Yes
Digital outputs, parameterizable	Yes	Yes	Yes	Yes	Yes	Yes
Short-circuit protection	Yes	Yes	Yes	Yes; per channel, electronic	Yes	Yes; Electronic
Open-circuit detection		No	Yes			
Limitation of inductive shutdown voltage to	Typ. 47 V	Typ. L+ (-53 V)	Typ. L+ (-50 V)	Typ. L+ (-50 V)	Typ. L+ (-50 V)	Typ. L+ (-50 V)
Controlling a digital input	Yes	Yes	Yes	Yes	Yes	Yes
Switching capacity of the outputs						
• with resistive load, max.	0.5 A	0.5 A	0.5 A	0.5 A	0.5 A	0.5 A
• with inductive load, max.						0.5 A
• on lamp load, max.	5 W	5 W	5 W	5 W	5 W	5 W
Load resistance range						
• lower limit	48 Ω	48 Ω	48 Ω	48 Ω	48 Ω	48 Ω
• upper limit	3 400 Ω	100 kΩ	12 kΩ	100 kΩ	12 kΩ	12 kΩ
Output voltage						
• for signal "1", min.					L+ (-0.8 V)	
Output current						
• for signal "1" rated value	0.5 A	0.5 A	0.5 A	0.5 A	0.5 A	0.5 A
• for signal "0" residual current, max.	5 μA	30 μA	0.1 mA	10 μA	0.1 mA	0.1 mA
Output delay with resistive load						
• "0" to "1", typ.		80 μs; at rated load	50 μs			50 μs
• "0" to "1", max.	300 μs	150 μs; at rated load		100 μs; at rated load	50 μs; at rated load	
• "1" to "0", typ.		100 μs; at rated load	100 μs			100 μs
• "1" to "0", max.	600 μs	200 μs; at rated load		150 μs; at rated load	100 μs; at rated load	
Parallel switching of two outputs						
• for uprating	No	No	No	No	No	No
• for redundant control of a load	Yes	Yes	Yes	Yes	Yes	Yes
Switching frequency						
• with resistive load, max.	100 Hz	100 Hz	100 Hz	100 Hz	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	2 Hz	2 Hz	2 Hz	2 Hz	0.1 Hz; higher frequencies are possible, see Equipment Manual "Maximum permitted switching frequency of inductive loads"
• on lamp load, max.	10 Hz	10 Hz	10 Hz	10 Hz	10 Hz	10 Hz

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Digital output modules****Technical specifications**

Article number	6ES7132-6BF61-0AA0 ET 200SP, DQ 8x 24VDC/0,5A SINK BA, PU 1	6ES7132-6BH00-0AA0 ET 200SP, DQ 16x 24VDC/0,5A BA, PU 1	6ES7132-6BH01-0BA0 ET 200SP, DQ 16x 24V DC/0,5A ST, PU 1	6ES7132-6BF01-0AA0 ET 200SP, DQ 8x 24V DC/0,5A Basic, PU 1	6ES7132-6BF01-0BA0 ET 200SP, DQ 8x 24V DC/0,5A ST, PU 1	6ES7132-6BH00-0CA0 ET 200SP, DQ 16x24VDC/0,5A HF, PU 1
Total current of the outputs						
• Current per channel, max.	0.5 A	0.5 A	0.5 A	0.5 A	0.5 A	0.5 A
• Current per module, max.	4 A	8 A	8 A	4 A	4 A	8 A
Total current of the outputs (per module)						
horizontal installation						
- up to 40 °C, max.			8 A			8 A
- up to 50 °C, max.			6 A			6 A
- up to 60 °C, max.	4 A	8 A	4 A	4 A	4 A	4 A
vertical installation						
- up to 30 °C, max.			8 A			8 A
- up to 40 °C, max.			6 A			6 A
- up to 50 °C, max.	4 A	8 A	4 A	4 A	4 A	4 A
Isynchronous mode						
Execution and activation time (TCO), min.						48 µs
Bus cycle time (TDP), min.						500 µs
Interrupts/diagnostics/status information						
Diagnostics function	Yes	Yes	Yes	Yes	Yes	Yes
Substitute values connectable	Yes	Yes	Yes	Yes	Yes	Yes
Alarms						
• Diagnostic alarm	Yes	Yes	Yes	Yes	Yes	Yes
Diagnoses						
• Monitoring the supply voltage	Yes	Yes	Yes	Yes	Yes	Yes
• Wire-break	No	No	Yes; Module-wise	No	Yes; Module-wise	Yes; channel by channel
• Short-circuit	No	No		No		
• Short-circuit to M			Yes; Module-wise		Yes; Module-wise	Yes; channel by channel
• Short-circuit to L+			Yes; Module-wise		Yes; Module-wise	Yes; channel by channel
• Group error	Yes	Yes	Yes	Yes	Yes	Yes
Diagnostics indication LED						
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No	No	No	No	Yes; green LED, see Alarms/diagnostics
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation						
Potential separation channels						
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes	Yes
Standards, approvals, certificates						
Suitable for safety functions	No	No	No	No	No	No
Suitable for safety-related tripping of standard modules		No	Yes; see FAQ Entry ID: 39198632	Yes; see FAQ Entry ID: 39198632	Yes; see FAQ Entry ID: 39198632	No
Highest safety class achievable in safety mode						
• Performance level according to ISO 13849-1			PL d	PL d	PL d	
• SIL acc. to IEC 61508			SIL 2	SIL 2	SIL 2	

Technical specifications

Article number	6ES7132-6BF61-0AA0	6ES7132-6BH00-0AA0	6ES7132-6BH01-0BA0	6ES7132-6BF01-0AA0	6ES7132-6BF01-0BA0	6ES7132-6BH00-0CA0
	ET 200SP, DQ 8x 24VDC/0,5A SINK BA, PU 1	ET 200SP, DQ 16x24VDC/0,5A BA, PU 1	ET 200SP, DQ 16x 24V DC/0,5A ST, PU 1	ET 200SP, DQ 8x 24V DC/0,5A Basic, PU 1	ET 200SP, DQ 8x 24V DC/0,5A ST, PU 1	ET 200SP, DQ 16x24VDC/0,5A HF, PU 1
Ambient conditions						
Ambient temperature during operation						
• horizontal installation, min.	-25 °C	-30 °C	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS02	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-25 °C	-30 °C	-30 °C; < 0 °C as of FS03	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS02	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C	50 °C
Altitude during operation relating to sea level						
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
Dimensions						
Width	15 mm	15 mm	15 mm	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm	58 mm	58 mm
Weights						
Weight, approx.	30 g	30 g	30 g	30 g	30 g	26 g

Article number	6ES7132-6BF00-0CA0	6ES7132-6BD20-0BA0	6ES7132-6BD20-0CA0	6ES7132-6BD20-0DA0	6ES7132-6FD00-0BB1
	ET 200SP, DQ 8x24VDC/0,5A HF, PU 1	ET 200SP, DQ 4x24VDC/2A ST	ET 200SP, DQ 4x24VDC/2A HF	ET 200SP, DQ 4x24VDC/2A High Speed, PU 1	ET 200SP, DQ 4x24...230VAC/2A ST
General information					
Product type designation	DQ 8x24 V DC/0.5 A HF	DQ 4x24 V DC/2 A ST	DQ 4x DC 24 V/2 A HF	DQ 4x24 V DC/2 A HS	DQ 4x24 ... 230 V AC/2 A ST
Product function					
• Isochronous mode	Yes	No	Yes	Yes; Operating modes DQ and OVS only	No
Engineering with					
• STEP 7 TIA Portal configurable/integrated from version	V13 SP1 / -	V11 SP2 / V13	V13 SP1 / -	STEP 7 V15.1 or higher	V13 / V13
• STEP 7 configurable/integrated from version	V5.5 / -	V5.5 SP3 / -	V5.5 / -	via GSD as of V5.6 HF4	V5.5 SP3 / -
• PCS 7 configurable/integrated from version	V8.1 SP1	V8.1 SP1			
• PROFIBUS from GSD version/GSD revision	One GSD file each, Revision 3 and 5 and higher	GSD Revision 5	GSD Revision 5	One GSD file each, Revision 3 and 5 and higher	GSD Revision 5
• PROFINET from GSD version/GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.33	GSDML V2.3
Operating mode					
• DQ	Yes	Yes	Yes	Yes	Yes
• DQ with energy-saving function	No	No	No	Yes; Valve control	No
• PWM	No	No	No	Yes	No
• Cam control (switching at comparison values)				Yes; Via MtM (module-to-module communication)	
• Oversampling	No	No	No	Yes	No
• MSO	Yes	No	Yes	No	No
Supply voltage					
Rated value (DC)	24 V	24 V	24 V	24 V	
Rated value (AC)					230 V
Reverse polarity protection	Yes	Yes	Yes	Yes	

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Digital output modules****Technical specifications**

Article number	6ES7132-6BF00-0CA0 ET 200SP, DQ 8x24VDC/0,5A HF, PU 1	6ES7132-6BD20-0BA0 ET 200SP, DQ 4x24VDC/2A ST	6ES7132-6BD20-0CA0 ET 200SP, DQ 4x24VDC/2A HF	6ES7132-6BD20-0DA0 ET 200SP, DQ 4x24VDC/2A High Speed, PU 1	6ES7132-6FD00-0BB1 ET 200SP, DQ 4x24...230VAC/ 2A ST
Digital outputs					
Type of digital output	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)	Source output (PNP, current-sourcing)	Triac with zero point detection
Number of digital outputs	8	4	4	4	4
Current-sinking	No	No	No	No	No
Current-sourcing	Yes	Yes	Yes	Yes; Push-pull output	Yes
Digital outputs, parameterizable	Yes	Yes	Yes	Yes	No
Short-circuit protection	Yes	Yes	Yes	Yes	No; When using BU type B1, a miniature, quick-response fuse with 10 A tripping current must be provided
Limitation of inductive shutdown voltage to	Typ. L+ (-50 V)	Typ. L+ (-50 V)	L+ (-37 to 41V)	M (-1 V)	
Controlling a digital input	Yes	Yes	Yes; Minimum current consumption 7 mA	No	Yes
Size of motor starters according to NEMA, max.					5
Digital output functions, parameterizable					
<ul style="list-style-type: none"> Switching tripped by comparison values <ul style="list-style-type: none"> Number of cam tracks, max. Freely usable digital output PWM output <ul style="list-style-type: none"> Number, max. Digital output with oversampling <ul style="list-style-type: none"> Number, max. 				Yes 4 Yes Yes 4 Yes 4	
Switching capacity of the outputs					
<ul style="list-style-type: none"> with resistive load, max. on lamp load, max. 	0.5 A 5 W	2 A 10 W	2 A 10 W	2 A 10 W	2 A 100 W
Load resistance range					
<ul style="list-style-type: none"> lower limit upper limit 	48 Ω 12 kΩ	12 Ω 3 400 Ω	12 Ω 3 400 Ω	12 Ω 3 400 Ω	
Output voltage					
<ul style="list-style-type: none"> for signal "1", min. 					20.4 V
Output current					
<ul style="list-style-type: none"> for signal "1" rated value for signal "0" residual current, max. 	0.5 A 0.1 mA	2 A 0.1 mA	2 A 0.1 mA	2 A 0.1 mA	2 A 460 μA
Output delay with resistive load					
<ul style="list-style-type: none"> "0" to "1", typ. "0" to "1", max. "1" to "0", typ. "1" to "0", max. 	50 μs 100 μs	50 μs 50 μs 100 μs 100 μs	50 μs 100 μs	1 μs 1 μs	10 ms 10 ms
Parallel switching of two outputs					
<ul style="list-style-type: none"> for logic links for uprating for redundant control of a load 	No No Yes	No No Yes	No	No	No No Yes
Switching frequency					
<ul style="list-style-type: none"> with resistive load, max. with inductive load, max. 	100 Hz 2 Hz	100 Hz 2 Hz	100 Hz 2 Hz	5 kHz 5 kHz	10 Hz 0.5 Hz; Higher frequencies are possible, see Equipment Manual / Product Information
<ul style="list-style-type: none"> on lamp load, max. 	10 Hz	10 Hz	10 Hz	5 kHz	1 Hz
Total current of the outputs					
<ul style="list-style-type: none"> Current per channel, max. Current per module, max. 	0.5 A 4 A	2 A 8 A	2 A 8 A	2 A 8 A	2 A 8 A

Technical specifications

Article number	6ES7132-6BF00-0CA0	6ES7132-6BD20-0BA0	6ES7132-6BD20-0CA0	6ES7132-6BD20-0DA0	6ES7132-6FD00-0BB1
	ET 200SP, DQ 8x24VDC/0,5A HF, PU 1	ET 200SP, DQ 4x24VDC/2A ST	ET 200SP, DQ 4x24VDC/2A HF	ET 200SP, DQ 4x24VDC/2A High Speed, PU 1	ET 200SP, DQ 4x24...230VAC/ 2A ST
Total current of the outputs (per module)					
horizontal installation					
- up to 30 °C, max.				8 A; DQ mode	
- up to 40 °C, max.		8 A	8 A	6.9 A; DQ mode	8 A
- up to 50 °C, max.		6 A	6 A	4.7 A; DQ mode	6 A
- up to 60 °C, max.	4 A	4 A	4 A	2.5 A; DQ mode	4 A
vertical installation					
- up to 30 °C, max.		8 A	8 A	7.2 A; DQ mode	8 A
- up to 40 °C, max.		6 A	6 A	5.6 A; DQ mode	6 A
- up to 50 °C, max.	4 A	4 A	4 A	4 A; DQ mode	4 A
- up to 60 °C, max.		4 A			
Isochronous mode					
Execution and activation time (TCO), min.	48 µs			40 µs	
Bus cycle time (TDP), min.	500 µs		500 µs	125 µs	
Interrupts/diagnostics/status information					
Diagnostics function	Yes	Yes	Yes	Yes	No
Substitute values connectable	Yes	Yes	Yes	Yes	Yes
Alarms					
• Diagnostic alarm	Yes	Yes	Yes	Yes	No
Diagnoses					
• Diagnostic information readable				Yes	
• Monitoring the supply voltage	Yes	Yes	Yes	Yes	No
• Wire-break	Yes; channel by channel	Yes; Module-wise	Yes; channel by channel	No	No
• Short-circuit	Yes; channel by channel	Yes; Module-wise	Yes; channel by channel	Yes; Module-wise	No
• Group error	Yes	Yes	Yes	Yes	Yes
Diagnostics indication LED					
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	No	Yes; red LED	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation					
Potential separation channels					
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes
Standards, approvals, certificates					
Suitable for safety functions	No	No	No	No	No
Suitable for safety-related tripping of standard modules	No; see FAQ Entry ID: 39198632	Yes; see FAQ Entry ID: 39198632	Yes; see FAQ Entry ID: 39198632	No	
Highest safety class achievable in safety mode					
• Performance level according to ISO 13849-1		PL d	PL d		
• SIL acc. to IEC 61508		SIL 2	SIL 2		
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-30 °C; < 0 °C as of FS07	-30 °C; < 0 °C as of FS08	-30 °C; < 0 °C as of FS06	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS07	-30 °C; < 0 °C as of FS08	-30 °C; < 0 °C as of FS06	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	60 °C

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Digital output modules

Technical specifications

Article number	6ES7132-6BF00-0CA0 ET 200SP, DQ 8x24VDC/0,5A HF, PU 1	6ES7132-6BD20-0BA0 ET 200SP, DQ 4x24VDC/2A ST	6ES7132-6BD20-0CA0 ET 200SP, DQ 4x24VDC/2A HF	6ES7132-6BD20-0DA0 ET 200SP, DQ 4x24VDC/2A High Speed, PU 1	6ES7132-6FD00-0BB1 ET 200SP, DQ 4x24...230VAC/ 2A ST
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	2 000 m; On request: Installation altitudes greater than 2 000 m
Dimensions					
Width	15 mm	15 mm	15 mm	15 mm	20 mm
Height	73 mm	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm	58 mm
Weights					
Weight, approx.	30 g	30 g	30 g	31 g	50 g
Article number	6ES7132-6FD00-0CU0 ET 200SP, DQ 4x24...230VAC/2A HF, PU 1	6ES7132-6GD51-0BA0 ET 200SP, RQ CO 4x 24V DC/2A ST, PU 1	6ES7132-6HD01-0BB1 ET 200SP, RQ NO 4x 120VDC...230VAC/5A,PU1	6ES7132-6MD00-0BB1 ET 200SP,RQ NO-MA 4x120VDC...230VAC/5A ST	
General information					
Product type designation	DQ 4x24 ... 230 V AC/2 A HF	RQ CO 4x24VDC/2A ST	RQ 4x120 VDC ... 230 VAC/ 5 A NO ST	RQ 4x120 V DC ... 230 V AC/ 5 A NO MA ST	
Product function					
• Isochronous mode	No	No	No		
Engineering with					
• STEP 7 TIA Portal configurable/ integrated from version	V14	V14	V14	V13 SP1	
• STEP 7 configurable/ integrated from version	STEP 7 V5.5 or higher	V5.5 SP3	V5.5 SP3	V5.5 SP3 / -	
• PCS 7 configurable/ integrated from version			V8.1 SP1		
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	
Operating mode					
• DQ	Yes	Yes	Yes	Yes	
• DQ with energy-saving function	Yes	No	No	No	
• PWM	No	No	No	No	
• Oversampling	No	No	No	No	
• MSO	No	No	No	No	
• Phase control	Yes; Control area: 8.5 ... 100% of the phase angle				
• Trailing-edge phase	No				
• Half-wave	Yes				
• Full-wave	Yes				
Supply voltage					
Rated value (DC)		24 V	24 V	24 V	
Rated value (AC)	230 V; 47 ... 63 Hz, max. rate of change of frequency 1 mHz/s				
Reverse polarity protection		Yes	Yes	Yes	

Technical specifications

Article number	6ES7132-6FD00-0CU0 ET 200SP, DQ 4x24..230VAC/2A HF, PU 1	6ES7132-6GD51-0BA0 ET 200SP, RQ CO 4x 24V DC/2A ST, PU 1	6ES7132-6HD01-0BB1 ET 200SP, RQ NO 4x 120VDC..230VAC/5A,PU1	6ES7132-6MD00-0BB1 ET 200SP,RQ NO-MA 4x120VDC..230VAC/5A ST
Digital outputs				
Type of digital output	Triac	Relays	Relays	Relays
Number of digital outputs	4	4	4	4
Current-sinking	No	Yes	Yes	
Current-sourcing	Yes	Yes	Yes	
Digital outputs, parameterizable	Yes	Yes	Yes	
Short-circuit protection	No; external fusing necessary	No	No	No
Open-circuit detection	Yes; channel by channel			
Overload protection	No; A miniature fuse with 10 tripping current and tripping characteristic "quick response" must be provided in the module supply			
Controlling a digital input	Yes			
Switching capacity of the outputs				
• with resistive load, max.	2 A; Max. 4 A, see additional description in manual			
• with inductive load, max.	2 A			
• on lamp load, max.	100 W; Tungsten rating in accordance with UL; for thermistors with higher power ratings, see the notes in the manual			
Output voltage				
• for signal "1", min.	20.4 V			
Output current				
• for signal "1" rated value	2 A			
• for signal "0" residual current, max.	3 mA			
Output delay with resistive load				
• "0" to "1", max.	40 ms; 2 AC cycles			
• "1" to "0", max.	20 ms; 1 AC cycle			
Parallel switching of two outputs				
• for logic links	No	Yes	Yes	
• for uprating	No	No	No	
• for redundant control of a load	Yes	Yes	Yes	
Switching frequency				
• with resistive load, max.	10 Hz; Applies to DQ mode; limited by line frequency in PC mode	2 Hz	2 Hz	2 Hz
• with inductive load (acc. to IEC 60947-5-1, DC13), max.			0.5 Hz	0.5 Hz
• with inductive load (acc. to IEC 60947-5-1, AC15), max.	10 Hz; Applies to DQ mode; limited by line frequency in PC mode		0.5 Hz	0.5 Hz
• on lamp load, max.	1 Hz; Applies to DQ mode; limited by line frequency in PC mode		2 Hz	2 Hz
Total current of the outputs				
• Current per channel, max.	2 A; Max. 4 A, see additional description in manual	2 A	5 A	5 A
• Current per module, max.	8 A	8 A	20 A	20 A

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Digital output modules****Technical specifications**

Article number	6ES7132-6FD00-0CU0 ET 200SP, DQ 4x24...230VAC/2A HF, PU 1	6ES7132-6GD51-0BA0 ET 200SP, RQ CO 4x 24V DC/2A ST, PU 1	6ES7132-6HD01-0BB1 ET 200SP, RQ NO 4x 120VDC...230VAC/5A,PU1	6ES7132-6MD00-0BB1 ET 200SP,RQ NO-MA 4x120VDC...230VAC/5A ST
Total current of the outputs (per module)				
horizontal installation				
- up to 40 °C, max.	8 A	8 A		
- up to 50 °C, max.	6 A	6 A	20 A	20 A
- up to 60 °C, max.	4 A	4 A	16 A	16 A
vertical installation				
- up to 30 °C, max.	8 A	8 A		
- up to 40 °C, max.	6 A	6 A	20 A	20 A
- up to 50 °C, max.	4 A	4 A	16 A	16 A
Relay outputs				
• Number of relay outputs		4	4	4
• Rated supply voltage of relay coil L+ (DC)		24 V	24 V	24 V
• Current consumption of relays (coil current of all relays), max.		40 mA	40 mA	40 mA
• external protection for relay outputs			Yes, with miniature fuse max. 6 A tripping current and quick-response tripping characteristic	Yes, with miniature fuse max. 6 A tripping current and quick-response tripping characteristic
• Number of operating cycles, max.		500 000	7 000 000; see additional description in the manual	7 000 000; see additional description in the manual
Switching capacity of contacts				
- with inductive load, max.			2 A; see additional description in the manual	2 A; see additional description in the manual
- with resistive load, max.		2 A	5 A; see additional description in the manual	5 A; see additional description in the manual
- Thermal continuous current, max.		2 A	5 A; Max. 1 385 VA, 150 W	5 A
- Switching current, min.		1 mA; 5 V DC	100 mA; 5 V DC	100 mA; 5 V DC
- Rated switching voltage (DC)		24 V	24 V DC to 120 V DC	24 V DC to 120 V DC
- Rated switching voltage (AC)		24 V	24V AC to 230V AC	24V AC to 230V AC
Interrupts/diagnostics/status information				
Diagnostics function	Yes	Yes	Yes	Yes
Substitute values connectable	Yes	Yes	Yes	Yes
Alarms				
• Diagnostic alarm	Yes	Yes	Yes	Yes
Diagnoses				
• Diagnostic information readable	Yes			
• Monitoring the supply voltage	Yes	Yes	Yes	Yes
• Wire-break	Yes; channel by channel	No	No	No
• Short-circuit	No	No	No	No
• Group error	Yes			Yes
Diagnostics indication LED				
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red Fn LED	No	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation				
Potential separation channels				
• between the channels and backplane bus	Yes	Yes	Yes	Yes
Standards, approvals, certificates				
Suitable for safety functions	No	No	No	No
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C

Technical specifications

Article number	6ES7132-6FD00-0CU0 ET 200SP, DQ 4x24...230VAC/2A HF, PU 1	6ES7132-6GD51-0BA0 ET 200SP, RQ CO 4x 24V DC/2A ST, PU 1	6ES7132-6HD01-0BB1 ET 200SP, RQ NO 4x 120VDC..230VAC/5A,PU1	6ES7132-6MD00-0BB1 ET 200SP,RQ NO-MA 4x120VDC..230VAC/5A ST
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m
Dimensions				
Width	20 mm	15 mm	20 mm	20 mm
Height	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm
Weights				
Weight, approx.	50 g	30 g	40 g	45 g
Article number	6ES7132-6HC50-0BU0 ET 200SP, RQ CO 3x120VDC.230VAC/5A ST		6ES7132-6HC70-0BU0 ET 200SP, RQ CO ni 3x120VDC.230VAC/5A ST	
General information				
Product type designation	RQ 3x120VDC-230VAC/5A CO ST		RQ 3x120VDC-230VAC/5A CO n.i. ST	
Product function				
• Isochronous mode	No		No	
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V16 or higher			
• STEP 7 configurable/ integrated from version	Configurable via GSD file			
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher			
• PROFINET from GSD version/ GSD revision	GSDML V2.34			
Supply voltage				
Rated value (DC)	24 V		24 V	
Reverse polarity protection	Yes		Yes	
Digital outputs				
Type of digital output	Relays		Relays	
Number of digital outputs	3		3	
Current-sinking	Yes		Yes	
Current-sourcing	Yes		Yes	
Digital outputs, parameterizable	Yes		Yes	
Short-circuit protection	No		No	
Switching capacity of the outputs				
• with resistive load, max.	5 A; for an additional description, see the Technical Data in the Equipment Manual		5 A; for an additional description, see the Technical Data in the Equipment Manual	
• with inductive load, max.	2 A; for an additional description, see the Technical Data in the Equipment Manual		2 A; for an additional description, see the Technical Data in the Equipment Manual	
Parallel switching of two outputs				
• for logic links	Yes		Yes	
• for uprating	No		No	
• for redundant control of a load	Yes		Yes	
Switching frequency				
• with resistive load, max.	2 Hz		2 Hz	
• with inductive load, max.	0.5 Hz		0.5 Hz	
• on lamp load, max.	2 Hz		2 Hz	
Total current of the outputs				
• Current per channel, max.	5 A		5 A	
• Current per module, max.	15 A		5 A	
Total current of the outputs (per module)				
horizontal installation				
- up to 50 °C, max.	15 A		5 A	
- up to 60 °C, max.	12 A; maximum channel current 4A		5 A	
vertical installation				
- up to 40 °C, max.	15 A		5 A	
- up to 50 °C, max.	12 A; maximum channel current 4A		5 A	

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Digital output modules****Technical specifications**

Article number	6ES7132-6HC50-0BU0 ET 200SP, RQ CO 3x120VDC.230VAC/5A ST	6ES7132-6HC70-0BU0 ET 200SP, RQ COni 3x120VDC.230VAC/5A ST
Relay outputs		
• Number of relay outputs	3; changeover contact, isolated	3; Changeover contact, non-floating
• Rated supply voltage of relay coil L+ (DC)	24 V	24 V
• Current consumption of relays (coil current of all relays), max.	30 mA	40 mA
• external protection for relay outputs	yes, with miniature fuse max. 6.3 A tripping current, quick-response tripping characteristic and 1 500 A breaking capacity	yes, with miniature fuse max. 6.3 A tripping current, quick-response tripping characteristic and 1 500 A breaking capacity
• Number of operating cycles, max.	1 000 000; see additional description in the manual	1 000 000; see additional description in the manual
Switching capacity of contacts		
- with inductive load, max.	2 A; see additional description in the manual	2 A; see additional description in the manual
- with resistive load, max.	5 A; see additional description in the manual	5 A; see additional description in the manual
- Thermal continuous current, max.	5 A; Max. 1 385 VA, 150 W	5 A; Max. 1 385 VA, 150 W
- Switching current, min.	10 mA; 5 V DC	10 mA; 5 V DC
- Rated switching voltage (DC)	24 V DC to 120 V DC	24 V DC to 120 V DC
- Rated switching voltage (AC)	24V AC to 230V AC	24V AC to 230V AC
Interrupts/diagnostics/status information		
Diagnostics function	Yes	Yes
Substitute values connectable	Yes	Yes
Alarms		
• Diagnostic alarm	Yes	Yes
Diagnoses		
• Monitoring the supply voltage	Yes	Yes
• Wire-break	No	No
• Short-circuit	No	No
Diagnostics indication LED		
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes
Standards, approvals, certificates		
Suitable for safety functions	No	No
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	2 000 m	2 000 m
Dimensions		
Width	20 mm	20 mm
Height	73 mm	73 mm
Depth	58 mm	58 mm
Weights		
Weight, approx.	40 g	40 g

Overview

Energy Meter HF module
for SIMATIC ET 200SP

Energy Meter HF module for SIMATIC ET 200SP video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoid=5848889024001



- 2, 4 and 8-channel analog input (AI) modules
- Apart from the standard type of delivery in single-unit packaging, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

For different requirements, the digital input modules offer:

- Function classes Basic, Standard, High Feature and High Speed
- BaseUnits for single or multiple-conductor connection with automatic slot coding
- Potential distributor modules for system-integrated expansion with potential terminals
- Individual system-integrated potential group formation with self-assembling voltage busbars (a separate power module is no longer required for ET 200SP)
- Option of connecting current, voltage and resistance sensors, as well as thermocouples
- Option of connecting force and torque sensors

- Energy Meter for recording up to 600 electrical variables
- Clear labeling on front of module
- LEDs for diagnostics, status, supply voltage and faults
- Electronically readable and non-volatile writable nameplate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
 - MSI operating mode (simultaneous reading of input data from as many as three other controllers)
 - Oversampling operating mode (n-fold equidistant acquisition of analog values within one PN cycle for increasing the time resolution for slow CPU cycles)
 - Isochronous mode (simultaneous equidistant reading in of all analog values)
 - Scalable measuring range (adaptation of measuring range, increase of the 16-bit resolution by adapting the measuring range to a limited section)
 - Scaling of the measured values (transmission of the analog value normalized to the required physical value as a 32-bit floating point value)
 - Internal compensation of the line resistance for thermocouples by means of terminal temperature measurement in the BaseUnit for BU type A1
 - Internal compensation also for 2-conductor resistance test by means of adjustable line resistance
 - Calibration during runtime
 - Single-channel galvanic isolation
 - HART communication
 - Re-parameterization during operation
 - Firmware update
 - Diagnostics of wire break, short-circuit, overflow, underflow
 - Two upper and lower hardware interrupts in each case, interference frequency suppression, smoothing
 - Value status (optional binary validity information of the analog value status in the process image)
 - Supports the PROFIenergy profile
- Optional accessories
 - Labeling strips (film or card)
 - Equipment labeling plate
 - Color-coded label with module-specific CC code
 - Shield terminal

A quick and clear comparison of the functions of the AI modules is offered by the TIA Selection Tool.

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Analog input modules****Overview**

Overview of analog input modules

Analog input	Pkg. unit	Article No.	CC code	BU type
AI 8 x I 2/4-wire BA	1	6ES7134-6GF00-0AA1	CC01	A0, A1
AI 2 x U ST	1	6ES7134-6FB00-0BA1	CC00	A0, A1
AI 8 x U BA	1	6ES7134-6FF00-0AA1	CC02	A0, A1
AI 4 x U/I 2-wire ST	1	6ES7134-6HD00-0BA1	CC03	A0, A1
AI 4 x U/I 2-wire ST	10	6ES7134-6HD00-2BA1	CC03	A0, A1
AI 2 x I 2/4-wire ST	1	6ES7134-6GB00-0BA1	CC05	A0, A1
AI 4 x I 2/4-wire ST	1	6ES7134-6GD00-0BA1	CC03	A0, A1
AI 4 x I 2/4-wire ST	10	6ES7134-6GD00-2BA1	CC03	A0, A1
AI 4 x I 2-wire 4 ... 20 mA HART	1	6ES7134-6TD00-0CA1	CC03	A0, A1
AI 2 x U/I 2/4-wire HF	1	6ES7134-6HB00-0CA1	CC05	A0, A1
AI 2 x U/I 2/4-wire HS With two operating modes: • High-speed isochronous AI • Oversampling	1	6ES7134-6HB00-0DA1	CC00	A0, A1
AI 8 x RTD/TC 2-wire HF	1	6ES7134-6JF00-0CA1	CC00	A0, A1
AI 8 x RTD/TC 2-wire HF	10	6ES7134-6JF00-2CA1	CC00	A0, A1
AI 4 x RTD/TC 2/3/4-wire HF	1	6ES7134-6JD00-0CA1	CC00	A0, A1
AI 4 x RTD/TC 2/3/4-wire HF	10	6ES7134-6JD00-2CA1	CC00	A0, A1
AI 4 x TC High Speed	1	6ES7134-6JD00-0DA1	CC00	A0, A1
AI 2 x SG 4/6-wire High Speed	1	7MH4134-6LB00-0DA0	CC00	A0
AI Energy Meter CT ST	1	6ES7134-6PA01-0BU0	--	U0
AI Energy Meter RC ST	1	6ES7134-6PA21-0BU0	--	U0
AI Energy Meter CT HF	1	6ES7134-6PA01-0CU0	--	U0
AI Energy Meter RC HF	1	6ES7134-6PA21-0CU0	--	U0

Overview of BaseUnits

BaseUnit	Pkg. unit	Article No.	CC codes for process terminals	CC codes for AUX terminals
BU type A0 • New potential group (light) • 16 process terminals • With 10 AUX terminals	1	6ES7193-6BP20-0DA0	CC01 to CC05	CC71 to CC73
BU type A0 • New potential group (light) • 16 process terminals • With 10 AUX terminals	10	6ES7193-6BP20-2DA0	CC01 to CC05	CC71 to CC73
BU type A0 • New potential group (light) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0DA0	CC01 to CC05	--
BU type A0 • New potential group (light) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2DA0	CC01 to CC05	--
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • With 10 AUX terminals	1	6ES7193-6BP20-0BA0	CC01 to CC05	CC71 to CC73
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • With 10 AUX terminals	10	6ES7193-6BP20-2BA0	CC01 to CC05	CC71 to CC73
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0BA0	CC01 to CC05	--

Overview

BaseUnit	Pkg. unit	Article No.	CC codes for process terminals	CC codes for AUX terminals
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2BA0	CC01 to CC05	--
BU type A1 • New potential group (light) • With temperature sensor • 16 process terminals • With 2x5 additional terminals	1	6ES7193-6BP40-0DA1	CC01 to CC05	CC74
BU type A1 • New potential group (light) • With temperature sensor • 16 process terminals • Without 2x5 additional terminals	1	6ES7193-6BP00-0DA1	CC01 to CC05	--
BU type A1 • Forwarding of the potential group (dark) • With temperature sensor • 16 process terminals • With 2x5 additional terminals	1	6ES7193-6BP40-0BA1	CC01 to CC05	CC74
BU type A1 • Forwarding of the potential group (dark) • With temperature sensor • 16 process terminals • Without 2x5 additional terminals	1	6ES7193-6BP00-0BA1	CC01 to CC05	--
BU type U0 • New potential group (light) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0DU0	CC00	--
BU type U0 • New potential group (light) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2DU0	CC00	--
BU type U0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0BU0	CC00	--
BU type U0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2BU0	CC00	--

Overview of potential distributor modules

Potential distributor module	Pkg. unit	Article No.	CC codes for process terminals
PotDis BU Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP1	CC00, CC62
PotDis BU Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP1	CC00, CC62
PotDis BU Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP2	CC00, CC63

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Analog input modules****Overview**

Potential distributor module	Pkg. unit	Article No.	CC codes for process terminals
PotDis BU Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP2	CC00, CC63
PotDis TB Type BR-W, 18x internally bridged terminals, without reference to P1, P2 or AUX, (total current max. 10 A)	1	6ES7193-6TP00-0TP0	CC10 to CC13
PotDis TB Type P1-R, 18x P1 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP1	CC10, CC12
PotDis TB Type P2-B, 18x P2 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP2	CC10, CC13
PotDis TB Type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX	1	6ES7193-6TP00-0TN0	CC10

Ordering data**Article No.****Article No.****Analog input modules**

Types of delivery:
Apart from the standard type of delivery in a single-unit package, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

The number of modules required is the number of modules ordered. The pack type is selected by selecting the Article No. Packs of 10 can therefore only be ordered in integer multiples of 10.

Analog input module
AI 8xI 2/4-wire BA, BU type A0 or A1, color code CC01

6ES7 134-6GF00-0AA1

Analog input module
AI 2xU ST, BU type A0 or A1, color code CC00

6ES7134-6FB00-0BA1

Analog input module
AI 8xU BA, BU type A0 or A1, color code CC02

6ES7 134-6FF00-0AA1

Analog input module
AI 4xU/I 2-wire Standard, BU type A0 or A1, color code CC03, 16-bit, $\pm 0.3\%$

6ES7134-6HD01-0BA1
6ES7134-6HD01-2BA1

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

Analog input module AI 2xI 2/4-wire Standard, BU type A0 or A1, color code CC05, 16-bit

6ES7134-6GB00-0BA1

- Pack of 1 unit

Analog input module
AI 4xI 2/4-wire Standard, BU type A0 or A1, color code CC03, 16-bit, $\pm 0.3\%$

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7134-6GD01-0BA1
6ES7134-6GD01-2BA1

Analog input module
AI 4xI 2-wire 4 ... 20 mA HART, BU type A0 or A1, color code CC03

6ES7134-6TD00-0CA1

Analog input module
AI 2xU/I 2/4-wire High Feature, BU type A0 or A1, color code CC05, 16-bit, $\pm 0.1\%$, independent channel galvanic isolation, isochronous mode above 1 ms

6ES7134-6HB00-0CA1

Analog input module
AI 2xU/I 2/4-wire High Speed, BU type A0 or A1, color code CC00, 16-bit, $\pm 0.3\%$, isochronous mode above 250 μ s, oversampling above 50 μ s

6ES7134-6HB00-0DA1

Analog input module
AI 8xRTD/TC 2-wire High Feature, BU type A0 or A1, color code CC00, 16-bit, $\pm 0.1\%$, scalable measuring range

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7134-6JF00-0CA1
6ES7134-6JF00-2CA1

Analog input module
AI 4xRTD/TC 2/3/4-wire High Feature, BU type A0 or A1, color code CC00, 16-bit, $\pm 0.1\%$, scalable measuring range

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7134-6JD00-0CA1
6ES7134-6JD00-2CA1

10

Ordering data	Article No.	Article No.
Analog input module AI 4xTC High Speed, BU type A0 or A1, color code CC00, 16-bit, channel diagnostics	6ES7134-6JD00-0DA1	BU15-P16+A0+2B BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.
Analog input module AI 2x SG, 4/6-wire High Speed, BU type A0, color code CC00, channel diagnostics, 28/16-bit, ±0.05%, for DMS full bridges; for connecting force and torque sensors	7MH4134-6LB00-0DA0	
Analog input module AI Energy Meter CT ST, BU type U0	6ES7134-6PA01-0BU0	Suitable type A1 BaseUnits (temperature detection)
Analog input module AI Energy Meter RC ST, BU type U0	6ES7134-6PA21-0BU0	BU15-P16+A0+12D/T 6ES7193-6BP40-0DA1
Analog input module AI Energy Meter CT HF, for 1 A or 5 A current transformers, with line analysis functions, channel diagnostics; BU type U0	6ES7134-6PA01-0CU0	BU type A1; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 2x5 internally bridged additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new potential group (max. 10 A)
Analog input module AI Energy Meter RC HF, for Rogowski coils or 333 mV current/voltage transformers, with line analysis functions, channel diagnostics; BU type U0	6ES7134-6PA21-0CU0	BU15-P16+A0+2D/T 6ES7193-6BP00-0DA1 BU type A1; BaseUnit (light) with 16 process terminals to the module; for starting a new potential group (max. 10 A)
Suitable type A0 BaseUnits		BU15-P16+A0+12B/T 6ES7193-6BP40-0BA1 BU type A1; BaseUnit (dark) with 16 process terminals (1 ... 16) to the module and an additional 2x5 internally bridged additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the potential group
BU15-P16+A10+2D BU type A0; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.	6ES7193-6BP20-0DA0 6ES7193-6BP20-2DA0	BU15-P16+A0+2B/T 6ES7193-6BP00-0BA1 BU type A1; BaseUnit (dark) with 16 process terminals to the module; for continuing the potential group
BU15-P16+A0+2D BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.	6ES7193-6BP00-0DA0 6ES7193-6BP00-2DA0	Suitable type U0 BaseUnits
BU15-P16+A10+2B BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.	6ES7193-6BP20-0BA0 6ES7193-6BP20-2BA0	BU20-P16+A0+2D BU type U0; BaseUnit (light) with 16 process terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.
		6ES7193-6BP00-0DU0 6ES7193-6BP00-2DU0

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Analog input modules****Ordering data****Article No.****Article No.****BU20-P16+A0+2B**

BU type U0; BaseUnit (dark) with 16 process terminals to the module; for continuing the potential group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP00-0BU0
6ES7193-6BP00-2BU0

Potential distributor modules**PotDis BU**

PotDis BU, type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)

6ES7193-6UP00-ODP1

PotDis BU, type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group

6ES7193-6UP00-OBP1

PotDis BU, type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)

6ES7193-6UP00-ODP2

PotDis BU, type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group

6ES7193-6UP00-OBP2**PotDis TB**

PotDis TB, type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A)

6ES7193-6TP00-0TP0

PotDis TB, type P1-R, 18x P1 potential, (total current max. 10 A)

6ES7193-6TP00-0TP1

PotDis TB, type P2-B, 18x P2 potential, (total current max. 10 A)

6ES7193-6TP00-0TP2

PotDis TB, type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX

6ES7193-6TP00-0TNO**Accessories****Equipment labeling plate**

10 sheets of 16 labels, for printing with thermal transfer card printer or plotter

6ES7193-6LF30-0AW0**Labeling strips**

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AA0

500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AG0

1000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer

6ES7193-6LA10-0AA0

1000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer

6ES7193-6LA10-0AG0**BU cover**

For covering empty slots (gaps); 5 units

- 15 mm wide
- 20 mm wide

6ES7133-6CV15-1AM0
6ES7133-6CV20-1AM0

Shield connection**6ES7193-6SC20-1AM0**

5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding

Color-coded labels

Color code CC00, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units

6ES7193-6CP00-2MA0

Color code CC00, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 50 units

6ES7193-6CP00-4MA0

Color code CC01, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units

6ES7193-6CP01-2MA0

Color code CC01, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 50 units

6ES7193-6CP01-4MA0

Color code CC02, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 10 units

6ES7193-6CP02-2MA0

Color code CC02, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16); 50 units

6ES7193-6CP02-4MA0

Color code CC03, for 16 process terminals, BU type A0, A1 gray (terminals 1 to 8), red (terminals 9 to 12), gray (terminals 13 to 16); 10 units

6ES7193-6CP03-2MA0

Color code CC05, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 12), red (terminals 13 to 14), blue (terminals 15 to 16); 10 units

6ES7193-6CP05-2MA0

Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A); 10 units

6ES7193-6CP71-2AA0

Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A); 10 units

6ES7193-6CP72-2AA0

Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 10 units

6ES7193-6CP73-2AA0

Color code CC74, for 2x5 additional terminals, BU type A1, red (terminals 1B to 5B), blue (terminals 1C to 5C); 10 units

6ES7193-6CP74-2AA0**Color-coded labels for PotDis BU**

Color code CC62, for 16 process terminals, PotDis BU type P1, red (terminals 1 to 16); 10 units

6ES7193-6CP62-2MA0

Color code CC63, for 16 process terminals, PotDis BU type P2, blue (terminals 1 to 16); 10 units

6ES7193-6CP63-2MA0**Color-coded labels for PotDis TB**

Color code CC10, for 18 process terminals, PotDis TB, gray (terminals 1 to 18); 10 units

6ES7193-6CP10-2MT0

Color code CC11, for 18 process terminals, PotDis TB, yellow-green (terminals 1 to 18); 10 units

6ES7193-6CP11-2MT0

Ordering data

Article No.

Article No.

Color code CC12, for 18 process terminals, PotDis TB, type P1 and BR, red (terminals 1 to 18); 10 units

Color code CC13, for 18 process terminals, PotDis TB, type P2 and BR, blue (terminals 1 to 18); 10 units

6ES7193-6CP12-2MT0

6ES7193-6CP13-2MT0

Mechanical coding elements

For automatic coding of I/O modules; spare part.
20 units

Type A

Type B

Type C

Type D

6ES7193-6KA00-3AA0

6ES7193-6KB00-3AA0

6ES7193-6KC00-3AA0

6ES7193-6KD00-3AA0

Technical specifications

Article number	6ES7134-6GF00-0AA1	6ES7134-6FB00-0BA1	6ES7134-6FF00-0AA1	6ES7134-6HD01-0BA1	6ES7134-6GB00-0BA1
	ET 200SP, AI 8xI 2-/4-Wire Basic	ET 200SP, AI 2xU Standard, PU 1	ET 200SP, AI 8xU Basic	ET 200SP, AI 4xU/I 2-Wire ST, PU 1	ET 200SP, AI 2xI 2-/4-Wire ST, PU 1
General information					
Product type designation	AI 8xI 2-/4-wire BA	AI 2xU ST	AI 8xU BA	AI 4x U/I 2-wire	AI 2xI 2-/4-wire ST
Product function					
• Isochronous mode	No	No	No	No	No
• Measuring range scalable	No	No	No	No	No
Engineering with					
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1	V13 SP1	V13 SP1	V14 / -	V13 SP1
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.6 and higher	V5.5 SP3
• PCS 7 configurable/ integrated from version				V8.1 SP1	
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	V2.3 / -
Operating mode					
• Oversampling	No	No	No	No	No
• MSI	No	No	No	No	No
Supply voltage					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes	Yes
Analog inputs					
Number of analog inputs	8; Single-ended	2	8; Single-ended	4; Differential inputs	2
• For current measurement	8				2
• For voltage measurement		2	8		
permissible input voltage for voltage input (destruction limit), max.		30 V	30 V	30 V	
permissible input current for current input (destruction limit), max.	50 mA			50 mA	50 mA
Cycle time (all channels), min.	1 ms; per channel	500 µs	1 ms; per channel	Sum of the basic conversion times and additional processing times (depending on the parameterization of the active channels)	500 µs
Input ranges (rated values), voltages					
• 0 to +10 V		Yes; 15 bit	Yes; 15 bit	Yes; 15 bit	
• 1 V to 5 V		Yes; 15 bit		Yes; 15 bit	
• -10 V to +10 V		Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• -5 V to +5 V		Yes; 16 bit incl. sign		Yes; 16 bit incl. sign	

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Analog input modules

Technical specifications

Article number	6ES7134-6GF00-0AA1 ET 200SP, AI 8xI 2-/4-Wire Basic	6ES7134-6FB00-0BA1 ET 200SP, AI 2xU Standard, PU 1	6ES7134-6FF00-0AA1 ET 200SP, AI 8xU Basic	6ES7134-6HD01-0BA1 ET 200SP, AI 4xU/I 2-Wire ST, PU 1	6ES7134-6GB00-0BA1 ET 200SP, AI 2xI 2-/4-Wire ST, PU 1
Input ranges (rated values), currents					
• 0 to 20 mA	Yes			Yes; 15 bit	Yes; 15 bit
• -20 mA to +20 mA	Yes				Yes; 16 bit incl. sign
• 4 mA to 20 mA	Yes			Yes; 15 bit	Yes; 15 bit
Cable length					
• shielded, max.	200 m	200 m	200 m	1 000 m; 200 m for voltage measurement	1 000 m
Analog value generation for the inputs					
Integration and conversion time/resolution per channel					
• Resolution with overrange (bit including sign), max.	16 bit	16 bit	16 bit	16 bit	16 bit
• Integration time, parameterizable	Yes	Yes	Yes	Yes	Yes
• Interference voltage suppression for interference frequency f_1 in Hz	16.67 / 50 / 60 / 4 800 (16.67 / 50 / 60)	16.6 / 50 / 60 Hz / off	16.67 / 50 / 60 / 4 800 (16.67 / 50 / 60)	16.6 / 50 / 60 Hz	16.6 / 50 / 60 Hz / off
• Conversion time (per channel)	180 / 60 / 50 / 0.625 (67.5 / 22.5 / 18.75) ms	50 ms @ 60 Hz, 60 ms @ 50 Hz, 180 ms @ 16.6 Hz, 250 μ s without filter	180 / 60 / 50 / 0.625 (67.5 / 22.5 / 18.75) ms	180 / 60 / 50 ms	50 ms @ 60 Hz, 60 ms @ 50 Hz, 180 ms @ 16.6 Hz, 500 μ s without filter
Smoothing of measured values					
• Number of smoothing levels	4; None; 4/8/16 times	4	4; None; 4/8/16 times	4; None; 4/8/16 times	4
• parameterizable	Yes	Yes	Yes	Yes	Yes
Encoder					
Connection of signal encoders					
• for voltage measurement	No	Yes	Yes	Yes	
• for current measurement as 2-wire transducer	Yes			Yes	Yes
- Burden of 2-wire transmitter, max.	650 Ω			650 Ω	650 Ω
• for current measurement as 4-wire transducer	Yes		No	No	Yes
Errors/accuracies					
Basic error limit (operational limit at 25 °C)					
• Voltage, relative to input range, (+/-)		0.3 %	0.3 %	0.3 %	
• Current, relative to input range, (+/-)	0.3 %			0.3 %	0.3 %
Interference voltage suppression for $f = n \times (f_1 +/- 1 \%)$, $f_1 =$ interference frequency					
• Series mode interference (peak value of interference < rated value of input range), min.	70 dB; With conversion time 67.5 / 22.5 / 18.75 ms: 40 dB	70 dB	70 dB; With conversion time 67.5 / 22.5 / 18.75 ms: 40 dB	70 dB	70 dB
• Common mode voltage, max.		10 V		10 V	10 V
• Common mode interference, min.		90 dB		90 dB	90 dB
Interrupts/diagnostics/status information					
Diagnostics function	Yes	Yes	Yes	Yes	Yes
Alarms					
• Diagnostic alarm	Yes	Yes	Yes	Yes	Yes
• Limit value alarm	No	No	No	No	No

Technical specifications

Article number	6ES7134-6GF00-0AA1 ET 200SP, AI 8xI 2-/4-Wire Basic	6ES7134-6FB00-0BA1 ET 200SP, AI 2xU Standard, PU 1	6ES7134-6FF00-0AA1 ET 200SP, AI 8xU Basic	6ES7134-6HD01-0BA1 ET 200SP, AI 4xU/1 2-Wire ST, PU 1	6ES7134-6GB00-0BA1 ET 200SP, AI 2xI 2-/4-Wire ST, PU 1
Diagnoses					
• Monitoring the supply voltage	Yes	Yes	Yes	Yes	Yes
• Wire-break	Yes; at 4 to 20 mA	No	No	Yes; at 4 to 20 mA	Yes; at 4 to 20 mA
• Short-circuit	Yes; Sensor supply to M; module by module	Yes; at 1 to 5 V	No	Yes; with 1 to 5 V or 2-wire mode: Short-circuit of the encoder supply to ground or of an input to the encoder supply	Yes; Short-circuit of the encoder supply
• Group error	Yes	Yes	Yes	Yes	Yes
• Overflow/underflow	Yes	Yes	Yes	Yes	Yes
Diagnostics indication LED					
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	No	No	No	No	No
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red LED	Yes; green/red DIAG LED
Potential separation					
Potential separation channels					
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes
Standards, approvals, certificates					
Suitable for applications according to AMS 2750				Yes; Declaration of Conformity, see online support entry 109757262	
Suitable for applications according to CQI-9				Yes	
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS04
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS04	-30 °C; < 0 °C as of FS02	-30 °C; < 0 °C as of FS04
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions					
Width	15 mm	15 mm	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm	58 mm
Weights					
Weight, approx.	31 g	31 g	31 g	31 g	32 g

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Analog input modules****Technical specifications**

Article number	6ES7134-6GD01-0BA1 ET 200SP, AI 4xI 2-/4-Wire ST, PU 1	6ES7134-6TD00-0CA1 ET 200SP, AI 4xI 2-WIRE 4...20mA HART	6ES7134-6HB00-0CA1 ET 200SP AI 2 X U/I 2-, 4-Wire HF	6ES7134-6HB00-0DA1 ET 200SP AI 2 X U/I 2-, 4-Wire HS
General information				
Product type designation	AI 4xl 2-/4-wire ST	AI 4xl 2-wire HART	AI 2xU/I 2-/4-wire HF	AI 2xU/I 2-/4-wire HS
Product function				
• Isochronous mode	No	No	Yes	Yes
• Measuring range scalable	No	No	No	No
• Scalable measured values				No
• Adjustment of measuring range				No
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V14 / -	V13 SP1	V13	V13 SP1
• STEP 7 configurable/ integrated from version	V5.6 and higher	V5.5 SP4 and higher	V5.5 / -	V5.5 SP3 / -
• PCS 7 configurable/ integrated from version	V8.1 SP1	V8.1 SP1	V8.1 SP1	
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher	GSD Revision 5	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3
Operating mode				
• Oversampling	No	No	No	Yes; 2 channels per module
• MSI	No	No	Yes	No
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes
Analog inputs				
Number of analog inputs	4; Differential inputs	4; Differential inputs	2; Differential inputs	2; Differential inputs
• For current measurement		4	2	2
• For voltage measurement			2	2
permissible input voltage for voltage input (destruction limit), max.			30 V	30 V
permissible input current for current input (destruction limit), max.	50 mA	50 mA	50 mA	50 mA
Cycle time (all channels), min.				125 µs
Analog input with oversampling			No	Yes
• Values per cycle, max.				16
• Resolution, min.				50 µs
Standardization of measured values			Yes	
Input ranges (rated values), voltages				
• 0 to +10 V			Yes; 15 bit	Yes; 15 bit
• 1 V to 5 V			Yes; 15 bit	Yes; 13 bit
• -10 V to +10 V			Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• -5 V to +5 V			Yes; 16 bit incl. sign	Yes; 15 bit incl. sign
Input ranges (rated values), currents				
• 0 to 20 mA	Yes; 16 bit incl. sign	No	Yes; 15 bit	Yes; 15 bit
• -20 mA to +20 mA	Yes	No	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• 4 mA to 20 mA	Yes; 15 bit	Yes; 15 bit + sign	Yes; 15 bit	Yes; 14 bit
Cable length				
• shielded, max.	1 000 m	800 m	1 000 m; 200 m for voltage measurement	1 000 m; 200 m for voltage measurement

Technical specifications

Article number	6ES7134-6GD01-0BA1 ET 200SP, AI 4XI 2-/4-Wire ST, PU 1	6ES7134-6TD00-0CA1 ET 200SP, AI 4XI 2-WIRE 4...20MA HART	6ES7134-6HB00-0CA1 ET 200SP AI 2 X U/I 2-, 4-Wire HF	6ES7134-6HB00-0DA1 ET 200SP AI 2 X U/I 2-, 4-Wire HS
Analog value generation for the inputs				
Integration and conversion time/resolution per channel				
• Resolution with overrange (bit including sign), max.	16 bit	16 bit	16 bit	16 bit
• Integration time, parameterizable	Yes	Yes; channel by channel	Yes	
• Integration time (ms)			67.5 / 22.5 / 18.75 / 10 / 5 / 2.5 / 1.25 / 0.625 ms	
• Basic conversion time, including integration time (ms)			68.03 / 22.83 / 19.03 / 10.28 / 5.23 / 2.68 / 1.43 / 0.730 ms	
• Interference voltage suppression for interference frequency f1 in Hz	16.6 / 50 / 60 Hz	10 / 50 / 60 Hz	16.6 / 50 / 60 / 300 / 600 / 1 200 / 2 400 / 4 800	No
• Conversion time (per channel)	180 / 60 / 50 ms		68.2 / 23 / 19.2 / 10.45 / 5.40 / 2.85 / 1.6 / 0.9 ms	10 µs
• Basic execution time of the module (all channels released)			1 ms	
Smoothing of measured values				
• Number of smoothing levels	4; None; 4/8/16 times	4; None; 4/8/16 times	6; none; 2-/4-/8-/16-/32-fold	7; none; 2-/4-/8-/16-/32-/64-fold
• parameterizable	Yes	Yes	Yes	Yes
Encoder				
Connection of signal encoders				
• for voltage measurement	No	No	Yes	Yes
• for current measurement as 2-wire transducer	Yes	Yes	Yes	Yes
- Burden of 2-wire transmitter, max.	650 Ω		650 Ω	650 Ω
• for current measurement as 4-wire transducer	Yes		Yes	Yes
Errors/accuracies				
Basic error limit (operational limit at 25 °C)				
• Voltage, relative to input range, (+/-)			0.05 %; 0.1 % at SFU 4.8 kHz	0.2 %
• Current, relative to input range, (+/-)	0.3 %	0.3 %	0.05 %; 0.1 % at SFU 4.8 kHz	0.2 %
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, $f1 =$ interference frequency				
• Series mode interference (peak value of interference < rated value of input range), min.	70 dB	60 dB		
• Common mode voltage, max.	10 V		35 V	35 V
• Common mode interference, min.	90 dB		90 dB	90 dB
Isochronous mode				
Filtering and processing time (TCI), min.			800 µs	80 µs
Bus cycle time (TDP), min.			1 ms	125 µs; Starting from firmware Version V2.0.1
Interrupts/diagnostics/status information				
Diagnostics function	Yes	Yes	Yes	
Alarms				
• Diagnostic alarm	Yes	Yes	Yes	Yes
• Limit value alarm	No	Yes	Yes; two upper and two lower limit values in each case	Yes; two upper and two lower limit values in each case

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Analog input modules

Technical specifications

Article number	6ES7134-6GD01-0BA1 ET 200SP, AI 4X1 2-/4-Wire ST, PU 1	6ES7134-6TD00-0CA1 ET 200SP, AI 4X1 2-WIRE 4...20MA HART	6ES7134-6HB00-0CA1 ET 200SP AI 2 X U/I 2-, 4-Wire HF	6ES7134-6HB00-0DA1 ET 200SP AI 2 X U/I 2-, 4-Wire HS
Diagnoses				
• Monitoring the supply voltage	Yes	Yes	Yes	
• Wire-break	Yes; at 4 to 20 mA	Yes; channel by channel	Yes; Measuring range 4 to 20 mA only	Yes; channel-by-channel, at 4 to 20 mA only
• Short-circuit	Yes; 2-wire mode: Short-circuit of the encoder supply to ground or of an input to the encoder supply	Yes; Channel-by-channel, short-circuit of the encoder supply to ground or of an input to the encoder supply	Yes; channel-by-channel, at 1 to 5 V or for short-circuit in encoder supply	Yes; channel-by-channel, at 1 to 5 V or for current measuring ranges short-circuit in encoder supply
• Group error	Yes	Yes	Yes	Yes
• Overflow/underflow	Yes	Yes; channel by channel	Yes	Yes
Diagnoses indication LED				
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	No	Yes; red LED	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation				
Potential separation channels				
• between the channels and backplane bus	Yes	Yes	Yes	Yes
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C; < 0 °C as of FS02	-30 °C	-30 °C; < 0 °C as of FS06	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; < 0 °C as of FS02	-30 °C	-30 °C; < 0 °C as of FS06	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions				
Width	15 mm	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm
Weights				
Weight, approx.	31 g	31 g	32 g	32 g
Article number	6ES7134-6JF00-0CA1 ET 200SP, AI 8xRTD/TC 2-Wire HF	6ES7134-6JD00-0CA1 ET 200SP, AI 4xRTD/TC 2-/3-/4-Wire HF	6ES7134-6JD00-0DA1 ET 200SP, AI 4x TC HS	
General information				
Product type designation	AI 8xRTD/TC 2-wire HF	AI 4xRTD/TC 2-/3-/4-wire HF	AI 4xTC HS	
Product function				
• Isochronous mode	No	No	No	
• Measuring range scalable	Yes		Yes	
• Adjustment of measuring range		Yes		
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V16, V17 / V18	V12 SP1 / V13	V15 with HSP 265/integrated as of V15.1	
• STEP 7 configurable/ integrated from version	V5.5 SP3 / V5.5 SP4	V5.5 SP3 / V5.5 SP4	V5.5 SP3 or higher	
• PCS 7 configurable/ integrated from version	V8.1 SP1	V8.1 SP1		
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher	GSD Revision 5	One GSD file each, Revision 3 and 5 and higher	
• PROFINET from GSD version/ GSD revision	GSDML V2.35	GSDML V2.3	GSDML V2.3	

Technical specifications

Article number	6ES7134-6JF00-0CA1 ET 200SP, AI 8xRTD/TC 2-Wire HF	6ES7134-6JD00-0CA1 ET 200SP, AI 4xRTD/TC 2-/3-/4-Wire HF	6ES7134-6JD00-0DA1 ET 200SP, AI 4x TC HS
Operating mode			
• Oversampling	No		No
• MSI	No		Yes
Supply voltage			
Rated value (DC)	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes
Analog inputs			
Number of analog inputs	8	4	4
permissible input voltage for voltage input (destruction limit), max.	30 V	30 V	30 V
Constant measurement current for resistance-type transmitter, typ.	2 mA	2 mA	
Cycle time (all channels), min.	Sum of the basic conversion times and additional processing times (depending on the parameterization of the active channels)	Sum of the basic conversion times and additional processing times (depending on the parameterization of the active channels); for line compensation in case of a three-wire connection, an additional cycle is necessary	5 ms; Sum of the basic conversion times and additional processing times (depending on the parameterization of the active channels)
Technical unit for temperature measurement adjustable	Yes; °C/°F/K	Yes; °C/°F/K	Yes; °C/°F/K
Input ranges (rated values), voltages			
• -1 V to +1 V	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• -250 mV to +250 mV	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• -50 mV to +50 mV	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• -80 mV to +80 mV	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
Input ranges (rated values), thermocouples			
• Type B	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type C	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type E	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type J	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type K	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type L	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type N	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type R	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type S	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type T	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type U	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• Type TXK/TXK(L) to GOST	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
Input ranges (rated values), resistance thermometer			
• Cu 10		Yes; 16 bit incl. sign	
• Ni 100	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Ni 1000	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• LG-Ni 1000	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Ni 120	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Ni 200	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Ni 500	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Pt 100	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Pt 1000	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Pt 200	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	
• Pt 500	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Analog input modules****Technical specifications**

Article number	6ES7134-6JF00-0CA1 ET 200SP, AI 8xRTD/TC 2-Wire HF	6ES7134-6JD00-0CA1 ET 200SP, AI 4xRTD/TC 2-/3-/4-Wire HF	6ES7134-6JD00-0DA1 ET 200SP, AI 4x TC HS
Input ranges (rated values), resistors			
• 0 to 150 ohms	Yes; 15 bit	Yes; 15 bit	
• 0 to 300 ohms	Yes; 15 bit	Yes; 15 bit	
• 0 to 600 ohms	Yes; 15 bit	Yes; 15 bit	
• 0 to 3000 ohms	Yes; 15 bit	Yes; 15 bit	
• 0 to 6000 ohms	Yes; 15 bit	Yes; 15 bit	
• PTC	Yes; 15 bit	Yes; 15 bit	
Thermocouple (TC)			
Temperature compensation			
- parameterizable	Yes	Yes	Yes
Cable length			
• shielded, max.	200 m; 50 m with thermocouples	200 m; 50 m with thermocouples	200 m; 100 m for thermocouples
Analog value generation for the inputs			
Integration and conversion time/resolution per channel			
• Resolution with overrange (bit including sign), max.	16 bit	16 bit	16 bit
• Integration time, parameterizable	Yes	Yes	Yes
• Interference voltage suppression for interference frequency f_1 in Hz	16.6 / 50 / 60 Hz	16.6 / 50 / 60 Hz	16.6 / 50 / 60 Hz / off
• Conversion time (per channel)	180 / 60 / 50 (67.5 / 22.5 / 18.75) ms	180 / 60 / 50 (67.5 / 22.5 / 18.75) ms	180 / 60 / 50 / 1.25 ms
Smoothing of measured values			
• Number of smoothing levels	4; None; 4/8/16 times	4; None; 4/8/16 times	4; None; 4/8/16 times
• parameterizable	Yes	Yes	Yes
Encoder			
Connection of signal encoders			
• for voltage measurement	Yes	Yes	Yes
• for resistance measurement with two-wire connection	Yes	Yes	
• for resistance measurement with three-wire connection	No	Yes	
• for resistance measurement with four-wire connection	No	Yes	
Errors/accuracies			
Basic error limit (operational limit at 25 °C)			
• Voltage, relative to input range, (+/-)	0.05 %	0.05 %	0.05 %; 0.2 % when SFU OFF
• Resistance, relative to input range, (+/-)	0.05 %	0.05 %	
Interference voltage suppression for $f = n \times (f_1 \pm 1 \%)$, $f_1 =$ interference frequency			
• Series mode interference (peak value of interference < rated value of input range), min.	70 dB; With conversion time 67.5 / 22.5 / 18.75 ms: 40 dB	70 dB; With conversion time 67.5 / 22.5 / 18.75 ms: 40 dB	70 dB
• Common mode voltage, max.	10 V	10 V	60 V; DC
• Common mode interference, min.	90 dB	90 dB	90 dB
Interrupts/diagnostics/status information			
Diagnostics function			Yes
Alarms			
• Diagnostic alarm	Yes		Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case	Yes; two upper and two lower limit values in each case	Yes; two upper and two lower limit values in each case

Technical specifications

Article number	6ES7134-6JF00-0CA1 ET 200SP, AI 8xRTD/TC 2-Wire HF	6ES7134-6JD00-0CA1 ET 200SP, AI 4xRTD/TC 2-/3-/4-Wire HF	6ES7134-6JD00-0DA1 ET 200SP, AI 4x TC HS
Diagnoses			
• Monitoring the supply voltage	Yes	Yes	Yes
• Wire-break	Yes; channel by channel	Yes; channel by channel	Yes; channel by channel
• Group error	Yes	Yes	Yes
• Overflow/underflow	Yes; channel by channel	Yes; channel by channel	Yes; channel by channel
Diagnostics indication LED			
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red LED
Potential separation			
Potential separation channels			
• between the channels and backplane bus	Yes		Yes
Standards, approvals, certificates			
Suitable for applications according to AMS 2750			Yes; Declaration of Conformity, see online support entry 109757262
Suitable for applications according to CQI-9			Yes; Based on AMS 2750 E
Ambient conditions			
Ambient temperature during operation			
• horizontal installation, min.	-30 °C	-30 °C; < 0 °C as of FS08	-30 °C; < 0 °C as of FS02
• horizontal installation, max.	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C; < 0 °C as of FS08	-30 °C; < 0 °C as of FS02
• vertical installation, max.	50 °C	50 °C	50 °C
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m		5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions			
Width	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm
Weights			
Weight, approx.			33 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Analog input modules

Technical specifications

Article number	7MH4134-6LB00-0DA0 ET 200SP AI 2 X SG 4-/6-WIRE HS
General information	
Product type designation	AI 2xSG 4-/6-wire HS
Product function	
• Isochronous mode	Yes
• Measuring range scalable	Yes
• Scalable measured values	No
• Adjustment of measuring range	Yes; $\pm 0.5 \dots 320$ mV/V
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V14 SP1
• STEP 7 configurable/ integrated from version	V5.6
• PROFIBUS from GSD version/ GSD revision	V03.01.105
• PROFINET from GSD version/ GSD revision	GSDML V2.33
Operating mode	
• Oversampling	Yes; 2 channels per module
• MSI	No
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Encoder supply	
Short-circuit protection	Yes
Analog inputs	
Number of analog inputs	2; Differential inputs
Cycle time (all channels), min.	100 μ s
Analog input with oversampling	Yes
• Values per cycle, max.	14
• Resolution, min.	100 μ s
Input ranges	
• Strain gauges (full bridges)	Yes
Cable length	
• shielded, max.	500 m
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	28 bit; 16 bits with oversampling
• Integration time, parameterizable	Yes
• Interference voltage suppression for interference frequency f_1 in Hz	60 / 50 Hz / no
• Conversion time (per channel)	100 μ s
Smoothing of measured values	
• IIR low-pass filter frequency	0.01 ... 600 Hz
• IIR low-pass filter ordinal number	1 ... 4
• Notch filter frequency	0.1 ... 1 000 Hz
• Notch filter quality	5.00 ... 250.00
• Average value filter	0.1 ... 655.3 ms
Encoder	
Connection of signal encoders	
• For strain gauges (full bridges) with 4-conductor connection	Yes
• For strain gauges (full bridges) with 6-conductor connection	Yes
• Resistance of full bridge, min.	80 Ω
• Resistance of full bridge, max.	5 000 Ω

Article number	7MH4134-6LB00-0DA0 ET 200SP AI 2 X SG 4-/6-WIRE HS
Errors/accuracies	
Temperature coefficient, zero point	$\leq \pm 0.25$ μ V/K
Temperature coefficient, span, 4-wire connection (in relation to end value)	$\leq \pm 5$ ppm/K
Temperature coefficient, span, 6-wire connection (in relation to end value)	$\leq \pm 10$ ppm/K
Basic error limit (operational limit at 25 °C)	
• Voltage, relative to input range, (+/-)	0.05 %; See manual for details
Isochronous mode	
Filtering and processing time (TCI), min.	87 μ s
Bus cycle time (TDP), min.	125 μ s
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Group error	Yes
• Overflow/underflow	Yes
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 1 K/100 m) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)
Dimensions	
Width	15 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	45 g

Technical specifications

Article number	6ES7134-6PA01-0BU0 ET 200SP AI Energy Meter CT ST	6ES7134-6PA21-0BU0 ET 200SP AI Energy Meter RC ST	6ES7134-6PA01-0CU0 ET 200SP AI Energy Meter CT HF	6ES7134-6PA21-0CU0 ET 200SP AI Energy Meter RC HF
General information				
Product type designation	AI Energy Meter CT ST	AI Energy Meter RC ST	AI Energy Meter CT HF	AI Energy Meter RC HF
Product function				
• Voltage measurement	Yes	Yes	Yes	Yes
- without voltage transformer	Yes	Yes	Yes	Yes
- with voltage transformer	Yes	Yes	Yes	Yes
• Current measurement	Yes; max. 3 + neutral conductor	Yes; max. 3 + neutral conductor	Yes; Max. 4	Yes; Max. 4
- without current transformer	No	No	No	No
- with current transformer	Yes; 1 A or 5 A current transformer	No	Yes; 1 A or 5 A current transformer	No
- With Rogowski coil	No	Yes	No	Yes
- With current-voltage-converter	No	Yes; 333 mV interface	No	Yes; 333 mV interface
• Energy measurement	Yes	Yes	Yes	Yes
• Frequency measurement	Yes	Yes	Yes	Yes
• Power measurement	Yes	Yes	Yes	Yes
• Active power measurement	Yes	Yes	Yes	Yes
• Reactive power measurement	Yes	Yes	Yes	Yes
• Power factor measurement	Yes	Yes	Yes	Yes
• Active factor measurement	Yes	Yes	Yes	Yes
• Reactive power compensation	Yes	Yes	Yes	Yes
• Line analysis	No	No	Yes	Yes
- Monitoring of instantaneous and half-wave values			Yes	Yes
- THD measurement for current and voltage			Yes	Yes
- Harmonics for current and voltage			Yes	Yes
- Voltage dip (DIP)			Yes	Yes
- Voltage swell			Yes	Yes
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Isochronous mode	No	No	No	No
Engineering with				
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V16 or higher with HSP	STEP 7 V16 or higher with HSP	STEP 7 V16 or higher with HSP	STEP 7 V16 or higher with HSP
• STEP 7 configurable/integrated from version	Configurable via GSD file	Configurable via GSD file	V5.5 SP3 or higher	V5.5 SP3 or higher
• PROFIBUS from GSD version/GSD revision	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/GSD revision	V2.3	V2.3	V2.3	V2.3
Operating mode				
• Switching between operating modes in RUN	Yes; For module version 32 I/20 Q, it is possible to dynamically switch between 25 user data variants, 23 of which are pre-defined and 2 of which can be defined by the specific user	Yes; For module version 32 I/20 Q, it is possible to dynamically switch between 25 user data variants, 23 of which are pre-defined and 2 of which can be defined by the specific user	Yes; For module version 32 I/20 Q, it is possible to dynamically switch between 25 user data variants, 23 of which are pre-defined and 2 of which can be defined by the specific user	Yes; For module version 32 I/20 Q, it is possible to dynamically switch between 25 user data variants, 23 of which are pre-defined and 2 of which can be defined by the specific user
• Cyclic measured value access	Yes	Yes	Yes	Yes
• Acyclic measured value access	Yes	Yes	Yes	Yes
• Fixed measured value sets	Yes	Yes	Yes	Yes
• Freely definable measured value sets	Yes; For cyclic and acyclic measured value access	Yes; For cyclic and acyclic measured value access	Yes; For cyclic and acyclic measured value access	Yes; For cyclic and acyclic measured value access
Installation type/mounting				
Mounting position	any	any	any	any
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Analog input modules

Technical specifications

Article number	6ES7134-6PA01-0BU0 ET 200SP AI Energy Meter CT ST	6ES7134-6PA21-0BU0 ET 200SP AI Energy Meter RC ST	6ES7134-6PA01-0CU0 ET 200SP AI Energy Meter CT HF	6ES7134-6PA21-0CU0 ET 200SP AI Energy Meter RC HF
Analog inputs				
Cycle time (all channels), typ.	50 ms; Time for consistent update of all measured and calculated values (cyclic and acyclic data)	50 ms; Time for consistent update of all measured and calculated values (cyclic and acyclic data)	50 ms; Time for consistent update of all measured and calculated values (cyclic and acyclic data)	50 ms; Time for consistent update of all measured and calculated values (cyclic and acyclic data)
Cable length				
• shielded, max.	200 m	200 m	200 m	200 m
Interrupts/diagnostics/ status information				
Alarms				
• Diagnostic alarm	Yes	Yes	Yes	Yes
• Limit value alarm	Yes	Yes	Yes	Yes
• Hardware interrupt	Yes; Monitoring of up to 16 freely selectable process values (exceeding or undershooting of value)	Yes; Monitoring of up to 16 freely selectable process values (exceeding or undershooting of value)	Yes; Monitoring of up to 16 freely selectable process values (exceeding or undershooting of value)	Yes; Monitoring of up to 16 freely selectable process values (exceeding or undershooting of value)
Diagnoses				
• Line quality			Yes	Yes
• Supply voltage	Yes	Yes	Yes	Yes
• Hardware interrupt lost	Yes	Yes	Yes	Yes
• Parameter assignment error	Yes	Yes	Yes	Yes
• Module fault	Yes	Yes	Yes	Yes
• Channel not available	Yes	Yes	Yes	Yes
• Overflow/underflow	Yes	Yes	Yes	Yes
• Overload current	Yes	Yes	Yes	Yes
Diagnostics indication LED				
• Monitoring of the supply voltage (PWR-LED)	Yes	Yes	Yes	Yes
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red Fn LED	Yes; red Fn LED	Yes; red Fn LED	Yes; red Fn LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Integrated Functions				
Measuring functions				
• Measuring procedure for voltage measurement	TRMS	TRMS	TRMS	TRMS
• Measuring procedure for current measurement	TRMS	TRMS	TRMS	TRMS
• Type of measured value acquisition	seamless	seamless	seamless	seamless
• Curve shape of voltage	Sinusoidal or distorted	Sinusoidal or distorted	Sinusoidal or distorted	Sinusoidal or distorted
• Buffering of measured variables	Yes	Yes	Yes	Yes
• Parameter length	128 byte	128 byte	128 byte	128 byte
• Bandwidth of measured value acquisition	3.2 kHz; Harmonics: 63 / 50 Hz, 52 / 60 Hz	3.2 kHz; Harmonics: 63 / 50 Hz, 52 / 60 Hz	3.2 kHz; Harmonics: 63 / 50 Hz, 52 / 60 Hz	3.2 kHz; Harmonics: 63 / 50 Hz, 52 / 60 Hz
Measuring range				
- Frequency measurement, min.	40 Hz	40 Hz	40 Hz	40 Hz
- Frequency measurement, max.	70 Hz	70 Hz	70 Hz	70 Hz
Measuring inputs for voltage				
- Measurable line voltage between phase and neutral conductor	277 V	277 V	277 V	277 V
- Measurable line voltage between the line conductors	480 V	480 V	480 V	480 V
- Measurable line voltage between phase and neutral conductor, min.	3 V	3 V	3 V	3 V
- Measurable line voltage between phase and neutral conductor, max.	300 V	300 V	300 V	300 V
- Measurable line voltage between the line conductors, min.	6 V	6 V	6 V	6 V
- Measurable line voltage between the line conductors, max.	519 V	519 V	519 V	519 V

Technical specifications

Article number	6ES7134-6PA01-0BU0 ET 200SP AI Energy Meter CT ST	6ES7134-6PA21-0BU0 ET 200SP AI Energy Meter RC ST	6ES7134-6PA01-0CU0 ET 200SP AI Energy Meter CT HF	6ES7134-6PA21-0CU0 ET 200SP AI Energy Meter RC HF
- Internal resistance line conductor and neutral conductor	1.5 MΩ	1.5 MΩ	1.5 MΩ	1.5 MΩ
- Power consumption per phase	60 mW; 300 V AC	60 mW; 300 V AC	60 mW; 300 V AC	60 mW; 300 V AC
- Impulse voltage resistance 1,2/50μs	2.5 kV	2.5 kV	2.5 kV	2.5 kV
- Measurement category for voltage measurement in accordance with IEC 61010-2-030	CAT II		CAT II	
- Overvoltage category		CAT II according to IEC 61010 Part 1		CAT II according to IEC 61010 Part 1
Measuring inputs for current				
- measurable relative current (AC), min.	1 %; Relative to measuring range; 1 A, 5 A		1 %; Relative to measuring range; 1 A, 5 A	
- measurable relative current (AC), max.	100 %; Relative to the secondary rated current 5 A		120 %; Relative to the secondary rated current 5 A	
- Continuous current with AC, maximum permissible	5 A		5 A; 6 A permanent thermal overload	
- Apparent power consumption per phase for measuring range 5 A	0.6 VA		0.6 VA	
- Rated value short-time withstand current restricted to 1 s	100 A		100 A	
- Input resistance measuring range 0 to 5 A	25 mΩ; At the terminal		25 mΩ; At the terminal	
- Surge strength	10 A; for 1 minute		10 A; for 1 minute	
- Zero point suppression	0 ... 20%, referred to the nominal current		0 ... 20%, referred to the nominal current	
Measuring inputs for current (Rog. or I/U converter)				
- Measurable current at AC, max.		424 mV		424 mV
- Continuous voltage, maximum permissible		2 V		2 V
- Rated value, short-time withstand voltage restricted to 1 s		30 V		30 V
- Input resistance		120 kΩ		120 kΩ
- Zero point suppression		Yes; 0 ... 20%, referred to the nominal current		Yes; 0 ... 20%, referred to the nominal current
Accuracy class according to IEC 61557-12				
- Measured variable voltage	0,2	0,2	0,2	0,2
- Measured variable current	0,2	0,2	0,2	0,2
- Measured variable apparent power	0.5	0.5	0.5	0.5
- Measured variable active power	0.5	0.5	0.5	0.5
- Measured variable reactive power	1	1	1	1
- Measured variable power factor	0.5	0.5	0.5	0.5
- Measured variable active energy	0.5	0.5	0.5	0.5
- Measured variable reactive energy	1	1	1	1
- Measured variable neutral current	0,2	0,2	0,2	0,2
- Measured variable phase angle	±0.5 °; not covered by IEC 61557-12	±0.5 °; not covered by IEC 61557-12	±0.5 °; not covered by IEC 61557-12	±0.5 °; not covered by IEC 61557-12
- Measured variable frequency	0.05; only valid for the permissible voltage measuring range	0.05; only valid for the permissible voltage measuring range	0.05; only valid for the permissible voltage measuring range	0.05; only valid for the permissible voltage measuring range
- Measured variable harmonic			1	1
- Measured variable THDU			1	1
- Measured variable THDI			1	1

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Analog input modules****Technical specifications**

Article number	6ES7134-6PA01-0BU0 ET 200SP AI Energy Meter CT ST	6ES7134-6PA21-0BU0 ET 200SP AI Energy Meter RC ST	6ES7134-6PA01-0CU0 ET 200SP AI Energy Meter CT HF	6ES7134-6PA21-0CU0 ET 200SP AI Energy Meter RC HF
Accuracy class line analysis acc. to IEC 61000-4-30				
- Measured variable voltage			Class S	Class S
- Measured variable current			Class S	Class S
- Measured variable frequency			Class S	Class S
- Measured variable voltage interruption			Class S	Class S
- Measured variable voltage dip and swell			Class S	Class S
- Measured variable harmonic voltage			Class S	Class S
- Measured variable harmonic current			Class S	Class S
Potential separation				
Potential separation channels				
• between the channels and backplane bus	Yes	Yes	Yes	Yes
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	3 000 m; Restrictions for installation altitudes > 2 000 m, see manual	3 000 m; Restrictions for installation altitudes > 2 000 m, see manual	3 000 m; Restrictions for installation altitudes > 2 000 m, see manual	3 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions				
Width	20 mm	20 mm	20 mm	20 mm
Height	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm
Weights				
Weight, approx.	45 g	45 g	45 g	45 g
Other				
Data for selecting a voltage transformer				
• Secondary side, max.	300 V	300 V	300 V	300 V
Data for selecting a current transformer				
• Burden power current transformer x/1A, min.	As a function of cable length and cross section, see device manual		As a function of cable length and cross section, see device manual	
• Burden power current transformer x/5A, min.	As a function of cable length and cross section, see device manual		As a function of cable length and cross section, see device manual	

Overview



- 2 and 4-channel analog output (AQ) modules
- Apart from the standard type of delivery in single-unit packaging, selected I/O modules and BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules.

For different requirements, the analog output modules offer:

- Function classes Standard, High Feature and High-Speed
- BaseUnits for single or multiple-conductor connection with automatic slot coding
- Potential distributor modules for system-integrated expansion with potential terminals
- Individual system-integrated potential group formation with self-assembling voltage busbars (a separate power module is no longer required for ET 200SP)

- Option for connecting current and voltage actuators
- Clear labeling on front of module
- LEDs for diagnostics, status, supply voltage and faults
- Electronically readable and non-volatile writable nameplate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
 - Oversampling operating mode (n-fold equidistant output of an analog value within one PN cycle and thus the precisely timed output of an analog value or a sequence of analog values)
 - Isochronous mode (simultaneous equidistant output of analog values)
 - Output of substitute value in the event of communication interruptions (shutdown, output adjustable substitute value, or keep last value)
 - Calibration during runtime
 - Re-parameterization during operation
 - Firmware update
 - Diagnostics of wire break, short-circuit, overflow, underflow
 - Value status (optional binary validity information of the analog value status in the process image)
 - Supports the PROFlenergy profile
- Optional accessories
 - Labeling strips (film or card)
 - Equipment labeling plate
 - Color-coded label with module-specific CC code
 - Shield terminal

A quick and clear comparison of the functions of the AQ modules is offered by the TIA Selection Tool.

Overview of analog output modules

Analog output	Pkg. unit	Article No.	CC code	BU type
AQ 2 x U ST	1	6ES7135-6FB00-0BA1	CC00	A0, A1
AQ 2 x I ST	1	6ES7135-6GB00-0BA1	CC00	A0, A1
AQ 4 x U/I ST	1	6ES7135-6HD00-0BA1	CC00	A0, A1
AQ 2 x U/I HF	1	6ES7135-6HB00-0CA1	CC00	A0, A1
AQ 2xU/I HS	1	6ES7135-6HB00-0DA1	CC00	A0, A1
With two operating modes: • High-speed isochronous AQ • Oversampling				
AQ 4xI HART HF	1	6ES7135-6TD00-0CA1	CC00	A0, A1

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Analog output modules****Overview**

Overview of BaseUnits

BaseUnit	Pkg. unit	Article No.	CC codes for process terminals	CC codes for AUX terminals
BU type A0 • New potential group (light) • 16 process terminals • With 10 AUX terminals	1	6ES7193-6BP20-0DA0	CC01 to CC05	CC71 to CC73
BU type A0 • New potential group (light) • 16 process terminals • With 10 AUX terminals	10	6ES7193-6BP20-2DA0	CC01 to CC05	CC71 to CC73
BU type A0 • New potential group (light) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0DA0	CC01 to CC05	--
BU type A0 • New potential group (light) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2DA0	CC01 to CC05	--
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • With 10 AUX terminals	1	6ES7193-6BP20-0BA0	CC01 to CC05	CC71 to CC73
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • With 10 AUX terminals	10	6ES7193-6BP20-2BA0	CC01 to CC05	CC71 to CC73
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	1	6ES7193-6BP00-0BA0	CC01 to CC05	--
BU type A0 • Forwarding of the potential group (dark) • 16 process terminals • Without AUX terminals	10	6ES7193-6BP00-2BA0	CC01 to CC05	--
BU type A1 • New potential group (light) • With temperature sensor • 16 process terminals • With 2x5 additional terminals	1	6ES7193-6BP40-0DA1	CC01 to CC05	CC74
BU type A1 • New potential group (light) • With temperature sensor • 16 process terminals • Without 2x5 additional terminals	1	6ES7193-6BP00-0DA1	CC01 to CC05	--
BU type A1 • Forwarding of the potential group (dark) • With temperature sensor • 16 process terminals • With 2x5 additional terminals	1	6ES7193-6BP40-0BA1	CC01 to CC05	CC74
BU type A1 • Forwarding of the potential group (dark) • With temperature sensor • 16 process terminals • Without 2x5 additional terminals	1	6ES7193-6BP00-0BA1	CC01 to CC05	--

Overview

Overview of potential distributor modules

Potential distributor module	Pkg. unit	Article No.	CC codes for process terminals
PotDis BU Type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP1	CC00, CC62
PotDis BU Type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP1	CC00, CC62
PotDis BU Type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	1	6ES7193-6UP00-0DP2	CC00, CC63
PotDis BU Type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	1	6ES7193-6UP00-0BP2	CC00, CC63
PotDis TB Type BR-W, 18x internally bridged terminals, without reference to P1, P2 or AUX, (total current max. 10 A)	1	6ES7193-6TP00-0TP0	CC10 to CC13
PotDis TB Type P1-R, 18x P1 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP1	CC10, CC12
PotDis TB Type P2-B, 18x P2 potential, (total current max. 10 A)	1	6ES7193-6TP00-0TP2	CC10, CC13
PotDis TB Type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX	1	6ES7193-6TP00-0TN0	CC10

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Analog output modules

Ordering data	Article No.	Article No.
Analog output modules Analog output module AQ 2xJ Standard, BU type A0 or A1, color code CC00, 16-bit Analog output module AQ 2xl Standard, BU type A0 or A1, color code CC00, 16-bit Analog output module AQ 4xJ/l Standard, BU type A0 or A1, color code CC00, 16-bit, ± 0.3% Analog output module AQ 2xJ/l High Feature, BU type A0 or A1, color code CC00, 16-bit, ±0.1% Analog output module AQ 2xJ/l High Speed, BU type A0 or A1, color code CC00, 16-bit, ± 0.3% Analog output module AQ 4xl HART High Feature, BU type A0 or A1, color code CC00, 16-bit, ±0.3%	6ES7135-6FB00-0BA1 6ES7135-6GB00-0BA1 6ES7135-6HD00-0BA1 6ES7135-6HB00-0CA1 6ES7135-6HB00-0DA1 6ES7135-6TD00-0CA1	BU15-P16+A10+2B BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the potential group <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 6ES7193-6BP20-0BA0 6ES7193-6BP20-2BA0
Suitable type A0 BaseUnits Types of delivery: Apart from the standard type of delivery in a single-unit package, selected BaseUnits are also available in a pack of 10 units. The pack of 10 units enables the amount of waste to be reduced considerably, as well as saving the time and cost of unpacking individual modules. The number of modules required is the number of modules ordered. The pack type is selected by selecting the Article No. Packs of 10 can therefore only be ordered in integer multiples of 10.		BU15-P16+A0+2B BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the potential group <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 6ES7193-6BP00-0BA0 6ES7193-6BP00-2BA0
		Suitable type A1 BaseUnits (temperature detection) BU15-P16+A0+12D/T BU type A1; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 2x5 internally bridged additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new potential group (max. 10 A) 6ES7193-6BP40-0DA1
		BU15-P16+A0+2D/T BU type A1; BaseUnit (light) with 16 process terminals to the module; for starting a new potential group (max. 10 A) 6ES7193-6BP00-0DA1
BU15-P16+A10+2D BU type A0; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new potential group (max. 10 A) <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 	6ES7193-6BP20-0DA0 6ES7193-6BP20-2DA0	BU15-P16+A0+12B/T BU type A1; BaseUnit (dark) with 16 process terminals (1 ... 16) to the module and an additional 2x5 internally bridged additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the potential group 6ES7193-6BP40-0BA1
BU15-P16+A0+2D BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new potential group (max. 10 A) <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 	6ES7193-6BP00-0DA0 6ES7193-6BP00-2DA0	BU15-P16+A0+2B/T BU type A1; BaseUnit (dark) with 16 process terminals to the module; for continuing the potential group 6ES7193-6BP00-0BA1

10

Ordering data	Article No.	Article No.
Potential distributor modules		
PotDis BU		
PotDis BU, type P1 (light), 17x P1 potential, 1x P2 potential, for starting a new potential group (max. 10 A)	6ES7193-6UP00-ODP1	6ES7193-6SC20-1AM0
PotDis BU, type P1 (dark), 17x P1 potential, 1x P2 potential, for continuing the potential group	6ES7193-6UP00-OBP1	
PotDis BU, type P2 (light), 1x P1 potential, 17x P2 potential, for starting a new potential group (max. 10 A)	6ES7193-6UP00-ODP2	
PotDis BU, type P2 (dark), 1x P1 potential, 17x P2 potential, for continuing the potential group	6ES7193-6UP00-OBP2	
PotDis TB		
PotDis TB, type BR-W, 18x internally jumpered terminals, without reference to P1, P2 or AUX, (total current max. 10 A)	6ES7193-6TP00-OTPO	
PotDis TB, type P1-R, 18x P1 potential, (total current max. 10 A)	6ES7193-6TP00-OTP1	
PotDis TB, type P2-B, 18x P2 potential, (total current max. 10 A)	6ES7193-6TP00-OTP2	
PotDis TB, type n.c.-G, 18x n.c. (not connected) terminals, without reference to P1, P2 or AUX	6ES7193-6TP00-OTNO	
Accessories		
Equipment labeling plate	6ES7193-6LF30-0AW0	
10 sheets of 16 labels, for printing with thermal transfer card printer or plotter		
Labeling strips		
500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0	
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0	
1000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AA0	
1000 labeling strips DIN A4, yellow, card, perforated, for inscription with laser printer	6ES7193-6LA10-0AG0	
BU cover		
For covering empty slots (gaps); 5 units		
• 15 mm	6ES7133-6CV15-1AM0	
• 20 mm	6ES7133-6CV20-1AM0	
		Shield connection
		5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding
		Color-coded labels
		Color code CC00, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 10 units
		Color code CC00, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); 50 units
		Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A); 10 units
		Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A); 10 units
		Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 10 units
		Color code CC74, for 2x5 additional terminals, BU type A1, red (terminals 1B to 5B), blue (terminals 1C to 5C); 10 units
		Color-coded labels for PotDis BU
		Color code CC62, for 16 process terminals, PotDis BU type P1, red (terminals 1 to 16); 10 units
		Color code CC63, for 16 process terminals, PotDis BU type P2, blue (terminals 1 to 16); 10 units
		Color-coded labels for PotDis TB
		Color code CC10, for 18 process terminals, PotDis TB, gray (terminals 1 to 18); 10 units
		Color code CC11, for 18 process terminals, PotDis TB, yellow-green (terminals 1 to 18); 10 units
		Color code CC12, for 18 process terminals, PotDis TB, type P1 and BR, red (terminals 1 to 18); 10 units
		Color code CC13, for 18 process terminals, PotDis TB, type P2 and BR, blue (terminals 1 to 18); 10 units
		Mechanical coding elements
		For automatic coding of I/O modules; spare part. 20 units
		Type A
		6ES7193-6KA00-3AA0
		Type B
		6ES7193-6KB00-3AA0
		Type C
		6ES7193-6KC00-3AA0
		Type D
		6ES7193-6KD00-3AA0

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Analog output modules****Technical specifications**

Article number	6ES7135-6FB00-0BA1 ET 200SP, AQ 2xU Standard, PU 1	6ES7135-6GB00-0BA1 ET 200SP, AQ 2xI Standard, PU 1	6ES7135-6HD00-0BA1 ET 200SP, AQ 4xU/I ST	6ES7135-6HB00-0DA1 ET 200SP, AQ 2 X U/I High Speed	6ES7135-6HB00-0CA1 ET 200SP, AQ 2 X U/I High Feature
General information					
Product type designation	AQ 2xU ST	AQ 2xI ST	AQ 4xU/I ST	AQ 2xU/I HS	AQ 2xU/I HF
Product function					
• Isochronous mode	No	No	No	Yes	Yes
• Output range scalable	No	No	No		
Engineering with					
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1 / -	V13 SP1 / -	V11 SP2 / V13	V13 SP1	V13 / V13
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -	V5.5 SP3 / -
• PCS 7 configurable/ integrated from version			V8.1 SP1		V8.1 SP1
• PROFIBUS from GSD version/ GSD revision	GSD Revision 5	GSD Revision 5	One GSD file each, Revision 3 and 5 and higher	GSD Revision 5	GSD Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3
Operating mode					
• Oversampling	No	No	No	Yes; 2 channels per module	No
• MSO	No	No	No	No	No
Supply voltage					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes	Yes
Analog outputs					
Number of analog outputs	2	2	4	2	2
Cycle time (all channels), min.	1 ms	1 ms	5 ms	125 µs	750 µs
Analog output with oversampling	No	No	No	Yes	
• Values per cycle, max.				16	
• Resolution, min.				45 µs; (2 channels), 35 µs (1 channel)	
Output ranges, voltage					
• 0 to 10 V	Yes; 15 bit		Yes; 15 bit	Yes; 15 bit	Yes; 15 bit
• 1 V to 5 V	Yes; 13 bit		Yes; 13 bit	Yes; 13 bit	Yes; 13 bit
• -5 V to +5 V	Yes; 15 bit incl. sign		Yes; 15 bit incl. sign	Yes; 15 bit incl. sign	Yes; 15 bit incl. sign
• -10 V to +10 V	Yes; 16 bit incl. sign		Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
Output ranges, current					
• 0 to 20 mA		Yes; 15 bit	Yes; 15 bit	Yes; 15 bit	Yes; 15 bit
• -20 mA to +20 mA		Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• 4 mA to 20 mA		Yes; 14 bit	Yes; 14 bit	Yes; 14 bit	Yes; 14 bit
Connection of actuators					
• for voltage output two-wire connection	Yes		Yes	Yes	Yes
• for voltage output four-wire connection	No		Yes	Yes	Yes
• for current output two-wire connection		Yes	Yes	Yes	Yes
Load impedance (in rated range of output)					
• with voltage outputs, min.	2 kΩ		2 kΩ	2 kΩ	2 kΩ
• with voltage outputs, capacitive load, max.	1 µF		1 µF	1 µF	1 µF
• with current outputs, max.		500 Ω	500 Ω	500 Ω	500 Ω
• with current outputs, inductive load, max.		1 mH	1 mH	1 mH	1 mH
Cable length					
• shielded, max.	200 m	1 000 m	1 000 m; 200 m for voltage output	1 000 m; 200 m for voltage output	1 000 m; 200 m for voltage output

Technical specifications

Article number	6ES7135-6FB00-0BA1	6ES7135-6GB00-0BA1	6ES7135-6HD00-0BA1	6ES7135-6HB00-0DA1	6ES7135-6HB00-0CA1
	ET 200SP, AQ 2xU Standard, PU 1	ET 200SP, AQ 2xI Standard, PU 1	ET 200SP, AQ 4xU/I ST	ET 200SP, AQ 2 X U/I High Speed	ET 200SP, AQ 2 X U/I High Feature
Analog value generation for the outputs					
Integration and conversion time/resolution per channel					
<ul style="list-style-type: none"> Resolution with overrange (bit including sign), max. 	16 bit	16 bit	16 bit	16 bit	16 bit
Settling time					
<ul style="list-style-type: none"> for resistive load for capacitive load 	0.1 ms 1 ms	0.1 ms; Typical value	0.1 ms 1 ms	0.05 ms 0.05 ms; Max. 47 nF and 20 m cable length	0.05 ms 0.05 ms; Max. 47 nF and 20 m cable length
<ul style="list-style-type: none"> for inductive load 		0.5 ms	0.5 ms	0.05 ms	0.05 ms
Errors/accuracies					
Basic error limit (operational limit at 25 °C)					
<ul style="list-style-type: none"> Voltage, relative to output range, (+/-) Current, relative to output range, (+/-) 	0.3 % 0.3 %	0.3 % 0.3 %	0.3 % 0.3 %	0.1 % 0.1 %	0.1 % 0.1 %
Isochronous mode					
Execution and activation time (TCO), min.				70 µs	500 µs
Bus cycle time (TDP), min.				125 µs	750 µs
Interrupts/diagnostics/status information					
Diagnostics function	Yes	Yes	Yes	Yes	Yes
Substitute values connectable	Yes	Yes	Yes	Yes	Yes
Alarms					
<ul style="list-style-type: none"> Diagnostic alarm 	Yes	Yes	Yes	Yes	Yes
Diagnoses					
<ul style="list-style-type: none"> Monitoring the supply voltage Wire-break 	Yes	Yes Yes	Yes Yes	Yes Yes; channel-by-channel, only for output type "current"	Yes Yes; channel-by-channel, only for output type "current"
<ul style="list-style-type: none"> Short-circuit 	Yes		Yes	Yes; channel-by-channel, only for output type "voltage"	Yes; channel-by-channel, only for output type "voltage"
<ul style="list-style-type: none"> Group error Overflow/underflow 	Yes Yes	Yes Yes	Yes Yes	Yes Yes	Yes Yes
Diagnostics indication LED					
<ul style="list-style-type: none"> Monitoring of the supply voltage (PWR-LED) Channel status display for channel diagnostics for module diagnostics 	Yes; green PWR LED Yes; green LED No Yes; green/red DIAG LED	Yes; green PWR LED Yes; green LED No Yes; green/red DIAG LED	Yes; green PWR LED Yes; green LED No Yes; green/red DIAG LED	Yes; green PWR LED Yes; green LED Yes; red LED Yes; green/red DIAG LED	Yes; green PWR LED Yes; green LED Yes; red LED Yes; green/red DIAG LED
Potential separation					
Potential separation channels					
<ul style="list-style-type: none"> between the channels and backplane bus 	Yes	Yes	Yes	Yes	Yes
Ambient conditions					
Ambient temperature during operation					
<ul style="list-style-type: none"> horizontal installation, min. horizontal installation, max. vertical installation, min. vertical installation, max. 	-30 °C; < 0 °C as of FS03 60 °C -30 °C; < 0 °C as of FS03 50 °C	-30 °C; < 0 °C as of FS03 60 °C -30 °C; < 0 °C as of FS03 50 °C	-30 °C; < 0 °C as of FS07 60 °C; Observe derating -30 °C; < 0 °C as of FS07 50 °C; Observe derating	-30 °C; < 0 °C as of FS06 60 °C -30 °C; < 0 °C as of FS06 50 °C	-30 °C; < 0 °C as of FS04 60 °C -30 °C; < 0 °C as of FS04 50 °C

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Analog output modules

Technical specifications

Article number	6ES7135-6FB00-0BA1	6ES7135-6GB00-0BA1	6ES7135-6HD00-0BA1	6ES7135-6HB00-0DA1	6ES7135-6HB00-0CA1
	ET 200SP, AQ 2xU Standard, PU 1	ET 200SP, AQ 2xI Standard, PU 1	ET 200SP, AQ 4xU/I ST	ET 200SP, AQ 2 X U/I High Speed	ET 200SP, AQ 2 X U/I High Feature
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions					
Width	15 mm	15 mm	15 mm	15 mm	15 mm
Height	73 mm	73 mm	73 mm	73 mm	73 mm
Depth	58 mm	58 mm	58 mm	58 mm	58 mm
Weights					
Weight, approx.	31 g	31 g	31 g	31 g	31 g

Article number	6ES7135-6TD00-0CA1
	ET 200SP, AQ 4xI HART HF
General information	
Product type designation	AQ 4xI HART HF
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V15 SP1
• STEP 7 configurable/integrated from version	V5.6 and higher
• PCS 7 configurable/integrated from version	V9.0 SP1
• PROFIBUS from GSD version/GSD revision	V04.02.14
• PROFINET from GSD version/GSD revision	GSDML V2.34
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Analog outputs	
Number of analog outputs	4
Cycle time (all channels), min.	3 ms
Output ranges, current	
• 0 to 20 mA	Yes; 16 bit incl. sign
• -20 mA to +20 mA	No
• 4 mA to 20 mA	Yes; 16 bit incl. sign
Connection of actuators	
• for current output two-wire connection	Yes
Load impedance (in rated range of output)	
• with current outputs, max.	750 Ω
• with current outputs, inductive load, max.	10 mH
Cable length	
• shielded, max.	800 m
Analog value generation for the outputs	
Settling time	
• for resistive load	2 ms; 750 ohm
• for capacitive load	2 ms
• for inductive load	2 ms
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Current, relative to output range, (+/-)	0.1 %
Protocols	
HART protocol	Yes

Article number	6ES7135-6TD00-0CA1
	ET 200SP, AQ 4xI HART HF
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Monitoring the supply voltage	Yes; Module-wise
• Wire-break	Yes; channel by channel
• Short-circuit	Yes
• Overflow/underflow	Yes; channel by channel
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
Dimensions	
Width	15 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	31 g

10

Overview



- 4, 8 and 16-channel digital input (DI) modules

For different requirements, the digital input modules offer:

- Function classes Basic, Standard, High Feature and High Speed as well as fail-safe DI (see "Fail-safe I/O modules")
- BaseUnits for single or multiple-conductor connection with automatic slot coding
- Potential distribution modules for system-integrated expansion with additional potential terminals
- Individual system-integrated load group formation with self-assembling voltage distribution bars (a separate power module is no longer required for ET 200SP)
- Option of connecting sensors compliant with IEC 61131 type 1, 2 or 3 (module-dependent) for rated voltages of up to 24 V DC or 230 V AC
- PNP (sink input) and NPN (sourcing input) versions
- Clear labeling on front of module

- LEDs for diagnostics, status, supply voltage and faults (e.g. wire break/short-circuit)
- Electronically readable and non-volatile writable rating plate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
 - MSI operating mode (simultaneous reading of input data from as many as three other controllers)
 - Counting operating mode (multi-channel counter for pulse generators with 32-bits counting width and up to 10 kHz counting frequency)
 - Oversampling operating mode (n-fold equidistant acquisition of digital values within one PN cycle for increasing the time resolution for slow CPU cycles)
 - Parameterizable input delay time
 - Isochronous mode (simultaneous equidistant reading of all input channels)
 - Hardware interrupt pulse stretching
 - Re-parameterization during operation
 - Firmware update
 - Diagnosis of wire break and short-circuit (on channel or module basis)
 - Value status (optional binary validity information of the input signal in the process image)
 - Supports the PROFenergy profile
- Optional accessories
 - Labeling strips (film or card)
 - Equipment labeling plate
 - Color-coded label with module-specific CC code
 - Shielding terminal

A quick and clear comparison of the functions of the different DI modules is offered by the TIA Selection Tool.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

Article No.

SIPLUS digital input modules

(Extended temperature range and exposure to environmental substances)

DI 8x24VDC Standard, BU type A0, color code CC01

6AG1131-6BF01-7BA0

DI 8x24VDC Source Input, Basic, BU type A0, color code CC02

6AG1131-6BF61-7AA0

DI 16x24VDC Standard, BU type A0, color code CC00

6AG1131-6BH01-7BA0

DI 8x24VDC High Feature, BU type A0, color code CC01, channel-specific diagnostics, isochronous mode, shared input (MSI)

6AG1131-6BF00-7CA0

DI 4x120VAC-230VAC Standard, BU type B1, color code CC41

6AG1131-6FD01-7BB1

DI 8xNAMUR High Feature, BU type A0, color code CC01

6AG1131-6TF00-7CA0

DI 8x24VAC-48VUC Basic, BU type U0, color code CC20, module diagnostics

6AG1131-6CF00-7AU0

Suitable SIPLUS BaseUnits**BU15-P16+A0+2D**

6AG1193-6BP00-7DA0

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

BU15-P16+A0+2B

6AG1193-6BP00-7BA0

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

BU15-P16+A10+2D

6AG1193-6BP20-7DA0

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1... 16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > SIPLUS digital inputs

Ordering data	Article No.	Ordering data	Article No.
BU15-P16+A10+2B (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the load group	6AG1193-6BP20-7BA0	BU20-P16+A0+2B (Extended temperature range and exposure to environmental substances) BU type U0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	6AG1193-6BP00-7BU0
BU20-P12+A0+4B (Extended temperature range and exposure to environmental substances) BU type B1; BaseUnit (dark) with 12 process terminals to the module; for continuing the load group	6AG1193-6BP20-7BB1	Accessories SIPLUS Mounting Kit ET 200SP Mounting accessories for use with increased mechanical vibration and shock loads.	6AG1193-6AA00-0AA0
BU20-P16+A0+2D (Extended temperature range and exposure to environmental substances) BU type U0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	6AG1193-6BP00-7DU0	Other accessories See SIMATIC ET 200SP, digital input modules, page 10/28	

Technical specifications

Article number	6AG1131-6BF61-7AA0	6AG1131-6BF01-7BA0	6AG1131-6BH01-7BA0
Based on	6ES7131-6BF61-0AA0 SIPLUS ET 200SP DI 8x24VDC SOURCE BA	6ES7131-6BF01-0BA0 SIPLUS ET 200SP DI 8x24VDC ST	6ES7131-6BH01-0BA0 SIPLUS ET 200SP DI 16x24VDC ST
Ambient conditions			
Ambient temperature during operation			
<ul style="list-style-type: none"> horizontal installation, min. horizontal installation, max. 	-40 °C; = Tmin (incl. condensation/frost) 70 °C; = Tmax	-40 °C; = Tmin (incl. condensation/frost) 70 °C; = Tmax	-40 °C; = Tmin (incl. condensation/frost) 70 °C; = Tmax
Altitude during operation relating to sea level			
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 Against mechanical environmental conditions acc. to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Technical specifications

Article number	6AG1131-6BF61-7AA0	6AG1131-6BF01-7BA0	6AG1131-6BH01-7BA0	
Based on	6ES7131-6BF61-0AA0 SIPLUS ET 200SP DI 8x24VDC SOURCE BA	6ES7131-6BF01-0BA0 SIPLUS ET 200SP DI 8x24VDC ST	6ES7131-6BH01-0BA0 SIPLUS ET 200SP DI 16x24VDC ST	
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	
Article number	6AG1131-6BF00-7CA0	6AG1131-6FD01-7BB1	6AG1131-6TF00-7CA0	6AG1131-6CF00-7AU0
Based on	6ES7131-6BF00-0CA0 SIPLUS ET 200SP DI 8x24VDC HF	6ES7131-6FD01-0BB1 SIPLUS ET 200SP DI 4X120...230VAC ST	6ES7131-6TF00-0CA0 SIPLUS ET 200SP DI 8XNAMUR HF	6ES7131-6CF00-0AU0 SIPLUS ET 200SP DI 8x48VUC BA
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax; > +60 °C encoder supply output current max. 350 mA per channel	70 °C; = Tmax	70 °C; = Tmax; > +60 °C number of simultaneously controllable inputs max. 4 (no adjacent points)	70 °C; = Tmax
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	2 000 m	5 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > SIPLUS digital inputs

Technical specifications

Article number	6AG1131-6BF00-7CA0	6AG1131-6FD01-7BB1	6AG1131-6TF00-7CA0	6AG1131-6CF00-7AU0
Based on	6ES7131-6BF00-0CA0 SIPLUS ET 200SP DI 8x24VDC HF	6ES7131-6FD01-0BB1 SIPLUS ET 200SP DI 4X120...230VAC ST	6ES7131-6TF00-0CA0 SIPLUS ET 200SP DI 8XNAMUR HF	6ES7131-6CF00-0AU0 SIPLUS ET 200SP DI 8x48VUC BA
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview



- 4, 8 and 16-channel DQ modules
- 4-channel RQ modules
- BaseUnits for single conductor or multiple-conductor connection
- Function classes Basic, Standard, High Feature and High-Speed as well as fail-safe DQ and RQ
- Clear labeling on front of module
- LEDs for diagnostics, status and errors
- Individual system-integrated load group formation with self-assembling potential multi-terminal busbars (power module not required for ET 200SP)
- Electronically readable nameplate (I&M data)
- Additional operating modes in some cases
- Optional accessories:
 - Labeling strips
 - Equipment marking label
 - Color-coded label with module-specific CC code
 - Shield terminal

Overview of digital output modules

Digital output	Pkg. unit	Article No.	CC code	BU type
DQ 16 x 24 V DC/0.5 A ST	1	6AG1132-6BH01-7BA0	CC00	A0
DQ 8 x 24 V DC/0.5 A SNK BA	1	6AG1132-6BF61-7AA0	CC01	A0
DQ 8 x 24 V DC/0.5 A ST	1	6AG1132-6BF01-7BA0	CC02	A0
DQ 8 x 24 V DC/0.5 A HF	1	6AG1132-6BF00-7CA0	CC02	A0
DQ 4 x 24 V DC/2 A ST	1	6AG1132-6BD20-7BA0	CC02	A0
DQ 4 x 24 V DC/2 A HF	1	6AG1132-6BD20-7CA0	CC02	A0
DQ 4 x 24 ... 230 V AC/2 A HF	1	6AG1132-6FD00-7CU0	CC20	U0
With two operating modes: • DQ • PC: Power control via phase angle, half-wave or full-wave control				
RQ 4 x 24 V UC/2 A CO ST	1	6AG1132-6GD51-7BA0	--	A0
RQ 4 x 120 V DC-230 V AC/5 A NO ST	1	6AG1132-6HD01-7BB1	--	B0, B1

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > SIPLUS digital outputs****Ordering data****Article No.****Article No.****SIPLUS digital output modules**

(Extended temperature range and exposure to environmental substances)

Digital output module
DQ 8x24VDC/0.5A Sink output, Basic, BU type A0, color code CC01

6AG1132-6BF61-7AA0

Digital output module
DQ 4x24VDC/2A Standard, BU type A0, color code CC02

6AG1132-6BD20-7BA0

Digital output module
DQ 8x24VDC/0.5A Standard, BU type A0, color code CC02

6AG1132-6BF01-7BA0

Digital output module
DQ 8x24VDC/0.5A High Feature, BU type A0, color code CC02

6AG1132-6BF00-7CA0

Digital output module
DQ 16x24VDC/0.5A Standard, BU type A0, color code CC00

6AG1132-6BH01-7BA0

Digital output module
DQ 4x24VDC/2A High Feature, BU type A0, color code CC02, channel-precise diagnostics, isochronous mode, shared output (MSO); Pkg. unit: 1 unit

6AG1132-6BD20-7CA0

Signal relay module
RQ CO 4x24VUC/2A Standard, changeover contact, BU type A0, color code CC00

6AG1132-6GD51-7BA0

Relay module
RQ NO 4x120VDC-230VAC/5A Standard, NO contact, BU type B0, B1

6AG1132-6HD01-7BB1

Digital output module
DQ 4x24VAC...230VAC/2A High Feature for BU type U0, color code CC20, 2 operating modes: DQ and PC (power control via phase angle, half-wave and full-wave control)

6AG1132-6FD00-7CU0**Suitable SIPLUS BaseUnits****BU15-P16+A10+2D**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

6AG1193-6BP20-7DA0**BU15-P16+A0+2D**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

6AG1193-6BP00-7DA0**BU15-P16+A10+2B**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the load group

6AG1193-6BP20-7BA0**BU15-P16+A0+2B**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

6AG1193-6BP00-7BA0**BU20-P12+A4+0B**

(Extended temperature range and exposure to environmental substances)

BU type B0; BaseUnit (dark) with 12 process terminals (1...12) to the module and an additional 4 internally bridged AUX terminals (1 A to 4 A); for continuing the load group; 1 unit

6AG1193-6BP20-7BB0**BU20-P12+A0+4B**

(Extended temperature range and exposure to environmental substances)

BU type B1; BaseUnit (dark) with 12 process terminals to the module; for continuing the load group; 1 unit

6AG1193-6BP20-7BB1**BU20-P16+A0+2D**

(Extended temperature range and exposure to environmental substances)

BU type U0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

6AG1193-6BP00-7DU0**BU20-P16+A0+2B**

(Extended temperature range and exposure to environmental substances)

BU type U0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

6AG1193-6BP00-7BU0**Accessories****SIPLUS Mounting Kit ET 200SP**

Mounting accessories for use with increased mechanical vibration and shock loads.

6AG1193-6AA00-0AA0**Other accessories**

See SIMATIC ET 200SP, digital output modules, page 10/39

Technical specifications

Article number	6AG1132-6BF61-7AA0	6AG1132-6BD20-7BA0	6AG1132-6BF01-7BA0
Based on	6ES7132-6BF61-0AA0 SIPLUS ET 200SP DQ 8x24VDC/0,5A SNK BA	6ES7132-6BD20-0BA0 SIPLUS ET200SP DQ 4x24VDC/2A ST	6ES7132-6BF01-0BA0 SIPLUS ET 200SP DQ 8x24VDC/0,5A ST
Ambient conditions			
Ambient temperature during operation			
<ul style="list-style-type: none"> horizontal installation, min. horizontal installation, max. vertical installation, min. vertical installation, max. 	-40 °C; = Tmin (incl. condensation/frost) 70 °C; = Tmax	-40 °C; = Tmin (incl. condensation/frost) 70 °C; = Tmax; > +60 °C number of simultaneously controllable outputs max. 2x 0.25 A or max. 4x 0.125 A, max. total current 0.5 A -40 °C; = Tmin 50 °C; = Tmax	-40 °C; = Tmin (incl. condensation/frost) 70 °C; = Tmax; > +60 °C max. total current 1.0 A
Altitude during operation relating to sea level			
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 Against mechanical environmental conditions acc. to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 Against mechanical environmental conditions acc. to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology			
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > SIPLUS digital outputs

Technical specifications

Article number	6AG1132-6BF61-7AA0	6AG1132-6BD20-7BA0	6AG1132-6BF01-7BA0
Based on	6ES7132-6BF61-0AA0 SIPLUS ET 200SP DQ 8x24VDC/0,5A SNK BA	6ES7132-6BD20-0BA0 SIPLUS ET200SP DQ 4x24VDC/2A ST	6ES7132-6BF01-0BA0 SIPLUS ET 200SP DQ 8x24VDC/0,5A ST
Conformal coating			
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	<ul style="list-style-type: none"> Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A 	<ul style="list-style-type: none"> Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A 	<ul style="list-style-type: none"> Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A
Article number	6AG1132-6BH01-7BA0	6AG1132-6BF00-7CA0	6AG1132-6GD51-7BA0
Based on	6ES7132-6BH01-0BA0 SIPLUS ET 200SP DQ 16x24VDC/0,5A ST	6ES7132-6BF00-0CA0 SIPLUS ET 200SP DQ 8X24VDC/0,5A HF	6ES7132-6GD51-0BA0 SIPLUS ET 200SP RQ 4x24VDC/2A CO ST
Ambient conditions			
Ambient temperature during operation			
<ul style="list-style-type: none"> horizontal installation, min. horizontal installation, max. vertical installation, min. vertical installation, max. 	<ul style="list-style-type: none"> -40 °C; = Tmin (incl. condensation/frost) 70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax > 60 °C max. total current 1 A 	<ul style="list-style-type: none"> -40 °C; = Tmin (incl. condensation/frost) 70 °C; = Tmax; > +60 °C max. total current 1.0 A -40 °C; = Tmin 50 °C; = Tmax 	<ul style="list-style-type: none"> -40 °C; = Tmin (incl. condensation/frost) 70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax > 60 °C max. aggregate current 2 A per group
Altitude during operation relating to sea level			
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	<ul style="list-style-type: none"> 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) 	<ul style="list-style-type: none"> 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m) 	<ul style="list-style-type: none"> 5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity			
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)
Resistance			
Coolants and lubricants			
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 Against mechanical environmental conditions acc. to EN 60721-3-3 	<ul style="list-style-type: none"> Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0) 	<ul style="list-style-type: none"> Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0) 	<ul style="list-style-type: none"> Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna) Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea			
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 Against mechanical environmental conditions acc. to EN 60721-3-6 	<ul style="list-style-type: none"> Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0) 	<ul style="list-style-type: none"> Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0) 	<ul style="list-style-type: none"> Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Technical specifications

Article number	6AG1132-6BH01-7BA0	6AG1132-6BF00-7CA0	6AG1132-6GD51-7BA0
Based on	6ES7132-6BH01-0BA0 SIPLUS ET 200SP DQ 16x24VDC/0,5A ST	6ES7132-6BF00-0CA0 SIPLUS ET 200SP DQ 8x24VDC/0,5A HF	6ES7132-6GD51-0BA0 SIPLUS ET 200SP RQ 4x24VDC/2A CO ST
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1132-6HD01-7BB1	6AG1132-6BD20-7CA0	6AG1132-6FD00-7CU0
Based on	6ES7132-6HD01-0BB1 SIPLUS ET 200SP RQ 4x120VDC/230VAC/5A	6ES7132-6BD20-0CA0 SIPLUS ET 200SP DQ 4x24VDC/2A HF	6ES7132-6FD00-0CU0 SIPLUS ET 200SP DQ 4x24...230VAC/2A HF
Ambient conditions			
Ambient temperature during operation			
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax > 60 °C max. continuous current of 3 A per relay	70 °C; = Tmax; see Derating BasedOn (e.g. manual), additionally Tmax > 60 °C max. total current 1 A	70 °C; = Tmax
• vertical installation, min.	-40 °C; in all other mounting positions		
• vertical installation, max.	50 °C; in all other mounting positions		
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	3 000 m	5 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 1 K/100 m) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > SIPLUS digital outputs****Technical specifications**

Article number	6AG1132-6HD01-7BB1	6AG1132-6BD20-7CA0	6AG1132-6FD00-7CU0
Based on	6ES7132-6HD01-0BB1 SIPLUS ET 200SP RQ 4x120VDC/230VAC/5A	6ES7132-6BD20-0CA0 SIPLUS ET 200SP DQ 4X24VDC/2A HF	6ES7132-6FD00-0CU0 SIPLUS ET 200SP DQ 4X24..230VAC/2A HF
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview



- 2, 4 and 8-channel analog input modules
- Measuring ranges for current, voltage, thermocouples, resistance thermometer, resistor and PTC
- BaseUnits for 2, 3 and 4-wire connection
- Function classes Basic, Standard, High Feature and High Speed
- BaseUnits for single or multiple-conductor connection with automatic slot coding

- Potential distributor modules for system-integrated expansion with potential terminals
- Individual system-integrated potential group formation with self-assembling voltage busbars (a separate power module is no longer required for ET 200SP)
- Option of connecting current, voltage and resistance sensors, as well as thermocouples
- Option of connecting force and torque sensors
- Energy Meter for recording up to 600 electrical variables
- Clear labeling on front of module
- LED displays for diagnostics, status, supply voltage and faults
- Electronically readable and non-volatile writable nameplate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
- Optional accessories:
 - Labeling strips (film or card)
 - Equipment labeling plate
 - Color-coded label with module-specific CC code
 - Shield terminal

Overview of SIPLUS analog input modules

Analog input	Pkg. unit	Article No.	CC code	BU type
AI 8 x I 2/4-wire BA	1	6AG1134-6GF00-7AA1	CC01	A0, A1
AI 8 x U BA	1	6AG1134-6FF00-2AA1	CC02	A0, A1
AI 4 x U/I 2-wire ST	1	6AG1134-6HD01-7BA1	CC03	A0, A1
AI 4 x I 2/4-wire ST	1	6AG1134-6GD01-7BA1	CC03	A0, A1
AI 4 x I 2-wire 4 ... 20 mA HART	1	6AG1134-6TD00-2CA1	CC03	A0, A1
AI 2 x U/I 2/4-wire HF	1	6AG1134-6HB00-2CA1	CC05	A0, A1
AI 2 x U/I 2/4-wire HS	1	6AG1134-6HB00-2DA1	CC00	A0, A1
With two operating modes: • High-speed isochronous AI • Oversampling				
AI 8 x RTD/TC 2-wire HF	10	6AG1134-6JF00-2CA1	CC00	A0, A1
AI 4 x RTD/TC 2/3/4-wire HF	10	6AG1134-6JD00-2CA1	CC00	A0, A1
AI 4 x TC High Speed	1	6AG1134-6JD00-2DA1	CC00	A0, A1
AI Energy Meter 480 V AC ST	1	6AG1134-6PA20-7BD0	--	D0

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > SIPLUS analog inputs**

Ordering data	Article No.	Article No.
SIPLUS analog input modules (Extended temperature range and exposure to environmental substances) Analog input module AI 8xI 2/4-wire BA, BU type A0 or A1, color code CC01	6AG1134-6GF00-7AA1	6AG1193-6BP20-7DA0
Analog input module AI 8xU BA, BU type A0 or A1, color code CC02	6AG1134-6FF00-2AA1	
Analog input module AI 4xU/I 2-wire Standard, BU type A0 or A1, color code CC03, 16-bit, ±0.3%	6AG1134-6HD01-7BA1	6AG1193-6BP20-7BA0
Analog input module AI 4xI 2/4-wire Standard, BU type A0 or A1, color code CC03, 16-bit, ±0.3%	6AG1134-6GD01-7BA1	
Analog input module AI 4xRTD/TC 2/3/4-wire High Feature, BU type A0 or A1, color code CC00, 16-bit, ±0.1%, scalable measuring range	6AG1134-6JD00-2CA1	
Analog input module AI 4xTC High Speed, BU type A0 or A1, color code CC00, channel diagnostics, 16-bit, +/-0.1%	6AG1134-6JD00-2DA1	
Analog input module AI 4xI 2-wire 4 ... 20 mA HART, BU type A0 or A1, color code CC03	6AG1134-6TD00-2CA1	
Analog input module AI 2xU/I 2/4-wire High Feature, BU type A0 or A1, color code CC05, 16-bit, ±0.1%, independent channel galvanic isolation, isochronous mode above 1 ms	6AG1134-6HB00-2CA1	
Analog input module AI 2xU/I 2/4-wire High Speed, BU type A0 or A1, color code CC00, 16-bit, ±0.3%, isochronous mode above 250 µs, oversampling above 50 µs	6AG1134-6HB00-2DA1	
Analog input module AI 8xRTD/TC 2-wire High Feature, BU type A0 or A1, color code CC00, 16-bit, ±0.1%, scalable measuring range	6AG1134-6JF00-2CA1	
Analog input module AI Energy Meter Standard, 480 V AC, BU type D0	6AG1134-6PA20-7BD0	
Suitable SIPLUS BaseUnits type A0		
BU15-P16+A0+2D (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	6AG1193-6BP00-7DA0	
BU15-P16+A0+2B (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	6AG1193-6BP00-7BA0	
BU15-P16+A10+2D (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)	6AG1193-6BP20-7DA0	
BU15-P16+A10+2B (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the load group	6AG1193-6BP20-7BA0	
Suitable SIPLUS BaseUnits type A1 (temperature detection)		
BU15-P16+A0+2D/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	6AG1193-6BP00-7DA1	
BU15-P16+A0+2B/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	6AG1193-6BP00-7BA1	
BU15-P16+A0+12D/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 2x5 internally bridged additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new load group (max. 10 A)	6AG1193-6BP40-7DA1	
BU15-P16+A0+12B/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 2x5 internally bridged additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the load group	6AG1193-6BP40-7BA1	
Suitable SIPLUS BaseUnits type D0		
BU20-P12+A0+0B (Extended temperature range and exposure to environmental substances) BU type D0; BaseUnit with 12 push-in terminals, without AUX terminals, bridged to the left	6AG1193-6BP00-7BD0	
Accessories		
SIPLUS Mounting Kit ET 200SP Mounting accessories for use with increased mechanical vibration and shock loads.	6AG1193-6AA00-0AA0	
Other accessories		See SIMATIC ET 200SP, analog input modules, page 10/56

Technical specifications

Article number	6AG1134-6GF00-7AA1	6AG1134-6FF00-2AA1	6AG1134-6HD01-7BA1	6AG1134-6GD01-7BA1	6AG1134-6TD00-2CA1
Based on	6ES7134-6GF00-0AA1	6ES7134-6FF00-0AA1	6ES7134-6HD01-0BA1	6ES7134-6GD01-0BA1	6ES7134-6TD00-0CA1
	SIPLUS ET 200SP AI 8xI 2-/4-WIRE BA	SIPLUS ET 200SP AI 8xU BASIC	SIPLUS ET 200SP AI 4xU/I 2-w ST	SIPLUS ET 200SP AI 4xI 2-/4-w ST	SIPLUS ET 200SP AI 4xI 2-WIRE 4...20mA H
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -30 °C
• horizontal installation, max.	70 °C; = Tmax	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	70 °C; = Tmax; > 60 °C max. 1x ±20 mA or 4x ±10 V permissible	70 °C; = Tmax; > 60 °C max. 1x ±20 mA permissible	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
• vertical installation, min.			-40 °C; = Tmin	-40 °C; = Tmin	-40 °C; = Tmin (incl. condensation/frost); start-up @ -30 °C
• vertical installation, max.			50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity					
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance					
Coolants and lubricants					
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems					
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > SIPLUS analog inputs****Technical specifications**

Article number	6AG1134-6GF00-7AA1	6AG1134-6FF00-2AA1	6AG1134-6HD01-7BA1	6AG1134-6GD01-7BA1	6AG1134-6TD00-2CA1
Based on	6ES7134-6GF00-0AA1 SIPLUS ET 200SP AI 8XI 2-/4-WIRE BA	6ES7134-6FF00-0AA1 SIPLUS ET 200SP AI 8xU BASIC	6ES7134-6HD01-0BA1 SIPLUS ET 200SP AI 4xU/I 2-w ST	6ES7134-6GD01-0BA1 SIPLUS ET 200SP AI 4xI 2-/4-w ST	6ES7134-6TD00-0CA1 SIPLUS ET 200SP AI 4XI 2-WIRE 4...20MA H
Use on ships/at sea					
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology					
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark					
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating					
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1134-6HB00-2CA1	6AG1134-6HB00-2DA1	6AG1134-6JF00-2CA1	6AG1134-6JD00-2CA1	6AG1134-6JD00-2DA1
Based on	6ES7134-6HB00-0CA1 SIPLUS ET 200SP AI 2 X U/I 2-, 4-WIRE HF	6ES7134-6HB00-0DA1 SIPLUS ET 200SP AI 2 X U/I 2-, 4-WIRE HS	6ES7134-6JF00-0CA1 SIPLUS ET 200SP AI 8XRTD/TC 2-WIRE HF	6ES7134-6JD00-0CA1 SIPLUS ET 200SP AI 4xRTD/TC HF	6ES7134-6JD00-0DA1 SIPLUS ET 200SP AI 4x TC HS
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
• vertical installation, min.			-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• vertical installation, max.			50 °C; = Tmax	50 °C; = Tmax	50 °C; = Tmax
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m	5 000 m

Technical specifications

Article number	6AG1134-6HB00-2CA1	6AG1134-6HB00-2DA1	6AG1134-6JF00-2CA1	6AG1134-6JD00-2CA1	6AG1134-6JD00-2DA1
Based on	6ES7134-6HB00-0CA1	6ES7134-6HB00-0DA1	6ES7134-6JF00-0CA1	6ES7134-6JD00-0CA1	6ES7134-6JD00-0DA1
	SIPLUS ET 200SP AI 2 X U/I 2-, 4-WIRE HF	SIPLUS ET 200SP AI 2 X U/I 2-, 4-WIRE HS	SIPLUS ET 200SP AI 8XRTD/TC 2-WIRE HF	SIPLUS ET 200SP AI 4xRTD/TC HF	SIPLUS ET 200SP AI 4x TC HS
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity					
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance					
Coolants and lubricants					
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems					
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea					
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > SIPLUS analog inputs

Technical specifications

Article number	6AG1134-6HB00-2CA1	6AG1134-6HB00-2DA1	6AG1134-6JF00-2CA1	6AG1134-6JD00-2CA1	6AG1134-6JD00-2DA1
Based on	6ES7134-6HB00-0CA1	6ES7134-6HB00-0DA1	6ES7134-6JF00-0CA1	6ES7134-6JD00-0CA1	6ES7134-6JD00-0DA1
	SIPLUS ET 200SP AI 2 X U/I 2-, 4-WIRE HF	SIPLUS ET 200SP AI 2 X U/I 2-, 4-WIRE HS	SIPLUS ET 200SP AI 8XRTD/TC 2-WIRE HF	SIPLUS ET 200SP AI 4xRTD/TC HF	SIPLUS ET 200SP AI 4x TC HS
Usage in industrial process technology					
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark					
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating					
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Technical specifications

Article number	6AG1134-6PA20-7BD0
Based on	6ES7134-6PA20-0BD0 SIPLUS ET 200SP AI EMETER 480VAC ST
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C; = Tmin; < -25 °C min. permissible supply voltage 110 V AC
• horizontal installation, max.	70 °C; = Tmax; > +60 °C max. permissible current 1 A per phase
• vertical installation, min.	-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Article number	6AG1134-6PA20-7BD0
Based on	6ES7134-6PA20-0BD0 SIPLUS ET 200SP AI EMETER 480VAC ST
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > SIPLUS analog outputs

Overview



- 2 and 4-channel analog output (AQ) modules

For different requirements, the digital output modules offer:

- Function classes Standard, High Feature and High-Speed
- BaseUnits for single or multiple-conductor connection with automatic slot coding
- Potential distribution modules for system-integrated expansion with potential terminals
- Individual system-integrated load group formation with self-assembling voltage distribution bars (a separate power module is no longer required for ET 200SP)

- Option for connecting current and voltage actuators
- Clear labeling on front of module
- LED displays for diagnostics, status, supply voltage and faults
- Electronically readable and non-volatile writable rating plate (I&M data 0 to 3)
- Extended functions and additional operating modes in some cases
 - Oversampling operating mode (n-fold isochronous output of an analog value within one PN cycle and thus the precisely timed output of an analog value or a sequence of analog values)
 - Isochronous mode (simultaneous equidistant output of analog values)
 - Output of substitute value in the event of communication interruptions (shutdown, output adjustable substitute value, or keep last value)
 - Calibration during runtime
 - Re-parameterization during operation
 - Firmware update
 - Diagnosis of wire break, short-circuit, overflow, underflow
 - Value status (optional binary validity information of the analog value in the process image)
 - Supports the PROFlenergy profile
- Optional accessories
 - Labeling strips (film or card)
 - Equipment labeling plate
 - Color-coded label with module-specific CC code
 - Shield terminal

A quick and clear comparison of the functions of the AQ modules is offered by the TIA Selection Tool.

Overview of analog output modules

Analog output	Pkg. unit	Article No.	CC code	BU type
AQ 2 x I ST	1	6AG1135-6GB00-7BA1	CC00	A0, A1
AQ 4 x U/I ST	1	6AG1135-6HD00-7BA1	CC00	A0, A1
AQ 2 x U/I HF	1	6AG1135-6HB00-7CA1	CC00	A0, A1
AQ 2 x U/I HS	1	6AG1135-6HB00-2DA1	CC00	A0, A1
With two operating modes:				
• High-speed isochronous AQ				
• Oversampling				
AQ 4xI HART HF	1	6AG1135-6TD00-2CA1	CC00	A0, A1

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data	Article No.	Ordering data	Article No.
SIPLUS analog output modules (Extended temperature range and exposure to environmental substances) Analog output module AQ 2xI Standard, BU type A0 or A1, color code CC00, 16-bit Analog output module AQ 4xU/I Standard, BU type A0 or A1, color code CC03 Analog output module AQ 2xU/I High Feature, BU type A0 or A1, color code CC00, 16-bit, ±0.1% Analog output module AQ 2xU/I High Speed, BU type A0 or A1, color code CC00, 16-bit, ± 0.3% Analog output module AQ 4xI HART High Feature, BU type A0 or A1, color code CC00, 16-bit, ±0.3%	6AG1135-6GB00-7BA1 6AG1135-6HD00-7BA1 6AG1135-6HB00-7CA1 6AG1135-6HB00-2DA1 6AG1135-6TD00-2CA1	Suitable SIPLUS BaseUnits type A1 (temperature detection) BU15-P16+A0+2D/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A) BU15-P16+A0+2B/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group BU15-P16+A0+12D/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 2x5 internally bridged additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new load group (max. 10 A) BU15-P16+A0+12B/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 2x5 internally bridged additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the load group	6AG1193-6BP00-7DA1 6AG1193-6BP00-7BA1 6AG1193-6BP40-7DA1 6AG1193-6BP40-7BA1
Suitable SIPLUS BaseUnits type A0		Accessories	
BU15-P16+A0+2D (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	6AG1193-6BP00-7DA0	SIPLUS Mounting Kit ET 200SP	6AG1193-6AA00-0AA0
BU15-P16+A0+2B (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	6AG1193-6BP00-7BA0	Mounting accessories for use with increased mechanical vibration and shock loads.	
BU15-P16+A10+2D (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)	6AG1193-6BP20-7DA0	Other accessories	See SIMATIC ET 200SP, analog output modules, page 10/75
BU15-P16+A10+2B (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the load group	6AG1193-6BP20-7BA0		

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > SIPLUS analog outputs

Technical specifications

Article number	6AG1135-6GB00-7BA1	6AG1135-6HD00-7BA1	6AG1135-6HB00-2DA1	6AG1135-6HB00-7CA1	6AG1135-6TD00-2CA1
Based on	6ES7135-6GB00-0BA1 SIPLUS ET 200SP AQ 2xI Standard	6ES7135-6HD00-0BA1 SIPLUS ET 200SP AQ 4xU/I ST	6ES7135-6HB00-0DA1 SIPLUS ET 200SP AQ 2 X U/I High Speed	6ES7135-6HB00-0CA1 SIPLUS ET 200SP AQ 2xU/I HF	6ES7135-6TD00-0CA1 SIPLUS ET 200SP AQ 4xI HART High Feature
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax; > +60 °C max. 2x ±10 V permissible	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	70 °C; = Tmax	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
• vertical installation, min.		-40 °C; = Tmin		-40 °C; = Tmin	-40 °C; = Tmin (incl. condensation/frost)
• vertical installation, max.		50 °C; = Tmax		60 °C; = Tmax	50 °C; = Tmax
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity					
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance					
Coolants and lubricants					
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems					
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0/ 6AG1193-6AB00-0AA0)

Technical specifications

Article number	6AG1135-6GB00-7BA1	6AG1135-6HD00-7BA1	6AG1135-6HB00-2DA1	6AG1135-6HB00-7CA1	6AG1135-6TD00-2CA1
Based on	6ES7135-6GB00-0BA1 SIPLUS ET 200SP AQ 2xI Standard	6ES7135-6HD00-0BA1 SIPLUS ET 200SP AQ 4xU/I ST	6ES7135-6HB00-0DA1 SIPLUS ET 200SP AQ 2 X U/I High Speed	6ES7135-6HB00-0CA1 SIPLUS ET 200SP AQ 2xU/I HF	6ES7135-6TD00-0CA1 SIPLUS ET 200SP AQ 4xI HART High Feature
Use on ships/at sea					
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology					
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark					
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating					
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > TM Count 1x24V counter module

Overview



Technical properties

- Counter module for ET 200SP
- Interfaces:
 - 24 V encoder signals A, B and N from P, M or push-pull-switching encoders and sensors
 - 24 V encoder supply output, short-circuit proof
 - 3 digital inputs for controlling the count operation, for saving or for setting the count value
 - 2 digital outputs for fast reactions regardless of the counter status or measured value

- Counting frequency 200 kHz (800 kHz with quadruple evaluation)
- Counting range: +/- 31-bit
- Measurement function
- Parameterizable hardware interrupts
- Parameterizable input filters for suppressing interferences at sensor and digital inputs

Supported types of encoders/signals

- 24 V incremental encoder with and without N signal
- 24 V pulse encoder with direction signal
- 24 V pulse encoder without direction signal
- 24 V pulse encoder for pulse up and down respectively

Supported system functions

- Isochronous mode
- Firmware update
- Identification data I&M

Ordering data

TM Count 1x24V counter module

With one channel, max. 200 kHz;
for 24 V encoder

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this Article No. with an order quantity of 10.

6ES7138-6AA01-0BA0
6ES7138-6AA01-2BA0

Suitable BaseUnits

BU15-P16+A10+2D

BU type A0; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0DA0
6ES7193-6BP20-2DA0

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP00-0DA0
6ES7193-6BP00-2DA0

Article No.

BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0BA0
6ES7193-6BP20-2BA0

BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP00-0BA0
6ES7193-6BP00-2BA0

Ordering data	Article No.	Article No.
Accessories		
Equipment labeling plate 10 sheets of 16 labels	6ES7193-6LF30-0AW0	6ES7193-6CP71-2AA0
Labeling strips 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0	6ES7193-6CP72-2AA0
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0	6ES7193-6CP73-2AA0
1000 labeling strips DIN A4, light gray, card, for inscription with laser printer	6ES7193-6LA10-0AA0	
1000 labeling strips DIN A4, yellow, card, for inscription with laser printer	6ES7193-6LA10-0AG0	
BU cover For covering empty slots (gaps); 5 units		
• 15 mm wide	6ES7133-6CV15-1AM0	
• 20 mm wide	6ES7133-6CV20-1AM0	
Shield connection 5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding	6ES7193-6SC20-1AM0	
		Color-coded labels
		• Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units
		• Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units
		• Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units
		Mechanical coding elements
		For automatic coding of I/O modules; spare part. 20 units
		Type A
		6ES7193-6KA00-3AA0
		Type B
		6ES7193-6KB00-3AA0
		Type C
		6ES7193-6KC00-3AA0
		Type D
		6ES7193-6KD00-3AA0

Technical specifications

Article number	6ES7138-6AA01-0BA0 ET 200SP, TM Count 1x24V
General information	
Product type designation	TM Count 1x24V
Product function	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	Yes
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V15 SP1 or higher
• STEP 7 configurable/ integrated from version	V5.6 and higher
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/ GSD revision	GSDML V2.34
Supply voltage	
Rated value (DC)	24 V
Load voltage L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
Encoder supply	
Number of outputs	1
24 V encoder supply	
• 24 V	Yes; L+ (-0.8 V)
• Short-circuit protection	Yes; electronic/thermal
• Output current, max.	300 mA
Digital inputs	
Number of digital inputs	3
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes

Article number	6ES7138-6AA01-0BA0 ET 200SP, TM Count 1x24V
Digital input functions, parameterizable	
• Gate start/stop	Yes
• Capture	Yes
• Synchronization	Yes
• Freely usable digital input	Yes
• Probe	Yes
Input voltage	
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
Input current	
• for signal "1", typ.	2.5 mA
Input delay (for rated value of input voltage) for standard inputs	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
- at "0" to "1", min.	6 µs; for parameterization "none"
- at "1" to "0", min.	6 µs; for parameterization "none"
for technological functions	
- parameterizable	Yes
Digital outputs	
Type of digital output	Transistor
Number of digital outputs	2
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Limitation of inductive shutdown voltage to	L+ (-53 V)
Controlling a digital input	Yes

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > TM Count 1x24V counter module

Technical specifications

Article number	6ES7138-6AA01-0BA0 ET 200SP, TM Count 1x24V
Digital output functions, parameterizable	
• Switching tripped by comparison values	Yes
• Freely usable digital output	Yes
Switching capacity of the outputs	
• with resistive load, max.	0.5 A; Per digital output
• on lamp load, max.	5 W
Load resistance range	
• lower limit	48 Ω
• upper limit	12 kΩ
Output voltage	
• for signal "1", min.	23.2 V; L+ (-0.8 V)
Output current	
• for signal "1" rated value	0.5 A; Per digital output
• for signal "0" residual current, max.	0.5 mA
Output delay with resistive load	
• "0" to "1", max.	50 μs
• "1" to "0", max.	50 μs
Switching frequency	
• with resistive load, max.	10 kHz
• with inductive load, max.	0.5 Hz; Acc. to IEC 60947-5-1, DC-13; observe derating curve
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per module, max.	1 A
Encoder	
Connectable encoders	
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA
Encoder signals, incremental encoder (asymmetrical)	
• Input voltage	24 V
• Input frequency, max.	200 kHz
• Counting frequency, max.	800 kHz; with quadruple evaluation
• Cable length, shielded, max.	600 m; depending on input frequency, encoder and cable quality; max. 50 m at 200 kHz
• Signal filter, parameterizable	Yes
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes
• pulse encoder	Yes
• pulse encoder with direction	Yes
• pulse encoder with one impulse signal per count direction	Yes
Interface types	
• Source/sink input	Yes
• Input characteristic curve in accordance with IEC 61131, type 3	Yes

Article number	6ES7138-6AA01-0BA0 ET 200SP, TM Count 1x24V
Interrupts/diagnostics/status information	
Substitute values connectable	Yes; Parameterizable
Alarms	
• Diagnostic alarm	Yes
• Hardware interrupt	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• A/B transition error at incremental encoder	Yes
• Group error	Yes
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red DIAG LED
• Status indicator forward counting (green)	Yes
• Status indicator backward counting (green)	Yes
Integrated Functions	
Counter	Yes
• Number of counters	1
• Counting frequency, max.	800 kHz; with quadruple evaluation
Fast mode	Yes
Counting functions	
• Can be used with TO High_Speed_Counter	Yes
• Continuous counting	Yes
• Counter response parameterizable	Yes
• Hardware gate via digital input	Yes
• Software gate	Yes
• Event-controlled stop	Yes
• Synchronization via digital input	Yes
• Counting range, parameterizable	Yes
Comparator	
- Number of comparators	2
- Direction dependency	Yes
- Can be changed from user program	Yes
Position detection	
• Incremental acquisition	Yes
• Suitable for S7-1500 Motion Control	Yes

Technical specifications

Article number	6ES7138-6AA01-0BA0 ET 200SP, TM Count 1x24V
Measuring functions	
• Measuring time, parameterizable	Yes
• Dynamic measurement period adjustment	Yes
• Number of thresholds, parameterizable	2
Measuring range	
- Frequency measurement, min.	0.04 Hz
- Frequency measurement, max.	800 kHz
- Cycle duration measurement, min.	1.25 µs
- Cycle duration measurement, max.	25 s
Accuracy	
- Frequency measurement	100 ppm; depending on measuring interval and signal evaluation
- Cycle duration measurement	100 ppm; depending on measuring interval and signal evaluation
- Velocity measurement	100 ppm; depending on measuring interval and signal evaluation
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
Suitable for safety functions	No

Article number	6ES7138-6AA01-0BA0 ET 200SP, TM Count 1x24V
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Decentralized operation	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	Yes
to standard PROFINET controller	Yes
Dimensions	
Width	15 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	45 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > TM PosInput 1 counter and position detection module

Overview



- Counter frequency 1 MHz (4 MHz with quadruple evaluation)
- Counting range: +/- 31 bits
- Measurement function
- Parameterizable hardware interrupts
- Parameterizable input filters for suppressing interferences at sensor and digital inputs

Supported types of encoders/signals

- Incremental encoders with or without N signal
- Pulse encoders with directional signal
- Pulse encoders without directional signal
- Pulse encoders for forward or reverse pulses
- SSI encoders with a frame length of 10 to 40 bits, of which up to 31 bits position value

Supported system functions

- Isochronous mode
- Firmware update
- Identification data I&M

Technical properties

- Counter and position detection module for ET 200SP
- Interfaces:
 - Encoder signals A, B and N for 5 V TTL or RS422 differential signals
 - SSI interface with clock and data for RS422 differential signals
 - 24 V encoder supply, short-circuit proof
 - 5 V encoder supply, short-circuit proof
 - 2 digital inputs for controlling the counting process, for saving or setting the counter or position value
 - 2 digital outputs for fast reactions depending on the counter reading, position value or measured value

Ordering data

TM PosInput 1 counter and position detection module

With one channel, max. 1 MHz for 5 V TTL or RS422 differential signals or SSI absolute encoder

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7138-6BA01-0BA0
6ES7138-6BA01-2BA0

Suitable BaseUnits

BU15-P16+A10+2D

BU type A0; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0DA0
6ES7193-6BP20-2DA0

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP00-0DA0
6ES7193-6BP00-2DA0

Article No.

BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0BA0
6ES7193-6BP20-2BA0

BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP00-0BA0
6ES7193-6BP00-2BA0

Ordering data	Article No.	Article No.
Accessories		
Equipment labeling plate 10 sheets of 16 labels	6ES7193-6LF30-0AW0	6ES7193-6CP71-2AA0
Labeling strips 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0	6ES7193-6CP72-2AA0
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0	6ES7193-6CP73-2AA0
1000 labeling strips DIN A4, light gray, card, for inscription with laser printer	6ES7193-6LA10-0AA0	
1000 labeling strips DIN A4, yellow, card, for inscription with laser printer	6ES7193-6LA10-0AG0	
BU cover For covering empty slots (gaps); 5 units		
• 15 mm wide	6ES7133-6CV15-1AM0	
• 20 mm wide	6ES7133-6CV20-1AM0	
Shield connection 5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding	6ES7193-6SC20-1AM0	
		Color-coded labels
		• Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units
		• Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units
		• Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units
		Mechanical coding elements
		For automatic coding of I/O modules; spare part. 20 units
		Type A
		6ES7193-6KA00-3AA0
		Type B
		6ES7193-6KB00-3AA0
		Type C
		6ES7193-6KC00-3AA0
		Type D
		6ES7193-6KD00-3AA0

Technical specifications

Article number	6ES7138-6BA01-0BA0 ET 200SP, TM Posinput 1
General information	
Product type designation	TM PosInput 1
Product function	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	Yes
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V16 or higher
• STEP 7 configurable/integrated from version	V5.6 (use previous version *6BA00*)
• PROFIBUS from GSD version/GSD revision	GSD Revision 5
• PROFINET from GSD version/GSD revision	GSDML V2.34
Supply voltage	
Rated value (DC)	24 V
Load voltage L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
Encoder supply	
Number of outputs	2
5 V encoder supply	
• 5 V	Yes
• Short-circuit protection	Yes; electronic/thermal
• Output current, max.	300 mA; Total current of all encoders
24 V encoder supply	
• 24 V	Yes; L+ (-0.8 V)
• Short-circuit protection	Yes; electronic/thermal
• Output current, max.	300 mA; Total current of all encoders
Digital inputs	
Number of digital inputs	2
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes

Article number	6ES7138-6BA01-0BA0 ET 200SP, TM Posinput 1
Digital input functions, parameterizable	
• Gate start/stop	Yes; only for pulse and incremental encoders
• Capture	Yes
• Synchronization	Yes; only for pulse and incremental encoders
• Freely usable digital input	Yes
Input voltage	
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
Input current	
• for signal "1", typ.	2.5 mA
Input delay (for rated value of input voltage) for standard inputs	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
- at "0" to "1", min.	6 µs; for parameterization "none"
- at "1" to "0", min.	6 µs; for parameterization "none"
for technological functions	
- parameterizable	Yes

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > TM PosInput 1 counter and position detection module

Technical specifications

Article number	6ES7138-6BA01-0BA0 ET 200SP, TM Posinput 1
Digital outputs	
Type of digital output	Transistor
Number of digital outputs	2
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Limitation of inductive shutdown voltage to	L+ (-53 V)
Controlling a digital input	Yes
Digital output functions, parameterizable	
• Switching tripped by comparison values	Yes
• Freely usable digital output	Yes
Switching capacity of the outputs	
• with resistive load, max.	0.5 A; Per digital output
• on lamp load, max.	5 W
Load resistance range	
• lower limit	48 Ω
• upper limit	12 kΩ
Output voltage	
• for signal "1", min.	23.2 V; L+ (-0.8 V)
Output current	
• for signal "1" rated value	0.5 A; Per digital output
• for signal "0" residual current, max.	0.5 mA
Output delay with resistive load	
• "0" to "1", max.	50 μs
• "1" to "0", max.	50 μs
Switching frequency	
• with resistive load, max.	10 kHz
• with inductive load, max.	0.5 Hz; Acc. to IEC 60947-5-1, DC-13; observe derating curve
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per module, max.	1 A
Encoder	
Encoder signals, incremental encoder (symmetrical)	
• Input voltage	RS 422
• Input frequency, max.	1 MHz
• Counting frequency, max.	4 MHz; with quadruple evaluation
• Cable length, shielded, max.	32 m; at 1 MHz
• Signal filter, parameterizable	Yes
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes
• pulse encoder	Yes
• Pulse encoder with direction	Yes
• pulse encoder with one impulse signal per count direction	Yes

Article number	6ES7138-6BA01-0BA0 ET 200SP, TM Posinput 1
Encoder signals, incremental encoder (asymmetrical)	
• Input voltage	5 V TTL (push-pull encoders only)
• Input frequency, max.	1 MHz
• Counting frequency, max.	4 MHz; with quadruple evaluation
• Signal filter, parameterizable	Yes
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes
• pulse encoder	Yes
• pulse encoder with direction	Yes
• pulse encoder with one impulse signal per count direction	Yes
Encoder signals, absolute encoder (SSI)	
• Input signal	to RS-422
• Telegram length, parameterizable	10 ... 40 bit
• Clock frequency, max.	2 MHz; 125 kHz, 250 kHz, 500 kHz, 1 MHz, 1.5 MHz or 2 MHz
• Binary code	Yes
• Gray code	Yes
• Cable length, shielded, max.	320 m; Cable length, RS-422 SSI absolute encoders, Siemens type 6FX2001-5, 24 V supply: 125 kHz, 320 meters shielded, max.; 250 kHz, 160 meters shielded, max.; 500 kHz, 60 meters shielded, max.; 1 MHz, 20 meters shielded, max.; 1.5 MHz, 10 meters shielded, max.; 2 MHz, 8 meters shielded, max.
• Parity bit, parameterizable	Yes
• Monoflop time	16, 32, 48, 64 μs & automatic
• Multiturn	Yes
• Singleturn	Yes
Interface types	
• TTL 5 V	Yes; push-pull encoders only
• RS 422	Yes
Interrupts/diagnostics/status information	
Substitute values connectable	Yes; Parameterizable
Alarms	
• Diagnostic alarm	Yes
• Hardware interrupt	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• A/B transition error at incremental encoder	Yes
• Telegram error at SSI encoder	Yes
• Group error	Yes

Technical specifications

Article number	6ES7138-6BA01-0BA0 ET 200SP, TM Posinput 1
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red DIAG LED
• Status indicator forward counting (green)	Yes
• Status indicator backward counting (green)	Yes
Integrated Functions	
Counter	Yes
• Number of counters	1
• Counting frequency, max.	4 MHz; with quadruple evaluation
Fast mode	Yes
Counting functions	
• Can be used with TO High_Speed_Counter	Yes; only for pulse and incremental encoders
• Continuous counting	Yes
• Counter response parameterizable	Yes
• Hardware gate via digital input	Yes
• Software gate	Yes
• Event-controlled stop	Yes
• Synchronization via digital input	Yes
• Counting range, parameterizable	Yes
Comparator	
- Number of comparators	2
- Direction dependency	Yes
- Can be changed from user program	Yes
Position detection	
• Incremental acquisition	Yes
• Absolute acquisition	Yes
• Suitable for S7-1500 Motion Control	Yes
Measuring functions	
• Measuring time, parameterizable	Yes
• Dynamic measurement period adjustment	Yes
• Number of thresholds, parameterizable	2
Measuring range	
- Frequency measurement, min.	0.04 Hz
- Frequency measurement, max.	4 MHz
- Cycle duration measurement, min.	0.25 µs
- Cycle duration measurement, max.	25 s
Accuracy	
- Frequency measurement	100 ppm; depending on measuring interval and signal evaluation
- Cycle duration measurement	100 ppm; depending on measuring interval and signal evaluation
- Velocity measurement	100 ppm; depending on measuring interval and signal evaluation

Article number	6ES7138-6BA01-0BA0 ET 200SP, TM Posinput 1
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
Suitable for safety functions	No
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C; Observe derating
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C; Observe derating
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Decentralized operation	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	Yes
to standard PROFINET controller	Yes
Dimensions	
Width	15 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	45 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > TM Timer DIDQ 10x24V time-based IO module

Overview



- 4 digital inputs, 6 digital outputs
- Inputs for detecting the input edges with μs accuracy
- Outputs for outputting the switching signals with μs accuracy
- 32x oversampling
- PWM output
- Counter function
- Outputs can be switched between 0.5 A standard and especially fast 0.1 A high-speed mode

Ordering data

TM Timer DIDQ 10x24V time-based IO module

4 time-controlled inputs,
6 time-controlled outputs

Article No.

6ES7138-6CG00-0BA0

Suitable BaseUnits

BU15-P16+A10+2D

BU type A0; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0DA0
6ES7193-6BP20-2DA0

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP00-0DA0
6ES7193-6BP00-2DA0

BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0BA0
6ES7193-6BP20-2BA0

Article No.

BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP00-0BA0
6ES7193-6BP00-2BA0

Accessories

Equipment labeling plate

10 sheets of 16 labels

6ES7193-6LF30-0AW0

Labeling strips

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AA0

500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AG0

1000 labeling strips DIN A4, light gray, card, for inscription with laser printer

6ES7193-6LA10-0AA0

1000 labeling strips DIN A4, yellow, card, for inscription with laser printer

6ES7193-6LA10-0AG0

BU cover

For covering empty slots (gaps); 5 units

- 15 mm wide
- 20 mm wide

6ES7133-6CV15-1AM0
6ES7133-6CV20-1AM0

Shield connection

5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding

6ES7193-6SC20-1AM0

10

Ordering data	Article No.	Article No.
Color-coded labels <ul style="list-style-type: none"> Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units 	6ES7193-6CP71-2AA0 6ES7193-6CP72-2AA0 6ES7193-6CP73-2AA0	Mechanical coding elements For automatic coding of I/O modules; spare part. 20 units Type A Type B Type C Type D
		6ES7193-6KA00-3AA0 6ES7193-6KB00-3AA0 6ES7193-6KC00-3AA0 6ES7193-6KD00-3AA0

Technical specifications

Article number	6ES7138-6CG00-0BA0	Article number	6ES7138-6CG00-0BA0
	ET 200SP, TM Timer DIDQ 10x24V		ET 200SP, TM Timer DIDQ 10x24V
General information		Input voltage	
Product type designation	TM Timer DIDQ 10x24V	<ul style="list-style-type: none"> Type of input voltage Rated value (DC) for signal "0" for signal "1" permissible voltage at input, min. permissible voltage at input, max. 	DC 24 V -5 ... +5 V +11 to +30V -30 V; -5 V continuous, -30 V brief reverse polarity protection 30 V
Product function		Input current	
<ul style="list-style-type: none"> I&M data Isochronous mode 	Yes; I&M 0 Yes	<ul style="list-style-type: none"> for signal "1", typ. 	2.5 mA
Engineering with		Input delay (for rated value of input voltage)	
<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/integrated from version STEP 7 configurable/integrated from version 	V13 Update 3 V5.5 SP3 / -	<ul style="list-style-type: none"> Minimum pulse width for program reactions 	3 µs for parameterization "none"
Supply voltage		for standard inputs	
Rated value (DC)	24 V	<ul style="list-style-type: none"> parameterizable at "0" to "1", min. at "1" to "0", min. 	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 ms 4 µs 4 µs
Load voltage L+		Digital outputs	
<ul style="list-style-type: none"> Rated value (DC) Reverse polarity protection 	24 V Yes; against destruction	Type of digital output Number of digital outputs Digital outputs, parameterizable Short-circuit protection Limitation of inductive shutdown voltage to	Transistor 6 Yes Yes; electronic/thermal -0.8 V
Encoder supply		Digital output functions, parameterizable	
Number of outputs	1	<ul style="list-style-type: none"> Digital output with time stamp - Number, max. PWM output - Number, max. Digital output with oversampling - Number, max. 	Yes 6 Yes 6 Yes 6
24 V encoder supply		Switching capacity of the outputs	
<ul style="list-style-type: none"> 24 V Short-circuit protection Output current, max. 	Yes; L+ (-0.8 V) Yes 500 mA; Observe derating	<ul style="list-style-type: none"> with resistive load, max. on lamp load, max. 	0.5 A; 0.1 A with High Speed output 5 W; 1 W with High Speed output
Digital inputs		Load resistance range	
Number of digital inputs Digital inputs, parameterizable Input characteristic curve in accordance with IEC 61131, type 3	4 Yes Yes	<ul style="list-style-type: none"> lower limit upper limit 	48 Ω; 240 ohm with High Speed output 12 kΩ
Digital input functions, parameterizable			
<ul style="list-style-type: none"> Digital input with time stamp - Number, max. Counter - Number, max. Counter for incremental encoder - Number, max. Digital input with oversampling - Number, max. HW enable for digital input - Number, max. HW enable for digital output - Number, max. 	Yes 4 Yes 3 Yes 1 Yes 4 Yes 1 Yes 3		

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Technology modules > TM Timer DIDQ 10x24V time-based IO module****Technical specifications**

Article number	6ES7138-6CG00-0BA0 ET 200SP, TM Timer DIDQ 10x24V
Output voltage	
• Type of output voltage	DC
• for signal "0", max.	1 V; With High Speed output
• for signal "1", min.	23.2 V; L+ (-0.8 V)
Output current	
• for signal "1" rated value	0.5 A; 0.1 A with High Speed output, observe derating
• for signal "0" residual current, max.	0.5 mA
Output delay with resistive load	
• "0" to "1", max.	1 µs; With High Speed output, 5 µs with Standard output
• "1" to "0", max.	1 µs; With High Speed output, 6 µs with Standard output
Switching frequency	
• with resistive load, max.	10 kHz
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per module, max.	3.5 A; Observe derating
Encoder	
Connectable encoders	
• Incremental encoder (asymmetrical)	Yes
• 24 V initiator	Yes
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA
Encoder signals, incremental encoder (asymmetrical)	
• Input voltage	24 V
• Input frequency, max.	50 kHz
• Counting frequency, max.	200 kHz; with quadruple evaluation
• Cable length, shielded, max.	600 m; Depending on input frequency, encoder and cable quality; max. 200 m at 50 kHz
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• pulse encoder	Yes
Interface types	
• Input characteristic curve in accordance with IEC 61131, type 3	Yes
Isochronous mode	
Bus cycle time (TDP), min.	375 µs

Article number	6ES7138-6CG00-0BA0 ET 200SP, TM Timer DIDQ 10x24V
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes
• for module diagnostics	Yes; green/red DIAG LED
Integrated Functions	
Counter	Yes
• Number of counters	3
• Counting frequency, max.	200 kHz; with quadruple evaluation
Counting functions	
• Continuous counting	Yes
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
Suitable for safety functions	No
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C; Observe derating
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C; Observe derating
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
Decentralized operation	
to SIMATIC S7-1500	Yes
Dimensions	
Width	15 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	45 g

Overview



2-channel pulse output module for ET 200SP

- Operating modes:
 - Single pulse with defined length
 - Pulse chain with defined number of pulses
 - Pulse width modulation (with flexible ON period, optional current control and dither function)
 - PWM signal for controlling a DC motor
 - ON and OFF delay; rising and falling edge can be delayed separately to the microsecond
 - Frequency output with defined output frequency
- Hardware:
 - 2 channels 24 V, 2 A output current
 - Parallel switching for enhanced performance on 4 A output current
 - Switching frequencies to 10 kHz; at reduced output current to 0.1 A up to 100 kHz
 - Push-pull output driver for especially steep edges at the outputs
 - Polarity change in DC motor operation for direction reversal
 - 1 high-speed 24 V digital input per channel with parameterizable input delay from 4 μ s
- Channel functions:
 - HW enable; start of signal output with the onboard digital input
 - Parameterizable ON delay; for precise deceleration between the HW enable and the start of output
 - Current measurement in the operating modes pulse-width modulation and pulse chain; enables control of the output current mean value over a period. This allows you to compensate for the effect of temperature on the actuator resistance.
 - Cyclic control of the respective main setpoint from the PLC in every operating mode; other values can be modified flexibly from the user program.
- Supported system functions:
 - Isochronous mode; enables precision-timed connection of the setpoint output to a higher-level controller
 - Firmware update
 - Identification data I&M

Ordering data

Article No.

TM Pulse 2x24V pulse output module

PWM and pulse output, 2 channels of 2 A for proportional valves and DC motors

6ES7138-6DB00-0BB1

Suitable BaseUnits**BU20-P12+A0+4B**

BU type B1; BaseUnit (dark); without AUX terminals; for continuing the load group

6ES7193-6BP20-0BB1

Accessories**Equipment labeling plate**

10 sheets of 16 labels

6ES7193-6LF30-0AW0

Labeling strips

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AA0

500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AG0

1 000 labeling strips DIN A4, light gray, card, for inscription with laser printer

6ES7193-6LA10-0AA0

1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer

6ES7193-6LA10-0AG0

BU cover

For covering empty slots (gaps); 5 units

- 15 mm wide
- 20 mm wide

6ES7133-6CV15-1AM0

6ES7133-6CV20-1AM0

Mechanical coding elements

For automatic coding of I/O modules; spare part. 20 units

Type A

6ES7193-6KA00-3AA0

Type B

6ES7193-6KB00-3AA0

Type C

6ES7193-6KC00-3AA0

Type D

6ES7193-6KD00-3AA0

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > TM Pulse 2x24V pulse output module

Technical specifications

Article number	6ES7138-6DB00-0BB1 ET 200SP, TM Pulse 2x24V
General information	
Product type designation	TM Pulse 2x24 V
Product function	
• I&M data	Yes; I&M 0
• Isochronous mode	Yes
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V13 SP1 + HSP
• STEP 7 configurable/ integrated from version	V5.5 SP4 and higher
• PROFIBUS from GSD version/ GSD revision	GSD Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.31
Supply voltage	
Rated value (DC)	24 V
Load voltage L+	
• Rated value (DC)	24 V
• Short-circuit protection	Yes
• Reverse polarity protection	Yes; against destruction
Encoder supply	
Number of outputs	2; A common 24V encoder supply for both channels
24 V encoder supply	
• 24 V	Yes; L+ (-0.8 V)
• Short-circuit protection	Yes; per module, electronic
• Output current, max.	300 mA
Digital inputs	
Number of digital inputs	2; 1 per channel
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Digital input functions, parameterizable	
• Freely usable digital input	Yes
• HW enable for digital output	Yes
Input voltage	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
Input current	
• for signal "1", typ.	2.5 mA
Input delay (for rated value of input voltage) for standard inputs	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
- at "0" to "1", min.	4 µs; for parameterization "none"
- at "1" to "0", min.	4 µs; for parameterization "none"

Article number	6ES7138-6DB00-0BB1 ET 200SP, TM Pulse 2x24V
Digital outputs	
Type of digital output	P- and M-switching
Number of digital outputs	2; 1 per channel
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Limitation of inductive shutdown voltage to	-0.8 V
Controlling a digital input	Yes
Digital output functions, parameterizable	
• Freely usable digital output	Yes
• PWM output	Yes
- Number, max.	2; 1 per channel
- Cycle duration, parameterizable	Yes; Max. 85 s
• Connection of a proportional valve	Yes
• Dithering	Yes
• Current measurement	Yes
• Current control	Yes
• Connection of a DC motor	Yes
• ON-delay	Yes
• OFF-delay	Yes
• Frequency output	Yes
• Pulse train	Yes
• Pulse output	Yes
Switching capacity of the outputs	
• with resistive load, max.	2 A
• on lamp load, max.	10 W; 1 W with High Speed output
Load resistance range	
• lower limit	12 Ω; 240 ohm with High Speed output
• upper limit	12 kΩ
Output voltage	
• Type of output voltage	DC
• for signal "0", max.	1 V
• for signal "1", min.	23.2 V; L+ (-0.8 V)
Output current	
• for signal "1" rated value	2 A; 0.1 A with High Speed output, observe derating
Output delay with resistive load	
• "0" to "1", typ.	0 µs; With High Speed output, 4.5 µs with Standard output
• "0" to "1", max.	0.8 µs; With High Speed output, 9 µs with Standard output
• "1" to "0", typ.	0 µs; With High Speed output, 4.5 µs with Standard output
• "1" to "0", max.	0.8 µs; With High Speed output, 9 µs with Standard output
Parallel switching of two outputs	
• for uprating	Yes

Technical specifications

Article number	6ES7138-6DB00-0BB1 ET 200SP, TM Pulse 2x24V
Switching frequency	
• with resistive load, max.	100 kHz; With High Speed output, 10 kHz with standard output
• with inductive load, max.	100 kHz; With High Speed output, 10 kHz with standard output
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per channel, max.	2 A
• Current per group, max.	4 A
• Current per module, max.	4 A
Isochronous mode	
Bus cycle time (TDP), min.	250 µs; with 1 channel configuration, 375 µs with 2 channel configuration
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Substitute values connectable	Yes; Parameterizable
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes
• for module diagnostics	Yes; green/red DIAG LED
Integrated Functions	
Counter	No
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
Suitable for safety functions	No

Article number	6ES7138-6DB00-0BB1 ET 200SP, TM Pulse 2x24V
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C; Observe derating
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C; Observe derating
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
Decentralized operation	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	Yes
to standard PROFINET controller	Yes
Dimensions	
Width	20 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	50 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > TM PTO 2x24V interface module for PTO (Pulse Train Output)

Overview



- 2-channel interface module in ET 200SP for PTO (Pulse Train Output)
- Signal interface for speed and direction: 24 V asymmetrical up to 200 kHz
- 3 signal types can be configured:
 - **PTO pulse/direction:**
The pulse signal defines the speed and distance and the direction signal determines the direction.
 - **PTO count up/ count down:**
A signal defines the pulses in the forward direction and the other signal defines the pulses in the reverse direction.
 - **PTO A/B phase-shifted:**
2 tracks are output, whose signals are phase-shifted by 90°. Based on the signal sequence, the direction, the distance and the speed can be determined. It can be selected whether a full period lasts for 1 increment or whether all 4 edge transitions will be counted.
- The pulses output are also counted internally in the module and signaled to the CPU as the current actual position.
- Supported technology objects:
 - Speed axis (S7-1500, S7-1500T)
 - Positioning axis (S7-1200, S7-1500, S7-1500T)
 - Synchronous axis (S7-1500, S7-1500T)
 - Probe (S7-1500, S7-1500T)

Ordering data

Article No.

TM PTO 2x24V interface module for PTO (Pulse Train Output)

6ES7138-6EB00-0BA0

With two channels for Pulse Train Output PTO, 24 V; 2 DQ PTO, 3 DI 24 V and 1 DQ 24 V per channel

Suitable BaseUnits

BU15-P16+A10+2D

BU type A0; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0DA0
6ES7193-6BP20-2DA0

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP00-0DA0
6ES7193-6BP00-2DA0

BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0BA0
6ES7193-6BP20-2BA0

BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP00-0BA0
6ES7193-6BP00-2BA0

Ordering data	Article No.	Article No.
Accessories		
Equipment labeling plate 10 sheets of 16 labels	6ES7193-6LF30-0AW0	
Labeling strips 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0	
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0	
1000 labeling strips DIN A4, light gray, card, for inscription with laser printer	6ES7193-6LA10-0AA0	
1000 labeling strips DIN A4, yellow, card, for inscription with laser printer	6ES7193-6LA10-0AG0	
BU cover For covering empty slots (gaps); 5 units		
• 15 mm wide	6ES7133-6CV15-1AM0	
• 20 mm wide	6ES7133-6CV20-1AM0	
Shield connection 5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding	6ES7193-6SC20-1AM0	
Color-coded labels		
• Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units	6ES7193-6CP71-2AA0	
• Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units	6ES7193-6CP72-2AA0	
• Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units	6ES7193-6CP73-2AA0	
		Mechanical coding elements
		For automatic coding of I/O modules; spare part. 20 units
		Type A 6ES7193-6KA00-3AA0
		Type B 6ES7193-6KB00-3AA0
		Type C 6ES7193-6KC00-3AA0
		Type D 6ES7193-6KD00-3AA0
		SIMATIC Manual Collection 6ES7998-8XC01-8YE0
		Electronic manuals on DVD, multilingual: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT
		SIMATIC Manual Collection update service for 1 year 6ES7998-8XC01-8YE2
		Current Manual Collection DVD and the three subsequent updates

Technical specifications

Article number	6ES7138-6EB00-0BA0 ET 200SP, TM PTO 2x24V	Article number	6ES7138-6EB00-0BA0 ET 200SP, TM PTO 2x24V
General information		Digital input functions, parameterizable	
Product type designation	TM PTO 2x24V	• Synchronization	Yes
Product function		• Probe	Yes
• I&M data	Yes; I&M0 to I&M3	• Drive ready	Yes
• Isochronous mode	Yes	Input voltage	
Engineering with		• Rated value (DC)	24 V
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V17 with HSP or higher	• for signal "0"	-5 ... +5 V
• PROFIBUS from GSD version/GSD revision	One GSD file each, Revision 3 and 5 and higher	• for signal "1"	+11 to +30V
• PROFINET from GSD version/GSD revision	GSDML V2.35	• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
Supply voltage		• permissible voltage at input, max.	30 V
Rated value (DC)	24 V	Input current	
Load voltage L+		• for signal "1", typ.	2.5 mA
• Rated value (DC)	24 V	Input delay (for rated value of input voltage) for standard inputs	
• Reverse polarity protection	Yes	- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
Digital inputs		- at "0" to "1", min.	6 µs; for parameterization "none"
Number of digital inputs	6; 3 per channel	- at "1" to "0", min.	6 µs; for parameterization "none"
Digital inputs, parameterizable	Yes		
Input characteristic curve in accordance with IEC 61131, type 3	Yes		

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > TM PTO 2x24V interface module for PTO (Pulse Train Output)

Technical specifications

Article number	6ES7138-6EB00-0BA0 ET 200SP, TM PTO 2x24V
Digital outputs	
Number of digital outputs	6; 3 per channel
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Controlling a digital input	Yes
Digital output functions, parameterizable	
• PTO (pulse train output) signal interface	Yes
- 24 V asymmetrical	Yes
• PTO (pulse train output) signal type	
- Pulse and direction	Yes
- Count up, count down	Yes
- Incremental encoder (A, B phase shift)	Yes
- Incremental encoder (A, B phase shift, quadruple)	Yes
Switching capacity of the outputs	
• with resistive load, max.	0.1 A; 0.5 A for CHn.ED
• on lamp load, max.	1 W; 5 W for CHn.ED
Load resistance range	
• lower limit	240 Ω; 48 ohms for CHn.ED
• upper limit	12 kΩ
Output voltage	
• for signal *1*, min.	23.2 V; L+ (-1.3 V), L+ (-0.8 V) for CHn.ED
Output current	
• for signal *1* rated value	0.1 A; 0.5 A for CHn.ED
• for signal *0* residual current, max.	0.5 mA
Switching frequency	
• with resistive load, max.	10 kHz
• with inductive load, max.	0.5 Hz; According to IEC 60947-5-1, DC-13
• on lamp load, max.	10 Hz
• For signal interface 24 V asymmetrical	200 kHz; For 24 V PTO outputs
Total current of the outputs	
• Current per module, max.	1.4 A

Article number	6ES7138-6EB00-0BA0 ET 200SP, TM PTO 2x24V
Interrupts/diagnostics/status information	
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C; Observe derating
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C; Observe derating
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Decentralized operation	
to SIMATIC S7-300	Yes; Via control and feedback interface
to SIMATIC S7-400	Yes; Via control and feedback interface
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	Yes; Via control and feedback interface
to standard PROFINET controller	Yes; Via control and feedback interface
Dimensions	
Width	15 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	45 g

Overview



The TM StepDrive module from Phytron is a high-precision stepper motor control with integrated power output stage for use in the SIMATIC ET 200SP distributed I/O system. It is the 1-step-drive successor model for SIMATIC ET 200S.

The module can be used together with system and I/O components of the ET 200SP distributed I/O system. Operation is possible with the following head modules:

- IM PROFIBUS
- IM PROFINET
- ET 200SP CPU

Corresponding GSD files and an HSP are available.

The ET 200SP TM StepDrive 24...48V/5A is a product of our Phytron GmbH product partner and is only available from the Phytron GmbH company.

Note

Product partners are external companies outside Siemens AG and its associated companies. Information about and descriptions of products made by product partners are non-binding, and are the responsibility of the product partners. These products are manufactured independently and under the responsibility of the respective product partner, and are sold and supplied by it under its terms of business and delivery.

Unless compulsory by law, Siemens assumes no liability or warranty for these products or for connection with these products of the product partners.

Ordering data

Article No.

TM StepDrive stepper motor control

More information and ordering options via Phytron under <http://www.phytron.com/tm-stepdrive>.

High-precision stepper motor control for ET 200SP

Suitable BaseUnits**BU20-P12+A0+4B****6ES7193-6BP20-0BB1**

BU type B1; BaseUnit (dark); without AUX terminals; for continuing the load group

Accessories**Mechanical coding elements**

For automatic coding of I/O modules; spare part. 20 units

Type A

6ES7193-6KA00-3AA0

Type B

6ES7193-6KB00-3AA0

Type C

6ES7193-6KC00-3AA0

Type D

6ES7193-6KD00-3AA0

Technical specifications

- Suitable for bipolar control of 2-phase stepper motors of 4-, (6-) or 8-wire design (in 4-wire system)
- 5 A peak phase current with adjustable current steps
- Supply voltage from 24 to 48 V DC
- Up to 1/256 micro step (physical resolution: approx. 51 200 positions per revolution (0.007°/step)).
- Maximum stepping rate: 250 000 steps/s
- 2 digital inputs for limit and reference switches
- Diagnostics LEDs (overcurrent, overtemperature, traversing task or motor running ...)
- Short-circuit-proof, overload-proof
- Data record transfer for power output stage parameter assignment and diagnostics during runtime
- Booster: Enhanced torque during acceleration or braking
- Adjustable response to CPU stop

More information

You can find more information on the module and associated contact information on the internet under <https://www.phytron.eu/tm-stepdrive>.

Here you will also find the manual, the data sheet, the HSP, a link to the GSD files as well as sample function blocks for SIMATIC.

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > F-TM ServoDrive HF

Overview



SIMATIC MICRO-DRIVE F-TM ServoDrive HF with BaseUnit

In combination with EC Motors and stepper motors up to 280 W the ET 200SP technology module F-TM ServoDrive HF allows positioning and speed control in very confined spaces. The triple overload capability and the support of BiSS-C multi-turn encoders extend the scope of applications of the TM Drive product family.

Engineering in the TIA Portal stands for consistency in a single tool. This facilitates drive dimensioning, commissioning and servicing.

The new drive system consists of:


- The F-TM ServoDrive HF,
- The BaseUnit (U0),
- Motors with gearbox for flexible use and
- Connecting cables.

Further information on the distributed I/O system SIMATIC ET 200SP is available in the ST 70 Catalog and on the internet at <https://www.siemens.com/et200sp>

Characteristics

- PROFIdrive profile via PROFINET
- Hardware-STO (SIL 3)
- Triple overload
- Digital input
- Integrated braking chopper
- Encoder connection for
 - IQ encoders
 - Incremental encoders
 - BiSS-C encoders
 - Hall encoder

10

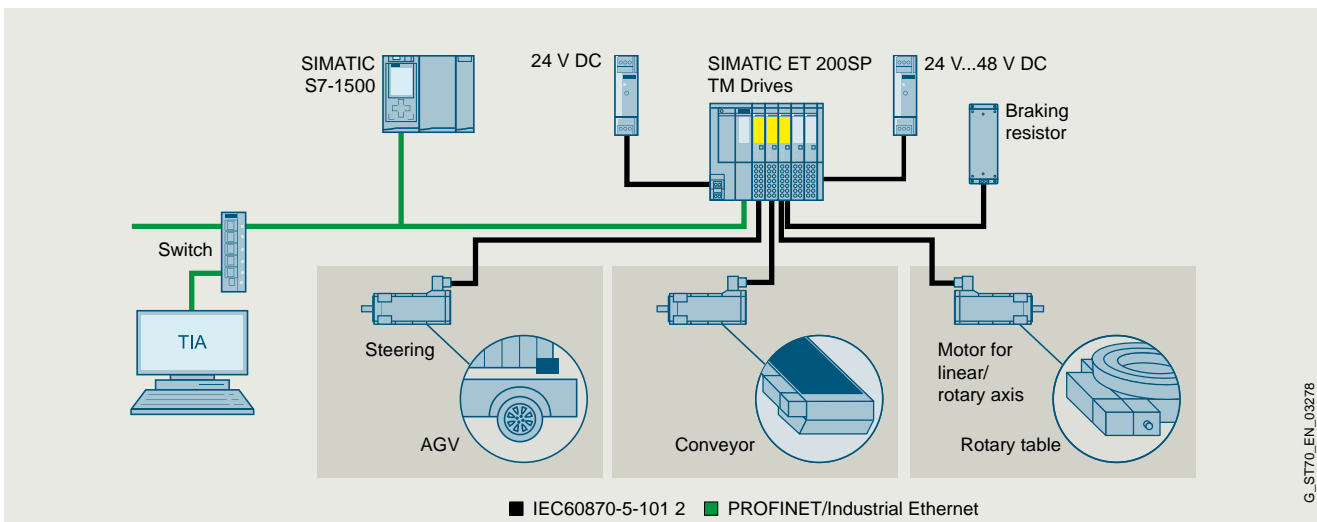

Application example TM Drives

Variant	Power	Peak power	Device width
High Feature	280 W	840 W	20 mm

More information:

<https://www.siemens.com/micro-drive>

Ordering data

F-TM ServoDrive HF for SIMATIC MICRO-DRIVE

- High Feature V1; 24 ... 48 V, 5 A with hardware STO and integrated braking chopper

6BK1136-6AB01-0CU0

Accessories

ET 200SP BaseUnit type U0

- For constructing a new potential group (white)
- For continuing an existing potential group (gray)

6ES7193-6BP00-0DU0
6ES7193-6BP00-0BU0

Shield connection for ET 200SP

Includes 5 shield connections

6ES7193-6SC20-1AM0

Technical specifications

Article number	6BK1136-6AB01-0CU0 F-TM ServoDrive HF
General information	
Product type designation	F-TM ServoDrive HF
Product description	control of EC and stepper motors
Product function	
• I&M data	Yes
• Isochronous mode	No
• Four-quadrant operation	Yes
• Speed control with encoder	Yes
• Speed control without encoder	No
• Safety Functions	Yes; Drive controller with hardwired STO
Protection function	
• Undervoltage protection	Yes
• Overvoltage protection	Yes
• Overload protection	Yes
• Ground-fault protection	No
• Short-circuit protection	Yes
Installation type/mounting	
Type of ventilation	Convection cooling
Supply voltage	
Design of the power supply	24 ... 48 V DC, SELV / PELV
output voltage / header	
Rated value, min.	24 V
Rated value, max.	48 V
Output current	
Current output (rated value)	5 A
Output current, max.	15 A
Output frequency	599 Hz
Encoder supply	
Number of outputs	1
5 V encoder supply	
• 5 V	Yes
• Short-circuit protection	Yes
• Output current, max.	150 mA
Digital inputs	
Number of digital inputs	1; input for message signal
Number of safety inputs	1; For STO, antivalent (2-pin) - 24 V DC
Encoder	
Connectable encoders	
• Incremental encoder (symmetrical)	Yes; up to 500 Hz per channel
• Absolute encoder (SSI)	Yes; BiSS-C
• Hall encoder	Yes
• BiSS-C encoder	Yes
Interrupts/diagnostics/ status information	
Alarms	
• Diagnostic alarm	Yes
• Hardware interrupt	No
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Telegram error at SSI encoder	Yes; BiSS-C
• Group error	Yes
Diagnostics indication LED	
• RUN LED	Yes
• ERROR LED	Yes
Integrated Functions	
Position detection	
• Incremental acquisition	Yes
• Absolute acquisition	Yes
• Suitable for S7-1500 Motion Control	Yes

Article number	6BK1136-6AB01-0CU0 F-TM ServoDrive HF
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Degree and class of protection	
IP degree of protection	IP20
Standards, approvals, certificates	
CE mark	Yes
UKCA mark	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
RoHS conformity	Yes
China RoHS compliance	Yes
Standard for EMC according to EN 61800-3	Yes
Standard for drive acc. to EN 61800-5-1	Yes
Standard for drive acc. to EN 61800-5-2	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	Category 3, performance level d, according to EN ISO 13849-1:2015
• SIL acc. to IEC 61508	3
• SIL according to EN 61800-5-2	3
Ambient conditions	
Pollution degree during storage and transport	2
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation, splash water, icing, salt spray or oil mist permitted.
• horizontal installation, max.	60 °C; No condensation, splash water, icing, salt spray or oil mist permitted. Note the derating data!
• vertical installation, min.	-30 °C; No condensation, splash water, icing, salt spray or oil mist permitted.
• vertical installation, max.	50 °C; No condensation, splash water, icing, salt spray or oil mist permitted. Note the derating data!
Ambient temperature during storage/transportation	
• Storage, min.	-30 °C
• Storage, max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	3 000 m
Cables	
Cable length for motor, shielded, max.	10 m
Dimensions	
Width	20 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	55 g
Other	
Brake design	holding brake control via the process image
Braking chopper	Yes

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > F-TM ServoDrive ST

Overview



SIMATIC MICRO-DRIVE F-TM ServoDrive ST video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6136813197001

In combination with EC motors, the ET 200SP technology module F-TM ServoDrive ST allows positioning and speed control of EC motors up to 280 W in very confined spaces.

Engineering in the TIA Portal stands for consistency in a single tool. This facilitates drive dimensioning, commissioning and servicing.

The new drive system consists of

- The F-TM ServoDrive ST
- The BaseUnit (U0)
- Motors with gearbox for flexible use and
- Connecting cables.


Further information on the distributed I/O system SIMATIC ET 200SP is available in the ST 70 Catalog and on the internet at <http://www.siemens.com/et200sp>

Characteristics

- PROFIdrive profile via PROFINET
- Hardware STO (SIL 2)
- Double overload
- Digital input
- Integrated braking chopper
- Encoder connection for
 - IQ encoders
 - Incremental encoders
 - Hall encoder



10

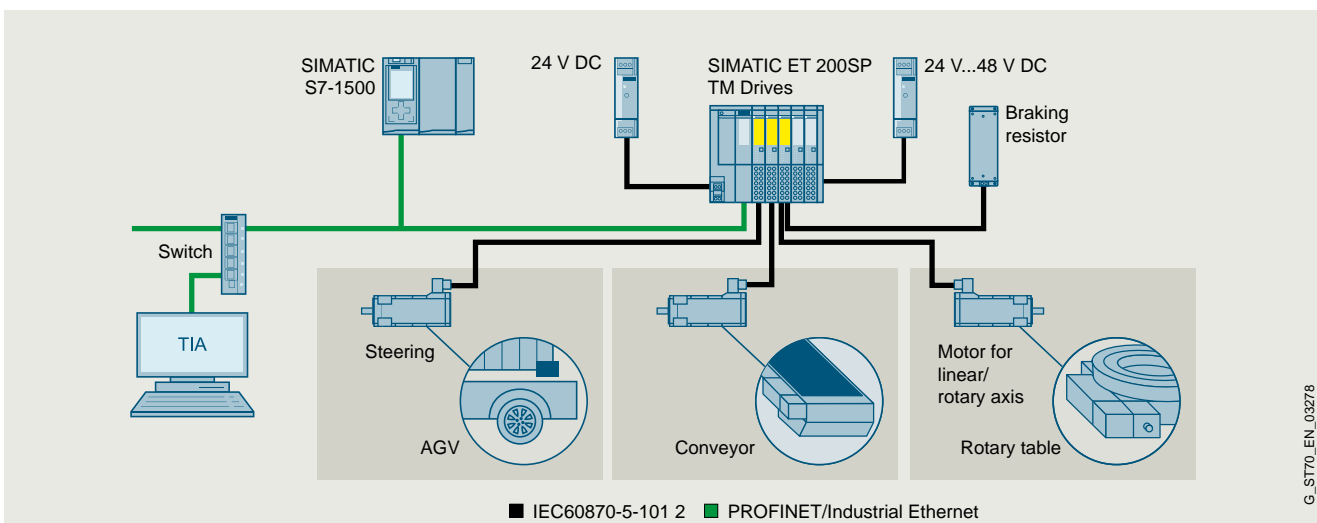

G_ST70_EN_03278

Application example TM Drives

Variant	Power	Device width
Standard	280 W	20 mm

More information:

<https://www.siemens.com/micro-drive>

Ordering data	Article No.	Article No.
F-TM ServoDrive ST for SIMATIC MICRO-DRIVE <ul style="list-style-type: none"> Standard V1; 24 ... 48 V, 5 A with hardware STO and integrated braking chopper 	6BK1136-6AB01-0BU0	Accessories SIMATIC F-TM ServoDrive ST Starter Kit 6BK1637-6AB00-0BU0 Scope of supply: <ul style="list-style-type: none"> SIMATIC MICRO-DRIVE F-TM ServoDrive ST SIMATIC ET 200SP PROFINET IM 155-6PN ST Interface Module SIMATIC ET 200SP BaseUnit type U0 All-in-one plug-in cable CSD_LAI02, length 1.5 m ebm-papst motor ECI42.20 24 V
		ET 200SP BaseUnit type U0 <ul style="list-style-type: none"> For constructing a new potential group (white) 6ES7193-6BP00-0DU0 For continuing an existing potential group (gray) 6ES7193-6BP00-0BU0
		Shield connection for ET 200SP 6ES7193-6SC20-1AM0 Includes 5 shield connections

Technical specifications

Article number	6BK1136-6AB01-0BU0 F-TM ServoDrive ST
General information	
Product type designation	F-TM ServoDrive ST
Product description	Control of EC motors
Product function	
• I&M data	Yes
• Isochronous mode	No
• Four-quadrant operation	Yes
• Speed control with encoder	Yes
• Speed control without encoder	No
• Safety Functions	Yes; Drive controller with hardwired STO
Protection function	
• Undervoltage protection	Yes
• Overvoltage protection	Yes
• Overload protection	Yes
• Ground-fault protection	No
• Short-circuit protection	Yes
Installation type/mounting	
Type of ventilation	Convection cooling
Supply voltage	
Design of the power supply	24 ... 48 V DC, SELV / PELV
output voltage / header	
Rated value, min.	24 V
Rated value, max.	48 V
Output current	
Current output (rated value)	5 A
Output current, max.	10 A
Output frequency	599 Hz
Encoder supply	
Number of outputs	1
5 V encoder supply	
• 5 V	Yes
• Short-circuit protection	Yes
• Output current, max.	150 mA

Article number	6BK1136-6AB01-0BU0 F-TM ServoDrive ST
Digital inputs	
Number of digital inputs	1; input for message signal
Number of safety inputs	1; For STO, antivalent (2-pin) - 24 V DC
Encoder	
Connectable encoders	
• Incremental encoder (symmetrical)	Yes; up to 500 Hz per channel
• Hall encoder	Yes
Interrupts/diagnostics/status information	
Alarms	
• Diagnostic alarm	Yes
• Hardware interrupt	No
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Group error	Yes
Diagnostics indication LED	
• RUN LED	Yes
• ERROR LED	Yes
Integrated Functions	
Position detection	
• Incremental acquisition	Yes
• Absolute acquisition	No
• Suitable for S7-1500 Motion Control	Yes
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Degree and class of protection	
IP degree of protection	IP20

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > F-TM ServoDrive ST

Technical specifications

Article number	6BK1136-6AB01-0BU0 F-TM ServoDrive ST
Standards, approvals, certificates	
CE mark	Yes
UKCA mark	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
RoHS conformity	Yes
China RoHS compliance	Yes
Standard for EMC according to EN 61800-3	Yes
Standard for drive acc. to EN 61800-5-1	Yes
Standard for drive acc. to EN 61800-5-2	Yes
Highest safety class achievable in safety mode	
<ul style="list-style-type: none"> Performance level according to ISO 13849-1 SIL acc. to IEC 61508 SIL according to EN 61800-5-2 	Category 3, performance level d, according to EN ISO 13849-1:2015 2 2

Article number	6BK1136-6AB01-0BU0 F-TM ServoDrive ST
Ambient conditions	
Pollution degree during storage and transport	2
Ambient temperature during operation	
<ul style="list-style-type: none"> horizontal installation, min. horizontal installation, max. vertical installation, min. vertical installation, max. 	-30 °C; No condensation, splash water, icing, salt spray or oil mist permitted. 60 °C; No condensation, splash water, icing, salt spray or oil mist permitted. Note the derating data! -30 °C; No condensation, splash water, icing, salt spray or oil mist permitted. 50 °C; No condensation, splash water, icing, salt spray or oil mist permitted. Note the derating data!
Ambient temperature during storage/transportation	
<ul style="list-style-type: none"> Storage, min. Storage, max. 	-30 °C 70 °C
Altitude during operation relating to sea level	
<ul style="list-style-type: none"> Installation altitude above sea level, max. 	3 000 m
Cables	
Cable length for motor, shielded, max.	10 m
Dimensions	
Width	20 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	55 g
Other	
Brake design	holding brake control via the process image
Braking chopper	Yes

Overview



The ET 200SP technology module F-TM StepDrive ST allows positioning and speed control of stepper motors up to 10 A peak current in very confined spaces.

Engineering in the TIA Portal stands for consistency in a single tool. This facilitates drive dimensioning, commissioning and servicing.


The new drive system consists of

- The F-TM StepDrive ST
- The BaseUnit (U0)

Further information on the distributed I/O system SIMATIC ET 200SP is available in the ST 70 Catalog and on the internet at <http://www.siemens.com/et200sp>

Characteristics

- Bipolar stepper motors
- PROFIdrive profile via PROFINET
- Hardware STO (SIL3)
- Digital input
- Encoderless open-loop controlled operation
- Closed-loop operation with encoder feedback
- Encoder connection for
 - Incremental encoders

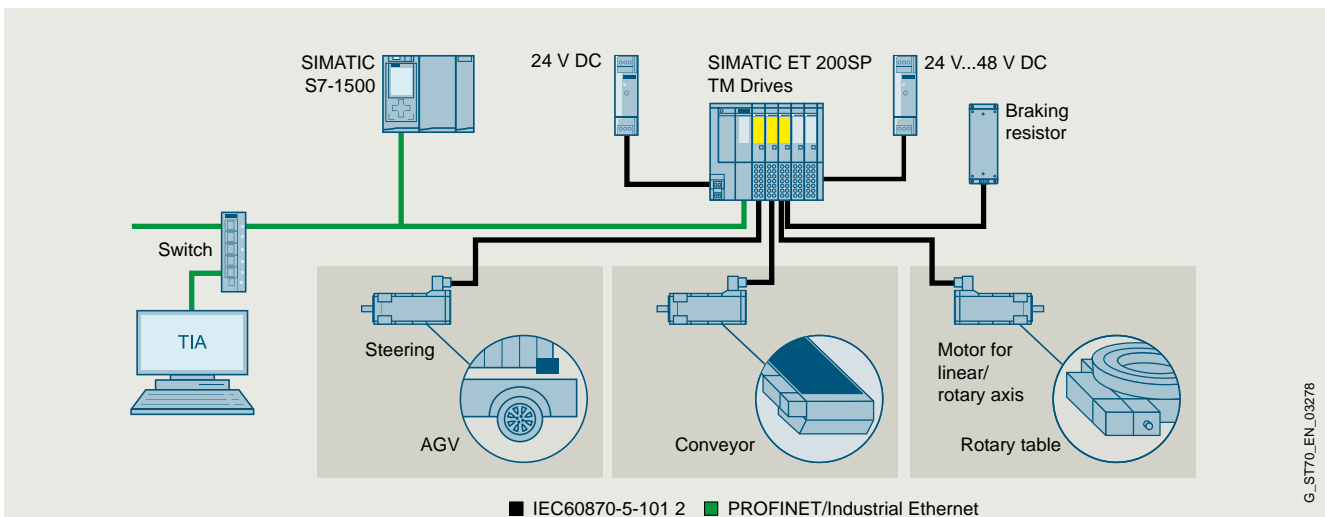

Application example TM Drives

Variant	Power	Device width
Standard	280 W	20 mm

More information:

<https://www.siemens.com/micro-drive>

Ordering data

Article No.

F-TM StepDrive ST for SIMATIC MICRO-DRIVE • Standard V1; 24 ... 48 V, 5 A with hardware STO	6BK1136-6SB01-0BU0
Accessories	
ET 200SP BaseUnit type U0 • For constructing a new potential group (white) • For continuing an existing potential group (gray)	6ES7193-6BP00-0DU0 6ES7193-6BP00-0BU0
Shield connection for ET 200SP Includes 5 shield connections	6ES7193-6SC20-1AM0

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Technology modules > F-TM StepDrive ST****Technical specifications**

Article number	6BK1136-6SB01-0BU0 F-TM StepDrive ST
General information	
Product type designation	F-TM StepDrive ST
Product description	control of stepper motors
Product function	
• I&M data	Yes
• Isochronous mode	No
• Four-quadrant operation	Yes
• Speed control with encoder	Yes
• Speed control without encoder	No
• Safety Functions	Yes; Drive controller with hardwired STO
Protection function	
• Undervoltage protection	Yes
• Overvoltage protection	Yes
• Overload protection	Yes
• Ground-fault protection	No
• Short-circuit protection	Yes
Installation type/mounting	
Type of ventilation	Convection cooling
Supply voltage	
Design of the power supply	24 ... 48 V DC, SELV / PELV
output voltage / header	
Rated value, min.	24 V
Rated value, max.	48 V
Output current	
Current output (rated value)	5 A
Output current, max.	10 A
Output frequency	1 500 Hz
Encoder supply	
Number of outputs	1
5 V encoder supply	
• 5 V	Yes
• Short-circuit protection	Yes
• Output current, max.	150 mA
Digital inputs	
Number of digital inputs	1; input for message signal
Number of safety inputs	1; For STO, antivalent (2-pin) - 24 V DC
Encoder	
Connectable encoders	
• Incremental encoder (symmetrical)	Yes; up to 500 Hz per channel
Interrupts/diagnostics/status information	
Alarms	
• Diagnostic alarm	Yes
• Hardware interrupt	No
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Group error	Yes
Diagnostics indication LED	
• RUN LED	Yes
• ERROR LED	Yes
Integrated Functions	
Position detection	
• Incremental acquisition	Yes
• Absolute acquisition	No
• Suitable for S7-1500 Motion Control	Yes

Article number	6BK1136-6SB01-0BU0 F-TM StepDrive ST
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Degree and class of protection	
IP degree of protection	IP20
Standards, approvals, certificates	
CE mark	Yes
UKCA mark	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
RoHS conformity	Yes
China RoHS compliance	Yes
Standard for EMC according to EN 61800-3	Yes
Standard for drive acc. to EN 61800-5-1	Yes
Standard for drive acc. to EN 61800-5-2	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	Category 3, performance level d, according to EN ISO 13849-1:2015
• SIL acc. to IEC 61508	3
• SIL according to EN 61800-5-2	3
Ambient conditions	
Pollution degree during storage and transport	2
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; No condensation, splash water, icing, salt spray or oil mist permitted.
• horizontal installation, max.	60 °C; No condensation, splash water, icing, salt spray or oil mist permitted. Note the derating data!
• vertical installation, min.	-30 °C; No condensation, splash water, icing, salt spray or oil mist permitted.
• vertical installation, max.	50 °C; No condensation, splash water, icing, salt spray or oil mist permitted. Note the derating data!
Ambient temperature during storage/transportation	
• Storage, min.	-30 °C
• Storage, max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	3 000 m
Cables	
Cable length for motor, shielded, max.	10 m
Dimensions	
Width	20 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	55 g
Other	
Brake design	holding brake control via the process image
Braking chopper	No

Overview

SIPPLUS and SIMATIC Electrical Charging Controller are the key components in infrastructure solutions for the conductive charging of electric vehicles.

They perform the following functions:

- Detection of the charging cable and its permissible current carrying capacity
- Transfer of the maximum charging current from the charging station to the electric vehicle
- Evaluation of the status signals from the electric vehicle:
 - Ready for charging
 - Charging
 - Charging with ventilation
- Cost-optimized, space-saving charging infrastructure solutions due to compact design based on SIMATIC ET 200SP.

ET 200SP TM ECC 2xPWM ST AC module

- Control of charging outputs according to IEC 61851 by parameterizable SIMATIC ET 200SP TM ECC 2xPWM ST charging controller
- Control of load tap-off
- Control of connector lock
- Evaluation of connector lock or load contactor status

ET 200SP TM ECC PL ST DC module

- The SIMATIC ET 200SP TM ECC PL ST charging controller fully controls a DC charging process according to DIN SPEC 70121.
- The following sequences are performed:
 - Session Setup
 - Service Discovery
 - Service and Payment Selection
 - Contract Authentication
 - Charge Parameter Discovery
 - Power Delivery
 - Charging Status
 - Cable Check
 - Pre Charging
 - Current Demand
 - Welding Detection
 - Session Stop

Accessories: Calibration Kit TM ECC CCS2

Expansion kit for calibration of the power line signal strength of an EVSE.

- According to DIN SPEC 70121 / ISO15118 or design guidelines for CCS charging stations Type 2
- Suitable for the SIMATIC ET 200SP TM ECC PL ST technology module

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > SIMATIC ET 200SP ECC charging controllers

Ordering data	Article No.	Article No.
Electrical Charging Controller SIMATIC ET 200SP TM ECC 2xPWM ST Designed for controlling charging outputs according to IEC 61851 and parameterizable, with 2 charging outputs, ambient temperature -30 °C ... 60 °C; 2x control pilot, 2x plug present, 2x DQ switching contact for load contactor as open collector, 2x DI for load contactor feedback or connector lock; 2x ACT for connector lock suitable for BU type BU20-P12+A0+4B and BU20-P12+A4+0B With conformal coating, based on 6FE1242-6TM10-0BB1.	6FE1242-6TM10-0BB1	Technology module SIMATIC ET 200SP TM ECC PL ST Charging controller for the conductive charging of electric vehicles according to DIN SPEC 70121, charging mode 4, ambient temperature -30 °C ... 60 °C; 1x control pilot including Powerline Green Phy, 1x plug present/ proximity pilot, 1x digital out TRIP function as open collector, 1x digital out (DQ P) as open collector, suitable for BU type BU20-P12+A0+4B or BU type BU20-P12+A4+0B
	6AG1242-6TM10-2BB1	
		6FE1242-6TM20-0BB1
		6FE1244-0AD10-0AA0

Technical specifications

Article number	6FE1242-6TM10-0BB1	6AG1242-6TM10-2BB1	6FE1242-6TM20-0BB1
	SIMATIC ET 200SP TM ECC 2xPWM ST	SIPLUS ET 200SP TM ECC 2xPWM ST	SIMATIC ET 200SP TM ECC PL ST
General information			
Product type designation	ECC 2x PWM ST		ECC PL ST
Product description	Technology modules for the conductive AC charging of electric vehicles according to IEC 61851	Communication controller for controlling conductive AC charging according to IEC 61851	Technology module for the conductive charging of electric vehicles according to DIN 70121
usable BaseUnits	BU type B0, B1		
Color code for module-specific color identification plate		CC40	
Number of channels	2; Acc. to IEC 61851-1 Mode 3 and/or SAE J1772	2; According to IEC 61851/SAE J1772	1; Acc. to IEC 61851-1 Mode 4 and DIN SPEC 70121
Product function			
• I&M data	Yes; I&M0 to I&M3		
• Isochronous mode	No		
Engineering with			
• STEP 7 TIA Portal configurable/ integrated from version	V14 SP1		STEP 7 V16 or higher
Installation type/mounting			
Mounting type	standard rail		
Mounting position	Horizontal		Horizontal, vertical
Supply voltage			
Type of supply voltage	DC		
Rated value (DC)	24 V		
Reverse polarity protection	Yes; against destruction		
Load voltage L+			
• Rated value (DC)	24 V		24 V
• Reverse polarity protection			Yes
Input current			
Current consumption, typ.	40 mA		
Current consumption, max.	90 mA		100 mA

Technical specifications

Article number	6FE1242-6TM10-0BB1	6AG1242-6TM10-2BB1	6FE1242-6TM20-0BB1
	SIMATIC ET 200SP TM ECC 2xPWM ST	SIPLUS ET 200SP TM ECC 2xPWM ST	SIMATIC ET 200SP TM ECC PL ST
Digital inputs			
Number of digital inputs	2; 1 per channel		0
Digital inputs, parameterizable	Yes; 12 V / 24 V		No
Digital input functions, parameterizable			
• Freely usable digital input	No; Readback contact contactor / connector lock		
Input voltage			
• Type of input voltage	DC		
• for signal "0"	<0.2 V (nom)		
• for signal "1"	>0.6 V (nom)		
• permissible voltage at input, min.	0 V		
• permissible voltage at input, max.	30 V		
Cable length			
• shielded, max.			10 m
• unshielded, max.	30 m		
Digital outputs			
Type of digital output	Transistor		
Number of digital outputs	2; 1 per channel		2; 1x digital out TRIP function as open collector, 1x digital out (DQ P) as open collector
Current-sinking			Yes
short-circuit proof	Yes		
Short-circuit protection	Yes; electronic/thermal		
Digital output functions, parameterizable			
• PWM output	Yes; According to IEC 61851		Yes; acc. to DIN SPEC 70121 and ISO 15118
- Number, max.	2; 1 per channel		1; 1 per channel
• Connection of a DC motor	Yes; ACT p/n connector locking		No; Only fixed charging cables are permitted for DC charging systems
Switching capacity of the outputs			
• with resistive load, max.	1.3 A		0.6 A; Per digital output
Output voltage			
• Type of output voltage	DC		
• Rated value (DC)	24 V		
Cable length			
• unshielded, max.	30 m; when using a PROFIBUS line	30 m	10 m
Analog outputs			
Number of analog outputs	2; Control pilot acc. to IEC 61851-1 and/or SAE J1772		1
Type of analog output			Control pilot including Powerline Green Phy, acc. to DIN SPEC 70121
Connection of a DC motor	Yes; Motor for connector lock		No
Protocols			
Bus communication	Yes		Yes; Backplane bus
Vehicle communication according to IEC 61851	Yes; MODE 3		Yes; Mode 4
Interrupts/diagnostics/status information			
Alarms			
• Diagnostic alarm	Yes		
Diagnoses			
• Monitoring the supply voltage	No		No; Supply voltage diagnostics
• Wire-break			No
• Short-circuit	Yes		No

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > SIMATIC ET 200SP ECC charging controllers

Technical specifications

Article number	6FE1242-6TM10-0BB1 SIMATIC ET 200SP TM ECC 2xPWM ST	6AG1242-6TM10-2BB1 SIPLUS ET 200SP TM ECC 2xPWM ST	6FE1242-6TM20-0BB1 SIMATIC ET 200SP TM ECC PL ST
Diagnostics indication LED			
• ERROR LED	Yes; red LED		No
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED		
• Channel status display	Yes; green LED		
• for module diagnostics	Yes; green/red DIAG LED		
Potential separation			
Potential separation channels			
• between the channels	No		No; Only one channel is available
• between the channels and backplane bus	Yes		
EMC			
Electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge		
Field-related interference acc. to IEC 61000-4-3	10 V/m (80 ... 1 000 MHz), 3 V/m (1.4 ... 2.0 GHz), 1 V/m (2.0 ... 2.7 GHz)		
Conducted interference due to burst acc. to IEC 61000-4-4	2 kV signal lines		
Conducted interference due to surge acc. to IEC 61000-4-5	On DC supply lines: 0.5 kV symmetrical and asymmetrical		
Conducted interference due to high-frequency radiation acc. to IEC 61000-4-6	10 V (0.15 ... 80 MHz)		
Degree and class of protection			
IP degree of protection	IP20		
Standards, approvals, certificates			
Certificate of suitability	CE / RCM / EAC / UL / KC	CE	CE / RCM / EAC / UL / KC
Ambient conditions			
Ambient temperature during operation			
• min.	-30 °C		-30 °C
• max.	60 °C		60 °C
• horizontal installation, min.	-30 °C	-30 °C; = Tmin	-30 °C
• horizontal installation, max.	60 °C	60 °C; = Tmax	60 °C
• vertical installation, min.	-30 °C	-30 °C; = Tmin	-30 °C
• vertical installation, max.	50 °C	50 °C; = Tmax	50 °C
Ambient temperature during storage/transportation			
• Storage, min.	-40 °C		
• Storage, max.	70 °C		
• Transportation, min.	-40 °C		
• Transportation, max.	70 °C		
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	2 000 m	5 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity			
• Operation, min.	5 %		5 %
• Operation, max.	95 %; no condensation		95 %; no condensation
• With condensation, tested in accordance with IEC 60068-2-38, max.		100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	
Vibrations			
• Vibration resistance during operation acc. to IEC 60068-2-6	10 ... 58 Hz / 0.075 mm, 58 ... 150 Hz / 1 g		
Shock testing			
• Shock resistance acc. to IEC 60068-2-27	15 g / 11 ms		

Technical specifications

Article number	6FE1242-6TM10-0BB1 SIMATIC ET 200SP TM ECC 2xPWM ST	6AG1242-6TM10-2BB1 SIPLUS ET 200SP TM ECC 2xPWM ST	6FE1242-6TM20-0BB1 SIMATIC ET 200SP TM ECC PL ST
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants		Yes; Incl. diesel and oil droplets in the air	
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3		Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	
- to chemically active substances according to EN 60721-3-3		Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	
- to mechanically active substances according to EN 60721-3-3		Yes; Class 3S4 incl. sand, dust, *	
- Against mechanical environmental conditions acc. to EN 60721-3-3		Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Usage in industrial process technology			
- Against chemically active substances acc. to EN 60654-4		Yes; Class 3 (excluding trichlorethylene)	
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04		Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
Remark			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04		* The supplied plug covers must remain in place over the unused interfaces during operation!	
Conformal coating			
• Coatings for printed circuit board assemblies acc. to EN 61086		Yes; Class 2 for high reliability	
• Protection against fouling acc. to EN 60664-3		Yes; Type 1 protection	
• Military testing according to MIL-I-46058C, Amendment 7		Yes; Discoloration of coating possible during service life	
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A		Yes; Conformal coating, Class A	
Decentralized operation			
to SIMATIC S7-1500	Yes		
Dimensions			
Width	20 mm		
Height	73 mm		
Depth	58 mm		
Weights			
Weight, approx.	32 g		51 g
Other			
Note:			The Tone Mask of the Green Phy defined in DIN 70121 for North America applies

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > SIMATIC ET 200SP ECC charging controllers

Technical specifications

Article number	6FE1244-0AD10-0AA0 SIMATIC Calibration Kit TM ECC CCS2
General information	
Product type designation	Calibration kit TM ECC CCS2
Product description	Expansion kit for adjusting the powerline signal strength of an EVSE in accordance with DIN SPEC 70121/ISO 15118 or design guidelines for CCS charging stations
Installation type/mounting	
Mounting type	standard rail
Supply voltage	
Type of supply voltage	DC
Rated value (DC)	24 V; Optional: external infeed
Reverse polarity protection	Yes
Load voltage L+	
• Short-circuit protection	Yes
• Reverse polarity protection	Yes
Input current	
Current consumption, max.	0.5 A
Interfaces	
Number of other interfaces	2; 1x CCS (Combined Charging System) acc. to IEC 62196 1x power supply DC adapter (5.50 mm x 2.10 mm x 9.5 mm) 24 V
Protocols	
Vehicle communication according to IEC 61851	Yes; Mode 4
EMC	
Electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge
Field-related interference acc. to IEC 61000-4-3	10 V/m (80 ... 1 000 MHz), 3 V/m (1.4 ... 2.0 GHz), 1 V/m (2.0 ... 2.7 GHz)
Degree and class of protection	
IP degree of protection	IP30
Standards, approvals, certificates	
Certificate of suitability	CE

Article number	6FE1244-0AD10-0AA0 SIMATIC Calibration Kit TM ECC CCS2
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	40 °C
Ambient temperature during storage/transportation	
• Storage, min.	-30 °C
• Storage, max.	85 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
• Ambient air temperature-barometric pressure-altitude	Up to max. 2 000 m
Relative humidity	
• Operation, min.	5 %
• Operation, max.	95 %
Mechanics/material	
Material of housing	Plastic: polycarbonate, abbreviation: PC- GF 10 FR
Dimensions	
Width	250 mm
Height	122 mm
Depth	160 mm
Weights	
Weight, approx.	1.5 kg

Overview



SIWAREX WP321 is a versatile and flexible weigh beam for the seamless integration of a static scale into the SIMATIC automation environment.

The weighing electronics are integrated within the SIMATIC ET 200SP system series and use all the features of a modern automation system, such as integrated communication, operator control and monitoring, diagnostics units and the project planning tools in the TIA portal, SIMATIC Step 7, WinCC flexible and PCS 7.

In conjunction with the digital SIWAREX DB junction box, up to four connected load cells can be diagnosed separately. This enables the weigh beam module to detect the failure of individual load cells and, in the event of an error, to provide relevant load cell data such as order number and location designation directly in the CPU or at the HMI. This increases the operational reliability of the scale, reduces downtimes, makes commissioning easier and simplifies servicing.

All messages and process values of the individual load cell channels are of course available in the SIMATIC controller.

Ordering data

Article No.

TM SIWAREX WP321 weighing electronics Single-channel, for platform scales or hopper scales with analog load cells (1 ... 4 mV/V), 1 x LC, 1 x RS 485	7MH4138-6AA00-0BA0
SIWAREX WP321 Equipment Manual Available in a range of languages Free download on the Internet at: http://www.siemens.com/weighing/documentation	
SIWAREX WP321 "Ready-for-use" TIA Portal and SIMATIC Manager sample configuration Free download on the Internet at: http://www.siemens.com/weighing/documentation	
SIWATOOL V4 & V7 Service and commissioning software for SIWAREX weighing modules	7MH4900-1AK01
SIWAREX PCS 7 AddOn Library for PCS7 V8.x and V9.0 Supports PROFINET APL faceplates and function blocks for: <ul style="list-style-type: none"> • SIWAREX U • SIWAREX FTA • SIWAREX FTC_B (belt scale) • SIWAREX WP321 Classic faceplate and function block for: <ul style="list-style-type: none"> • SIWAREX FTC_L (Loss-in-weight) 	7MH4900-1AK61
Accessories (mandatory requirement)	
BaseUnit (Type A0 – one BaseUnit required for each WP321) For opening a new potential group <ul style="list-style-type: none"> • BU15P-16+A0+2D • BU15P-16+A10+2D For continuing the potential group <ul style="list-style-type: none"> • BU15P-16+A0+2B • BU15P-16+A10+2B 	6ES7193-6BP00-0DA0 6ES7193-6BP20-0DA0 6ES7193-6BP00-0BA0 6ES7193-6BP20-0BA0
Shield connection for BaseUnit (5 units / for 5 scales) For laying load cell cable	6ES7193-6SC20-1AM0

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Technology modules > TM SIWAREX WP321 ST weighing electronics**

Ordering data	Article No.	Article No.
Accessories (optional)		
SIWAREX EB extension box For extending sensor cables	7MH4710-2AA	
SIWAREX JB junction box, aluminum enclosure For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes	7MH5001-0AA20	
SIWAREX JB junction box, stainless steel enclosure For connecting up to 4 load cells in parallel	7MH5001-0AA00	
SIWAREX JB junction box, stainless steel enclosure (ATEX) For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate)	7MH5001-0AA01	
SIWAREX DB digital junction box For enhanced diagnostic and monitoring options in conjunction with SIWAREX WP electronics Enclosure made of: • Aluminum • Stainless steel	7MH5001-0AD20 7MH5001-0AD01	
SIWAREX IS Ex interface For intrinsically-safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately. Approved for use in the EU • Short-circuit current < 199 mA DC • Short-circuit current < 137 mA DC	7MH4710-5BA 7MH4710-5CA	
		Cable (optional)
		Cable Li2Y 1 × 2 × 0.75 ST + 2 × (2 × 0.34 ST) – CY For connecting SIWAREX electronic to junction box (JB), extension box (EB), digital junction box (DB), Ex interface (IS) or between two extension boxes. For permanent installation. Occasional bending is possible. External diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F) Sold by the meter. • Sheath color: orange • Sheath color (for hazardous atmospheres): blue
		7MH4702-8AG 7MH4702-8AF
		RS 485/USB interface converter Commercially available interface converter with FTDI chip, e.g. USB-Nano from CTI https://www.cti-shop.com/en/rs485-converter/usb-nano-485
		Remote display The Siebert S102 and S302 remote digital displays can be directly connected to the SIWAREX WP321 via an RS 485 interface. Siebert Industrieelektronik GmbH PO Box 1180D-65565 Eppelborn, Germany Tel: +49 6806/980-9 Fax: +49 6806/980-999 https://www.siebert-group.com/en/ Detailed information is available from the manufacturer.

Technical specifications

SIWAREX WP321	
Integration in automation systems	
SIMATIC S7-300, S7-400, S7-1200 and S7-1500	Via SIMATIC ET 200SP interface module (PROFIBUS or PROFINET)
Other manufacturers (with restrictions)	Via SIMATIC ET 200SP interface module (PROFIBUS or PROFINET)
Communication interfaces	<ul style="list-style-type: none"> • SIMATIC ET 200SP backplane bus • RS 485 (SIWATOOL, Siebert remote display)
Commissioning options	<ul style="list-style-type: none"> • Using SIWATOOL V7 • Using function block in SIMATIC CPU / Touch Panel
Measuring accuracy	
According to DIN 1319-1 of full-scale value at 20 °C ± 10 K (68 °F ± 10 K)	0.05%
Internal resolution	± 2 million parts
Measuring frequency	100 / 120 / 600 Hz
Digital filter	Variable adjustable low-pass and average filter
Typical applications	<ul style="list-style-type: none"> • Non-automatic weighing instruments • Force measurements • Fill-level monitoring • Belt tension monitors
Weighing functions	
Weight values	<ul style="list-style-type: none"> • Gross • Net • Tare
Limit values	<ul style="list-style-type: none"> • 2 × min/max • Empty
Zeroing	Via command by controller or HMI
Tare	Via command by controller or HMI
External tare specification	Via command by controller or HMI
Calibration commands	Via command by controller or HMI

SIWAREX WP321	
Load cells	Full-bridge strain gauges in 4-wire or 6-wire system
Load cell powering	
Supply voltage (value applies at sensor, cable-related voltage drops of up to 5 V are controlled)	4.85 V DC ±2%
Permissible load resistance	
<ul style="list-style-type: none"> • R_{Lmin} • R_{Lmax} 	> 40 Ω < 4 100 Ω
With SIWAREX IS Ex interface	
<ul style="list-style-type: none"> • R_{Lmin} • R_{Lmax} 	> 50 Ω < 4 100 Ω
Load cell characteristic	1 ... 4 mV/V
Permissible range of measuring signal (at greatest set characteristic value)	-21.3 ... +21.3 mV
Max. distance of load cells	1000 m (459.32 ft)
Connection to load cells in Ex zone 1	Optionally via SIWAREX IS Ex interface (compatibility of the load cells must be checked)
Approvals/certificates	<ul style="list-style-type: none"> • ATEX Zone 2 • UL • FM • EAC • KCC • IECEx • RCM
Auxiliary power supply	
Rated voltage	24 V DC
Max. power consumption	Typ. 0.1 A @ 24 V DC (0.2 A max.)
Max. power consumption SIMATIC Bus	30 mA
IP degree of protection to EN 60529; IEC 60529	IP20
Climatic requirements	
$T_{min(IND)}$... $T_{max(IND)}$ (operating temperature)	
<ul style="list-style-type: none"> • Vertical installation in SIMATIC S7 ¹⁾ • Horizontal installation in SIMATIC S7 ¹⁾ 	-25 ... +50 °C (-13 ... 122 °F) -25 ... +60 °C (-13 ... 140 °F)
EMC requirements	According to IEC 61000-6-2, IEC 61000-6-4, OIML R76-1
Dimensions (width)	15 mm (0.6 inch)

¹⁾ The S7 standard modules may not be operated at temperatures below 0 °C (32 °F). For operating conditions below 0 °C (32 °F), SIMATIC modules from the SIPLUS series must be used.

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > TM SIWAREX WP341 HF weighing electronics

Overview



The SIWAREX WP341 is a compact, precise weighing electronics in the SIMATIC ET 200SP format.

With a width of just 20 mm it is one of the slimmest weighing electronics on the market, yet its firmware includes the functionalities of a continuous belt weighing electronics. Optionally the WP341 can be used for operation of solids flowmeters.

The load cells and the speed sensor are directly connected to the ET 200SP BaseUnit (type U0) and therefore the complete system is directly integrated into the automation system.

Ordering data

Article No.

TM SIWAREX WP341 weighing electronics SIMATIC ET 200SP, TM SIWAREX WP341 HF, weighing electronics for continuous belt weighing applications	7MH4138-6CA00-0CU0
SIWAREX WP341 Equipment Manual Available in a range of languages Free download on the Internet at: http://www.siemens.com/weighing/documentation	
SIWAREX WP341 "Getting Started" sample project Sample software shows beginners how to program the scales in TIA Portal V16 Free download on the Internet at: https://support.industry.siemens.com/cs/products?dtp=Download&mf=ps&pnid=17781&lc=en-WW	
ET 200SP BaseUnit type U0 <ul style="list-style-type: none"> For opening a new potential group (white) For continuing an existing potential group (gray) 	6ES7193-6BP00-0DU0 6ES7193-6BP00-0BU0
Shield connection for BaseUnit (5 units/for 5 scales) For laying load cell cable	6ES7193-6SC20-1AM0
Accessories	
SIWAREX EB extension box For extending sensor cables	7MH4710-2AA
SIWAREX JB junction box, aluminum enclosure For connecting up to 4 load cells in parallel, and for connecting multiple terminal boxes.	7MH5001-0AA20
SIWAREX JB junction box, stainless steel enclosure For connecting up to 4 load cells in parallel.	7MH5001-0AA00
SIWAREX JB junction box, stainless steel enclosure (ATEX) For parallel connection of up to 4 load cells (for zone allocation, see manual or prototype test certificate).	7MH5001-0AA01

Ordering data	Article No.	Article No.
SIWAREX DB digital junction box For enhanced diagnostic and monitoring options in conjunction with SIWAREX WP electronics. Enclosure made of: <ul style="list-style-type: none"> Aluminum Stainless steel incl. ATEX and IECEx approval II 3 G Ex ec IIC T4 Gc and II 3 D Ex tc IIC T120 °C Dc 	7MH5001-0AD20 7MH5001-0AD01	Cable (optional) Cable Li2Y 1 × 2 × 0.75 ST + 2 × (2 × 0.34 ST) – CY For connecting SIWAREX electronic to junction box (JB), extension box (EB), digital junction box (DB), Ex interface (IS) or between two extension boxes. For permanent installation. Occasional bending is possible. External diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature - 40 ... +80 °C (-40 ... +176 °F) Sold by the meter. <ul style="list-style-type: none"> Sheath color: orange Sheath color (for hazardous atmospheres): blue
SIWAREX IS Ex interface For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX weighing electronics. Compatibility of load cells must be checked separately. <ul style="list-style-type: none"> With short-circuit current < 199 mA DC With short-circuit current < 137 mA DC 	7MH4710-5BA 7MH4710-5CA	

7MH4702-8AG
7MH4702-8AF

Technical specifications

Article number	7MH4138-6CA00-0CU0
General information	
Product type designation	TM SIWAREX WP341 HF
Product function	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	No
• Adjustment of measuring range	Yes; ±0 ... 4 mV/V
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V16
• STEP 7 configurable/integrated from version	- / -
• PROFIBUS from GSD version/GSD revision	GSD as of Revision 5
• PROFINET from GSD version/GSD revision	GSDML V2.34
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
• Short-circuit protection	Yes
• Reverse polarity protection	Yes
Digital inputs	
Number of digital inputs	3
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Input voltage	
• Type of input voltage	24 V DC
• Rated value (DC)	24 V
• for signal "0"	< 5 V DC
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V
• permissible voltage at input, max.	30 V
Input current	
• for signal "1", typ.	1.6 mA
Input delay (for rated value of input voltage)	
for technological functions	
- parameterizable	Yes

Article number	7MH4138-6CA00-0CU0
Digital outputs	
Number of digital outputs	3
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes
Digital output functions, parameterizable	
• Freely usable digital output	Yes
Switching capacity of the outputs	
• with resistive load, max.	0.5 A
Output voltage	
• Type of output voltage	DC
Output delay with resistive load	
• "0" to "1", typ.	20 µs
• "1" to "0", typ.	30 µs
Parallel switching of two outputs	
• for uprating	No
Switching frequency	
• with resistive load, max.	500 Hz
Total current of the outputs	
• Current per channel, max.	0.5 A; the total current of all outputs ≥ 0.6 A, the ambient temperature is reduced by -1 °C per 100 mA
• Current per module, max.	1.5 A; Observe derating
Encoder	
Connection of signal encoders	
• For strain gauges (full bridges) with 4-conductor connection	Yes
• For strain gauges (full bridges) with 6-conductor connection	Yes
• Resistance of full bridge, min.	56 Ω; when using SIWAREX IS 87 ohm for 7MH4710-5BA; 180 ohm when using 7MH4710-5CA
• Resistance of full bridge, max.	4 100 Ω

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > TM SIWAREX WP341 HF weighing electronics

Technical specifications

Article number	7MH4138-6CA00-0CU0
Errors/accuracies	
Linearity error (relative to input range), (+/-)	0.001 %
Error limit according to DIN 1319-1	0.002 %; of full-scale value
Accuracy class	III
Temperature coefficient, zero point	≤ ±0.015 μV/K
Temperature coefficient, span	≤ ±5 ppm/K
1. Interface	
Interface types	
• RS 485	Yes; Terminated internally with 390 Ω / 220 Ω / 390 Ω
2. Interface	
Interface types	
• RJ 45 (Ethernet)	Yes; 10/100 Mbit/s
• Number of ports	1
Protocols	
• IP protocol	Yes; IPv4
• Web server	Yes
Interface types	
RJ 45 (Ethernet)	
• Autonegotiation	Yes
• Autocrossing	Yes
RS 485	
• Transmission rate, max.	115.2 kbit/s
• Cable length, max.	1 000 m; ≤ 115 kbps, shielded cable
Protocols	
Web server	
• HTTP	Yes
• HTTPS	Yes
Interrupts/diagnostics/status information	
Diagnostics function	Yes; Diagnostic alarm
Substitute values connectable	No
Alarms	
• Diagnostic alarm	Yes; Parameterizable
• Hardware interrupt	Yes; Parameterizable
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Group error	Yes; green/red DIAG LED
Diagnostics indication LED	
• ERROR LED	Yes; green/red DIAG LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED

Article number	7MH4138-6CA00-0CU0
Integrated Functions	
Counter	Yes
• Number of counters	1
• Counting frequency, max.	8 kHz
Load cell	
• permissible input signal per verification interval, min.	0.4 μV/e
• Sampling rate	1 024 Hz
• Resolution of input signal	±20 000 000 parts at 0 ... 4 mV/V
• Common mode voltage, min.	2.8 V
• Common mode voltage, max.	7.7 V
• input resistance of signal line, typ.	8 MΩ
• input resistance of sense line, typ.	300 MΩ
• Cable length, max.	500 m; when using the SIWAREX 7MH4702-8AG cable
Measuring functions	
Measuring range	
- -1 mV/V to +1 mV/V	Yes
- -2 mV/V to +2 mV/V	Yes
- -4 mV/V to +4 mV/V	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; more than 2 000 m above sea level, the ambient temperature is reduced by -1 °C per 100 m
• Ambient air temperature-barometric pressure-altitude	1 080 ... 533 hPa (-1 000 ... 5 000 m above sea level)
Decentralized operation	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	Yes
to standard PROFINET controller	Yes
Dimensions	
Width	20 mm
Height	57 mm
Depth	72 mm
Weights	
Weight, approx.	50 g

Overview



The SIWAREX WP351 is a compact, precise weighing module in the SIMATIC ET 200SP format.

With a width of just 20 mm it is one of the slimmest weighing modules on the market, yet its firmware includes the functionalities of an automatic totalizing weighing instrument and checking, bagging and filling scale.

All operation modes are part of the firmware and certified according to OIML R-51, R-61, R-76 and R-107. This means the WP351 can be used in both scales requiring official calibration and those that do not, where demands are high regarding speed and accuracy.

Ordering data

TM SIWAREX WP351 HF weighing electronics

SIMATIC ET 200SP,
TM SIWAREX WP351 HF,
legal-for-trade weighing module for automatic dosing, filling and checking scales and totalizing weighing instruments

SIWAREX WP351 Equipment Manual

Available in a range of languages

Free download on the Internet at:

<http://www.siemens.com/weighing/documentation>

SIWAREX WP351 "Getting Started" sample project

Sample software shows beginners how to program the scales in TIA Portal V15.1

Free download on the Internet at:

<http://www.siemens.com/weighing/documentation>

Calibration set SIWAREX WP351

For verification of up to 3 scales, comprising:

- 3 x inscription foil for ID label
- 1 x protective film
- 3 x unlocking protection
- 6 x screw

For applications requiring official calibration, follow the calibration regulations of the country of destination.

ET 200SP BaseUnit type U0

- For constructing a new potential group (white)
- For continuing an existing potential group (gray)

Article No.

7MH4138-6BA00-0CU0

7MH4138-6BA00-0AY0

6ES7193-6BP00-0DU0

6ES7193-6BP00-0BU0

Ordering data

Article No.

Shield connection for BaseUnit (5 units/for 5 scales)

For laying load cell cable

6ES7193-6SC20-1AM0

SIWAREX EB extension box

For extending sensor cables.

7MH4710-2AA

SIWAREX JB junction box, aluminum enclosure

For connecting up to 4 load cells in parallel, and for connecting multiple terminal boxes.

7MH5001-0AA20

SIWAREX JB junction box, stainless steel enclosure

For connecting up to 4 load cells in parallel.

7MH5001-0AA00

SIWAREX JB junction box, stainless steel enclosure (ATEX)

For parallel connection of up to 4 load cells (for zone allocation, see manual or prototype test certificate).

7MH5001-0AA01

SIWAREX IS Ex interface

For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately.

- With short-circuit current < 199 mA DC
- With short-circuit current < 137 mA DC

7MH4710-5BA

7MH4710-5CA

Cable (optional)

Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) - CY

For connecting SIWAREX electronic to junction box (JB), extension box (EB), digital junction box (DB), Ex interface (IS) or between two extension boxes.

For permanent installation. Occasional bending is possible.

External diameter: approx. 10.8 mm (0.43 inch)

Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F)

Sold by the meter.

- Sheath color: orange
- Sheath color (for hazardous atmospheres): blue

7MH4702-8AG

7MH4702-8AF

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > TM SIWAREX WP351 HF weighing electronics

Technical specifications

SIWAREX WP351	
Firmware version	V1.0
• FW update possible	Yes
Usable BaseUnits	BU type U0
Reliability	
Mean time between failures (MTBF)	62 years @ TA = 40 °C
Product function	
I&M data	Yes, I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal can be configured/ integrated	Configurable as of V15 using HSP0281
• PROFIBUS as of GSD version/ GSD revision	GSD V04.02.41
• PROFINET as of GSD version/ GSD revision	GSDML V2.34
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
• Permissible range, low limit, static (DC)	19.2 V
• Permissible range, high limit, static (DC)	28.8 V
• Permissible range, low limit, dynamic (DC)	18.5 V
• Permissible range, high limit, dynamic (DC)	30.2 V
• Reverse polarity protection	Yes
• Non-periodic overvoltages	35 V DC for 500 ms with a recovery time of 50 s
Input current	
Current consumption, max.	Max. 140 mA @ 24 V DC + [DQ 3 × 0.5 A]
Power loss	
Typical power loss	1.7 W
Address range	
Assigned address range	
• Inputs	32 bytes
• Outputs	32 bytes
Power supply from SIMATIC S7 backplane bus	
Current consumption from ET 200SP backplane bus	Max. 27 mA @ 3.5 V (SBK4)
Analog load cell interface connection	
Error limit according to DIN 1319-1 at 20 °C (-4 °F) +/-10 K	≤ 0.002% of end value
Relative accuracy (absolute accuracy can only be achieved with local calibration using calibration standards)	
Measuring accuracy in accordance with OIML R76-1:2006/EN 45501:2015	
• Class	III
• Resolution (d=e)	3 × 6000 d
• Error percentage pi	0.4
• Step voltage	0.4 μV/e

SIWAREX WP351	
Accuracy delivery state	Typ. 0.1% of end value
The accuracy is relevant for module exchange or theoretical adjustment	
Sampling rate	1.024 ms
Input signal resolution	± 20 000 000
Measuring ranges	0 ... ±1 mV/V 0 ... ±2 mV/V 0 ... ±4 mV/V
Common mode voltage range	+2.8 ... 7.7 V
Strain gauge supply (constant voltage)	10 V DC (+1 % / -3 %) at the EXC terminals
Short-circuit and overload protection	Yes
Connection	6-wire or 4-wire (parameterizable)
Sensor voltage monitoring	Typ. ≤ 5.0 V
Min. strain gauge input resistance per channel	
• Without SIWAREX IS Ex-i interface	56 Ω
• With SIWAREX IS Ex-i interface	Lower impedance by means of external supply possible 87 Ω @ type 7MH4710-5BA 180 Ω @ type 7MH4710-5CA
Max. strain gauge resistance	4 100 Ω
Temperature coefficient range	≤ ±5 ppm/K
Temperature coefficient zero point	≤ ±0.015 μV/K
Linearity error	≤ 0.001%
Measured value filtering	Low-pass and average value filter configurable (DR3)
Galvanic isolation	500 V AC
50 Hz / 60 Hz noise suppression CMRR	> 80 dB
Input resistance	
• Signal line	Typ. 8*10 ⁶ Ω
• Sense line	Typ. 300*10 ⁶ Ω
Cable length	
• When using SIWAREX cable 7MH4702-8AG	Max. 500 m
Ambient conditions	
Ambient temperature in operation	
• Horizontal mounting position *	Min. -30 °C Max. +60 °C
• Vertical mounting position *	Min. -30 °C Max. +50 °C
Storage and transport temperature	-40 ... +70 °C (-40 ... +158 °F)

1) At a height of more than 2 000 m above sea level, a derating of the ambient temperature of -1 °C / 100 m has to be adhered to. The maximum permissible height is 5 000 meters above sea level. At over 0.6 A total current of the digital outputs DQ, a derating of the ambient temperature of -1 °C per 100 mA has to be adhered to. The max. permissible total current is 1.5 A.

Overview



Technical properties

- Counter module for ET 200SP
- Interfaces:
 - 24 V encoder signals A, B and N from P, M or push-pull-switching encoders and sensors
 - 24 V encoder supply output, short-circuit proof
 - 3 digital inputs for controlling the count operation, for saving or for setting the count value
 - 2 digital outputs for fast reactions regardless of the counter status or measured value

- Counting frequency 200 kHz (800 kHz with quadruple evaluation)
- Counting range: +/- 31 bits
- Measurement function
- Parameterizable hardware interrupts
- Parameterizable input filters for suppressing interferences at sensor and digital inputs

Supported types of encoders/signals

- 24 V incremental encoder with and without signal N
- 24 V pulse encoder with direction signal
- 24 V pulse encoder without direction signal
- 24 V pulse encoder for pulse up and down respectively

Supported system functions

- Isochronous mode
- Firmware update
- Identification data I&M

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

Article No.

SIPLUS TM Count 1x24V counter module

(extended temperature range and exposure to environmental substances)

With one channel, max. 200 kHz; for 24 V encoder

6AG1138-6AA01-2BA0

Suitable BaseUnits

(extended temperature range and exposure to environmental substances)

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

6AG1193-6BP00-7DA0

BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group

6AG1193-6BP00-7BA0

Article No.

BU15-P16+A10+2D

BU type A0; BaseUnit (light) with 16 push-in terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

6AG1193-6BP20-7DA0

BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 push-in terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

6AG1193-6BP20-7BA0

SIPLUS Mounting Kit ET 200SP

Mounting accessories for use with increased mechanical vibration and shock loads.

6AG1193-6AA00-0AA0

Other accessories

See SIMATIC TM Count 1x24V counter module, page 10/101

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > SIPLUS TM Count 1x24V counter module

Technical specifications

Article number	6AG1138-6AA01-2BA0
Based on	6ES7138-6AA01-0BA0 SIPLUS ET 200SP TM Count 1X24V
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
• vertical installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• vertical installation, max.	50 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Article number	6AG1138-6AA01-2BA0
Based on	6ES7138-6AA01-0BA0 SIPLUS ET 200SP TM Count 1X24V
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Overview

**Technical properties**

- Counter and position detection module for ET 200SP
- Interfaces:
 - Encoder signals A, B and N for 5 V TTL or RS 422 differential signals
 - SSI interface with clock and data for RS 422 differential signals
 - 24 V encoder supply output, short-circuit-proof
 - 2 digital inputs for controlling the counting process, for saving or setting the counter or position value
 - 2 digital outputs for fast reactions depending on the counter reading, position value or measured value
- Counter frequency 1 MHz (4 MHz with fourfold evaluation)
- Counting range: +/- 31 bits
- Measurement function
- Parameterizable hardware interrupts
- Parameterizable input filters for suppressing interferences at sensor and digital inputs

Supported types of encoders/signals

- Incremental encoders with or without N signal
- Pulse encoders with directional signal
- Pulse encoders without directional signal
- Pulse encoders for forward or reverse pulses
- SSI encoders with a telegram length of 10 to 40 bits, of which up to 31 bits position value

Supported system functions

- Isochronous mode
- Firmware update
- Identification data I&M

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS TM PosInput 1 counter and position detection module

(Extended temperature range and exposure to environmental substances)

For RS-422 incremental encoders or SSI absolute encoders, 2DI, 2DQ suitable for BU type A0, ambient temperature -40 °C...60 °C;

6AG1138-6BA01-2BA0

Suitable BaseUnits

(Extended temperature range and exposure to environmental substances)

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

6AG1193-6BP00-7DA0

BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

6AG1193-6BP00-7BA0

BU15-P16+A10+2D

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

6AG1193-6BP20-7DA0

BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the load group

6AG1193-6BP20-7BA0

Accessories**SIPLUS Mounting Kit ET 200SP**

Mounting accessories for use with increased mechanical vibration and shock loads.

6AG1193-6AA00-0AA0

Other accessories

See TM PosInput 1 counter and position detection module, page 10/105

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > SIPLUS TM PosInput 1 counter and position detection module

Technical specifications

Article number	6AG1138-6BA01-2BA0	Article number	6AG1138-6BA01-2BA0
Based on	6ES7138-6BA01-0BA0 SIPLUS ET 200SP TM Posinput 1	Based on	6ES7138-6BA01-0BA0 SIPLUS ET 200SP TM Posinput 1
Ambient conditions		Use on ships/at sea	
Ambient temperature during operation		- to biologically active substances according to EN 60721-3-6	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	- to chemically active substances according to EN 60721-3-6	
• vertical installation, min.	-40 °C; = Tmin	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	
• vertical installation, max.	50 °C; = Tmax; see Derating BasedOn (e.g. manual)	- to mechanically active substances according to EN 60721-3-6	
Altitude during operation relating to sea level		Yes; Class 6S3 incl. sand, dust; *	
• Installation altitude above sea level, max.	5 000 m	- Against mechanical environmental conditions acc. to EN 60721-3-6	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Relative humidity		Usage in industrial process technology	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	- Against chemically active substances acc. to EN 60654-4	
Resistance		- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	
Coolants and lubricants		Remark	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	
Use in stationary industrial systems		* The supplied plug covers must remain in place over the unused interfaces during operation!	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Conformal coating	
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	• Coatings for printed circuit board assemblies acc. to EN 61086	
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 2 for high reliability	
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	• Protection against fouling acc. to EN 60664-3	
		Yes; Type 1 protection	
		• Military testing according to MIL-I-46058C, Amendment 7	
		Yes; Discoloration of coating possible during service life	
		• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	
		Yes; Conformal coating, Class A	

Overview



- 4 digital inputs, 6 digital outputs
- Inputs for detecting the input edges with μs accuracy
- Outputs for outputting the switching signals with μs accuracy
- 32x oversampling
- PWM output
- Counter function
- Outputs can be switched between 0.5 A standard and especially fast 0.1 A high-speed mode

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme specific information was added.

Ordering data

Article No.

SIPLUS TM Timer DIDQ 10x24 V time-based IO module

(Extended temperature range and exposure to environmental substances)

4 time-controlled inputs,
6 time-controlled outputs

6AG1138-6CG00-2BA0**Suitable BaseUnits**

(Extended temperature range and exposure to environmental substances)

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

6AG1193-6BP00-7DA0**BU15-P16+A0+2B**

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

6AG1193-6BP00-7BA0**BU15-P16+A10+2D**

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

6AG1193-6BP20-7DA0**BU15-P16+A10+2B**

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the load group

6AG1193-6BP20-7BA0**Accessories****SIPLUS Mounting Kit ET 200SP**

Mounting accessories for use with increased mechanical vibration and shock loads.

6AG1193-6AA00-0AA0**Other accessories**

See SIMATIC TM Timer DIDQ 10x24V time-based IO module, page 10/108

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > SIPLUS TM Timer DIDQ 10x24 V time-based IO module

Technical specifications

Article number	6AG1138-6CG00-2BA0	Article number	6AG1138-6CG00-2BA0
Based on	6ES7138-6CG00-0BA0 SIPLUS ET 200SP TM Timer DIDQ 10x24V	Based on	6ES7138-6CG00-0BA0 SIPLUS ET 200SP TM Timer DIDQ 10x24V
Ambient conditions		Use on ships/at sea	
Ambient temperature during operation		<ul style="list-style-type: none"> - to biologically active substances according to EN 60721-3-6 - to chemically active substances according to EN 60721-3-6 - to mechanically active substances according to EN 60721-3-6 - Against mechanical environmental conditions acc. to EN 60721-3-6 	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	
• vertical installation, min.	-40 °C; = Tmin (incl. condensation/frost)	Yes; Class 6S3 incl. sand, dust; *	
• vertical installation, max.	50 °C; = Tmax; see Derating BasedOn (e.g. manual)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Altitude during operation relating to sea level		Usage in industrial process technology	
• Installation altitude above sea level, max.	5 000 m	<ul style="list-style-type: none"> - Against chemically active substances acc. to EN 60654-4 - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Yes; Class 3 (excluding trichlorethylene)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Relative humidity		Remark	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	<ul style="list-style-type: none"> - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	
Resistance		Conformal coating	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	<ul style="list-style-type: none"> • Coatings for printed circuit board assemblies acc. to EN 61086 • Protection against fouling acc. to EN 60664-3 • Military testing according to MIL-I-46058C, Amendment 7 • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	
Coolants and lubricants		Yes; Class 2 for high reliability	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Type 1 protection	
Use in stationary industrial systems		Yes; Discoloration of coating possible during service life	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Conformal coating, Class A	
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *		
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *		
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		

Overview



2-channel pulse output module for SIPLUS ET 200SP

- Operating modes:
 - Single pulse with defined length
 - Pulse chain with defined number of pulses
 - Pulse width modulation (with flexible ON period, optional current control and dither function)
 - PWM signal for controlling a DC motor
 - ON and OFF delay; rising and falling edge can be delayed separately to the microsecond
 - Frequency output with defined output frequency
- Hardware:
 - 2 channels 24 V, 2 A output current output current can be switched in parallel to boost performance to 4 A of output current
 - Switching frequencies to 10 kHz; at reduced output current to 0.1 A up to 100 kHz
 - Push/pull output driver for especially steep edges at the outputs
 - Polarity change in DC motor operation for direction reversal
 - 1 high-speed 24 V digital input per channel with parameterizable input delay from 4 μ s
- Channel functions:
 - HW enable; Start of signal output with the onboard digital input
 - Parameterizable ON delay; for precise deceleration between the HW enable and the start of output
 - Current measurement in the operating modes pulse-width modulation and pulse chain; enables control of the output current mean value over a period. Temperature influences can thus be balanced to the resistance of the actuator.
 - Cyclic control of the respective main setpoint from the PLC in every operating mode; other values can be modified flexibly from the user program.
- Supported system functions:
 - Isochronous mode; enables precision-timed connection of the setpoint output to a higher-level controller
 - Firmware update
 - Identification data I&M

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS TM Pulse 2x24V pulse output module
6AG1138-6DB00-2BB1

(extended temperature range and exposure to environmental substances)

PWM and pulse output, 2 channels of 2 A for proportional valves and DC motors

Suitable BaseUnits

(extended temperature range and exposure to environmental substances)

BU20-P12+A0+4B
6AG1193-6BP20-7BB1

BU type B1; BaseUnit (dark); without AUX terminals; for continuing the load group

Accessories
SIPLUS Mounting Kit ET 200SP
6AG1193-6AA00-0AA0

Mounting accessories for use with increased mechanical vibration and shock loads.

Other accessories

See SIMATIC TM Pulse 2x24V pulse output module, page 10/111

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > SIPLUS TM Pulse 2x24V pulse output module

Technical specifications

Article number	6AG1138-6DB00-2BB1	Article number	6AG1138-6DB00-2BB1
Based on	6ES7138-6DB00-0BB1 SIPLUS ET 200SP TM Pulse 2x24V	Based on	6ES7138-6DB00-0BB1 SIPLUS ET 200SP TM Pulse 2x24V
Ambient conditions			
Ambient temperature during operation			
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	Use on ships/at sea	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	- to biologically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
• vertical installation, min.	-40 °C; = Tmin (incl. condensation/frost)	- to chemically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
• vertical installation, max.	50 °C; Observe derating	- to mechanically active substances according to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m	- Against mechanical environmental conditions acc. to EN 60721-3-6	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Usage in industrial process technology	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Relative humidity			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	Remark	* The supplied plug covers must remain in place over the unused interfaces during operation!
Resistance			
Coolants and lubricants			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Conformal coating	Yes; Class 2 for high reliability
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Type 1 protection
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	• Protection against fouling acc. to EN 60664-3	
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Overview



SIPLUS Electrical Charging Controllers are the key components in infrastructure solutions for the conductive charging of electric vehicles.

They perform the following functions:

- Detection of the charging cable and its permissible current carrying capacity
- Transfer of the maximum charging current from the charging station to the electric vehicle
- Evaluation of the status signals from the electric vehicle:
 - Ready for charging
 - Charging
 - Charging with ventilation
- Cost-optimized, space-saving charging infrastructure solutions due to compact design based on SIMATIC ET 200SP

SIPLUS ET 200SP TM ECC 2xPWM ST AC module

- Control of charging outputs according to IEC 61851 by parameterizable SIPLUS ET 200SP TM ECC 2xPWM ST charging controller
- Control of load tap-off
- Control of connector lock
- Evaluation of connector lock or load contactor status

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS ET 200SP TM ECC 2xPWM ST charging controller

6AG1242-6TM10-2BB1

(Exposure to environmental substances)

Designed for controlling charging outputs according to IEC 61851 and parameterizable, with 2 charging outputs, ambient temperature -30 °C ... 60 °C;

2x control pilot, 2x plug present, 2x DQ switching contact for load contactor as open collector, 2x DI for load contactor feedback or connector lock;

Accessories

SIPLUS Mounting Kit ET 200SP

6AG1193-6AA00-0AA0

Mounting accessories for use with increased mechanical vibration and shock loads.

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > SIPLUS ET 200SP ECC charging controllers

Technical specifications

Article number	6AG1242-6TM10-2BB1
Based on	6FE1242-6TM10-0BB1 SIPLUS ET 200SP TM ECC 2xPWM ST
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; = Tmin
• horizontal installation, max.	60 °C; = Tmax
• vertical installation, min.	-30 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax
Ambient temperature during storage/transportation	
• Storage, min.	-40 °C
• Storage, max.	70 °C
• Transportation, min.	-40 °C
• Transportation, max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Vibrations	
• Vibration resistance during operation acc. to IEC 60068-2-6	10 ... 58 Hz / 0.075 mm, 58 ... 150 Hz / 1 g
Shock testing	
• Shock resistance acc. to IEC 60068-2-27	15 g / 11 ms
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air

Article number	6AG1242-6TM10-2BB1
Based on	6FE1242-6TM10-0BB1 SIPLUS ET 200SP TM ECC 2xPWM ST
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Overview



SIPLUS WP321 is a versatile and flexible weighing module for the seamless integration of a static scale into the SIMATIC automation environment.

The electronic weighing system is integrated in the SIPLUS ET 200SP series and uses all the features of a modern automation system, such as integrated communication, operator control and monitoring, diagnostic system and configuration tools in the TIA Portal, SIMATIC STEP 7, WinCC flexible and PCS 7.

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information has been added.

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SIPLUS WP321 weighing module Single-channel, for platform or hopper scales with analog load cells (1–4 mV/V), 1 x LC, 1 x RS 485. Extended temperature range and exposure to environmental substances	6AG1138-6AA00-2BA8	SIWAREX JB junction box, stainless steel enclosure For connecting up to 4 load cells in parallel.	7MH5001-0AA00
Accessories		SIWAREX JB junction box, stainless steel enclosure (ATEX) For parallel connection of up to 4 load cells (for zone allocation, see manual or prototype test certificate).	7MH5001-0AA01
Mandatory		Ex interface, type SIWAREX IS For intrinsically safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of the load cells must be checked separately. <ul style="list-style-type: none"> • With short-circuit current < 199 mA DC • With short-circuit current < 137 mA DC 	7MH4710-5BA 7MH4710-5CA
BaseUnit Type A0 – one BaseUnit required for each WP321 <ul style="list-style-type: none"> • For opening a new potential group <ul style="list-style-type: none"> - BU15P-16+A0+2D or - BU15P-16+A10+2D • For continuing the potential group <ul style="list-style-type: none"> - BU15P-16+A0+2B - BU15P-16+A10+2B 	6ES7193-6BP00-0DA0 6ES7193-6BP20-0DA0 6ES7193-6BP00-0BA0 6ES7193-6BP20-0BA0	Cables (optional) Cable Li2Y 1 x 2 x 0.75 ST + 2 x (2 x 0.34 ST) – CY, orange sheath For connecting SIWAREX electronic weighing systems to junction boxes (JB), extension boxes (EB) and Ex interface or between two EBs. For permanent installation. Occasional bending is permitted. Outer diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F) Sold by the meter <ul style="list-style-type: none"> • Sheath color: orange • For hazardous areas. Sheath color: blue 	7MH4702-8AG 7MH4702-8AF
Consumables			
Shield connection for BaseUnit Set for 5 shield connections, with 5 shield connection clamps, 5 supports, 5 support elements	6ES7193-6SC20-1AM0		
Shield connection element Sufficient for one SIWAREX FTA module	6ES7390-5AA00-0AA0		
SIWAREX JB junction box, aluminum casing For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes	7MH5001-0AA20		

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Technology modules > SIPLUS SIWAREX WP321

Ordering data	Article No.	Article No.
Configuration software		
SIWATOOL V4 & V7 Service and commissioning software for SIWAREX weighing modules	7MH4900-1AK01	
SIWAREX PCS 7 AddOn Library for PCS 7 V8.x and V9.0 • Supports PROFINET APL faceplates and function blocks for: • SIWAREX U • SIWAREX FTA • SIWAREX FTC_B (belt scales) • SIWAREX WP321 Classic faceplate and function block for: • SIWAREX FTC_L (loss in weight)	7MH4900-1AK61	
Documentation		
SIWAREX WP321 Equipment Manual Available in a range of languages Free download from the Internet at https://www.siemens.com/weighing/documentation .		
		SIWAREX WP321 "Ready for use" TIA Portal and SIMATIC Manager sample configuration Free download from the Internet at https://www.siemens.com/weighing/documentation .
		SIMATIC Manual Collection 6ES7998-8XC01-8YE0 Electronic manuals on DVD, multilingual: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT
		SIMATIC Manual Collection update service for 1 year 6ES7998-8XC01-8YE2 Current Manual Collection DVD and the three subsequent updates

Technical specifications

SIPLUS WP321	6AG1138-6AA00-2BA8	SIPLUS WP321	6AG1138-6AA00-2BA8
Environmental conditions		Resistance	
Climatic requirements $T_{min(IND)} \dots T_{max(IND)}$ (operating temperature)		• Coolants and lubricants	
• Vertical installation	-40 ... +50 °C	- Resistant to commercially available coolants and lubricants	Yes; incl. airborne diesel and oil droplets
• Horizontal installation	-40 ... +60 °C	• For use in stationary industrial equipment	
Operating height in relation to sea level		- Resistant to biologically active substances, acc. to EN 60721-3-3	Yes; Class 3B2 mold and fungal spores (excluding fauna); Class 3B3 on request
• Installation altitude above sea level, max.	5 000 m	- Resistant to chemically active substances acc. to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity 3) *
• Ambient temperature, air pressure and altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	- Resistant to mechanically active substances acc. to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust*
Relative humidity		• For use on ships/at sea	
• With condensation, tested according to IEC 60068-2-38, max.	100%; RH including condensation/frost (no commissioning when condensation is present), horizontal installation	- Resistant to biologically active substances acc. to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
		- Resistant to chemically active substances acc. to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity 3) *
		- Resistant to mechanically active substances acc. to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust*
		• Note	
		- Note on classification of environmental conditions acc. to EN 60721	*. The supplied plug covers must remain in place on the unused interfaces during operation.
		Conformal coating	
		• Coating for PCBs acc. to EN 61086	Yes; Class 2 for high availability
		• Military testing acc. to MIL-I-46058C, Amendment 7	Yes; coating discoloration possible
		• Qualification and Performance of Electrical Insulating Compound for Printed Wiring Assemblies acc. to IPC-CC-830A	Yes; conformal coating, class A
		EMC requirements	Acc. to IEC 61000-6-2, IEC 61000-6-4, OIML-R76-1
		Dimensions (width)	15 mm (0.6 in)

Overview



SIMATIC ET 200SP CM PtP video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoid=6136809673001



- CM PtP communications module; module for serial communication connections with RS232 and RS422 interfaces. RS485 for the Freeport, 3964(R), Modbus RTU, USS and DMX512 protocols, max. 115.2250 kbps, 2 KB frame length, 4 KB receive buffer.
- Protocols supported
 - Freeport: User-parameterizable frame format for universal communication, also known as ASCII frame
 - 3964(R) for improved transmission reliability
 - Modbus RTU master (requires instructions in SIMATIC S7)
 - Modbus RTU slave (requires instructions in SIMATIC S7)
 - USS, implemented through instructions
 - DMX512, can be implemented through instructions
- Interface properties
 - RS232 with auxiliary signals
 - RS422 for full-duplex connections
 - RS485 for half-duplex and multi-point connections
 - Transmission rates from 300 to 115200 bps for RS232 and RS422
 - Transmission rates from 300 to 25000 bps for RS485
- Frame lengths
 - In universal operation: 2 KB each in send and receive direction
 - In performance-optimized operation: 30 bytes in send direction, 24 bytes in receive direction
- Can be plugged into type A0 BaseUnits (BU) with automatic coding
- LED display for errors, operation and supply voltage
- Communication display for sending and receiving
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (article and serial number)
 - Connection diagram
 - Color coding of the module type
 - Hardware and firmware version
 - Complete Article No.
- Optional labeling accessories
 - Labeling strips
 - Equipment labeling plate
- Optional system-integrated shield connection

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Communication > CM PtP serial interface****Ordering data****Article No.****Article No.****CM PtP communications module**

For serial communication connections with RS232, RS422, RS485 interfaces, BU type A0, color code CC00

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10

6ES7137-6AA01-0BA0
6ES7137-6AA01-2BA0

Accessories**BU15-P16+A10+2D**

BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP20-0DA0
6ES7193-6BP20-2DA0

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0DA0
6ES7193-6BP00-2DA0

BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP20-0BA0
6ES7193-6BP20-2BA0

BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0BA0
6ES7193-6BP00-2BA0

Equipment labeling plate

10 sheets of 16 labels

6ES7193-6LF30-0AW0

Labeling strips

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AA0

Shield connection

5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional ground

6ES7193-6SC20-1AM0

Mechanical coding elements

For automatic coding of I/O modules; spare part. 20 units

Type A

6ES7193-6KA00-3AA0

Type B

6ES7193-6KB00-3AA0

Type C

6ES7193-6KC00-3AA0

Type D

6ES7193-6KD00-3AA0

10

Technical specifications

Article number	6ES7137-6AA01-0BA0 ET 200SP, CM PTP, PU 1
General information	
Product type designation	CM PtP
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V17 or higher
• STEP 7 configurable/ integrated from version	via GSD as of V5.6 HF4
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.34
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
1. Interface	
Interface types	
• RS 485	Yes
• RS 422	Yes
• RS 232	Yes
• Design of the connection	Push-in terminal
Interface types	
RS 232	
• Transmission rate, max.	115.2 kbit/s
• Cable length, max.	15 m
• RS 232 auxiliary signals	RTS, CTS, DTR, DSR, RI, DCD
RS 485	
• Transmission rate, max.	250 kbit/s
• Cable length, max.	1 200 m; 100 to 1200 m, depending on transmission speed
RS 422	
• Transmission rate, max.	115.2 kbit/s
• Cable length, max.	1 200 m
• 4-wire full duplex connection	Yes
• 4-wire multipoint connection	Yes
Protocols	
Integrated protocols	
Freeport	
- Telegram length, max.	2 kbyte; performance mode: receive data max. 24 byte and send data max. 30 byte
- Bits per character	7 or 8
- Number of stop bits	1 or 2 bit
- Parity	None, even, odd, always 1, always 0, any
3964 (R)	
- Telegram length, max.	2 kbyte; performance mode: receive data max. 24 byte and send data max. 30 byte
- Bits per character	7 or 8
- Number of stop bits	1 or 2 bit
- Parity	None, even, odd, always 1, always 0, any

Article number	6ES7137-6AA01-0BA0 ET 200SP, CM PTP, PU 1
Modbus RTU master	
- Address area	1 to 247, extended 1 to 65535
- Number of slaves, max.	32
MODBUS RTU slave	
- Address area	1 to 247, extended 1 to 65535
Telegram buffer	
• Buffer memory for telegrams	4 kbyte
• Number of telegrams which can be buffered	255
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
• Hardware interrupt	No
Diagnoses	
• Wire-break	Yes
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• for module diagnostics	Yes; green/red DIAG LED
• Receive RxD	Yes; green LED
• Transmit TxD	Yes; green LED
Potential separation	
between backplane bus and interface	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
Decentralized operation	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFINET controller	Yes
Dimensions	
Width	15 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	30 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > CM 4x IO-Link

Overview

- CM 4x IO-Link communications module
Serial communication module for connecting up to 4 IO-Link devices in accordance with IO-Link specification V1.0 and V1.1. The IO-Link parameters are configured using the Port Configuration Tool (PCT), version V3.0 and higher
- Time-based IO
Time-based IO ensures that signals are output with a precisely defined response time. By combining inputs and outputs, for example, passing products can be accurately measured or fluids dosed in precise quantities
- Supported data transfer rates
 - COM1 (4.8 kbps)
 - COM2 (38.4 kbps)
 - COM3 (230.4 kbps)

- Expansion limits
 - Length of cable: Max. 20 m
 - Max. 32 bytes of input and output data per port
 - Max. 144 bytes of input data and 128 bytes of output data per module
- Supported ET 200SP system functions
 - Replacement without PG with automatic backup without the engineering tool of the IO-Link device parameters (V1.1 devices only) and the IO-Link master parameters by means of redundant saving of parameters on the e-coding element
 - Re-parameterization during operation
 - Identification data I&M
 - Firmware update
 - PROFlenergy
- Can be plugged into Type A0 BaseUnits (BU) with automatic e-coding
- LEDs
 - DIAG: Operating state indicator (green/red) of the module
 - C1..C4: Port status indicator (green) for Port 1, 2, 3 and 4
 - Q1..Q4: Channel status indicator (green) for Port 1, 2, 3 and 4
 - F1..F4: Port fault indicator (red) for Port 1, 2, 3 and 4
 - PWR: Supply voltage indicator (green)
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Color-coding of the CM module class: silver
 - Hardware and firmware version
 - Complete Article No.
- Optional accessories
 - Labeling strips
 - Equipment labeling plates
 - Color-coding plate with color code CC04
- Optional system-integrated shield connection

Overview of CM 4x IO-Link

Communications module	Article No.	CC code	BU type	Pkg. unit
CM 4x IO-Link	6ES7137-6BD00-0BA0	CC04	A0	1

Overview

Overview of BaseUnits

BaseUnit	Article No.	CC codes for push-in terminals	CC codes for AUX terminals	Pkg. unit
BU type A0 • New load group (light) • 16 push-in terminals • With 10 AUX terminals	6ES7193-6BP20-0DA0	CC01 to CC05	CC71 to CC73	1
BU type A0 • New load group (light) • 16 push-in terminals • With 10 AUX terminals	6ES7193-6BP20-2DA0	CC01 to CC05	CC71 to CC73	10
BU type A0 • New load group (light) • 16 push-in terminals • Without AUX terminals	6ES7193-6BP00-0DA0	CC01 to CC05	--	1
BU type A0 • New load group (light) • 16 push-in terminals • Without AUX terminals	6ES7193-6BP00-2DA0	CC01 to CC05	--	10
BU type A0 • Forwarding of load group (dark) • 16 push-in terminals • With 10 AUX terminals	6ES7193-6BP20-0BA0	CC01 to CC05	CC71 to CC73	1
BU type A0 • Forwarding of load group (dark) • 16 push-in terminals • With 10 AUX terminals	6ES7193-6BP20-2BA0	CC01 to CC05	CC71 to CC73	10
BU type A0 • Forwarding of load group (dark) • 16 push-in terminals • Without AUX terminals	6ES7193-6BP00-0BA0	CC01 to CC05	--	1
BU type A0 • Forwarding of load group (dark) • 16 push-in terminals • Without AUX terminals	6ES7193-6BP00-2BA0	CC01 to CC05	--	10

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > CM 4x IO-Link

Ordering data	Article No.	Labeling strips	Article No.
CM 4x IO-Link master V1.1 Standard communications module Serial communications module for connecting up to 4 IO-Link devices, time-based IO, BU type A0, color code CC04	6ES7137-6BD00-0BA0	Labeling strips 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer 500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer 1 000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer 1 000 labeling strips DIN A4, light gray, card, perforated, for inscription with laser printer	6ES7193-6LR10-0AA0 6ES7193-6LR10-0AG0 6ES7193-6LA10-0AA0 6ES7193-6LA10-0AG0
Accessories Suitable type A0 BaseUnits			
BU15-P16+A10+2D BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A) <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10. 	6ES7193-6BP20-0DA0 6ES7193-6BP20-2DA0	Color-coded labels Color code CC04, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 12), blue (terminals 13 to 16); 10 units Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A); 10 units Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A); 10 units Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A); 10 units	6ES7193-6CP04-2MA0 6ES7193-6CP71-2AA0 6ES7193-6CP72-2AA0 6ES7193-6CP73-2AA0
BU15-P16+A0+2D BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A) <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10. 	6ES7193-6BP00-0DA0 6ES7193-6BP00-2DA0		
BU15-P16+A10+2B BU type A0; BaseUnit (dark) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10. 	6ES7193-6BP20-0BA0 6ES7193-6BP20-2BA0	Spare parts Electronic coding element type H Pack of 5 units; included in scope of supply of CM 4x IO-Link module Mechanical coding elements For automatic coding of I/O modules; spare part. 20 units Type A Type B Type C Type D	6ES7193-6EH00-1AA0 6ES7193-6KA00-3AA0 6ES7193-6KB00-3AA0 6ES7193-6KC00-3AA0 6ES7193-6KD00-3AA0
BU15-P16+A0+2B BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this article number with an order quantity of 10. 	6ES7193-6BP00-0BA0 6ES7193-6BP00-2BA0		
Equipment labeling plate 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter	6ES7193-6LF30-0AW0		

10

Technical specifications

Article number	6ES7137-6BD00-0BA0 ET 200SP, CM 4x IO-Link ST
General information	
Product type designation	CM 4x IO-Link ST
Product function	
• I&M data	Yes; I&M0 to I&M3
• Isochronous mode	No; Only for PROFINET and configuration as version with FW V2.0 or V2.1
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V15 or higher
• STEP 7 configurable/ integrated from version	STEP 7 V5.5 or higher
• PROFIBUS from GSD version/ GSD revision	One GSD file each, Revision 3 and 5 and higher
• PROFINET from GSD version/ GSD revision	GSDML V2.3
Supply voltage	
Rated value (DC)	24 V
Encoder supply	
Number of outputs	4
Output current	
• Rated value	700 mA; Per channel
24 V encoder supply	
• Short-circuit protection	Yes
• Output current, max.	2.1 A
IO-Link	
Number of ports	4
• of which simultaneously controllable	4
IO-Link protocol 1.0	Yes
IO-Link protocol 1.1	Yes
Transmission rate	4.8 kBaud (COM1); 38.4 kBaud (COM2), 230.4 kBaud (COM3)
Cycle time, min.	2 ms; dynamic, depending on user data length
Size of process data, input per port	32 byte; max.
Size of process data, input per module	144 byte; max.
Size of process data, output per port	32 byte; max.
Size of process data, output per module	128 byte; max.
Memory size for device parameter	2 kbyte; for each port
Master backup	Yes
Configuration without S7-PCT	Yes
Cable length unshielded, max.	20 m
Operating modes	
• IO-Link	Yes
• DI	Yes
• DQ	Yes; max. 100 mA per channel

Article number	6ES7137-6BD00-0BA0 ET 200SP, CM 4x IO-Link ST
Time Based IO	
- TIO IO-Link IN	No; Only for PROFINET and configuration as version with FW V2.0 or V2.1
- TIO IO-Link OUT	No; Only for PROFINET and configuration as version with FW V2.0 or V2.1
- TIO IO-Link IN/OUT	No; Only for PROFINET and configuration as version with FW V2.0 or V2.1
Connection of IO-Link devices	
• Port type A	Yes
• Port type B	Yes; 24 V DC via external terminal
• via three-wire connection	Yes
Interrupts/diagnostics/ status information	
Alarms	
• Diagnostic alarm	Yes; The port diagnosis is available in the IO-Link mode only.
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Group error	Yes
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; one green LED for channel status Qn (SIO mode) and port status Cn (IO-Link mode) per channel
• for channel diagnostics	Yes; red Fn LED
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m
Dimensions	
Width	13 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	30 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > CM 1xDALI

Overview



SIMATIC ET 200SP DALI video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6153144008001



- DALI 2 multimaster module for 1 bus strand
- Allows the control, diagnostics and parameter assignment of up to 64 luminaires and 63 sensors via a 2-wire bus line
- Typical areas of application: Lighting in tunnels, (factory) halls or ships
- Realization of the control via prefabricated blocks of a function block library in TIA Portal
- DALI (Digital Addressable Lighting Interface) certification according to DALI V2 for IEC 62386-101/-103 parts
- Different DALI device types, such as LED modules, fluorescent lamps, discharge lamps, low-voltage halogen lamps and others, can be used

Ordering data

Article No.

CM 1xDALI, DALI V2 multimaster module

For control of lighting solutions with DALI V2, BU type U0, color code CC20

6ES7137-6CA00-0BU0

Accessories

Suitable type U0 BaseUnits

BU20-P16+A0+2D

BU type U0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0DU0
6ES7193-6BP00-2DU0

BU20-P16+A0+2B

BU type U0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0BU0
6ES7193-6BP00-2BU0

Equipment labeling plate

10 sheets of 16 labels

6ES7193-6LF30-0AW0

Labeling strips

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AA0

Mechanical coding elements

For automatic coding of I/O modules; spare part. 20 units

Type A

6ES7193-6KA00-3AA0

Type B

6ES7193-6KB00-3AA0

Type C

6ES7193-6KC00-3AA0

Type D

6ES7193-6KD00-3AA0

Technical specifications

Article number	6ES7137-6CA00-0BU0 ET 200SP, CM 1x DALI
General information	
Product type designation	CM 1xDALI
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V15.1 or higher
• PROFIBUS from GSD version/ GSD revision	GSD Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.34
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Interface types	
DALI	
• Integrated power supply	Yes
- Supply current, min.	160 mA
- Supply current, max.	250 mA
- Can be switched off	Yes
• Cable length, max.	300 m
Protocols	
DALI	
• Standard according to DALI	DALI V2 Multi-Master
Supported operating devices	
- Fluorescent lamps (device type 0)	Yes
- Emergency lighting with single battery (device type 1)	Yes
- Discharge lamps (device type 2)	Yes
- Low-voltage halogen lamps (device type 3)	Yes
- Incandescent lamps (device type 4)	Yes
- Direct voltage (device type 5)	Yes
- LED modules (device type 6)	Yes
- Switching function (device type 7)	Yes
- Color control (device type 8)	Yes
- Further operating devices	Yes; general device type
Supported input devices	
- Pushbuttons	Yes
- Absolute input devices	Yes
- Presence detector	Yes
- Light sensor	Yes
- Further input devices	Yes; general device type

Article number	6ES7137-6CA00-0BU0 ET 200SP, CM 1x DALI
Interrupts/diagnostics/ status information	
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Short-circuit	Yes; On DALI bus
Diagnostics indication LED	
• ERROR LED	Yes
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Receive RxD	Yes; green LED
• Transmit TxD	Yes; green LED
Potential separation	
between backplane bus and interface	Yes
Standards, approvals, certificates	
CE mark	Yes
RoHS conformity	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	3 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Decentralized operation	
to SIMATIC S7-1200	Yes; FW V4.0 or higher
to SIMATIC S7-1500	Yes
Dimensions	
Width	20 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	50 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > CM CAN**Overview**

- For data exchange between an ET 200SP system and CAN Bus 2.0A/B or CANopen Manager or Slave (according to CiA 301 & 302)
- CANopen features:
 - Node / lifeguarding
 - Heartbeat
 - SYNC (producer / consumer)
- Integrated in TIA via HSP, TIA Portal V15.1 or higher
- CAN connection with push-in terminals
- Integrated CAN bus terminating resistor
- Up to 60 CAN nodes
- 128 receiver and 128 transmitter PDOs
- Galvanic isolation between the two networks
- Diagnostic interrupts
- Optionally with function block SIMATIC ECC CHAdeMO: Realization of digital communication as basis for conductible DC charging of electric vehicles in line with the CHAdeMO standard

Ordering data**Article No.****ET 200SP CM CAN communications modules****6ES7137-6EA00-0BA0**

To connect ET 200SP with CAN bus or CANopen networks CAN bus 2.0A/B, CANopen Manager according to CiA301/302, CANopen Slave according to CiA301/302

Accessories**SIMATIC ECC CHAdeMO function block****6FE1263-8FB10-0AA0**

For realization of digital communication between a DC charging station and an electric vehicle according to CHAdeMO 1.x-2.0 specification; can be used with TIA Portal as of V15.1; Single license

Suitable type A0 BaseUnits**BU15-P16+A0+2D**

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0DA0
6ES7193-6BP00-2DA0**BU15-P16+A0+2B**

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this article number with an order quantity of 10.

6ES7193-6BP00-0BA0
6ES7193-6BP00-2BA0**Mechanical coding elements**

For automatic coding of I/O modules; spare part. 20 units

Type A

6ES7193-6KA00-3AA0

Type B

6ES7193-6KB00-3AA0

Type C

6ES7193-6KC00-3AA0

Type D

6ES7193-6KD00-3AA0

Technical specifications

Article number	6ES7137-6EA00-0BA0 ET 200SP CM CAN
General information	
Product type designation	CM 1x CAN ST
Product function	
• I&M data	Yes; I&M0 to I&M3
• Module swapping during operation (hot swapping)	Yes
• Isochronous mode	No
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V15.1 or higher
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
1. Interface	
Interface type	CAN according to CiA 303-1
Isolated	Yes; 500 V AC or 707 V DC
Interface types	
• Number of ports	1
• Design of the connection	Push-in terminal
CAN	
• CAN operating modes	CAN Standard CAN 2.0A/B; CANopen Manager / Slave acc. to CiA
• Specification acc. to CiA	CiA 301 & CiA 302
• Transmission rate, min.	10 kbit/s
• Transmission rate, max.	1 000 kbit/s
• Number of slaves, max.	60
• Number of SDOs in parallel	16; Parallel
• Number of PDOs	128; Send / receive
Services	
- Node/life-guarding	Yes
- Heartbeat	Yes
- SYNC	Yes
Interrupts/diagnostics/ status information	
Alarms	Yes
Diagnostics function	Yes
Diagnostics indication LED	
• RUN LED	Yes
• ERROR LED	Yes
• MAINT LED	No
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED

Article number	6ES7137-6EA00-0BA0 ET 200SP CM CAN
Potential separation	
between backplane bus and interface	Yes
Standards, approvals, certificates	
CE mark	Yes
UL approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes; Reg. No.: R-R-S49-ET200SPCMCAN
EAC (formerly Gost-R)	Yes
RoHS conformity	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-30 °C
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
Decentralized operation	
to SIMATIC S7-300	No
to SIMATIC S7-400	No
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
Dimensions	
Width	15 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	32 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > CM AS-i Master ST for SIMATIC ET 200SP

Overview



CM AS-i Master ST for SIMATIC ET 200SP



Video: AS-Interface – Powerful integration in SIMATIC ET 200SP,
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoid=6136807004001

More information

Equipment Manual, see
<https://support.industry.siemens.com/cs/ww/en/view/71756485>

SIMATIC ET 200SP Manual Collection, see
<https://support.industry.siemens.com/cs/ww/en/view/84133942>

Diagnostics blocks with visualization, see
<https://support.industry.siemens.com/cs/ww/en/view/109479103>

AS-Interface block library for SIMATIC PCS 7
for easy connection of AS-Interface to PCS 7, see
<https://support.industry.siemens.com/cs/ww/en/view/109759605>

Released combinations of the AS-i modules for ET 200SP, see
<https://support.industry.siemens.com/cs/ww/en/view/103624653>

AS-Interface I/O modules and other AS-Interface system components
see Catalog IC 10, <https://www.siemens.com/ic10>

More information see <https://www.siemens.com/as-interface>

The CM AS-i Master ST communications module is designed for use in the SIMATIC ET 200SP distributed I/O system and has the following features:

- Connection of up to 62 AS-Interface slaves
- Supports all AS-Interface master functions according to the AS-Interface specification V3.0
- User-friendly configuration with graphic or tabular display of the AS-i line in TIA Portal or STEP 7 (Classic) or via GSD in other systems
- Supply via AS-Interface cable
- Suitable for AS-i Power24V and for AS-Interface with 30 V voltage
- Extended temperature range from -25 °C (from Hardware functional status FS20 onwards)
- Integrated ground-fault monitoring for the AS-Interface cable
- Through connection to AS-Interface, the number of digital inputs and outputs available for the control system is greatly increased (max. 496 DI/496 DQ on the AS-Interface per CM AS-i Master ST)
- Integrated analog value processing

AS-i gateways with ET 200SP

An AS-i gateway or AS-i link enables access to the AS-Interface data via PROFINET, PROFIBUS, EtherNet/IP, or Modbus TCP.

With the CM AS-i Master ST module, flexible and powerful AS-i link solutions or stand-alone ET 200SP CPU stations with AS-i connection are set up. Depending on the requirements, even several AS-i masters can be plugged into one ET 200SP station, so that the setup can easily be extended from a single master to double masters or multiple masters. With the MultiFieldbus interface module IM 155-6MF, the AS-i master modules are connected to PROFINET, EtherNet/IP, and Modbus TCP.

The maximum number of modules is determined by the ET 200SP interface module (IM): up to 32 AS-i masters with PROFINET IM 155-6PN (6ES7155-6AU02-0BNO), up to 43 AS-i masters with IM 155-6PN High Feature, or a single AS-i master with IM 155-6PN Basic. For the connection to PROFIBUS, the IM 155-6DP HF interface module with up to 7 AS-i master modules is used.

Since in many plants an ET 200SP station is provided with I/O, motor starter or other peripheral modules, the AS-i master modules are simply plugged in without any additional effort. There are countless possible combinations.

An AS-i Safety gateway can also be implemented without any problems by adding the safety-related module F-CM AS-i Safety ST in the ET 200SP station. This greatly simplifies the cabling and connection of distributed EMERGENCY STOP pushbuttons and protective door monitoring systems to a fail-safe CPU. The AS-i Safety application is completely configured in TIA Portal/STEP 7.

The ET 200SP modules CM AS-i Master ST and F-CM AS-i Safety ST (see from page 10/233) can of course also be used directly on an ET 200SP CPU or F-CPU, so that an extremely compact SIMATIC control system with AS-i bus connection can be set up.

For further application possibilities, see the brochure "The modular AS-i Master" at
<https://assets.new.siemens.com/siemens/assets/api/uuid:224667a8-5f20-4a68-8bfd-ae33dfac7a2/dfcp-b10157-00-as-i-master-144.pdf>.

More information, see
SIMATIC ET 200SP Manual Collection,
<https://support.industry.siemens.com/cs/ww/en/view/84133942>

Design

The CM AS-i Master ST module has an ET 200SP module enclosure with a width of 20 mm. A C0 type BaseUnit (BU) is required for use in the ET 200SP.

The communications module has LED displays for diagnostics, operation, AS-i voltage and AS-i slave status and offers informative front-side module inscription for

- Plain-text marking of the module type and function class
- 2D matrix code (Article No. and serial number)
- Circuit diagram
- Color coding module type communications module: light gray
- Hardware and firmware version
- Supported BaseUnit type BU: C0

Overview

Function

The CM AS-i Master ST communications module supports all specified functions of the AS-Interface specification V3.0.

The input/output values of the digital AS-i slaves can be activated via the cyclic process image. The values of the analog AS-i slaves are accessible via the cyclic process image or via data record transfer.

If required, master calls can be performed with the command interface, e.g. read/write parameters, read/write configuration.

Changeover of the operating mode, automatic application of the slave configuration and the re-addressing of a connected AS-i slave can be implemented via the online functions in STEP 7/TIA Portal.

For the implementation of modular machine concepts, the AS-i slaves can be activated or deactivated via the PLC program (option handling). The configuration of AS-i slaves can be modified while being executed, thus enabling variable machine setups and tool changing with integrated input/output modules during ongoing operation. AS-i input/output modules can be added to the system without deactivating the controller.

An existing AS-i installation can be read into the STEP 7 hardware configuration and adapted and documented in the project. Analog values are transmitted via the cyclic process image, the length of which is adjustable and extendable up to 288 bytes (depending on the interface module (IM) used).

Diagnostic information is accessed via automatic alarm indications, via the status information in the process image or via the graphical status display in the online diagnostics of the TIA Portal. The transmission quality of the AS-i network can also be read out. To avoid configuration errors, duplicate addresses can be detected on the AS-i network.

Configuration is possible with SIMATIC CPUs S7-300 up to S7-1500 and with a SINUMERIK 840D sl or other controller.

The online diagnostic status of the AS-i slaves can be displayed directly on the devices in the network view in TIA Portal.

Notes on security

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens products and solutions represent one component of such a concept.

For more information on industrial cybersecurity, see <https://www.siemens.com/cybersecurity-industry>.

Configuration

The following software is required for configuration of the CM AS-i Master ST module:


- STEP 7 (TIA Portal) or
- STEP 7 (Classic) or
- the GSD file of the ET 200SP with STEP 7 or another engineering tool

STEP 7 enables user-friendly configuration and diagnostics of the AS-i master and any connected slaves.

Alternatively, you can also apply the AS-Interface ACTUAL configuration as the TARGET configuration at the "touch of a button" via the online function integrated in the TIA Portal or an optional expansion button. Configuration with the GSD file is possible only with the button.

In the default setting, the CM AS-i Master ST module occupies 32 input/output bytes. To adapt the number and type of AS-i slaves used, the I/O address space can be reduced, or expanded up to 288 bytes..

Together with an ET 200SP CPU 1510SP, 1512SP, 1514SP or 1515SP PC, preprocessing of AS-i signals directly in the ET 200SP station and setting up of an independent AS-i station without a higher-level CPU are possible.

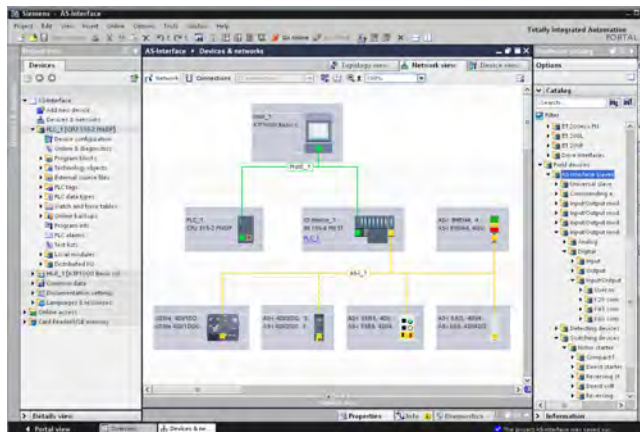

Configuration of an AS-Interface network with CM AS-i Master ST via the TIA Portal

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > CM AS-i Master ST for SIMATIC ET 200SP

Benefits

The CM AS-i Master ST communications module for ET 200SP enables modular, simple and high-performance expansion of AS-interface networks via engineering in the TIA Portal.

Up to 32 CM AS-i Master ST units can be plugged into one ET 200SP station with IM 155-6PN Standard. When using the IM 155-6PN High Feature, the number of CM AS-i Master ST in the ET 200SP station can be further increased. The maximum configuration depends on the interface module used. Multiple masters as well as single masters can thus be implemented in the ET 200SP depending on the number of modules.

Together with the interface module, a scalable PROFINET/AS-i Link or PROFIBUS/AS-i Link can be assembled.

For the connection of an AS-i network to systems with EtherNet/IP and Modbus TCP, the ET 200SP MultiFieldbus interface module IM155-6MF in combination with the CM AS-i Master ST module is available.


Using TIA Portal/STEP 7, the AS-i network is consistently configured and programmed in the SIMATIC controller with only one configuration tool.

The PRONETA PC program (for ET 200SP with PROFINET interface module) is available for convenient input/output testing during the commissioning of an AS-i network without a CPU, see <https://www.siemens.com/proneta>.

The CM AS-i Master ST module can be used in a system with PROFINET system redundancy S2. Furthermore, the CM AS-i Master ST module (from FW version V1.1.11 onwards or from FW version 2.0 onwards) can be used in a system with PROFINET system redundancy R1 with SIMATIC S7-1500R/H CPU.

For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser, see


<https://support.industry.siemens.com/cs/ww/en/view/109479103>.

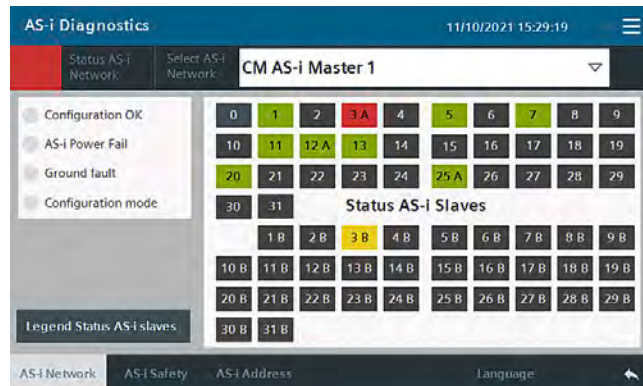

Diagnostic block for CM AS-i Master ST

Application

Configuration examples of AS-Interface networks with CM AS-i Master ST for SIMATIC ET 200SP

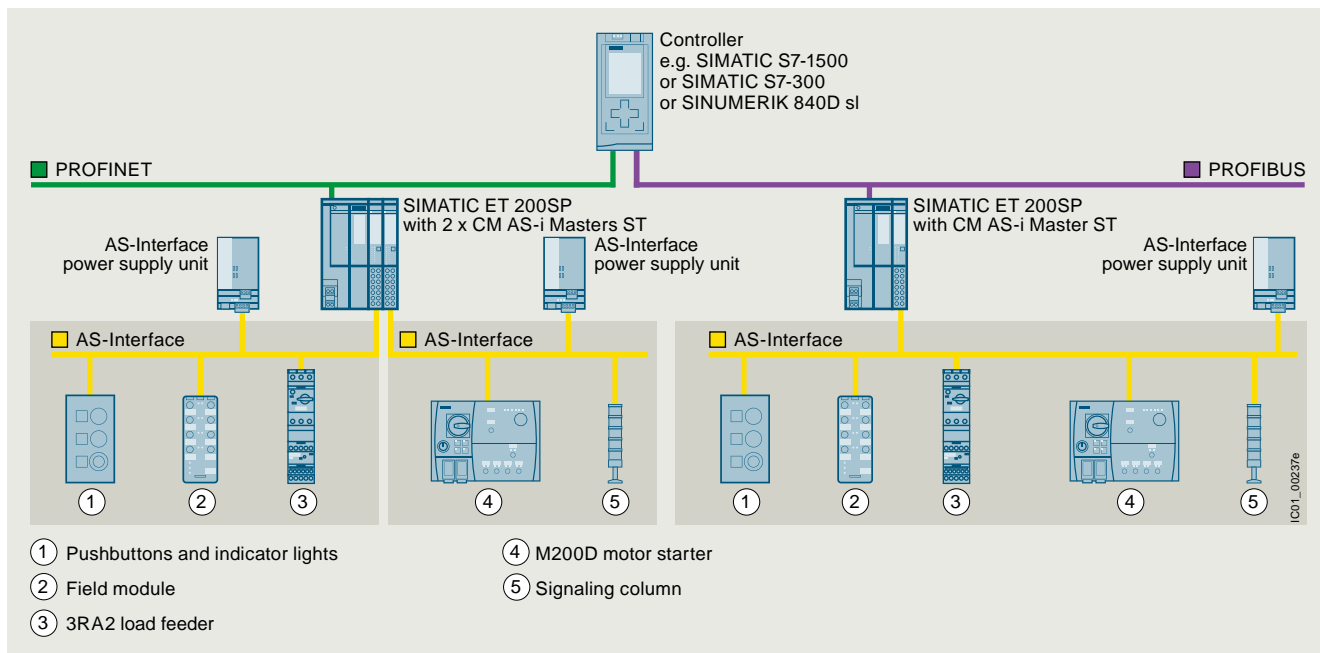

Configuration of AS-Interface networks under a SIMATIC ET 200SP

Ordering data	Article No.	Article No.	
CM AS-i Master ST communications module <ul style="list-style-type: none"> AS-Interface master for SIMATIC ET 200SP, can be plugged onto BaseUnit type C0 Corresponds to AS-Interface specification V3.0 Dimensions (W x H x D) mm: 20 x 73 x 58 	3RK7137-6SA00-0BC1		
Accessories			
BaseUnit BU20-P6+A2+4D <ul style="list-style-type: none"> BaseUnit (light), BU type C0 Suitable for the CM AS-i Master ST module For connection of the AS-Interface cable to the CM AS-i Master ST Start of an AS-i network, isolation of the AS-i voltage from the left-hand module With spring-loaded terminals 	6ES7193-6BP20-0DC0		
PROFINET IM 155-6PN Basic interface module <p>Max. 12 I/O modules, max. 32 bytes of I/O data per station</p> <ul style="list-style-type: none"> Including server module and 2 x RJ45 ports (supplied without RJ45 plug) 	6ES7155-6AR00-0AN0	PROFIBUS IM 155-6DP High Feature interface module <p>Max. 32 I/O modules, max. 244 bytes I/O data per station</p> <ul style="list-style-type: none"> Including server module and PROFIBUS plug 	6ES7155-6BA01-0CN0
PROFINET IM 155-6PN Standard interface modules <p>Max. 32 I/O modules, max. 1 440 bytes I/O data per station</p> <ul style="list-style-type: none"> Including server module and BusAdapter 2 x RJ45 (supplied without RJ45 plug) Including server module (BusAdapter must be ordered separately, see right) 	6ES7155-6AA02-0BN0 6ES7155-6AU02-0BN0	MultiFieldbus IM 155-6MF High Feature interface module <p>For operation on PROFINET, EtherNet/IP or Modbus TCP controllers, one slot for BusAdapter, max. 64 I/O modules, max. 1 440 bytes of I/O data per station</p> <ul style="list-style-type: none"> Including server module (BusAdapter must be ordered separately, see below) <p>For more information, see https://support.industry.siemens.com/cs/ww/en/view/109779189.</p>	6ES7155-6MU00-0CN0
PROFINET IM 155-6PN High Feature interface modules <p>Max. 64 I/O modules, max. 1 440 bytes I/O data per station</p> <ul style="list-style-type: none"> IM 155-6PN/2 High Feature 2-port IM with a BusAdapter slot, including server module (BusAdapter must be ordered separately, see right) IM 155-6PN/3 High Feature 3-port IM with two BusAdapter slots, including server module (BusAdapter must be ordered separately, see right) 	6ES7155-6AU01-0CN0 6ES7155-6AU30-0CN0	Bus adapters for PROFINET/Ethernet/Modbus TCP <p>For connection of the Ethernet cable to the PROFINET IM 155-6PN interface module and the MultiFieldbus IM 155-6MF interface module</p> <ul style="list-style-type: none"> Connection 2 x RJ45 (supplied without RJ45 plug) Connection 2 x FC (FastConnect) <p>For more BusAdapters with fiber optic cable connection, see https://mall.industry.siemens.com/mall/en/ww/Catalog/Products/10147556.</p>	6ES7193-6AR00-0AA0 6ES7193-6AF00-0AA0
PROFINET IM 155-6PN High Speed interface module <p>Max. 30 I/O modules, max. 968 bytes I/O data per station</p> <ul style="list-style-type: none"> Including server module (BusAdapter must be ordered separately, see right) 	6ES7155-6AU00-0DN0	AS-Interface addressing unit V3.0 <ul style="list-style-type: none"> For AS-Interface modules and sensors and actuators with integrated AS-Interface according to AS-i specification V3.0 For setting the AS-i address of standard slaves, and slaves with extended addressing mode (A/B slaves) With input/output test function and many other commissioning functions Battery operation with four batteries type AA (IEC LR6, NEDA 15) Degree of protection IP40 Dimensions (W x H x D) mm: 84 x 195 x 35 Scope of supply: <ul style="list-style-type: none"> - Addressing unit with four batteries - Addressing cable, with M12 plug to addressing plug (hollow plug), length 1.5 m 	3RK1904-2AB02

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > CM DP for ET 200SP CPU

Overview

- PROFIBUS DP master/slave with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps
- Expands the ET 200SP CPUs 1510SP-1 PN / 1512SP-1 PN by one PROFIBUS connection
- For communication with lower-level PROFIBUS devices at bandwidths of 9.6 Kbps to 12 Mbps
- Communication services:
 - PROFIBUS DP
 - PG/OP communication
 - S7 communication:
 - This makes it possible to establish communication between the ET 200SP CPU and other devices, for example those from the SIMATIC S7-300/400/1500 range.
- Time synchronization
- Simple programming and configuration over PROFIBUS
- Cross-network PG communication using S7 routing
- Data set routing

Ordering data**Article No.**

CM DP for ET 200SP CPU **6ES7545-5DA00-0AB0**

PROFIBUS DP master/slave with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps

Accessories

Equipment labeling plate **6ES7193-6LF30-0AW0**

10 sheets of 16 labels

Labeling strips

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer **6ES7193-6LR10-0AA0**

500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer **6ES7193-6LR10-0AG0**

1 000 labeling strips DIN A4, light gray, card, for inscription with laser printer **6ES7193-6LA10-0AA0**

1 000 labeling strips DIN A4, yellow, card, for inscription with laser printer **6ES7193-6LA10-0AG0**

PROFIBUS DP RS 485 bus connector

With 90° cable outlet, max. transfer rate 12 Mbps

- without PG interface
- with PG interface

6ES7972-0BA12-0XA0
6ES7972-0BB12-0XA0

With 90° cable outlet for FastConnect connection system, max. transfer rate 12 Mbps

- without PG interface, 1 unit
- without PG interface, 100 units
- with PG interface, 1 unit
- with PG interface, 100 units

6ES7972-0BA52-0XA0
6ES7972-0BA52-0XB0
6ES7972-0BB52-0XA0
6ES7972-0BB52-0XB0

FastConnect bus cable

6XV1830-0EH10

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

Mechanical coding elements

For automatic coding of I/O modules; spare part. 20 units

Type A

6ES7193-6KA00-3AA0

Type B

6ES7193-6KB00-3AA0

Type C

6ES7193-6KC00-3AA0

Type D

6ES7193-6KD00-3AA0

Technical specifications

Article number	6ES7545-5DA00-0AB0 ET 200SP, CM DP for ET 200SP CPU
General information	
Product type designation	CM PROFIBUS DP
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V13 Update 3
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
1. Interface	
Interface types	
• RS 485	Yes
Protocols	
• PROFIBUS DP master	Yes
• PROFIBUS DP slave	Yes
• SIMATIC communication	Yes
PROFIBUS DP master	
• Number of DP slaves, max.	125
Services	
- PG/OP communication	Yes
- Equidistance	No
- Isochronous mode	No
- Activation/deactivation of DP slaves	Yes
PROFIBUS DP slave	
• Transmission rate, max.	12 Mbit/s
• automatic baud rate search	Yes
• Address area, max.	120
• User data per address area, max.	128 byte
Services	
- PG/OP communication	Yes; Only with active interface
- Routing	Yes; Only with active interface
- S7 communication	Yes; Only with active interface
- Direct data exchange (slave-to- slave communication)	Yes; No subscriber possible - only passive publisher
- DPV1	Yes
Transfer memory	
- Inputs	244 byte
- Outputs	244 byte
Interface types	
RS 485	
• Transmission rate, max.	12 Mbit/s
• Cable length, max.	100 m
Protocols	
SIMATIC communication	
• S7 routing	Yes
• Data record routing	Yes

Article number	6ES7545-5DA00-0AB0 ET 200SP, CM DP for ET 200SP CPU
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Diagnostics indication LED	
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
between backplane bus and interface	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C; No condensation
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C; No condensation
• vertical installation, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions	
Width	35 mm
Height	117 mm
Depth	75 mm
Weights	
Weight, approx.	80 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > CP 1542SP-1

Overview



ISO	TCP/ UDP	PN	MRP	IT	IP-R	PG/OP	S7
	●			●		●	●

G. JK10_XX_50730

The CP 1542SP-1 communications processor connects the ET 200SP Distributed Controller with Industrial Ethernet networks.

The module can also be used for integrating the ET 200SP Distributed Controller into an IPv6-based network. All functions are configured using STEP 7 Professional V14 (TIA Portal) or higher.

The CP 1542SP-1 supports the following communication services:

- PG/OP communication
- S7 communication
- Open communication (Open User Communication)
- IT communication
 - Sending emails via SMTP for authentication on an email server (also with IPv6)
 - SNMPv1 for transfer of network analysis information
- Integration of the ET 200SP Distributed Controller into IPv6-based networks

Ordering data

Article No.

CP 1542SP-1 communications processor

6GK7542-6UX00-0XE0

For connection of SIMATIC S7 ET 200SP to Industrial Ethernet, open IE communication (TCP/IP, ISO-ON-TCP, UDP), PG/OP, S7 routing, IP broadcast/multicast, SNMPv1, DHCP, email, IPv4/IPv6, time synchronization via NTP, access to web server of CPU, BusAdapter required

Accessories

SIMATIC BusAdapter BA 2xRJ45
For PROFINET interface modules, standard function class or above; max. cable length 50 m

6ES7193-6AR00-0AA0

SIMATIC BusAdapter BA 2xFC
For PROFINET interface modules, standard function class or above; for increased vibration and EMC load rating; max. cable length 50 m

6ES7193-6AF00-0AA0

SIMATIC BusAdapter BA 2xSCRJ
For PROFINET interface modules, High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load rating; max. cable length 50 m (POF) or 100 m (PCF);

6ES7193-6AP00-0AA0

SIMATIC BusAdapter BA SCRJ/RJ45
For PROFINET interface modules, High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load rating; max. cable length 50 m (POF) or 100 m (PCF);

6ES7193-6AP20-0AA0

SIMATIC BusAdapter BA SCRJ/FC
For PROFINET interface modules, High Feature function class or above; with media converter FOC-Cu; for increased vibration and EMC load rating; max. cable length 50 m (POF, copper) or 100 m (PCF)

6ES7193-6AP40-0AA0

Ordering data	Article No.	Ordering data	Article No.
IE FC RJ45 plug 180 2 x 2 RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface <ul style="list-style-type: none"> • 1 pack = 1 unit • 1 pack = 10 units • 1 pack = 50 units 	6GK1901-1BB10-2AA0 6GK1901-1BB10-2AB0 6GK1901-1BB10-2AE0	Labeling strips 500 labeling strips on roll, light gray, for labeling with thermal transfer roll printer 500 labeling strips on roll, yellow, for labeling with thermal transfer roll printer 1000 labeling strips DIN A4, light gray, card, perforated, for labeling with laser printer 1000 labeling strips DIN A4, yellow, card, perforated, for labeling with laser printer	6ES7193-6LR10-0AA0 6ES7193-6LR10-0AG0 6ES7193-6LA10-0AA0 6ES7193-6LA10-0AG0
IE FC RJ45 plug 4 x 2 RJ45 plug-in connector for Industrial Ethernet (10/100/1000/10000 Mbps, Cat6 _A) with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface <ul style="list-style-type: none"> • 1 pack = 1 unit • 1 pack = 10 units • 1 pack = 50 units 	6GK1901-1BB12-2AA0 6GK1901-1BB12-2AB0 6GK1901-1BB12-2AE0	Equipment labeling plate 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter	6ES7193-6LF30-0AW0
IE FC TP standard cable GP 2 x 2 (type A) 4-core, shielded TP installation cable for connecting to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1840-2AH10	Spare parts Server module Terminates an ET 200SP station; included in the scope of delivery of the interface modules	6ES7193-6PA00-0AA0
IE FC TP standard cable GP 2 x 2 (type A) 4-core, shielded TP installation cable for connecting to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1840-2AH10	PE connection element for mounting rail 2000 mm 20 units	6ES7590-5AA00-0AA0
IE FC TP standard cable GP 4 x 2 8-core, shielded TP installation cable for connection to IE FC RJ45 modular outlet for universal applications; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m <ul style="list-style-type: none"> • AWG22, for connection to IE FC RJ45 modular outlet • AWG24, for connection to IE FC RJ45 plug 4 x 2 	6XV1870-2E 6XV1878-2A	Power supply connector Spare part; for connecting the 24 V DC supply voltage with push-in terminals	6ES7193-4JB00-0AA0
IE FC stripping tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	6GK1901-1GA00		

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Communication > CP 1542SP-1****Technical specifications**

Article number	6GK7542-6UX00-0XE0
product type designation	CP 1542SP-1
transfer rate	
transfer rate	
• at the 1st interface	10 ... 100 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	1
number of electrical connections	
• at the 1st interface according to Industrial Ethernet	2
type of electrical connection	
• at the 1st interface according to Industrial Ethernet	via ET 200SP bus adapter (RJ45, FC, SCRJ), integrated switch
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage	24 V
supply voltage	19.2 ... 28.8 V
power loss [W]	6 W
ambient conditions	
ambient temperature	
• for vertical installation during operation	-30 ... +50 °C
• for horizontally arranged busbars during operation	-30 ... +60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
width	60 mm
height	117 mm
depth	74 mm
net weight	0.18 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes
product features, product functions, product components general	
number of units	
• per CPU maximum	2
• note	2 CPUs can be plugged in per CPU, simultaneous operation with BA Send and CM DP is possible
performance data open communication	
number of possible connections for open communication	
• by means of T blocks maximum	32
data volume	
• as user data per ISO on TCP connection for open communication by means of T blocks maximum	65 536 byte

Article number	6GK7542-6UX00-0XE0
product type designation	CP 1542SP-1
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	16
• with OP connections maximum	16
performance data multi-protocol mode	
number of active connections with multi-protocol mode	32
product functions management, configuration, engineering	
product function MIB support	Yes
protocol is supported	
• SNMP v1	Yes
• SNMP v3	No
• DCP	Yes
• LLDP	Yes
configuration software	
• required	STEP 7 Professional V14 (TIA Portal) or higher
identification & maintenance function	
• I&MO - device-specific information	Yes
• I&M1 - higher level designation/location designation	Yes
product functions diagnostics	
product function web-based diagnostics	Yes; via ET 200SP CPU
product functions security	
product function	
• blocking of communication via physical ports	Yes
product functions time	
product function SICLOCK support	Yes
product function pass on time synchronization	No
protocol is supported	
• NTP	Yes
• NTP (secure)	No
time synchronization	
• from NTP-server	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
• total	207.05 kg
• during manufacturing	19.13 kg
• during operation	187.74 kg
• after end of life	0.18 kg

Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7
	●			●		●	●

G...JK10...XX...507930

The CP 1543SP-1 communications processor connects the ET 200SP Distributed Controller with Industrial Ethernet networks. By combining a variety of security features such as an SPI (Stateful Packet Inspection) firewall, VPN and data encryption protocols (e.g. SNMPv3), the communications processor protects individual ET 200SP distributed controllers or even entire automation cells against unauthorized access.

The module can also be used for integrating the ET 200SP Distributed Controller into an IPv6-based network. All functions can be configured with STEP 7 Professional, V14 (TIA Portal) and higher.

The CP 1543SP-1 supports the following communication services:

- PG/OP communication
- S7 communication
- Open communication (Open User Communication)
- IT communication
 - Sending emails via SMTP or ESMTP with "SMTP-Auth" for authentication on an email server (also with IPv6)
- Support of SINEMA Remote Connect with autoconfiguration
- Security Integrated
 - Stateful Packet Inspection Firewall
 - Secure communication via VPN (IPsec)
- Protocols for secure communication
 - Secure access to the web server of the CPU via the HTTPS protocol
 - Secure transfer of the time of day (NTP)
 - SNMPv3 for tap-proof transfer of network analysis information
- Integration of the ET 200SP Distributed Controller into IPv6-based networks

Ordering data

Article No.

CP 1543SP-1 communications processor **6GK7543-6WX00-0XE0**

CP 1543SP-1 communications processor for connecting SIMATIC S7 ET 200SP to Industrial Ethernet, Security (firewall and VPN), open IE communication (TCP/IP, ISO-on-TCP, UDP) PG/OP, S7 routing, IP broadcast/multicast, SNMPv1/v3, DHCP, secure email, IPV4/IPV6, time synchronization via NTP, access to web server of CPU, BusAdapter required

Accessories**SIMATIC BusAdapter BA 2xRJ45** **6ES7193-6AR00-0AA0**

For PROFINET interface modules, standard function class or above; max. cable length 50 m

SIMATIC BusAdapter BA 2xFC **6ES7193-6AF00-0AA0**

For PROFINET interface modules, standard function class or above; for increased vibration and EMC load rating; max. cable length 50 m

SIMATIC BusAdapter BA 2xSCRJ **6ES7193-6AP00-0AA0**

For PROFINET interface modules, High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load rating; max. cable length 50 m (POF) or 100 m (PCF)

SIMATIC BusAdapter BA SCRJ/RJ45 **6ES7193-6AP20-0AA0**

For PROFINET interface modules, High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load rating; max. cable length 50 m (POF) or 100 m (PCF)

SIMATIC BusAdapter BA SCRJ/FC **6ES7193-6AP40-0AA0**

For PROFINET interface modules, High Feature function class or above; with media converter FOC-Cu; for increased vibration and EMC load rating; max. cable length 50 m (POF, copper) or 100 m (PCF)

IE FC RJ45 plug 180 2 x 2

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > CP 1543SP-1

Ordering data**Article No.****Article No.****IE FC RJ45 plug 4 x 2**

RJ45 plug-in connector for Industrial Ethernet (10/100/1000/10000 Mbps, Cat6_A) with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB12-2AA0
6GK1901-1BB12-2AB0
6GK1901-1BB12-2AE0

IE FC TP standard cable GP 2 x 2 (type A)**6XV1840-2AH10**

4-core, shielded TP installation cable for connection to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

IE FC TP standard cable GP 4 x 2

8-core, shielded TP installation cable for connection to IE FC RJ45 modular outlet for universal applications; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

- AWG22, for connection to IE FC RJ45 modular outlet
- AWG24, for connection to IE FC RJ45 plug 4 x 2

6XV1870-2E**6XV1878-2A****IE FC stripping tool****6GK1901-1GA00**

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

Labeling strips

500 labeling strips on roll, light gray, for labeling with thermal transfer roll printer

6ES7193-6LR10-0AA0

500 labeling strips on roll, yellow, for labeling with thermal transfer roll printer

6ES7193-6LR10-0AG0

1000 labeling strips DIN A4, light gray, card, perforated, for labeling with laser printer

6ES7193-6LA10-0AA0

1000 labeling strips DIN A4, yellow, card, perforated, for labeling with laser printer

6ES7193-6LA10-0AG0**Equipment labeling plate****6ES7193-6LF30-0AW0**

10 sheets of 16 labels, for printing with thermal transfer card printer or plotter

Spare parts**Server module****6ES7193-6PA00-0AA0**

Terminates an ET 200SP station; included in the scope of delivery of the interface modules

PE connection element for mounting rail 2000 mm**6ES7590-5AA00-0AA0**

20 units

Power supply connector**6ES7193-4JB00-0AA0**

Spare part; for connecting the 24 V DC supply voltage; with push-in terminals

Technical specifications

Article number	6GK7543-6WX00-0XE0
product type designation	CP 1543SP-1
transfer rate	
transfer rate	
• at the 1st interface	10 ... 100 Mbit/s
interfaces	
number of interfaces according to Industrial Ethernet	1
number of electrical connections	
• at the 1st interface according to Industrial Ethernet	2
type of electrical connection	
• at the 1st interface according to Industrial Ethernet	via ET 200SP bus adapter (RJ45, FC, SCRJ), integrated switch
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
supply voltage	24 V
supply voltage	19.2 ... 28.8 V
power loss [W]	6 W
ambient conditions	
ambient temperature	
• for vertical installation during operation	-30 ... +50 °C
• for horizontally arranged busbars during operation	-30 ... +60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity	
• at 25 °C without condensation during operation maximum	95 %
protection class IP	IP20
design, dimensions and weights	
width	60 mm
height	117 mm
depth	74 mm
net weight	0.18 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes
product features, product functions, product components general	
number of units	
• per CPU maximum	2
• note	2 CPUs can be plugged in per CPU, simultaneous operation with BA Send and CM DP is possible
performance data open communication	
number of possible connections for open communication	
• by means of T blocks maximum	32
data volume	
• as user data per ISO on TCP connection for open communication by means of T blocks maximum	65 536 byte
performance data S7 communication	
number of possible connections for S7 communication	
• maximum	16
• with OP connections maximum	16
performance data multi-protocol mode	
number of active connections with multi-protocol mode	32

Article number	6GK7543-6WX00-0XE0
product type designation	CP 1543SP-1
performance data IT functions	
number of possible connections	
• as email client maximum	1
product functions management, configuration, engineering	
product function MIB support	Yes
protocol is supported	
• SNMP v1	Yes
• SNMP v3	Yes
• DCP	Yes
• LLDP	Yes
configuration software	
• required	STEP 7 Professional V14 (TIA Portal) or higher
identification & maintenance function	
• I&M0 - device-specific information	Yes
• I&M1 - higher level designation/ location designation	Yes
product functions diagnostics	
product function web-based diagnostics	Yes; via ET 200SP CPU
product functions security	
firewall version	stateful inspection
product function with VPN connection	IPsec, SINEMA RC
type of encryption algorithms with VPN connection	AES-256, AES-192, AES-128, 3DES-168, DES-56
type of authentication procedure with VPN connection	Preshared key (PSK), X.509v3 certificates
type of hashing algorithms with VPN connection	MD5, SHA-1
number of possible connections with VPN connection	4
product function	
• switch-off of non-required services	Yes
• blocking of communication via physical ports	Yes
• log file for unauthorized access	Yes
product functions time	
product function SICLOCK support	Yes
product function pass on time synchronization	No
protocol is supported	
• NTP	Yes
• NTP (secure)	Yes
time synchronization	
• from NTP-server	Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
• total	207.05 kg
• during manufacturing	19.13 kg
• during operation	187.74 kg
• after end of life	0.18 kg

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > CP 1542SP-1 IRC

Overview



ISO	TCP/UDP	PN	MRP	IT	IP-R	PG/OP	S7
	●			●		●	●

The CP 1542SP-1 IRC communications processor connects the ET 200SP Distributed Controller with Industrial Ethernet networks. In addition, control centers can be connected using various telecontrol protocols.

The CP is characterized by the following:

- Ethernet-based connection to TeleControl Server Basic, e.g. via internet
- Ethernet-based connection to the control center via SINAUT ST7, IEC 60870-5-104 or DNP3 protocol
- Data transfer of measured values, control variables or alarms optimized for telecontrol systems
- Automatic sending of alert emails
- Data buffering of up to 100,000 values ensures a secure database, even with temporary connection failures
- Clearly laid out LED signaling for fast and easy diagnostics
- Fast commissioning thanks to easy configuration using STEP 7

The module can also be used for integrating the ET 200SP Distributed Controller into an IPv6-based network. All functions are configured using STEP 7 Professional V14 (TIA Portal) or higher.

The CP 1542SP-1 IRC supports the following communications services:

- Support of multiple telecontrol protocols such as SINAUT ST7, DNP3, IEC 60870-5-104 and TeleControl Basic
- PG/OP communication
- S7 communication
- Open communication (Open User Communication)
- IT communication
 - Sending emails via SMTP or SMTPS with "SMTP-Auth" for authentication on an email server (also with IPv6)
 - Email transfer with addressing by program block
 - Email transfer via "Notifications" (alerts)
- Support of SINEMA Remote Connect with autoconfiguration

Ordering data

Article No.

CP 1542SP-1 IRC communications processor

6GK7542-6VX00-0XE0

CP 1542SP-1 IRC communications processor for connection of SIMATIC S7-ET 200SP to Industrial Ethernet, TeleControl Server Basic, IEC 60870-5-104 or DNP3 protocol to a control center; open IE communication (TCP/IP, ISO-on-TCP, UDP), IP broadcast/multicast, SNMPV1, DHCP, secure email, IPV4/IPV6, time synchronization via NTP, access to web server of CPU, BusAdapter required

Accessories

SIMATIC BusAdapter BA 2xRJ45

6ES7193-6AR00-0AA0

For PROFINET interface modules, standard function class or above; max. cable length 50 m

SIMATIC BusAdapter BA 2xFC

6ES7193-6AF00-0AA0

For PROFINET interface modules, standard function class or above; for increased vibration and EMC load rating; max. cable length 50 m

SIMATIC BusAdapter BA 2xSCRJ

6ES7193-6AP00-0AA0

For PROFINET interface modules from High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load capacity; max. cable length 50 m (POF) or 100 m (PCF)

SIMATIC BusAdapter BA SCRJ/RJ45

6ES7193-6AP20-0AA0

For PROFINET interface modules from High Feature function class or above; fiber-optic cable connection for POF or PCF; for increased vibration and EMC load capacity; max. cable length 50 m (POF) or 100 m (PCF)

SIMATIC BusAdapter BA SCRJ/FC

6ES7193-6AP40-0AA0

For PROFINET interface modules, High Feature function class or above; with media converter FOC-Cu; for increased vibration and EMC load rating; max. cable length 50 m (POF, copper) or 100 m (PCF)

IE FC RJ45 plug 180 2 x 2

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0
6GK1901-1BB10-2AB0
6GK1901-1BB10-2AE0

Ordering data	Article No.	Ordering data	Article No.
IE FC RJ45 plug 4 x 2 RJ45 plug-in connector for Industrial Ethernet (10/100/1000/10000 Mbps, Cat6 _A) with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPU with Industrial Ethernet interface <ul style="list-style-type: none"> • 1 pack = 1 unit • 1 pack = 10 units • 1 pack = 50 units 	6GK1901-1BB12-2AA0 6GK1901-1BB12-2AB0 6GK1901-1BB12-2AE0	Labeling strips 500 labeling strips on roll, light gray, for labeling with thermal transfer roll printer 500 labeling strips on roll, yellow, for labeling with thermal transfer roll printer 1000 labeling strips DIN A4, light gray, card, perforated, for labeling with laser printer 1000 labeling strips DIN A4, yellow, card, perforated, for labeling with laser printer	6ES7193-6LR10-0AA0 6ES7193-6LR10-0AG0 6ES7193-6LA10-0AA0 6ES7193-6LA10-0AG0
IE FC TP standard cable GP 2 x 2 (type A) 4-core, shielded TP installation cable for connecting to IE FC RJ45 outlet/IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1840-2AH10	Equipment labeling plate 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter	6ES7193-6LF30-0AW0
IE FC TP standard cable GP 4 x 2 8-core, shielded TP installation cable for connection to IE FC RJ45 modular outlet for universal applications; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m <ul style="list-style-type: none"> • AWG22, for connection to IE FC RJ45 modular outlet • AWG24, for connection to IE FC RJ45 plug 4 x 2 	6XV1870-2E 6XV1878-2A	Spare parts Server module Terminates an ET 200SP station; included in the scope of delivery of the interface modules	6ES7193-6PA00-0AA0
IE FC stripping tool Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables	6GK1901-1GA00	PE connection element for mounting rail 2000 mm 20 units	6ES7590-5AA00-0AA0
		Power supply connector Spare part; for connecting the 24 V DC supply voltage with push-in terminals	6ES7193-4JB00-0AA0

10

Technical specifications

Article number	6GK7542-6VX00-0XE0	Article number	6GK7542-6VX00-0XE0
product type designation	CP 1542SP-1 IRC	product type designation	CP 1542SP-1 IRC
transfer rate		ambient conditions	
transfer rate		ambient temperature	
• at the 1st interface	10 ... 100 Mbit/s	• for vertical installation during operation	-30 ... +50 °C
interfaces		• for horizontally arranged busbars during operation	-30 ... +60 °C
number of interfaces according to Industrial Ethernet	1	• during storage	-40 ... +70 °C
number of electrical connections		• during transport	-40 ... +70 °C
• at the 1st interface according to Industrial Ethernet	2	relative humidity	
type of electrical connection		• at 25 °C without condensation during operation maximum	95 %
• at the 1st interface according to Industrial Ethernet	via ET 200SP bus adapter (RJ45, FC, SCRJ), integrated switch	protection class IP	IP20
supply voltage, current consumption, power loss		design, dimensions and weights	
type of voltage of the supply voltage	DC	width	60 mm
supply voltage	24 V	height	117 mm
supply voltage	19.2 ... 28.8 V	depth	74 mm
power loss [W]	6 W	net weight	0.18 kg
		fastening method	
		• 35 mm top hat DIN rail mounting	Yes

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > CP 1542SP-1 IRC

Technical specifications

Article number	6GK7542-6VX00-0XE0
product type designation	CP 1542SP-1 IRC
product features, product functions, product components general	
number of units	2
<ul style="list-style-type: none"> per CPU maximum note 	2 CPs can be plugged in per CPU, simultaneous operation with BA Send and CM DP is possible
performance data open communication	
number of possible connections for open communication	32
<ul style="list-style-type: none"> by means of T blocks maximum data volume as user data per ISO on TCP connection for open communication by means of T blocks maximum 	65 536 byte
performance data S7 communication	
number of possible connections for S7 communication	16
<ul style="list-style-type: none"> maximum with OP connections maximum 	16
performance data multi-protocol mode	
number of active connections with multi-protocol mode	32
performance data IT functions	
number of possible connections	1
<ul style="list-style-type: none"> as email client maximum 	1
performance data telecontrol	
suitability for use	No
<ul style="list-style-type: none"> node station substation TIM control center 	Yes Yes No
control center connection	IEC 60870-5, DNP3, (Modbus TCP by block solutions of the CPU) capable control stations, connection to Telecontrol Server Basic and ST7 capable control station
<ul style="list-style-type: none"> by means of a permanent connection by means of demand-oriented connection note 	supported supported Connection to SCADA system by IEC 60870-5 104, DNP3, Telecontrol Server Basic and ST7 capable control center
protocol is supported	Yes
<ul style="list-style-type: none"> DNP3 IEC 60870-5 SINAUT ST7 protocol 	Yes Yes Yes
product function data buffering if connection is aborted	Yes; TCSB 64000 events, SINAUT ST7 32000 telegrams, DNP3 100000 events, IEC 60870-5 100000 events
number of data points per station maximum	1 500
number of stations for direct communication with Telecontrol Server Basic	3
<ul style="list-style-type: none"> in send direction maximum in receive direction maximum 	3 15

Article number	6GK7542-6VX00-0XE0
product type designation	CP 1542SP-1 IRC
product functions management, configuration, engineering	
product function MIB support	Yes
protocol is supported	Yes
<ul style="list-style-type: none"> SNMP v1 SNMP v3 DCP LLDP 	Yes Yes Yes Yes
configuration software	STEP 7 Professional V14 (TIA Portal) or higher
<ul style="list-style-type: none"> required 	STEP 7 Professional V14 (TIA Portal) or higher
identification & maintenance function	Yes
<ul style="list-style-type: none"> I&M0 - device-specific information I&M1 - higher level designation/location designation 	Yes Yes
product functions diagnostics	
product function web-based diagnostics	Yes; via ET 200SP CPU
product functions security	
product function with VPN connection	SINEMA RC
<ul style="list-style-type: none"> blocking of communication via physical ports 	Yes
product functions time	
product function SICLOCK support	Yes
product function pass on time synchronization	Yes
protocol is supported	Yes
<ul style="list-style-type: none"> NTP NTP (secure) 	Yes No
time synchronization	Yes
<ul style="list-style-type: none"> from NTP-server from control center 	Yes Yes
standards, specifications, approvals hazardous environments	
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
certificate of suitability CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	207.05 kg
<ul style="list-style-type: none"> total during manufacturing during operation after end of life 	19.13 kg 187.74 kg 0.18 kg

Overview



- Space-saving access point, suitable for applications where the device is to be mounted in the control cabinet

Ordering data

Article No.

SCALANCE W761 access points

IWLAN access point with built-in wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 150 Mbps; WPA2/AES; degree of protection IP20 (0 °C to +55 °C); scope of delivery: Mounting hardware, 3-pin screw terminal for 24 V DC; manual on CD-ROM; German/English

SCALANCE W761-1 RJ45

IWLAN access point with one built-in wireless interface

- Country approvals for operation outside the USA
- Country approvals for operation within the USA¹⁾

6GK5761-1FC00-0AA0**6GK5761-1FC00-0AB0****Accessories****IE FC RJ45 plug 180 2 x 2**

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with a 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0**6GK1901-1BB10-2AB0****6GK1901-1BB10-2AE0****IE FC standard cable GP 2 x 2****6XV1840-2AH10**

4-core, shielded TP installation cable for connection to IE FC RJ45 outlet plug/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

IE FC stripping tool**6GK1901-1GA00**

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

Antennas and additional IWLAN accessories

See Industrial Wireless LAN/Accessories

¹⁾ Please note country approvals under <http://www.siemens.com/wireless-approvals>

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Communication > SCALANCE W761 RJ45 for the control cabinet****Technical specifications**

Article number product type designation ¹⁾	6GK5761-1FC00-0AA0 W761-1 RJ45	6GK5761-1FC00-0AB0 W761-1 RJ45 (USA)
transfer rate		
transfer rate		
• with WLAN maximum	150 Mbit/s	150 Mbit/s
• for Industrial Ethernet	10 Mbit/s, 100 Mbit/s	10 Mbit/s, 100 Mbit/s
transfer rate for Industrial Ethernet		
• minimum	10 Mbit/s	10 Mbit/s
• maximum	100 Mbit/s	100 Mbit/s
interfaces		
number of electrical connections		
• for network components or terminal equipment	1	1
• for power supply	1	1
• for redundant voltage supply	0	0
type of electrical connection		
• for network components or terminal equipment	RJ45 socket	RJ45 socket
• for power supply	3-pole screw terminal	3-pole screw terminal
memory		
design of the removable storage		
• C-PLUG	No	No
• KEY-PLUG	No	No
interfaces wireless		
number of radio cards permanently installed	1	1
number of electrical connections for external antenna(s)	1	1
type of electrical connection for external antenna(s)	R-SMA (socket)	R-SMA (socket)
product feature external antenna can be mounted directly on device	Yes	Yes
supply voltage, current consumption, power loss		
type of voltage of the supply voltage	DC	DC
consumed current		
• at DC at 24 V typical	0.15 A	0.15 A
power loss [W]		
• at DC at 24 V typical	3.6 W	3.6 W
supply voltage 1		
• from terminal block	19.2 V	19.2 V
supply voltage 2		
• from terminal block	28.8 V	28.8 V
ambient conditions		
ambient temperature		
• during operation	0 ... 55 °C	0 ... 55 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C
• during transport	-40 ... +85 °C	-40 ... +85 °C
relative humidity at 25 °C without condensation during operation maximum	95 %	95 %
ambient condition for operation	When used under hazardous conditions (Zone 2), the SCALANCE W761-1 RJ45 or W72x-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.	When used under hazardous conditions (Zone 2), the SCALANCE W761-1 RJ45 or W72x-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.
protection class IP	IP20	IP20

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

Technical specifications

Article number	6GK5761-1FC00-0AA0	6GK5761-1FC00-0AB0
product type designation ¹⁾	W761-1 RJ45	W761-1 RJ45 (USA)
design, dimensions and weights		
width	50 mm	50 mm
height	114 mm	114 mm
depth	74 mm	74 mm
width of the enclosure without antenna	50 mm	50 mm
height of the enclosure without antenna	114 mm	114 mm
depth of the enclosure without antenna	74 mm	74 mm
net weight	0.13 kg	0.13 kg
fastening method		
• S7-300 rail mounting	No	No
• S7-1500 rail mounting	No	No
• 35 mm top hat DIN rail mounting	Yes	Yes
• wall mounting	No	No
radio frequencies		
operating frequency		
• for WLAN in 2.4 GHz frequency band	2.41 ... 2.48 GHz; depending on the country approvals	2.41 ... 2.48 GHz; depending on the country approvals
• for WLAN in 5 GHz frequency band	4.9 ... 5.8 GHz; depending on the country approvals	4.9 ... 5.8 GHz; depending on the country approvals
product features, product functions, product components general		
product function Access Point Mode	Yes	Yes
product function client Mode	Yes	Yes
number of SSIDs	1	1
product function		
• iPCF Access Point	No	No
• iPCF client	No	No
• iPCF-MC Access Point	No	No
• iPCF-MC client	No	No
product function iREF	No	No
product function iPRP	No	No
product functions management, configuration, engineering		
number of manageable IP addresses in client	4	4
product function		
• CLI	Yes	Yes
• web-based management	Yes	Yes
• MIB support	Yes	Yes
• TRAPs via email	Yes	Yes
• configuration with STEP 7	Yes	Yes
• configuration with STEP 7 in the TIA Portal	Yes	Yes
• operation with IWLAN controller	No	No
• operation with Enterasys WLAN controller	No	No
• forced roaming on IP down with IWLAN	Yes	Yes
• forced roaming on link down with IWLAN	Yes	Yes
• WDS	Yes	Yes
protocol is supported		
• Address Resolution Protocol (ARP)	Yes	Yes
• ICMP	Yes	Yes
• Telnet	Yes	Yes
• HTTP	Yes	Yes
• HTTPS	Yes	Yes
• TFTP	Yes	Yes
• DCP	Yes	Yes
• LLDP	Yes	Yes

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Communication > SCALANCE W761 RJ45 for the control cabinet****Technical specifications**

Article number	6GK5761-1FC00-0AA0	6GK5761-1FC00-0AB0
product type designation ¹⁾	W761-1 RJ45	W761-1 RJ45 (USA)
identification & maintenance function		
• I&M0 - device-specific information	Yes	Yes
• I&M1 - higher level designation/location designation	Yes	Yes
product functions diagnostics		
product function		
• PROFINET IO diagnosis	No	No
• link check	No	No
• connection monitoring IP-Alive	No	No
• localization via Aeroscout	No	No
• SysLog	Yes	Yes
protocol is supported		
• SNMP v1	Yes	Yes
• SNMP v2	Yes	Yes
• SNMP v3	Yes	Yes
product functions VLAN		
product function		
• function VLAN with IWLAN	Yes	Yes
product functions DHCP		
product function		
• DHCP client	Yes	Yes
• DHCP server	Yes	Yes
• DHCP Option 82	Yes	Yes
product functions redundancy		
protocol is supported		
• STP/RSTP	Yes	Yes
• MSTP	Yes	Yes
• RSTP	Yes	Yes
product functions security		
product function		
• ACL - MAC-based	Yes	Yes
• management security, ACL-IP based	Yes	Yes
• IEEE 802.1x (radius)	Yes	Yes
• NAT/NAPT	Yes	Yes
• access protection according to IEEE802.11i	Yes	Yes
• WPA/WPA2	Yes	Yes
• TKIP/AES	Yes	Yes
protocol is supported		
• SSH	Yes	Yes
• RADIUS	Yes	Yes
product functions time		
protocol is supported		
• NTP	Yes	Yes
• SNTP	Yes	Yes
• SIMATIC time synchronization (SIMATIC Time)	Yes	Yes

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

Technical specifications

Article number	6GK5761-1FC00-0AA0	6GK5761-1FC00-0AB0
product type designation ¹⁾	W761-1 RJ45	W761-1 RJ45 (USA)
standards, specifications, approvals		
standard		
• for FM	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X
• for safety from CSA and UL certificate of suitability	UL 60950-1 E115352, CSA C22.2 No. 60950-1	UL 60950-1 E115352, CSA C22.2 No. 60950-1
• EC Declaration of Conformity	Yes	Yes
• CE marking	Yes	Yes
• C-Tick	Yes	Yes
• E1 approval	No	No
• railway application in accordance with EN 50155	No	No
• railway application in accordance with EN 50121-4	No	No
• NEMA TS2	No	No
• IEC 61375	No	No
• IEC 61850-3	No	No
• NEMA4X	No	No
• Power-over-Ethernet according to IEEE802.3at for type 1 and IEEE802.3af	No	No
• Power-over-Ethernet according to IEEE802.3at for type 2	No	No
standard for wireless communication		
• IEEE 802.11a	Yes	Yes
• IEEE 802.11b	Yes	Yes
• IEEE 802.11e	Yes	Yes
• IEEE 802.11g	Yes	Yes
• IEEE 802.11h	Yes	Yes
• IEEE 802.11i	Yes	Yes
• IEEE 802.11n	Yes	Yes
wireless approval	You will find the current list of countries at: http://www.siemens.com/wireless-approvals	You will find the current list of countries at: http://www.siemens.com/wireless-approvals
standards, specifications, approvals marine classification		
Marine classification association		
• American Bureau of Shipping Europe Ltd. (ABS)	No	No
• French marine classification society (BV)	No	No
• DNV GL	No	No
• Korean Register of Shipping (KRS)	No	No
• Lloyds Register of Shipping (LRS)	No	No
• Nippon Kaiji Kyokai (NK)	No	No
• Polski Rejestr Statkow (PRS)	No	No
• Royal Institution of Naval Architects (RINA)	No	No
standards, specifications, approvals hazardous environments		
standard for hazardous zone		
•	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X
• from CSA and UL	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480
certificate of suitability CCC for hazardous zone according to GB standard		
•	Yes; GB3836.1, GB3836.8	Yes; GB3836.1, GB3836.8
• as marking	Ex nA IIC T4 Gc	Ex nA IIC T4 Gc
accessories		
accessories	24 V DC screw terminal included in scope of delivery	24 V DC screw terminal included in scope of delivery

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > SCALANCE W722 RJ45 for the control cabinet

Overview

- Space-saving client module, suitable for applications where the device is to be mounted in the control cabinet
- Equipped with iFeatures



ET 200SP station with SCALANCE W722 RJ45

Ordering data**Article No.****SCALANCE W722 client modules**

IWLAN Ethernet client modules with iFeatures support and built-in wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 150 Mbps; WPA2/AES; degree of protection IP20 (0 °C to +55 °C); scope of delivery: Mounting hardware, 3-pin screw terminal for 24 V DC; manual on CD-ROM; German/English

SCALANCE W722-1 RJ45

For managing the radio link with iFeatures from a connected device with Industrial Ethernet connection

- Country approvals for operation outside the USA
- Country approvals for operation within the USA¹⁾
- Country approvals for operation in Israel¹⁾

6GK5722-1FC00-0AA0**6GK5722-1FC00-0AB0****6GK5722-1FC00-0AC0****Accessories****IE FC RJ45 plug 180 2 x 2**

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with a 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0**6GK1901-1BB10-2AB0****6GK1901-1BB10-2AE0****IE FC standard cable GP 2 x 2**

4-core, shielded TP installation cable for connection to IE FC RJ45 outlet plug/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

6XV1840-2AH10**IE FC stripping tool**

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

6GK1901-1GA00**Antennas and additional IWLAN accessories**

See Industrial Wireless LAN/Accessories

¹⁾ Please note country approvals under <http://www.siemens.com/wireless-approvals>

Technical specifications

Article number product type designation ¹⁾	6GK5722-1FC00-0AA0 W722-1 RJ45	6GK5722-1FC00-0AB0 W722-1 RJ45 (USA)	6GK5722-1FC00-0AC0 W722-1 RJ45 (ISR)
transfer rate			
transfer rate			
• with WLAN maximum	150 Mbit/s	150 Mbit/s	150 Mbit/s
• for Industrial Ethernet	10 Mbit/s, 100 Mbit/s	10 Mbit/s, 100 Mbit/s	10 Mbit/s, 100 Mbit/s
transfer rate for Industrial Ethernet			
• minimum	10 Mbit/s	10 Mbit/s	10 Mbit/s
• maximum	100 Mbit/s	100 Mbit/s	100 Mbit/s
interfaces			
number of electrical connections			
• for network components or terminal equipment	1	1	1
• for power supply	1	1	1
• for redundant voltage supply	0	0	0
type of electrical connection			
• for network components or terminal equipment	RJ45 socket	RJ45 socket	RJ45 socket
• for power supply	3-pole screw terminal	3-pole screw terminal	3-pole screw terminal
memory			
design of the removable storage			
• C-PLUG	No	No	No
• KEY-PLUG	No	No	No
interfaces wireless			
number of radio cards permanently installed	1	1	1
number of electrical connections for external antenna(s)	1	1	1
type of electrical connection for external antenna(s)	R-SMA (socket)	R-SMA (socket)	R-SMA (socket)
product feature external antenna can be mounted directly on device	Yes	Yes	Yes
supply voltage, current consumption, power loss			
type of voltage of the supply voltage	DC	DC	DC
consumed current			
• at DC at 24 V typical	0.15 A	0.15 A	0.15 A
power loss [W]			
• at DC at 24 V typical	3.6 W	3.6 W	3.6 W
supply voltage 1			
• from terminal block	19.2 V	19.2 V	19.2 V
supply voltage 2			
• from terminal block	28.8 V	28.8 V	28.8 V
ambient conditions			
ambient temperature			
• during operation	0 ... 55 °C	0 ... 55 °C	0 ... 55 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
• during transport	-40 ... +85 °C	-40 ... +85 °C	-40 ... +85 °C
relative humidity at 25 °C without condensation during operation maximum	95 %	95 %	95 %
ambient condition for operation	When used under hazardous conditions (Zone 2), the SCALANCE W761-1 RJ45 or W72x-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.	When used under hazardous conditions (Zone 2), the SCALANCE W761-1 RJ45 or W72x-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.	When used under hazardous conditions (Zone 2), the SCALANCE W761-1 RJ45 or W72x-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.
protection class IP	IP20	IP20	IP20

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Communication > SCALANCE W722 RJ45 for the control cabinet****Technical specifications**

Article number	6GK5722-1FC00-0AA0	6GK5722-1FC00-0AB0	6GK5722-1FC00-0AC0
product type designation ¹⁾	W722-1 RJ45	W722-1 RJ45 (USA)	W722-1 RJ45 (ISR)
design, dimensions and weights			
width	50 mm	50 mm	50 mm
height	114 mm	114 mm	114 mm
depth	74 mm	74 mm	74 mm
width of the enclosure without antenna	50 mm	50 mm	50 mm
height of the enclosure without antenna	114 mm	114 mm	114 mm
depth of the enclosure without antenna	74 mm	74 mm	74 mm
net weight	0.13 kg	0.13 kg	0.13 kg
fastening method			
• S7-300 rail mounting	No	No	No
• S7-1500 rail mounting	No	No	No
• 35 mm top hat DIN rail mounting	Yes	Yes	Yes
• wall mounting	No	No	No
radio frequencies			
operating frequency			
• for WLAN in 2.4 GHz frequency band	2.41 ... 2.48 GHz; depending on the country approvals	2.41 ... 2.48 GHz; depending on the country approvals	2.41 ... 2.48 GHz; depending on the country approvals
• for WLAN in 5 GHz frequency band	4.9 ... 5.8 GHz; depending on the country approvals	4.9 ... 5.8 GHz; depending on the country approvals	4.9 ... 5.8 GHz; depending on the country approvals
product features, product functions, product components general			
product function Access Point Mode	No	No	No
product function client Mode	Yes	Yes	Yes
product function			
• iPCF client	Yes	Yes	Yes
• iPCF-MC client	Yes	Yes	Yes
number of iPCF-capable radio modules	1	1	1
product function iPRP	Yes	Yes	Yes
product functions management, configuration, engineering			
number of manageable IP addresses in client	4	4	4
product function			
• CLI	Yes	Yes	Yes
• web-based management	Yes	Yes	Yes
• MIB support	Yes	Yes	Yes
• TRAPs via email	Yes	Yes	Yes
• configuration with STEP 7	Yes	Yes	Yes
• configuration with STEP 7 in the TIA Portal	Yes	Yes	Yes
• WDS	No	No	No
protocol is supported			
• Address Resolution Protocol (ARP)	Yes	Yes	Yes
• ICMP	Yes	Yes	Yes
• Telnet	Yes	Yes	Yes
• HTTP	Yes	Yes	Yes
• HTTPS	Yes	Yes	Yes
• TFTP	Yes	Yes	Yes
• DCP	Yes	Yes	Yes
• LLDP	No	No	No
identification & maintenance function			
• I&MO - device-specific information	Yes	Yes	Yes
• I&M1 - higher level designation/location designation	Yes	Yes	Yes
product function is supported		Yes	
identification link			

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

Technical specifications

Article number	6GK5722-1FC00-0AA0	6GK5722-1FC00-0AB0	6GK5722-1FC00-0AC0
product type designation ¹⁾	W722-1 RJ45	W722-1 RJ45 (USA)	W722-1 RJ45 (ISR)
product functions diagnostics			
product function			
• PROFINET IO diagnosis	Yes	Yes	Yes
• link check	No	No	No
• connection monitoring IP-Alive	No	No	No
• SysLog	Yes	Yes	Yes
protocol is supported			
• SNMP v1	Yes	Yes	Yes
• SNMP v2	Yes	Yes	Yes
• SNMP v3	Yes	Yes	Yes
product functions VLAN			
product function			
• function VLAN with IWLAN	No	No	No
product functions DHCP			
product function			
• DHCP client	Yes	Yes	Yes
• DHCP server	Yes	Yes	Yes
• DHCP Option 82	Yes	Yes	Yes
product functions redundancy			
protocol is supported			
• STP/RSTP	Yes	Yes	Yes
• MSTP	Yes	Yes	Yes
• RSTP	Yes	Yes	Yes
product functions security			
product function			
• ACL - MAC-based	Yes	Yes	Yes
• management security, ACL-IP based	Yes	Yes	Yes
• IEEE 802.1x (radius)	Yes	Yes	Yes
• NAT/NAPT	Yes	Yes	Yes
• access protection according to IEEE802.11i	Yes	Yes	Yes
• WPA/WPA2	Yes	Yes	Yes
• TKIP/AES	Yes	Yes	Yes
protocol is supported			
• SSH	Yes	Yes	Yes
• RADIUS	Yes	Yes	Yes
product functions time			
protocol is supported			
• NTP	Yes	Yes	Yes
• SNTP	Yes	Yes	Yes
• SIMATIC time synchronization (SIMATIC Time)	Yes	Yes	Yes
standards, specifications, approvals			
standard			
• for FM	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X
• for safety from CSA and UL	UL 60950-1 E115352, CSA C22.2 No. 60950-1	UL 60950-1 E115352, CSA C22.2 No. 60950-1	UL 60950-1 E115352, CSA C22.2 No. 60950-1

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Communication > SCALANCE W722 RJ45 for the control cabinet****Technical specifications**

Article number	6GK5722-1FC00-0AA0	6GK5722-1FC00-0AB0	6GK5722-1FC00-0AC0
product type designation ¹⁾	W722-1 RJ45	W722-1 RJ45 (USA)	W722-1 RJ45 (ISR)
certificate of suitability			
• EC Declaration of Conformity	Yes	Yes	No
• CE marking	Yes	Yes	No
• C-Tick	Yes	Yes	Yes
• E1 approval	No	No	No
• railway application in accordance with EN 50155	No	No	No
• NEMA TS2	No	No	No
• IEC 61375	No	No	No
• IEC 61850-3	No	No	No
• NEMA4X	No	No	No
• Power-over-Ethernet according IEEE802.3at for type 1 and IEEE802.3af	No	No	No
• Power-over-Ethernet according to IEEE802.3at for type 2	No	No	No
standard for wireless communication			
• IEEE 802.11a	Yes	Yes	Yes
• IEEE 802.11b	Yes	Yes	Yes
• IEEE 802.11e	Yes	Yes	Yes
• IEEE 802.11g	Yes	Yes	Yes
• IEEE 802.11h	Yes	Yes	Yes
• IEEE 802.11i	Yes	Yes	Yes
• IEEE 802.11n	Yes	Yes	Yes
wireless approval	You will find the current list of countries at: http://www.siemens.com/wireless-approvals	You will find the current list of countries at: http://www.siemens.com/wireless-approvals	You will find the current list of countries at: http://www.siemens.com/wireless-approvals
standards, specifications, approvals			
marine classification			
Marine classification association			
• American Bureau of Shipping Europe Ltd. (ABS)	No	No	No
• French marine classification society (BV)	No	No	No
• DNV GL	No	No	No
• Korean Register of Shipping (KRS)	No	No	No
• Lloyds Register of Shipping (LRS)	No	No	No
• Nippon Kaiji Kyokai (NK)	No	No	No
• Polski Rejestr Statkow (PRS)	No	No	No
• Royal Institution of Naval Architects (RINA)	No	No	No
standards, specifications, approvals			
hazardous environments			
standard for hazardous zone	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X
• from CSA and UL	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8	Yes; GB3836.1, GB3836.8	
• as marking	Ex nA IIC T4 Gc	Ex nA IIC T4 Gc	
standards, specifications, approvals			
Environmental Product Declaration			
Environmental Product Declaration	Yes	Yes	Yes
Global Warming Potential [CO2 eq]			
• total	200.91 kg	200.91 kg	200.91 kg
• during manufacturing	12.97 kg	12.97 kg	12.97 kg
• during operation	187.77 kg	187.77 kg	187.77 kg
• after end of life	0.17 kg	0.17 kg	0.17 kg
accessories			
accessories	24 V DC screw terminal included in scope of delivery	24 V DC screw terminal included in scope of delivery	24 V DC screw terminal included in scope of delivery

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

Overview



- Space-saving client module, suitable for applications where the device is to be mounted in the control cabinet

Ordering data

Article No.

SCALANCE W721 client modules

IWLAN Ethernet client modules with built-in wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 150 Mbps; WPA2/AES; degree of protection IP20 (0 °C to +55 °C); scope of delivery: Mounting hardware, 3-pin screw terminal for 24 V DC; manual on CD-ROM; German/English

SCALANCE W721-1 RJ45

For managing the radio link from a connected device with Industrial Ethernet connection

- Country approvals for operation outside the USA
- Country approvals for operation within the USA¹⁾

6GK5721-1FC00-0AA0

6GK5721-1FC00-0AB0

Accessories**IE FC RJ45 plug 180 2 x 2**

RJ45 plug-in connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with a 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

6GK1901-1BB10-2AA0

6GK1901-1BB10-2AB0

6GK1901-1BB10-2AE0

IE FC standard cable GP 2 x 2

6XV1840-2AH10

4-core, shielded TP installation cable for connection to IE FC RJ45 outlet plug/ IE FC RJ45 plug; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m

IE FC stripping tool

6GK1901-1GA00

Pre-adjusted stripping tool for fast stripping of Industrial Ethernet FC cables

Antennas and additional IWLAN accessories

See Industrial Wireless LAN/Accessories

¹⁾ Please note country approvals under <http://www.siemens.com/wireless-approvals>

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Communication > SCALANCE W721 RJ45 for the control cabinet****Technical specifications**

Article number product type designation ¹⁾	6GK5721-1FC00-0AA0 W721-1 RJ45	6GK5721-1FC00-0AB0 W721-1 RJ45 (USA)
transfer rate		
transfer rate		
• with WLAN maximum	150 Mbit/s	150 Mbit/s
• for Industrial Ethernet	10 Mbit/s, 100 Mbit/s	10 Mbit/s, 100 Mbit/s
transfer rate for Industrial Ethernet		
• minimum	10 Mbit/s	10 Mbit/s
• maximum	100 Mbit/s	100 Mbit/s
interfaces		
number of electrical connections		
• for network components or terminal equipment	1	1
• for power supply	1	1
• for redundant voltage supply	0	0
type of electrical connection		
• for network components or terminal equipment	RJ45 socket	RJ45 socket
• for power supply	3-pole screw terminal	3-pole screw terminal
memory		
design of the removable storage		
• C-PLUG	No	No
• KEY-PLUG	No	No
interfaces wireless		
number of radio cards permanently installed	1	1
number of electrical connections for external antenna(s)	1	1
type of electrical connection for external antenna(s)	R-SMA (socket)	R-SMA (socket)
product feature external antenna can be mounted directly on device	Yes	Yes
supply voltage, current consumption, power loss		
type of voltage of the supply voltage	DC	DC
consumed current		
• at DC at 24 V typical	0.15 A	0.15 A
power loss [W]		
• at DC at 24 V typical	3.6 W	3.6 W
supply voltage 1		
• from terminal block	19.2 V	19.2 V
supply voltage 2		
• from terminal block	28.8 V	28.8 V
ambient conditions		
ambient temperature		
• during operation	0 ... 55 °C	0 ... 55 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C
• during transport	-40 ... +85 °C	-40 ... +85 °C
relative humidity at 25 °C without condensation during operation maximum	95 %	95 %
ambient condition for operation	When used under hazardous conditions (Zone 2), the SCALANCE W761-1 RJ45 or W72x-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.	When used under hazardous conditions (Zone 2), the SCALANCE W761-1 RJ45 or W72x-1 RJ45 product must be installed in an enclosure. To comply with EN 50021, this enclosure must meet the requirements of at least IP 54 in compliance with EN 60529.
protection class IP	IP20	IP20

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

Technical specifications

Article number	6GK5721-1FC00-0AA0	6GK5721-1FC00-0AB0
product type designation ¹⁾	W721-1 RJ45	W721-1 RJ45 (USA)
design, dimensions and weights		
width	50 mm	50 mm
height	114 mm	114 mm
depth	74 mm	74 mm
width of the enclosure without antenna	50 mm	50 mm
height of the enclosure without antenna	114 mm	114 mm
depth of the enclosure without antenna	74 mm	74 mm
net weight	0.13 kg	0.13 kg
fastening method		
• S7-300 rail mounting	No	No
• S7-1500 rail mounting	No	No
• 35 mm top hat DIN rail mounting	Yes	Yes
• wall mounting	No	No
radio frequencies		
operating frequency		
• for WLAN in 2.4 GHz frequency band	2.41 ... 2.48 GHz; depending on the country approvals	2.41 ... 2.48 GHz; depending on the country approvals
• for WLAN in 5 GHz frequency band	4.9 ... 5.8 GHz; depending on the country approvals	4.9 ... 5.8 GHz; depending on the country approvals
product features, product functions, product components general		
product function Access Point Mode	No	No
product function client Mode	Yes	Yes
product function		
• iPCF client	No	No
• iPCF-MC client	No	No
product function iREF	No	No
product function iPRP	No	No
product functions management, configuration, engineering		
number of manageable IP addresses in client	4	4
product function		
• CLI	Yes	Yes
• web-based management	Yes	Yes
• MIB support	Yes	Yes
• TRAPs via email	Yes	Yes
• configuration with STEP 7	Yes	Yes
• configuration with STEP 7 in the TIA Portal	Yes	Yes
• WDS	No	No
protocol is supported		
• Address Resolution Protocol (ARP)	Yes	Yes
• ICMP	Yes	Yes
• Telnet	Yes	Yes
• HTTP	Yes	Yes
• HTTPS	Yes	Yes
• TFTP	Yes	Yes
• DCP	Yes	Yes
• LLDP	No	No
identification & maintenance function		
• I&MO - device-specific information	Yes	Yes
• I&M1 - higher level designation/location designation	Yes	Yes

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**I/O modules > Communication > SCALANCE W721 RJ45 for the control cabinet****Technical specifications**

Article number	6GK5721-1FC00-0AA0	6GK5721-1FC00-0AB0
product type designation ¹⁾	W721-1 RJ45	W721-1 RJ45 (USA)
product functions diagnostics		
product function		
• PROFINET IO diagnosis	No	No
• link check	No	No
• connection monitoring IP-Alive	No	No
• SysLog	Yes	Yes
protocol is supported		
• SNMP v1	Yes	Yes
• SNMP v2	Yes	Yes
• SNMP v3	Yes	Yes
product functions VLAN		
product function		
• function VLAN with IWLAN	No	No
product functions DHCP		
product function		
• DHCP client	Yes	Yes
• DHCP server	Yes	Yes
• DHCP Option 82	Yes	Yes
product functions redundancy		
protocol is supported		
• STP/RSTP	Yes	Yes
• MSTP	Yes	Yes
• RSTP	Yes	Yes
product functions security		
product function		
• ACL - MAC-based	Yes	Yes
• management security, ACL-IP based	Yes	Yes
• IEEE 802.1x (radius)	Yes	Yes
• NAT/NAPT	Yes	Yes
• access protection according to IEEE802.11i	Yes	Yes
• WPA/WPA2	Yes	Yes
• TKIP/AES	Yes	Yes
protocol is supported		
• SSH	Yes	Yes
• RADIUS	Yes	Yes
product functions time		
protocol is supported		
• NTP	Yes	Yes
• SNTP	Yes	Yes
• SIMATIC time synchronization (SIMATIC Time)	Yes	Yes
standards, specifications, approvals		
standard		
• for FM	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X	FM 3611: Class I, Division 2, Groups A,B,C,D, T4 / Class 1, Zone 2, Group IIC, T4, FM16US0205X
• for safety from CSA and UL	UL 60950-1 E115352, CSA C22.2 No. 60950-1	UL 60950-1 E115352, CSA C22.2 No. 60950-1

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

Technical specifications

Article number	6GK5721-1FC00-0AA0	6GK5721-1FC00-0AB0
product type designation ¹⁾	W721-1 RJ45	W721-1 RJ45 (USA)
certificate of suitability		
• EC Declaration of Conformity	Yes	Yes
• CE marking	Yes	Yes
• C-Tick	Yes	Yes
• E1 approval	No	No
• railway application in accordance with EN 50155	No	No
• NEMA TS2	No	No
• IEC 61375	No	No
• IEC 61850-3	No	No
• NEMA4X	No	No
• Power-over-Ethernet according IEEE802.3at for type 1 and IEEE802.3af	No	No
• Power-over-Ethernet according to IEEE802.3at for type 2	No	No
standard for wireless communication		
• IEEE 802.11a	Yes	Yes
• IEEE 802.11b	Yes	Yes
• IEEE 802.11e	Yes	Yes
• IEEE 802.11g	Yes	Yes
• IEEE 802.11h	Yes	Yes
• IEEE 802.11i	Yes	Yes
• IEEE 802.11n	Yes	Yes
wireless approval	You will find the current list of countries at: http://www.siemens.com/wireless-approvals	You will find the current list of countries at: http://www.siemens.com/wireless-approvals
standards, specifications, approvals		
marine classification		
Marine classification association		
• American Bureau of Shipping Europe Ltd. (ABS)	No	No
• French marine classification society (BV)	No	No
• DNV GL	No	No
• Korean Register of Shipping (KRS)	No	No
• Lloyds Register of Shipping (LRS)	No	No
• Nippon Kaiji Kyokai (NK)	No	No
• Polski Rejestr Statkow (PRS)	No	No
• Royal Institution of Naval Architects (RINA)	No	No
standards, specifications, approvals		
hazardous environments		
standard for hazardous zone	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X	EN 60079-15:2005, EN 60079-0:2006, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X
• from CSA and UL	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480	ANSI/ISA 12.12.01-2013, CAN/CSA C22.2 No.213-M1987, Cl. 1, div. 2, GP. A, B, C, D, T4 / Cl. 1, Zone 2, GP IIC E240480
certificate of suitability CCC for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8	Yes; GB3836.1, GB3836.8
• as marking	Ex nA IIC T4 Gc	Ex nA IIC T4 Gc
standards, specifications, approvals		
Environmental Product Declaration		
Environmental Product Declaration	Yes	Yes
Global Warming Potential [CO2 eq]		
• total	200.91 kg	200.91 kg
• during manufacturing	12.97 kg	12.97 kg
• during operation	187.77 kg	187.77 kg
• after end of life	0.17 kg	0.17 kg
accessories		
accessories	24 V DC screw terminal included in scope of delivery	24 V DC screw terminal included in scope of delivery

¹⁾ You will find the current list of countries at:
<http://www.siemens.com/wireless-approvals>

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > SIPLUS CM PtP serial interface

Overview



- Communications module CM PtP; Module for serial communication connections with RS232, RS422, RS485 interfaces for the Freeport, 3964(R), Modbus RTU and USS protocols, max. 115.2 kbps, 2 KB frame length, 4 KB receive buffer.
- Protocols supported
 - Freeport: User-parameterizable frame format for universal communication
 - 3964(R) for improved transmission reliability
 - Modbus RTU master (requires instructions in SIMATIC S7)
 - Modbus RTU slave (requires instructions in SIMATIC S7)
 - USS, implemented through instructions
 - DMX512, can be implemented through instructions
- Interface properties
 - RS232 with auxiliary signals
 - RS422 for full-duplex connections
 - RS485 for half-duplex and multi-point connections
 - Transfer rates from 300 to 115 200 bps for RS232 and RS422
 - Transfer rates from 300 to 25 000 bps for RS485
- Frame lengths
 - In universal operation: 2 KB each in send and receive direction
 - In performance-optimized operation: 30 bytes in send direction, 24 bytes in receive direction
- Can be plugged into type A0 BaseUnits (BU) with automatic coding
- LED display for errors, operation, and supply voltage
- Communication display for sending and receiving
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Color coding of the CM module type: silver
 - Hardware and firmware version
 - Complete Article No.
- Optional labeling accessories
 - Labeling strips
 - Equipment labeling plate
- Optional system-integrated shield connection

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS ET 200SP CM PtP communications module

With conformal coating (-40 ... +70 °C)
For serial connection with RS-422, RS-485 and RS-232, Freeport, 3964 (R), USS, MODBUS RTU master, slave, max. 250 Kbps, suitable for BU type A0, pack quantity: 1 unit

6AG1137-6AA01-7BA0

Accessories

SIPLUS BaseUnits type A0

(Extended temperature range and exposure to environmental substances)

BU15-P16+A0+2D

6AG1193-6BP00-7DA0

BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

BU15-P16+A0+2B

6AG1193-6BP00-7BA0

BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group

BU15-P16+A10+2D

6AG1193-6BP20-7DA0

BU type A0; BaseUnit (light) with 16 push-in terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

BU15-P16+A10+2B

6AG1193-6BP20-7BA0

BU type A0; BaseUnit (dark) with 16 push-in terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

Accessories

SIPLUS Mounting Kit ET 200SP

6AG1193-6AA00-0AA0

Mounting accessories for use with increased mechanical vibration and shock loads.

Other accessories

See SIMATIC CM PtP, page 10/152

Technical specifications

Article number	6AG1137-6AA01-7BA0	Article number	6AG1137-6AA01-7BA0
Based on	6ES7137-6AA01-0BA0 SIPLUS ET 200SP CM PTP	Based on	6ES7137-6AA01-0BA0 SIPLUS ET 200SP CM PTP
Ambient conditions		Usage in industrial process technology	
Ambient temperature during operation		- Against chemically active substances acc. to EN 60654-4	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	
• horizontal installation, max.	70 °C; = Tmax		
• vertical installation, min.	-40 °C; = Tmin		
• vertical installation, max.	50 °C; = Tmax		
Altitude during operation relating to sea level		Remark	
• Installation altitude above sea level, max.	5 000 m	- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	* The supplied plug covers must remain in place over the unused interfaces during operation!	
Relative humidity		Conformal coating	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	• Coatings for printed circuit board assemblies acc. to EN 61086	
Resistance		• Protection against fouling acc. to EN 60664-3	
Coolants and lubricants		• Military testing according to MIL-I-46058C, Amendment 7	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	
Use in stationary industrial systems			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request		
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *		
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *		
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		
Use on land craft, rail vehicles and special-purpose vehicles			
- Against mechanical environmental conditions acc. to EN 60721-3-5	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		
- against mechanical environmental conditions in agriculture acc. to ISO 15003	Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)		
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *		
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *		
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > SIPLUS CM 4x IO-Link

Overview



- SIPLUS CM 4x IO-Link communications module
Serial communications module for connecting up to 4 IO-Link devices in accordance with IO-Link specification V1.0 and V1.1. The IO-Link parameters are configured using the Port Configuration Tool (PCT), version V3.0 and higher.
- Time-based IO
Time-based IO ensures that signals are output with a precisely defined response time. By combining inputs and outputs, for example, passing products can be accurately measured or liquids dosed in precise quantities.
- Supported data transfer rates
 - COM1 (4.8 kBd)
 - COM2 (38.4 kBd)
 - COM3 (230.4 kBd)
- Expansion limits
 - Cable length: Max. 20 m
 - Max. 32 bytes of input and output data per port
 - Max. 144 bytes of input data and 128 bytes of output data per module

- Supported ET 200SP system functions
 - Replacement without PG with automatic backup without the engineering tool of the IO-Link Device Parameter (V1.1 devices only) and the IO-Link master parameters by means of redundant saving of parameters on the e-coding element
 - Re-parameterization during operation
 - Identification data I&M
 - Firmware update
 - PROFlenergy
- Can be plugged into Type A0 BaseUnits (BU) with automatic e-coding
- LED displays
 - DIAG: Operating state display (green/red) of the module
 - C1..C4: Port status indicator (green) for Port 1, 2, 3 and 4
 - Q1..Q4: Channel status indicator (green) for Port 1, 2, 3 and 4
 - F1..F4: Port fault indicator (red) for Port 1, 2, 3 and 4
 - PWR: Supply voltage indicator (green)
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Color-coding of the module class CM: silver
 - Hardware and firmware version
 - Complete Article No.
- Optional accessories
 - Labeling strips
 - Equipment labeling plate
 - Color-coded label with color code CC04
- Optional system-integrated shield connection

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

SIPLUS CM 4x IO-Link master V1.1 Standard communications module

(Extended temperature range and exposure to environmental substances)

Serial communications module for connecting up to 4 IO-Link devices, time-based IO, BU type A0, color code CC04

Article No.
6AG1137-6BD00-2BA0

Usable type A0 BaseUnits

BU15-P16+A10+2D

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

Article No.
6AG1193-6BP20-7DA0

BU15-P16+A0+2D

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 push-in terminals to the module; for starting a new load group (max. 10 A)

Article No.
6AG1193-6BP00-7DA0

BU15-P16+A10+2B

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group

Article No.
6AG1193-6BP20-7BA0

BU15-P16+A0+2B

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 push-in terminals to the module; for continuing the load group

Article No.
6AG1193-6BP00-7BA0

Accessories

SIPLUS Mounting Kit ET 200SP

Mounting accessories for use with increased mechanical vibration and shock loads.

Article No.
6AG1193-6AA00-0AA0

Other accessories

See SIMATIC CM 4x IO-Link, page 10/156

Technical specifications

Article number	6AG1137-6BD00-2BA0
Based on	6ES7137-6BD00-0BA0 SIPLUS ET 200SP CM 4XIO-LINK
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Article number	6AG1137-6BD00-2BA0
Based on	6ES7137-6BD00-0BA0 SIPLUS ET 200SP CM 4XIO-LINK
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > SIPLUS ET 200SP CM CAN

Overview



- For data exchange between an ET 200SP system and CAN Bus 2.0A/B or CANopen Manager or Slave (according to CiA 301 & 302)
- CANopen features:
 - Node / lifeguarding
 - Heartbeat
 - SYNC (producer / consumer)
- Integrated in TIA via HSP, TIA Portal V15.1 or higher
- CAN connection with push-in terminals
- Integrated CAN bus terminating resistor
- Up to 60 CAN nodes
- 128 receiver and 128 transmitter PDOs
- Galvanic isolation between the two networks
- Diagnostic interrupts
- Optionally with function block SIMATIC ECC CHAdEMO: Realization of digital communication as basis for conductible DC charging of electric vehicles in line with the CHAdEMO standard

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS ET 200SP CM CAN communications module With conformal coating, -40...+60 °C To connect ET 200SP with CAN or CANopen networks CAN 2.0A/B, CANopen Manager according to CiA301/302, CANopen Slave according to CiA301/302	6AG1137-6EA00-2BA0
Accessories Suitable SIPLUS extreme BaseUnits, type A0	
BU15-P16+A10+2D (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)	6AG1193-6BP20-7DA0
BU15-P16+A0+2D (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	6AG1193-6BP00-7DA0
BU15-P16+A10+2B (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the load group	6AG1193-6BP20-7BA0
BU15-P16+A0+2B (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	6AG1193-6BP00-7BA0
Accessories SIPLUS Mounting Kit ET 200SP	6AG1193-6AA00-0AA0
Other accessories	See SIMATIC ET 200SP CM CAN, page 10/160

Technical specifications

Article number	6AG1137-6EA00-2BA0
Based on	6ES7137-6EA00-0BA0 SIPLUS ET 200SP CM CAN
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
• vertical installation, min.	-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Article number	6AG1137-6EA00-2BA0
Based on	6ES7137-6EA00-0BA0 SIPLUS ET 200SP CM CAN
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

I/O modules > Communication > SIPLUS CM DP for ET 200SP CPU

Overview



- PROFIBUS DP device with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps
- Expands the ET 200SP CPUs 1510SP-1 PN / 1512SP-1 PN by one PROFIBUS connection
- For communication with lower-level PROFIBUS devices at bandwidths of 9.6 kbps to 12 Mbps
- Communications services:
 - PROFIBUS DP
 - PG/OP communication
 - S7 communication:
 - This makes it possible to establish communication between the ET 200SP CPU and other devices, for example those from the SIMATIC S7-300/400/1500 range.
- Time synchronization
- Simple programming and configuration over PROFIBUS
- Cross-network PG communication using S7 routing
- Data record routing

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS CM DP for ET 200SP CPU **6AG1545-5DA00-2AB0**

(Extended temperature range and exposure to environmental substances)

PROFIBUS DP master/slave with electrical interface for connecting the ET 200SP CPUs to PROFIBUS at up to 12 Mbps

Accessories

SIPLUS Mounting Kit ET 200SP **6AG1193-6AA00-0AA0**

Mounting accessories for use with increased mechanical vibration and shock loads.

Other accessories

see SIMATIC CM DP, page 10/166

Technical specifications


Article number	6AG1545-5DA00-2AB0	Article number	6AG1545-5DA00-2AB0
Based on	6ES7545-5DA00-0AB0 SIPLUS ET 200SP CM DP	Based on	6ES7545-5DA00-0AB0 SIPLUS ET 200SP CM DP
Ambient conditions		Usage in industrial process technology	
Ambient temperature during operation		- Against chemically active substances acc. to EN 60654-4 - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	Yes; Class 3 (excluding trichlorethylene)	
• horizontal installation, max.	70 °C; = Tmax	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
• vertical installation, min.	-40 °C; = Tmin (incl. condensation/frost)		
• vertical installation, max.	50 °C; = Tmax		
Altitude during operation relating to sea level		Remark	
• Installation altitude above sea level, max.	5 000 m	- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	* The supplied plug covers must remain in place over the unused interfaces during operation!	
Relative humidity		Conformal coating	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	• Coatings for printed circuit board assemblies acc. to EN 61086 • Protection against fouling acc. to EN 60664-3 • Military testing according to MIL-I-46058C, Amendment 7 • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	
Resistance		Yes; Class 2 for high reliability	
Coolants and lubricants		Yes; Type 1 protection	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Discoloration of coating possible during service life	
Use in stationary industrial systems		Yes; Conformal coating, Class A	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request		
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *		
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *		
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		
Use on ships/at sea			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request		
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *		
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *		
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)		

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > Digital F-input modules

Overview

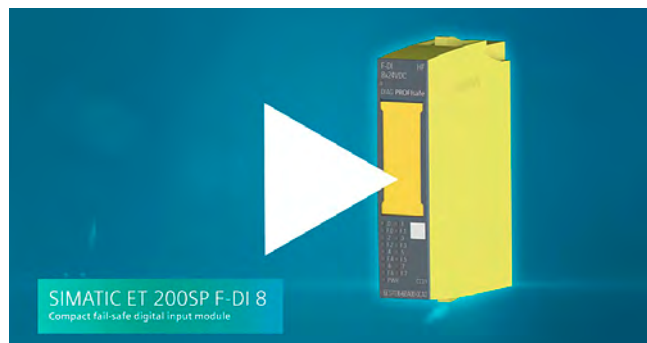

SIMATIC ET 200SP Safety F-DI video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6151017420001



Digital fail-safe input module:
F-DI 8x24VDC High Feature for BU type A0, color code CC01

Important features:

- 8-channel digital fail-safe input module for ET 200SP
- For fail-safe reading of sensor information (1 or 2 channels)
- Provides integrated discrepancy evaluation for 2-out-of-2 signals
- 8 internal sensor supplies (incl. test function) onboard
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Can be plugged into Type A0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Color coding of the module type DI: white
 - Hardware and firmware version
 - Color code CC for module-specific color coding of the potentials at the terminals of the BU
 - Complete Article No.
- Optional labeling accessories
 - Labeling strips
 - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. Can be used with all fail-safe SIMATIC S7 CPUs.

Ordering data

Article No.

Article No.

Digital F-input modules

F-DI 8x24VDC High Feature,
BU type A0, color code CC01

6ES7136-6BA01-0CA0

Spare parts

E-coding elements, type F

5 units, for ET 200SP F-DI, F-DQ,
F-PM E, F-AI 4xI

6ES7193-6EF00-1AA0

Suitable BaseUnits

BU15-P16+A10+2D

BU type A0; BaseUnit (light) with
16 process terminals (1 ... 16)
to the module and an additional
10 internally jumpered
AUX terminals (1 A to 10 A);
for starting a new load group
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7193-6BP20-0DA0
6ES7193-6BP20-2DA0

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with
16 process terminals to the module;
for starting a new load group
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7193-6BP00-0DA0
6ES7193-6BP00-2DA0

BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with
16 process terminals (1 ... 16)
to the module and an additional
10 internally jumpered
AUX terminals (1 A to 10 A);
for continuing the load group

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7193-6BP20-0BA0
6ES7193-6BP20-2BA0

Ordering data	Article No.	Article No.
BU15-P16+A0+2B BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group <ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 	6ES7193-6BP00-0BA0 6ES7193-6BP00-2BA0	Equipment labeling plate 10 sheets of 16 labels 6ES7193-6LF30-0AW0
Accessories S7 Distributed Safety V5.4 SP5 Update 2 programming tool Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used		Labeling strips 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer 6ES7193-6LR10-0AA0 500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer 6ES7193-6LR10-0AG0 1000 labeling strips DIN A4, light gray, card, for inscription with laser printer 6ES7193-6LA10-0AA0 1000 labeling strips DIN A4, yellow, card, for inscription with laser printer 6ES7193-6LA10-0AG0
Floating license for 1 user, software and documentation on DVD; license key on USB flash drive 6ES7833-1FC02-0YA5 Floating license for 1 user, software, documentation and license key for download ¹⁾ ; Email address required for delivery 6ES7833-1FC02-0YH5		BU cover For covering empty slots (gaps); 5 units <ul style="list-style-type: none"> • 15 mm wide • 20 mm wide 6ES7133-6CV15-1AM0 6ES7133-6CV20-1AM0
S7 Distributed Safety upgrade From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive 6ES7833-1FC02-0YE5		Shield connection 5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding 6ES7193-6SC20-1AM0
STEP 7 Safety Advanced V19 Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 <u>Note:</u> As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.		Color-coded labels <ul style="list-style-type: none"> • Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units 6ES7193-6CP01-2MA0 • Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 50 units 6ES7193-6CP01-4MA0 • Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units 6ES7193-6CP71-2AA0 • Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units 6ES7193-6CP72-2AA0 • Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units 6ES7193-6CP73-2AA0
Floating license for 1 user; license key on USB flash drive 6ES7833-1FA23-0YA5 Floating license for 1 user; license key for download ¹⁾ ; Email address required for delivery 6ES7833-1FA23-0YH5		

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Fail-safe I/O modules > Digital F-input modules****Technical specifications**

Article number	6ES7136-6BA00-0CA0 ET 200SP, In-Mod., F-DI 8x24VDC HF	6ES7136-6BA01-0CA0 ET 200SP, In-Mod., F-DI 8x24VDC HF
General information		
Product type designation	F-DI 8x24VDC HF	F-DI 8x24VDC HF
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	V12	SIMATIC Safety V17 with HSP 0360 or higher
• STEP 7 configurable/ integrated from version	V5.5 SP3 / -	as 6ES7136-6BA00-0CA0
• PROFINET from GSD version/ GSD revision	V2.31	GSDML V2.35
Supply voltage		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes	Yes
Encoder supply		
Number of outputs	8	8
Short-circuit protection	Yes; Electronic (response threshold 0.7 A to 1.8 A)	
Output current		
• up to 60 °C, max.	0.3 A	
24 V encoder supply		
• 24 V	Yes; min. L+ (-1.5 V)	Yes; min. L+ (-1.5 V)
• Short-circuit protection	Yes	Yes; Electronic (response threshold 0.7 A to 1.8 A)
• Output current, max.	800 mA; Total current of all encoders	
• Output current per channel, max.		300 mA
• Output current per module, max.		800 mA; Total current of all encoders
Digital inputs		
Number of digital inputs	8	8
Source/sink input	Yes; P-reading	Yes; P-reading
Input characteristic curve in accordance with IEC 61131, type 1	Yes	Yes
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal *0*	-30 to +5 V	-30 to +5 V
• for signal *1*	+15 to +30 V	+15 to +30 V
Input current		
• for signal *1*, typ.	3.7 mA	3.7 mA
Input delay (for rated value of input voltage)		
for standard inputs		
- parameterizable	Yes	Yes
for technological functions		
- parameterizable	No	No

Technical specifications

Article number	6ES7136-6BA00-0CA0 ET 200SP, In-Mod., F-DI 8x24VDC HF	6ES7136-6BA01-0CA0 ET 200SP, In-Mod., F-DI 8x24VDC HF
Interrupts/diagnostics/status information		
Diagnostics function	Yes	Yes
Alarms		
• Diagnostic alarm	Yes	Yes
• Hardware interrupt	No	No
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes
Standards, approvals, certificates		
Suitable for safety functions	Yes	Yes
Highest safety class achievable in safety mode		
• Performance level according to ISO 13849-1	PLe	PLe
• SIL acc. to IEC 61508	SIL 3	SIL 3
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	0 °C	0 °C
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	0 °C	0 °C
• vertical installation, max.	50 °C	50 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	4 000 m; Restrictions for installation altitudes > 2 000 m, see manual	4 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
Dimensions		
Width	15 mm	15 mm
Height	73 mm	73 mm
Depth	58 mm	58 mm
Weights		
Weight, approx.	49 g	29 g

I/O systems


SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > Digital F-output modules

Overview



SIMATIC ET 200SP Safety F-DQ 4 video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoid=6154332510001

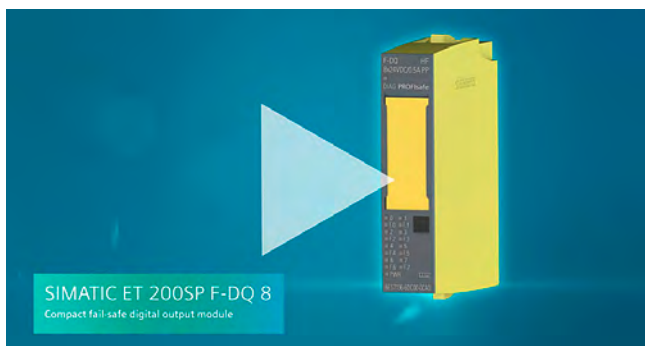

SIMATIC ET 200SP Safety F-DQ 8 video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoid=6154329323001



Digital fail-safe output modules:

- F-DQ 4x24VDC/2A PM High Feature
- F-DQ 8x24VDC/0.5A PP High Feature

Important properties:

- 4 and 8-channel digital fail-safe output modules for the ET 200SP
- Fail-safe 2-channel activation (switching to P/M potential or switching to P/P potential) of actuators
- Actuators can be controlled up to 2 A or 0.5 A
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Can be plugged into type A0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Color coding of the DQ module type: black
 - Hardware and firmware version
 - Color code CC for module-specific color coding of the potentials at the terminals of the BU
 - Complete Article No.
- Optional labeling accessories
 - Labeling strips
 - Equipment labeling plate
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations
- They can be used with all fail-safe SIMATIC S7 CPUs

Ordering data	Article No.	Article No.
Digital F-output modules		Accessories
F-DQ 4x24VDC High Feature, BU type A0, color code CC01	6ES7136-6DB00-0CA0	S7 Distributed Safety V5.4 SP5 Update 2 programming tool
F-DQ 8x24VDC High Feature, switching to PP potential, BU type A0, color code CC01	6ES7136-6DC00-0CA0	Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used
Spare parts		Floating license for 1 user, software and documentation on DVD; license key on USB flash drive
E-coding elements, type F	6ES7193-6EF00-1AA0	Floating license for 1 user, software, documentation and license key for download ¹⁾ ; Email address required for delivery
5 units, for ET 200SP F-DI, F-DQ, F-PM E, F-AI 4x1		S7 Distributed Safety upgrade
Suitable BaseUnits		From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive
BU15-P16+A10+2D		STEP 7 Safety Advanced V19
BU type A0; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.	6ES7193-6BP20-0DA0 6ES7193-6BP20-2DA0	Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case. Floating license for 1 user; license key on USB flash drive
BU15-P16+A0+2D		Floating license for 1 user; license key for download ¹⁾ ; Email address required for delivery
BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.	6ES7193-6BP00-0DA0 6ES7193-6BP00-2DA0	S7 Distributed Safety V19
BU15-P16+A10+2B		As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case. Floating license for 1 user; license key on USB flash drive
BU type A0; BaseUnit (dark) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.	6ES7193-6BP20-0BA0 6ES7193-6BP20-2BA0	Floating license for 1 user; license key for download ¹⁾ ; Email address required for delivery
BU15-P16+A0+2B		
BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.	6ES7193-6BP00-0BA0 6ES7193-6BP00-2BA0	
BU20-P12+A4+0B	6ES7193-6BP20-0BB0	
BU type B0; BaseUnit (dark) with 12 process terminals (1 ... 12) to the module and an additional 4 internally bridged AUX terminals (1 A to 4 A); for continuing the load group		

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Fail-safe I/O modules > Digital F-output modules**

Ordering data	Article No.	Article No.
Equipment labeling plate 10 sheets of 16 labels	6ES7193-6LF30-0AW0	Color-coded labels <ul style="list-style-type: none"> Color code CC02, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units Color code CC02, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 50 units Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units
Labeling strips 500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0	
500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0	
1000 labeling strips DIN A4, light gray, card, for inscription with laser printer	6ES7193-6LA10-0AA0	
1000 labeling strips DIN A4, yellow, card, for inscription with laser printer	6ES7193-6LA10-0AG0	
BU cover For covering empty slots (gaps); 5 units <ul style="list-style-type: none"> 15 mm wide 20 mm wide 	6ES7133-6CV15-1AM0 6ES7133-6CV20-1AM0	6ES7193-6CP02-2MA0 6ES7193-6CP02-4MA0 6ES7193-6CP71-2AA0 6ES7193-6CP72-2AA0 6ES7193-6CP73-2AA0
Shield connection 5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding	6ES7193-6SC20-1AM0	

Technical specifications

Article number	6ES7136-6DB00-0CA0 ET 200SP, F-DQ 4x24VDC/2A PM HF	6ES7136-6DC00-0CA0 ET 200SP, F-DQ 8x24VDC/0.5A PP HF
General information		
Product type designation	F-DQ 4x24VDC/2A PM HF	F-DQ 8x24 V DC/0.5 A PP HF
Engineering with		
<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/integrated from version 	V12	V14 SP1 with HSP 202
<ul style="list-style-type: none"> STEP 7 configurable/integrated from version 	V5.5 SP3 / -	V5.5 SP4 HF5
<ul style="list-style-type: none"> PROFINET from GSD version/GSD revision 	V2.31	V2.31
Supply voltage		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes	Yes
Digital outputs		
Type of digital output	Transistor	Transistor
Number of digital outputs	4	8
Digital outputs, parameterizable	Yes	Yes
Short-circuit protection	Yes	Yes
Open-circuit detection	Yes	No
Overload protection	Yes	
Limitation of inductive shutdown voltage to	Typ. -2x 47 V	Typ. -39 V
Controlling a digital input	Yes; digital output, according to IEC 61131-2, type 2	Yes; digital output, according to IEC 61131-2, type 0.5
Switching capacity of the outputs		
<ul style="list-style-type: none"> with resistive load, max. 	2 A	0.5 A
<ul style="list-style-type: none"> on lamp load, max. 	10 W	2 W
Load resistance range		
<ul style="list-style-type: none"> lower limit 	12 Ω	48 Ω
<ul style="list-style-type: none"> upper limit 	2 000 Ω	12 000 Ω
Output voltage		
<ul style="list-style-type: none"> for signal "1", min. 	24 V; L+ (-0.5 V)	24 V; L+ (-0.5 V)
Output current		
<ul style="list-style-type: none"> for signal "1" rated value 	2 A	0.5 A
<ul style="list-style-type: none"> for signal "0" residual current, max. 	0.5 mA	0.5 mA

Technical specifications

Article number	6ES7136-6DB00-0CA0 ET 200SP, F-DQ 4x24VDC/2A PM HF	6ES7136-6DC00-0CA0 ET 200SP, F-DQ 8x24VDC/0.5A PP HF
Switching frequency		
• with resistive load, max.	30 Hz; Symmetrical	30 Hz; Symmetrical
• with inductive load, max.	0.1 Hz; according to IEC 60947-5-1, DC-13, symmetrical	0.1 Hz; according to IEC 60947-5-1, DC-13, symmetrical
• with capacitive load, max.		2 Hz; Symmetrical
• on lamp load, max.	10 Hz; Symmetrical	10 Hz; Symmetrical
Total current of the outputs		
• Current per channel, max.	2 A; note derating data in the manual	0.5 A; note derating data in the manual
• Current per module, max.	6 A; note derating data in the manual	3 A; note derating data in the manual
Total current of the outputs (per module)		
horizontal installation		
- up to 40 °C, max.		3 A
- up to 50 °C, max.		2.5 A
- up to 60 °C, max.		2 A
vertical installation		
- up to 50 °C, max.		2 A
Interrupts/diagnostics/ status information		
Diagnostics function	Yes	Yes
Substitute values connectable	No	No
Alarms		
• Diagnostic alarm	Yes	Yes
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes
Standards, approvals, certificates		
Suitable for safety functions	Yes	Yes
Highest safety class achievable in safety mode		
• Performance level according to ISO 13849-1	PLe	PLe
• SIL acc. to IEC 61508	SIL 3	SIL 3
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	0 °C	0 °C
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	0 °C	0 °C
• vertical installation, max.	50 °C	50 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	4 000 m; Restrictions for installation altitudes > 2 000 m, see manual	4 000 m; with derating
Dimensions		
Width	15 mm	15 mm
Height	73 mm	73 mm
Depth	58 mm	58 mm
Weights		
Weight, approx.	57 g	48 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > Digital F-output module relay

Overview



The digital F electronic module relay 1 F-RQ DC 24VDC/24.230VAC/5 A has the following characteristics:

- 1 relay output (2 NO contacts)
- Total output current 5 A
- Rated load voltage 24 V DC and 24 ... 230 V AC
- The control circuit of the two safety relays must be routed from the outside to the respective terminals

The attainable safety integrity level is SIL 3 (IEC 61508) when the control of the F-RQ module is implemented via a fail-safe output (e.g. ET 200SP 4F-DQ 24 V DC/2 A PROFIsafe).

Ordering data

Article No.

1 F-RQ digital F-output module relay

BU type F0, relay output (2 NO contacts), total output current 5 A, load voltages 24 V DC and 24 ... 230 V AC; can be used up to SIL 3/Cat. 4/PLe if controlled via F-DQ

6ES7136-6RA00-0BF0

Suitable BaseUnits

BU20-P8+A4+0B

BU type F0; BaseUnit (dark) with 8 process terminals to the module and 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the load group

6ES7193-6BP20-0BF0

Accessories

S7 Distributed Safety V5.4 SP5 Update 2 programming tool

Task:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used

Floating license for 1 user, software and documentation on DVD; license key on USB flash drive

6ES7833-1FC02-0YA5

Floating license for 1 user, software, documentation and license key for download¹⁾; Email address required for delivery

6ES7833-1FC02-0YH5

Article No.

S7 Distributed Safety upgrade

From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive

6ES7833-1FC02-0YE5

STEP 7 Safety Advanced V19

Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe I/O ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco

Requirement:

STEP 7 Professional V19

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user; license key on USB flash drive

6ES7833-1FA23-0YA5

Floating license for 1 user, license key for download¹⁾; Email address required for delivery

6ES7833-1FA23-0YH5

Equipment labeling plate

10 sheets of 16 labels

6ES7193-6LF30-0AW0

Labeling strips

500 labeling strips on roll, light gray

6ES7193-6LR10-0AA0

500 labeling strips on roll, yellow

6ES7193-6LR10-0AG0

1000 labeling strips DIN A4, light gray

6ES7193-6LA10-0AA0

1000 labeling strips DIN A4, yellow

6ES7193-6LA10-0AG0

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Article No.
BU cover For covering empty slots (gaps); 5 units • 20 mm wide	6ES7133-6CV15-1AM0	Mechanical coding elements For automatic coding of I/O modules; spare part. 20 units Type A Type B Type C Type D
Shield connection 5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding	6ES7193-6SC20-1AM0	
Color-coded labels • Color code CC42, module-specific; for BaseUnit type F0; 10 units	6ES7193-6CP42-2MB0	
		6ES7193-6KA00-3AA0 6ES7193-6KB00-3AA0 6ES7193-6KC00-3AA0 6ES7193-6KD00-3AA0

Technical specifications

Article number	6ES7136-6RA00-0BF0 ET 200SP, F-RQ 1x24VDC/24...230VAC/5A ST
General information	
Product type designation	F-RQ 24 ... 48VDC/24 ... 230VAC/5A ST
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V13
• STEP 7 configurable/ integrated from version	V5.5 SP4 and higher
• PROFINET from GSD version/ GSD revision	V2.31
Supply voltage	
Rated value (DC)	24 V; Coil voltage
Digital outputs	
Type of digital output	Relays
Number of digital outputs	1
Limitation of inductive shutdown voltage to	No
Controlling a digital input	Yes
Switching capacity of the outputs	
• with resistive load, max.	5 A
• on lamp load, max.	25 W
Switching frequency	
• with resistive load, max.	2 Hz
• with inductive load, max.	0.1 Hz; See data in manual
• with inductive load (acc. to IEC 60947-5-1, DC13), max.	0.1 Hz
• with inductive load (acc. to IEC 60947-5-1, AC15), max.	2 Hz
Total current of the outputs (per module)	
horizontal installation	
- up to 40 °C, max.	5 A; note derating data in the manual
- up to 50 °C, max.	4 A; note derating data in the manual
- up to 60 °C, max.	3 A; note derating data in the manual
vertical installation	
- up to 50 °C, max.	3 A; note derating data in the manual
Relay outputs	
• Number of relay outputs	1; 2 NO contacts
• Rated supply voltage of relay coil L+ (DC)	24 V
• Current consumption of relays (coil current of all relays), max.	70 mA
• external protection for relay outputs	yes; 6 A, see data in manual
• Relay approved acc. to UL 508	Yes; Pilot Duty B300, R300


Article number	6ES7136-6RA00-0BF0 ET 200SP, F-RQ 1x24VDC/24...230VAC/5A ST
Switching capacity of contacts	
- with inductive load, max.	see additional description in the manual
- with resistive load, max.	see additional description in the manual
- Thermal continuous current, max.	5 A
- Switching current, min.	1 mA
- Switching current after exceeding 300 mA, min.	10 mA
- Switching current after exceeding 300 mA, max.	5 A
- Rated switching voltage (DC)	24 V
- Rated switching voltage (AC)	230 V
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Diagnostics indication LED	
• RUN LED	Yes; green/red DIAG LED
• Channel status display	Yes; green LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
Suitable for safety functions	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	50 °C
Dimensions	
Width	20 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	56 g

I/O systems


SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > Analog F-input modules

Overview

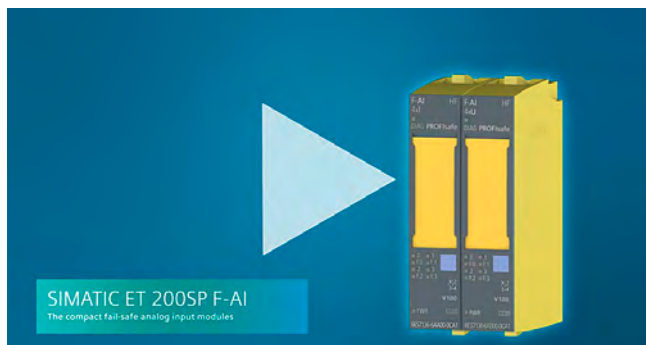

SIMATIC ET 200SP Safety F-AI-4xU video
https://players.brightcove.net/181362429400/170fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoid=6204918698001

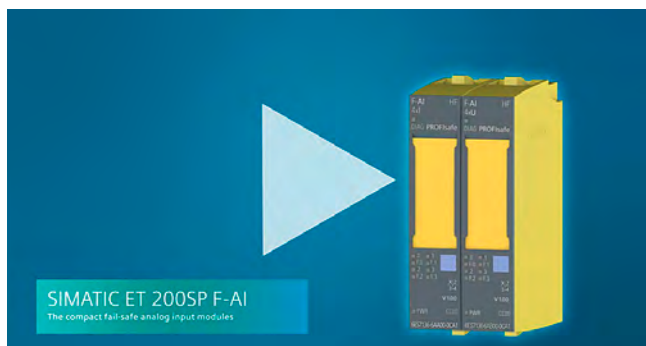

SIMATIC ET 200SP Safety F-AI-4xI video
https://players.brightcove.net/181362429400/170fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoid=6204919583001



Analog fail-safe input modules:

- F-AI 4xI 0(4)..20 mA 2/4-wire High Feature for BU types A0 and A1, color code CC00
- F-AI 4xU 0..10 V HF, BU type A0, A1, color code CC00

Important features:

- 4-channel analog fail-safe digital inputs for ET 200SP
- 4 analog inputs with galvanic isolation between channels and backplane bus
- Measuring ranges: (0)4...20 mA and 0..10 V
- Possibility of connecting current and voltage sensors for measuring temperature, pressure, flow, level, distance measurement, etc.
- Short-circuit-proof power supply for analog sensors
- Resolution: 16 bits including sign
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Can be plugged onto type A0 and A1 BaseUnits (BU)
- LED display for error, operation, supply voltage and status
- Interference frequency suppression, smoothing
- Diagnostics: wire break, short-circuit, high/low limit violation
- Firmware update
- Identification data I&M
- Value status
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Color coding of the module type DI: white
 - Hardware and firmware version
 - Color code CC for module-specific color coding of the potentials at the terminals of the BU
 - Complete Article No.
- Optional labeling accessories
 - Labeling strips
 - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. Can be used with all fail-safe SIMATIC S7 CPUs.

Ordering data	Article No.	Article No.
Analog F-input module		
F-AI 4xI 0(4) ... 20 mA 2/4-wire High Feature, BU type A0, A1, color code CC00	6ES7136-6AA00-0CA1	
F-AI 4xU 0..10 V High Feature, BU type A0, A1, color code CC00	6ES7136-6AB00-0CA1	
Spare parts		
E-coding elements, type F	6ES7193-6EF00-1AA0	
5 units, for ET 200SP F-DI, F-DQ, F-PM E, F-AI 4xI		
5x E-coding elements, type H	6ES7193-6EH00-1AA0	
5 units, for ET 200SP F-AI 4xU, F-TM Count, F-CM AS-i		
Suitable BaseUnits		
BU15-P16+A10+2D		
BU type A0; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)		
<ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 	6ES7193-6BP20-0DA0 6ES7193-6BP20-2DA0	
BU15-P16+A0+2D		
BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)		
<ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 	6ES7193-6BP00-0DA0 6ES7193-6BP00-2DA0	
BU15-P16+A10+2B		
BU type A0; BaseUnit (dark) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group		
<ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 	6ES7193-6BP20-0BA0 6ES7193-6BP20-2BA0	
BU15-P16+A0+2B		
BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group		
<ul style="list-style-type: none"> • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10. 	6ES7193-6BP00-0BA0 6ES7193-6BP00-2BA0	
BU15-P16+A0+12D/T	6ES7193-6BP40-0DA1	
BU type A1; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new load group (max. 10 A)		
BU15-P16+A0+2D/T	6ES7193-6BP00-0DA1	
BU type A1; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)		
		BU15-P16+A0+12B/T
		BU type A1; BaseUnit (dark) with 16 process terminals (1 ... 16) to the module and 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the load group
		BU15-P16+A0+2B/T
		BU type A1; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group
		Accessories
		STEP 7 Safety Advanced V19
		Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O Requirement: STEP 7 Professional V19 Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.
		Floating license for 1 user; license key on USB flash drive
		6ES7833-1FA23-0YA5
		Floating license for 1 user; license key for download ¹⁾ ; Email address required for delivery
		6ES7833-1FA23-0YH5
		Equipment labeling plate
		10 sheets of 16 labels
		Labeling strips
		500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer
		6ES7193-6LR10-0AA0
		500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer
		6ES7193-6LR10-0AG0
		1000 labeling strips DIN A4, light gray, card, for inscription with laser printer
		6ES7193-6LA10-0AA0
		1000 labeling strips DIN A4, yellow, card, for inscription with laser printer
		6ES7193-6LA10-0AG0
		BU cover
		For covering empty slots (gaps); 5 units
		• 15 mm wide
		6ES7133-6CV15-1AM0
		Shield connection
		6ES7193-6SC20-1AM0
		5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Fail-safe I/O modules > Analog F-input modules****Ordering data****Article No.****Article No.****Color-coded labels**

- Color code CC00, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16); A1; 10 units

6ES7193-6CP00-2MA0

- Color code CC00, for 16 push-in terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16), A1; 50 units

6ES7193-6CP00-4MA0**Technical specifications**

Article number	6ES7136-6AA00-0CA1 ET 200SP, F-AI 4XI 0(4)..20mA HF	6ES7136-6AB00-0CA1 ET 200SP, F-AI 4xU 0..10V HF
General information		
Product type designation	F-AI 4xI 0(4)..20mA 2-/4-wire HF	F-AI 4xU 0..10V HF
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	V15 with HSP 203	V16 with HSP 308
Operating mode		
• cyclic measurement		Yes
• Oversampling		No
• MSI		No
Supply voltage		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes	Yes
Analog inputs		
Number of analog inputs	4	4
• For current measurement	4	
• For voltage measurement		4
permissible input voltage for voltage input (destruction limit), max.		36 V
permissible input current for current input (destruction limit), max.	35 mA	
Input ranges (rated values), voltages		
• 0 to +10 V		Yes
Input ranges (rated values), currents		
• 0 to 20 mA	Yes	
• 4 mA to 20 mA	Yes	
Cable length		
• shielded, max.	1 000 m	200 m
Analog value generation for the inputs		
Integration and conversion time/resolution per channel		
• Resolution with overrange (bit including sign), max.	16 bit	16 bit
• Integration time, parameterizable	Yes	Yes
• Integration time (ms)	20 / 16,667	20 / 16,667
• Interference voltage suppression for interference frequency f1 in Hz	50 / 60 Hz	50 / 60 Hz
Smoothing of measured values		
• Number of smoothing levels	7	7
• parameterizable	Yes	Yes
• Average value filter		Yes
Encoder		
Connection of signal encoders		
• for voltage measurement		Yes
• for current measurement as 2-wire transducer	Yes	
- Burden of 2-wire transmitter, max.	650 Ω	
• for current measurement as 4-wire transducer	Yes	

Technical specifications


Article number	6ES7136-6AA00-0CA1 ET 200SP, F-AI 4XI 0(4)..20mA HF	6ES7136-6AB00-0CA1 ET 200SP, F-AI 4xU 0..10V HF
Errors/accuracies		
Basic error limit (operational limit at 25 °C)		
• Voltage, relative to input range, (+/-)		0.1 %
• Current, relative to input range, (+/-)	0.1 %	
Interference voltage suppression for $f = n \times (f_1 \pm 1 \%)$, $f_1 =$ interference frequency		
• Series mode interference (peak value of interference < rated value of input range), min.	40 dB	40 dB
• Common mode voltage, max.		10 V
• Common mode interference, min.	70 dB	70 dB
Interrupts/diagnostics/status information		
Diagnostics function	Yes	Yes
Alarms		
• Diagnostic alarm	Yes	Yes
• Limit value alarm	No	No
Diagnoses		
• Monitoring the supply voltage	Yes	Yes
• Wire-break	Yes	Yes
• Short-circuit	Yes	
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes
Standards, approvals, certificates		
Highest safety class achievable in safety mode		
• Performance level according to ISO 13849-1	PLe	PLe
• SIL acc. to IEC 61508	SIL 3	SIL 3
Probability of failure (for service life of 20 years and repair time of 100 hours)		
- Low demand mode: PFDavg in accordance with SIL3	< 5.00E-05	< 5.00E-05
- High demand/continuous mode: PFH in accordance with SIL3	< 1.00E-09 1/h	< 1.00E-09 1/h
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	0 °C	0 °C
• horizontal installation, max.	60 °C	60 °C
• vertical installation, min.	0 °C	0 °C
• vertical installation, max.	50 °C	50 °C
Dimensions		
Width	15 mm	15 mm
Height	73 mm	73 mm
Depth	58 mm	58 mm
Weights		
Weight, approx.	48 g	48 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > Special fail-safe modules

Overview

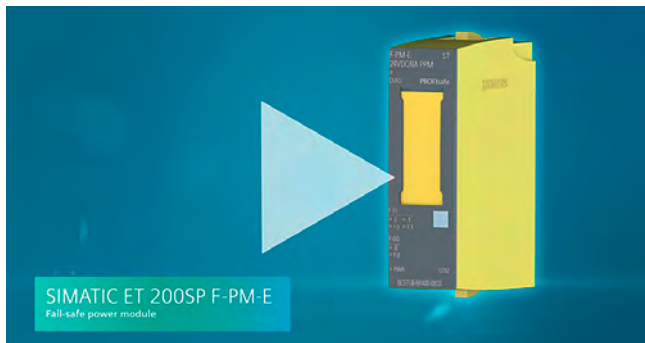

SIMATIC ET 200SP Safety F-PM-E video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6154262749001



Digital fail-safe power module:
F-PM-E PPM 24 VDC/8A for BU type C0,
color code CC52

Important properties:

- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Safety-related shutdown of output modules within the potential group of the F-PM-E
- Two fail-safe digital inputs, for reading of sensor information (1 or 2 channels)
- One fail-safe digital output onboard (switching to PPM potential, up to 2 A, up to SIL 3/PL e)
- Fail-safe digital output and potential supply switching to PP or PM potential can be parameterized
- Parameterizable onboard evaluation of the fail-safe inputs for control of the fail-safe digital outputs and of the potential group
- Digital standard output modules can be shut down up to PL d (ISO 13849) and SIL 2 (IEC61508) (up to 8 A).
- Can be plugged into type C0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Color coding of the module type DI: white
 - Hardware and firmware version
 - Color code CC for module-specific color coding of the potentials at the terminals of the BU
 - Complete Article No.
- Optional labeling accessories
 - Labeling strips
 - Equipment labeling plate
- Optional module-specific color coding of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. Can be used with all fail-safe SIMATIC S7 CPUs.

Ordering data	Article No.	Article No.
F-PM-E 24 VDC/8A PPM Standard digital F power module BU type C0, color code CC52. 2 inputs, 1 output, SIL 3/Cat. 4/PL e	6ES7136-6PA00-0BC0	
Spare parts		
E-coding elements, type F 5 units, for ET 200SP F-DI, F-DQ, F-PM E, F-AI 4xI	6ES7193-6EF00-1AA0	
Suitable BaseUnits		
Type C0 BaseUnits		
BU20-P6+A2+4D BU type C0; BaseUnit (light) with 6 push-in terminals (1...6) to the module and 2 AUX terminals; new load group	6ES7193-6BP20-0DC0	
Accessories		
Equipment labeling plate 10 sheets of 16 labels	6ES7193-6LF30-0AW0	
Labeling strips 1000 labeling strips DIN A4, yellow, card, for inscription with laser printer	6ES7193-6LA10-0AG0	
		BU cover For covering empty slots (gaps); 5 units • 20 mm wide
		Shield connection 5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding
		Color-coded labels • Color code CC52, module-specific, for 8 push-in terminals; 10 units
		Mechanical coding elements For automatic coding of I/O modules; spare part. 20 units Type A Type B Type C Type D
		6ES7133-6CV20-1AM0 6ES7193-6SC20-1AM0 6ES7193-6CP52-2MC0 6ES7193-6KA00-3AA0 6ES7193-6KB00-3AA0 6ES7193-6KC00-3AA0 6ES7193-6KD00-3AA0

Technical specifications

Article number	6ES7136-6PA00-0BC0 ET 200SP, Power mod. F-PM-E PPM, 24V DC
General information	
Product type designation	F-PM-E 24 V DC/8 A PPM ST
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V12
• STEP 7 configurable/integrated from version	V5.5 SP3 / -
• PROFINET from GSD version/ GSD revision	V2.31
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Encoder supply	
Number of outputs	2
Short-circuit protection	Yes; Electronic (response threshold 0.7 A to 2.1 A)
Output current	
• up to 60 °C, max.	0.3 A
24 V encoder supply	
• 24 V	Yes; min. L+ (-1.5 V)
• Short-circuit protection	Yes
• Output current, max.	600 mA; Total current of all encoders
Digital inputs	
Number of digital inputs	2
Source/sink input	Yes; P-reading
Input characteristic curve in accordance with IEC 61131, type 1	Yes

Article number	6ES7136-6PA00-0BC0 ET 200SP, Power mod. F-PM-E PPM, 24V DC
Input voltage	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-30 to +5 V
• for signal "1"	+15 to +30 V
Input current	
• for signal "1", typ.	3.7 mA
Input delay (for rated value of input voltage) for standard inputs	
- parameterizable	Yes
for technological functions	
- parameterizable	No
Digital outputs	
Number of digital outputs	1
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes
Open-circuit detection	Yes
Overload protection	Yes
Limitation of inductive shutdown voltage to	Max. -1.5 V
Switching capacity of the outputs	
• with resistive load, max.	8 A
• on lamp load, max.	100 W
Load resistance range	
• lower limit	3 Ω
• upper limit	2 000 Ω

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > Special fail-safe modules

Technical specifications

Article number	6ES7136-6PA00-0BC0 ET 200SP, Power mod. F-PM-E PPM, 24V DC
Output voltage • for signal "1", min.	24 V; L+ (-0.5 V)
Output current • for signal "1" rated value • for signal "0" residual current, max.	8 A 1.5 mA; PP-switching: max. 1.5 mA; PM-switching: max. 1 mA
Switching frequency • with resistive load, max. • with inductive load, max. • on lamp load, max.	10 Hz; Symmetrical 0.1 Hz; according to IEC 60947-5-1, DC-13, symmetrical 4 Hz; Symmetrical
Total current of the outputs • Current per channel, max. • Current per module, max.	8 A; note derating data in the manual 8 A; note derating data in the manual
Cable length • shielded, max. • unshielded, max.	1 000 m 500 m
Interrupts/diagnostics/ status information	
Diagnostics function	Yes; See Chapter "Alarms/diagnostic messages" in the manual
Substitute values connectable	No
Alarms • Diagnostic alarm • Hardware interrupt	Yes No
Diagnostics indication LED • RUN LED • ERROR LED • Monitoring of the supply voltage (PWR-LED) • Channel status display • for channel diagnostics • for module diagnostics	Yes; green LED Yes; red LED Yes; green PWR LED Yes; green LED Yes; red LED Yes; green/red DIAG LED

Article number	6ES7136-6PA00-0BC0 ET 200SP, Power mod. F-PM-E PPM, 24V DC
Potential separation	
Potential separation channels • between the channels and backplane bus	Yes
Standards, approvals, certificates Suitable for safety functions	Yes
Highest safety class achievable in safety mode • Performance level according to ISO 13849-1 • SIL acc. to IEC 61508	PLe SIL 3
Probability of failure (for service life of 20 years and repair time of 100 hours) - Low demand mode: PFDavg in accordance with SIL2 - Low demand mode: PFDavg in accordance with SIL3 - High demand/continuous mode: PFH in accordance with SIL2 - High demand/continuous mode: PFH in accordance with SIL3	< 2.00E-04 < 2.00E-05 < 1.00E-08 1/h < 1.00E-09 1/h
Ambient conditions	
Ambient temperature during operation • horizontal installation, min. • horizontal installation, max. • vertical installation, min. • vertical installation, max.	0 °C 60 °C 0 °C 50 °C
Dimensions	
Width	20 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	70 g

Overview



Fail-safe technology module:
F-TM Count, 1x1Vpp sin/cos High Feature for BU type A0,
color code CC00

Important properties:

- Technological, fail-safe counter module for ET 200SP
 - Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
 - 1x sin/cos interface for recording sin/cos differential encoder signals A, A/, B, B/, N and N/
 - Option to connect sin/cos differential encoders
 - Short-circuit-proof 5 V DC encoder supply
 - High-speed count input up to 200 kHz
 - Counting range: 32-bit (-2.147.483.648 to +2.147.483.647)
 - SW gate for counter control
- Measured values:
 - Speed
 - Frequency
 - Period duration
 - Integrated safety functions:
 - SOS (Safe Operation Stop)
 - SLS (Safely Limited Speed)
 - SDI (Safe Direction)
 - Can be plugged onto type A0 BaseUnits (BU)
 - LED display for error, operation, supply voltage and status
 - Monitoring of encoder signals for wire break, short-circuit and signal strength
 - Firmware update
 - Identification data I&M
 - Value status
 - Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Hardware and firmware version
 - Color code CC for module-specific color coding of the potentials at the terminals of the BU
 - Complete Article No.
 - Optional labeling accessories:
 - Labeling strips
 - Equipment labeling plate
 - Optional module-specific color identification of the terminals according to the color code CC
 - Optional system-integrated shield connection
 - The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. Can be used with all fail-safe SIMATIC S7 CPUs.

Ordering data

**F-TM Count
fail-safe technology module**

1 x 1Vpp sin/cos High Feature,
BU type A0, color code CC00

Article No.

6ES7136-6CB00-0CA0

Spare parts

E-coding elements, type H

5 units, for ET 200SP F-AI 4xU,
F-TM Count, F-CM AS-i

6ES7193-6EH00-1AA0

Suitable BaseUnits**BU15-P16+A10+2D**

BU type A0; BaseUnit (light) with
16 process terminals (1 ... 16)
to the module and an additional
10 internally jumpered
AUX terminals (1 A to 10 A);
for starting a new load group
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7193-6BP20-0DA0
6ES7193-6BP20-2DA0

Article No.

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with
16 process terminals to the module;
for starting a new load group
(max. 10 A)

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7193-6BP00-0DA0
6ES7193-6BP00-2DA0

BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with
16 process terminals (1 ... 16)
to the module and an additional
10 internally jumpered
AUX terminals (1 A to 10 A);
for continuing the load group

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7193-6BP20-0BA0
6ES7193-6BP20-2BA0

BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with
16 process terminals to the module;
for continuing the load group

- Pack of 1 unit
- Pack of 10 units;
to order a pack, please order this
Article No. with an order
quantity of 10.

6ES7193-6BP00-0BA0
6ES7193-6BP00-2BA0

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > Fail-safe technology modules

Ordering data	Article No.	Ordering data	Article No.
Accessories		Equipment labeling plate	6ES7193-6LF30-0AW0
S7 Distributed Safety V5.4 SP5 Update 2 programming tool		10 sheets of 16 labels	
Task: Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP		Labeling strips	
Requirement: Windows 7 SP1 (64-bit), Windows 10 Professional/Enterprise (64-bit), Windows Server 2008 R2 SP1 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit); STEP 7 from V5.5 SP1; Please also note the operating systems that have been released for the STEP 7 version used		500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AA0
Floating license for 1 user, software and documentation on DVD; license key on USB flash drive	6ES7833-1FC02-0YA5	500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer	6ES7193-6LR10-0AG0
Floating license for 1 user, software, documentation and license key for download ¹⁾ ; Email address required for delivery	6ES7833-1FC02-0YH5	1000 labeling strips DIN A4, light gray, card, for inscription with laser printer	6ES7193-6LA10-0AA0
		1000 labeling strips DIN A4, yellow, card, for inscription with laser printer	6ES7193-6LA10-0AG0
S7 Distributed Safety upgrade		BU cover	
From V5.x to V5.4; floating license for 1 user; software and documentation on DVD; license key on USB flash drive	6ES7833-1FC02-0YE5	For covering empty slots (gaps); 5 units	
		• 15 mm wide	6ES7133-6CV15-1AM0
		• 20 mm wide	6ES7133-6CV20-1AM0
STEP 7 Safety Advanced V19		Shield connection	6ES7193-6SC20-1AM0
Task: Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200iSP, ET 200pro and ET 200eco I/O		5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding	
Requirement: STEP 7 Professional V19		Color-coded labels	
Note: As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.		• Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units	6ES7193-6CP01-2MA0
Floating license for 1 user; license key on USB flash drive	6ES7833-1FA23-0YA5	• Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 50 units	6ES7193-6CP01-4MA0
Floating license for 1 user; license key for download ¹⁾ ; Email address required for delivery	6ES7833-1FA23-0YH5	• Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units	6ES7193-6CP71-2AA0
		• Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units	6ES7193-6CP72-2AA0
		• Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units	6ES7193-6CP73-2AA0

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Article number	6ES7136-6CB00-0CA0 F-TM Count 1x1Vpp sin/cos HF
General information	
Product type designation	F-TM Count 1x1Vpp sin/cos HF
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	Step 7 V17 or higher: use GSDML for prior versions
Supply voltage	
Rated value (DC)	24 V
Load voltage L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
Encoder supply	
5 V encoder supply	
• 5 V	Yes; 5.1 V \pm 3.5 %
• Short-circuit protection	Yes; Electronic overload protection; no protection on applying a normal or counter voltage.
• Output current, max.	300 mA
Digital inputs	
Number of digital inputs	1; (counter input)
Digital inputs, parameterizable	Yes
Digital input functions, parameterizable	
• Gate start/stop	Yes
• Counter for incremental encoder	Yes
- Number, max.	1
Input voltage	
• Type of input voltage	sin/cos 1 Vpp
Input delay (for rated value of input voltage)	
• Minimum pulse width for program reactions	2.5 μ s for parameterization "none"
for technological functions	
- parameterizable	Yes
Encoder	
Connectable encoders	
• Incremental encoder (symmetrical)	Yes; up to 200 kHz depending on cable type and length
Encoder signals, incremental encoder (symmetrical)	
• Input voltage	1 Vpp, centered at 2.5 V offset
• Input frequency, max.	200 kHz
• Counting frequency, max.	800 kHz; with quadruple evaluation
• Cable length, shielded, max.	150 m
• Incremental encoder with A/B tracks, 90° phase offset	Yes; sin/cos
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes; sin/cos/zero

Article number	6ES7136-6CB00-0CA0 F-TM Count 1x1Vpp sin/cos HF
Interrupts/diagnostics/ status information	
Diagnostics function	Yes; see chapter "Diagnostic Messages" in the manual
Alarms	
• Diagnostic alarm	Yes
• Hardware interrupt	No
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
• A/B transition error at incremental encoder	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
Integrated Functions	
Counter	Yes
• Number of counters	1
• Counting frequency, max.	800 kHz; with quadruple evaluation
Safety monitoring functions	
• Safe Operating Stop (SOS)	Yes
• Safely-Limited Speed (SLS)	Yes
• Safe Direction (SDI)	Yes
• Safe Speed Monitor (SSM)	Yes
Counting functions	
• Continuous counting	Yes
• Counter response parameterizable	Yes
• Software gate	Yes
• Counting range, parameterizable	Yes
Measuring functions	
Measuring range	
- Frequency measurement, min.	0.04 Hz
- Frequency measurement, max.	800 kHz; with quadruple evaluation
- Cycle duration measurement, min.	1 μ s
- Cycle duration measurement, max.	25 s
- Velocity measurement, min.	0 (speed in configured units per selected time basis - speed*1 000)
- Velocity measurement, max.	2 147 483 (speed in configured units per selected time basis - speed*1 000)

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Fail-safe I/O modules > Fail-safe technology modules****Technical specifications**

Article number	6ES7136-6CB00-0CA0 F-TM Count 1x1Vpp sin/cos HF
Accuracy	
- Frequency measurement	up to 100 ppm; depending on measuring interval and signal evaluation; at low frequency external noise may have an effect on accuracy (reference the graph in 2.2.3)
- Cycle duration measurement	up to 100 ppm; depending on measuring interval and signal evaluation; at low frequency external noise may have an effect on accuracy (reference the graph in 2.2.3)
- Velocity measurement	up to 100 ppm; depending on measuring interval and signal evaluation; at low frequency external noise may have an effect on accuracy (reference the graph in 2.2.3)
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
Suitable for safety functions	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	Cat. 4, PLe
• SIL acc. to IEC 61508	SIL 3

Article number	6ES7136-6CB00-0CA0 F-TM Count 1x1Vpp sin/cos HF
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	55 °C
Altitude during operation relating to sea level	
• Ambient air temperature-barometric pressure-altitude	On request: Installation altitudes greater than 2 000 m
Dimensions	
Width	15 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	42 g

Overview



Digital fail-safe input module:
F-DI 8x24 V DC High Feature for BU type A0, color code CC01

Important properties:

- 8-channel digital fail-safe input module for the ET 200SP
- For fail-safe reading of sensor information (1 or 2 channels)
- Provides integral discrepancy evaluation for 2-out-of-2 signals
- 8 internal sensor supplies (incl. test function) onboard
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Can be plugged into type A0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Color coding of the module type DI: white
 - Hardware and firmware version
 - Color code CC for module-specific color coding of the potentials at the terminals of the BU
 - Complete Article No.
- Optional labeling accessories
 - Labeling strips
 - Equipment labeling plate
- Optional module-specific color coding of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. Can be used with all fail-safe SIMATIC S7 CPUs.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS digital F-input modules

(Extended temperature range and exposure to environmental substances)

F-DI 8x24VDC High Feature,
BU type A0, color code CC01

-40...+60 °C

6AG1136-6BA01-2CA0

Suitable BaseUnits**BU15-P16+A0+2D**

6AG1193-6BP00-7DA0

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

BU15-P16+A0+2B

6AG1193-6BP00-7BA0

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

BU15-P16+A10+2D

6AG1193-6BP20-7DA0

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

BU15-P16+A10+2B

6AG1193-6BP20-7BA0

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the load group

Accessories**SIPLUS Mounting Kit ET 200SP**

6AG1193-6AA00-0AA0

Mounting accessories for use with increased mechanical vibration and shock loads.

Other accessories

See SIMATIC ET 200SP, digital F-input modules, page 10/201

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > SIPLUS digital F-input modules

Technical specifications

Article number	6AG1136-6BA01-2CA0
Based on	6ES7136-6BA01-0CA0 SIPLUS ET 200SP F-DI 4/8x24VDC HF
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
• vertical installation, min.	-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	4 000 m
• Ambient air temperature-barometric pressure-altitude	Restrictions for installation altitudes > 2 000 m, see entry ID: 109771992
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on land craft, rail vehicles and special-purpose vehicles	
- Against mechanical environmental conditions acc. to EN 60721-3-5	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
- against mechanical environmental conditions in agriculture acc. to ISO 15003	Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Article number	6AG1136-6BA01-2CA0
Based on	6ES7136-6BA01-0CA0 SIPLUS ET 200SP F-DI 4/8x24VDC HF
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Overview



Digital fail-safe output module:
F-DQ 4x24VDC High Feature, BU type A0, color code CC01

Important properties:

- 4-channel digital fail-safe output module for the ET 200SP
- Fail-safe 2-channel activation (switching to P/M potential) of actuators
- Actuators can be controlled up to 2 A
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Can be plugged into type A0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Color coding of the module type DI: white
 - Hardware and firmware version
 - Color code CC for module-specific color coding of the potentials at the terminals of the BU
 - Complete Article No.
- Optional labeling accessories
 - Labeling strips
 - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations
- They can be used with all fail-safe SIMATIC S7 CPUs

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

SIPLUS digital F-output modules

(Extended temperature range and exposure to environmental substances)

F-DQ 4x24VDC High Feature, BU type A0, color code CC01

6AG1136-6DB00-2CA0

F-DQ 8x24VDC High Feature, switching to PP potential, BU type A0, color code CC01

6AG1136-6DC00-2CA0

Suitable BaseUnits**BU15-P16+A0+2D**

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

6AG1193-6BP00-7DA0

BU15-P16+A0+2B

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

6AG1193-6BP00-7BA0

BU15-P16+A10+2D

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

6AG1193-6BP20-7DA0

BU15-P16+A10+2B

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the load group

6AG1193-6BP20-7BA0

BU20-P12+A4+0B

(Extended temperature range and exposure to environmental substances)

BU type B0; BaseUnit (dark) with 12 process terminals (1...12) to the module and an additional 4 internally bridged AUX terminals (1 A to 4 A); for continuing the load group; 1 unit

6AG1193-6BP20-7BB0

Accessories**SIPLUS Mounting Kit ET 200SP**

Mounting accessories for use with increased mechanical vibration and shock loads.

6AG1193-6AA00-0AA0

Other accessories

See SIMATIC ET 200SP, digital F-output modules, page 10/205

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Fail-safe I/O modules > SIPLUS digital F-output modules****Technical specifications**

Article number	6AG1136-6DB00-2CA0	6AG1136-6DC00-2CA0
Based on	6ES7136-6DB00-0CA0	6ES7136-6DC00-0CA0
	SIPLUS ET 200SP F-DQ 4x24VDC/2A PM HF	SIPLUS ET 200SP F-DQ 8x24VDC/0.5A PP HF
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> horizontal installation, min. horizontal installation, max. vertical installation, min. vertical installation, max. 	-30 °C; = Tmin (incl. condensation/frost) 60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module -30 °C; = Tmin 50 °C; = Tmax	-30 °C; = Tmin (incl. condensation/frost) 60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module -30 °C; = Tmin 50 °C; = Tmax
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	4 000 m Restrictions for installation altitudes > 2 000 m, see entry ID: 109771992	4 000 m Restrictions for installation altitudes > 2 000 m, see entry ID: 109771992
Relative humidity		
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance		
Coolants and lubricants		
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 Against mechanical environmental conditions acc. to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on land craft, rail vehicles and special-purpose vehicles		
<ul style="list-style-type: none"> Against mechanical environmental conditions acc. to EN 60721-3-5 against mechanical environmental conditions in agriculture acc. to ISO 15003 	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0) Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0) Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 Against mechanical environmental conditions acc. to EN 60721-3-6 	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna) Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna) Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; * Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Technical specifications

Article number	6AG1136-6DB00-2CA0	6AG1136-6DC00-2CA0
Based on	6ES7136-6DB00-0CA0 SIPLUS ET 200SP F-DQ 4x24VDC/2A PM HF	6ES7136-6DC00-0CA0 SIPLUS ET 200SP F-DQ 8x24VDC/0.5A PP HF
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > SIPLUS digital F-output module relay

Overview



The digital F-electronic module relay 1 F-RQ DC 24VDC/24.230VAC/5 A has the following characteristics:

- 1 relay output (2 NO contacts)
- Total output current 5 A
- Rated load voltage 24 V DC and 24 ... 230 V AC
- The control circuit of the two safety relays must be routed from the outside to the respective terminals.

The attainable safety integrity level is SIL 3 (IEC 61508) when the control of the F-RQ module is implemented via a fail-safe output (e.g. ET 200SP 4F-DQ 24 V DC/2 A PROFIsafe).

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

SIPLUS digital F-output module relay 1 F-RQ

(Extended temperature range and exposure to environmental substances)

BU type F0, relay output (2 NO contacts), total output current 5 A, load voltages 24 V DC and 24 ... 230 V AC; can be used up to SIL3/Category 4/PL e if controlled via F-DQ

Suitable BaseUnits

BU20-P8+A4+0B

(Extended temperature range and exposure to environmental substances)

BU type F0; BaseUnit (dark) with 8 process terminals to the module and an additional 4 internally bridged AUX terminals (1 A to 4 A); for continuing the load group

Accessories

Article No.

6AG1136-6RA00-2BF0

6AG1193-6BP20-2BF0

See SIMATIC ET 200SP, digital F-output module relay, page 10/208

Technical specifications

Article number	6AG1136-6RA00-2BF0
Based on	6ES7136-6RA00-0BF0 SIPLUS ET 200SP F-RQ 24VDC/24-230VAC/5A
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-30 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module
• vertical installation, min.	-30 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *

Article number	6AG1136-6RA00-2BF0
Based on	6ES7136-6RA00-0BF0 SIPLUS ET 200SP F-RQ 24VDC/24-230VAC/5A
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > SIPLUS analog F-input modules

Overview



Analog fail-safe input module:
SIPLUS F-AI 4xI 0(4) ... 20 mA 2/4-wire High Feature
for BU type A0 and A1, color code CC00

F-AI 4xU 0..10 V High Feature, BU type A0, A1, color code CC00

Important properties:

- 4 analog inputs with galvanic isolation between channels and backplane bus (up to SIL 3/Cat. 4/PL d)
- Short-circuit proof power supply of 2 or 4-wire transducers
- Measuring ranges: 0 ... 20 mA and 4 ... 20 mA
- Resolution: 16 bits including sign
- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Can be plugged onto type A0 and A1 BaseUnits (BU)

- LED display for error, operation, supply voltage and status
- Interference frequency suppression, smoothing
- Diagnostics: wire break, short-circuit, high/low limit violation
- Firmware update
- Identification data I&M
- Value status
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Color coding of the module type DI: white
 - Hardware and firmware version
 - Color code CC for module-specific color coding of the potentials at the terminals of the BU
 - Complete Article No.
- Optional labeling accessories
 - Labeling strips
 - Equipment labeling plate
- Optional module-specific color coding of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. Can be used with all fail-safe SIMATIC S7 CPUs.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

SIPLUS analog F-input module

(Extended temperature range and exposure to environmental substances)

F-AI 4xI 0(4) ... 20 mA 2-/4-wire High Feature, BU type A0, A1, color code CC00

6AG1136-6AA00-2CA1

F-AI 4xU 0..10 V High Feature, BU type A0, A1, color code CC00

6AG1136-6AB00-2CA1

Suitable BaseUnits

BU15-P16+A10+2D

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)

6AG1193-6BP20-7DA0

BU15-P16+A0+2D

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)

6AG1193-6BP00-7DA0

BU15-P16+A10+2B

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the load group

6AG1193-6BP20-7BA0

BU15-P16+A0+2B

(Extended temperature range and exposure to environmental substances)

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group

6AG1193-6BP00-7BA0

BU15-P16+A0+12D/T

(Extended temperature range and exposure to environmental substances)

BU type A1; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 2x5 internally bridged additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new load group (max. 10 A)

6AG1193-6BP40-7DA1

Ordering data	Article No.	Article No.
BU15-P16+A0+2D/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	6AG1193-6BP00-7DA1	BU15-P16+A0+2B/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group
BU15-P16+A0+12B/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 2x5 internally bridged additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the load group	6AG1193-6BP40-7BA1	Accessories SIPLUS Mounting Kit ET 200SP Mounting accessories for use with increased mechanical vibration and shock loads.
		Other accessories See SIMATIC ET 200SP, analog F-input modules, page 10/211

Technical specifications

Article number	6AG1136-6AA00-2CA1	6AG1136-6AB00-2CA1
Based on	6ES7136-6AA00-0CA1 SIPLUS ET 200SP F-AI 4x1 2-/4-wire HF	6ES7136-6AB00-0CA1 SIPLUS ET 200SP F-AI 4xU 0..10V HF
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> horizontal installation, min. horizontal installation, max. vertical installation, min. vertical installation, max. 	-30 °C; = Tmin (incl. condensation/frost) 60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module -30 °C; = Tmin 50 °C; = Tmax	-30 °C; = Tmin (incl. condensation/frost) 60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module -30 °C; = Tmin 50 °C; = Tmax
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	4 000 m Restrictions for installation altitudes > 2 000 m, see entry ID: 109771992	4 000 m Restrictions for installation altitudes > 2 000 m, see entry ID: 109771992
Relative humidity		
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance		
Coolants and lubricants		
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 Against mechanical environmental conditions acc. to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, * Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on land craft, rail vehicles and special-purpose vehicles		
<ul style="list-style-type: none"> Against mechanical environmental conditions acc. to EN 60721-3-5 against mechanical environmental conditions in agriculture acc. to ISO 15003 	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0) Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0) Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Fail-safe I/O modules > SIPLUS analog F-input modules****Technical specifications**

Article number	6AG1136-6AA00-2CA1	6AG1136-6AB00-2CA1
Based on	6ES7136-6AA00-0CA1 SIPLUS ET 200SP F-AI 4xI 2-/4-wire HF	6ES7136-6AB00-0CA1 SIPLUS ET 200SP F-AI 4xU 0..10V HF
Use on ships/at sea		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview



Digital fail-safe power module:
F-PM-E PPM 24 V DC/8 A for BU type C0,
color code CC52

Important properties:

- Certified up to SIL 3 (IEC 61508), PL e (ISO 13849)
- Safety-related shutdown of output modules within the potential group of the F-PM-E
- Two fail-safe digital inputs, for reading of sensor information (1 or 2 channels)
- One fail-safe digital output onboard (switching to PPM potential, up to 2 A, up to SIL 3/PL e)
- Fail-safe digital output and potential supply switching to PP or PM potential can be parameterized

- Parameterizable onboard evaluation of the fail-safe inputs for control of the fail-safe digital outputs and of the potential group
- Digital standard output modules can be shut down up to PL d (ISO 13849) and SIL 2 (IEC61508) (up to 8 A).
- Can be plugged into type C0 BaseUnits (BU) with automatic coding
- LED display for error, operation, supply voltage and status
- Clear labeling on front of module
 - Plain text identification of the module type and function class
 - 2D matrix code (order and serial number)
 - Connection diagram
 - Color coding of the module type DI: white
 - Hardware and firmware version
 - Color code CC for module-specific color coding of the potentials at the terminals of the BU
 - Complete Article No.
- Optional labeling accessories
 - Labeling strips
 - Equipment labeling plate
- Optional module-specific color identification of the terminals according to the color code CC
- Optional system-integrated shield connection
- The modules support PROFIsafe in both PROFIBUS and PROFINET configurations.
- Can be used with all fail-safe SIMATIC S7 CPUs.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

Ordering data

**SIPLUS digital F-power module
F-PM-E 24VDC/8A PPM Standard**

(Extended temperature range and exposure to environmental substances)

BU type C0, color code CC52.
2 inputs, 1 output, SIL 3/Cat. 4/PL e

Type C0 BaseUnits**BU20-P6+A2+4D**

(Extended temperature range and exposure to environmental substances)

BU type C0; BaseUnit (light) with 6 push-in terminals (1...6) to the module and 2 AUX terminals; new load group

Article No.

6AG1136-6PA00-2BC0

6AG1193-6BP20-7DC0

Article No.

Accessories**SIPLUS Mounting Kit ET 200SP**

Mounting accessories for use with increased mechanical vibration and shock loads.

Other accessories

6AG1193-6AA00-0AA0

See SIMATIC ET 200SP, special fail-safe modules, page 10/215

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > SIPLUS special fail-safe modules

Technical specifications

Article number	6AG1136-6PA00-2BC0	Article number	6AG1136-6PA00-2BC0
Based on	6ES7136-6PA00-0BC0 SIPLUS ET 200SP F-PM-E 24VDC/8A PPM	Based on	6ES7136-6PA00-0BC0 SIPLUS ET 200SP F-PM-E 24VDC/8A PPM
Ambient conditions		Use on ships/at sea	
Ambient temperature during operation		- to biologically active substances according to EN 60721-3-6	
• horizontal installation, min.	-30 °C; = Tmin (incl. condensation/frost)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	
• horizontal installation, max.	60 °C; = Tmax; +70 °C with configured empty slots to the left and right of the module	- to chemically active substances according to EN 60721-3-6	
• vertical installation, min.	-30 °C; = Tmin	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	
• vertical installation, max.	50 °C; = Tmax	- to mechanically active substances according to EN 60721-3-6	
Altitude during operation relating to sea level		Yes; Class 6S3 incl. sand, dust; *	
• Installation altitude above sea level, max.	4 000 m	- Against mechanical environmental conditions acc. to EN 60721-3-6	
• Ambient air temperature-barometric pressure-altitude	Restrictions for installation altitudes > 2 000 m, see entry ID: 109771992	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Relative humidity		Usage in industrial process technology	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	- Against chemically active substances acc. to EN 60654-4	
Resistance		- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	
Coolants and lubricants		Remark	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	
Use in stationary industrial systems		* The supplied plug covers must remain in place over the unused interfaces during operation!	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Conformal coating	
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	• Coatings for printed circuit board assemblies acc. to EN 61086	
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 2 for high reliability	
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	• Protection against fouling acc. to EN 60664-3	
Use on land craft, rail vehicles and special-purpose vehicles		Yes; Type 1 protection	
- Against mechanical environmental conditions acc. to EN 60721-3-5	Yes; Class 5M2 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	• Military testing according to MIL-I-46058C, Amendment 7	
- against mechanical environmental conditions in agriculture acc. to ISO 15003	Yes; level 1 (Location LE) using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	
		Yes; Discoloration of coating possible during service life	
		Yes; Conformal coating, Class A	

Overview



F-CM AS-i Safety ST for SIMATIC ET 200SP

More information

Equipment Manual, see <https://support.industry.siemens.com/cs/ww/en/view/90265988>

SIMATIC ET200SP Manual Collection, see <https://support.industry.siemens.com/cs/ww/en/view/84133942>

Diagnostics blocks with visualization, see <https://support.industry.siemens.com/cs/ww/en/view/109479103>

Released combinations of the AS-i modules for ET 200SP, see <https://support.industry.siemens.com/cs/ww/en/view/103624653>

AS-Interface I/O modules and other AS-Interface system components see Catalog IC 10, <https://www.siemens.com/ic10>

More information see <https://www.siemens.com/as-interface>

The F-CM AS-i Safety ST fail-safe communications module supplements an AS-Interface network without additional wiring to produce a safety-related AS-i network.

Important features:

- Fail-safe communications module for the ET 200SP
 - 31 fail-safe input channels in the process image
 - 16 fail-safe output channels in the process image
 - Certified up to SIL 3 (IEC 62061)/PL e (ISO 13849-1)
 - Parameterization conforms with other fail-safe I/O modules of the ET 200SP
- The communications module supports PROFIsafe in PROFINET and PROFIBUS configurations. Can be used with fail-safe SIMATIC S7-300F, S7-400F CPUs and S7-1500F CPUs and also the fail-safe versions of the ET 200SP station with ET 200SP F-CPU 1510SP F, 1512SP F, 1514SP F or 1515SP PC F.
- For reading up to 31 fail-safe AS-i input slaves
 - Two sensor inputs/signals for each fail-safe AS-i input slave
 - Adjustable evaluation of sensor signals: 2-channel or 2 x 1-channel
 - Integrated discrepancy evaluation in the case of 2-channel signals
 - Integrated AND operation in the case of 2 x 1-channel signals
 - Input delay can be parameterized
 - Start-up test can be set
 - Sequence monitoring can be activated


- For control of up to 16 fail-safe AS-i output circuit groups
 - The output circuit groups are controlled independently of one another.
 - One output circuit group can act on one or more actuators (e.g. to switch drives simultaneously).
 - The F-CM AS-i Safety ST module sends the switching command of the output circuit group to the AS-i cable. A fail-safe AS-i output module installed anywhere on the AS-i cable receives the switching command and switches the actuator (e.g. contactor) connected to it.
 - Simple fault acknowledgment via the process image
- Simple module replacement thanks to automatic importing of the safety parameters from the coding element
- Comprehensive diagnostic options
- Can be plugged onto type C1 or type C0 BaseUnits (BU)
- Informative automatic alarm indications
- Supply via AS-Interface voltage
- Eight LED displays for diagnostics, operating state, fault indication and supply voltage
- Informative front-side module inscription
 - Plain-text marking of the module type and function class
 - 2D matrix code (Article No. and serial number)
 - Circuit diagram
 - Color coding module type communications module: light gray
 - Hardware and firmware version
 - Supported BaseUnit type BU: C1, C0

Design

The fail-safe F-CM AS-i Safety ST module has an ET 200SP module enclosure with a width of 20 mm.

One AS-i master according to the AS-i specification V3.0 and safe AS-i input slaves and/or safe AS-i output modules are needed for operation. The CM AS-i Master ST communications module (Article No. 3RK7137-6SA00-0BC1) is recommended as the AS-i master for the ET 200SP, see from page 10/162.

Simple combination of the CM AS-i Master ST and F-CM AS-i Safety ST modules in one ET 200SP station results in a powerful, safety-related router between PROFINET (or PROFIBUS) and AS-Interface, which can be expanded further in a modular fashion.

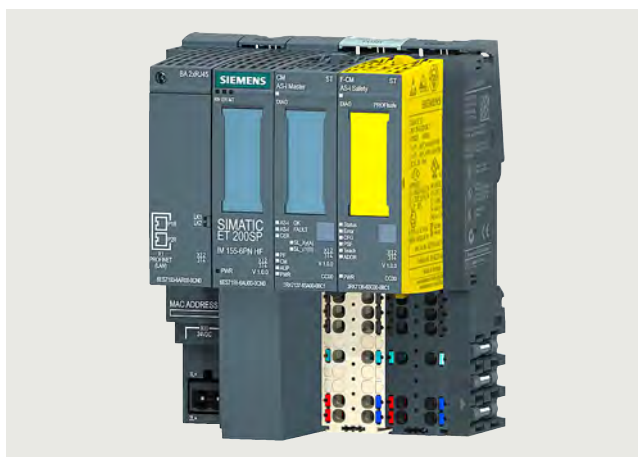

Combination of an ET 200SP interface module, CM AS-i Master ST and F-CM AS-i Safety ST

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Fail-safe I/O modules > Fail-safe communication > F-CM AS-i Safety ST for SIMATIC ET 200SP

With the digital and analog I/O modules of the ET 200SP, additional local inputs and outputs can be realized so as to ensure that the modular AS-i gateway complies precisely with customer requirements. Expansion variants for almost every application are possible thanks to the selection of standard and fail-safe I/O modules.

Besides the single AS-i master, double, triple or generally multiple masters can be realized with or without fail-safe functionality.

Supported BaseUnits

With the combination of the CM AS-i Master ST and F-CM AS-i Safety ST modules, the CM module is plugged onto a light type C0 BaseUnit and, immediately to the right of it, the F-CM module is plugged onto a dark type C1 BaseUnit. The AS-i cable is connected only on the light BaseUnit of the CM module.

Notes on security

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens products and solutions represent one component of such a concept.

For more information on industrial cybersecurity, see <https://www.siemens.com/cybersecurity-industry>.

Configuration

The following software is required for configuration of the F-CM AS-i Safety ST module:

- STEP 7 (TIA Portal) and Safety Advanced or
- STEP 7 (Classic) and Distributed Safety or F-Configuration Pack SP11 or SIMATIC S7 F/FH systems

Configuration and programming are done entirely in the STEP 7 user interface. No additional configuration software is needed for commissioning.

Data management – together with all other configuration data of the SIMATIC – is realized completely in the S7 project.

The input and output channels are assigned to the process image automatically and manual linking via configuration blocks is not necessary.

If the F-CM AS-i Safety ST module is replaced, all necessary settings are automatically imported into the new module.

The F-CM AS-i Safety ST module occupies 16 input bytes and 8 output bytes in the I/O data of the ET 200SP station.

For diagnostics during ongoing operation, diagnostics blocks with clearly arranged visualization on the SIMATIC HMI panel are available or can be downloaded free of charge via a web browser, see <https://support.industry.siemens.com/cs/ww/en/view/109479103>.

The screenshot shows the 'AS-i Diagnostics' web interface for 'F-CM AS-i Safety 1'. The top navigation bar includes 'Info', 'Status AS-i Safety', and 'Select AS-i Safety'. The main content area is divided into two sections: 'Status Safety AS-i Input' and 'Status Safety AS-i Output'. The input section shows a grid of 31 channels (1-31) with channel 1 highlighted in red (Error) and channel 7 in green (OK). The output section shows a grid of 16 channels (#0-#15) with channel #0 highlighted in yellow (OK). A legend on the left indicates 'Status Operation' with 'Error' (red), 'CFG' (grey), 'PSF' (red), 'Teach' (blue), and 'ADDR' (grey). The bottom navigation bar includes 'AS-i Network', 'AS-i Safety', 'AS-i Address', and 'Language'.

Diagnostics block for F-CM AS-i Safety ST

Application

Thanks to use of the fail-safe module in the ET 200SP, it is possible to fulfill the safety-related application requirements in a manner that is integrated in the overall automation solution.

The safety functions required for fail-safe operation are integrated in the modules. Communication with the fail-safe SIMATIC S7 CPUs is realized via PROFI-safe.

The safety application is programmed in the SIMATIC S7 F-CPU with Distributed Safety, S7 F/FH Systems or Safety Advanced. The fail-safe input signals of the ASIsafe input modules are read via the AS-i bus line and are combined with any chosen further signals in the fail-safe program.


The fail-safe F-CM AS-i Safety ST module can be configured independently of the AS-i master. In this way, the F-CM AS-i Safety ST module can be connected to any AS-i network as required to evaluate the Safety data of the safe AS-i input modules and forward them to the F-CPU. In this case, the fail-safe module is plugged into a light BaseUnit of type C0.

The fail-safe output signals can be output via safe SIMATIC output modules or also via safe AS-i. No special functions are required for this in the program.

Operation with SINUMERIK 840D sl is possible with SINUMERIK software version V4.7 SP2 HF1 or higher.

Together with an ET 200SP station with ET 200SP F-CPU 1510SP F, 1512SP F, 1514SP F or 1515SP PC F, pre-processing of safe AS-i signals directly in the ET 200SP station is possible, as well as the configuration of an autonomous AS-i Safety station without a higher-level CPU.

Configuration examples of AS-Interface networks with CM AS-i Master ST and F-CM AS-i Safety ST for SIMATIC ET 200SP

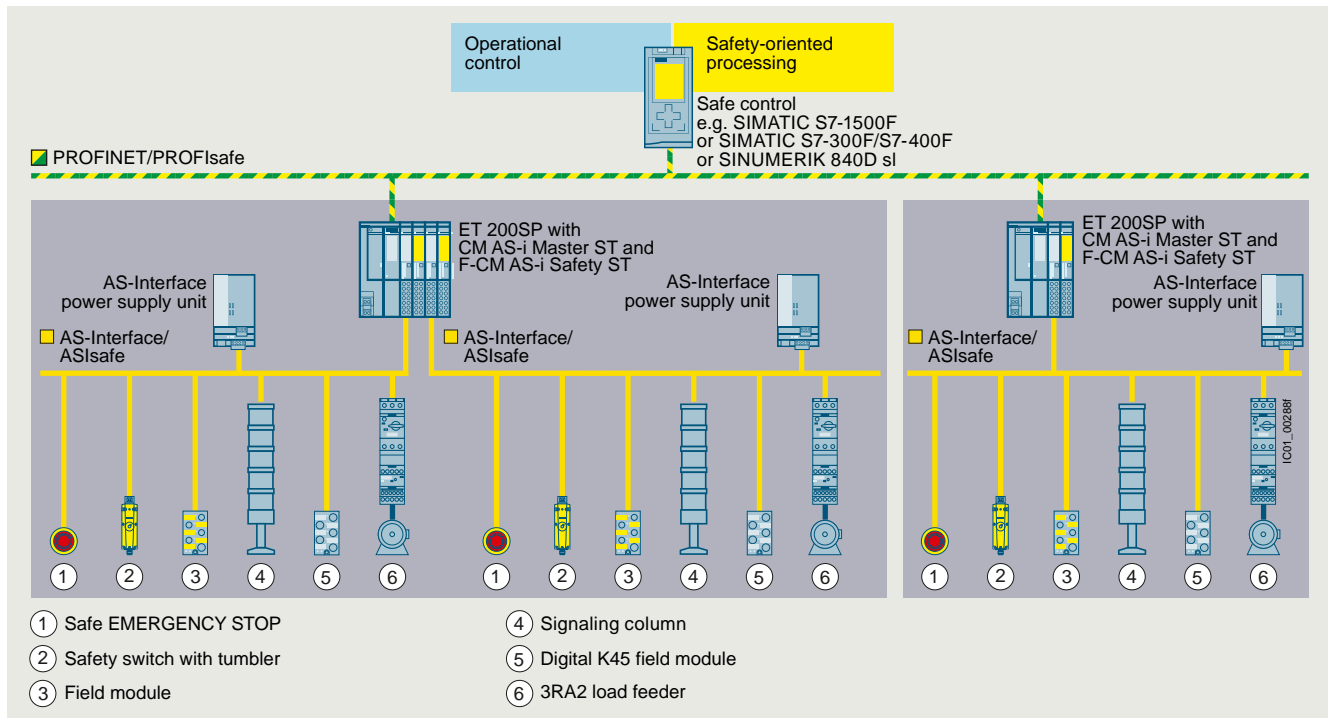

AS-Interface configuration comprising an ET 200SP station with CM AS-i Master ST and F-CM AS-i Safety ST modules

Ordering data

Article No.

Article No.

F-CM AS-i Safety ST communications module

- Fail-safe module for SIMATIC ET 200SP, can be plugged onto BaseUnit type C1 (alternatively type C0)
- Operation requires an AS-i master, e.g. CM AS-i Master ST, see from page 10/162
- Can be used up to SIL 3 (IEC 62061)/PL e (ISO 13849-1)
- Coding element type H (included in scope of supply)
- Dimensions (W x H x D) mm: 20 x 73 x 58

3RK7136-6SC00-0BC1**Accessories****BaseUnit BU20-P6+A2+4B**

- BaseUnit (dark), BU type C1
- Suitable for the F-CM AS-i Safety ST failsafe module
- Continuation of an AS-i network, connection with the AS-i voltage of the left-hand module
- With spring-loaded terminals

6ES7193-6BP20-0BC1**Coding elements type H (spare part)**

- For the ET 200SP modules F-CM AS-i Safety ST and CM 4xIO-Link
- With spring-loaded terminals
- Packing unit 5 items

6ES7193-6EH00-1AA0**More accessories**

see CM AS-i Master ST communications module, page 10/165

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Ex I/O modules

Overview



ET200SP_Ex_IO_withPM

The intrinsically safe ET 200SP HA Ex I/O modules extend the SIMATIC ET 200SP HA and SIMATIC ET 200SP distributed I/O systems with the option of integrating devices located in hazardous areas (intrinsically safe sensors, actuators and HART field devices) into the system.

The ET 200SP HA Ex I/O modules with device protection according to intrinsic safety "i" offer channel outputs in Zone 0 or 1. 2-channel HART analog input and output modules and 2/4-channel digital input and output modules with different characteristic curves as well as a power module for intrinsically safe power supply of the modules.

Separate Ex isolators with correspondingly complex wiring and high space requirements are no longer required. The I/O modules can be installed up to ATEX Zone 2 and offer intrinsically safe circuits in Ex ia design for field devices up to Zone 0.

The Ex modules offer channel diagnostics and Configuration in Run and are approved for ambient temperatures from -40 to +70 °C.

Ordering data


Article No.

Ex digital modules SIMATIC ET 200SP HA	
Digital Ex-i input module, Ex-DI 4xNAMUR Suitable for BaseUnit Type X1, channel diagnostics	6DL1131-6TD00-0HX1
Digital Ex-i output module, Ex-DQ 2x23,1VDC/20 mA Suitable for BaseUnit Type X1, channel diagnostics	6DL1132-6EB00-0HX1
Digital Ex-i output module, Ex-DQ 2x17,4VDC/27 mA Suitable for BaseUnit Type X1, channel diagnostics	6DL1132-6CB00-0HX1
Ex analog modules SIMATIC ET 200SP HA	
Analog Ex-i HART input module, Ex-AI 2xI 2-wire HART Suitable for BaseUnit Type X1, channel diagnostics, 16 bits, +/-0.3%	6DL1134-6TB00-0HX1
Analog Ex-i input module, Ex-AI 4xTC/2xRTD 2-/3-/4-wire Suitable for BaseUnit Type X1, channel diagnostics, 16 bits, +/-0.05%	6DL1134-6JD00-0HX1
Analog Ex-i HART output module, Ex-AQ 2xI HART HF Suitable for BaseUnit Type X1, channel diagnostics, 16 bits, +/-0.3%	6DL1135-6TB00-0HX1
Power module and BaseUnits	
Power module Ex-PM E 24 V 0.8 A, W x H: 50 mm x 117 mm, suitable for BaseUnit Type W0	6DL1133-6PX00-0HW0
BU Type X1 for I/O modules Push-in terminals, W x H: 20 mm x 117 mm	6DL1193-6BP00-0BX1
BU Type W0 for Ex power module PM-E W x H: 50 mm x 117 mm	6DL1193-6BP00-0DW0


Technical specifications

Technical specifications see ET 200SP HA, Ex I/O modules, page 10/302.

Overview

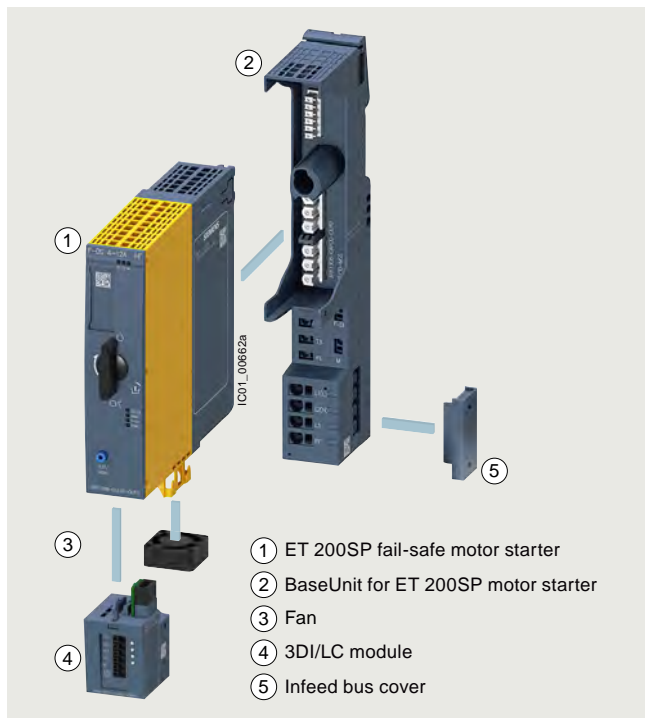

Motor starter, BaseUnit, fan and 3DI/LC control module

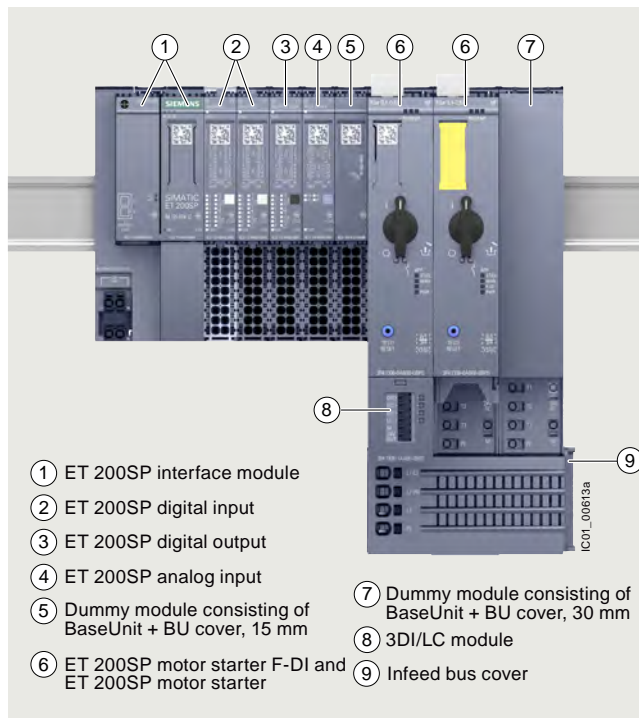

3RK1308 motor starter in the ET 200SP I/O system

More information

Homepage see <https://www.siemens.com/sirius-motor-starter-et200sp>SiePortal see <https://www.siemens.com/product?3RK1308>TIA Selection Tool see <https://www.siemens.com/TST>Decision support for motor start – Starting and operating three-phase asynchronous motors efficiently, see <https://www.siemens.com/motorstart-guide>SiePortal topic page with information on the planning and operating phase, see <https://support.industry.siemens.com/cs/ww/en/view/109792664>Further components in the ET 200SP I/O system see from page 10/5 or <https://www.siemens.com/et200sp>Catalog IC 10 see <https://www.siemens.com/ic10>

ET 200SP motor starters

ET 200SP is a scalable and extremely flexible modular I/O system with IP20 degree of protection.

As I/O modules, the ET 200SP motor starters are an integral part of this I/O system. They are switching and protection devices for single- and three-phase loads and are available as direct-on-line or reversing starters.



Video: SIMATIC ET 200SP motor starter - Flexible, powerful, compact, https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=5857705611001

Basic functionality

All versions of the ET 200SP motor starter feature the following functionality:

- Fully pre-wired motor starters for switching and protecting any AC loads up to 5.5 kW from 48 V AC to 500 V AC
- Disconnection possible via fail-safe motor starters up to SIL 3 and PL e Cat. 4
- With self-assembling 32 A power bus, i.e. the load voltage is only fed in once for a group of motor starters

- All control supply voltages connected only once, i.e. when modules are added they are automatically connected to the next module
- Hot swapping is permissible
- Digital inputs can optionally be used via a 3DI/LC module.
- Control of the motor starter from the control system and diagnostics status via the cyclic process image
- Diagnostics capability for active monitoring of the switching and protection functions
- The signal states in the process image of the motor starter provide information about protective devices (short circuit or overload), the switching states of the motor starter, and system faults.

Starter Kit

The 3RK1908-1SK00 Starter Kit is a favorably priced complete package for switching and monitoring motors in the ET 200SP system, see page 10/245.

It contains:

- A 3RK1308-0BC00-0CP0 reversing starter (0.9 to 3 A)
- A 3RK1908-0AP00-0AP0 BaseUnit with 500 V and 24 V AC/DC infeed
- An EMC distance module (consisting of 6ES7193-6BP00-0BA0 BaseUnit plus 6ES7133-6CV15-1AM0 BU cover 15 mm)

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

ET 200SP motor starters

Use of fan

For motor starters with a 12 A rated current, the 3RW4928-8VB00 fan is included in the scope of supply.

This fan can also be ordered as an option for motor starters with lower rated currents, if the boundary conditions demand this. For information on the ambient conditions for the use of motor starters, see [chapter Product features in the Equipment Manual](https://support.industry.siemens.com/cs/ww/en/view/109479973/149504448395), <https://support.industry.siemens.com/cs/ww/en/view/109479973/149504448395>.

Designing interference-free motor starters

For interference-free operation of the ET 200SP station in accordance with IEC 60947-4-2 standard, use a dummy module before the first motor starter. The dummy module consists of the 6ES7193-6BP00-0BA0 or 6ES7193-6BP00-0DA0 BaseUnit and the 6ES7133-6CV15-1AM0 BU cover 15 mm.

The 15 mm BU cover protects the plug contacts of the BaseUnit against dirt.

Electromechanical switching devices in series with hybrid motor starters

Switching an inductive load - in particular of motors <1 kW with high inductance - with an electromechanical switching device (e.g. contactor) can cause high and steep voltage edges.

The resulting faults/damage can be prevented by first disconnecting with the hybrid motor starter or by using EMC suppression modules:

- For 3RT2916-1P.. EMC suppression modules for direct mounting on the contactor, see <https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/10047575>
- For motor suppression modules that are fitted in the main circuit, see [page 10/245](https://support.industry.siemens.com/cs/ww/en/view/109758696)

Note:

For more information, see <https://support.industry.siemens.com/cs/ww/en/view/109758696>.

3DI/LC control module




3DI/LC control module

This is a digital input module with three inputs for local motor starter functions such as "manual local control", "implementation of fast inputs" or "end position disconnection". For a list of all the functions permitted by the 3DI/LC module, see [chapter Functions in the Equipment Manual](https://support.industry.siemens.com/cs/ww/en/view/109479973/95153659275), <https://support.industry.siemens.com/cs/ww/en/view/109479973/95153659275>.

The module is plugged into the front of the motor starter from which it is supplied with a 24 V DC operating voltage.

BaseUnits for motor starters

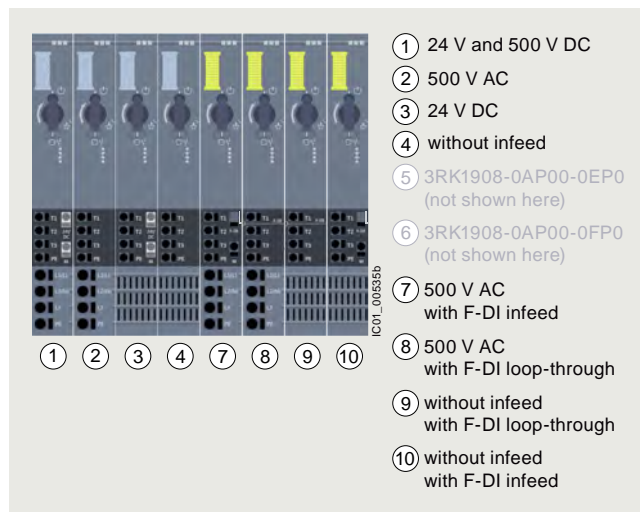

View of the BaseUnit infeeds for the motor starters

BaseUnits are components for accommodating the ET 200SP I/O modules.

The self-assembling voltage buses integrated into the BaseUnits reduce wiring outlay to the single infeed (both of auxiliary and load voltage).

All modules following on the right are automatically supplied upon plugging the BaseUnits together, if BaseUnits are inserted with routing.

The rugged design and keyed connection technology enables use in harsh industrial conditions.

The BaseUnits are available with various infeeds for the motor starters.

Article No. scheme

Product versions		Article number	
Motor starters		3RK1308 - 0 □ □ 0 0 - 0 C P 0	
Product function	Direct-on-line starters	A	For motor standard output 0.09 ... 5.5 kW ¹⁾
	Reversing starters	B	For motor standard output 0.09 ... 5.5 kW ¹⁾
	Fail-safe direct-on-line starters	C	For motor standard output 0.09 ... 5.5 kW ¹⁾
	Fail-safe reversing starters	D	For motor standard output 0.09 ... 5.5 kW ¹⁾
Current range	0.1 ... 0.4 A	A	Maximum current-carrying capacity when starting 4 A
	0.3 ... 1 A	B	Maximum current-carrying capacity when starting 10 A
	0.9 ... 3 A	C	Maximum current-carrying capacity when starting 30 A
	2.8 ... 9 A	D	Maximum current-carrying capacity when starting 90 A
	4 ... 12 A	E	Including fan (3RW4928-8VB00), maximum current-carrying capacity when starting 100 A

Example **3RK1308 - 0 A D 0 0 - 0 C P 0**

1) For standard motors: Single- or three-phase asynchronous motors, single-phase asynchronous motors, single-phase asynchronous motors, at 400 V AC and 500 V AC; the actual startup characteristics of the motor as well as its rated data are important factors here.

Product versions		Article number	
BaseUnit		3RK1908 - 0 A P 0 0 - 0 □ P 0	
BU infeed	24 V and 500 V AC	A	
	24 V DC	B	
	500 V AC	C	
	without infeed	D	
	500 V AC	G	with F-DI infeed
	500 V AC	H	with F-DI loop-through
	without infeed	J	with F-DI loop-through
without infeed	K	with F-DI infeed	

Example **3RK1908 - 0 A P 0 0 - 0 A P 0**

Note:

The Article No. schemes show an overview of product versions for better understanding of the logic behind the article numbers.

For your orders, please use the article numbers quoted in the selection and ordering data.

Benefits

The ET 200SP motor starters offer a number of advantages:

- Fully integrated into the ET 200SP I/O system (including TIA Selection Tool and TIA Portal)
- High degree of flexibility when it comes to safety applications via SIMATIC F-CPU or 3SK safety relays up to SIL 3 and PL e Cat.4
- Simple, integrated current value transmission
- Extensive parameterization by means of TIA Portal
- Increase of plant availability through fast replacement of units (easy mounting and plug-in technology)
- Greater endurance and reduced heat losses thanks to hybrid technology
- Less space required in the control cabinet (20 to 80%) as a result of greater functional density (direct-on-line and reversing starters in same width)
- Extensive diagnostics and information for preventive maintenance
- Parameterizable inputs via 3DI/LC control module
- Less wiring and testing required as a result of integrating several functions into a single device
- Lower overheads for stock keeping and configuration as a result of the wide setting range of the electronic overload release (up to 1:3)
- Technology has lower inherent power losses than speed-controlled drive systems, so that less cooling (and smaller footprint) are possible

- The ET 200SP motor starters can be used with highly efficient IE3 and IE4 motors, [see Application manual, https://support.industry.siemens.com/cs/ww/en/view/94770820](https://support.industry.siemens.com/cs/ww/en/view/94770820). Take the current characteristics of the connected motor and motor starter into account when dimensioning. In addition to the rated current, the maximum permissible current range of the motor starter and the ratio of the rated current to the starting current of the motor are relevant. For more information on IE3/IE4, [see Catalog IC 10, https://www.siemens.com/ic10](https://www.siemens.com/ic10).

Standards and approvals

- IEC/EN 60947-4-2
- UL 60947-4-2
- CSA
- ATEX
- IEC62061: SIL 3
- ISO 13849-1: PL e
- CCC approval for China

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

ET 200SP motor starters

Application

The ET 200SP motor starters are suitable for the following applications:

- Switching and monitoring of
 - 3-phase motors with overload and short-circuit protection (e.g. 400 V asynchronous motors for secondary drives in conveyor systems)
 - 1-phase motors with overload and short-circuit protection (e.g. 230 V motors for pump applications)
 - Resistive loads by means of current value and diagnostics via the maintenance function (e.g. for heaters)
- Plant monitoring and energy management in conveyor systems:
By means of phase asymmetry and zero current detection, for example, it is possible to monitor drive belts and blocking.

- Track switching and lifting table control in conveyor systems: Track switches can be implemented by means of the quick stop function and lifting table controls by means of the "immediate end position disconnection" function without any laborious programming.
- Safe isolation of drive from main power supply:
- The isolating functions in accordance with IEC 60947-1 offer protection against inadvertent activation during plant maintenance.

Motor starters in the process industry

For the ET 200SP motor starters, special 3RK1908-0AP00-0.H0 BaseUnits are available that enable the device to be used in the ET 200SP HA I/O system, too. This is typically used in process engineering applications.

For more information, see <https://mall.industry.siemens.com/mall/ww/en/Catalog/Products/10398144?tree=CatalogTree>.

Technical specifications


More information

SiePortal see <https://www.siemens.com/product?3RK1308>


Equipment manual see <https://support.industry.siemens.com/cs/ww/en/view/109479973>

FAQs see <https://support.industry.siemens.com/cs/ww/en/ps/21800/faq>

Motor starter ET 200SP

Article number		3RK1308-0.A00-0CP0	3RK1308-0.B00-0CP0	3RK1308-0.C00-0CP0	3RK1308-0.D00-0CP0	3RK1308-0.E00-0CP0
product category		Motorstarter				
General technical data						
Width x Height x Depth	mm	30 × 142 × 150				
						
design of the switching contact		Hybrid				
type of the motor protection		solid-state				
installation altitude at height above sea level	m	4 000, For derating see equipment manual, https://support.industry.siemens.com/cs/ww/en/view/109479973				
mounting position		Vertical, horizontal (observe derating)				
fastening method		pluggable in BaseUnit				
ambient temperature						
• during operation	°C	-25 ... +60				
• during transport	°C	-40 ... +70				
• during storage	°C	-40 ... +70				
relative humidity during operation	%	10 ... 95				
vibration resistance		15 mm to 6 Hz; 2g to 500 Hz				
shock resistance		6 g / 11 ms				
protection class IP on the front acc. to IEC 60529		IP20				
touch protection on the front acc. to IEC 60529		finger-safe				
type of assignment		1				
Electrical data						
supply voltage at DC rated value	V	24				
operating power at AC-53a at 400 V rated value	kW	0.12	0.25	1.1	4	5.5
operating frequency rated value	Hz	50 ... 60				
breaking capacity maximum short-circuit current (I_{cu})						
• at 400 V rated value	kA	55				
• at 500 V rated value	kA	55				
adjustable current response value current of the current-dependent overload release	A	0.1 ... 0.4	0.3 ... 1	0.9 ... 3	2.8 ... 9	4 ... 12
ampacity when starting maximum	A	4	10	30	90	100
maximum permissible voltage for safe isolation between main and auxiliary circuit	V	500				
insulation voltage rated value	V	500				
trip class		CLASS OFF / 5 / 10 adjustable				


BaseUnits for motor starter

Article number	3RK1908-0AP00-0AP0	3RK1908-0AP00-0BP0	3RK1908-0AP00-0CP0 3RK1908-0AP00-0GP0 3RK1908-0AP00-0HP0	3RK1908-0AP00-0DP0 3RK1908-0AP00-0JP0 3RK1908-0AP00-0KP0
product category	BaseUnit			
General technical data				
Width x Height x Depth	mm	30 × 215 × 75		
				
ambient temperature				
• during operation	°C	-25 ... +60		
• during transport	°C	-40 ... +70		
• during storage	°C	-40 ... +70		
protection class IP on the front acc. to IEC 60529		IP20		
touch protection on the front acc. to IEC 60529		finger-safe		
Connections/ Terminals				
type of connectable conductor cross-sections				
• at the inputs for supply voltage				
- solid		1 x 0.5 ... 2.5 mm ²	--	--
- finely stranded with core end processing		1 x 0.5 ... 2.5 mm ²	--	--
- finely stranded without core end processing		1 x 0.5 ... 2.5 mm ²	--	--
- at AWG cables solid		1 x 20 ... 12	--	--
• for supply				
- solid		1 x 1 ... 6 mm ²	--	1 x 1 ... 6 mm ²
- finely stranded with core end processing		1 x 1 ... 6 mm ²	--	1 x 1 ... 6 mm ²
- finely stranded without core end processing		1 x 1 ... 6 mm ²	--	1 x 1 ... 6 mm ²
- at AWG cables solid		1 x 18 ... 10	--	1 x 18 ... 10
• for load-side outgoing feeder				
- solid		1 x 0.5 ... 2.5 mm ²		
- finely stranded with core end processing		1 x 0.5 ... 2.5 mm ²		
- finely stranded without core end processing		1 x 0.5 ... 2.5 mm ²		
- at AWG cables solid		1 x 20 ... 12		
type of electrical connection for auxiliary and control circuit		spring-loaded terminals (push-in)		
Miscellaneous				
shape of the screwdriver tip		Slot		
size of the screwdriver tip		Standard screwdriver 0.6 mm x 3.5 mm		

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

ET 200SP motor starters**3DI/LC control module**

Article number	3RK1908-1AA00-0BP0	
product designation	3DI/LC control module	
General technical data		
Width x Height x Depth	mm	30 × 54.5 × 42.3
		
design of the product	Accessories	
number of digital inputs	4	
installation altitude at height above sea level maximum	m	2 000
mounting position	vertical, horizontal, flat	
fastening method	Can be plugged onto motor starters	
ambient temperature		
• during operation	°C	-25 ... +60
• during transport	°C	-40 ... +70
• during storage	°C	-40 ... +70
Connections/ Terminals		
connectable conductor cross-section for auxiliary contacts		
• solid or stranded	mm ²	0.2 ... 1.5
• finely stranded with core end processing	mm ²	0.25 ... 1.5
• finely stranded without core end processing	mm ²	0.2 ... 1.5
AWG number as coded connectable conductor cross section for auxiliary contacts	24 ... 16	
type of electrical connection for auxiliary and control circuit	spring-loaded terminals (push-in)	
Electrical data		
type of voltage of the control supply voltage	DC	
control supply voltage at DC rated value	V	20.4 ... 28.8
Sonstiges		
shape of the screwdriver tip	Slot	
size of the screwdriver tip	Standard screwdriver 0.6 mm x 3.5 mm	

IE3/IE4 ready

ET 200SP motor starters

Selection and ordering dataadjustable current response
value current of the current-
dependent overload releaseampacity when
starting maximum

Article number

A

A

Motor starter**Direct-on-line starter**

3RK1308-0AB00-0CP0

0.1 ... 0.4	4
0.3 ... 1	10
0.9 ... 3	30
2.8 ... 9	90
4 ... 12	100

3RK1308-0AA00-0CP0
3RK1308-0AB00-0CP0
3RK1308-0AC00-0CP0
3RK1308-0AD00-0CP0
3RK1308-0AE00-0CP0

Reversing starter

3RK1308-0BB00-0CP0

0.1 ... 0.4	4
0.3 ... 1	10
0.9 ... 3	30
2.8 ... 9	90
4 ... 12	100

3RK1308-0BA00-0CP0
3RK1308-0BB00-0CP0
3RK1308-0BC00-0CP0
3RK1308-0BD00-0CP0
3RK1308-0BE00-0CP0

Fail-safe direct-on-line starter

3RK1308-0CE00-0CP0

0.1 ... 0.4	4
0.3 ... 1	10
0.9 ... 3	30
2.8 ... 9	90
4 ... 12	100

3RK1308-0CA00-0CP0
3RK1308-0CB00-0CP0
3RK1308-0CC00-0CP0
3RK1308-0CD00-0CP0
3RK1308-0CE00-0CP0

Fail-safe reversing starter

3RK1308-0DE00-0CP0

0.1 ... 0.4	4
0.3 ... 1	10
0.9 ... 3	30
2.8 ... 9	90
4 ... 12	100

3RK1308-0DA00-0CP0
3RK1308-0DB00-0CP0
3RK1308-0DC00-0CP0
3RK1308-0DD00-0CP0
3RK1308-0DE00-0CP0

10

I/O systems**SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP****ET 200SP motor starters**

design of the product	operating voltage of AC supply	supply voltage of DC supply	Article number
	V	V	

BaseUnits with Push-In terminal¹⁾

3RK1908-0AP00-0AP0

For motor starter

• For AC/DC feed in	500	24	3RK1908-0AP00-0AP0
• For DC feed in	--	24	3RK1908-0AP00-0BP0
• For AC feed in	500	--	3RK1908-0AP00-0CP0
• Without feed in	--	--	3RK1908-0AP00-0DP0

For failsafe motor starters

• With AC infeed, with F-DI infeed	500	--	3RK1908-0AP00-0GP0
• With AC infeed, with F-DI loop-through	500	--	3RK1908-0AP00-0HP0
• Without AC/DC infeed, with F-DI loop-through	--	--	3RK1908-0AP00-0JP0
• Without AC/DC infeed, with F-DI infeed	--	--	3RK1908-0AP00-0KP0

¹⁾ The voltage is looped-through from BaseUnits with infeed to subsequent BaseUnits without infeed.

Type of product	Supply voltage at DC rated value	Loop through the potential group from the left	Article number
	V		

BaseUnits with Push-In terminal

6ES7193-6BP00-0BA0

For dummy modules

• Dark, looping through the potential group	24	Yes	6ES7193-6BP00-0BA0
• Light, opening a new potential group	24	No	6ES7193-6BP00-0DA0


10

Control supply voltage at DC rated value	Product function	Article number
	Local control Digital inputs parameterizable	
V		

3DI/LC control module with Push-In terminal

3RK1908-1AA00-0BP0

20.4 ... 28.8	Yes Yes	3RK1908-1AA00-0BP0
---------------	-----------	---------------------------

	Product designation	Type of product	Article number
Accessories			
	BU cover 15 mm	for BaseUnits Type A0 or A1	6ES7133-6CV15-1AM0
6ES7133-6CV15-1AM0			
	BU cover 30 mm	For protection of empty slots, 30 mm	3RK1908-1CA00-0BP0
3RK1908-1CA00-0BP0			
	Infeed bus covers (1 bag containing 10 covers)	for ET 200SP	3RK1908-1DA00-2BP0
3RK1908-1DA00-2BP0			
	Mechanical brackets (1 bag containing 5 mechanical brackets)	Mechanical, for ET 200SP	3RK1908-1EA00-1BP0
3RK1908-1EA00-1BP0			
	Fan	Can be used for 3RK1308	3RW4928-8VB00
3RW4928-8VB00			
	Motor suppression modules		
	• Square		3RK1911-6EA00
3RK1911-6EA00			
	• Round		3RK1911-6EB00
3RK1911-6EB00			
	Starter Kit	consists of 3RK1308-0BC00-0CP0 reversing starter (0.9 ... 3 A), 3RK1908-0AP00-0AP0 BaseUnit with 500 V and 24 V AC/DC infeed, and EMC distance module (consisting of 6ES7193-6BP00-0BA0 BaseUnit plus 6ES7133-6CV15-1AM0 BU cover 15 mm)	3RK1908-1SK00
3RK1908-1SK00			

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Pneumatics > AirLINE SP valve terminal type 8647 (Bürkert Co.)

Overview



- For pneumatic control of actuators with ET 200SP
- Can be used together with system and IO components of the ET 200SP distributed I/O system.
- Product of the product partners Bürkert Fluid Control Systems, and can only be obtained from Bürkert Fluid Control Systems.

Note

Product partners are external companies outside Siemens AG and its associated companies. Information and descriptions of products made by product partners are non-binding, and are the responsibility of the product partners. These products are manufactured independently and under the responsibility of the particular product partner, and are sold and supplied by it under its terms of business and delivery.

Unless compulsory by law, Siemens assumes no liability and makes no guarantee for for these products or for the connection with these products of the product partners. Please refer also to the note on exemption from liability/use of hyperlinks.

Benefits

- High process safety by using non-return valves and pneumatic infeed modules with pressure monitoring.
- System-wide detailed diagnostics in plain text, and also locally on an LC display
- Quick and easy valve change during operation (hot swapping)
- Reduced number of components in the control cabinet (compact control cabinet is possible)
- Quick installation & configuration of the pneumatic connections

Application

Valve terminals are widely used in industrial automation, and serve as pilot valves for controlling actuators in the food, pharmaceutical and water treatment industries. In combination with the AirLINE SP, type 8647 from the Bürkert Co., the ET 200SP forms a universal interface between process and plant control, and enables the flexible, modular structure of pilot valves and I/O modules. The valve terminal can also be attached to a control cabinet floor with an AirLINE Quick Adapter, which further reduces the space required in the control cabinet, and significantly simplifies the pneumatic installation.

More information

For more detailed information about the AirLINE SP, type 8647 (e.g. data sheet, operating manual) please contact Bürkert directly, see under <http://www.burkert.com/en/type/8647>.

Disclaimer of liability

This information and the descriptions have been compiled with great care. However, it is not possible for Siemens to verify that the data supplied by product partners is complete, correct and up-to-date. The possibility that individual items of information might be incorrect, incomplete, or not up-to-date cannot therefore be ruled out. Unless compulsory by law, Siemens accepts no liability for the usability of the data or of the products for the user per se.

Overview



In terms of design and functionality, the SIMATIC ET 200SP PS single-phase load power supply with automatic range switching of the input voltage is perfectly matched to the SIMATIC ET 200SP. The SIMATIC component and the power supply are wired by means of uniform push-in terminal technology. The 24 V supply provides power to the ET 200SP system components such as the interface module, technology module and communication module, as well as the digital or analog inputs/outputs. Comprehensive certifications, such as UL or GL, facilitate universal use. Its extremely flat design also makes this power supply ideally suited for installation in compact on-site control boxes.

Ordering data

Article No.

SIMATIC ET 200SP PS

Stabilized power supply for
SIMATIC ET 200SP
Input: 120/230 V AC
Output: 24 V DC/5 A

6EP7133-6AB00-0BN0**SIMATIC ET 200SP PS**

Stabilized power supply for
SIMATIC ET 200SP
Input: 120/230 V AC
Output: 24 V DC/10 A

6EP7133-6AE00-0BN0

Technical specifications

Article number	6EP7133-6AB00-0BN0	6EP7133-6AE00-0BN0
product brand name	SIMATIC ET 200SP PS	SIMATIC ET 200SP PS
type of current supply	24 V/5 A	24 V/10 A
input		
type of the power supply network	1-phase AC	1-phase AC
supply voltage at AC	Automatic range selection	Automatic range selection
supply voltage	120 V/230 V	120 V/230 V
input voltage 1 at AC	85 ... 132 V	85 ... 132 V
input voltage 2 at AC	170 ... 264 V	170 ... 264 V
wide range input	No	No
overvoltage overload capability	$2.3 \times V_{in \text{ rated}}$, 1.3 ms	$2.3 \times V_{in \text{ rated}}$, 1.3 ms
buffering time for rated value of the output current in the event of power failure minimum	20 ms	20 ms
operating condition of the mains buffering	at $V_{in} = 93/187 \text{ V}$	at $V_{in} = 93/187 \text{ V}$
line frequency	50 Hz/60 Hz	50 Hz/60 Hz
line frequency initial value	47 ... 63 Hz	47 ... 63 Hz
line frequency full-scale value		
input current		
• at rated input voltage 120 V	2.16 A	4.34 A
• at rated input voltage 230 V	1.22 A	1.92 A
current limitation of inrush current at 25 °C maximum	45 A	60 A
I^2t value maximum	3.15 A ² ·s	6.3 A ² ·s
fuse protection type	T 3.15 A/250 V (not accessible)	T 6.3 A/250 V (not accessible)
fuse protection type in the feeder	recommended LS switch: B/C 6 A/3 A	recommended LS switch: B/C 10 A/6 A

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Power supplies > 1-phase, 24 V DC (for SIMATIC ET 200SP)****Technical specifications**

Article number	6EP7133-6AB00-0BN0	6EP7133-6AE00-0BN0
product brand name	SIMATIC ET 200SP PS	SIMATIC ET 200SP PS
type of current supply	24 V/5 A	24 V/10 A
output		
voltage curve at output	Controlled, isolated DC voltage	Controlled, isolated DC voltage
output voltage at DC rated value	24 V	24 V
output voltage		
• at output 1 at DC rated value	24 V	24 V
output voltage adjustable	Yes; via potentiometer	Yes; via potentiometer
adjustable output voltage initial value	22.8 V	22.8 V
adjustable output voltage full-scale value	28 V	28 V
relative overall tolerance of the voltage	3 %	3 %
relative control precision of the output voltage		
• on slow fluctuation of input voltage	0.1 %	0.1 %
• on slow fluctuation of ohm loading	1 %	1 %
residual ripple		
• maximum	150 mV	150 mV
• typical	50 mV	50 mV
voltage peak		
• maximum	240 mV	240 mV
• typical	150 mV	150 mV
display version for normal operation	Green LED for 24 V OK	Green LED for 24 V OK
type of signal at output	Relay contact (NO contact, rating 60 V DC/ 0.3 A) for "24 V OK"	Relay contact (NO contact, rating 60 V DC/ 0.3 A) for "24 V OK"
behavior of the output voltage when switching on	Overshoot of $V_{out} < 3\%$	Overshoot of $V_{out} < 3\%$
response delay maximum	0.3 s	0.3 s
voltage increase time of the output voltage		
• typical	30 ms	30 ms
output current		
• rated value	5 A	10 A
• rated range	0 ... 6 A; 5 A up to +60°C; +60 ... +70 °C: Derating 3%/K	0 ... 12 A; 10 A up to +60°C; +60 ... +70 °C: Derating 3%/K
supplied active power typical	120 W	240 W
short-term overload current		
• on short-circuiting during the start-up typical	15 A	30 A
• at short-circuit during operation typical	15 A	30 A
duration of overloading capability for excess current		
• on short-circuiting during the start-up	800 ms	750 ms
• at short-circuit during operation	800 ms	800 ms
bridging of equipment	Yes	Yes
number of parallel-switched equipment resources	2	2
efficiency in percent	88 %	90 %
power loss [W]		
• at rated output voltage for rated value of the output current typical	17 W	26 W
• during no-load operation maximum	2.7 W	2.8 W

Technical specifications

Article number	6EP7133-6AB00-0BN0	6EP7133-6AE00-0BN0
product brand name	SIMATIC ET 200SP PS	SIMATIC ET 200SP PS
type of current supply	24 V/5 A	24 V/10 A
closed-loop control		
relative control precision of the output voltage with rapid fluctuation of the input voltage by +/- 15% typical	0.3 %	0.3 %
relative control precision of the output voltage at load step of resistive load 10/90/10 % typical	3 %	3 %
setting time		
• load step 10 to 90% typical	1 ms	1 ms
• load step 90 to 10% typical	1 ms	1 ms
protection and monitoring		
design of the overvoltage protection	protection against overvoltage in case of internal fault $V_{out} < 31.8 V$	protection against overvoltage in case of internal fault $V_{out} < 31.8 V$
property of the output short-circuit proof	Yes	Yes
design of short-circuit protection	Constant current characteristic	Constant current characteristic
• response value current limitation	7 ... 7.5 A	14 ... 15 A
overcurrent overload capability		
• in normal operation	overload capability 150 % I_{out} rated up to 5 s/min	overload capability 150 % I_{out} rated up to 5 s/min
enduring short circuit current RMS value		
• typical	7 A	14.1 A
safety		
galvanic isolation between input and output	Yes	Yes
galvanic isolation	Safety extra-low output voltage V_{out} acc. to EN 60950-1 and EN 50178	Safety extra-low output voltage V_{out} acc. to EN 60950-1 and EN 50178
operating resource protection class	Class I	Class I
leakage current		
• maximum	3.5 mA	3.5 mA
• typical	1 mA	1 mA
protection class IP standard	IP20	IP20
• for emitted interference	EN 61000-6-3 Class B	EN 61000-6-3 Class B
• for mains harmonics limitation	EN 61000-3-2	EN 61000-3-2
• for interference immunity	EN 61000-6-2	EN 61000-6-2
standards, specifications, approvals		
certificate of suitability		
• CE marking	Yes	Yes
• UL approval	Yes; cULus-Listed (UL61010-2-201, CSA C22.2 No.142); cCSAus (CSA C22.2 No. 60950-1, UL 60950-1)	Yes; cULus-Listed (UL61010-2-201, CSA C22.2 No.142); cCSAus (CSA C22.2 No. 60950-1, UL 60950-1)
• CSA approval	Yes; cULus-Listed (UL61010-2-201, CSA C22.2 No.142), cCSAus (CSA C22.2 No. 60950-1, UL 60950-1)	Yes; cULus-Listed (UL61010-2-201, CSA C22.2 No.142), cCSAus (CSA C22.2 No. 60950-1, UL 60950-1)
• EAC approval	Yes	Yes
• NEC Class 2	No	No
type of certification		
• CB-certificate	Yes	Yes
MTBF at 40 °C	1 598 441 h	1 114 510 h
standards, specifications, approvals hazardous environments		
certificate of suitability		
• IECEx	Yes; IECEx Ex ec nC IIC T3 Gc	Yes; IECEx Ex ec nC IIC T3 Gc
• ATEX	Yes; ATEX (EX) II 3G Ex ec nC IIC T3 Gc	Yes; ATEX (EX) II 3G Ex ec nC IIC T3 Gc
• ULhazloc approval	No	No
• cCSAus, Class 1, Division 2	No	No

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Power supplies > 1-phase, 24 V DC (for SIMATIC ET 200SP)****Technical specifications**

Article number	6EP7133-6AB00-0BN0	6EP7133-6AE00-0BN0
product brand name	SIMATIC ET 200SP PS	SIMATIC ET 200SP PS
type of current supply	24 V/5 A	24 V/10 A
standards, specifications, approvals		
marine classification		
shipbuilding approval	Yes	Yes
Marine classification association		
• American Bureau of Shipping Europe Ltd. (ABS)	No	No
• French marine classification society (BV)	Yes	Yes
• Det Norske Veritas (DNV)	Yes	Yes
• Lloyds Register of Shipping (LRS)	No	No
standards, specifications, approvals		
Environmental Product Declaration		
Environmental Product Declaration	Yes	Yes
Global Warming Potential [CO ₂ eq]		
• total	542.1 kg	827.7 kg
• during manufacturing	9.9 kg	13.8 kg
• during operation	531.8 kg	813.3 kg
• after end of life	0.31 kg	0.44 kg
ambient conditions		
ambient temperature		
• during operation	-30 ... +70 °C; with natural convection	-30 ... +70 °C; with natural convection
• during transport	-40 ... +85 °C	-40 ... +85 °C
• during storage	-40 ... +85 °C	-40 ... +85 °C
environmental category according to IEC 60721	Climate class 3K3, 5 ... 95% no condensation	Climate class 3K3, 5 ... 95% no condensation
connection method		
type of electrical connection	push-in terminals	push-in terminals
• at input	L, N, PE: 1 push-in terminal each for 0.2 ... 2.5 mm ² single-core/finely stranded	L, N, PE: 1 push-in terminal each for 0.2 ... 2.5 mm ² single-core/finely stranded
• at output	+, -: 2 push-in terminals each for 0.2 ... 2.5 mm ²	+, -: 2 push-in terminals each for 0.2 ... 2.5 mm ²
• for auxiliary contacts	Signaling contact: 2 push-in terminals for 0.2 ... 2.5 mm ²	Signaling contact: 2 push-in terminals for 0.2 ... 2.5 mm ²
• for signaling contact	2 push-in terminals for 0.2 ... 2.5 mm ²	2 push-in terminals for 0.2 ... 2.5 mm ²
removable terminal at input	Yes	Yes
removable terminal at output	Yes	Yes
mechanical data		
width × height × depth of the enclosure	160 mm × 117 mm × 74 mm	160 mm × 117 mm × 74 mm
installation width × mounting height	160 mm × 174 mm	160 mm × 174 mm
required spacing		
• top	50 mm	50 mm
• bottom	50 mm	50 mm
• left	0 mm	0 mm
• right	0 mm	0 mm
fastening method	Snaps onto DIN rail EN 60715 35x7.5/15	Snaps onto DIN rail EN 60715 35x7.5/15
• standard rail mounting	Yes	Yes
• S7 rail mounting	No	No
• wall mounting	No	No
housing can be lined up	Yes	Yes
net weight	0.5 kg	0.7 kg
accessories		
electrical accessories	Redundancy module, buffer module, selectivity module, DC UPS	Redundancy module, buffer module, selectivity module, DC UPS
additional information		
other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

Overview



With the BaseUnits (BUs), the ET 200SP offers a rugged and service-friendly design with permanent wiring:

- No tools needed for one-handed wiring using push-in terminals
- Actuation of the spring NC contacts with a standard screwdriver, with a blade width up to 3.5 mm
- Outstanding access due to arrangement of measuring tap, spring NC contacts and cable entry in columns, while at the same time reducing the space required by 64%
- Fault-proof color coding of the spring NC contacts for better orientation in the terminal panel

- Replacement of I/O modules during operation without affecting the wiring
- Operation with module gaps (gaps without I/O module)
- Automatic coding of the I/O modules prevents destruction of the electronics if a module is accidentally inserted in the wrong slot during replacement
- High EMC interference immunity:
 - self-assembling shielded backplane bus
 - multi-layer conductor plate with shield levels for interference-free signal transmission from the terminal to the I/O module
 - system-integrated, space-saving shield connection for quick installation
- Self-assembling potential groups without external wiring or jumpers
- Replaceable terminal box
- Side-by-side latching of the BUs for high mechanical and EMC loads
- Optional module-specific color identification of the terminals according to the color code CC
- Optional equipment marking using slide-in equipment labeling plates

An ET 200SP station can be expanded via one 'BU-Send' BaseUnit with a "BA-Send" BusAdapter plugged onto it with up to 16 modules from the ET 200AL series of I/O devices with IP67 protection.

Ordering data

Type A0 BaseUnits

BU15-P16+A10+2D

BU type A0; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new potential group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0DA0
6ES7193-6BP20-2DA0

BU15-P16+A0+2D

BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new potential group (max. 10 A)

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP00-0DA0
6ES7193-6BP00-2DA0

BU15-P16+A10+2B

BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally bridged AUX terminals (1 A to 10 A); for continuing the potential group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0BA0
6ES7193-6BP20-2BA0

BU15-P16+A0+2B

BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the potential group

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP00-0BA0
6ES7193-6BP00-2BA0

Type B0 BaseUnits

BU20-P12+A4+0B

BU type B0; BaseUnit (dark) with 12 process terminals (1 ... 12) to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the potential group; 1 unit

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0BB0
6ES7193-6BP20-2BB0

Type B1 BaseUnits

BU20-P12+A0+4B

BU type B1; BaseUnit (dark) with 12 process terminals to the module; for continuing the potential group; 1 unit

- Pack of 1 unit
- Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.

6ES7193-6BP20-0BB1
6ES7193-6BP20-2BB1

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**BaseUnits**

Ordering data	Article No.	Article No.	
Type C0 BaseUnits			
BU20-P6+A2+4D BU type C0; BaseUnit (light) with 6 push-in terminals (1...6) to the module and an additional 2 AUX terminals; new potential group	6ES7193-6BP20-0DC0		
Type C1 BaseUnits			
BU20-P6+A2+4B BU type C1; BaseUnit (dark) with 6 push-in terminals (1 ... 6) to the module and 2 AUX terminals; bridged to the left	6ES7193-6BP20-0BC1		
Type A1 BaseUnits (with temperature detection)			
BU15-P16+A0+12D/T BU type A1; BaseUnit (light) with 16 process terminals (1 ... 16) to the module and 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new potential group (max. 10 A)	6ES7193-6BP40-0DA1		
BU15-P16+A0+2D/T BU type A1; BaseUnit (light) with 16 process terminals to the module; for starting a new potential group (max. 10 A)	6ES7193-6BP00-0DA1		
BU15-P16+A0+12B/T BU type A1; BaseUnit (dark) with 16 process terminals (1 ... 16) to the module and an additional 2x5 internally bridged additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the potential group	6ES7193-6BP40-0BA1		
BU15-P16+A0+2B/T BU type A1; BaseUnit (dark) with 16 process terminals to the module; for continuing the potential group	6ES7193-6BP00-0BA1		
Type F0 BaseUnits			
BU20-P8+A4+0B BU type F0; BaseUnit (dark) with 8 process terminals to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the potential group	6ES7193-6BP20-0BF0		
		BaseUnits type U0	
		BU20-P16+A0+2D BU type U0; BaseUnit (light) with 16 process terminals to the module; for starting a new potential group (max. 10 A) • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.	6ES7193-6BP00-0DU0 6ES7193-6BP00-2DU0
		BU20-P16+A0+2B BU type U0; BaseUnit (dark) with 16 process terminals to the module; for continuing the potential group • Pack of 1 unit • Pack of 10 units; to order a pack, please order this Article No. with an order quantity of 10.	6ES7193-6BP00-0BU0 6ES7193-6BP00-2BU0
		BaseUnit for redundant setup	
		BaseUnit type M0 With 2 slots to accommodate R1-capable interface modules IM 155-6 PN R1; incl. server module	6ES7193-6BR00-0HM0
		Station expansion with IP67 I/O system ET 200AL	
		BaseUnit BU-Send	6ES7193-6BN00-0NE0
		ET 200SP BA-Send 1 x FC BusAdapter	6ES7193-6AS00-0AA0
		Accessories	
		Equipment labeling plate 10 sheets of 16 labels	6ES7193-6LF30-0AW0
		BU cover For covering empty slots (gaps); 5 units • 15 mm wide • 20 mm wide	6ES7133-6CV15-1AM0 6ES7133-6CV20-1AM0
		Shield connection 5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding	6ES7193-6SC20-1AM0

Ordering data

Color-coded labels

- Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units
- Color code CC01, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 50 units
- Color code CC02, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units
- Color code CC02, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 50 units
- Color code CC03, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units
- Color code CC04, module-specific, for 16 push-in terminals; for BaseUnit type A0, A1; 10 units
- Color code CC71, for 10 AUX terminals 1 A to 10 A, for BU type A0, yellow/green, with push-in terminals; 10 units
- Color code CC72, for 10 AUX terminals 1 A to 10 A, for BU type A0, red, with push-in terminals; 10 units
- Color code CC73, for 10 AUX terminals 1 A to 10 A, for BU type A0, blue, with push-in terminals; 10 units

Article No.

6ES7193-6CP01-2MA0

6ES7193-6CP01-4MA0

6ES7193-6CP02-2MA0

6ES7193-6CP02-4MA0

6ES7193-6CP03-2MA0

6ES7193-6CP04-2MA0

6ES7193-6CP71-2AA0

6ES7193-6CP72-2AA0

6ES7193-6CP73-2AA0

Article No.

- Color code CC74, for 2x5 additional terminals, 5 x red, 5 x blue, BU type A1 with push-in terminals; 10 units
- Color code CC81, for 4 AUX terminals 1 A to 4 A, yellow/green, for BaseUnit type B0; 10 units
- Color code CC82, for 4 AUX terminals 1 A to 4 A, red, for BaseUnit type B0; 10 units
- Color code CC83, for 4 AUX terminals 1 A to 4 A, blue, for BaseUnit type B0; 10 units
- Color code CC41, module-specific, for 12 push-in terminals; for BaseUnit type B1; 10 units
- Color code CC84, for 2 AUX terminals 1 A to 2 A, yellow/green, for BaseUnit type C0; 10 units
- Color code CC85, for 2 AUX terminals 1 A to 2 A, red, for BaseUnit type C0; 10 units
- Color code CC86, for 2 AUX terminals 1 A to 2 A, blue, for BaseUnit type C0; 10 units

6ES7193-6CP74-2AA0

6ES7193-6CP81-2AB0

6ES7193-6CP82-2AB0

6ES7193-6CP83-2AB0

6ES7193-6CP41-2MB0

6ES7193-6CP84-2AC0

6ES7193-6CP85-2AC0

6ES7193-6CP86-2AC0

Technical specifications

Article number	6ES7193-6BP20-0DA0	6ES7193-6BP00-0DA0	6ES7193-6BP20-0BA0	6ES7193-6BP00-0BA0
	BaseUnit Type A0, BU15-P16+A10+2D	BaseUnit Type A0, BU15-P16+A0+2D	BaseUnit Type A0, BU15-P16+A10+2B	BaseUnit Type A0, BU15-P16+A0+2B
General information				
Product type designation	BU type A0	BU type A0	BU type A0	BU type A0
Hardware configuration				
Slots				
• Number of slots	1; Type A0	1; Type A0	1; Type A0	1; Type A0
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
connection method				
Terminals				
• Terminal type	Push-in terminal	Push-in terminal	Push-in terminal	Push-in terminal
• system-integrated shield connection	Yes; Optional	Yes; Optional	Yes; Optional	Yes; Optional
• Conductor cross-section, min.	0.14 mm ² ; AWG 26	0.14 mm ² ; AWG 26	0.14 mm ² ; AWG 26	0.14 mm ² ; AWG 26
• Conductor cross-section, max.	2.5 mm ² ; AWG 14	2.5 mm ² ; AWG 14	2.5 mm ² ; AWG 14	2.5 mm ² ; AWG 14
• Number of process terminals to I/O module	16	16	16	16; Pro slot
• Number of terminals to AUX bus	10	0	10	0
• Number of add-on terminals	0	0	0	0
• Number of terminals with connection to P1 and P2 bus	2	2	2	2; Pro slot

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

BaseUnits

Technical specifications

Article number	6ES7193-6BP20-0DA0 BaseUnit Type A0, BU15-P16+A10+2D	6ES7193-6BP00-0DA0 BaseUnit Type A0, BU15-P16+A0+2D	6ES7193-6BP20-0BA0 BaseUnit Type A0, BU15-P16+A10+2B	6ES7193-6BP00-0BA0 BaseUnit Type A0, BU15-P16+A0+2B	
Dimensions					
Width	15 mm	15 mm	15 mm	15 mm	
Height	141 mm	117 mm	141 mm	117 mm	
Depth	35 mm	35 mm	35 mm	35 mm	
Weights					
Weight, approx.	50 g	40 g	50 g	40 g	
Article number	6ES7193-6BP20-0BB0 BaseUnit Type B0, BU20-P12+A4+0B	6ES7193-6BP20-0BB1 BaseUnit Type B1, BU20-P12+A0+4B, PU 1	6ES7193-6BP20-0DC0 BaseUnit Type C0, BU20-P6+A2+4D	6ES7193-6BP20-0BC1 BaseUnit Type C1, BU20-P6+A2+4B	6ES7193-6BP20-0BF0 BaseUnit Type F0, BU20-P8+A4+0B
General information					
Product type designation	BU type B0	BU type B1	BU type C0	BU type C1	BU type F0
Hardware configuration					
Slots					
• Number of slots	1	1	1	1; Type C1	1; Type F0
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C
Altitude during operation relating to sea level					
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m	2 000 m; On request: Installation altitudes greater than 2 000 m
connection method					
Terminals					
• Terminal type	Push-in terminal	Push-in terminal	Push-in terminal	Push-in terminal	
• system-integrated shield connection	Yes; Optional	No	Yes; Optional	Yes; Optional	Yes; Optional
• Conductor cross-section, min.	0.14 mm ² ; AWG 26	0.14 mm ² ; AWG 26	0.14 mm ² ; AWG 26	0.14 mm ² ; AWG 26	
• Conductor cross-section, max.	2.5 mm ² ; AWG 14	2.5 mm ² ; AWG 14	2.5 mm ² ; AWG 14	2.5 mm ² ; AWG 14	
• Number of process terminals to I/O module	12; Pro slot	12; Pro slot	12; Pro slot	16; Pro slot	
• Number of terminals to AUX bus	0	0	0	0	
• Number of add-on terminals	0	0	0	0	
• Number of terminals with connection to P1 and P2 bus	0; Pro slot	0; Pro slot	0; Pro slot	2; Pro slot	
Dimensions					
Width	20 mm	20 mm	20 mm	20 mm	20 mm
Height	117 mm	117 mm	117 mm	117 mm	117 mm
Depth	35 mm	35 mm	35 mm	35 mm	35 mm
Weights					
Weight, approx.	48 g	48 g	47 g	47 g	48 g

Technical specifications

Article number	6ES7193-6BP40-0DA1 BaseUnit Type A1, BU15-P16+A0+12D/T	6ES7193-6BP00-0DA1 BaseUnit Type A1, BU15-P16+A0+2D/T	6ES7193-6BP40-0BA1 BaseUnit Type A1, BU15-P16+A0+12B/T	6ES7193-6BP00-0BA1 BaseUnit Type A1, BU15-P16+A0+2B/T
General information				
Product type designation	BU type A1	BU type A1	BU type A1	BU type A1
Hardware configuration				
Slots				
• Number of slots	1; Type A1	1; Type A1	1; Type A1	1; Type A1
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C	-30 °C	-30 °C
• vertical installation, max.	50 °C	50 °C	50 °C	50 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
connection method				
Terminals				
• Terminal type	Push-in terminal	Push-in terminal	Push-in terminal	Push-in terminal
• system-integrated shield connection	Yes; Optional	Yes; Optional	Yes; Optional	Yes; Optional
• Conductor cross-section, min.	0.14 mm ² ; AWG 26	0.14 mm ² ; AWG 26	0.14 mm ² ; AWG 26	0.14 mm ² ; AWG 26
• Conductor cross-section, max.	2.5 mm ² ; AWG 14	2.5 mm ² ; AWG 14	2.5 mm ² ; AWG 14	2.5 mm ² ; AWG 14
• Number of process terminals to I/O module	16	16	16	16
• Number of terminals to AUX bus	0	0	0	0
• Number of add-on terminals	2x5	0	2x5	0
• Number of terminals with connection to P1 and P2 bus	2	2	2	2
Dimensions				
Width	15 mm	15 mm	15 mm	15 mm
Height	141 mm	117 mm	141 mm	117 mm
Depth	35 mm	35 mm	35 mm	35 mm
Weights				
Weight, approx.	50 g	40 g	50 g	40 g
<hr/>				
Article number	6ES7193-6BP00-0DU0 BaseUnit Type U0, BU20-P16+A0+2D, PU 1		6ES7193-6BP00-0BU0 BaseUnit Type U0, BU20-P16+A0+2B, PU 1	
General information				
Product type designation	BU type U0		BU type U0	
Hardware configuration				
Slots				
• Number of slots	1		1	
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C		-30 °C	
• horizontal installation, max.	60 °C		60 °C	
• vertical installation, min.	-30 °C		-30 °C	
• vertical installation, max.	50 °C		50 °C	
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	3 000 m		3 000 m	

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

BaseUnits

Technical specifications

Article number	6ES7193-6BP00-0DU0 BaseUnit Type U0, BU20-P16+A0+2D, PU 1	6ES7193-6BP00-0BU0 BaseUnit Type U0, BU20-P16+A0+2B, PU 1	
connection method			
Terminals			
• Terminal type	Push-in terminal	Push-in terminal	
• system-integrated shield connection	Yes; Optional	Yes; Optional	
• Conductor cross-section, min.	0.14 mm ² ; 0.2 mm ² without wire end ferrule	0.14 mm ² ; 0.2 mm ² without wire end ferrule	
• Conductor cross-section, max.	2.5 mm ² ; 1.5 mm ² with wire end ferrule	2.5 mm ² ; 1.5 mm ² with wire end ferrule	
• Number of process terminals to I/O module	16	16	
• Number of terminals to AUX bus	0	0	
• Number of add-on terminals	0	0	
• Number of terminals with connection to P1 and P2 bus	2	2	
Dimensions			
Width	20 mm	20 mm	
Height	117 mm	117 mm	
Depth	35 mm	35 mm	
Weights			
Weight, approx.	50 g	50 g	
Article number	6ES7193-6BR00-0HM0 BaseUnit Type M0	Article number	6ES7193-6BN00-0NE0 ET 200SP, BaseUnit BU-Send
General information		Hardware configuration	
Product type designation	BU type M0	Slots	
Hardware configuration		• Number of slots	1
Slots		Ambient conditions	
• Number of slots	2	Ambient temperature during operation	
Ambient conditions		• horizontal installation, min.	-30 °C
Ambient temperature during operation		• horizontal installation, max.	60 °C
• horizontal installation, min.	-30 °C	• vertical installation, min.	-30 °C
• horizontal installation, max.	60 °C	• vertical installation, max.	50 °C
• vertical installation, min.	-30 °C	Altitude during operation relating to sea level	
• vertical installation, max.	50 °C	• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m
Altitude during operation relating to sea level		Dimensions	
• Installation altitude above sea level, max.	2 000 m; On request: Installation altitudes greater than 2 000 m	Width	20 mm
Dimensions		Height	117 mm
Width	100 mm	Depth	35 mm
Height	141 mm	Weights	
Depth	29 mm	Weight, approx.	30 g
Weights			
Weight, approx.	142 g		

Overview



With the BaseUnits (BUs), the ET 200SP offers a rugged and service-friendly design with permanent wiring:

- No tools needed for one-handed wiring using push-in terminals
- Actuation of the spring NC contacts with a standard screwdriver, with a blade width up to 3.5 mm
- Outstanding access due to arrangement of measuring tap, spring NC contacts and cable entry in columns, while at the same time reducing the space required by 64%
- Fault-proof color coding of the spring NC contacts for better orientation in the terminal panel
- Replacement of I/O modules during operation without affecting the wiring

- Operation with module gaps (missing I/O module)
- Automatic coding of the I/O modules prevents destruction of the electronics if a module is accidentally inserted in the wrong slot during replacement
- High immunity to electromagnetic interference due to
 - self-assembling shielded backplane bus
 - multi-layer conductor plate with shield levels for interference-free signal transmission from the terminal to the I/O module
 - system-integrated, space-saving shield connection for quick installation
- Self-assembling potential groups without external wiring or jumpers
- Replaceable terminal box
- Side-by-side latching of the BUs for high mechanical load capacity
- Optional module-specific color identification of the terminals according to the color code CC
- Optional equipment marking using slide-in equipment labeling plates

An ET 200SP station can be expanded via one BU-Send BaseUnit with a BA-Send BusAdapter plugged onto it with up to 16 modules from the ET 200AL series of I/O devices with IP67 protection.

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SIPLUS BaseUnits type A0		SIPLUS BaseUnits type A1 (with temperature detection)	
BU15-P16+A10+2D (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for starting a new load group (max. 10 A)	6AG1193-6BP20-7DA0	BU15-P16+A0+12D/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (light) with 16 process terminals (1...16) to the module and also 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for starting a new load group (max. 10 A)	6AG1193-6BP40-7DA1
BU15-P16+A0+2D (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	6AG1193-6BP00-7DA0	BU15-P16+A0+2D/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	6AG1193-6BP00-7DA1
BU15-P16+A10+2B (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals (1...16) to the module and an additional 10 internally jumpered AUX terminals (1 A to 10 A); for continuing the load group	6AG1193-6BP20-7BA0	BU15-P16+A0+12B/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (dark) with 16 process terminals (1...16) to the module and also 2x5 internally jumpered additional terminals (1 B to 5 B and 1 C to 5 C); for continuing the load group	6AG1193-6BP40-7BA1
BU15-P16+A0+2B (Extended temperature range and exposure to environmental substances) BU type A0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	6AG1193-6BP00-7BA0	BU15-P16+A0+2B/T (Extended temperature range and exposure to environmental substances) BU type A1; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	6AG1193-6BP00-7BA1

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

SIPLUS BaseUnits

Ordering data	Article No.	Ordering data	Article No.
SIPLUS BaseUnits type B0		SIPLUS BaseUnits type F0	
BU20-P12+A4+0B (Extended temperature range and exposure to environmental substances) BU type B0; BaseUnit (dark) with 12 process terminals (1...12) to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the load group; 1 unit	6AG1193-6BP20-7BB0	BU20-P8+A4+0B (Extended temperature range and exposure to environmental substances) BU type F0; BaseUnit (dark) with 8 process terminals to the module and an additional 4 internally jumpered AUX terminals (1 A to 4 A); for continuing the load group	6AG1193-6BP20-2BF0
SIPLUS BaseUnits type B1		SIPLUS BaseUnits type U0	
BU20-P12+A0+4B (Extended temperature range and exposure to environmental substances) BU type B1; BaseUnit (dark) with 12 process terminals to the module; for continuing the load group; 1 unit	6AG1193-6BP20-7BB1	BU20-P16+A0+2D (Extended temperature range and exposure to environmental substances) BU type U0; BaseUnit (light) with 16 process terminals to the module; for starting a new load group (max. 10 A)	6AG1193-6BP00-7DU0
SIPLUS BaseUnits type C0		BU20-P16+A0+2B (Extended temperature range and exposure to environmental substances) BU type U0; BaseUnit (dark) with 16 process terminals to the module; for continuing the load group	6AG1193-6BP00-7BU0
BU20-P6+A2+4D (Extended temperature range and exposure to environmental substances) BU type C0; BaseUnit (light) with 6 push-in terminals (1...6) to the module and 2 AUX terminals; new load group	6AG1193-6BP20-7DC0	SIPLUS BaseUnits type M0 (Extended temperature range and exposure to environmental substances) For redundant configuration, with 2 slots to accommodate R1-capable interface modules IM 155-6 PN R1; incl. server module	6AG1193-6BR00-7HM0
SIPLUS BaseUnits type D0		Accessories	
BU20-P12+A0+0B (Extended temperature range and exposure to environmental substances) BU type D0; BaseUnit (dark) with 12 push-in terminals, without AUX terminals, bridged to the left	6AG1193-6BP00-7BD0	SIPLUS Mounting Kit ET 200SP Mounting accessories for use with increased mechanical vibration and shock loads. Can be used with SIPLUS BaseUnits with heights up to 117 mm, types A0/A1 without AUX or add-on terminals as well as types B0, B1, C0, C1, D0, U0	6AG1193-6AA00-0AA0
		Other accessories	See SIMATIC ET 200SP BaseUnits, page 10/252

Technical specifications

Article number	6AG1193-6BP00-7BA0	6AG1193-6BP00-7DA0	6AG1193-6BP20-7BA0	6AG1193-6BP20-7DA0
Based on	6ES7193-6BP00-0BA0 SIPLUS ET 200SP BU15-P16+A0+2B	6ES7193-6BP00-0DA0 SIPLUS ET 200SP BU15-P16+A0+2D	6ES7193-6BP20-0BA0 SIPLUS ET 200SP BU15-P16+A10+2B	6ES7193-6BP20-0DA0 SIPLUS ET 200SP BU15-P16+A10+2D
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)

Technical specifications

Article number	6AG1193-6BP00-7BA0	6AG1193-6BP00-7DA0	6AG1193-6BP20-7BA0	6AG1193-6BP20-7DA0
Based on	6ES7193-6BP00-0BA0 SIPLUS ET 200SP BU15-P16+A0+2B	6ES7193-6BP00-0DA0 SIPLUS ET 200SP BU15-P16+A0+2D	6ES7193-6BP20-0BA0 SIPLUS ET 200SP BU15-P16+A10+2B	6ES7193-6BP20-0DA0 SIPLUS ET 200SP BU15-P16+A10+2D
Relative humidity				
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

SIPLUS BaseUnits

Technical specifications

Article number	6AG1193-6BP00-7BA1	6AG1193-6BP00-7DA1	6AG1193-6BP40-7BA1	6AG1193-6BP40-7DA1
Based on	6ES7193-6BP00-0BA1 SIPLUS ET 200SP BU15-P16+A0+2B/T	6ES7193-6BP00-0DA1 SIPLUS ET 200SP BU15-P16+A0+2D/T	6ES7193-6BP40-0BA1 SIPLUS ET 200SP BU15-P16+A0+12B/T	6ES7193-6BP40-0DA1 SIPLUS ET 200SP BU15-P16+A0+12D/T
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)

Technical specifications

Article number	6AG1193-6BP00-7BA1	6AG1193-6BP00-7DA1	6AG1193-6BP40-7BA1	6AG1193-6BP40-7DA1
Based on	6ES7193-6BP00-0BA1 SIPLUS ET 200SP BU15-P16+A0+2B/T	6ES7193-6BP00-0DA1 SIPLUS ET 200SP BU15-P16+A0+2D/T	6ES7193-6BP40-0BA1 SIPLUS ET 200SP BU15-P16+A0+12B/T	6ES7193-6BP40-0DA1 SIPLUS ET 200SP BU15-P16+A0+12D/T
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A
Article number	6AG1193-6BP20-7BB0	6AG1193-6BP20-7BB1	6AG1193-6BP20-7DC0	6AG1193-6BP00-7BD0
Based on	6ES7193-6BP20-0BB0 SIPLUS ET 200SP BU20-P12+A4+0B	6ES7193-6BP20-0BB1 SIPLUS ET 200SP BU20-P12+A0+4B	6ES7193-6BP20-0DC0 SIPLUS ET 200SP BU20-P6+A2+4D	6ES7193-6BP00-0BD0 SIPLUS ET 200SP BU20-P12+A0+0B
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	60 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-40 °C		-40 °C; = Tmin	-40 °C
• vertical installation, max.	50 °C		50 °C; = Tmax	50 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	3 000 m	3 000 m	3 000 m	3 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... Tmax -5K) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... Tmax -5K) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... Tmax -5K) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... Tmax -5K) at 795 hPa ... 701 hPa (+2 000 m ... +3 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**SIPLUS BaseUnits****Technical specifications**

Article number	6AG1193-6BP20-7BB0	6AG1193-6BP20-7BB1	6AG1193-6BP20-7DC0	6AG1193-6BP00-7BD0
Based on	6ES7193-6BP20-0BB0 SIPLUS ET 200SP BU20-P12+A4+0B	6ES7193-6BP20-0BB1 SIPLUS ET 200SP BU20-P12+A0+4B	6ES7193-6BP20-0DC0 SIPLUS ET 200SP BU20-P6+A2+4D	6ES7193-6BP00-0BD0 SIPLUS ET 200SP BU20-P12+A0+0B
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A


Technical specifications

Article number	6AG1193-6BP20-2BF0	6AG1193-6BP00-7BU0	6AG1193-6BP00-7DU0	6AG1193-6BR00-7HMO
Based on	6ES7193-6BP20-0BF0 SIPLUS ET 200SP BU20-P8+A4+0B	6ES7193-6BP00-0BU0 SIPLUS ET 200SP BU20-P16+A0+2B	6ES7193-6BP00-0DU0 SIPLUS ET 200SP BU20-P16+A0+2D	6ES7193-6BR00-0HMO SIPLUS ET 200SP BU type M0
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax	70 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin			-40 °C; = Tmin
• vertical installation, max.	50 °C; = Tmax			50 °C; = Tmax
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m	2 000 m	2 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance				
Coolants and lubricants				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-3	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**SIPLUS BaseUnits****Technical specifications**

Article number	6AG1193-6BP20-2BF0	6AG1193-6BP00-7BU0	6AG1193-6BP00-7DU0	6AG1193-6BR00-7HM0
Based on	6ES7193-6BP20-0BF0 SIPLUS ET 200SP BU20-P8+A4+0B	6ES7193-6BP00-0BU0 SIPLUS ET 200SP BU20-P16+A0+2B	6ES7193-6BP00-0DU0 SIPLUS ET 200SP BU20-P16+A0+2D	6ES7193-6BR00-0HM0 SIPLUS ET 200SP BU type M0
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Overview

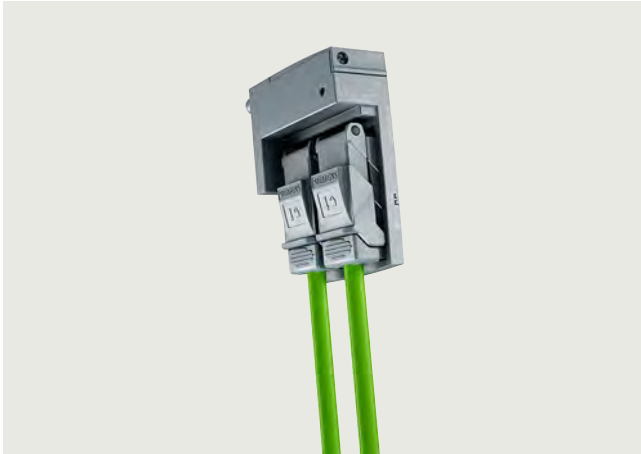

SIMATIC BusAdapter BA 2xFC for direct laying of the PROFINET cable via FastConnect connection



SIMATIC BusAdapter BA LC-LD/M12 for use as a system-integrated media converter from copper (M12) to single-mode glass fiber (LC-LD).



SIMATIC BusAdapter BA 2xLC-LD with 2 LC-LD sockets, for use in redundant systems, max. cable length 20 km



ET 200SP BusAdapter BA-Send for expansion of an ET 200SP station with ET 200AL modules



SIMATIC BusAdapter BA LC/RJ45 for use as a system-integrated media converter from copper (RJ45) to multimode glass fiber (LC).

For SIMATIC ET 200SP, two types of BusAdapter (BA) are available for selection:

- ET 200SP BusAdapter "BA-Send"
for expansion of an ET 200SP station with up to 16 modules from the ET 200AL I/O series with IP67 protection via an ET connection
- SIMATIC BusAdapter
for the free selection of the connection system (pluggable or direct connection) and physical PROFINET connection (copper, POF, HCS or glass fiber) to devices with a SIMATIC BusAdapter interface.
One further advantage of the SIMATIC BusAdapter: only the adapter needs to be replaced for subsequent conversion to the rugged FastConnect technology or a fiber-optic connection, or to repair defective RJ45 sockets.

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

BusAdapters

Ordering data	Article No.	Article No.
BA 2xRJ45 BusAdapter For IM 155-6 PN ST, HF, R1	6ES7193-6AR00-0AA0	
BA 2xFC BusAdapter For IM 155-6 PN ST, HF; R1; for increased resistance to vibration and EMC loads	6ES7193-6AF00-0AA0	
BA 2xM12 BusAdapter For IM 155-6 PN ST, HF; R1; 2 x M12 push-pull sockets, D-coding, also suitable for standard M12. For PROFINET	6ES7193-6AM00-0AA0	
BA 2xSCRJ BusAdapter For IM 155-6 PN HF; R1; fiber-optic cable connection for POF or PCF cables up to 250 m, with monitoring of attenuation	6ES7193-6AP00-0AA0	
BA SCRJ/RJ45 BusAdapter For IM 155-6 PN HF, R1; with media converter glass fiber-optic cable - copper; 1 x SCRJ glass fiber-optic cable connection, 1 x RJ45 connection	6ES7193-6AP20-0AA0	
BA SCRJ/FC BusAdapter For IM 155-6 PN HF, R1; with media converter glass fiber-optic cable - copper; 1 x SCRJ glass fiber-optic cable connection, 1 x FastConnect connection	6ES7193-6AP40-0AA0	
BA 2xLC BusAdapter For IM 155-6 PN HF, R1; two glass fiber-optic cable connections	6ES7193-6AG00-0AA0	
BA LC/RJ45 BusAdapter For IM 155-6 PN HF, R1; with media converter glass fiber-optic cable - copper; 1 x LC connection, 1 x RJ45 connection	6ES7193-6AG20-0AA0	
BA LC/FC BusAdapter For IM 155-6 PN HF, R1; with media converter glass fiber-optic cable - copper; 1 x LC connection, 1 x FastConnect connection	6ES7193-6AG40-0AA0	
BA 2xLC-LD BusAdapter For IM 155-6 PN HF, R1; two glass fiber-optic cable connections	6ES7193-6AG50-0AA0	
BA LC-LD/RJ45 BusAdapter For IM 155-6 PN HF, R1; with media converter glass fiber-optic cable - copper; 1 x LC-LD connection, 1 x RJ45 connection	6ES7193-6AG60-0AA0	
BA LC-LD/M12 BusAdapter For IM 155-6 PN HF, R1; with media converter glass fiber-optic cable - copper; 1 x LC-LD connection, 1 x M12 connection	6ES7193-6AG70-0AA0	
M12-180/M12-180 IE connecting cable Preassembled with IE FC trailing cable GP, M12 plugs (D-coded, push-pull)		
0.5 m		6XV1871-8AE50
1.0 m		6XV1871-8AH10
1.5 m		6XV1871-8AH15
2.0 m		6XV1871-8AH20
3.0 m		6XV1871-8AH30
5.0 m		6XV1871-8AH50
10 m		6XV1871-8AN10
15 m		6XV1871-8AN15
MM FO CORD LC/LC Preassembled patch cable with 2x LC duplex connectors; 1.0 m		6XV1843-5EH10-0AA0
SM FO CORD LC/LC Preassembled patch cable with 2x LC duplex connectors; 1.0 m		6XV1843-5FH10-0AA0
FO standard cable 50/125 MM FO standard cable preassembled with 2x LC duplex connectors, 5.0 m		6XV1873-5AH50
FO ROBUST CABLE 50/125 Robust MM FO cable preassembled with 2x LC duplex connectors, 10 m		6XV1873-5RN10
FC IE stripping tool		6GK1901-1GA00
IE FC RJ45 plug 2x2 Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet; 1 unit		6GK1901-1BB10-2AA0
Station expansion with IP67 I/O system ET 200AL		
ET 200SP BA-Send 1 x FC BusAdapter		6ES7193-6AS00-0AA0
BaseUnit BU-Send		6ES7193-6BN00-0NE0
Accessories		
Equipment labeling plate 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter		6ES7193-6LF30-0AW0
Unlatching strap for M12 BA 10 units, for push-pull PROFINET plug, e. g. when using the BA 2xM12 BusAdapter		6ES7193-6DL00-2AA0

Note:

- 1) You will find information on further passive components at
https://assets.new.siemens.com/siemens/assets/api/uuid:e8245336-ca1a-45c7-a93f-2b243570fa0f/6zb5530-0dn01-0ba3verkabelungstechnikenus-144_original.pdf or at
<https://www.siemens.com/fastconnect>.

Technical specifications

Article number	6ES7193-6AR00-0AA0 ET 200SP, Busadapter BA 2xRJ45	6ES7193-6AF00-0AA0 ET 200SP, Busadapter BA 2XFC	6ES7193-6AM00-0AA0 SIMATIC Busadapter BA 2xM12	6ES7193-6AP00-0AA0 ET 200SP, Busadapter BA 2xSCRJ	6ES7193-6AP20-0AA0 ET 200SP, Busadapter BA SCRJ/RJ45
General information					
Product type designation	BA 2x RJ45	BA 2xFC	BA 2x M12	BA 2xSCRJ	BA SCRJ/RJ45
Interfaces					
Number of PROFINET interfaces	1	1	1	1; 2 ports (switch) SCRJ FO	1; 2 ports (switch) SCRJ/RJ45
Supports protocol for PROFINET IO					
<ul style="list-style-type: none"> Number of RJ45 ports Number of FC (FastConnect) connections Number of SCRJ ports Number of M12 ports 	2	2	2	2	1
Cable length					
- PCF				100 m	100 m
- Plastic FOC (POF)				50 m	50 m
- Cu conductors	100 m	100 m	100 m		100 m
Ambient conditions					
Altitude during operation relating to sea level					
<ul style="list-style-type: none"> Installation altitude above sea level, max. 	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
Dimensions					
Width	20 mm	20 mm	20 mm	20 mm	20 mm
Height	69.5 mm	69.5 mm	73.5 mm	69.5 mm	69.5 mm
Depth	59 mm	59 mm	59 mm	59 mm	59 mm
Weights					
Weight, approx.	46 g	53 g	59 g	50 g	50 g

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**BusAdapters****Technical specifications**

Article number	6ES7193-6AP40-0AA0 ET 200SP, Bus adapter BA SCRJ/FC	6ES7193-6AG00-0AA0 SIMATIC Busadapter BA 2XLC	6ES7193-6AG20-0AA0 SIMATIC Busadapter BA LC/RJ45	6ES7193-6AG40-0AA0 SIMATIC Bus adapter BA LC/FC
General information				
Product type designation	BA SCRJ/FC	BA 2xLC	BA LC/RJ45	BA LC/FC
Interfaces				
Number of PROFINET interfaces	1; 2 ports (switch) SCRJ/FC	1; 2 ports (switch) LC Multimode Glass Fibre	1; 2 ports (switch) LC / RJ45	1; 2 ports (switch) LC / FC
Supports protocol for PROFINET IO				
<ul style="list-style-type: none"> Number of RJ45 ports Number of FC (FastConnect) connections Number of SCRJ ports Number of LC ports 	1		1	1
Cable length				
- PCF	100 m			
- Plastic FOC (POF)	50 m			
- Cu conductors	100 m		100 m	100 m
- Multimode graded-index fiber 50/125 µm		3 km	3 km	3 km
- Multimode graded-index fiber 62.5/125 µm		3 km	3 km	3 km
Ambient conditions				
Altitude during operation relating to sea level				
<ul style="list-style-type: none"> Installation altitude above sea level, max. 	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
Dimensions				
Width	20 mm	20 mm	20 mm	20 mm
Height	69.5 mm	69.5 mm	69.5 mm	69.5 mm
Depth	59 mm	59 mm	59 mm	59 mm
Weights				
Weight, approx.	50 g	40 g	32 g	50 g

Article number	6ES7193-6AS00-0AA0 ET 200SP, Busadapter BA-Send BA1XFC
General information	
Product type designation	BA-Send 1xFC
Interfaces	
Supports protocol for PROFINET IO	
Cable length	
- Cu conductors	15 m; from IM firmware V3.3: between BA-send and the first ET-CONNECTION bus node and between all other bus nodes
ET-Connection	
<ul style="list-style-type: none"> Number of interfaces ET connection FC (FastConnect) 	1 Yes
Ambient conditions	
Altitude during operation relating to sea level	
<ul style="list-style-type: none"> Installation altitude above sea level, max. 	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
Dimensions	
Width	20 mm
Height	69.5 mm
Depth	59 mm
Weights	
Weight, approx.	44 g

Technical specifications

Article number	6ES7193-6AG50-0AA0 SIMATIC Busadapter BA 2xLC-LD	6ES7193-6AG60-0AA0 SIMATIC Busadapter BA LC-LD/RJ45	6ES7193-6AG70-0AA0 SIMATIC Busadapter BA LC-LD/M12
General information			
Product type designation	BA 2x LC-LD	BA LC-LD / RJ45	BA LC-LD / M12
Interfaces			
Number of PROFINET interfaces	1; 2 ports (switch) 2x LC-LD single-mode fiber-optic cable	1	1
Supports protocol for PROFINET IO			
• Number of RJ45 ports		1	
• Number of LC ports	2; wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-LX	1; wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-LX	1; wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-LX
• Number of M12 ports			1
Cable length			
- Cu conductors		100 m	100 m
- single-mode fiber-optic cable 9/125 µm	20 km; 10 km for topology or IRT configuration; min. transmit power -15 dB, min. receiver sensitivity -28 dB	20 km	20 km
Ambient conditions			
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual	5 000 m; restrictions for installation altitudes > 2 000 m, see ET 200SP system manual
Dimensions			
Width	20 mm	20 mm	20 mm
Height	69.5 mm	69.5 mm	69.5 mm
Depth	59 mm	59 mm	59 mm
Weights			
Weight, approx.	40 g	32 g	45 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

SIPLUS BusAdapters

Overview



SIMATIC BusAdapter BA 2xFC for direct laying of the PROFINET cable via FastConnect connection.



ET 200SP BusAdapter BA-Send for expansion of an ET 200SP station with ET 200AL modules.



SIMATIC BusAdapter BA LC/RJ45 for use as a system-integrated media converter from copper (RJ45) to glass fiber (LC).

- ET 200SP BusAdapter "BA-Send" for expansion of an ET 200SP station with up to 16 modules from the ET 200AL I/O series with IP67 protection via an ET connection
- SIMATIC BusAdapter for the free selection of the connection system (pluggable or direct connection) and physical PROFINET connection (copper, POF, HCS or glass fiber) to devices with a SIMATIC BusAdapter interface. Another advantage of the SIMATIC BusAdapters: only the adapter needs to be replaced for subsequent conversion to the rugged FastConnect technology or a fiber-optic connection, or to repair defective RJ45 sockets.

Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

Article No.

SIPLUS BA 2xRJ45 BusAdapter

(extended temperature range and exposure to environmental substances)

For IM 155-6PN ST, HF

6AG1193-6AR00-7AA0

SIPLUS BA 2xSCRJ BusAdapter

(extended temperature range and exposure to environmental substances)

For IM 155-6PN HF;
fiber-optic connection for POF or PCF cables up to 250 m, with monitoring of attenuation

6AG1193-6AP00-2AA0

SIPLUS BA 2xFC BusAdapter

(extended temperature range and exposure to environmental substances)

For IM 155-6PN ST, HF;
for increased resistance to vibration and EMC loads

6AG1193-6AF00-7AA0

SIPLUS BA 2xLC BusAdapter

(extended temperature range and exposure to environmental substances)

For IM 155-6PN HF;
2 glass FO connections

6AG1193-6AG00-2AA0

BA 2xM12 BusAdapter

(extended temperature range and exposure to environmental substances)

For IM 155-6PN ST, HF; 2 x M12 push-pull sockets, D-coding, also suitable for standard M12. For PROFINET

6AG1193-6AM00-7AA0

Ordering data	Article No.	Article No.
SIPLUS BA LC/RJ45 BusAdapter with conformal coating, media converter glass FO/CU, 1x LC FO connection and 1x RJ45 connection	6AG1193-6AG20-2AA0	Equipment labeling plate 10 sheets of 16 labels, for printing with thermal transfer card printer or plotter
SIPLUS ET 200SP BA 2xM12 BusAdapter -40 ... +70 °C, with conformal coating, 2 x M12 push-pull sockets, D-coding, also suitable for standard M12, suitable for PROFINET	6AG1193-6AM00-7AA0	Accessories SIPLUS Mounting Kit ET 200SP Mounting accessories for use with increased mechanical vibration and shock loads. Not approved for SIPLUS 2xRJ45 BusAdapter
		6ES7193-6LF30-0AW0
		6AG1193-6AA00-0AA0

Technical specifications

Article number	6AG1193-6AR00-7AA0	6AG1193-6AF00-7AA0	6AG1193-6AM00-7AA0	6AG1193-6AP00-2AA0	6AG1193-6AG00-2AA0	6AG1193-6AG20-2AA0
Based on	6ES7193-6AR00-0AA0	6ES7193-6AF00-0AA0	6ES7193-6AM00-0AA0	6ES7193-6AP00-0AA0	6ES7193-6AG00-0AA0	6ES7193-6AG20-0AA0
	SIPLUS ET 200SP BA 2xRJ45	SIPLUS ET 200SP BA 2XFC PN	SIPLUS ET 200SP BA 2xM12	SIPLUS ET 200SP BA 2XSCRJ PN	SIPLUS ET 200SP BA 2XLC	SIPLUS ET 200SP BA LC/RJ45
Ambient conditions						
Ambient temperature during operation						
• min.	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)		-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C	-40 °C; = Tmin (incl. condensation/frost)	-40 °C; = Tmin (incl. condensation/frost)
• max.	70 °C; = Tmax	70 °C; = Tmax		60 °C; = Tmax	60 °C; = Tmax	60 °C; = Tmax
Altitude during operation relating to sea level						
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity						
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance						
Coolants and lubricants						
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems						
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**SIPLUS BusAdapters****Technical specifications**

Article number	6AG1193-6AR00-7AA0	6AG1193-6AF00-7AA0	6AG1193-6AM00-7AA0	6AG1193-6AP00-2AA0	6AG1193-6AG00-2AA0	6AG1193-6AG20-2AA0
Based on	6ES7193-6AR00-0AA0	6ES7193-6AF00-0AA0	6ES7193-6AM00-0AA0	6ES7193-6AP00-0AA0	6ES7193-6AG00-0AA0	6ES7193-6AG20-0AA0
	SIPLUS ET 200SP BA 2XRJ45	SIPLUS ET 200SP BA 2XFC PN	SIPLUS ET 200SP BA 2XM12	SIPLUS ET 200SP BA 2XSCRJ PN	SIPLUS ET 200SP BA 2XLC	SIPLUS ET 200SP BA LC/RJ45
- Against mechanical environmental conditions acc. to EN 60721-3-3		Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 3M8 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Use on ships/at sea						
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
- Against mechanical environmental conditions acc. to EN 60721-3-6	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)	Yes; Class 6M4 using the SIPLUS Mounting Kit ET 200SP (6AG1193-6AA00-0AA0)
Usage in industrial process technology						
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark						
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

10

Technical specifications

Article number	6AG1193-6AR00-7AA0	6AG1193-6AF00-7AA0	6AG1193-6AM00-7AA0	6AG1193-6AP00-2AA0	6AG1193-6AG00-2AA0	6AG1193-6AG20-2AA0
Based on	6ES7193-6AR00-0AA0	6ES7193-6AF00-0AA0	6ES7193-6AM00-0AA0	6ES7193-6AP00-0AA0	6ES7193-6AG00-0AA0	6ES7193-6AG20-0AA0
	SIPLUS ET 200SP BA 2xRJ45	SIPLUS ET 200SP BA 2XFC PN	SIPLUS ET 200SP BA 2xM12	SIPLUS ET 200SP BA 2XSCRJ PN	SIPLUS ET 200SP BA 2XLC	SIPLUS ET 200SP BA LC/RJ45
Conformal coating						
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP

Accessories

Overview SIMATIC system rail



Redundant R1 applications place high demands on

- the mechanical fixation and
- the low-impedance functional grounding connection of the functional grounding

of the individual ET 200SP components. These requirements cannot be ensured with DIN rails according to EN 60715.

For this reason, the use of the specially developed SIMATIC system rail is mandatory for an R1 design of the ET 200SP.

The system rail has

- tight dimensional tolerances for operating conditions under high mechanical load
- long-term stable surface coating for optimum interference suppression
- sturdy design for cantilever construction
- integrated Bosch profile grooves for easy and flexible mounting of modules and accessories (mounting brackets and hinges, damping elements, shield connections, cable ducts, etc.)

This ensures the high availability of an ET 200SP in R1 operation.

Overview Labeling strips

The head-end stations and I/O modules can optionally be equipped with labeling strips (13 x 31 mm) for system-specific marking. The labeling strips can be inscribed mechanically. Labeling strips are available in two versions in the colors light gray and yellow:

- 500 strips on the roll, for printing on thermal transfer printers. Core diameter 40 mm, external diameter 70 mm, width 62 mm
- 10 DIN A4 sheets with 100 strips each, 180 g/sm card, perforated, for printing using a laser printer direct from TIA Portal or via print templates

Overview Equipment labeling plates



Optionally, one equipment labeling plate each can be plugged onto head-end stations, BusAdapters, BaseUnits, and I/O modules. Equipment labeling plates are supplied in packs of 10 sheets with 16 labels each. The labels can be printed with thermal-transfer card printers or plotters, or stickers can be attached to them. Advantages compared to labels that are attached directly:

- The inscription on the front is not covered
- Simple label replacement when replacing a module
- No parallax errors when marking the BaseUnits on the mounting plate

The size of the labels is 14.8 x 10.5 mm (W x H)

Overview BU cover

The ET 200SP system can be operated with any number of slot gaps (BU slot without inserted I/O module). Applications for this include:

- Partial commissioning
- Prewired but unequipped options

To protect against damage, such slot gaps must be covered by a BU cover.

Within the BU cover, an equipment labeling plate for identification of the I/O module planned for this slot can be stored.

Versions:

- For BaseUnits with a width of 15 mm (pack containing 5 BU covers)
- For BaseUnits with a width of 20 mm (pack containing 5 BU covers)

Overview Shield connection



The shield connection permits the low-cost connection of cable shields. Compared to external shield supports, the system offers the following advantages:

- Quick installation without tools by plugging the shield connection element onto the BaseUnit
- Automatic low-impedance connection to the functional grounding (DIN rail)
- Optimized EMC properties by separating the signal lines from the supply voltage lines
- Short unshielded cable lengths
- Requires little space

Overview Unlatching strap

- For PROFINET push-pull plug, e.g. at BusAdapter BA 2xM12
- Enables unlatching of the plug without disassembly of the BusAdapter

Overview Color-coded labels

The I/O modules that are plugged onto the BaseUnits determine the potentials connected at the process terminals. The +/- potentials can optionally be identified using module-specific color-coded labels. The potentials of the AUX and add-on terminals can also be marked using color-coded labels. Advantages of the color-coded labels:

- Quick installation (one label for marking 16 terminals)
- Printed terminal numbers
- Avoidance of wiring errors
- Simple detection of potentials during servicing

Overview Server module

The server module is included in the scope of delivery of all head-end stations (interface module, CPU, Open Controller). It concludes the setup of an ET 200SP station.

Overview SIPLUS server module

The SIPLUS server module is included in the scope of supply of all head-end stations (interface module, CPU, Open Controller). It concludes the setup of a SIPLUS ET 200SP station.

Overview Coding elements

The operation of selected modules requires an electronic coding element that is always included in the scope of delivery of the I/O module. Apart from the mechanical coding function, this contains a re-writable memory for the redundant storage of module-specific configuration data (e.g. F target address for fail-safe modules or parameter data in the case of the IO-Link master). In this way, this data is automatically backed up during a module replacement. This saves the user from having to set addresses manually or back up data when replacing modules.

At present, there are two types of electronic coding element:

- e-coding element (Type H), which can be used in the I/O modules:
 - CM IO-Link master
 - F-CM AS-i Safety
- e-coding element (Type F), which can be used in the I/O modules:
 - F-DI 8x24VDC HF
 - F-DQ 4x24VDC/2A PM HF
 - F-PM-E 24VDC/8A PPM ST

Ordering data

Article No.

SIMATIC system rail

- with DIN rail according to EN 60715 (35 × 7.5), with 6 mm profile grooves, B-type
- Length: 482.6 mm for 19" cabinets
 - Length: 530 mm for 600 mm cabinets
 - Length: 830 mm for 900 mm cabinets
 - Length 2 m

6ES7193-6MR00-0AA0

6ES7193-6MR00-0BA0

6ES7193-6MR00-0CA0

6ES7193-6MR00-0DA0

Labeling strips

500 labeling strips on roll, light gray, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AA0

500 labeling strips on roll, yellow, for inscription with thermal transfer roll printer

6ES7193-6LR10-0AG0

1000 labeling strips DIN A4, light gray, card, for inscription with laser printer

6ES7193-6LA10-0AA0

1000 labeling strips DIN A4, yellow, card, for inscription with laser printer

6ES7193-6LA10-0AG0

Equipment labeling plate

10 sheets of 16 labels

6ES7193-6LF30-0AW0

BU cover

For covering empty slots (gaps); 5 units

- 15 mm wide
- 20 mm wide

6ES7133-6CV15-1AM0

6ES7133-6CV20-1AM0

Shield connection

5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional ground

6ES7193-6SC20-1AM0

Unlatching strap

10 units, for push-pull PROFINET plug, e. g. when using the BusAdapter BA 2xM12

6ES7193-6DL00-2AA0

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP**Accessories****Ordering data****Article No.****Article No.****Module-specific color-coded labels**

Color code CC00, for 16 process terminals, BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16)

- Pack containing 10 labels
- Pack containing 50 labels

6ES7193-6CP00-2MA0**6ES7193-6CP00-4MA0****6ES7193-6CP01-2MA0**

Color code CC01, for 16 push-in terminals, for BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16), pack containing 10 labels

6ES7193-6CP02-2MA0

Color code CC02, for 16 push-in terminals, for BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16), pack containing 10 labels

6ES7193-6CP03-2MA0

Color code CC03, for 16 push-in terminals, for BU type A0, A1 gray (terminals 1 to 8), red (terminals 9 to 12), gray (terminals 13 to 16), pack containing 10 labels

6ES7193-6CP04-2MA0

Color code CC04, for 16 push-in terminals, for BU type A0, A1 gray (terminals 1 to 8), red (terminals 9 to 12), blue (terminals 13 to 16), pack containing 10 labels

6ES7193-6CP05-2MA0

Color code CC05, for 16 push-in terminals, for BU type A0, A1 gray (terminals 1 to 12), red (terminals 13 to 14), blue (terminals 15 to 16), pack containing 10 labels

6ES7193-6CP41-2MB0

Color code CC41, for 16 push-in terminals; for BU type B1, gray (terminals 1 to 4), red (terminals 5 to 8), blue (terminals 9 to 12), pack containing 10 labels

6ES7193-6CP42-2MB0

Color code CC42, for 12 push-in terminals, BU type F0, gray (terminals 1 to 8), red (terminals 9 to 10), blue (terminals 11 to 12), pack containing 10 labels

6ES7193-6CP51-2MC0

Color code CC51, for 6 push-in terminals, for BU type C0, C1, gray (terminals 1 to 4), red (terminal 5), blue (terminal 6), pack containing 10 labels

6ES7193-6CP52-2MC0

Color code CC51, for 6 push-in terminals, for BU type C0, gray (terminals 1, 2 and 5), red (terminals 3 and 4), blue (terminal 6), pack containing 10 labels

6ES7193-6CP01-4MA0

Color code CC01, for 16 push-in terminals, for BU type A0, A1, gray (terminals 1 to 8), red (terminals 9 to 16), pack containing 50 labels

6ES7193-6CP02-4MA0

Color code CC02, for 16 push-in terminals, for BU type A0, A1, gray (terminals 1 to 8), blue (terminals 9 to 16), pack containing 50 labels

Color-coded labels for additional terminals

(pack containing 10 labels)

Color code CC71, for 10 AUX terminals, BU type A0, yellow/green (terminals 1 A to 10 A), pack containing 10 labels

6ES7193-6CP71-2AA0

Color code CC72, for 10 AUX terminals, BU type A0, red (terminals 1 A to 10 A), pack containing 10 labels

6ES7193-6CP72-2AA0

Color code CC73, for 10 AUX terminals, BU type A0, blue (terminals 1 A to 10 A), pack containing 10 labels

6ES7193-6CP73-2AA0

Color code CC74, for 2x5 additional terminals, BU type A1, red (terminals 1B to 5B), blue (terminals 1C to 5C), pack containing 10 labels

6ES7193-6CP74-2AA0

Color code CC81, for 4 AUX terminals, BU type B0, yellow/green (terminals 1 A to 4 A), pack containing 10 labels

6ES7193-6CP81-2AB0

Color code CC82, for 4 AUX terminals, BU type B0, red (terminals 1 A to 4 A), pack containing 10 labels

6ES7193-6CP82-2AB0

Color code CC83, for 4 AUX terminals, BU type B0, blue (terminals 1 A to 4 A), pack containing 10 labels

6ES7193-6CP83-2AB0

Color code CC84, for 2 AUX terminals 1 A to 2 A, yellow-green, for BaseUnit type C0, C1, pack containing 10 labels

6ES7193-6CP84-2AC0

Color code CC85, for 2 AUX terminals 1 A to 2 A, red, for BaseUnit type C0, C1, pack containing 10 labels

6ES7193-6CP85-2AC0

Color code CC86, for 2 AUX terminals 1 A to 2 A, blue, for BaseUnit type C0, C1, pack containing 10 labels

6ES7193-6CP86-2AC0**Server module****6ES7193-6PA00-0AA0**

Spare part

SIPLUS server module**6AG1193-6PA00-7AA0**

(Extended temperature range and exposure to environmental substances)

Spare part

Coding elements

Type H; pack containing 5 electronic coding elements

6ES7193-6EH00-1AA0

Type F; pack containing 5 electronic coding elements

6ES7193-6EF00-1AA0

Type A; pack with 20 mechanical coding elements, for automatic coding, for I/O modules

6ES7193-6KA00-3AA0

Type B; pack with 20 mechanical coding elements, for automatic coding, for I/O modules


6ES7193-6KB00-3AA0

Type C; pack with 20 mechanical coding elements, for automatic coding, for I/O modules

6ES7193-6KC00-3AA0

Type D; pack with 20 mechanical coding elements, for automatic coding, for I/O modules

6ES7193-6KD00-3AA0

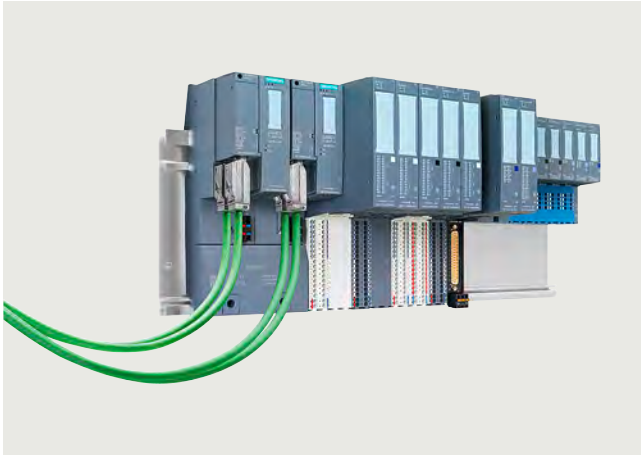Overview

ET 200SP HA with redundant interface module, standard modules, Ex modules and D-SUB terminal block.

Compact design, flexible connection possibilities and high system availability with redundant PROFINET connections: the SIMATIC ET 200SP HA distributed I/O system is perfectly suited to the requirements of the process industry. The new design allows up to 56 I/O modules per station. An impressively high concentration of up to 32 channels on a module that is only 22.5 mm wide allows for maximum economy in the control cabinet.

Redundant PROFINET connections allow the connection of high-availability controllers via two independent networks, with a choice of copper or fiber-optic cables. The system can be scaled and extended in small steps using a variety of available modules, for example with digital and analog I/Os as well as NAMUR, HART, and other protocols. All 24 V standard signals are connected via an identical terminal block type, which allows a high degree of standardization for the control cabinets.

SIMATIC ET 200SP HA is designed for use in the control cabinet as well as for hazardous areas up to hazardous zone 2. The extended temperature range from -40 to +70 °C and the conformal coating of all components allow direct installation in the field.

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Interface module**Overview**

IM 155-6 PN HA

IM 155-6 PN HA interface module

The IM 155-6 PN HA together with the IM carrier module and the BusAdapter forms the interface of the ET 200SP HA. The interface is used for communication between the CPU and the connected ET 200SP HA I/O modules over PROFINET.

Ordering data**Article No.****Interface module****PROFINET IM 155-6 PN interface module**

Max. 56 I/O modules,
multi hot swap, no server module

6DL1155-6AU00-0PM0**Accessories****IM cover**

Slot cover for interface module
slots, to protect vacant slots

Width 50 mm, 5 units

6DL1133-6CV50-0AM0

Technical specifications

Article number	6DL1155-6AU00-0PM0 ET 200SP HA, IM155-6 PN
General information	
Product type designation	IM 155-6 PN
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V16
• STEP 7 configurable/ integrated from version	V5.6
• PCS 7 configurable/ integrated from version	V9.0
• PCS neo can be configured/ integrated from version	V3.0
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Short-circuit protection	Yes
Address area	
Address space per station	
• Address space per station, max.	1 440 byte; 1 440 bytes R1 and S1 without CiR, otherwise 1 000 bytes
Hardware configuration	
Integrated power supply	Yes; 24 V DC
Rack	
• Modules per rack, max.	56; 56 slots for I/O modules + server module (width without IM ≤ 1.3 m)
Time stamping	
Accuracy	1 ms; In compliance with the supplementary conditions described in the Equipment Manual
Interfaces	
Number of PROFINET interfaces	1; 2 ports (switch)
1. Interface	
Interface types	
• Number of ports	2; via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; Compatible BusAdapters: BA 2x RJ45, BA 2x FC, BA 2x LC, BA LC/RJ45, BA LC/FC, BA VD
Protocols	
• PROFINET IO Device	Yes
• Open IE communication	Yes
• Media redundancy	Yes; as MRP client

Article number	6DL1155-6AU00-0PM0 ET 200SP HA, IM155-6 PN
Interface types	
RJ 45 (Ethernet)	
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 100 Mbps	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• Autonegotiation	Yes
• Autocrossing	Yes
Protocols	
Redundancy mode	
• PROFINET system redundancy (S2)	Yes; S2, R1
Media redundancy	
- MRP	Yes
Open IE communication	
• TCP/IP	Yes
• SNMP	Yes
• LLDP	Yes
Interrupts/diagnostics/ status information	
Status indicator	Yes
Alarms	Yes
Diagnostics function	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• ACT LED	Yes; green LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Connection display LINK TX/RX	Yes; 2x green link LEDs on BusAdapter
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C
Dimensions	
Width	50 mm
Height	138 mm
Depth	89 mm
Weights	
Weight, approx.	192 g; without BusAdapter

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Digital I/O modules

Overview



- DI 16×24VDC HA digital input module
16 24 V DC digital inputs
- DI 32×24VDC HA digital input module
32 24 V DC digital inputs
- DI 16×NAMUR HA digital input module
16 NAMUR digital inputs
- DI 8×24...125VDC HA digital input module
8 24 ... 125 V DC digital inputs
- DI 8×230VAC HA digital input module
8 230 V AC digital inputs
- DQ 16×24VDC/0.5A HA digital output module
16 24 V DC digital outputs, 0.5 A
- DQ 32×24VDC/0.5A HA digital output module
32 24 V DC digital outputs, 0.5 A
- RQ 4×120VDC-230VAC/5A CO HA digital output module
4 24 ... 120 V DC, 24 ... 230 V AC relay outputs, 5 A

Ordering data

Article No.

DI 16×24VDC HA digital input module 16 24 V DC digital inputs, color code CC01, for terminal block type H1 and M1, channel diagnostics	6DL1131-6BH00-0PH1
DI 32×24VDC HA digital input module 32 24 V DC digital inputs, color code CC00, for terminal block type P0 and H1, channel diagnostics	6DL1131-6BL00-0PH1
DI 16×NAMUR HA digital input module 16 NAMUR digital inputs, color code CC01, for terminal block type H1 and M1, channel diagnostics	6DL1131-6TH00-0PH1
DI 8×24...125VDC HA digital input module 8 24 ... 125 V DC digital inputs, color code CC42, for terminal block type K0, channel diagnostics	6DL1131-6DF00-0PK0
DI 8×230VAC HA digital input module 8 230 V AC digital inputs, color code CC42, for terminal block type K0, module diagnostics	6DL1131-6GF00-0PK0
DQ 16×24VDC/0.5A HA digital output module 16 24 V DC digital outputs, 0.5 A, color code CC02, for terminal block type H1 and M1, channel diagnostics	6DL1132-6BH00-0PH1
DQ 32×24VDC/0.5A HA digital output module 32 24 V DC digital outputs, 0.5 A, color code CC00, for terminal block type NO and H1, channel diagnostics	6DL1132-6BL00-0PH1
RQ 4×120VDC-230VAC/5A CO HA digital output module 4 24 ... 120 V DC, 24 ... 230 V AC relay outputs, 5 A, color code CC40, for terminal block type K0, module diagnostics	6DL1132-6HD50-0PK0

Article No.

Accessories

Labeling strips

For labeling the I/O modules

- Roll, light gray (with a total of 500 labeling strips), 1 unit
- DIN A4 sheet, light gray, 10 items per packing unit, 45 labeling strips per sheet (450)
- DIN A4 sheet, yellow, 10 items per packing unit, 45 labeling strips per sheet (450)

6DL1193-6LR00-0AA0

6DL1193-6LA00-0AA0

6DL1193-6LA00-0AG0

Color-coded labels

For push-in terminals

- Color code CC01, 10 units gray (terminals 1 to 16), red (terminals 17 to 32)
- Color code CC02, 10 units gray (terminals 1 to 16), blue (terminals 17 to 32)
- Color code CC40, 10 units gray (terminals 1 to 16)
- Color code CC42, 10 units gray (terminals 1 to 8), blue (terminals 9 to 16)

6DL1193-6CP01-2HH1

6DL1193-6CP02-2HH1

6DL1193-6CP40-2HK0

6DL1193-6CP42-2HK0

Equipment labeling plates

10 sheets with 16 labels each

6ES7193-6LF30-0AW0

TM cover

Slot cover for I/O modules, to protect vacant I/O slots
Width 22.5 mm, 5 units

6DL1133-6CV22-0AM0

Technical specifications

Article number	6DL1131-6GF00-0PK0	6DL1131-6BH00-0PH1	6DL1131-6DF00-0PK0	6DL1131-6BL00-0PH1	6DL1131-6TH00-0PH1
	ET 200SP HA, DI 8X230VAC	ET 200SP HA, DI 16X24VDC	ET 200SP HA, DI 8X24 ... 125VDC	ET 200SP HA, DI 32X24VDC	ET 200SP HA, DI 16XNAMUR
General information					
Product type designation	DI 8x230VAC HA	DI 16x24VDC HA	DI 8x24 ... 125 V DC HA	DI 32x24VDC HA	DI 16xNAMUR HA
Engineering with					
• STEP 7 TIA Portal configurable/ integrated from version	V16	V16	V16	V16	V16
• STEP 7 configurable/ integrated from version	V5.6	V5.6	V5.6	V5.6	V5.6
• PCS 7 configurable/ integrated from version	V9.0	V9.0	V9.0	V9.0	V9.0
• PCS neo can be configured/ integrated from version	V3.0	V3.0	V3.0	V3.0	V3.0
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.3
Operating mode					
• DI	Yes	Yes	Yes	Yes	Yes
• Counter		No	No	No	No
• Oversampling		No	No	No	No
• MSI		No	No	No	No
Supply voltage					
Rated value (DC)		24 V	24 V	24 V	24 V
Rated value (AC)	230 V				
Reverse polarity protection		Yes	Yes	Yes	Yes
Encoder supply					
Number of outputs		16		32; When terminal block with encoder supply is used (type P0)	16
Short-circuit protection		Yes; electronic (response threshold 0.7 A to 1.3 A; for IO redundancy up to 2.6 A) Ensure sufficient low-resistance cable routing to the sensor/actuator in order to attain the response threshold. Depending on the cable cross-section used, there may be constraints regarding the usable length of cable		Yes; When using TB type P0	Yes
Output current					
• up to 60 °C, max.		2 A; 1 A when mounted vertically; see derating information in Equipment Manual			
• up to 70 °C, max.		1 A; See derating information in Equipment Manual			

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA**Digital I/O modules****Technical specifications**

Article number	6DL1131-6GF00-0PK0 ET 200SP HA, DI 8X230VAC	6DL1131-6BH00-0PH1 ET 200SP HA, DI 16X24VDC	6DL1131-6DF00-0PK0 ET 200SP HA, DI 8X24 ... 125VDC	6DL1131-6BL00-0PH1 ET 200SP HA, DI 32X24VDC	6DL1131-6TH00-0PH1 ET 200SP HA, DI 16XNAMUR
24 V encoder supply					
<ul style="list-style-type: none"> • 24 V • Short-circuit protection 		Yes			
<ul style="list-style-type: none"> • Output current per channel, max. • Output current per module, max. 		Yes; electronic (response threshold 0.7 A to 1.3 A; for IO redundancy up to 2.6 A) Ensure sufficient low-resistance cable routing to the sensor/actuator in order to attain the response threshold. Depending on the cable cross-section used, there may be constraints regarding the usable length of cable			
		0.5 A			
		2 A			
Digital inputs					
Number of digital inputs	8; Isolated	16	8	32	16; NAMUR
Digital inputs, parameterizable		Yes		Yes	Yes
Source/sink input		Yes; P-reading	Yes; P-reading	Yes; P-reading	
Input characteristic curve in accordance with IEC 61131, type 1		Yes	Yes	Yes	
Input characteristic curve in accordance with IEC 61131, type 2		No		No	
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes	Yes	Yes	
Pulse extension		Yes		No	Yes; 0.5 s, 1 s, 2 s
<ul style="list-style-type: none"> • Length 		off, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s			
Time stamping		Yes; Resolution 10 ms	Yes; Resolution 10 ms		Yes
Time stamp (with precision of 1 ms)		Yes; Resolution 1ms	Yes; Resolution 1ms		No
Edge evaluation		Yes; rising edge, falling edge, edge change		Yes; rising edge, falling edge, edge change	Yes; rising edge, falling edge, edge change
Signal change flutter					Yes; 2 to 32 signal changes
Flutter observation window					Yes; 0.5 s, 1 s to 100 s in 1-s steps
Input voltage					
<ul style="list-style-type: none"> • Rated value (DC) • Rated value (AC) • for signal "0" • for signal "1" 	230 V	24 V		24 V	8.2 V
	0V AC to 40V AC	-30 to +5 V	-125 ... +5 V	-30 to +5 V	
	74 V AC to 264 V AC	+11 to +30V	+11 ... +125 V	+11 to +30V	
Input current					
<ul style="list-style-type: none"> • for signal "1", typ. 	10.8 mA	2.5 mA	3.1 mA	2.5 mA	
for 10 k switched contact					
- for signal "0"					0.35 to 1.2 mA
- for signal "1"					2.1 ... 6.4 mA
for unswitched contact					
- for signal "1"					typ. 8 mA
for NAMUR encoders					
- for signal "0", min.					0.35 mA
- for signal "0", max.					1.2 mA
- for signal "1", min.					2.1 mA
- for signal "1", max.					6.4 mA

Technical specifications

Article number	6DL1131-6GF00-0PK0	6DL1131-6BH00-0PH1	6DL1131-6DF00-0PK0	6DL1131-6BL00-0PH1	6DL1131-6TH00-0PH1
	ET 200SP HA, DI 8X230VAC	ET 200SP HA, DI 16X24VDC	ET 200SP HA, DI 8X24 ... 125VDC	ET 200SP HA, DI 32X24VDC	ET 200SP HA, DI 16XNAMUR
Input delay (for rated value of input voltage)					
<ul style="list-style-type: none"> tolerated changeover time for changeover contacts 					300 ms
for standard inputs					
- parameterizable		Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)	No	
for NAMUR inputs					
- at "0" to "1", max.					17 ms
- at "1" to "0", max.					25 ms
Encoder					
Connectable encoders					
<ul style="list-style-type: none"> NAMUR encoder/changeover contact according to EN 60947 Single contact / changeover contact unconnected Single contact / changeover contact connected with 10 kΩ 2-wire sensor - permissible quiescent current (2-wire sensor), max. 	Yes	Yes 1.5 mA	Yes 1.5 mA	Yes 1.5 mA	Yes Yes Yes Yes; Acc. to NAMUR 1.2 mA
Interrupts/diagnostics/ status information					
Diagnostics function		Yes		Yes	
Alarms					
<ul style="list-style-type: none"> Diagnostic alarm Hardware interrupt 	Yes	Yes; channel by channel Yes; channel by channel	Yes Yes; Parameterizable, channels 0 to 7, rising/falling edge	Yes; channel by channel Yes; channel by channel	Yes; channel by channel Yes; Parameterizable, channels 0 to 15, rising/falling edge
Diagnoses					
<ul style="list-style-type: none"> Diagnostic information readable Monitoring the supply voltage - parameterizable Monitoring of encoder power supply Wire-break Short-circuit Short-circuit to M Group error Changeover contact error 	Yes	Yes Yes; Module-wise Yes Yes Yes; Channel-by-channel, optional protective circuit for preventing wire-break diagnostics in the case of simple encoder contacts: 15 kOhm to 18 kOhm Yes; Encoder supply to M, channel by channel	Yes Yes Yes; channel by channel Yes	Yes Yes; Module-wise Yes Yes; Channel-by-channel, optional protective circuit for preventing wire-break diagnostics in the case of simple encoder contacts: 15 kOhm to 18 kOhm No	Yes Yes Yes Yes Yes Yes
Diagnostics indication LED					
<ul style="list-style-type: none"> MAINT LED Monitoring of the supply voltage (PWR-LED) Channel status display for channel diagnostics for module diagnostics 	Yes; Yellow LED Yes; green LED Yes; green/red DIAG LED	Yes; Yellow LED Yes; green PWR LED Yes; green LED Yes; red LED Yes; green/red LED	Yes; Yellow LED Yes; green PWR LED Yes; green LED Yes; red LED Yes; green/red DIAG LED	Yes; Yellow LED Yes; green PWR LED Yes; green LED No Yes; green/red DIAG LED	Yes; Yellow LED Yes; green PWR LED Yes; green LED Yes; red LED Yes; green/red DIAG LED

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Digital I/O modules**Technical specifications**

Article number	6DL1131-6GF00-0PK0 ET 200SP HA, DI 8X230VAC	6DL1131-6BH00-0PH1 ET 200SP HA, DI 16X24VDC	6DL1131-6DF00-0PK0 ET 200SP HA, DI 8X24 ... 125VDC	6DL1131-6BL00-0PH1 ET 200SP HA, DI 32X24VDC	6DL1131-6TH00-0PH1 ET 200SP HA, DI 16XNAMUR
Potential separation					
Potential separation channels					
• between the channels and backplane bus	Yes	Yes	Yes	Yes	Yes
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C	70 °C	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
Dimensions					
Width	22.5 mm	22.5 mm	22.5 mm	22.5 mm	22.5 mm
Height	115 mm	115 mm	115 mm	115 mm	115 mm
Depth	138 mm	138 mm	138 mm	138 mm	138 mm
Weights					
Weight, approx.	148 g	135 g	165 g	150 g	153 g

Overview



- AI 8xU/I/TC/4xRTD 2-/4-wire HA analog input module
8 analog inputs
Measuring range: Voltage: 1 ... 5 V, 0 ... 10 V, ± 50 mV, ± 80 mV, ± 250 mV, ± 500 mV, ± 1 V, ± 2.5 V, ± 5 V, ± 10 V; current: 4 ... 20 mA (2-/4-wire); and 0 ... 20 mA (4-wire), ± 20 mA (4-wire); TC elements: B, C, N, E, R, S, J, L, T, K, U, TXK; RTD elements: Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni200, Ni500, Ni1000, Cu10, LG-Ni1000 | resistance areas: 150, 300, 600, 3000, 6000 Ohm | PTC
- AI 16xI 2-wire HA analog input module
16 analog inputs
Measuring range 4 ... 20 mA; 0 ... 10 mA; 0 ... 20 mA
- AI 16xI 2-wire HART HA analog input module
16 analog inputs
Measuring range 0 to 20 mA, 0 to 10 mA, 4 to 20 mA, 4 to 20 mA with HART
- AI 16xTC/8xRTD 2-/3-/4-wire HA analog input module
16 analog inputs for thermocouples; alternatively
8 analog inputs for thermistors
- AI 16xI 2-wire HA analog input module
16 analog inputs
Measuring range 0 to 20 mA, 0 to 10 mA, 4 to 20 mA
- AI 16xI 2-wire HA analog input module
8 analog inputs for voltage measurements, current measurements, thermocouples, alternatively
4 analog inputs for thermistors
- AQ 8xI HART HA analog output module
8 analog outputs
Power output in the output ranges 0 to 10 mA, 0 to 20 mA, 4 to 20 mA and 4 to 20 mA HART
- AI 4XI 2-/4-wire HART ISOL analog input module
4 galvanically isolated analog inputs (2-/4-wire)
- Analog output module AQ 4XI HART ISOL
4 galvanically isolated analog outputs (2-wire)

10

Ordering data

Article No.

Article No.

AI 8xU/I/TC/4xRTD 2-/4-wire HA analog input module
8 analog inputs

6DL1134-6AF00-0PH1

Measuring ranges:

- Voltage: 1 ... 5 V, 0 ... 10 V, ± 50 mV, ± 80 mV, ± 250 mV, ± 500 mV, ± 1 V, ± 2.5 V, ± 5 V, ± 10 V
- Current: 4 ... 20 mA (2-/4-wire); and 0 ... 20 mA (4-wire), ± 20 mA (4-wire)
- TC elements: B, C, N, E, R, S, J, L, T, K, U, TXK
- RTD elements: Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni200, Ni500, Ni1000, Cu10, LG-Ni1000 | resistance areas: 150, 300, 600, 3000, 6000 Ohm | PTC

Color code CC00,
for terminal block type H1,
N0 and H0, channel diagnostics,
16-bit

AI 16xI 2-wire HA analog input module
16 analog inputs

6DL1134-6GH00-0PH1

Measuring range 4 ... 20 mA;
0 ... 10 mA; 0 ... 20 mA

Color code CC01,
for terminal block type H1 and P1,
channel diagnostics, 16-bit

AI 16xI 2-wire HART HA analog input module
16 analog inputs

6DL1134-6TH00-0PH1

Measuring range 0 to 20 mA,
0 to 10 mA, 4 to 20 mA,
4 to 20 mA with HART

Color code CC01,
for terminal block type H1 and M1,
channel diagnostics, 16-bit

AI 16xTC/8xRTD 2-/3-/4-wire HA analog input module

6DL1134-6JH00-0PH1

16 analog inputs for
thermocouples; alternatively
8 analog inputs for thermistors

Color code CC00,
for terminal block type H1 and M1,
channel diagnostics, 16-bit

AQ 8xI HART HA analog output module

6DL1135-6TF00-0PH1

8 analog outputs

Power output in the output ranges
0 to 10 mA, 0 to 20 mA, 4 to 20 mA
and 4 to 20 mA HART

Color code CC00,
for terminal block type H1 and M1,
channel diagnostics, 16-bit

AI 4XI 2-/4-wire HART ISOL analog input module

6DL1134-6UD00-0PK0

14 analog inputs

Color code CC01,
for terminal block type K0, L0,
channel diagnostics, 16-bit, +/-0.1%

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Analog I/O modules

Ordering data	Article No.	Article No.
AQ 4XI HART ISOL analog output module 4 analog outputs Color code CC00, for terminal block type K0, L0, channel diagnostics, 16-bit, +/-0.1%	6DL1135-6UD00-0PK0	Color-coded labels For push-in terminals <ul style="list-style-type: none"> Color code CC00, 10 units gray (terminals 1 to 32) Color code CC01, 10 units gray (terminals 1 to 16), red (terminals 17 to 32)
Accessories		6DL1193-6CP00-2HH1
		6DL1193-6CP01-2HH1
Labeling strips For labeling the I/O modules <ul style="list-style-type: none"> Roll, light gray (with a total of 500 labeling strips), 1 unit DIN A4 sheet, light gray, 10 items per packing unit, 45 labeling strips per sheet (450) DIN A4 sheet, yellow, 10 items per packing unit, 45 labeling strips per sheet (450) 	6DL1193-6LR00-0AA0 6DL1193-6LA00-0AA0 6DL1193-6LA00-0AG0	Equipment labeling plates 10 sheets with 16 labels each
		6ES7193-6LF30-0AW0
		TM cover Slot cover for I/O modules, to protect vacant I/O slots Width 22.5 mm, 5 units
		6DL1133-6CV22-0AM0

Technical specifications

Article number	6DL1134-6UD00-0PK0 ET 200SP HA, AI 4XI 2-/4-Wire HART ISOL
General information	
Product type designation	AI 4xl 2-/4-wire HART ISOL HA
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V17
• STEP 7 configurable/ integrated from version	V5.6
• PCS 7 configurable/ integrated from version	V9.1
• PCS neo can be configured/ integrated from version	V3.0
• PROFINET from GSD version/ GSD revision	GSDML V2.35
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Encoder supply	
Number of outputs	4
Short-circuit protection	Yes; Electronic
Analog inputs	
Number of analog inputs	4
• For current measurement	4
permissible input current for current input (destruction limit), max.	30 mA
Input ranges (rated values), currents	
• 0 to 20 mA	Yes; 16 bit incl. sign
• 4 mA to 20 mA	Yes; 16 bit incl. sign
Cable length	
• shielded, max.	800 m; with unshielded cables up to 800 m, remember that (external) EMC loads can cause incorrect measured values
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit; 14 bit at 60 Hz (0 ... 10 mA), 16 bit at 10 Hz, 15 bit at 50 Hz and 15 bit at 60 Hz interference suppression

Article number	6DL1134-6UD00-0PK0 ET 200SP HA, AI 4XI 2-/4-Wire HART ISOL
Smoothing of measured values	
• parameterizable	Yes; none, weak, medium, strong, channel-by-channel
Encoder	
Connection of signal encoders	
• for current measurement as 2-wire transducer	Yes
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Current, relative to input range, (+/-)	0.1 %
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; channel by channel
• Short-circuit	Yes; Channel-by-channel, short-circuit of the encoder supply to ground or of an input to the encoder supply
• Overflow/underflow	Yes; channel by channel
Diagnostics indication LED	
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes; 125 V AC / 150 V DC (when using terminal blocks with push-in terminals); SELV/PELV (when using terminal blocks with D-SUB)

Technical specifications

Article number	6DL1134-6UD00-0PK0 ET 200SP HA, AI 4XI 2-/4-Wire HART ISOL
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C; Observe derating
• vertical installation, min.	-40 °C
• vertical installation, max.	70 °C; Observe derating
Dimensions	
Width	22.5 mm
Height	115 mm
Depth	138 mm
Weights	
Weight, approx.	163 g
Article number	6DL1135-6UD00-0PK0 ET 200SP HA, AQ 4XI HART ISOL
General information	
Product type designation	AQ 4xI HART ISOL HA
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V17
• STEP 7 configurable/ integrated from version	V5.6
• PCS 7 configurable/ integrated from version	V9.1
• PCS neo can be configured/ integrated from version	V3.0
• PROFINET from GSD version/ GSD revision	GSDML V2.35
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Analog outputs	
Number of analog outputs	4
Output ranges, current	
• 0 to 20 mA	Yes; 15 bit
• 4 mA to 20 mA	Yes; 15 bit
Connection of actuators	
• for current output two-wire connection	Yes
Load impedance (in rated range of output)	
• for current outputs, min.	50 Ω
• with current outputs, max.	750 Ω
• with current outputs, inductive load, max.	10 mH
Cable length	
• shielded, max.	1 000 m; with unshielded cables up to 800 m, remember that (external) EMC loads can cause incorrect measured values
Analog value generation for the outputs	
Settling time	
• for resistive load	1.2 ms; 750 ohm
• for inductive load	1.2 ms
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Current, relative to output range, (+/-)	0.1 %

Article number	6DL1135-6UD00-0PK0 ET 200SP HA, AQ 4XI HART ISOL
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; channel by channel
• Short-circuit	Yes
• Overflow/underflow	Yes; channel by channel
Diagnostics indication LED	
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes; 125 V AC / 150 V DC (when using terminal blocks with push-in terminals); SELV/PELV (when using terminal blocks with D-SUB)
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C; Observe derating
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C; Observe derating
Dimensions	
Width	22.5 mm
Height	115 mm
Depth	138 mm
Weights	
Weight, approx.	165 g
Article number	6DL1134-6GH00-0PH1 ET 200SP HA, AI 16xI 2-wire HA
General information	
Product type designation	AI 16xI 2-wire HA
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V18
• STEP 7 configurable/ integrated from version	V5.6
• PCS 7 configurable/ integrated from version	V9.1 SP2
• PCS neo can be configured/ integrated from version	V4.0
• PROFINET from GSD version/ GSD revision	GSDML V2.42 2023.01
Operating mode	
• Oversampling	No
• MSI	No
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Encoder supply	
Number of outputs	16
Short-circuit protection	Yes

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Analog I/O modules

Technical specifications

Article number	6DL1134-6GH00-0PH1 ET 200SP HA, AI 16xI 2-wire HA
Analog inputs	
Number of analog inputs	16
• For current measurement	16
permissible input current for current input (destruction limit), max.	30 mA
Cycle time (all channels), min.	400 ms
Input ranges (rated values), currents	
• 0 to 20 mA	Yes; 16 bit incl. sign
• 4 mA to 20 mA	Yes; 16 bit incl. sign
Cable length	
• shielded, max.	800 m
• unshielded, max.	200 m
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit; 15 bit at 0 ... 10 mA and 60 Hz interference suppression
• Integration time, parameterizable	Yes; channel by channel
• Integration time (ms)	16.6 / 20 / 100 ms
Smoothing of measured values	
• parameterizable	Yes; none, weak, medium, strong, channel-by-channel
Encoder	
Connection of signal encoders	
• for current measurement as 2-wire transducer	Yes
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Current, relative to input range, (+/-)	0.3 %
Interrupts/diagnostics/status information	
Alarms	
• Diagnostic alarm	Yes
• Limit value alarm	No
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; channel-by-channel, at 4 to 20 mA only
• Short-circuit	No
• Overflow/underflow	Yes; channel by channel
Diagnostics indication LED	
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation analog inputs	
• between the channels and backplane bus	Yes
Potential separation channels	
• between the channels and backplane bus	Yes

Article number	6DL1134-6GH00-0PH1 ET 200SP HA, AI 16xI 2-wire HA
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C
Dimensions	
Width	22.5 mm
Height	115 mm
Depth	138 mm
Weights	
Weight, approx.	148 g
Article number	6DL1134-6JH00-0PH1 ET 200SP HA, AI 16XTC/8XRTD 2-/3-/4-WIRE
General information	
Product type designation	AI 16 x TC/8 x RTD 2/3/4-wire HA
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V16
• STEP 7 configurable/integrated from version	V5.6
• PCS 7 configurable/integrated from version	V9.0
• PCS neo can be configured/integrated from version	V3.0
• PROFINET from GSD version/GSD revision	GSDML V2.3
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Analog inputs	
Number of analog inputs	
• For voltage measurement	16
• For resistance/resistance thermometer measurement	8
• For thermocouple measurement	16
permissible input voltage for voltage input (destruction limit), max.	5 V
Constant measurement current for resistance-type transmitter, typ.	2 mA
Technical unit for temperature measurement adjustable	Yes; °C/°F/K
Input ranges (rated values), voltages	
• -1 V to +1 V	Yes; 16 bit incl. sign
• -250 mV to +250 mV	Yes; 16 bit incl. sign
• -50 mV to +50 mV	Yes; 16 bit incl. sign
• -80 mV to +80 mV	Yes; 16 bit incl. sign
Input ranges (rated values), thermocouples	
• Type B	Yes; 16 bit incl. sign
• Type C	Yes; 16 bit incl. sign
• Type E	Yes; 16 bit incl. sign
• Type J	Yes; 16 bit incl. sign
• Type K	Yes; 16 bit incl. sign
• Type L	Yes; 16 bit incl. sign
• Type N	Yes; 16 bit incl. sign
• Type R	Yes; 16 bit incl. sign
• Type S	Yes; 16 bit incl. sign
• Type T	Yes; 16 bit incl. sign
• Type U	Yes; 16 bit incl. sign
• Type TXK/TXK(L) to GOST	Yes; 16 bit incl. sign

Technical specifications

Article number	6DL1134-6JH00-0PH1 ET 200SP HA, AI 16XTC/8XRTD 2-/3-/4-WIRE
Input ranges (rated values), resistance thermometer	
• Cu 10	Yes; 16 bit incl. sign
• Ni 100	Yes; 16 bit incl. sign
• Ni 1000	Yes; 16 bit incl. sign
• LG-Ni 1000	Yes; 16 bit incl. sign
• Ni 120	Yes; 16 bit incl. sign
• Ni 200	Yes; 16 bit incl. sign
• Ni 500	Yes; 16 bit incl. sign
• Pt 100	Yes; 16 bit incl. sign
• Pt 1000	Yes; 16 bit incl. sign
• Pt 200	Yes; 16 bit incl. sign
• Pt 500	Yes; 16 bit incl. sign
Input ranges (rated values), resistors	
• 0 to 150 ohms	Yes; 15 bit
• 0 to 300 ohms	Yes; 15 bit
• 0 to 600 ohms	Yes; 15 bit
• 0 to 3000 ohms	Yes; 15 bit
• 0 to 6000 ohms	Yes; 15 bit
• PTC	Yes; 15 bit
Thermocouple (TC) Temperature compensation - parameterizable	Yes
Cable length	
• shielded, max.	200 m; Measurement ranges for thermocouples / voltages: shielded cable length max. 600 m, loop resistance max 8 kOhm; measuring ranges RTD: shielded cable length max. 600 m, cable resistance (single) max. 75 ohms
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
• Integration time, parameterizable	Yes; Channel-by-channel, results from the selected interference frequency suppression
• Interference voltage suppression for interference frequency f1 in Hz	16.6 / 50 / 60 Hz, channel-by-channel
• Conversion time (per channel)	60 ms; 180 / 50 ms, results from the selected interference frequency suppression
Smoothing of measured values	
• parameterizable	Yes; none, weak, medium, strong, channel-by-channel
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Voltage, relative to input range, (+/-)	0.05 %
• Resistance, relative to input range, (+/-)	0.05 %
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, f1 = interference frequency	
• Series mode interference (peak value of interference < rated value of input range), min.	70 dB
• Common mode voltage, max.	60 V
• Common mode interference, min.	90 dB

Article number	6DL1134-6JH00-0PH1 ET 200SP HA, AI 16XTC/8XRTD 2-/3-/4-WIRE
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; channel by channel
• Overflow/underflow	Yes; channel by channel
Diagnostics indication LED	
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C
Dimensions	
Width	22.5 mm
Height	115 mm
Depth	138 mm
Weights	
Weight, approx.	150 g
Article number	6DL1134-6AF00-0PH1 ET 200SP HA, AI 8xU/I/TC/4xRTD HA
General information	
Product type designation	AI 8xU/I/TC/4xRTD 2/3/4-wire HA
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V18
• STEP 7 configurable/integrated from version	V5.6
• PCS 7 configurable/integrated from version	V9.1 SP2
• PCS neo can be configured/integrated from version	V4.0
• PROFINET from GSD version/GSD revision	GSDML V2.42 2023.01
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA**Analog I/O modules****Technical specifications**

Article number	6DL1134-6AF00-0PH1 ET 200SP HA, AI 8xU/I/TC/4xRTD HA
Analog inputs	
Number of analog inputs	
• For current measurement	8
• For voltage measurement	8
• For resistance/resistance thermometer measurement	4
• For thermocouple measurement	8
permissible input voltage for voltage input (destruction limit), max.	24 V
permissible input current for current input (destruction limit), max.	40 mA
Constant measurement current for resistance-type transmitter, typ.	1.25 mA
Technical unit for temperature measurement adjustable	Yes; °C/°F/K
Input ranges (rated values), voltages	
• 0 to +10 V	Yes; 15 bit
• 1 V to 5 V	Yes; 15 bit
• -1 V to +1 V	Yes; 16 bit incl. sign
• -10 V to +10 V	Yes; 16 bit incl. sign
• -2.5 V to +2.5 V	Yes; 16 bit incl. sign
• -250 mV to +250 mV	Yes; 16 bit incl. sign
• -5 V to +5 V	Yes; 16 bit incl. sign
• -50 mV to +50 mV	Yes; 16 bit incl. sign
• -500 mV to +500 mV	Yes; 16 bit incl. sign
• -80 mV to +80 mV	Yes; 16 bit incl. sign
Input ranges (rated values), currents	
• 0 to 20 mA	Yes
• -20 mA to +20 mA	Yes
• 4 mA to 20 mA	Yes
Input ranges (rated values), thermocouples	
• Type B	Yes; 16 bit incl. sign
• Type C	Yes; 16 bit incl. sign
• Type E	Yes; 16 bit incl. sign
• Type J	Yes; 16 bit incl. sign
• Type K	Yes; 16 bit incl. sign
• Type L	Yes; 16 bit incl. sign
• Type N	Yes; 16 bit incl. sign
• Type R	Yes; 16 bit incl. sign
• Type S	Yes; 16 bit incl. sign
• Type T	Yes; 16 bit incl. sign
• Type U	Yes; 16 bit incl. sign
• Type TXK/TXK(L) to GOST	Yes; 16 bit incl. sign
Input ranges (rated values), resistance thermometer	
• Cu 10	Yes; 16 bit incl. sign
• Cu 50	Yes; 16 bit incl. sign
• Cu 100	Yes; 16 bit incl. sign
• Ni 100	Yes; 16 bit incl. sign
• Ni 1000	Yes; 16 bit incl. sign
• LG-Ni 1000	Yes; 16 bit incl. sign
• Ni 120	Yes; 16 bit incl. sign
• Ni 200	Yes; 16 bit incl. sign
• Ni 500	Yes; 16 bit incl. sign
• Pt 100	Yes; 16 bit incl. sign
• Pt 1000	Yes; 16 bit incl. sign
• Pt 200	Yes; 16 bit incl. sign
• Pt 500	Yes; 16 bit incl. sign

Article number	6DL1134-6AF00-0PH1 ET 200SP HA, AI 8xU/I/TC/4xRTD HA
Input ranges (rated values), resistors	
• 0 to 150 ohms	Yes; 15 bit
• 0 to 300 ohms	Yes; 15 bit
• 0 to 600 ohms	Yes; 15 bit
• 0 to 3000 ohms	Yes; 15 bit
• 0 to 6000 ohms	Yes; 15 bit
• PTC	Yes; 15 bit
Thermocouple (TC) Temperature compensation	
- parameterizable	Yes
Cable length	
• shielded, max.	thermocouples: shielded cable length max. 200 m, voltages: shielded cable length max. 600 m, loop resistance max 8 kOhm; measuring ranges RTD: shielded cable length max. 600 m, cable resistance (single) max. 75 ohm, current measurement: shielded cable length max. 800 m
• unshielded, max.	200 m; Only applies when connecting current sensors
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
• Integration time, parameterizable	Yes; Channel-by-channel, results from the selected interference frequency suppression
• Interference voltage suppression for interference frequency f1 in Hz	10 / 50 / 60 / 400 Hz
• Conversion time (per channel)	Channel-by-channel, results from the selected interference frequency suppression
Smoothing of measured values	
• parameterizable	Yes; none, weak, medium, strong, channel-by-channel
Encoder	
Connection of signal encoders	
• for voltage measurement	Yes
• for current measurement as 2-wire transducer	Yes
- Burden of 2-wire transmitter, max.	820 Ω
• for current measurement as 4-wire transducer	Yes
• for resistance measurement with two-wire connection	Yes; all measuring ranges incl. PTC
• for resistance measurement with three-wire connection	Yes; All measuring ranges except PTC; internal compensation of the cable resistances
• for resistance measurement with four-wire connection	Yes; All measuring ranges except PTC
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Voltage, relative to input range, (+/-)	0.1 %
• Current, relative to input range, (+/-)	0.1 %
• Resistance, relative to input range, (+/-)	0.1 %

Technical specifications

Article number	6DL1134-6AF00-0PH1 ET 200SP HA, AI 8xU/I/TC/4xRTD HA
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, $f1 =$ interference frequency	
• Series mode interference (peak value of interference < rated value of input range), min.	60 dB
• Common mode voltage, max.	15 V
• Common mode interference, min.	90 dB
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; channel-by-channel TC, current 4 ... 20 mA, R and RTD
• Short-circuit	Yes; channel by channel for current (2-wire)
• Overflow/underflow	Yes; channel by channel
Diagnostics indication LED	
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation channels	Yes
• between the channels and backplane bus	
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C
Dimensions	
Width	22.5 mm
Height	115 mm
Depth	138 mm
Weights	
Weight, approx.	150 g
Article number	6DL1134-6TH00-0PH1 ET 200SP HA, AI 16XI 2-WIRE HART
General information	
Product type designation	AI 16 x I 2-wire mA HART
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V16
• STEP 7 configurable/integrated from version	V5.6
• PCS 7 configurable/integrated from version	V9.0
• PCS neo can be configured/integrated from version	V3.0
• PROFINET from GSD version/GSD revision	GSDML V2.3
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes

Article number	6DL1134-6TH00-0PH1 ET 200SP HA, AI 16XI 2-WIRE HART
Analog inputs	
Number of analog inputs	16
permissible input current for current input (destruction limit), max.	30 mA
Input ranges (rated values), currents	
• 0 to 20 mA	Yes; 16 bit incl. sign
• 4 mA to 20 mA	Yes; 16 bit incl. sign
Cable length	
• shielded, max.	800 m; with unshielded cables up to 800 m, remember that (external) EMC loads can cause incorrect measured values
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit; 15 bit at 0 ... 10 mA and 60 Hz interference suppression
• Integration time, parameterizable	Yes; channel by channel
Smoothing of measured values	
• parameterizable	Yes; none, weak, medium, strong, channel-by-channel
Encoder	
Connection of signal encoders	
• for current measurement as 2-wire transducer	Yes
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Current, relative to input range, (+/-)	0.1 %
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; channel by channel
• Short-circuit	Yes; Channel-by-channel, short-circuit of the encoder supply to ground or of an input to the encoder supply
• Overflow/underflow	Yes; channel by channel
Diagnostics indication LED	
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation channels	Yes
• between the channels and backplane bus	
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C; Observe derating
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C; Observe derating
Dimensions	
Width	22.5 mm
Height	115 mm
Depth	138 mm
Weights	
Weight, approx.	148 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Analog/digital module

Overview



The I/O module AI-DI 16/DQ16x24VDC HART HA is available in the following versions:

- DI 16/DQ16x24VDC HA in digital-only mode
- AI-DI 16/DQ 16x24VDC HART HA as digital/analog module in mixed mode

Time stamping is available with configuration in mixed mode. High-precision time stamping (SoE: Sequence of Events) with a precision of 1 ms is available with configuration in digital-only mode.

In mixed mode, the 16 inputs can also be set channel by channel as either digital inputs or analog inputs with or without HART. HART is only available in mixed mode and with configuration in a measuring range of 4 to 20 mA.

Ordering data

Article No.

AI-DI 16/DQ16x24VDC HART HA input/output module

16 channels, each with digital output and digital/analog input
Color code CC01,
for terminal block type H1 and M1

6DL1133-6EW00-0PH1

Accessories

Labeling strips

For labeling the I/O modules

- Roll, light gray (with a total of 500 labeling strips), 1 unit
- DIN A4 sheet, light gray, 10 items per packing unit, 45 labeling strips per sheet (450)
- DIN A4 sheet, yellow, 10 items per packing unit, 45 labeling strips per sheet (450)

6DL1193-6LR00-0AA0

6DL1193-6LA00-0AA0

6DL1193-6LA00-0AG0

Color-coded labels

For push-in terminals

- Color code CC01, 10 units gray (terminals 1 to 16), red (terminals 17 to 32)

6DL1193-6CP01-2HH1

Equipment labeling plates

10 sheets with 16 labels each

6ES7193-6LF30-0AW0

Slot cover for I/O modules

22.5 mm wide

6DL1133-6CV22-0AM0

Technical specifications

Article number	6DL1133-6EW00-0PH1 ET 200SP HA, AI-DI16/DQ16X24VDC HART
General information	
Product type designation	AI-DI 16/DQ 16x24VDC HART HA
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V16
• STEP 7 configurable/ integrated from version	V5.6
• PCS 7 configurable/ integrated from version	V9.0
• PCS neo can be configured/ integrated from version	V3.0
• PROFINET from GSD version/ GSD revision	GSDML V2.3
Operating mode	
• DI	Yes
• Counter	Yes
• DQ	Yes
• DQ with energy-saving function	No
• PWM	No
• Oversampling	No
• MSI	No
• MSO	No
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Encoder supply	
Number of outputs	16
Short-circuit protection	Yes; per channel, electronic
Digital inputs	
Number of digital inputs	16
Digital inputs, parameterizable	Yes
Source/sink input	Yes; P-reading
Input characteristic curve in accordance with IEC 61131, type 1	Yes
Input characteristic curve in accordance with IEC 61131, type 2	No
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Pulse extension	Yes; off, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s
Time stamping	Yes; Resolution 10 ms
Time stamp (with precision of 1 ms)	Yes; Resolution 1ms
Digital input functions, parameterizable	
• Gate start/stop	Yes; Partner channel of n+8 counter
• Freely usable digital input	Yes; Parameterizable input filter
• Counter	Yes; Incl. frequency measurement
Input voltage	
• Rated value (DC)	24 V
• for signal "0"	-30 to +5 V
• for signal "1"	+11 to +30V
Input current	
• for signal "1", typ.	2.5 mA
Input delay (for rated value of input voltage) for standard inputs	
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)

Article number	6DL1133-6EW00-0PH1 ET 200SP HA, AI-DI16/DQ16X24VDC HART
Digital outputs	
Number of digital outputs	16
Current-sinking	No
Current-sourcing	Yes
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; Response threshold 0.7 A to 1.3 A
Open-circuit detection	Yes
Overload protection	Yes
Limitation of inductive shutdown voltage to	L+ -(37 to 41V)
Controlling a digital input	Yes
Switching capacity of the outputs	
• with resistive load, max.	0.5 A
• on lamp load, max.	5 W
Load resistance range	
• lower limit	48 Ω
• upper limit	12 kΩ
Output current	
• for signal "1" rated value	0.5 A
• for signal "0" residual current, max.	0.7 mA
Output delay with resistive load	
• "0" to "1", typ.	50 µs
• "1" to "0", typ.	100 µs
Parallel switching of two outputs	
• for uprating	No
• for redundant control of a load	Yes
Switching frequency	
• with resistive load, max.	100 Hz
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per channel, max.	0.5 A
• Current per module, max.	2 A
Analog inputs	
Number of analog inputs	16
permissible input current for current input (destruction limit), max.	30 mA
Input ranges	
• Current	Yes; 0 ... 10 mA, 0 ... 20 mA, 4 ... 20 mA, 4 ... 20 mA HART
Input ranges (rated values), currents	
• 0 to 10 mA	Yes
• 0 to 20 mA	Yes; 16 bit incl. sign
• 4 mA to 20 mA	Yes; 16 bit incl. sign
Analog value generation for the inputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit; Resolution with overrange (bit including sign), max. 16 bits, exception: 15 bits at 60 Hz interference suppression and 0 to 10 mA
• Integration time, parameterizable	Yes; channel by channel
Smoothing of measured values	
• parameterizable	Yes; none, weak, medium, strong, channel-by-channel

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA**Analog/digital module****Technical specifications**

Article number	6DL1133-6EW00-0PH1 ET 200SP HA, AI-DI16/DQ16X24VDC HART
Encoder	
Connection of signal encoders	
• for current measurement as 2-wire transducer	Yes
Connectable encoders	
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Current, relative to input range, (+/-)	0.1 %
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
• Maintenance interrupt	Yes
• Limit value alarm	Yes; two upper and two lower limit values in each case
• Hardware interrupt	Yes; Parameterizable, channels 0 to 15, rising/falling edge
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; channel by channel
• Short-circuit to M	Yes; Encoder supply to M, channel by channel
• Group error	Yes
• Overflow/underflow	Yes; channel by channel
Diagnostics indication LED	
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	No
• for channel diagnostics	No
• for module diagnostics	Yes; green/red DIAG LED

Article number	6DL1133-6EW00-0PH1 ET 200SP HA, AI-DI16/DQ16X24VDC HART
Integrated Functions	
Frequency measurement	Yes
• Number of frequency meters	8
Counting functions	
• Continuous counting	Yes
• Counter response parameterizable	Yes
• Hardware gate via digital input	Yes; Via partner channel (digital input n+8)
• Software gate	Yes
Measuring functions	
• Dynamic measurement period adjustment	Yes
Measuring range	
- Frequency measurement, min.	0.1 Hz
- Frequency measurement, max.	5 kHz
Accuracy	
- Frequency measurement	100 ppm; depending on measuring interval and signal evaluation
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C; Observe derating
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C; Observe derating
Dimensions	
Width	22.5 mm
Height	115 mm
Depth	138 mm
Weights	
Weight, approx.	150 g

Overview

ET 200SP HA Fast Multi IO & Counter

- Analog/digital module, input/output, counter, speed measurement
- 8 analog outputs (up to 800 Hz)
Measuring range: 4x 0/4-20 mA, ± 20 mA, ± 50 mA and 4x ± 10 V
- 4 analog inputs
Measuring ranges: 0/4-20 mA, ± 20 mA, ± 30 mA, ± 10 V, 0-20 V, -20-0 V
- Sensor supply: ± 50 mA via digital output
- 4 digital inputs 24 V
- 3 counters up to 70 kHz
Counter functions: up/down, once/periodic, gate control, 32-bit
- 6 combined digital inputs and outputs (DI/DQ)

ET 200SP HA vibration protection

- Analog/digital module, input/output, vibration protection
- Vibration protection for rotating machinery (e.g. drives, compressors, gears, fans)
- 4 analog inputs (up to 50 kHz signal frequency)
Measuring ranges: 0/4-20 mA, ± 20 mA, ± 30 mA, ± 10 V, 0-20 V, -20-0 V
Suitable for electrodynamic and piezoelectric vibration sensors
- Sensor supply: ± 50 mA
- Integrated signal processing:
10 configurable function sequences for calculation of vibration-specific performance characteristics (simultaneous use 8 function sequences per module)
- 4 analog inputs
Measuring ranges: 0/4-20 mA, ± 20 mA, ± 30 mA, ± 10 V, 0-20 V, -20-0 V
- 8 analog outputs (up to 800 Hz)
Measuring range: 4x 0/4-20 mA, ± 20 mA, ± 50 mA and 4x ± 10 V
- Sensor supply: ± 50 mA via digital output
- 4 digital inputs 24 V
- 6 combined digital inputs and outputs (DI/DQ)

Ordering data**Article No.**

**ET 200SP HA
TM Fast Multi IO & Counter**
4xAI, 8xAQ, 4xDI, 6xDI/DQ
Color code CC00,
terminal block type H1 and M1

6DL1138-6EA00-0EH1

ET 200SP HA vibration protection
4xAI, 8xAQ, 4xDI, 6xDI/DQ
Color code CC00,
terminal block type H1 and M1

6DL1138-6EC00-0EH1

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Technology modules**Technical specifications**

Article number	6DL1138-6EA00-0EH1 ET 200SP HA FIO & Counter	6DL1138-6EC00-0EH1 ET200SP HA Vibration Protection
General information		
Product type designation	Fast Multi IO & Counter	Vibration protection module 4 channels
Product function		
• Isochronous mode	No	No
Engineering with		
• SPPA-T3000 can be configured/ integrated from version	V8.2 SP2	V8.2 SP2
Operating mode		
• DI	Yes	Yes
• Counter	Yes	Yes
• DQ	Yes	Yes
Supply voltage		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes	Yes
Encoder supply		
Number of outputs	6; max. depending on parameterization	6; max. depending on parameterization
Short-circuit protection	Yes; per channel, electronic	Yes; per channel, electronic
Digital inputs		
Number of digital inputs	10; Of these, 6 combined DI/DQ	10; Of these, 6 combined DI/DQ
Digital inputs, parameterizable	Yes	Yes
Source/sink input	Yes; DI0 ... DI3 (param.); sinking DIDQ4 ... DIDQ9	Yes; DI0 ... DI3 (param.); sinking DIDQ4 ... DIDQ9
Input characteristic curve in accordance with IEC 61131, type 1	Yes	Yes
Pulse extension	Yes	Yes
• Length	2 s; off, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s	2 s; off, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s
Digital input functions, parameterizable		
• Gate start/stop	Yes; Selectable: Standard DI, encoder signals A, B, N, gate start, gate stop, set counter	
• Freely usable digital input	Yes	
• Counter	Yes	
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal "0"	0 ... 5 V	0 ... 5 V
• for signal "1"	+11 to +30V	+11 to +30V
Input current		
• for signal "1", typ.	2.6 mA; 2.6 mA DI, 3.5 mA DIDQ	2.6 mA; 2.6 mA DI, 3.5 mA DIDQ
Input delay (for rated value of input voltage) for standard inputs		
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)
for technological functions		
- parameterizable	Yes; Adjustable filter: 5 µs, 25 µs	
Digital outputs		
Number of digital outputs	6; max. depending on parameterization	6; max. depending on parameterization
Current-sinking	No	No
Current-sourcing	Yes	Yes
Digital outputs, parameterizable	Yes	Yes
Short-circuit protection	Yes	Yes
Open-circuit detection	Yes	Yes
Overload protection	Yes	Yes
Limitation of inductive shutdown voltage to	L+ -(37 to 41V)	L+ -(37 to 41V)
Controlling a digital input	Yes	Yes

Technical specifications

Article number	6DL1138-6EA00-0EH1 ET 200SP HA FIO & Counter	6DL1138-6EC00-0EH1 ET200SP HA Vibration Protection
Digital output functions, parameterizable		
• Switching tripped by comparison values	Yes; As output signal of a high-speed counter	
• Freely usable digital output	Yes	Yes
Switching capacity of the outputs		
• with resistive load, max.	0.5 A	0.5 A
Load resistance range		
• lower limit	48 Ω	48 Ω
Output voltage		
• for signal "1", min.	18.1 V	18.1 V
Output current		
• for signal "1" rated value	0.5 A	0.5 A
Output delay with resistive load		
• "0" to "1", typ.	1 ms	1 ms
• "1" to "0", typ.	100 μs	100 μs
Parallel switching of two outputs		
• for logic links	No	
• for uprating	No	
• for redundant control of a load	Yes	
Switching frequency		
• with resistive load, max.	800 Hz	800 Hz
Total current of the outputs		
• Current per channel, max.	0.5 A	0.5 A
• Current per module, max.	2 A	2 A
Analog inputs		
Number of analog inputs	4	4
permissible input voltage for voltage input (destruction limit), max.	30 V	30 V
permissible input current for current input (destruction limit), max.	50 mA; Protection available against destruction	50 mA; Protection available against destruction
Cycle time (all channels), min.		1.25 ms; For up to 128 samples per channel
Input ranges		
• Voltage	Yes; 0 ... 10 V, -10 ... 10 V, 0 ... 20 V, -20 ... 0 V	Yes; 0 ... 10 V, -10 ... 10 V, 0 ... 20 V, -20 ... 0 V
• Current	Yes; 0 ... 20 mA, 4 ... 20 mA, -20 ... 20 mA, -30 ... 30 mA, -20 ... 0 mA	Yes; 0 ... 20 mA, 4 ... 20 mA, -20 ... 20 mA, -30 ... 30 mA, -20 ... 0 mA
Input ranges (rated values), voltages		
• 0 to +10 V	Yes	Yes
• -10 V to +10 V	Yes	Yes
Input ranges (rated values), currents		
• 0 to 20 mA	Yes; 0 mA or 4 mA to 20 mA	Yes; 0 mA or 4 mA to 20 mA
• -20 mA to +20 mA	Yes	Yes
• 4 mA to 20 mA	Yes; and 0 to 20 mA	Yes; and 0 to 20 mA
Cable length		
• shielded, max.	600 m	600 m
Analog outputs		
Number of analog outputs	8; 4 AQ-I, 4 AQ-U	8; 4 AQ-I, 4 AQ-U
Cycle time (all channels), min.		625 μs
Current signal at analog output	Yes; -50 ... 50 mA	Yes; -50 ... 50 mA
Output ranges, voltage		
• -10 V to +10 V	Yes	Yes
Output ranges, current		
• 0 to 20 mA	Yes	Yes
• -20 mA to +20 mA	Yes; ±30 mA, ±50 mA	Yes; ±30 mA, ±50 mA
• 4 mA to 20 mA	Yes	Yes

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Technology modules**Technical specifications**


Article number	6DL1138-6EA00-0EH1 ET 200SP HA FIO & Counter	6DL1138-6EC00-0EH1 ET200SP HA Vibration Protection
Connection of actuators • for voltage output two-wire connection	Yes	Yes
Load impedance (in rated range of output) • with current outputs, max.	330 Ω; 150 ohms at ±50 mA	330 Ω; 150 ohms at ±50 mA
Analog value generation for the inputs Integration and conversion time/resolution per channel • Resolution with overrange (bit including sign), max.	24 bit	24 bit
Smoothing of measured values • parameterizable	Yes	Yes
Analog value generation for the outputs Integration and conversion time/resolution per channel • Resolution with overrange (bit including sign), max.	16 bit	16 bit
Encoder Connection of signal encoders • for voltage measurement • for current measurement as 2-wire transducer • for current measurement as 4-wire transducer	Yes Yes Yes	Yes Yes Yes
Connectable encoders • Single contact / changeover contact unconnected • 2-wire sensor - permissible quiescent current (2-wire sensor), max.	Yes Yes 1.5 mA	Yes Yes 1.5 mA
Interrupts/diagnostics/status information Diagnostics function Substitute values connectable	Yes Yes	Yes Yes
Alarms • Diagnostic alarm	Yes	Yes
Diagnoses • Monitoring the supply voltage • Wire-break • Short-circuit to M • Short-circuit to L+ • Group error • Overflow/underflow	Yes Yes; AI 4 ... 20 mA, AQ, DQ, DI 0 ... 3 Yes; Encoder supply to M, channel by channel Yes; Analog inputs Yes Yes	Yes Yes; AI 4 ... 20 mA, AQ, DQ, DI 0 ... 3 Yes; Encoder supply to M, channel by channel Yes; Analog inputs Yes Yes
Diagnostics indication LED • RUN LED • MAINT LED • Monitoring of the supply voltage (PWR-LED) • for module diagnostics	Yes; green LED Yes; Yellow LED Yes; green PWR LED Yes; green/red DIAG LED	Yes; green LED Yes; Yellow LED Yes; green PWR LED Yes; green/red DIAG LED

Technical specifications

Article number	6DL1138-6EA00-0EH1 ET 200SP HA FIO & Counter	6DL1138-6EC00-0EH1 ET200SP HA Vibration Protection
Integrated Functions		
Frequency measurement	Yes; Speed measurement	
Counting functions		
• Continuous counting	Yes	
• Counter response parameterizable	Yes	
• Hardware gate via digital input	Yes	
• Software gate	Yes	
Measuring functions		
• Dynamic measurement period adjustment	Yes; Speed measurement	
Measuring range		
- Frequency measurement, min.	0.1 Hz	
- Frequency measurement, max.	70 kHz; 70 kHz for DI; 7 kHz for DI/DQ; each for P/M encoder and 50 m cable length; 10 kHz for DI; 0.7 kHz for DI/DQ; each for P encoder and 50 m cable length	
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-40 °C	-40 °C
• horizontal installation, max.	70 °C; Observe derating	70 °C; Observe derating
• vertical installation, min.	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	3 500 m	3 500 m
Dimensions		
Width	22.5 mm	22.5 mm
Height	115 mm	115 mm
Depth	138 mm	138 mm
Weights		
Weight, approx.	200 g	200 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

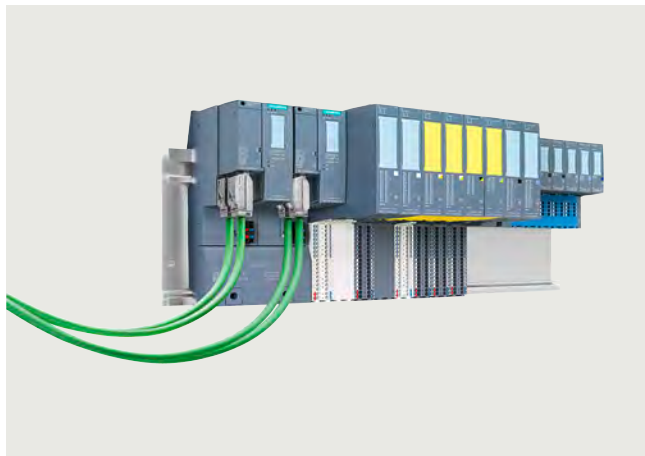Fail-safe I/O-modules**Overview**

Fail-safe I/O modules permit safety-oriented monitoring and thus, when required, bringing the plant to the defined safe state. The communication and integration into the process control system is enabled with the proven technology SIMATIC Safety Integrated. The fail-safe I/O modules for DI, DQ and AI correspond to the size of the standard modules and are certified by the German Technical Inspectorate up to SIL 3 per channel. All fail-safe I/O modules can be set up in redundant configuration guaranteeing not only fail-safe operation but also highest availability. SIMATIC ET 200SP HA is perfectly adapted for demanding fail-safe and standard applications in the manufacturing and process industries when high availability and PROFINET R1 redundancy are imperative.

- <https://www.siemens.com/process-safety>

Ordering data**Article No.****F-DI 16x24VDC HA digital input module**

16 digital inputs 24 V DC, color code CC01, for terminal block type H1 and M1, channel diagnostics

6DL1136-6BA00-0PH1

F-DQ 10x24VDC/2A HA digital output module

10 digital outputs 24 V DC, 2 A, color code CC01, for terminal block type H1 and M1, channel diagnostics

6DL1136-6DA00-0PH1

F-AI 8x1 2-/4-wire HART HA analog input module

8 digital inputs, color code CC00, for terminal block type H1 and F1, channel diagnostics

6DL1136-6AA00-0PH1

Note:

The use of fail-safe modules requires SIMATIC S7 F systems.

Overview



ET200SP_Ex_IO_withPM

The intrinsically safe ET 200SP HA Ex I/O modules extend the SIMATIC ET 200SP HA and SIMATIC ET 200SP distributed I/O systems with the option of integrating devices located in hazardous areas (intrinsically safe sensors, actuators and HART field devices) into the system.

The ET 200SP HA Ex I/O modules with device protection according to intrinsic safety "i" offer channel outputs in Zone 0 or 1. 2-channel HART analog input and output modules and 2/4-channel digital input and output modules with different characteristic curves as well as a power module for intrinsically safe power supply of the modules.

Separate Ex isolators with correspondingly complex wiring and high space requirements are no longer required. The I/O modules can be installed up to ATEX Zone 2 and offer intrinsically safe circuits in Ex ia design for field devices up to Zone 0.

The Ex modules offer channel diagnostics and Configuration in Run and are approved for ambient temperatures from -40 to +70 °C.

Ordering data

Article No.

Ex digital modules SIMATIC ET 200SP HA	
Digital Ex-i input module, Ex-DI 4xNAMUR	6DL1131-6TD00-0HX1
Suitable for BaseUnit Type X1, channel diagnostics	
Digital Ex-i output module, Ex-DQ 2x23,1VDC/20 mA	6DL1132-6EB00-0HX1
Suitable for BaseUnit Type X1, channel diagnostics	
Digital Ex-i output module, Ex-DQ 2x17,4VDC/27 mA	6DL1132-6CB00-0HX1
Suitable for BaseUnit Type X1, channel diagnostics	
Ex analog modules SIMATIC ET 200SP HA	
Analog Ex-i HART input module, Ex-AI 2xI 2-wire HART	6DL1134-6TB00-0HX1
Suitable for BaseUnit Type X1, channel diagnostics, 16 bits, +/-0.3%	
Analog Ex-i input module, Ex-AI 4xTC/2xRTD 2-/3-/4-wire	6DL1134-6JD00-0HX1
Suitable for BaseUnit Type X1, channel diagnostics, 16 bits, +/-0.05%	
Analog Ex-i HART output module, Ex-AQ 2xI HART HF	6DL1135-6TB00-0HX1
Suitable for BaseUnit Type X1, channel diagnostics, 16 bits, +/-0.3%	
Power module and BaseUnits	
Power module Ex-PM E	6DL1133-6PX00-0HW0
24 V 0.8 A, W x H: 50 mm x 117 mm, suitable for BaseUnit Type W0	
BU Type X1 for I/O modules	6DL1193-6BP00-0BX1
Push-in terminals, W x H: 20 mm x 117 mm	
BU Type W0 for Ex power module PM-E	6DL1193-6BP00-0DW0
W x H: 50 mm x 117 mm	

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Ex I/O modules

Technical specifications

Article number	6DL1131-6TD00-0HX1 ET 200SP HA, EX-DI 4xNAMUR
General information	
Product type designation	Ex-DI 4xNAMUR
Product function	
• Isochronous mode	No
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	V16
• PCS 7 configurable/ integrated from version	V9.1
• PCS neo can be configured/ integrated from version	V3.1
• PROFINET from GSD version/ GSD revision	GSDML V2.35
Operating mode	
• DI	Yes
• Counter	Yes
• MSI	Yes
Encoder supply	
Number of outputs	4
Short-circuit protection	Yes
Digital inputs	
Number of digital inputs	4; NAMUR
Digital inputs, parameterizable	Yes
Pulse extension	Yes; 0.5 s, 1 s, 2 s
Time stamping	No
Edge evaluation	Yes; Positive edge, negative edge
Signal change flutter	Yes; 2 to 32 signal changes
Flutter observation window	Yes; 0.5 s, 1 s to 100 s in 1-s steps
Input voltage	
• Rated value (DC)	8.2 V
Input current	
for NAMUR encoders	
- for signal "0", min.	0.35 mA
- for signal "0", max.	1.2 mA
- for signal "1", min.	2.1 mA
- for signal "1", max.	6.4 mA
Input delay (for rated value of input voltage)	
for NAMUR inputs	
- at "0" to "1", max.	12 ms
- at "1" to "0", max.	12 ms
Encoder	
Connectable encoders	
• NAMUR encoder/changeover contact according to EN 60947	Yes
• Single contact / changeover contact unconnected	Yes
• Single contact / changeover contact connected with 10 kΩ	Yes
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
• Maintenance interrupt	Yes
• Hardware interrupt	Yes; channel by channel

Article number	6DL1131-6TD00-0HX1 ET 200SP HA, EX-DI 4xNAMUR
Diagnoses	
• Diagnostic information readable	Yes
• Monitoring the supply voltage	Yes
- parameterizable	Yes
• Monitoring of encoder power supply	Yes
• Wire-break	Yes; channel by channel
• Short-circuit	Yes; channel by channel
• Group error	Yes
Diagnostics indication LED	
• MAINT LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED
Integrated Functions	
Measuring functions	
Accuracy	
- Frequency measurement	1 %
Ex(i) characteristics	
maximum values for connecting terminals for gas group IIC	
• U _o (no-load voltage), max.	9.6 V
• I _o (short-circuit current), max.	61 mA; applies for up to four circuits connected in parallel
• P _o (power output), max.	145 mW; applies for up to four circuits connected in parallel
• C _o (permissible external capacity), max.	3.6 μF; applies for up to four circuits connected in parallel
• L _o (permissible external inductivity), max.	13 mH; applies for up to four circuits connected in parallel
• U _m (voltage at non-intrinsically safe connecting terminals), max.	60 V
Potential separation	
Potential separation channels	
• between the channels and backplane bus	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C
• horizontal installation, max.	70 °C
• vertical installation, min.	-40 °C
• vertical installation, max.	60 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
Dimensions	
Width	20 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	55 g

Technical specifications

Article number	6DL1134-6TB00-0HX1 ET 200SP HA, EX-AI 2xI 2-WIRE HART	6DL1134-6JD00-0HX1 ET 200SP HA, EX-AI 4xTC/2xRTD 2-/3-/4-W
General information		
Product type designation	Ex-AI 2xI 2-wire HART	Ex-AI 4xTC/2xRTD 2-/3-/4-wire
Product function		
• Isochronous mode	No	No
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	V16	V16
• PCS 7 configurable/ integrated from version	V9.1	V9.1
• PCS neo can be configured/ integrated from version	V3.1	V3.1
• PROFINET from GSD version/ GSD revision	GSDML V2.35	GSDML V2.35
Operating mode		
• MSI	Yes	Yes
Analog inputs		
Number of analog inputs	2; Differential inputs	
• For current measurement	2	
• For voltage measurement		4
• For resistance/resistance thermometer measurement		2
• For thermocouple measurement		4
Constant measurement current for resistance-type transmitter, typ.		0.5 mA
Cycle time (all channels), min.	3 ms	
Technical unit for temperature measurement adjustable		Yes; °C/°F/K
Input ranges (rated values), voltages		
• -1 V to +1 V		Yes; 16 bit incl. sign
• -250 mV to +250 mV		Yes; 16 bit incl. sign
• -50 mV to +50 mV		Yes; 16 bit incl. sign
• -80 mV to +80 mV		Yes; 16 bit incl. sign
Input ranges (rated values), currents		
• 0 to 20 mA	Yes	
• 4 mA to 20 mA	Yes; 15 bit + sign	
Input ranges (rated values), thermocouples		
• Type B		Yes; 16 bit incl. sign
• Type C		Yes; 16 bit incl. sign
• Type E		Yes; 16 bit incl. sign
• Type J		Yes; 16 bit incl. sign
• Type K		Yes; 16 bit incl. sign
• Type L		Yes; 16 bit incl. sign
• Type N		Yes; 16 bit incl. sign
• Type R		Yes; 16 bit incl. sign
• Type S		Yes; 16 bit incl. sign
• Type T		Yes; 16 bit incl. sign
• Type U		Yes; 16 bit incl. sign
• Type TXK/TXK(L) to GOST		Yes; 16 bit incl. sign
Input ranges (rated values), resistance thermometer		
• Cu 10		Yes; 16 bit incl. sign
• Ni 100		Yes; 16 bit incl. sign
• LG-Ni 1000		Yes; 16 bit incl. sign
• Ni 120		Yes; 16 bit incl. sign
• Ni 200		Yes; 16 bit incl. sign
• Ni 500		Yes; 16 bit incl. sign
• Pt 100		Yes; 16 bit incl. sign
• Pt 1000		Yes; 16 bit incl. sign
• Pt 200		Yes; 16 bit incl. sign
• Pt 500		Yes; 16 bit incl. sign

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Ex I/O modules**Technical specifications**

Article number	6DL1134-6TB00-0HX1 ET 200SP HA, EX-AI 2xI 2-WIRE HART	6DL1134-6JD00-0HX1 ET 200SP HA, EX-AI 4xTC/2xRTD 2-/3-/4-W
Input ranges (rated values), resistors		
<ul style="list-style-type: none"> • 0 to 150 ohms • 0 to 300 ohms • 0 to 600 ohms • 0 to 3000 ohms • 0 to 6000 ohms • PTC 		Yes; 15 bit Yes; 15 bit Yes; 15 bit Yes; 15 bit Yes; 15 bit Yes; 15 bit
Thermocouple (TC)		
Temperature compensation - parameterizable		Yes
Cable length		
<ul style="list-style-type: none"> • shielded, max. 	500 m; Ex characteristic values must be observed	200 m; Ex characteristic values must be observed; line resistance at RTD (simple) max. 25 ohm; loop resistance at TC max. 8 kOhm
<ul style="list-style-type: none"> • unshielded, max. 	300 m; Ex characteristic values must be observed	
Analog value generation for the inputs		
Integration and conversion time/resolution per channel		
<ul style="list-style-type: none"> • Resolution with overrange (bit including sign), max. • Integration time, parameterizable 	16 bit Yes; channel by channel	16 bit Yes; Channel-by-channel, results from the selected interference frequency suppression
<ul style="list-style-type: none"> • Interference voltage suppression for interference frequency f1 in Hz • Conversion time (per channel) 	10 / 50 / 60 Hz	16.6 / 50 / 60 Hz, channel-by-channel 180 / 60 / 50 ms, results from the selected interference frequency suppression
Smoothing of measured values		
<ul style="list-style-type: none"> • Number of smoothing levels • parameterizable 	4; None; 4/8/16 times Yes	Yes; none, weak, medium, strong, channel-by-channel
Encoder		
Connection of signal encoders		
<ul style="list-style-type: none"> • for current measurement as 2-wire transducer - Burden of 2-wire transmitter, max. 	Yes 750 Ω; At 20 mA input current	
Errors/accuracies		
Basic error limit (operational limit at 25 °C)		
<ul style="list-style-type: none"> • Voltage, relative to input range, (+/-) • Current, relative to input range, (+/-) • Resistance, relative to input range, (+/-) 	0.2 %	0.05 % 0.05 %
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, $f1 =$ interference frequency		
<ul style="list-style-type: none"> • Common mode voltage, max. • Common mode interference, min. 		60 V; Applicable for use in non-hazardous areas; no common mode voltage permissible in hazardous areas 90 dB
Protocols		
HART protocol	Yes	

Technical specifications

Article number	6DL1134-6TB00-0HX1 ET 200SP HA, EX-AI 2xI 2-WIRE HART	6DL1134-6JD00-0HX1 ET 200SP HA, EX-AI 4xTC/2xRTD 2-/3-/4-W
Interrupts/diagnostics/status information		
Diagnostics function	Yes	Yes
Alarms		
• Diagnostic alarm	Yes	Yes
• Limit value alarm	Yes	Yes; two upper and two lower limit values in each case
Diagnoses		
• Monitoring the supply voltage	Yes	Yes
• Wire-break	Yes; channel by channel	Yes; channel by channel
• Short-circuit	Yes; channel by channel	
• Group error	Yes	
• Overflow/underflow	Yes; channel by channel	Yes; channel by channel
Diagnostics indication LED		
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED	Yes; green PWR LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• for module diagnostics	Yes; green/red DIAG LED	Yes; green/red DIAG LED
Ex(i) characteristics		
maximum values for connecting terminals for gas group IIC		
• U _o (no-load voltage), max.	26 V	5.9 V
• I _o (short-circuit current), max.	93 mA	18 mA
• P _o (power output), max.	605 mW	27 mW
• C _o (permissible external capacity), max.	99 nF	43 µF
• L _o (permissible external inductivity), max.	4 mH	110 mH
• U _i (intrinsically safe input voltage), max.	10 V	
• U _m (voltage at non-intrinsically safe connecting terminals), max.	60 V	60 V
Potential separation		
Potential separation channels		
• between the channels and backplane bus	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• horizontal installation, min.	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	2 000 m	2 000 m
Dimensions		
Width	20 mm	20 mm
Height	73 mm	73 mm
Depth	58 mm	58 mm
Weights		
Weight, approx.	55 g	55 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Carrier modules

Overview

DIN rails

The DIN rail is required for fitting an ET 200SP HA station in the control cabinet. The IM carrier modules for interface modules, the carrier modules for the I/O modules and the server module are attached to the DIN rail.

The DIN rails are available in lengths of 482 mm (for installation in a 19-inch rack) and 1 500 mm (for maximum configuration and vertical installation in a cabinet).



IM single carrier module




IM redundant carrier module

IM carrier modules for interface modules

Two variants of the IM carrier modules for interface modules are available:

- IM single carrier module for 1 interface module, for single connection to PROFINET
- IM redundant carrier module for 2 interface modules, for redundant connection to PROFINET

The IM carrier modules connect the interface module to the backplane bus. They enable data exchange with the I/O modules.

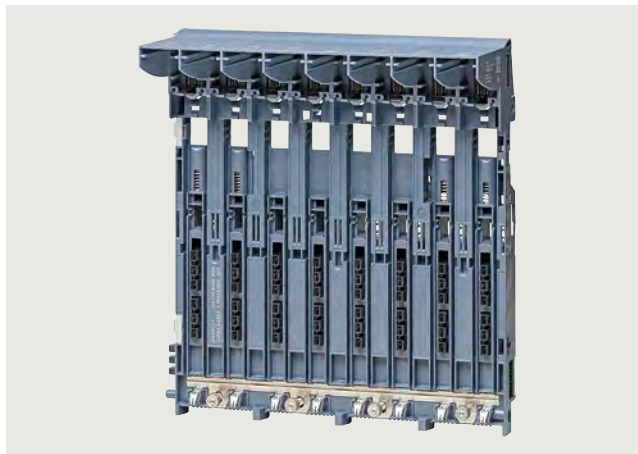

Carrier module for I/O modules, 8-slot



Carrier module for I/O modules, 2-slot

Carrier modules for I/O modules

The slots for the I/O modules are created by the connection of these carrier modules to the terminal blocks.

Carrier modules for I/O modules are available in the following variants:

- Carrier module, 2-slot, with 2 slots for I/O modules
- Carrier module, 8-slot, with 8 slots for I/O modules
- Carrier module, 8-slot, with 8 slots for I/O modules, without power bus function

Overview



ET 200SP HA, server module

Server module

Server module and power bus cover complete the design of the ET 200SP HA. A server module and a power bus cover are supplied with each IM carrier module for the interface module.

Ordering data

Article No.

Ordering data	Article No.
DIN rails for ET 200SP HA	
482 mm (approx. 19 inch) DIN rail Including grounding screw and integrated DIN rail for fitting small components such as clamps, miniature circuit-breakers and relays	6DL1193-6MC00-0AA0
1 500 mm (approx. 59 inch) DIN rail Including grounding screw and integrated DIN rail for fitting small components such as clamps, miniature circuit-breakers and relays	6DL1193-6MD00-0AA0
Grounding screw For connecting PE to the DIN rail; essential for 1 500 mm DIN rail 20 units per packing unit	6ES7590-5AA00-0AA0
IM carrier modules for interface modules Note: A server module and a power bus cover are supplied with each IM carrier module for the interface module.	
IM single carrier module Rack for 1 SIMATIC ET 200SP HA interface module for single connection to PROFINET	6DL1193-6BH00-0SM0
IM redundant carrier module Rack for 2 SIMATIC ET 200SP HA interface modules for redundant connection to PROFINET	6DL1193-6BH00-0RM0
Carrier modules for I/O modules	
Carrier module, 2-slot Rack for 2 SIMATIC ET 200SP HA I/O modules	6DL1193-6GA00-0NN0
Carrier module 8-slot Rack for 8 SIMATIC ET 200SP HA I/O modules	6DL1193-6GC00-0NN0
Carrier module 8-slot Carrier without Power Bus, can only be operated with light-gray or black terminal blocks, for holding 8 I/O modules of the SIMATIC ET 200SP HA	6DL1193-6GC00-8NN0
Spare parts	
Server module (spare part) for ET 200SP HA	6DL1193-6PA00-0AA0

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Carrier modules**Technical specifications**

Article number	6DL1193-6GA00-0NNO CARRIER MODULE TWOFOLD	6DL1193-6GC00-0NNO CARRIER MODULE EIGHTFOLD	6DL1193-6GC00-8NNO CARRIER MODULE EIGHTFOLD w/o PB
General information			
Product type designation	Carrier module 2 times	Carrier module 8 times	carrier module 8x without power bus
Product function			
• I&M data	Yes; Asset data	Yes; Asset data	Yes; Asset data
Hardware configuration			
Slots			
• Number of slots	2	8	8; for light gray and black terminal blocks
Ambient conditions			
Ambient temperature during operation			
• horizontal installation, min.	-40 °C	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C	60 °C
Dimensions			
Width	52.5 mm; 45 mm when installed	187.5 mm; 180 mm when installed	187.5 mm; 180 mm when installed
Height	203 mm	203 mm	203 mm
Depth	79 mm	79 mm	79 mm
Weights			
Weight, approx.	111 g	450 g	270 g






Overview

The slots for the I/O modules are created by connecting carrier modules and terminal blocks. The terminal blocks contain the process terminals for connecting sensors, actuators and other devices.

Select the terminal block for the slot of an I/O module based on the following dependencies:

The following table illustrates the terminal block / I/O module assignment (x = standard):

I/O modules in 24 V range (with push-in terminal blocks)

I/O module	TB type H1	TB type M1 (IO-RED)	TB type F1 (F-AI IO-RED)	TB type P0 (32x L+)	TB type N0 (32x M)
DI 16x24V	x	x			x ^{c)}
DI 32x24V	x ^{a)}			x	
DI 16xNAMUR	x	x			x ^{c)}
DQ 16x24V / 0.5A	x	x			x ^{c)}
DQ 32x24V / 0.5A	x ^{b)}				x
DI-AI 16x / DQ 16x HART	x	x			x ^{c)}
AI 16xI HART	x	x			x ^{c)}
AI 16xTC 8xRTD	x	x			
AQ 8xI HART	x	x			x ^{c)}
F-DI 16x24V	x	x			x ^{c)}
F-DQ 10x24V / 2A	x	x			x ^{c)}
F-AI 8xI HART	x		x		x ^{c)}
					
Power bus infeed	Light gray	Light gray		Light gray	Light gray
Power bus continuer	Dark gray	Dark gray		Dark gray	Dark gray
No power bus			Black		

a) Encoder supply must be realized separately




b) Ground points must be realized separately

c) Offers 32 additional ground points for field connection

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Terminal blocks**Overview****I/O modules in 24 V range (with D-sub terminal blocks)**

I/O module	TB type H0 (D-sub)	TB type M0 (D-sub, IO-RED)	TB type F0 (D-sub, F-AI, IO-RED)
DI 16x24V	x	x	
DI 32x24V	x ^{a)}		
DI 16xNAMUR	x	x	
DQ 16x24V / 0.5A	x	x	
DQ 32x24V / 0.5A	x ^{b)}		
DI-AI 16x / DQ 16x HART	x	x	
AI 16xI HART	x	x	
AI 16xTC 8xRTD	x ^{c)}	x ^{c)}	
AQ 8xI HART	x	x	
F-DI 16x24V	x	x	
F-DQ 10x24V / 2A	x	x	
F-AI 8xI HART	x		x
			
Power bus infeed			
Power bus continuer			
No power bus	Black	Black	Black





a) Encoder supply must be realized separately

b) Ground points must be realized separately

c) No temperature compensation for TC

Overview

I/O modules with voltages >24 V (with push-in terminal blocks)**I/O modules with channel-selective isolation (with push-in and D-sub terminal blocks)**

I/O module	TB type K0 (ISOL)	TB type L0 (ISOL, IO-RED)	TB type S0 (D-sub, ISOL)	TB type R0 (D-sub, ISOL, IO-RED)
DI 8x24 ... 125V DC	x			
DI 8x230VAC	x			
RQ 4x120-230V / 5A CO	x			
AI 4xI HART ISOL	x	x	x	x
AQ 4xI HART ISOL	x	x	x	x
				
Power bus infeed	Light gray	Light gray		
Power bus continuer	Dark gray			
No power bus			Black	Black

Potential groups/color type of the terminal blocks

To help you distinguish between potential groups on an ET 200SP HA station, the terminal blocks come in different colors:

- Light gray terminal blocks are for feeding in and start a new potential group.
- Dark gray terminal blocks forms a contact with the supply voltage of the terminal block to its left, thus extending the potential group.
- Black terminal blocks do not support any potential groups and must be fed in manually. Dark gray terminal blocks must not be inserted to the right of them.

Note the maximum permissible load current depending on the number of I/O modules:

Number of terminal blocks	Permissible load current in amperes
4	10 A
5	8 A
6	7 A
7	6 A
8	5 A
10	4 A
15	3 A
20	2 A

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Terminal blocks

Ordering data

Article No.

Terminal blocks 24 V DC (push-in)

Terminal block type H1 light gray For starting a new potential group, with 32 push-in terminals, width 22.5 mm, with temperature compensation	6DL1193-6TP00-0DH1
Terminal block type H1 dark gray For forwarding a potential group, with 32 push-in terminals, width 22.5 mm, with temperature compensation	6DL1193-6TP00-0BH1
Terminal block type M1 light gray For starting a new potential group, with 32 push-in terminals, width 45 mm, for redundant configurations, with temperature compensation	6DL1193-6TP00-0DM1
Terminal block type M1 dark gray For forwarding a potential group, with 32 push-in terminals, width 45 mm, for redundant configurations, with temperature compensation	6DL1193-6TP00-0BM1
Terminal block, type F1, F-AI, IO-RED 32 push-in terminals, width 45 mm, for redundant configuration with fail-safe analog module F-AI, no power bus	6DL1193-6TP00-0DF1
Terminal block type P0 light gray For starting a new potential group, with 32 push-in terminals, additional 32 push-in terminals with encoder supply, width 45 mm, specifically for use with DI 32x24 V DC (6DL1131-6BL00-0PH1)	6DL1193-6TP00-0DP0
Terminal block type P0 dark gray For forwarding a potential group, with 32 push-in terminals, additional 32 push-in terminals with encoder supply, width 45 mm, specifically for use with DI 32x24 V DC (6DL1131-6BL00-0PH1)	6DL1193-6TP00-0BP0
Terminal block type N0 light gray For starting a new potential group, with 32 push-in terminals, additional 32 push-in terminals for ground connection, width 45 mm, for use with DQ 32x 24 V DC (6DL1132-6BL00-0PH1) and other modules	6DL1193-6TP00-0DN0
Terminal block type N0 dark gray For forwarding a new potential group, with 32 push-in terminals, additional 32 push-in terminals for ground connection, width 45 mm, for use with DQ 32x 24 V DC (6DL1132-6BL00-0PH1) and other modules	6DL1193-6TP00-0BN0

Article No.

Terminal blocks 24 V DC (D-sub)

Terminal block, type H0, D-sub D-sub plug 37-pin, 24 V infeed per TB, width 22.5 mm, no power bus	6DL1193-6TC00-0DH0
Terminal block, type M0, D-sub, IO-RED D-sub plug 37-pin, 2 slots for I/O redundancy, 24 V infeed per slot, width 45 mm	6DL1193-6TC00-0DM0
Terminal block, type F0, D-sub, F-AI, IO-RED D-sub plug 37-pin, for fail-safe analog input, 2 slots for I/O redundancy, 24 V infeed per slot, width 45 mm	6DL1193-6TC00-0DF0
Terminal block, type S0, D-sub, ISOL D-sub plug 37-pin, 24 V infeed per TB, width 22.5 mm	6DL1193-6TC00-0DS0
Terminal block, type R0, D-sub, ISOL, IO-RED D-sub plug 37-pin, 2 slots for I/O redundancy, 24 V infeed per slot, width 45 mm	6DL1193-6TC00-0DR0

Terminal blocks insulated (24 V DC / 125 V DC / 230 V AC)

Terminal block type K0 light gray For starting a new potential group, with 16 push-in terminals, width 22.5 mm	6DL1193-6TP00-0DK0
Terminal block type K0 dark gray For forwarding a potential group, with 16 push-in terminals, width 22.5 mm	6DL1193-6TP00-0BK0
Terminal block type L0 light gray For starting a new potential group, with 16 push-in terminals, width 45 mm	6DL1193-6TP00-0DL0

Accessories

Shield connection for terminal block 5 shield supports including support foot and shield terminals each for plugging onto BaseUnits with automatic low-impedance connection to functional grounding	6ES7193-6SC20-1AM0
---	--------------------

Technical specifications

Article number	6DL1193-6TC00-0DH0 TERMINAL BLOCK, TYPE H0, D-SUB	6DL1193-6TC00-0DM0 TERMINALBLOCK, TYPE M0, D-SUB, IO-RED	6DL1193-6TC00-0DF0 TERMINALBLOCK, TYPE F0, D-SUB, F-AI, RED	6DL1193-6TC00-0DS0 TERMINALBLOCK, TYPE S0, D-SUB, ISOL	6DL1193-6TC00-0DR0 TERMINALBLOCK, TYPE R0, D-SUB, ISOL, RED
General information					
Product type designation	type H0, SUB-D	type M0, D-SUB, IO-RED		type S0, D-SUB, ISOL	type R0, D-SUB, ISOL, IO-RED
Product function					
• I&M data	Yes; Asset data	Yes; Asset data	Yes; Asset data	Yes; Asset data	Yes; Asset data
Hardware configuration					
Slots					
• Number of slots	1	2; For IO redundancy	2; For IO redundancy	1	2; For IO redundancy
Ambient conditions					
Ambient temperature during operation					
• horizontal installation, min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• horizontal installation, max.	70 °C	70 °C	70 °C	70 °C	70 °C
• vertical installation, min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• vertical installation, max.	60 °C	60 °C	60 °C	60 °C	60 °C
Dimensions					
Width	22.5 mm	45 mm	45 mm	22.5 mm	45 mm
Height	175 mm	175 mm	175 mm	175 mm	175 mm
Depth	77 mm	77 mm	77 mm	77 mm	77 mm
Weights					
Weight, approx.	92 g	158 g	156 g	92 g	158 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

BusAdapters

Overview



BA 2xRJ45, 2xFC and 2xLC BusAdapters

BusAdapters

A BusAdapter as a separate component allows a free choice of connection technology:

- BA 2xRJ45: 2 electrical connections for bus cable with standard RJ45 connector
- BA 2xFC: 2 electrical connections for direct connection of FastConnect bus cable
- BA 2xLC: 2 optical ports for fiber-optic cables
- BA LC/RJ45: 1 optical connection and 1 electrical connection for bus cable with standard RJ45 connector
- BA LC/FC: 1 optical connection and 1 electrical connection for direct connection of FastConnect bus cable
- BA 2xRJ45 (VD): 2 electrical connections for using PROFINET via existing PROFIBUS cables

Ordering data

Article No.

BusAdapters	Article No.
2xRJ45 BusAdapter 2 × RJ45 sockets for PROFINET (standard Ethernet socket)	6DL1193-6AR00-0AA0
2xFC BusAdapter 2 × FastConnect (FC) connections for PROFINET	6DL1193-6AF00-0AA0
2xLC BusAdapter 2 × glass fiber-optic connections for PROFINET	6DL1193-6AG00-0AA0
BA LC/RJ45 BusAdapter 2 × glass fiber-optic connections	6DL1193-6AG20-0AA0
BA LC/FC BusAdapter 2 × glass fiber-optic connections	6DL1193-6AG40-0AA0
BA 2xRJ45 (VD) BusAdapter 2 × electrical connections for Ethernet communication via 2-, 4- or 8-wire copper cables and distances up to 500 m	6GK5991-2VA00-8AA2

Technical specifications

Article number	6DL1193-6AR00-0AA0 ET 200SP HA, BUSADAPTER BA 2XRJ45	6DL1193-6AF00-0AA0 ET 200SP HA, BUSADAPTER BA 2XFC	6DL1193-6AG00-0AA0 ET 200SP HA, BUSADAPTER BA 2XLC
General information			
Product type designation	BA 2x RJ45	BA 2xFC	BA 2xLC
Interfaces			
Number of PROFINET interfaces	1; 2 ports (switch) RJ45	1; 2 ports (switch) FC	1; 2 ports (switch) LC Multimode Glass Fibre
Supports protocol for PROFINET IO			
• Number of RJ45 ports	2		
• Number of FC (FastConnect) connections		2	
• Number of LC ports			2
Cable length			
- Cu conductors	100 m	100 m	
- Multimode graded-index fiber 50/125 µm			3 km; min. transmit power -23.5 dB, min. receiver sensitivity -31 dB
- Multimode graded-index fiber 62.5/125 µm			3 km; min. transmit power -20 dB, min. receiver sensitivity -31 dB
Ambient conditions			
Ambient temperature during operation			
• min.	-40 °C	-40 °C	-40 °C
• max.	70 °C	70 °C	65 °C; redundant design (2x 6DL1155-6AU00-0PM0): max. 60 °C horizontal, max. 50 °C vertical. When using different I/O devices, the derating specified there must be observed

Technical specifications

Article number	6DL1193-6AR00-0AA0 ET 200SP HA, BUSADAPTER BA 2XRJ45	6DL1193-6AF00-0AA0 ET 200SP HA, BUSADAPTER BA 2XFC	6DL1193-6AG00-0AA0 ET 200SP HA, BUSADAPTER BA 2XLC
Dimensions			
Width	20 mm	20 mm	20 mm
Height	69.5 mm	69.5 mm	75 mm; Without protective caps (approx. 8 mm)
Depth	59 mm	59 mm	59 mm
Weights			
Weight, approx.	46 g	53 g	60 g
Article number	6DL1193-6AG20-0AA0 ET 200SP HA, BUSADAPTER BA LC/RJ45	6DL1193-6AG40-0AA0 ET 200SP HA, BUSADAPTER BA LC/FC	
General information			
Product type designation	BA LC/RJ45	BA LC/FC	
Interfaces			
Number of PROFINET interfaces	1; 2 ports (switch) LC / RJ45	1; 2 ports (switch) LC / FC	
Supports protocol for PROFINET IO			
• Number of RJ45 ports	1	1	
• Number of FC (FastConnect) connections			
• Number of LC ports	1; Wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-FX	1; Wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-FX	
Cable length			
- Cu conductors	100 m	100 m	
- Multimode graded-index fiber 50/125 µm	3 km; min. transmit power -23.5 dB, min. receiver sensitivity -31 dB	3 km; min. transmit power -23.5 dB, min. receiver sensitivity -31 dB	
- Multimode graded-index fiber 62.5/125 µm	3 km; min. transmit power -20 dB, min. receiver sensitivity -31 dB	3 km; min. transmit power -20 dB, min. receiver sensitivity -31 dB	
Standards, approvals, certificates			
RoHS conformity	Yes	Yes	
China RoHS compliance	Yes	Yes	
Ambient conditions			
Ambient temperature during operation			
• min.	-40 °C	-40 °C	
• max.	70 °C; = Tmax for horizontal installation; for vertical installation Tmax = 60 °C; redundant setup (2x 6DL1155-6AU00-0PM0): max. 65 °C horizontally, max. 60 °C vertically. When using different IO Devices, the derating specified there must be observed.	65 °C; = Tmax for horizontal installation; for vertical installation Tmax = 60 °C; redundant setup (2x 6DL1155-6AU00-0PM0): max. 60 °C horizontally, max. 55 °C vertically. When using different IO Devices, the derating specified there must be observed.	
Dimensions			
Width	20 mm	20 mm	
Height	75 mm; Without protective caps (approx. 8 mm)	75 mm; Without protective caps (approx. 8 mm)	
Depth	59 mm	59 mm	
Weights			
Weight, approx.	32 g	50 g	
Article number	6GK5991-2VA00-8AA2	Article number	6GK5991-2VA00-8AA2
product type designation	BA 2xRJ45VD HA	product type designation	BA 2xRJ45VD HA
suitability for use	Ethernet transmission via 2, 4 and 8-wire line	number of 10/100 Mbit/s RJ45 ports	2
suitability for operation	Products with BusAdapter interface (requirement: the BusAdapter is approved in the firmware of the basic unit)	type of electrical connection	RJ45
interfaces			
number of electrical connections		operating mode	
• for network components or terminal equipment maximum	2	• standard Ethernet	Yes
		• VD	Yes; Depending on number of wires (2, 4 or 8-wire)
standards, specifications, approvals			
		certificate of suitability	
		• CCC for hazardous zone according to GB standard	Yes
		• CCC for hazardous zone according to GB standard as marking	Ex nA IIC T4 Gc

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200SP HA

Additional I/O modules

Overview

Extending the SIMATIC ET 200SP HA system with specific additional I/O modules from the SIMATIC ET 200SP system gives you more options and flexibility.

When these I/O modules are used, the following aspects need to be considered:

- Special slot rules apply (see System Manual for the SIMATIC ET 200SP HA)
- Module redundancy is not supported for the additional I/O modules
- Attention must be paid to the specific properties of the additional I/O modules, such as ambient temperature, painting, insulation protection. These are usually limited compared to the ET 200SP HA I/O modules
- Before use, check whether (Library) Support is already available for the desired purpose

Note:

Product partners are external companies outside Siemens AG and its associated companies. Information and descriptions of products made by product partners are non-binding, and are the responsibility of the product partners. These products are manufactured independently and under the responsibility of the respective product partner, and are sold and supplied by it under its terms of business and delivery.

Unless compulsory by law, Siemens assumes no liability or warranty for these products or for connection with these products of the product partners.

Ordering data

Article No.

CM PtP communications module

For serial communication connections with RS232, RS422, RS485 interfaces, BU type A0, color code CC00

- CM PtP communications module (V2)

6ES7137-6AA01-0BA0

Analog input module

- AI Energy Meter CT HF, for 1 A or 5 A current transformers, with network analysis functions, channel diagnostics; BU type U0

6ES7134-6PA01-0CU0

- AI Energy Meter RC HF, for Rogowski coils or 333 mV current/voltage transformers, with network analysis functions, channel diagnostics; BU type U0

6ES7134-6PA21-0CU0

TM SIWAREX WP321 weighing module

Single-channel, for platform scales or hopper scales with analog load cells (1 - 4 mV/V), 1 × LC, 1 × RS 485.

7MH4138-6AA00-0BA0

TM SIWAREX WP351 HF weighing module

SIMATIC ET 200SP, TM SIWAREX WP351 HF, legal-for-trade weighing module for automatic dosing, filling and checking scales and totalizing weighing instruments

7MH4138-6BA00-0CU0

Motor starters

Direct starter

- Adjustment range 0.1 ... 0.4 A
- Adjustment range 0.3 ... 1 A
- Adjustment range 0.9 ... 3 A
- Adjustment range 2.8 ... 9 A
- Adjustment range 4 ... 12 A

3RK1308-0AA00-0CP0

3RK1308-0AB00-0CP0

3RK1308-0AC00-0CP0

3RK1308-0AD00-0CP0

3RK1308-0AE00-0CP0

Reversing starter

- Adjustment range 0.1 ... 0.4 A
- Adjustment range 0.3 ... 1 A
- Adjustment range 0.9 ... 3 A
- Adjustment range 2.8 ... 9 A
- Adjustment range 4 ... 12 A

3RK1308-0BA00-0CP0

3RK1308-0BB00-0CP0

3RK1308-0BC00-0CP0

3RK1308-0BD00-0CP0

3RK1308-0BE00-0CP0

SITRANS FCT070

Transmitter for ET 200SP

7ME4138-6AA00-0BB1

AirLINE SP valve terminal type 8647 for integration into ET 200SP HA

For more detailed information about the AirLINE SP, type 8647 (e.g. data sheet, operating manual) please contact Bürkert directly:
<https://www.burkert-usa.com/en/type/8647>

* Disclaimer of liability

This information and the descriptions have been compiled with great care. However, it is not possible for Siemens to verify that the data supplied by product partners is complete, correct and up-to-date. The possibility that individual items of information might be incorrect, incomplete, or not up-to-date cannot therefore be ruled out. Unless compulsory by law, Siemens accepts no liability for the usability of the data or of the products for the user per se.

Overview



SIMATIC ET 200MP video

https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6147385583001



SIMATIC ET 200MP is a modular and scalable I/O system with IP20 degree of protection for universal use, and offers the same system advantages as SIMATIC S7-1500. SIMATIC ET 200MP permits extremely short bus cycle times and very fast response times, even with large quantity structures.

SIMATIC ET 200MP consists of the following components:

- Interface modules for connecting S7-1500 I/O modules to PROFINET; up to 30 modules can be connected to one interface module
- Interface module for connecting S7-1500 I/O modules to PROFIBUS; up to 12 modules can be connected to one interface module

The SIMATIC ET 200MP distributed I/O system is particularly easy to install, wire, and commission.

With its extended ambient conditions, SIMATIC ET 200MP can be used almost anywhere. Many modules can be operated in a temperature range from -30°C to +60°C and at altitudes up to 5,000 m as standard. A wide range of SIPLUS modules is available for requirements beyond this.

Highlights:

- Modular I/O system with degree of protection IP20 for PROFINET or alternatively for PROFIBUS
- Compact dimensions and high channel density
- High degree of user-friendliness due to the following design features:
 - High channel density through 35 mm wide modules with up to 64 digital channels
 - Standardized 40-pin front connector simplifies ordering, logistics, and stock-keeping
 - Standardized pin assignment per module type simplifies wiring and helps avoid errors
 - Integrated potential bridges simplify wiring and allow flexible subsequent modification of potential groups
 - The cable storage space grows along with the requirements and allows a uniform appearance even with insulated conductors with a large core cross-section and/or thick insulation
 - The prewiring position for the front connector allows convenient wiring during both first commissioning and when making changes during operation
 - The DIN rail integrated in the S7-1500 mounting rail allows snapping-on of many standard components such as additional terminals, miniature circuit breakers or small relays
 - The 1:1 assignment of channel status and diagnostics LED, terminal and inscription allows fast location and elimination of errors. Assistance is provided by the cabling diagram printed on the inside of the front doors
 - The integrated shielding concept for analog input and technology modules allows reliable and rugged operation, in particular with High Speed applications. Installation does not require any tools
 - Particularly space-saving and simple design with slim 25 mm modules and high-density modules; the maximum possible station configuration with power supply (PS), interface module (IM) and 30 I/O modules can be accommodated on a 830 mm wide S7-1500 mounting rail
- Extensive product portfolio comprising digital and analog input and output modules (incl. HART protocol for analog modules and connection of NAMUR encoders for digital input modules), technology modules, communications modules for IO-Link and point to point communication as well as F-modules up to SIL3.
 - Integrated technological functions in selected modules, such as counting, pulse width modulation (PWM) or integrated switching cycle counters, make cost-effective and convenient solutions possible.
 - Selected digital output modules enable safety-related load group shutdown in accordance with SILCL 2 via an external safety relay.

I/O systems

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200MP

Overview

- Extensive system functions
 - Integrated system diagnostics when operated with S7-1500 and TIA Portal
 - Integrated switching cycle counter for relay modules enables preventive maintenance
 - Integrated operating cycles counter at 24 V DC High Feature and TRIAC modules for preventive maintenance of connected actuators, e.g. solenoid valves or other mechanical switchgear
 - Suitable for simple counting tasks with digital input modules with up to 20 kHz.
 - Consistent use of identification and maintenance data IM0 to IM3 for fast electronic and unambiguous identification of individual modules (Article No., serial number, etc.)
 - ID-Link on the side of the module for fast identification using a smart phone.
 - Uniform firmware update for the interface module and all I/O modules for subsequent function extensions (investment security)
 - Bus cycle time $\geq 250 \mu\text{s}$ and coupling to the isochronous task permit implementation of applications with high performance requirements with PROFINET
 - Up to 30 I/O modules (PROFINET) or 12 I/O modules (PROFIBUS) within a station save on interface modules and installation time
 - MMC not required with PROFINET; automatic address assignment via LLDP or manually via TIA Portal or PST tool
 - Shared device on up to two (IM 155-5 PN BA and IM 155-5 PN ST) or four (IM 155-5 PN HF) IO Controllers
 - Module shared input/module shared output as system function for all S7-1500 I/O modules
- High plant availability:
 - Increased communication availability by means of Media Redundancy Protocol (MRP, MRPD) on PROFINET as well as operation of the IM 155-5 PN HF on an S7-1500 R/H using S2 redundancy;
 - in addition, the IM 155-5 PN HF and IM 155-5 MF HF High Feature interface modules can be operated on an S7-400H. Configuration is carried out with STEP 7 V5.5 SP3 and a GSDML file. The IM 155-5 PN HF and IM 155-5 MF HF also support operation on an S7-400H CPU (system redundancy).
 - Increased plant availability due to the active backplane bus for up to 12 I/O modules per station; allows reaction-free pulling and plugging of I/O modules in operation without a CPU STOP; allows holding of reserves (empty slots) for plant expansion at a later time.

Overview



ET 200MP interface module IM 155-5 PN BA



SIMATIC ET 200MP IM 155-5 MF HF



SIMATIC ET 200MP cable grip

- Interface modules for connecting ET 200MP to PROFINET
- These handle data exchange with the PROFINET IO controller in the PLC
- Integrated 2-port switch for line topology

IM 155-5 PN BA

- Max. 12 I/O modules
- Operation of F-modules and PROFIsafe
- Shortest bus cycle time 1 ms
- Media redundancy (MRP)
- Shared device on up to 2 IO controllers
- Omission of SIMATIC Memory Card (SMC); IM replacement without PG using LLDP

IM 155-5 PN ST, IM 155-5 PN HF

- Max. 30 I/O modules
- Shortest bus cycle time 250 μ s
- Connecting to the isochronous task of the CPU
- Prioritized fast startup (FSU) with max. 12 I/O modules
- Media Redundancy Protocol (MRP)
- Shared device on up to two IO controllers (when configuring using GSD file; depends on the respective engineering tool)
- Omission of SIMATIC Memory Card (SMC); IM replacement without PG using LLDP
- Operation of F-modules and PROFIsafe
- Submodule-granular shared device with up to two IO controllers
- Configuration control (option handling)
- Module shared input and module shared output (MSI/MSO), i.e. the inputs or outputs of a module can be made available simultaneously to up to two IO controllers

The IM155-5 PN HF interface module has the following additional functions:

- Shared device on up to 4 IO controllers
- Module shared input and module shared output (MSI/MSO) on up to four IO controllers
- Operation on a highly available SIMATIC S7-400H
- Support for the MRPD function (media redundancy with planned duplication)
- S2 redundancy for operation with an S7-1500 R/H
- Operation on the active backplane bus (as of FW V 4.4.1)

IM 155-5 MF HF

- Max. 30 I/O modules
- Max. 1,440 byte inputs or outputs
- Hardware is MultiFieldbus ready; currently only PROFINET activated
- BusAdapter concept for universal connection to copper and fiber-optic networks
- Operation of F-modules and PROFIsafe
- Operation with active backplane bus
- Support for security features such as PN Security Class 1
- Shortest bus cycle time 250 μ s
- Media Redundancy Protocol (MRP)
- Support for the MRPD function (media redundancy with planned duplication)
- S2 redundancy for operation with an S7-1500 R/H
- Shared device on up to four IO controllers (when configuring using GSD file; depends on the respective configuration tool)
- Submodule-granular shared device with up to four IO controllers

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200MP

Interface modules > IM 155-5 PN**Overview**

- Module shared input and module shared output (MSI/MSO), i.e. the inputs or outputs of a module can be made available simultaneously to up to four IO controllers
- Configuration control (option handling)
- Operation on a highly available SIMATIC S7-400H
- Optional cable grip for increased mechanical stress

	IM 155-5 PN BA	IM 155-5 PN ST	IM 155-5 PN HF	IM 155-5 MF HF
Article No.	6ES7155-5AA00-0AA0	6ES7155-5AA01-0AB0	6ES7155-5AA00-0AC0	6ES7155-5MU00-0CNO

Quantity structures

IO modules	All except PROFI-safe	All	All	All
Max. number IO modules / IM	12	30	30	30
Max. number of bytes / slot	64 inputs 64 outputs	256 inputs 256 outputs	256 inputs 256 outputs	256 inputs 256 outputs
Max. number bytes / station	64 inputs 64 outputs	512 inputs 512 outputs	512 inputs 512 outputs	1440 inputs 1440 outputs
Update time	1 ms	250 µs	250 µs	250 µs

Configuration

GSDML	Yes	Yes	Yes	Yes
STEP 7	GSDML	GSDML	GSDML	GSDML
TIA Portal	Yes	Yes	Yes	Yes
PCS 7	No	No	No	No

General functions

Reset to factory settings	TIA Portal	TIA Portal	TIA Portal	TIA Portal
Device replacement: without PG	LLDP	LLDP	LLDP	LLDP
Configuration management (option handling)	No	Yes	Yes	Yes
I&M data	IM 0 ... 3	IM 0 ... 3	IM 0 ... 3	IM 0 ... 3
Isochronous mode	No	Yes	Yes	No
PROFI-safe	No	Yes	Yes	Yes

PROFINET functions

RT	Yes	Yes	Yes	Yes
IRT	No	Yes	Yes	Yes
MRP	Yes	Yes	Yes	Yes
MRPD	No	No	Yes	Yes
S2 redundancy	No	No	Yes	Yes
Fast startup	No	Yes	Yes	Yes
Shared device	Yes; up to 2 ctrl.	Yes; up to 2 ctrl.	Yes; up to 4 ctrl.	Yes; up to 4 ctrl.
MSI / MSO	Yes	Yes	Yes	Yes
Submodules	Yes	Yes	Yes	Yes

Ordering data	Article No.	Ordering data	Article No.
IM 155-5 PN interface module IP20 degree of protection, module width 35 mm, installation on S7-1500 DIN rail		Accessories	
SIMATIC ET 200MP PROFINET IO device interface module IM 155-5 PN BA For ET 200MP electronic modules; up to 12 IO modules; integrated 2-port switch; RJ45 shared device on 2 IO controllers; MRP; FW update; I&M0...3	6ES7155-5AA00-0AA0	SIMATIC ET 200MP, spare part front door for IM 155-5 (6ES7155-5AA00-0AB0) 5 units per packing unit	6ES7528-0AA70-7AA0
SIMATIC ET 200MP. PROFINET IO device Interface Module IM 155-5 PN ST For ET 200MP electronic modules; up to 12 IO modules without PS; up to 30 IO modules with additional PS; integrated 2-port switch; RJ45 shared device; MRP; IRT >=0.25 ms; isochronous mode FW update; I&M0...3; FSU with 500 ms	6ES7155-5AA01-0AB0	SIMATIC S7-1500 mounting rail Fixed lengths, with grounding elements	
SIMATIC ET 200MP. PROFINET IO device Interface Module IM 155-5 PN HF, for ET 200MP electronic modules; up to 12 IO modules without PS; up to 30 IO modules with additional PS; integrated 2-port switch; RJ45 shared device; MRP; IRT >=0.25 ms; isochronous mode FW update; I&M0...3; prioritized startup, S2 redundancy; shared device with 4 controllers Suitable for operation with the active backplane bus (from FW V4.4)	6ES7155-5AA00-0AC0	SIMATIC S7-1500, mounting rail 160 mm (approx. 6.3 inches); Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AB60-0AA0
SIMATIC ET 200MP, MultiFieldbus Interface Module IM 155-5 MF HF, PROFINET, flexible ports via pluggable SIMATIC BusAdapters (sold separately), max. 30 I/O modules, multi hot swap with active backplane sold separately), IRT with 250 µs, shared device with 4 controllers (1440 bytes each), 256 bytes per I/O module, MRP, MRPD, S2 redundancy, PN Security Class 1, optional cable grip (sold separately)	6ES7155-5MU00-0CNO	SIMATIC S7-1500, mounting rail 245 mm (approx. 9.6 inches); Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AC40-0AA0
		SIMATIC S7-1500, mounting rail 482.6 mm (approx. 19 inches); Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AE80-0AA0
		SIMATIC S7-1500, mounting rail 530 mm (approx. 20.9 inches); Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AF30-0AA0
		SIMATIC S7-1500, mounting rail 830 mm (approx. 32.7 inches); Incl. grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays	6ES7590-1AJ30-0AA0
		For cutting to length by customer, without drill holes; grounding elements must be ordered separately	
		SIMATIC S7-1500, mounting rail 2000 mm (approx. 78.7 inches) Without grounding screw, integrated DIN rail for mounting small items such as terminals, circuit breakers and relays for cutting to length by customer, grounding screw (6ES7590-5AA00-0AA0, 20 units) must be ordered separately	6ES7590-1BC00-0AA0
		SIMATIC S7-1500, grounding screw For connecting PE to the S7-1500 mounting rail; essential for 2000 mm mounting rail 20 units per packing unit	6ES7590-5AA00-0AA0

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200MP

Interface modules > IM 155-5 PN

Ordering data	Article No.	Article No.
System power supply For supplying the S7-1500 backplane bus		SIMATIC S7-1500 / ET 200MP; slot cover 6ES7590-0CA00-0AA0
SIMATIC S7-1500, system power supply PS 25 W 24 V DC, Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0KA00-0AB0	For the active backplane bus of the S7-1500 for protection against ESD as well as for mechanical fixation on the S7-1500 mounting rail. Unused slots must be provided with a slot cover! 5 units per packing unit
SIMATIC S7-1500, system power supply PS 60 W 24/48/60 V DC, Supplies operating voltage to the backplane bus of the S7-1500	6ES7505-0RA00-0AB0	IE FC RJ45 plug 180 180° cable outlet
SIMATIC S7-1500, system power supply with buffer functionality PS 60 W 24/48/60 V DC HF, Supplies operating voltage to the backplane bus of the S7-1500 and enables non-volatile retention of the work memory (data) by the CPU	6ES7505-0RB00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 1 unit.
SIMATIC S7-1500, system power supply PS 60 W 120/230 V AC/DC, Supplies operating voltage to the backplane bus of the S7-1500	6ES7507-0RA00-0AB0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 10 units.
SIMATIC S7-1500 spare part, connector for system power supply modules (PS) and load current supply modules (PM) 10 units per packing unit	6ES7590-8AA00-0AA0	Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbps), with rugged metal enclosure and FC connection technology, for IE FC cable 2x 2; 180° cable outlet 1 pack = 50 units.
Load current supply		Industrial Ethernet FC TP standard cable, GP 2x2 (PROFINET type A), 6XV1840-2AH10 TP installation cable for connection to IE FC RJ45 2x2, for universal use, 4-wire, shielded CAT 5E, sold by the meter, delivery unit maximum length of 4000 m minimum order quantity 20 m.
SIMATIC PM 1507 24 V/3 A Stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC Output: 24 V DC/3 A	6EP1332-4BA00	Industrial Ethernet FC TP trailing cable, 2x2 (PROFINET type C), 6XV1840-3AH10 TP installation cable for connection to FC outlet RJ 45, for use in cable carriers, 4-wire, shielded, Cat5e, sold by the meter (4 million bending cycles), delivery unit max. 2000 m, minimum order quantity 20 m.
SIMATIC PM 1507 24 V/8 A Stabilized power supply for SIMATIC S7-1500 Input: 120/230 V AC Output: 24 V DC/8 A	6EP1333-4BA00	Industrial Ethernet FC TP marine cable, 6XV1840-4AH10 TP installation cable for connection to FC outlet RJ45, marine certified, 4-wire, shielded, Cat5e, sold by the meter, delivery unit maximum length of 1000 m, minimum order quantity 20 m.
Power supply connector Spare part; for connecting the 24 V DC supply voltage		Industrial Ethernet FastConnect stripping tool, 6GK1901-1GA00 Stripping tool for fast stripping of insulation from the IE FastConnect cables.
Connector, female, 2x2-pole, ET 200SP, interface module, KP32F, PN-PN coupler, Grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded 10 units per packing unit	6ES7193-4JB00-0AA0	
SIMATIC S7-1500 / ET 200MP; active backplane bus 12 slots For plugging S7-1500 I/O modules for hot swapping; for use in the ET 200MP with IM 155-5 PN HF (from FW V4.4.1); please order S7-1500 mounting rail and slot covers separately	6ES7590-0BL00-0AA0	

Technical specifications

Article number	6ES7155-5AA00-0AA0	6ES7155-5AA00-0AC0	6ES7155-5AA01-0AB0	6ES7155-5MU00-0CN0
	ET 200MP, IM 155-5 PN BA	ET 200MP, IM 155-5 PN HF	ET 200MP, IM 155-5 PN ST	ET 200MP, IM 155-5 MF HF
General information				
Product type designation	IM 155-5 PN BA	IM 155-5 PN HF	IM 155-5 PN ST	IM 155-5 MF HF
Product function				
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Module swapping during operation (hot swapping)	No	Yes; In combination with active backplane bus	No	Yes; In combination with active backplane bus
• Isochronous mode	No	Yes	Yes	No
• Tool changer	No	No	No	No
• Local coupling, IO data	No	No	No	No
Engineering with				
• STEP 7 TIA Portal configurable/ integrated from version	V15.1	V16	V15	V19
• STEP 7 configurable/ integrated from version	use GSD file	use GSD file	use GSD file	use GSD file
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3	GSDML V2.3	GSDML V2.43
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes
Short-circuit protection	Yes	Yes	Yes	Yes
Input current				
Current consumption (rated value)	1 A; at 24 V DC and without load	0.2 A; at 24 V DC and without load	0.2 A; at 24 V DC and without load	0.16 A; at 24 V DC and without load
Address area				
Address space per station				
• Address space per station, max.	64 byte; For input and output data respectively	512 byte; For input and output data respectively	512 byte; For input and output data respectively	1 440 byte; For input and output data respectively
Hardware configuration				
Integrated power supply	Yes	Yes	Yes	Yes; 16 W
Rack				
• Modules per rack, max.	12; I/O modules	30; I/O modules	30; I/O modules	30; I/O modules
Submodules				
• Number of submodules per station, max.	108; 9 submodules / I/O modules	256	256	256; 9 per I/O module
Interfaces				
Number of PROFINET interfaces	1; 2 ports (switch)	1; 2 ports (switch)	1; 2 ports (switch)	1; 2 ports (switch)
1. Interface				
Interface types				
• RJ 45 (Ethernet)	Yes	Yes	Yes	Yes; with BusAdapter
• Number of ports	2	2	2	2; with BusAdapter
• integrated switch	Yes	Yes	Yes	Yes
• BusAdapter (PROFINET)	No	No	No	Yes; BA 2x RJ45, BA 2x FC, BA 2x SCRJ, BA SCRJ/RJ45, BA SCRJ/FC, BA 2x LC, BA LC/RJ45, BA LC/FC
Protocols				
• PROFINET IO Device	Yes	Yes	Yes	Yes
• Open IE communication	Yes	Yes	Yes	Yes
• Media redundancy	Yes; PROFINET MRP client	Yes; PROFINET MRP client / HRP client	Yes; PROFINET MRP client	Yes; PROFINET MRP client / HRP client
PROFINET IO Device				
Services				
- IRT	No	Yes; 250 µs to 4 ms in 125 µs frame	Yes; 250 µs to 4 ms in 125 µs frame	Yes; 250 µs to 4 ms in 125 µs frame
- PROFIenergy	No	No	No	No
- Prioritized startup	No	Yes	Yes	No
- Shared device	Yes	Yes	Yes	Yes
- Number of IO Controllers with shared device, max.	2	4	2	4

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200MP**Interface modules > IM 155-5 PN****Technical specifications**

Article number	6ES7155-5AA00-0AA0 ET 200MP, IM 155-5 PN BA	6ES7155-5AA00-0AC0 ET 200MP, IM 155-5 PN HF	6ES7155-5AA01-0AB0 ET 200MP, IM 155-5 PN ST	6ES7155-5MU00-0CN0 ET 200MP, IM 155-5 MF HF
Interface types				
RJ 45 (Ethernet)				
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 100 Mbps	Yes	Yes	Yes	Yes
• Autonegotiation	Yes	Yes	Yes	Yes
• Autocrossing	Yes	Yes	Yes	Yes
Protocols				
Modbus TCP	No	No	No	No
Redundancy mode				
• PROFINET system redundancy (S2)	No	Yes; NAP S2	No	Yes; NAP S2
- on S7-1500R/H	No	Yes	No	Yes
- on S7-400H	No	Yes; use GSD file	No	Yes; use GSD file
• PROFINET system redundancy (R1)	No	No	No	No
• H-Sync forwarding	No	Yes	No	Yes
Media redundancy				
- MRP	Yes	Yes	Yes	Yes
- MRPD	No	Yes	No	Yes
Open IE communication				
• TCP/IP	Yes	Yes	Yes	Yes
• UDP				Yes
• SNMP	Yes	Yes	Yes	Yes
• LLDP	Yes	Yes	Yes	Yes
• ARP				Yes
• IGMP				Yes
• Multicast				Yes
• Broadcast				Yes
• IPv4				Yes
Isochronous mode				
Equidistance	No	Yes	Yes	No
shortest clock pulse		250 µs	250 µs	
max. cycle		4 ms	4 ms	
Bus cycle time (TDP), min.		250 µs	250 µs	
Interrupts/diagnostics/ status information				
Status indicator	Yes	Yes	Yes	Yes
Alarms	Yes	Yes	Yes	Yes
Diagnostics function	Yes	Yes	Yes	Yes
Diagnostics indication LED				
• RUN LED	Yes; green LED	Yes; green LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED	Yes; Yellow LED
• Connection display LINK TX/RX	Yes; 2x green-yellow LEDs	Yes; 2x green-yellow LEDs	Yes; 2x green-yellow LEDs	Yes; 2x green LEDs on BusAdapter
Standards, approvals, certificates				
Network loading class	2			3
product functions / security / header				
PROFINET Security Class				1
signed firmware update				Yes
Secure Boot				Yes
safely removing data				Yes
data integrity				Yes

Technical specifications

Article number	6ES7155-5AA00-0AA0	6ES7155-5AA00-0AC0	6ES7155-5AA01-0AB0	6ES7155-5MU00-0CN0
	ET 200MP, IM 155-5 PN BA	ET 200MP, IM 155-5 PN HF	ET 200MP, IM 155-5 PN ST	ET 200MP, IM 155-5 MF HF
Ambient conditions				
Ambient temperature during operation				
• horizontal installation, min.	-30 °C; From FS03	-25 °C; from FS04	-25 °C; From FS03	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C; From FS03	-25 °C; from FS04	-25 °C; From FS03	-30 °C
• vertical installation, max.	40 °C	40 °C	40 °C	40 °C
Altitude during operation relating to sea level				
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
connection method				
ET-Connection				
• via BU/BA Send		No	No	No
Mechanics/material				
Strain relief				Yes; Optional
Dimensions				
Width	35 mm	35 mm	35 mm	35 mm
Height	147 mm	147 mm	147 mm	147 mm
Depth	129 mm	129 mm	129 mm	129 mm
Weights				
Weight, approx.	236 g	350 g		260 g; without BusAdapter

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200MP**Interface modules > IM 155-5 DP****Overview**

- Interface module for connecting ET 200MP to PROFIBUS
- Handles data exchange with the PROFIBUS master in the PLC
- Max. 12 I/O modules
- Automatic detection of baud rate 9.6 kBd ... 12 MBd
- PROFIBUS addresses 1 ... 125; adjustable using DIP switches
- Identification and maintenance data IMO ... IM3

Ordering data

Ordering data	Article No.	Ordering data	Article No.
IM 155-5 DP ST interface module IP20 degree of protection, module width 35 mm, installation on S7-1500 DIN rail	6ES7155-5BA00-0AB0	PROFIBUS FastConnect bus cable • Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m	6XV1830-0EH10
Accessories		• 20 m	6XV1830-0EN20
Front flap for IM 155-5 PN (spare part), 5 units	6ES7528-0AA70-7AA0	• 50 m	6XV1830-0EN50
SIMATIC S7-1500 DIN rail Fixed lengths, with grounding elements		• 100 m	6XV1830-0ET10
• 160 mm	6ES7590-1AB60-0AA0	• 200 m	6XV1830-0ET20
• 245 mm	6ES7590-1AC40-0AA0	• 500 m	6XV1830-0ET50
• 482 mm	6ES7590-1AE80-0AA0	• 1000 m	6XV1830-0EU10
• 530 mm	6ES7590-1AF30-0AA0	FC robust cable	6XV1830-0JH10
• 830 mm	6ES7590-1AJ30-0AA0	Bus cable with PUR sheath for use under ambient conditions of extreme mechanical stress or aggressive chemicals, 2-wire, shielded, sold by the meter, max. delivery unit 1 000 m, minimum order quantity 20 m	
For cutting to length by customer, without drill holes; grounding elements must be ordered separately		FC flexible cable	6XV1831-2K
• 2 000 mm	6ES7590-1BC00-0AA0	PROFIBUS bus cable, flexible, with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1 000 m, minimum order quantity 20 m	
PE connection element for 2 000 mm DIN rail	6ES7590-5AA00-0AA0	FC trailing cable	6XV1830-3EH10
20 units		PROFIBUS trailing cable, at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, max. delivery unit 1 000 m, minimum order quantity 20 m	
Load current supply		FC bus cable	6XV1830-0GH10
24 V DC/3 A	6EP1332-4BA00	PROFIBUS Food bus cable with PE sheath for use in the food and beverages industry, 2-wire, shielded, sold by the meter, max. delivery unit 1 000 m, minimum order quantity 20 m	
24 V DC/8 A	6EP1333-4BA00	FC underground cable	6XV1830-3FH10
Power supply connector		PROFIBUS underground cable, 2-wire, shielded, sold by the meter, max. delivery unit 1 000 m, minimum order quantity 20 m	
Spare part; for connecting the 24 V DC supply voltage			
• With push-in terminals	6ES7193-4JB00-0AA0		
PROFIBUS connector			
• Connection plug for PROFIBUS, up to 12 Mbps, 90° cable outlet, insulation displacement method, without PG socket	6ES7972-0BA70-0XA0		
• Connection plug for PROFIBUS, up to 12 Mbps, 90° cable outlet, insulation displacement method, with PG socket	6ES7972-0BB70-0XA0		
PROFIBUS stripping tool	6GK1905-6AA00		
Stripping tool for fast stripping of the PROFIBUS			

Ordering data	Article No.	Article No.
FC FRNC cable PROFIBUS bus cable, flame-retardant and halogen-free, with copolymer sheath FRNC, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m	6XV1830-0LH10	
FC trailing cable PROFIBUS trailing cable, at least 3 million bending cycles, min. bending radius approx. 120 mm, 2-wire, shielded, sold by the meter, max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1831-2L	
IE FC stripping tool Preadjusted stripping tool for fast stripping of Industrial Ethernet FC cables		6GK1901-1GA00

Technical specifications

Article number	6ES7155-5BA00-0AB0 ET 200MP, IM155-5 DP ST
General information	
Product type designation	IM 155-5 DP ST
Product function	
• I&M data	Yes; I&M0 to I&M3
• Module swapping during operation (hot swapping)	No
• Isochronous mode	No
• Tool changer	No
• Local coupling, IO data	No
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V13
• STEP 7 configurable/integrated from version	use GSD file
• PROFIBUS from GSD version/GSD revision	V1.0 / V5.1
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Short-circuit protection	Yes
Input current	
Current consumption (rated value)	0.2 A; at 24 V DC and without load
Address area	
Address space per station	
• Address space per station, max.	244 byte; For input and output data respectively
Hardware configuration	
Integrated power supply	Yes; 14 W
Rack	
• Modules per rack, max.	12; I/O modules
Interfaces	
Number of PROFIBUS interfaces	1; 1 port
1. Interface	
Interface types	
• RS 485	Yes
• Number of ports	1
• integrated switch	No
• BusAdapter (PROFINET)	No
Protocols	
• PROFIBUS DP slave	Yes
Interface types	
RS 485	
• Transmission rate, max.	12 Mbit/s

Article number	6ES7155-5BA00-0AB0 ET 200MP, IM155-5 DP ST
Protocols	
Modbus TCP	No
PROFIBUS DP	
Services	
- SYNC capability	Yes
- FREEZE capability	Yes
- DPV1	Yes
Interrupts/diagnostics/status information	
Status indicator	Yes
Alarms	Yes
Diagnostics function	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Connection display DP	Yes; green LED
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C; from FS04
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C; from FS04
• vertical installation, max.	40 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
connection method	
ET-Connection	
• via BU/BA Send	No
Dimensions	
Width	35 mm
Height	147 mm
Depth	129 mm
Weights	
Weight, approx.	360 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200MP

Interface modules > SIPLUS IM 155-5 PN**Overview**

- Interface module for linking the ET 200MP to PROFINET
- Handles data exchange with the PROFINET I/O controller in the PLC
- Integrated 2-port switch for line topology
- Max. 30 I/O modules
- Shortest bus cycle 250 µs
- Linking to the isochronous task of the CPU
- Prioritized fast startup (FSU) with 500 ms (max. 12 I/O modules)
- Media Redundancy Protocol (MRP)
- Shared device on up to 2 I/O controllers (when configuring using GSD file; depends on the respective configuration tool)
- Omission of SIMATIC Memory Card (SMC); IM replacement without PG using LLDP

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

Ordering data**Article No.****SIPLUS IM 155-5 PN interface module**

(Extended temperature range and exposure to environmental substances)

IP 20 degree of protection, module width 35 mm, installation on S7-1500 DIN rail

IM 155-5 PN ST, standard version

6AG1155-5AA01-7AB0

IM 155-5 PN HF, High Feature version with additional functions

6AG1155-5AA00-2AC0**Accessories**

See SIMATIC ET 200MP, IM 155-5 PN interface module, page 10/321

Technical specifications

Article number	6AG1155-5AA01-7AB0	6AG1155-5AA00-2AC0
Based on	6ES7155-5AA01-0AB0	6ES7155-5AA00-0AC0
	SIPLUS ET 200MP IM155-5 PN ST	SIPLUS ET 200MP IM155-5 PN HF
Ambient conditions		
Ambient temperature during operation		
<ul style="list-style-type: none"> horizontal installation, min. horizontal installation, max. vertical installation, min. vertical installation, max. 	-40 °C; = Tmin (incl. condensation/frost) 70 °C; = Tmax; ab > +60 °C no module permissible left of the IM -40 °C; = Tmin 40 °C	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C 60 °C; = Tmax
Altitude during operation relating to sea level		
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m); from 2 000 m max. 132 V AC	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity		
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Coolants and lubricants		
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating		
<ul style="list-style-type: none"> Coatings for printed circuit board assemblies acc. to EN 61086 Protection against fouling acc. to EN 60664-3 Military testing according to MIL-I-46058C, Amendment 7 Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200MP**Interface modules > SIPLUS IM 155-5 DP****Overview**

- Interface module for linking the ET 200MP to PROFIBUS
- Handles data exchange with the PROFIBUS device in the PLC
- Max. 12 I/O modules
- Automatic detection of baud rate 9.6 kBd ... 12 MBd
- PROFIBUS addresses 1 ... 125; adjustable using DIP switches
- Identification and maintenance data IM0 ... IM3

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Ordering data	Article No.
SIPLUS IM 155-5 DP ST interface module (Extended temperature range and exposure to environmental substances) IP 20 degree of protection, module width 35 mm, installation on S7-1500 DIN rail	6AG1155-5BA00-2AB0
Accessories	See SIMATIC ET 200MP, IM 155-5 DP interface module, page 10/326

Technical specifications

Article number	6AG1155-5BA00-2AB0
Based on	6ES7155-5BA00-0AB0 SIPLUS ET 200MP IM155-5 DP ST
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost); start-up @ -25 °C
• horizontal installation, max.	60 °C; = Tmax
Altitude during operation relating to sea level	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax - 20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)

Article number	6AG1155-5BA00-2AB0
Based on	6ES7155-5BA00-0AB0 SIPLUS ET 200MP IM155-5 DP ST
Relative humidity	<ul style="list-style-type: none"> • With condensation, tested in accordance with IEC 60068-2-38, max. 100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance	
Coolants and lubricants	<ul style="list-style-type: none"> - Resistant to commercially available coolants and lubricants Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	<ul style="list-style-type: none"> - to biologically active substances according to EN 60721-3-3 - to chemically active substances according to EN 60721-3-3 - to mechanically active substances according to EN 60721-3-3 Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75%) incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation! Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!
Use on ships/at sea	<ul style="list-style-type: none"> - to biologically active substances according to EN 60721-3-6 - to chemically active substances according to EN 60721-3-6 - to mechanically active substances according to EN 60721-3-6 Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	<ul style="list-style-type: none"> - Against chemically active substances acc. to EN 60654-4 - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	<ul style="list-style-type: none"> - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 * The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	<ul style="list-style-type: none"> • Coatings for printed circuit board assemblies acc. to EN 61086 • Protection against fouling acc. to EN 60664-3 • Military testing according to MIL-I-46058C, Amendment 7 • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A

Overview


I/O modules constitute the interface of SIMATIC ET 200MP to the process:

- Digital and analog modules provide exactly the inputs/outputs required for each task
- Technology modules for SIMATIC S7-1500 and ET 200MP
 - With integrated functions for high-speed counting and position detection
 - With integrated inputs and outputs for tasks at the process level and short response times
- Communications modules for SIMATIC S7-1500 and ET 200MP
 - For data exchange using point-to-point coupling
 - For connecting to PROFIBUS
 - For connecting to Industrial Ethernet

You can find additional information under [SIMATIC S7-1500, chapter 4](#).

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200MP

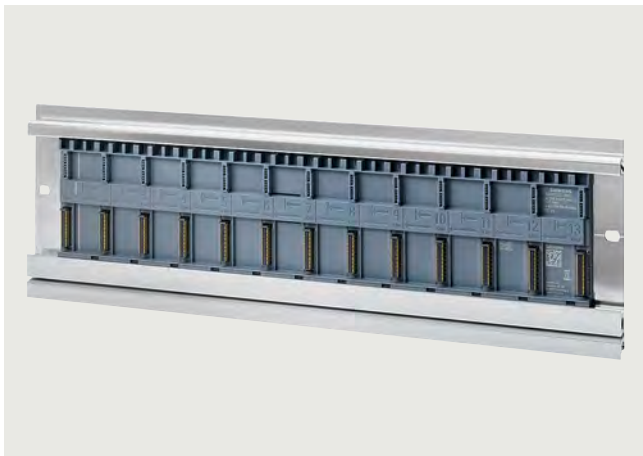Active backplane bus**Overview**

Active backplane bus in S7-1500 DIN rail

- Considerably enhances system availability:
 - Reaction-free hot swapping of I/O modules during operation; system remains in RUN mode when replacing one or more I/O modules
 - Reserve capacity (= gaps in system configuration) for later use
- Can also be used exclusively with ET 200MP and PROFINET
- Can be inserted in the ET 200MP standard DIN rail, replaces the U connectors
- The comprehensive system functions of ET 200MP can still all be used
- Can be used with all PROFINET IO controllers by configuring via GSD file and PROFINET

Ordering data**Article No.****Active backplane bus**

With 12 slots for ET 200MP I/O modules for hot swapping; for insertion in the S7-1500 DIN rail.

Please order the S7-1500 DIN rail and slot covers separately.

- 4 slots
- 8 slots:
- 12 slots

6ES7590-0BD00-0AA0

6ES7590-0BH00-0AA0

6ES7590-0BL00-0AA0

Accessories**Slot cover for active backplane bus**

To protect against electrostatic discharge as well as provide mechanical stability on the S7-1500 DIN rail; 5 units per packing unit

6ES7590-0CA00-0AA0

Technical specifications


Article number	6ES7590-0BD00-0AA0 SIMATIC S7-1500 act. backplane/4 slot	6ES7590-0BH00-0AA0 SIMATIC S7-1500 act. backplane/8 slot	6ES7590-0BL00-0AA0 SIMATIC S7-1500 act. backplane/12 slot
General information			
Product type designation	Active Backplane ST 1+4 Slot	Active Backplane ST 1+8 Slot	Active backplane ST 1+12 slot
Product function			
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Isochronous mode	Yes	Yes	Yes
• Prioritized startup	Yes	Yes	Yes
Engineering with			
• STEP 7 TIA Portal configurable/ integrated from version	V16	V16	V16
• STEP 7 configurable/ integrated from version	V5.6 and higher	V5.6 and higher	V5.6 and higher
• PROFINET from GSD version/ GSD revision	V2.35 / -	V2.35 / -	V2.34 / -
Hardware configuration			
Slots			
• Grid size	35 mm; Utilization of 25 mm-wide modules possible	35 mm; Utilization of 25 mm-wide modules possible	35 mm; Utilization of 25 mm-wide modules possible
• Number of slots	5	9	13
- of which for CPU, max.	0	0	0
- of which for IM, max.	1	1	1
- of which for PS, max.	2; Max. 2 PS per station	2; Max. 2 PS per station	12; Max. 2 PS per station
- of which for IO/CM/CP/TM, max.	4	8	12
- of which for F-IO, max.	4	8	12
• Number of single-width slots, max.	4	8	12
Ambient conditions			
Ambient temperature during operation			
• horizontal installation, min.	-30 °C	-30 °C	-30 °C
• horizontal installation, max.	60 °C	60 °C	60 °C
• vertical installation, min.	-30 °C	-30 °C	-30 °C
• vertical installation, max.	40 °C	40 °C	40 °C
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Dimensions			
Width	154 mm	294 mm	434 mm
Height	99 mm	99 mm	99 mm
Depth	14 mm	14 mm	14 mm
Weights			
Weight, approx.	127 g	245 g	352 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200MP

SIPLUS extreme active backplane bus

Overview

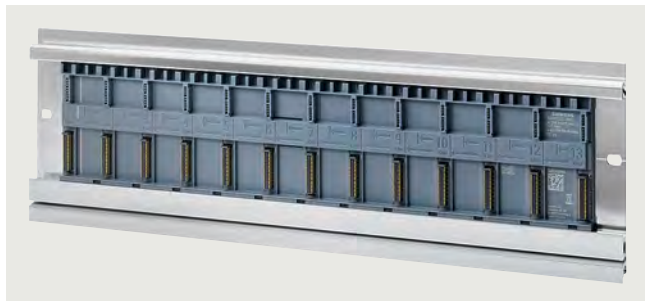

Active backplane bus in S7-1500 DIN rail

- Considerably enhances system availability:
 - Reaction-free hot swapping of I/O modules during operation; system remains in RUN mode when replacing one or more I/O modules
 - Reserve capacity (= gaps in system configuration) for later use
- Can also be used exclusively with ET 200MP and PROFINET
- Can be inserted in the ET 200MP standard DIN rail, replaces the U connectors
- The comprehensive system functions of ET 200MP can still all be used
- Can be used with all PROFINET IO controllers by configuring via GSD file and PROFINET

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

Ordering data

Article No.

Active backplane bus

SIPLUS S7-1500 act. backpl. 12 slot


With 12 slots for inserting S7-1500 I/O modules for hot swapping; with conformal coating -40 ... +70 °C, for use in the ET 200MP. Please order S7-1500 mounting rail and slot covers separately

6AG1590-0BL00-7AA0

Technical specifications

Article number	6AG1590-0BL00-7AA0
Based on	6ES7590-0BL00-0AA0 SIPLUS S7-1500 act. backplane 12 slot
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax
• vertical installation, min.	-40 °C; = Tmin
• vertical installation, max.	40 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; Restrictions for installation altitudes > 2 000 m, see manual
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Overview

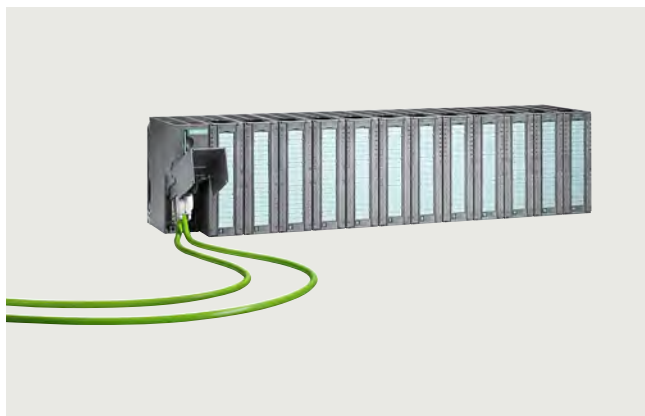

- Modular I/O system with IP20 degree of protection, particularly suitable for user-specific and complex automation tasks
- Consists of a PROFIBUS DP or PROFINET interface module IM 153, up to 8 or 12 I/O modules of the S7-300 automation system (structure with bus connection or with active bus modules), and a power supply if applicable
- Can be expanded with S7-300 automation system signal, communication and function modules
- Applicable Ex analog input or output modules with HART optimize the ET 200M for use in process engineering
- Can be used in redundant systems (S7-400H, S7-400F/FH)
- Modules can be replaced during operation (hot swapping) with the bus modules active
- Transmission rates up to 12 Mbps
- Ex approval to Cat. 3 for Zone 2 acc. to ATEX 100 a
- Fail-safe digital in/outputs as well as analog inputs for safety-oriented signal processing in accordance with PROFIsafe
- Supports modules with expanded user data, e.g. HART modules with HART minor variables

Availability

As part of our established product portfolio, the SIMATIC S7-300 / ET 200M system families will generally be available until 2023. Following the product phase-out declaration, products will be available as spare parts for another ten years.

Technical specifications

General technical specifications ET 200M

Cables and connections	Screw and spring-loaded connections in permanent wiring
Degree of protection	IP20
Ambient temperature on vertical wall (preferred mounting position)	
• with horizontal assembly	0 to +60 °C
• with other assembly	0 to +40 °C
Relative humidity	5 to 95% (RH stress level 2 according to IEC 1131-2)
Atmospheric pressure	795 to 1080 hPa
Mechanical stress	
• Vibrations	IEC 68, parts 2 – 6: 10 - 57 Hz (const. amplitude 0.075 mm) 57 - 150 Hz (constant acceleration 1 g)
• Shock	IEC 68, parts 2 – 27 half-sine, 15 g, 11 ms

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M

Interface modules > IM 153-1/153-2**Overview**

The ET 200M system with various interface modules is available for the distributed use of S7-300 I/O modules. Depending on the application purpose, the best suited IM in terms of costs and functions can be selected:

IM153-1 Standard

The IM153-1 is one reasonably priced variant that is excellently suited for most applications in the manufacturing environment. It permits the use of up to 8 S7-300 I/O modules.

IM153-2 High Feature

For higher requirements in manufacturing technology, such as the use of F technology or the highest performance in conjunction with clock synchronization, the IM153-2 High Feature is available. This IM is also designed for use with the PCS7 in the field of process-oriented applications. This IM can be redundantly used and supports typical functions as they are required in the control field. These include, for example, clock synchronization or time stamping with an accuracy of up to 1 ms.

Ordering data**Article No.****Article No.****IM 153-1 interface module**

Device interface module for connecting an ET 200M to PROFIBUS DP

- Standard temperature range

6ES7153-1AA03-0XB0**IM 153-2 interface module**

Device interface module for connecting an ET 200M to PROFIBUS DP; also for use in redundant systems

- High Feature
- High Feature with extended temperature range

6ES7153-2BA10-0XB0**6ES7153-2BA70-0XB0****Active IM 153/IM 153 bus module****6ES7195-7HD10-0XA0**

For two IM 153-2 High Feature modules for designing redundant systems

Bus module for ET 200M

- For accommodating a power supply and an IM 153 module for the hot-swapping function during RUN, incl. bus module cover
- For accommodating two 40 mm-wide I/O modules for the hot-swapping function
- For accommodating one 80 mm-wide I/O module for the hot-swapping function

6ES7195-7HA00-0XA0**6ES7195-7HB00-0XA0****6ES7195-7HC00-0XA0****ET 200M redundancy bundle****6ES7153-2AR04-0XA0**

Comprising two IM 153-2 High Feature modules and one IM 153/IM 153 bus module

Accessories**PROFIBUS bus connector**

90° outgoing cable, terminating resistor with disconnecting function, up to 12 Mbps, FastConnect

Without PG interface

- 1 unit
- 100 units

6ES7972-0BA52-0XA0**6ES7972-0BA52-0XB0**

With PG interface

- 1 unit
- 100 units

6ES7972-0BB52-0XA0**6ES7972-0BB52-0XB0****SIMATIC DP DIN rail for ET 200M**

Accommodates up to 5 bus modules; for hot-swapping function

- Length: 483 mm (19")
- Length: 530 mm
- Length: 620 mm
- Length: 2000 mm

6ES7195-1GA00-0XA0**6ES7195-1GF30-0XA0****6ES7195-1GG30-0XA0****6ES7195-1GC00-0XA0****SIMATIC S7-300 DIN rail**

- Length: 160 mm
- Length: 480 mm (19")
- Length: 530 mm
- Length: 830 mm
- Length: 2000 mm

6ES7390-1AB60-0AA0**6ES7390-1AE80-0AA0****6ES7390-1AF30-0AA0****6ES7390-1AJ30-0AA0****6ES7390-1BC00-0AA0****S7 Manual Collection****6ES7998-8XC01-8YE0**

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

S7 Manual Collection update service for 1 year**6ES7998-8XC01-8YE2**

Scope of supply:
Current DVD S7 Manual Collection and the three subsequent updates

Technical specifications

Article number	6ES7153-1AA03-0XB0 ET200M, Interface module IM153-1	6ES7153-2BA10-0XB0 ET200M, Interface mod. IM153-2 HF	6ES7153-2BA70-0XB0 ET200M, INTERFACE MOD. IM153-2 HF OUTDOOR
General information			
Product type designation	IM 153-1 DP ST	IM 153-2 DP HF	IM 153-2 OD
Supply voltage			
Rated value (DC)	24 V	24 V	24 V
external protection for power supply lines (recommendation)	not necessary	2,5 A	2,5 A
Input current			
Current consumption, max.	350 mA; At 24 V DC	650 mA; with 24 V DC supply	650 mA
output voltage / header			
Rated value (DC)	5 V		
Output current			
for backplane bus (5 V DC), max.	1 A	1.5 A	1.5 A
Power loss			
Power loss, typ.	3 W	5.5 W	5.5 W
Address area			
Addressing volume			
• Inputs	128 byte	244 byte	244 byte
• Outputs	128 byte	244 byte	244 byte
Hardware configuration			
Number of modules per DP slave interface, max.	8	12	12
Time stamping			
Accuracy		1 ms; 1 ms at up to 8 modules; 10 ms at up to 12 modules	1 ms; 1 ms at up to 8 modules; 10 ms at up to 12 modules
Number of message buffers		15	15
Messages per message buffer		20	20
Number of stampable digital inputs, max.		128; Max. 128 signals/station; max. 32 signals/slot	128; Max. 128 signals/station; max. 32 signals/slot
Time format		RFC 1119	RFC 1119
Time resolution		0.466 ns	0.466 ns
Time interval for transmitting the message buffer if a message is present		1 000 ms	1 000 ms
Time stamp on signal change		rising / falling edge as signal entering or exiting	rising / falling edge as signal entering or exiting
Interfaces			
Transmission procedure	RS 485	RS 485	RS 485
Transmission rate, max.	12 Mbit/s	12 Mbit/s	12 Mbit/s
1. Interface			
automatic detection of transmission rate	Yes	Yes	Yes
Interface types			
• Output current of the interface, max.	90 mA	70 mA	70 mA
• Design of the connection	9-pin sub D socket	9-pin sub D socket	9-pin sub D socket
PROFIBUS DP slave			
• GSD file	(for DPV1) SIEM801D.GSD; SI01801D.GSG	SI05801E.GSG	SI05801E.GSG
• automatic baud rate search	Yes	Yes	Yes
Protocols			
Bus protocol/transmission protocol	PROFIBUS DP to EN 50170	PROFIBUS DP to EN 50170	PROFIBUS DP to EN 50170
Protocols (Ethernet)			
• TCP/IP	No	No	
PROFIBUS DP			
• Number of node addresses, max.	1 to 125 permitted	1 to 125 permitted	1 to 125 permitted
Services			
- SYNC capability	Yes	Yes	Yes
- FREEZE capability	Yes	Yes	Yes
- Direct data exchange (slave-to-slave communication)	Yes; Sender	Yes; as publisher with all IO, as subscriber with F-IO only	Yes; as publisher with all IO, as subscriber with F-IO only

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M**Interface modules > IM 153-1/153-2****Technical specifications**

Article number	6ES7153-1AA03-0XB0 ET200M, Interface module IM153-1	6ES7153-2BA10-0XB0 ET200M, Interface mod. IM153-2 HF	6ES7153-2BA70-0XB0 ET200M, INTERFACE MOD. IM153-2 HF OUTDOOR
Potential separation			
Potential separation exists	Yes	Yes	Yes
Degree and class of protection			
IP degree of protection	IP20	IP20	IP20
Ambient conditions			
Ambient temperature during operation			
• min.	0 °C	0 °C	
• max.	60 °C	60 °C	
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	3 000 m	3 000 m	3 000 m
configuration / header			
Configuration software			
• STEP 7	STEP 7 / COM PROFIBUS / non-Siemens tools via GSD file	Yes; STEP 7 / COM PROFIBUS / non-Siemens tools via GSD file	Yes; STEP 7 / COM PROFIBUS / non-Siemens tools via GSD file
Dimensions			
Width	40 mm	40 mm	40 mm
Height	125 mm	125 mm	125 mm
Depth	117 mm	117 mm	117 mm
Weights			
Weight, approx.	360 g	360 g	360 g

Article number	6ES7195-7HD10-0XA0 ET200M, Bus Unit f. 2 IM 153-2 red.
Dimensions	
Width	97 mm
Height	92 mm
Depth	30 mm
Weights	
Weight, approx.	133 g

Article number	6ES7195-7HA00-0XA0 ET200M, Bus Unit f. PS and IM 153	6ES7195-7HB00-0XA0 ET200M, Bus Unit f. 2 40mm I/O Modules	6ES7195-7HC00-0XA0 ET200M, Bus Unit f. 1 80mm I/O Module
Dimensions			
Width	97 mm	97 mm; 80 mm when installed	97 mm; 80 mm when installed
Height	92 mm	92 mm	92 mm
Depth	30 mm	30 mm	30 mm
Weights			
Weight, approx.	111 g	140 g	127 g

Overview



- For connecting ET 200M to PROFINET IO (via copper line, RJ45) as an IO device
- 2 versions:
 - IM 153-4 PN STANDARD
 - IM 153-4 PN HIGH FEATURE: supports, in contrast to the STANDARD version, the operation of PROFIsafe F and HART modules. The operation of an S7-400H high availability PLC (system redundancy) is also possible.
- Integrated 2-port switch
- 12 modules per station
- Usable I/O capacity: 192 bytes each
- Active bus backplane to hot-swap modules available as an option
- Baud rate 10 Mbps / 100 Mbps (autonegotiation / full duplex)
- I&M functions according to PNO Guideline Order No. 3.502, Version V1.1

Note:

Micro Memory Card with at least 64 KB required if not all the stations in the network support LLDP (Link Layer Discovery Protocol; proximity detection).

Ordering data

	Article No.
IM 153-4 PN interface module	
IO device to connect an ET 200M to PROFINET	
Standard	6ES7153-4AA01-0XB0
High Feature	6ES7153-4BA00-0XB0
Accessories	
Bus modules for ET 200M	
• For accommodating a power supply and an IM 153 module for the hot-swapping function during RUN, incl. bus module cover	6ES7195-7HA00-0XA0
• For accommodating two 40 mm-wide I/O modules for the hot-swapping function	6ES7195-7HB00-0XA0
• For accommodating one 80 mm-wide I/O module for the hot-swapping function	6ES7195-7HC00-0XA0
SIMATIC Micro Memory Card	
64 KB ¹⁾	6ES7953-8LF31-0AA0
SIMATIC DP DIN rail for ET 200M	
Accommodates bus modules; for hot-swapping function	
• Length: 483 mm (19")	6ES7195-1GA00-0XA0
• Length: 530 mm	6ES7195-1GF30-0XA0
• Length: 620 mm	6ES7195-1GG30-0XA0
• Length: 2 000 mm	6ES7195-1GC00-0XA0
SIMATIC S7-300 DIN rail	
Length: 160 mm	6ES7390-1AB60-0AA0
Length: 480 mm (19")	6ES7390-1AE80-0AA0
Length: 530 mm	6ES7390-1AF30-0AA0
Length: 830 mm	6ES7390-1AJ30-0AA0
Length: 2000 mm	6ES7390-1BC00-0AA0
Power supply connector	
For connection of the 24 V DC supply voltage; spare part, 1 pack containing 10 units	
Spring-loaded connections	6ES7193-4JB00-0AA0

	Article No.
S7 Manual Collection	6ES7998-8XC01-8YE0
Electronic manuals on DVD, multilingual: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	
S7 Manual Collection update service for 1 year	6ES7998-8XC01-8YE2
Scope of supply: Current DVD S7 Manual Collection and the three subsequent updates	
Industrial Ethernet FC RJ45 plug 180	
RJ45 plug connector for Industrial Ethernet with a rugged metal enclosure and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; with 180° cable outlet	
1 unit	6GK1901-1BB10-2AA0
10 units	6GK1901-1BB10-2AB0
50 units	6GK1901-1BB10-2AE0
Industrial Ethernet FastConnect installation cables	
• FastConnect standard cable	6XV1840-2AH10
• FastConnect trailing cable	6XV1840-3AH10
• FastConnect marine cable	6XV1840-4AH10
Industrial Ethernet FastConnect	
Stripping tool	6GK1901-1GA00

¹⁾ To operate the IM153-4, an MMC is required with at least 64 KB memory. Cards with higher memory capacity may also be used.

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M**Interface modules > IM 153-4 PN****Technical specifications**

Article number	6ES7153-4AA01-0XB0 IM153-4 PN IO for 12 Modules S7-300	6ES7153-4BA00-0XB0 IM153-4 PN IO HF for 12 Modules S7-300
General information		
Product type designation	IM 153-4 PN ST	IM 153-4 PN HF
Supply voltage		
Rated value (DC)	24 V	24 V
external protection for power supply lines (recommendation)	In a construction with grounded reference potential, a fuse is necessary for redundant interface modules (Recommendation: 2.5 A)	In a construction with grounded reference potential, a fuse is necessary for redundant interface modules (Recommendation: 2.5 A)
Input current		
Current consumption, max.	600 mA; with 24 V DC supply	600 mA; with 24 V DC supply
output voltage / header		
Rated value (DC)	5 V	5 V
Output current		
for backplane bus (5 V DC), max.	1.5 A	1.5 A
Power loss		
Power loss, typ.	6 W	6 W
Address area		
Addressing volume		
• Inputs	192 byte	672 byte; Extended HART user data
• Outputs	192 byte	192 byte
Hardware configuration		
Number of modules per DP slave interface, max.	12	12
Protocols		
Bus protocol/transmission protocol	PROFINET IO	PROFINET IO
Protocols (Ethernet)		
• TCP/IP	No	Yes
• SNMP		Yes
• LLDP		Yes
• ping		Yes
• ARP		Yes
PROFINET IO Device		
Services		
- IRT		Yes
- PROFIenergy		No
- Prioritized startup		Yes
- Shared device		Yes
- Number of IO Controllers with shared device, max.		2
Redundancy mode		
• PROFINET system redundancy (S2)	No	Yes; on S7-400H
Media redundancy		
- MRP	Yes	Yes
Interrupts/diagnostics/ status information		
Diagnostics indication LED		
• LINK LED	Yes; green LED	Yes; green LED
• RX/TX LED	Yes; Yellow LED	Yes; Yellow LED
• for module diagnostics	Yes	Yes
Potential separation		
Potential separation exists	Yes	Yes; Only direction PROFINET, RWB is not separated
Degree and class of protection		
IP degree of protection	IP20	IP20

Technical specifications

Article number	6ES7153-4AA01-0XB0 IM153-4 PN IO for 12 Modules S7-300	6ES7153-4BA00-0XB0 IM153-4 PN IO HF for 12 Modules S7-300
Ambient conditions		
Ambient temperature during operation		
• min.	0 °C	0 °C
• max.	60 °C	60 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	2 000 m	2 000 m
Dimensions		
Width	40 mm	40 mm
Height	125 mm	125 mm
Depth	118 mm	118 mm
Weights		
Weight, approx.	215 g	215 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M

Interface modules > SIPLUS ET 200M IM 153-1/153-2**Overview****Note:**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

For technical documentation on SIPLUS, see:

<http://www.siemens.com/siplus-extreme>

Ordering data**Article No.****Article No.****SIPLUS ET 200M IM 153-1**

Slave interface module for connecting an ET 200M to PROFIBUS DP for a maximum of 8 S7-300 modules

- Extended temperature range and exposure to environmental substances

6AG1153-1AA03-2XB0**SIPLUS ET 200M IM 153-2 High Feature**

Slave interface module for connecting an ET 200M to PROFIBUS DP for a maximum of 12 S7-300 modules; also for use in redundant systems

- Extended temperature range and exposure to environmental substances

6AG1153-2BA10-7XB0**Bus module for SIPLUS ET 200M**

Bus module for accommodating a power supply and an IM 153 module for the hot-swapping function during RUN, incl. bus module cover

- Extended temperature range and exposure to environmental substances

6AG1195-7HA00-2XA0

Bus module for accommodating two 40 mm-wide I/O modules for the hot-swapping function

- Extended temperature range and exposure to environmental substances

6AG1195-7HB00-7XA0

Bus module for accommodating one 80 mm-wide I/O module for the hot-swapping function

- Extended temperature range and exposure to environmental substances

6AG1195-7HC00-2XA0

Bus module for accommodating two IM 153 modules for the hot-swapping function; for setting up redundant systems

- Extended temperature range and exposure to environmental substances

6AG1195-7HD10-2XA0**RS 485 bus connector with 90° cable outlet**

Max. transfer rate 12 Mbps

Extended temperature range and exposure to environmental substances

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0**6AG1972-0BB12-2XA0****Other accessories**

see SIMATIC ET 200M IM 153-1/153-2, page 10/336

Technical specifications

Article number	6AG1153-1AA03-2XB0	6AG1153-2BA10-7XB0
Based on	6ES7153-1AA03-0XB0 SIPLUS IM153-1	6ES7153-2BA10-0XB0 SIPLUS ET200M IM153-2 HF
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C; = Tmin	-40 °C; = Tmin; Startup @ -25 °C
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax
• At cold restart, min.	-25 °C	-25 °C
Ambient temperature during storage/transportation		
• min.	-40 °C	-40 °C
• max.	70 °C	70 °C

Technical specifications

Article number	6AG1153-1AA03-2XB0	6AG1153-2BA10-7XB0		
Based on	6ES7153-1AA03-0XB0 SIPLUS IM153-1	6ES7153-2BA10-0XB0 SIPLUS ET200M IM153-2 HF		
Altitude during operation relating to sea level				
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)		
Relative humidity				
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)		100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	
Resistance				
Use in stationary industrial systems				
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *		Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *	
Use on ships/at sea				
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *		Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	
Usage in industrial process technology				
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)		Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
Remark				
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!		* The supplied plug covers must remain in place over the unused interfaces during operation!	
Article number	6AG1195-7HA00-2XA0	6AG1195-7HB00-7XA0	6AG1195-7HC00-2XA0	6AG1195-7HD10-2XA0
Based on	6ES7195-7HA00-0XA0 SIPLUS ET200M bus modul	6ES7195-7HB00-0XA0 SIPLUS ET200M bus modul 2X40	6ES7195-7HC00-0XA0 SIPLUS ET200M bus modul	6ES7195-7HD10-0XA0 SIPLUS ET200M bus modul
Ambient conditions				
Ambient temperature during operation				
<ul style="list-style-type: none"> min. max. 	-40 °C; = Tmin 70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	-40 °C; = Tmin 70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	-40 °C; = Tmin 70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	-40 °C; = Tmin 70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use
Ambient temperature during storage/transportation				
<ul style="list-style-type: none"> min. max. 	-40 °C 70 °C	-40 °C 70 °C	-40 °C 70 °C	-40 °C 70 °C
Altitude during operation relating to sea level				
<ul style="list-style-type: none"> Installation altitude above sea level, max. Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M**Interface modules > SIPLUS ET 200M IM 153-1/153-2****Technical specifications**

Article number	6AG1195-7HA00-2XA0	6AG1195-7HB00-7XA0	6AG1195-7HC00-2XA0	6AG1195-7HD10-2XA0
Based on	6ES7195-7HA00-0XA0 SIPLUS ET200M bus modul	6ES7195-7HB00-0XA0 SIPLUS ET200M bus modul 2X40	6ES7195-7HC00-0XA0 SIPLUS ET200M bus modul	6ES7195-7HD10-0XA0 SIPLUS ET200M bus modul
Relative humidity				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance				
Use in stationary industrial systems				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

Overview



- Integrated 2-port switch
- 12 modules per station
- Usable I/O quantity structure: 192 bytes each
- Active backplane bus for hot swapping of modules optionally available
- Baud rate 10 Mbps / 100 Mbps (Autonegotiation/Full Duplex)
- I&M functions according to PNO Guideline Order-No. 3.502, Version V1.1

Notes:

Micro Memory Card with min. 64 KB required if not all participants in the network support LLDP (Link Layer Discovery Protocol; neighbor detection).

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

For technical documentation on SIPLUS, see:
<http://www.siemens.com/siplus-extreme>

- For connection of ET 200M as IO device to PROFINET IO (via copper, RJ45)
- 2 versions:
 - IM 153-4 PN STANDARD
 - IM 153-4 PN HIGH FEATURE: additionally to the STANDARD version, operation of PROFI-safe F and HART modules

Ordering data

Article No.

Article No.

SIPLUS ET 200M IM 153-4 PN

(Extended temperature range and exposure to environmental substances)

Slave interface module for connecting an ET 200M to PROFINET for a maximum of 12 S7-300 modules

- Standard
- High Feature

6AG1153-4AA01-7XB0
6AG1153-4BA00-7XB0

Accessories**IE FC RJ45 plug 180**

180° cable outlet; 1 unit

6AG1901-1BB10-7AA0**Other accessories**

See SIMATIC ET 200M IM 153-4 PN interface module, page 10/339

Technical specifications

Article number	6AG1153-4AA01-7XB0	6AG1153-4BA00-7XB0
Based on	6ES7153-4AA01-0XB0 SIPLUS ET200M IM 153-4 PN IO	6ES7153-4BA00-0XB0 SIPLUS ET200M IM153-4 PN IO HF
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C; = Tmin	-40 °C; = Tmin; Startup @ -25 °C
• max.	70 °C; = Tmax; 60 °C @ UL/cUL, ATEX and FM use	70 °C; = Tmax; Tmax > 60 °C output current for backplane bus (5 V DC) max. 0.9 A
• At cold restart, min.		-25 °C
Ambient temperature during storage/transportation		
• min.	-40 °C	-40 °C
• max.	70 °C	70 °C
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M**Interface modules > SIPLUS ET 200M IM 153-4 PN IO****Technical specifications**

Article number	6AG1153-4AA01-7XB0	6AG1153-4BA00-7XB0
Based on	6ES7153-4AA01-0XB0 SIPLUS ET200M IM 153-4 PN IO	6ES7153-4BA00-0XB0 SIPLUS ET200M IM153-4 PN IO HF
Relative humidity		
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance		
Use in stationary industrial systems		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 to chemically active substances according to EN 60721-3-3 to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea		
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-6 to chemically active substances according to EN 60721-3-6 to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology		
<ul style="list-style-type: none"> Against chemically active substances acc. to EN 60654-4 Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark		
<ul style="list-style-type: none"> Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!

Overview Digital modules

- Digital inputs and outputs
- For flexible adaptation of the controller to the respective task
- For connecting digital sensors and actuators

For further information, see SIMATIC S7-300, chapter 5.

Overview Analog modules

- Analog inputs and outputs
- For solving even complex tasks with analog process signals
- For connecting analog actuators and sensors without additional measuring amplifiers

For further information, see SIMATIC S7-300, chapter 5.

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M

I/O modules > Analog modules with HART > Analog input module with HART

Overview



- Can only be plugged into ET 200M with IM 153-2 and IM 153-2 FO
- 8 AI HART
- Redundancy switching
- Firmware update
- HART minor variables

Ordering data

SM 331 HART analog input module

8 inputs, 0/4 – 20 mA, HART for ET 200M with IM 153-2 interface module

Accessories

Front connectors

- 20-pin, with screw contacts
 - 1 unit
 - 100 units
- 20-pin, with spring-loaded terminals
 - 1 unit
 - 100 units

LK 393 cable guide

Mandatory for operation in hazardous areas

SIMATIC DP DIN rail for ET 200M

For mounting of up to 5 bus modules for

- Length: 483 mm (19")
- Length: 530 mm

Article No.

6ES7331-7TF01-0AB0

6ES7392-1AJ00-0AA0
6ES7392-1AJ00-1AB0

6ES7392-1BJ00-0AA0
6ES7392-1BJ00-1AB0

6ES7393-4AA00-0AA0

6ES7195-1GA00-0XA0
6ES7195-1GF30-0XA0

Article No.

SIMATIC S7-300 DIN rail

- Length: 160 mm
- Length: 480 mm (19")
- Length: 530 mm
- Length: 830 mm
- Length: 2000 mm

Label cover

(10 units, spare part) for signal modules (not 32-channel modules), function modules and CPU 312 IFM

Labeling strips

(10 units, spare part) for signal modules (not 32-channel modules), function modules and CPU 312 IFM

Labeling sheets for machine printing

For modules with 20-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

Light beige

Yellow

Red

6ES7390-1AB60-0AA0
6ES7390-1AE80-0AA0
6ES7390-1AF30-0AA0
6ES7390-1AJ30-0AA0
6ES7390-1BC00-0AA0

6ES7392-2XY00-0AA0

6ES7392-2XX00-0AA0

6ES7392-2AX00-0AA0

6ES7392-2BX00-0AA0

6ES7392-2CX00-0AA0

6ES7392-2DX00-0AA0

Technical specifications

Article number	6ES7331-7TF01-0AB0 SM331, 8AI, 0/4-20MA HART
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
Input current	
from load voltage L+ (without load), max.	20 mA
from backplane bus 5 V DC, max.	120 mA
output voltage / header	
supply voltage of the transmitters / header	
• present	Yes
• supply voltage / of the transmitters / at DC / rated value	24 V
• short-circuit proof	Yes
• Supply current, max.	60 mA
Power loss	
Power loss, typ.	1.5 W
Analog inputs	
Number of analog inputs	8
permissible input current for current input (destruction limit), max.	40 mA
Input ranges (rated values), currents	
• 0 to 20 mA	Yes
Cable length	
• shielded, max.	800 m
Analog value generation for the inputs	
Measurement principle	Sigma Delta
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
• Integration time, parameterizable	Yes
• Integration time (ms)	20 ms at 50 Hz; 16.6 ms at 60 Hz; 100 ms at 100 Hz
• Basic conversion time, including integration time (ms)	55 ms @ 60 Hz, 65 ms @ 50 Hz, 305 ms @ 100 Hz
• Interference voltage suppression for interference frequency f1 in Hz	10 / 50 / 60 Hz
Smoothing of measured values	
• parameterizable	Yes

Article number	6ES7331-7TF01-0AB0 SM331, 8AI, 0/4-20MA HART
Encoder	
Connection of signal encoders	
• for current measurement as 2-wire transducer	Yes
• for current measurement as 4-wire transducer	Yes
Errors/accuracies	
Operational error limit in overall temperature range	
• Current, relative to input range, (+/-)	0.15 %
Basic error limit (operational limit at 25 °C)	
• Current, relative to input range, (+/-)	0.1 %
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
• Limit value alarm	Yes
Degree and class of protection	
IP degree of protection	IP20
connection method	
required front connector	20-pin
Dimensions	
Width	40 mm
Height	125 mm
Depth	117 mm
Weights	
Weight, approx.	205 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M

I/O modules > Analog modules with HART > Analog output module with HART

Overview



- For plugging into ET 200M exclusively with IM 153-2 and IM 153-2 FO
- 8 AO HART
- Redundancy switching
- Firmware update
- HART minor variables

Ordering data

SM 332 HART analog output module

HART analog output,
8 outputs, 0/4 – 20 mA,
HART for ET 200M with IM 153-2

Accessories

Front connector (1 unit)

20-pin, with screw contacts

LK 393 cable guide

Mandatory for operation in hazardous areas

SIMATIC DP DIN rail for ET 200M

For mounting of up to 5 bus modules for

- Length: 483 mm
- Length: 530 mm

SIMATIC S7-300 DIN rail

- Length: 160 mm
- Length: 480 mm
- Length: 530 mm
- Length: 830 mm
- Length: 2000 mm

Label cover

(10 units, spare part)
for signal modules
(not 32-channel modules),
function modules
and CPU 312 IFM

Labeling strips

(10 units, spare part)
for signal modules
(not 32-channel modules),
function modules
and CPU 312 IFM

Article No.

6ES7332-8TF01-0AB0

6ES7392-1AJ00-0AA0

6ES7393-4AA00-0AA0

6ES7195-1GA00-0XA0

6ES7195-1GF30-0XA0

6ES7390-1AB60-0AA0

6ES7390-1AE80-0AA0

6ES7390-1AF30-0AA0

6ES7390-1AJ30-0AA0

6ES7390-1BC00-0AA0

6ES7392-2XY00-0AA0

6ES7392-2XX00-0AA0

Article No.

S7 Manual Collection

Electronic manuals on DVD,
multi-language:
All manuals for
S7-1200/1500/200/300/400, LOGO!,
SIMATIC DP, PC, PG, STEP 7,
Engineering SW, Runtime SW,
SIMATIC HMI, SIMATIC NET,
SIMATIC IDENT

S7 Manual Collection update service for 1 year

Scope of supply: Current DVD S7
Manual Collection and the three
subsequent updates

Labeling sheets for machine labeling

For modules with 20-pin front
connector, DIN A4, for printing with
laser printer;
10 units

Petrol

Light beige

Yellow

Red

6ES7998-8XC01-8YE0

6ES7998-8XC01-8YE2

6ES7392-2AX00-0AA0

6ES7392-2BX00-0AA0

6ES7392-2CX00-0AA0

6ES7392-2DX00-0AA0

Technical specifications

Article number	6ES7332-8TF01-0AB0 SM332, 8AO, 0/4 - 20MA HART	
Supply voltage		
Load voltage L+		
• Rated value (DC)	24 V	
Input current		
from load voltage L+ (without load), max.	350 mA	
from backplane bus 5 V DC, max.	110 mA	
Power loss		
Power loss, typ.	6 W	
Analog outputs		
Number of analog outputs	8	
Current output, no-load voltage, max.	24 V	
Output ranges, current		
• 0 to 20 mA	Yes	
• -20 mA to +20 mA	No	
• 4 mA to 20 mA	Yes	
Connection of actuators		
• for current output two-wire connection	Yes	
Load impedance (in rated range of output)		
• with current outputs, max.	750 Ω	
• with current outputs, inductive load, max.	10 mH	
Cable length		
• shielded, max.	800 m	
Analog value generation for the outputs		
Integration and conversion time/resolution per channel		
• Resolution with overrange (bit including sign), max.	16 bit	
• Basic execution time of the module (all channels released)	10 ms; 10 ms in AO mode 50 ms in HART-AO mode	
Settling time		
• for resistive load	0.1 ms	
• for inductive load	0.5 ms	

Article number	6ES7332-8TF01-0AB0 SM332, 8AO, 0/4 - 20MA HART	
Errors/accuracies		
Operational error limit in overall temperature range		
• Current, relative to output range, (+/-)	0.2 %	
Basic error limit (operational limit at 25 °C)		
• Current, relative to output range, (+/-)	0.1 %	
Interrupts/diagnostics/status information		
Diagnostics function	Yes	
Alarms		
• Diagnostic alarm	Yes	
Degree and class of protection		
IP degree of protection	IP20	
connection method		
required front connector	20-pin	
Dimensions		
Width	40 mm	
Height	125 mm	
Depth	117 mm	
Weights		
Weight, approx.	220 g	

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M

I/O modules > Analog modules with HART > Ex-analog input module with HART

Overview



- For connecting HART devices in hazardous areas.
- Can only be plugged into ET 200M
- 2 AI HART, Ex
- 2 inputs in 2 channel groups (single-channel isolation)
- Measurement type and range can be selected for each channel
- Diagnostics and diagnostic alarm parameterizable

Ordering data

SM 331 HART analog input module

2 inputs, 0/4 – 20 mA, HART for ET 200M with IM 153-2 interface module

For HART protocol V5.0 and higher

6ES7331-7TB10-0AB0

Accessories

Front connector¹⁾

20-pin, with screw contacts

- 1 unit
- 100 units

6ES7392-1AJ00-0AA0
6ES7392-1AJ00-1AB0

LK 393 cable guide

Mandatory for operation in hazardous areas

6ES7393-4AA00-0AA0

SIMATIC DP DIN rail for ET 200M

For mounting of up to 5 bus modules for

- Length: 483 mm
- Length: 530 mm

6ES7195-1GA00-0XA0
6ES7195-1GF30-0XA0

Article No.

SIMATIC S7-300 DIN rail

- Length: 160 mm
- Length: 480 mm (19")
- Length: 530 mm
- Length: 830 mm
- Length: 2 000 mm

6ES7390-1AB60-0AA0
6ES7390-1AE80-0AA0
6ES7390-1AF30-0AA0
6ES7390-1AJ30-0AA0
6ES7390-1BC00-0AA0

Label cover

(10 units, spare part) for signal modules (not 32-channel modules), function modules and CPU 312 IFM

6ES7392-2XY00-0AA0

Labeling strips

(10 units, spare part) for signal modules (not 32-channel modules), function modules and CPU 312 IFM

6ES7392-2XX00-0AA0

Labeling sheets for machine printing

For modules with 20-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

6ES7392-2AX00-0AA0

Light beige

6ES7392-2BX00-0AA0

Yellow

6ES7392-2CX00-0AA0

Red

6ES7392-2DX00-0AA0

¹⁾ A connector with spring-loaded terminals cannot be used if the cable guide is used.

Technical specifications

Article number	6ES7331-7TB10-0AB0 SM331, 2AI, 0/4-20MA HART
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
Input current	
from load voltage L+ (without load), max.	180 mA
from backplane bus 5 V DC, max.	100 mA
output voltage / header	
supply voltage of the transmitters / header	
• present	Yes
• supply voltage / of the transmitters / at DC / rated value	15 V; at 22 mA
• short-circuit proof	Yes; approx. 30 mA
• No-load voltage (DC)	29.6 V
Power loss	
Power loss, typ.	4.5 W
Analog inputs	
Number of analog inputs	2
permissible input current for current input (destruction limit), max.	40 mA
Input ranges (rated values), currents	
• 0 to 20 mA	Yes
• 4 mA to 20 mA	Yes
Cable length	
• shielded, max.	400 m
Analog value generation for the inputs	
Measurement principle	Sigma Delta
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit; 10 bit to 15 bit + sign
• Integration time, parameterizable	Yes
• Integration time (ms)	2.5 / 16.67 / 20 / 100 ms
• Basic conversion time, including integration time (ms)	2.5 / 16.67 / 20 / 100 (1 channel enabled); 7.5 / 50 / 60 / 300 (2 channels enabled)
• Interference voltage suppression for interference frequency f1 in Hz	10 / 50 / 60 / 400 Hz
Encoder	
Connection of signal encoders	
• for current measurement as 2-wire transducer	Yes
• for current measurement as 4-wire transducer	Yes

Article number	6ES7331-7TB10-0AB0 SM331, 2AI, 0/4-20MA HART
Errors/accuracies	
Operational error limit in overall temperature range	
• Current, relative to input range, (+/-)	0.45 %; From 0/4 to 20 mA
Basic error limit (operational limit at 25 °C)	
• Current, relative to input range, (+/-)	0.1 %; From 0/4 to 20 mA
Interrupts/diagnostics/status information	
Diagnostics function	Yes; Parameterizable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
• Limit value alarm	Yes; Parameterizable, channels 0 and 1
Ex(i) characteristics	
Module for Ex(i) protection	Yes
maximum values for connecting terminals for gas group IIC	
• Uo (no-load voltage), max.	26 V
• Io (short-circuit current), max.	96.1 mA
• Po (power output), max.	511 mW
• Co (permissible external capacity), max.	62 nF
• Lo (permissible external inductivity), max.	3 mH
• Um (voltage at non-intrinsically safe connecting terminals), max.	250 V; DC
Standards, approvals, certificates	
CE mark	Yes
UL approval	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
Use in hazardous areas	
• ATEX marking	ATEX II 3 G (2) GD Ex nA [ib Gb] [ib IIC Db] IIC T4 Gc
• FM marking	Class I, Division 2, Group A, B, C, D T4; Class I, Zone 2, Group IIC T4
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	60 °C
connection method	
required front connector	1x 20-pin
Dimensions	
Width	40 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	260 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M

I/O modules > Analog modules with HART > Ex-analog output module with HART

Overview



- For using HART devices in hazardous areas
- Can only be plugged into ET 200M
- 2 AO HART, Ex
- 2 current outputs in 2 channel groups (single-channel isolation)
- Output type and range can be selected for each channel
- Diagnostics and diagnostic alarm parameterizable
- Read-back capability of the analog outputs

Ordering data

SM 332 HART analog output module

HART analog output, 8 outputs, 0/4 – 20 mA, HART for ET 200M with IM 153-2

For HART protocol V5.0 and higher

Article No.

6ES7332-5TB10-0AB0

Accessories

Front connector

20-pin, with screw contacts

- 1 unit
- 100 units

6ES7392-1AJ00-0AA0

6ES7392-1AJ00-1AB0

LK 393 cable guide

Mandatory for operation in hazardous areas

6ES7393-4AA00-0AA0

SIMATIC DP DIN rail for ET 200M

For mounting of up to 5 bus modules for

- Length: 483 mm (19")
- Length: 530 mm

6ES7195-1GA00-0XA0

6ES7195-1GF30-0XA0

SIMATIC S7-300 DIN rail

- Length: 160 mm
- Length: 480 mm (19")
- Length: 530 mm
- Length: 830 mm
- Length: 2000 mm

6ES7390-1AB60-0AA0

6ES7390-1AE80-0AA0

6ES7390-1AF30-0AA0

6ES7390-1AJ30-0AA0

6ES7390-1BC00-0AA0

Label cover

(10 units, spare part) for signal modules (not 32-channel modules), function modules and CPU 312 IFM

6ES7392-2XY00-0AA0

Article No.

Labeling strips

(10 units, spare part) for signal modules (not 32-channel modules), function modules and CPU 312 IFM

6ES7392-2XX00-0AA0

Software for machine labeling of modules directly from the STEP 7 project

Labeling sheets for machine labeling

For modules with 20-pin front connector, DIN A4, for printing with laser printer; 10 units

Petrol

6ES7392-2AX00-0AA0

Light beige

6ES7392-2BX00-0AA0

Yellow

6ES7392-2CX00-0AA0

Red

6ES7392-2DX00-0AA0

S7 Manual Collection

Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

6ES7998-8XC01-8YE0

S7 Manual Collection update service for 1 year

Scope of supply: Current DVD S7 Manual Collection and the three subsequent updates

6ES7998-8XC01-8YE2

10

Technical specifications

Article number	6ES7332-5TB10-0AB0 SM332, 2AO, 0/4 - 20MA HART
Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
Input current	
from load voltage L+ (without load), max.	150 mA
from backplane bus 5 V DC, max.	100 mA
Power loss	
Power loss, typ.	3.5 W
Analog outputs	
Number of analog outputs	2
Current output, no-load voltage, max.	19 V
Cycle time (all channels) max.	5 ms
Output ranges, current	
• 0 to 20 mA	Yes
• -20 mA to +20 mA	No
• 4 mA to 20 mA	Yes
Connection of actuators	
• for current output two-wire connection	Yes
Load impedance (in rated range of output)	
• with current outputs, max.	650 Ω
• with current outputs, inductive load, max.	7.5 mH
Cable length	
• shielded, max.	400 m
Analog value generation for the outputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	12 bit; + sign
• Conversion time (per channel)	40 ms
Settling time	
• for resistive load	2.5 ms
• for capacitive load	4 ms
• for inductive load	2.5 ms

Article number	6ES7332-5TB10-0AB0 SM332, 2AO, 0/4 - 20MA HART
Errors/accuracies	
Operational error limit in overall temperature range	
• Current, relative to output range, (+/-)	0.55 %
Basic error limit (operational limit at 25 °C)	
• Current, relative to output range, (+/-)	0.15 %
Interrupts/diagnostics/status information	
Diagnostics function	Yes; Parameterizable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Ex(i) characteristics	
Module for Ex(i) protection	Yes
maximum values for connecting terminals for gas group IIC	
• U _o (no-load voltage), max.	19 V
• I _o (short-circuit current), max.	66 mA
• P _o (power output), max.	506 mW
• C _o (permissible external capacity), max.	230 nF
• L _o (permissible external inductivity), max.	7.5 mH
• U _m (voltage at non-intrinsically safe connecting terminals), max.	60 V; DC
Degree and class of protection	
IP degree of protection	IP20
Standards, approvals, certificates	
FM approval	Yes
Use in hazardous areas	
• ATEX marking	ATEX II 3 G (2) GD Ex nA [ib Gb] [ib IIIC Db] IIC T4 Gc
• FM marking	Class I, Division 2, Group A, B, C, D T4; Class I, Zone 2, Group IIC T4
Ambient conditions	
Ambient temperature during operation	
• max.	60 °C
connection method	
required front connector	20-pin
Dimensions	
Width	40 mm
Height	125 mm
Depth	120 mm
Weights	
Weight, approx.	290 g

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M**I/O modules > Analog modules with HART > SIPLUS S7-300 analog input module with HART****Overview**

- Can only be plugged into ET 200M with IM 153-2 and IM 153-2 FO
- 8 AI HART
- Redundant connection
- Firmware update
- HART secondary variables

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

For technical documentation on SIPLUS, see:

<http://www.siemens.com/siplus-extreme>

Ordering data**Article No.****SIPLUS SM 331
analog input module with HART**

8 inputs, 0/4 – 20 mA,
HART for ET 200M with
IM 153-2 interface module

Extended temperature range and
exposure to environmental
substances

6AG1331-7TF01-7AB0**Accessories**

See SIMATIC ET 200M
analog input module with
HART, page 10/348

Technical specifications

Article number	6AG1331-7TF01-7AB0
Based on	6ES7331-7TF01-0AB0 SIPLUS S7-300 SM 331 8AI HART
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C; = Tmin
• max.	70 °C; = Tmax; 60 °C @ UL/cUL use
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Resistance	
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!

Overview



- Can only be plugged onto ET 200M with IM 153-2 and IM 153-2 FO
- 8 AO HART
- Redundant connection
- Firmware update
- HART secondary variables

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

For technical documentation on SIPLUS, see:

<http://www.siemens.com/siplus-extreme>

Ordering data

Article No.

SIPLUS SM 332**analog output module with HART**

8 outputs, 0/4 ... 20 mA HART,
for ET 200M with IM 153-2
interface module

Extended temperature range and
exposure to environmental
substances

6AG1332-8TF01-2AB0

Accessories

See SIMATIC SM 332
analog output module with
HART, page 10/350

Technical specifications

Article number	6AG1332-8TF01-2AB0
Based on	6ES7332-8TF01-0AB0 SIPLUS S7-300 SM 332 HART
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C; = Tmin
• max.	60 °C; = Tmax
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Resistance	
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M

I/O modules > F-digital/analog modules, Ex modules

Overview F-digital/analog modules



The fail-safe SIMATIC S7 CPUs and the fail-safe signal modules of SIMATIC ET 200S, ET 200pro, ET 200eco and ET 200M have been specially developed for distributed, safety-related applications in production engineering. Thanks to the discreetly modular structure of the fail-safe I/Os, safety technology only has to be applied where actually required. The new system replaces conventional electromechanical components, such as:

- Freely programmable, safe linking of sensors to actuators
- Selective safe shutdown of actuators
- Mixed configuration of F-modules and standard modules in a station
- Single-bus concept; fail-safe signals and standard signals are transferred over a single bus medium (PROFIBUS DP, PROFINET)

Totally Integrated Automation (TIA)

Safety technology (Safety Integrated) is a component of Totally Integrated Automation which provides total integration of safety automation and standard automation (SIMATIC S7).

Whereas standard automation (classical PLCs) and safety automation (electromechanics) are still separate today, these two worlds are growing together into a uniform, integrated overall system.

Siemens can therefore present itself as a complete supplier for automation technology in which safety engineering is part of standard automation and system-wide integration exists.

For further information, see SIMATIC S7-300, chapter 5.

Overview Ex modules



- Input/output modules for applications in chemical plants with explosion hazards
- For connecting sensors and actuators from zones 1 and 2 of plants with explosion hazards
- Associated electrical equipment Ex [ib] [ibD] IIC
- For separating the non-intrinsically-safe electrical circuits of the automation system and the intrinsically-safe electrical circuits of the process

For further information, see SIMATIC S7-300, chapter 5.

Overview

Function modules unburden the CPU of work-intensive tasks such as counting, positioning and controlling

Module spectrum

- Counter modules
- Positioning modules for rapid traverse and creep speed drives
- SSI position detection modules
- Electronic cam controllers
- High-speed Boolean processor
- Controller modules

Function modules	
Counting	FM 350-1 counter module
	FM 350-2 counter module
Positioning	FM 351 positioning module
• of rapid traverse and creep speed drives	
Position and path control	FM 357-2 path and position control module ¹⁾
SSI position detection	SM 338 POS input modules
Electronic cam control	FM 352 electronic cam controller
High speed logic operation	FM 352-5 high-speed Boolean processor
Controlling	FM 355 controller module
	FM 355-2 temperature controller module
Weighing and dosing electronics	SIWAREX

¹⁾ Not for ET 200M

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200M

I/O modules > Function modules

Overview

Applicability with ET 200M distributed I/O device

Almost all function modules can be used in the ET 200M distributed I/O device. In doing so, the following details must be observed:

Module	Article No.	For plugging in behind IM 153-1 (6ES7 153-1AA03-0XB0)		For plugging in behind IM 153-2 (6ES7 153-2BA02-0XB0)		For plugging in behind IM 153-2 FO (6ES7 153-2BB00-0XB0)		For plugging in behind IM 153-4 PN (6ES7 153- 4AA00-0XB0)
		STEP 7 ¹⁾	GSD ²⁾	STEP 7 ¹⁾	GSD ²⁾	STEP 7 ¹⁾	GSD ²⁾	STEP 7 ¹⁾
		configurable with						
FM 350-1 counter module	6ES7 350-1AH03-0AEO	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>
FM 350-2 counter module	6ES7 350-2AH01-0AEO	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>
FM 351 positioning module	6ES7 351-1AH01-0AEO	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>
FM 352 cam controller	6ES7 352-1AH02-0AEO	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>
FM 352-5 high-speed Boolean processor	6ES7 352-5AH00-0AEO	<input type="checkbox"/> ³⁾	<input type="checkbox"/>	<input type="checkbox"/> ³⁾	<input type="checkbox"/>	<input type="checkbox"/> ³⁾	<input type="checkbox"/>	<input type="checkbox"/>
FM 352-5 high-speed Boolean processor	6ES7 352-5AH10-0AEO	<input type="checkbox"/> ³⁾	<input type="checkbox"/>	<input type="checkbox"/> ³⁾	<input type="checkbox"/>	<input type="checkbox"/> ³⁾	<input type="checkbox"/>	<input type="checkbox"/>
FM 355 C controller module	6ES7 355-0VH10-0AEO	--	--	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>
FM 355 S controller module	6ES7 355-1VH10-0AEO	--	--	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>
FM 355-2 C temperature controller module	6ES7 355-2CH00-0AEO	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>
FM 355-2 S temperature controller module	6ES7 355-2SH00-0AEO	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>	--	<input type="checkbox"/>
SM 338 POS input module	6ES7 338-4BC01-0AB0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

configurable

--: not configurable

¹⁾ Configuration using the meta-knowledge integrated into STEP 7 (in Hardware Catalog under PROFIBUS DP > ET 200M > IM 153-1 / IM 153-2 or PROFINET IO > I/O > ET 200M > IM153-4 PN).

²⁾ Configuration using GSD file (after installation of the GSD file configurable from the Hardware Catalog under PROFIBUS DP > Additional field devices > I/O > ET200M). During configuration on the CP 342-5 as DP master, S5 (IM 308C) as DP master or external masters, the GSD file must be configured.

³⁾ Visible and configurable only with the corresponding configuration package in STEP 7.

Note:

Position measuring systems and preassembled connecting cables for counting and positioning functions are offered under SIMODRIVE Sensor or Motion Connect 500, see under

<http://www.siemens.com/simatic-technology>.

For further information, see SIMATIC S7-300, chapter 5.

Overview Special modules

The special modules provide the user with functions for diagnostics, as well as commissioning.

For further information, see SIMATIC S7-300, chapter 5.

Overview Communication

- Communication boards for data exchange using point-to-point coupling
- Communication board for the connection of identification systems

For further information, see SIMATIC S7-300, chapter 5.

Overview Power supplies

- Load current supplies for S7-300/ET 200M
- For converting the line voltage to the required operating voltage (24 V DC)
- Output current 2 A, 5 A or 10 A

For further information, see SIMATIC S7-300, chapter 5.

I/O systems

SIMATIC ET 200 systems for the control cabinet

SIMATIC ET 200iSP

Overview



The ET 200iSP is a modular, intrinsically safe I/O system with IP30 degree of protection which can be operated in gas and dust atmospheres at ambient temperatures from -20 to +70 °C. It is optimized for use with SIMATIC PCS 7 and PCS neo, but can also be integrated in other systems such as SIMATIC S5 by means of GSD/GSDML file.

In accordance with ATEX directive 2014/34/EU, the ET 200iSP remote I/O stations can be installed directly in the hazardous zones 1 and 2 as well as in non-hazardous areas. The intrinsically safe sensors, actuators and HART field devices can also be located in zone 0 or 20 if necessary.

The modular design of the ET 200iSP makes it possible to optimally adapt the remote I/O stations to the respective automation task through individual configuration and flexible expansion. To increase plant availability, the pressure-encapsulated power supply and the intrinsically safe PROFINET or PROFIBUS DP connection of the stations can also be of redundant design. The intrinsically safe, optical PROFINET connection allows redundancy functions S2 and R1 as well as the setup of fail-safe MRP rings.

The modern architecture with hardwiring and automatic slot coding supports pre-wiring without the electronic modules, simple and reliable hot swapping of individual modules without a fire certificate as well as configuration in run (CiR).

In addition to analog and digital I/O modules for the automation of technological functions of the process (Basic Process Control), the range of electronic modules also includes fail-safe I/O modules for implementing safety applications. The various types of electronic module can be arranged mixed within a station. Comprehensive diagnostic options facilitate commissioning and troubleshooting.

Technical specifications

ET 200iSP – general

Degree of protection	IP30	
Ambient temperature	-20 ... +70 °C	
• Horizontal mounting position	-20 ... +70 °C	
• Other mounting positions	-20 ... +50 °C	
Exposure to environmental substances	According to ISA-S7.1.04 severity level G1; G2; G3 (except for NH3, only level G2 in this case)	
EMC	Electromagnetic compatibility according to NE21	
Vibration resistance	0.5 g continuously, 1 g periodically	
Approvals, standards		
• ATEX	II 2 G (1) GD I M2 Zone 1 Zone 1	Ex db eb [ia/ib] IIC T4 Ex db eb [ia/ib] I Ex db eb [ia/ib] IIC T4 BR-Ex db eb [ia/ib] IIC T4 NI Division 2, Groups A, B, C, D T4
• IECEX	Class I, II, III	AIS Division 1, Groups A, B, C, D, E, F, G
• INMETRO	Class I	Zone 1, AEx de [ia/ib] IIC T4 Division 2, Groups A, B, C, D T4
• cFMus	Class I, II, III	providing int. safe circuits for Division 1, Groups A, B, C, D, E, F, G
• cULus	Class I	Zone 1, AEx de [ia/ib] IIC T4
• CCC Ex	Ex de ib[ia] IIC T4 Ex de [ia/ib] IIC T4	
• PROFIBUS	EN 50170, Volume 2	
• PROFINET	IEC 61158 and IEC 61784	
• IEC	IEC 61131, Part 2	
• CE	In accordance with ATEX directive 2014/34/EU, EMC Directive 2014/30/EU and LVD-guideline 2014/35/EU	
• UKCA	According to Regulations UKSI 2016:1107	
• KCC	Korea Certification	
• Marine approval	Classification companies	
	<ul style="list-style-type: none"> • ABS (American Bureau of Shipping) • BV (Bureau Veritas) • DNV (Det Norske Veritas) • GL (Germanischer Lloyd) • LRS (Lloyds Register of Shipping) • Class NK (Nippon Kaiji Kyokai) 	

Overview



An ET 200iSP power supply unit consists of a TM-PS terminal module (A or B) and a PS power supply module which is plugged onto this. Terminal modules and power supply modules can be ordered separately.

The power supply modules are suitable for both individual operation (standard) and redundant operation. Depending on the operating mode, they must be combined with the terminal modules as follows:

- Standard: 1 × PS on TM-PS-A UC
- Redundancy: 1 × PS on TM-PS-A UC (left) plus 1 × PS on TM-PS-B UC (right)

Power supply modules are available for supplies of 24 V DC and 120/230 V AC.

The operating state of the power supply modules is indicated by two LEDs on the IM 152 interface module (one for each module).

Ordering data

Ordering data	Article No.	Ordering data	Article No.
PS 24 V DC power supply module for ET 200iSP	6ES7138-7EA01-0AA0	TM-PS-A UC terminal module For standard operation	6ES7193-7DA20-0AA0
PS 120/230 V AC power supply module for ET 200iSP	6ES7138-7EC00-0AA0	TM-PS-B UC terminal module Additional terminal module for redundant operation	6ES7193-7DB20-0AA0

Technical specifications

Article number	6ES7138-7EA01-0AA0	6ES7138-7EC00-0AA0
	ET200iSP, POWER SUPPLY MODULE	ET200iSP, POWER SUPPLY MOD. AC120/230V
Supply voltage		
Rated value (DC)	24 V	
Rated value (AC)		230 V; 120/230 V AC
Reverse polarity protection	Yes	
Line frequency		
• permissible range, lower limit		47 Hz
• permissible range, upper limit		63 Hz
Input current		
from supply voltage L+, max.	4 A	
from supply voltage L1, max.		1.04 A; at rated voltage 230 VAC:0.45A at rated voltage 120 VAC:0.75A
Interrupts/diagnostics/ status information		
Status indicator	Yes	Yes
Alarms	No	No
Diagnoses		
• Diagnostic information readable	Yes; via IM 152	Yes; via IM 152
Diagnostics indication LED		
• Group error SF (red)	No	No
Potential separation		
primary/secondary	Yes	Yes
between supply voltage and electronics	Yes	No

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200iSP

Power supply unit**Technical specifications**

Article number	6ES7138-7EA01-0AA0 ET200iSP, POWER SUPPLY MODULE	6ES7138-7EC00-0AA0 ET200iSP, POWER SUPPLY MOD. AC120/230V
Standards, approvals, certificates		
CE mark	Yes	CE 0344
BIS		Yes
Use in hazardous areas		
• ATEX marking	Ex de [ib]IIC T4	
Dimensions		
Width	60 mm	60 mm
Height	190 mm	190 mm
Depth	136.5 mm	136.5 mm
Weights		
Weight, approx.	2 700 g	2 700 g
Article number	6ES7193-7DA20-0AA0 ET200iSP, TERM.-MOD. TM-PS-A UC	6ES7193-7DB20-0AA0 ET200iSP, TERM.-MOD. TM-PS-B UC
Standards, approvals, certificates		
CE mark	Yes	Yes
Use in hazardous areas		
• ATEX marking	see ET 200iSP system	see ET 200iSP system
Dimensions		
Width	60 mm	60 mm
Height	190 mm	190 mm
Depth	52 mm	52 mm
Weights		
Weight, approx.	230 g	230 g

Overview



The IM 152 interface module realizes the connection of the ET 200iSP to a PROFINET network with an intrinsically safe multimode glass fiber-optic cable up to 100 Mbps or to PROFIBUS DP with intrinsically safe RS 485-iS transmission technology for transfer rates of up to 1.5 Mbps. A redundant connection is also possible. In this case, the ET 200iSP is connected via two interface modules to two redundant segments of a high-availability automation system (PROFINET R1 redundancy or PROFIBUS redundancy). Alternatively, the S2 redundancy function and the setup of fail-safe MRP rings is possible with PROFINET.

The IM 152 is plugged onto a special terminal module (to be ordered separately). The following terminal modules are available:

- TM-IM/IM terminal module for two interface modules (for device redundancy)
- TM-IM/EM60 terminal module for one interface module and one watchdog, reserve or electronic module (except 2 DQ relay)
 - with blue screw-type or spring-loaded terminals for hazardous environments
 - with black screw-type terminals for non-hazardous environments

Tasks of the IM 152-1PN interface module

- Connection of ET 200iSP to the intrinsically safe, optical PROFINET network
- Autonomous communication with the host automation system
- Preparation of data for the fitted electronic modules
- Backup of electronic module parameters
- Time stamping of digital process signals with an accuracy of 20 ms

Tasks of the IM 152-1DP interface module

- Connection of ET 200iSP to the intrinsically safe PROFIBUS DP
- Autonomous communication with the host automation system
- Preparation of data for the fitted electronic modules
- Backup of electronic module parameters
- Time stamping of digital process signals with an accuracy of 20 ms

The maximum address space of the interface module is 244 bytes for inputs, and 244 bytes for outputs.

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200iSP

Interface modules

Ordering data	Article No.	Ordering data	Article No.
ET 200iSP IM 152-1DP interface module	6ES7152-1AA00-0AB0	RS 485-iS coupler Isolating transformer for coupling PROFIBUS DP segments with RS 485 and RS 485-iS transmission technology	6ES7972-0AC80-0XA0
ET 200iSP IM 152-1PN interface module	6ES7152-1BA00-0AB0	Labeling sheet DIN A4, perforated, each consisting of 10 sheets of 30 strips each for electronic modules and 20 strips each for IM 152	6ES7193-7BH00-0AA0 6ES7193-7BB00-0AA0
ET 200iSP TM-IM/EM60 terminal module For an IM 152 and a watchdog, reserve or electronic module (except 2 DQ relay), including termination module		Labels, inscribed For slot numbering, label size H x W (in mm): 5 x 7	
• For hazardous environments	6ES7193-7AA00-0AA0	• 204 labels, for slots 1 to 20	8WA8361-0AB
- TM-IM/EM60S (blue screw-type terminals)	6ES7193-7AA10-0AA0	• 204 labels, for slots 1 to 40	8WA8361-0AC
- TM-IM/EM60C (blue spring-loaded terminals)	6ES7193-7AA20-0AA0	• 136 labels, inscription in plain text	8WA8348-0XA
• For non-hazardous environments		Labels, blank 136 labels for slot numbering, label size H x W (in mm): 5 x 7	8WA8348-2AY
- TM-IM/EM60S (black screw-type terminals)		S7-300 DIN rails	
ET 200iSP TM-IM/IM terminal module For two IM 152 modules (redundant operation), including termination module	6ES7193-7AB00-0AA0	• 585 mm long, suitable for assembly of ET 200iSP in a 650 mm wide wall box	6ES7390-1AF85-0AA0
Accessories		• 885 mm long, suitable for assembly of ET 200iSP in a 950 mm wide wall box	6ES7390-1AJ85-0AA0
SFP transceiver Ex	A5E51793919		
Spare part for IM 152-1PN, multimode glass fiber-optic cable, LC, 50/125 µm and 62.5/125 µm			
PROFIBUS connection plug with selectable terminating resistor For connection of IM 152-1DP to PROFIBUS DP with RS 485-iS transmission technology	6ES7972-0DA60-0XA0		

Technical specifications

Article number	6ES7193-7AA00-0AA0	6ES7193-7AA10-0AA0	6ES7193-7AA20-0AA0	6ES7193-7AB00-0AA0
	ET200iSP, TERM.-MOD. TM-IM/EM60S, SCREW	ET200iSP, TERM.-MOD. TM-IM/EM60C, SPRING	ET200iSP, TERM.-MOD. TM-IM/EM60S	ET200iSP, TERM.-MOD. TM-IM/IM F. TWO IM
Standards, approvals, certificates				
CE mark	Yes	Yes	Yes	Yes
Use in hazardous areas				
• ATEX marking	see ET 200iSP system	see ET 200iSP system		see ET 200iSP system
Dimensions				
Width	60 mm	60 mm	60 mm	60 mm
Height	190 mm	190 mm	190 mm	190 mm
Depth	52 mm	52 mm	52 mm	52 mm
Weights				
Weight, approx.	235 g	235 g	235 g	195 g

Overview

**Digital input modules**

- 8-channel digital input module DI NAMUR EEx i, for evaluation of NAMUR sensors, connected and non-connected contacts, as well as for use as counter or frequency meter
Parameterizable connections:
 - NAMUR sensor on/off
 - NAMUR changeover contact
 - Single contact connected (mechanical NO contact)
 - Changeover contact connected (mechanical changeover contact)
 - Single contact non-connected (mechanical NO contact with single contact)
 - Changeover contact non-connected (mechanical changeover contact)
 - Counting function: optional use of 2 channels for recording counter pulses or for frequency measurement
 - Short-circuit and wire-break monitoring

Digital output modules

- 4-channel digital output modules DQ EEx i, 23.1 V DC/20 mA, 17.4 V DC/27 mA, 17.4 V DC/40 mA or 25.5 V DC/22 mA, with external actuator switch-off via High or Low signal (H/L switch-off)
 - Load-free switching of outputs via external intrinsically safe signal
 - Power boosting through parallel connection of two outputs for one actuator with 4 DQ 17.4 V DC/27 mA or 4 DQ 17.4 V DC/40 mA
 - Short-circuit and wire-break monitoring
- 2-channel digital output module DQ Relay EEx e, e.g. for switching solenoid valves, DC contactors or signaling lamps
 - Can be plugged onto TM-RM/RM terminal module
 - Output current up to 2 A with 60 V UC for each of the two relay outputs
 - Installation up to Ex zone 1
 - Intrinsically safe and non-intrinsically safe signals can be mixed in a station

Extra functionsActuator shutdown function of the 4 DQ EEx i modules

The 4 DQ EEx i modules are equipped with a shutdown function. This permits implementation of an external actuator switch-off independent of the automation system (controller).

As soon as the intrinsically safe switch-off signal (High or Low) is present at the actuator switch-off input of the electronic module, its outputs are deactivated.

You can also combine several DQ modules into a switch-off group. The intrinsically safe power supply for the switch-off device is either via the watchdog module or a separate intrinsically safe source.

Ordering data**Article No.****Digital input modules**Digital input modules EEx i**8 DI NAMUR**

For evaluation of NAMUR sensors, connected/non-connected contacts, as well as for recording count pulses or measuring frequencies

- 8 × NAMUR (NAMUR sensor on/off, NAMUR changeover contact) or connected/non-connected inputs (single/changeover contact)
- 2 channels optionally usable as counters (max. 5 kHz) or frequency meters (1 Hz ... 5 kHz)
- Time tagging 20 ms, rising or falling edge
- Wire-break monitoring
- Short-circuit monitoring
- Sensor power supply monitoring
- Flutter monitoring

6ES7131-7RF00-0AB0**Article No.****Digital output modules**Digital output modules EEx i with H-switch-off

(external actuator disconnection via H-signal); for switching of solenoid valves, DC relays, indicator lights, actuators

4 DQ DC 23.1 V/20 mA

- 4 channels with 20 mA each
- Short-circuit monitoring
- Wire-break monitoring
- Configurable connection of substitute value in the event of CPU failure
- Load-free switching of outputs via external intrinsically safe signal

6ES7132-7RD01-0AB0

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200iSP

Digital electronic modules

Ordering data	Article No.	Article No.
4 DQ DC 17.4 V/27 mA <ul style="list-style-type: none"> 4 channels with 27 mA each or 2 outputs connected in parallel with 54 mA each Short-circuit monitoring Wire-break monitoring Configurable connection of substitute value in the event of CPU failure Load-free switching of outputs via external intrinsically safe signal 	6ES7132-7RD11-0AB0	Digital output modules EEx e For switching of solenoid valves, DC contactors or indicator lights
4 DQ DC 17.4 V/40 mA <ul style="list-style-type: none"> 4 channels with 40 mA each or 2 outputs connected in parallel with 80 mA each Short-circuit monitoring Wire-break monitoring Configurable connection of substitute value in the event of CPU failure Load-free switching of outputs via external intrinsically safe signal 	6ES7132-7RD22-0AB0	2 DQ Relay, 60 V UC, 2 A <ul style="list-style-type: none"> Can be plugged onto TM-RM/RM terminal module Output current up to 2 A with 60 V UC for each of the two relay outputs Installation up to Ex zone 1 Configurable connection of substitute value in the event of CPU failure
4 DQ DC 23.1 V/20 mA <ul style="list-style-type: none"> 4 channels with 20 mA each Short-circuit monitoring Wire-break monitoring Configurable connection of substitute value in the event of CPU failure Load-free switching of outputs via external intrinsically safe signal 	6ES7132-7GD00-0AB0	Terminal modules ET 200iSP TM-EM/EM60 terminal module For two modules (reserve module, watchdog module and all electronic modules except 2 DQ relays can be plugged in) <ul style="list-style-type: none"> For hazardous environments <ul style="list-style-type: none"> TM-EM/EM60S (blue screw-type terminals) TM-EM/EM60C (blue spring-loaded terminals) For non-hazardous environments <ul style="list-style-type: none"> TM-EM/EM60S (black screw-type terminals)
Digital output modules EEx i with L-switch-off (external actuator disconnection via L-signal); for switching of solenoid valves, DC relays, indicator lights, actuators		
4 DQ DC 17.4 V/27 mA <ul style="list-style-type: none"> 4 channels with 27 mA each or 2 outputs connected in parallel with 54 mA each Short-circuit monitoring Wire-break monitoring Configurable connection of substitute value in the event of CPU failure Load-free switching of outputs via external intrinsically safe signal 	6ES7132-7GD10-0AB0	ET 200iSP TM-RM/RM 60 terminal module For two modules (electronic module 2 DQ Relay and reserve module can be plugged in) <ul style="list-style-type: none"> TM-RM/RM60S (screw-type terminals)
4 DQ DC 17.4 V/40 mA <ul style="list-style-type: none"> 4 channels with 40 mA each or 2 outputs connected in parallel with 80 mA each Short-circuit monitoring Wire-break monitoring Configurable connection of substitute value in the event of CPU failure Load-free switching of outputs via external intrinsically safe signal 	6ES7132-7GD21-0AB0	Accessories Reserve module For any electronic module Labeling sheet DIN A4, perforated, each consisting of 10 sheets of 30 strips each for electronic modules and 20 strips each for IM 151 <ul style="list-style-type: none"> Petrol Yellow
4 DQ DC 17.4 V/40 mA <ul style="list-style-type: none"> 4 channels with 40 mA each or 2 outputs connected in parallel with 80 mA each Short-circuit monitoring Wire-break monitoring Configurable connection of substitute value in the event of CPU failure Load-free switching of outputs via external intrinsically safe signal 	6ES7132-7GD30-0AB0	Labels, inscribed For slot numbering, label size H x W (in mm): 5 x 7 <ul style="list-style-type: none"> 204 labels, for slots 1 to 20 204 labels, for slots 1 to 40
4 DQ DC 25.5 V/22 mA¹⁾ <ul style="list-style-type: none"> 4 channels with 22 mA each Short-circuit monitoring Wire-break monitoring Configurable connection of substitute value in the event of CPU failure Load-free switching of outputs via external intrinsically safe signal 		Labels, blank 136 labels for slot numbering, label size H x W (in mm): 5 x 7 S7-300 DIN rails <ul style="list-style-type: none"> 585 mm long, suitable for assembly of ET 200iSP in a 650 mm wide wall box 885 mm long, suitable for assembly of ET 200iSP in a 950 mm wide wall box

¹⁾ Can be used with SIMATIC PCS 7 V7.1+SP2 or higher

Technical specifications

Article number	6ES7131-7RF00-0AB0 ET200iSP, EL-MOD., 8DI, NAMUR
General information	
Product type designation	8DI NAMUR
Digital inputs	
Number of digital inputs	8
Input current	
• for signal "0", max. (permissible quiescent current)	1.2 mA
• for signal "1", min.	2.1 mA
Encoder	
Number of connectable encoders, max.	8
Connectable encoders	
• NAMUR encoder	Yes
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes; Parameterizable
• Hardware interrupt	No
Diagnoses	
• Diagnostic information readable	Yes
• Short-circuit	Yes; R load < 150 ohms with NAMUR sensor/sensor and NAMUR changeover contact/sensor to DIN 19234
Diagnostics indication LED	
• Group error SF (red)	Yes
• Status indicator digital input (green)	Yes

Article number	6ES7131-7RF00-0AB0 ET200iSP, EL-MOD., 8DI, NAMUR
Integrated Functions	
Frequency measurement	Yes; (Gate time) 50 ms; 200 ms; 1 s
• Number of frequency meters	2
Potential separation	
Potential separation digital inputs	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
CE mark	CE 0344
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	255 g

Article number	6ES7132-7RD01-0AB0 ET200iSP, EL-MOD., 4DO, DC 23,1V, 20MA	6ES7132-7RD11-0AB0 ET200iSP, EL-MOD., 4DO, DC 17,4V, 27MA	6ES7132-7RD22-0AB0 ET200iSP, EL-MOD., 4DO, DC 17.4V, 40MA
General information			
Product type designation	4DQ 23.1 V DC/20 mA	4DQ 17.4 V DC/27 mA	4DQ 17.4 V DC/40 mA
Digital outputs			
Type of digital output	Transistor	Transistor	Transistor
Number of digital outputs	4; additionally 1 intrinsically-safe input for H shutdown	4; additionally 1 intrinsically-safe input for H shutdown	4; additionally 1 intrinsically-safe input for H shutdown
Short-circuit protection	Yes	Yes	Yes
No-load voltage U_{ao} (DC)	23.1 V	17.4 V	17.4 V
Internal resistor R_i	275 Ω	150 Ω	167 Ω
Trend key points E			
• Voltage U_e (DC)	17.6 V	13.3 V	10.7 V
• Current I_e	20 mA	27 mA	40 mA; 80 mA when outputs connected in parallel
Output current			
• for signal "1" rated value	0.02 A	0.027 A	0.04 A
Output delay with resistive load			
• "0" to "1", max.	2 ms	2 ms	2 ms
• "1" to "0", max.	1.5 ms	1.5 ms	1.5 ms
Parallel switching of two outputs			
• for uprating	No; for Ex reasons not possible; nor for predecessor	Yes	Yes
Switching frequency			
• with resistive load, max.	100 Hz	100 Hz	100 Hz
• with inductive load, max.	2 Hz	2 Hz	2 Hz

I/O systemsSIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200iSP**Digital electronic modules****Technical specifications**

Article number	6ES7132-7RD01-0AB0 ET200iSP, EL-MOD., 4DO, DC 23,1V, 20MA	6ES7132-7RD11-0AB0 ET200iSP, EL-MOD., 4DO, DC 17,4V, 27MA	6ES7132-7RD22-0AB0 ET200iSP, EL-MOD., 4DO, DC 17.4V, 40MA
Interrupts/diagnostics/ status information			
Diagnostics function	Yes	Yes	
Alarms			
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
Diagnoses			
• Diagnostic information readable	Yes	Yes	Yes
• Wire-break	Yes; R > 10 kohms, I < 100 µA	Yes	Yes; R > 10 kohms, I < 100 µA
• Short-circuit	Yes; R < 800 ohms (one output), R < 40 ohms (outputs connected in parallel)	Yes	Yes; R < 80 Ohm (one output), R < 40 Ohm (outputs connected in parallel)
Diagnostics indication LED			
• Group error SF (red)	Yes	Yes	Yes
• Status indicator digital output (green)	Yes	Yes	Yes; Per channel
Ex(i) characteristics maximum values for connecting terminals for gas group IIC			
• U _o (no-load voltage), max.			19.4 V
• I _o (short-circuit current), max.			118 mA
• P _o (power output), max.			572 mW
• C _o (permissible external capacity), max.			241 nF; For IIC, 1507 nF for IIB
• L _o (permissible external inductivity), max.			1.7 mH; For IIC, 10.4 mH for IIB
Potential separation			
Potential separation digital outputs			
• between the channels and backplane bus	Yes	Yes	Yes
Standards, approvals, certificates			
CE mark	CE 0344		Yes
Highest safety class achievable in safety mode			
• SIL acc. to IEC 61508	No		No
Use in hazardous areas			
• ATEX marking	II2 G (1) GD Ex ib[ia] IIC T4 and I M2 Ex ib[ia] I		
Dimensions			
Width	30 mm	30 mm	30 mm
Height	129 mm	129 mm	129 mm
Depth	136.5 mm	136.5 mm	136.5 mm
Weights			
Weight, approx.	255 g	255 g	255 g

Technical specifications

Article number	6ES7132-7GD00-0AB0 ET200iSP, EL-MOD., 4DO, DC 23,1V, 20MA	6ES7132-7GD10-0AB0 ET200iSP, EL-MOD., 4DO, DC 17,4V, 27MA	6ES7132-7GD21-0AB0 ET200iSP, EL-MOD., 4DO, DC 17,4V, 40MA	6ES7132-7GD30-0AB0 ET200iSP, EL-MOD., 4DO, DC 25.5V, 22MA
General information				
Product type designation	4DQ 23.1 V DC/20 mA	4DQ 17.4 V DC/27 mA	4DQ 17.4 V DC/40 mA	4DQ 25.5 V DC/22 mA
Digital outputs				
Type of digital output	Transistor	Transistor	Transistor	Transistor
Number of digital outputs	4; additionally 1 intrinsically-safe input for L shutdown	4; additionally 1 intrinsically-safe input for L shutdown	4; additionally 1 intrinsically-safe input for L shutdown	4; additionally 1 intrinsically-safe input for L shutdown
Short-circuit protection	Yes	Yes	Yes	Yes
No-load voltage U_{ao} (DC)	23.1 V	17.4 V	17.4 V	25.5 V
Internal resistor R_i	275 Ω	150 Ω	167 Ω	260 Ω
Trend key points E				
• Voltage U_e (DC)	17.6 V	13.3 V	10.7 V	19.8 V
• Current I_e	20 mA	27 mA; 54 mA when outputs connected in parallel	40 mA	22 mA
Output current				
• for signal "1" rated value	0.02 A	0.027 A	0.04 A	0.022 A
Output delay with resistive load				
• "0" to "1", max.	2 ms	2 ms	2 ms	2 ms
• "1" to "0", max.	1.5 ms	1.5 ms	1.5 ms	1.5 ms
Parallel switching of two outputs				
• for uprating	No; for Ex reasons not possible; nor for predecessor	Yes	Yes	No
Switching frequency				
• with resistive load, max.	100 Hz	100 Hz	100 Hz	100 Hz
• with inductive load, max.	2 Hz	2 Hz	2 Hz	2 Hz
Interrupts/diagnostics/status information				
Diagnostics function	Yes	Yes	Yes	Yes
Alarms				
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
Diagnoses				
• Diagnostic information readable	Yes	Yes	Yes	Yes
• Wire-break	Yes; $R > 10$ kohms, $I < 100$ μ A	Yes; $R > 10$ kohms, $I < 100$ μ A	Yes; $R > 10$ kohms, $I < 100$ μ A	Yes; $R > 10$ kohms, $I < 100$ μ A
• Short-circuit	Yes; $R < 80$ Ohm (one output), $R < 40$ Ohm (outputs connected in parallel)	Yes; $R < 800$ ohms (one output), $R < 40$ ohms (outputs connected in parallel)	Yes; $R < 80$ Ohm (one output), $R < 40$ Ohm (outputs connected in parallel)	Yes; $R < 80$ ohms
Diagnostics indication LED				
• Group error SF (red)	Yes	Yes	Yes	Yes
• Status indicator digital output (green)	Yes	Yes	Yes; Per channel	Yes; Per channel
Ex(i) characteristics				
maximum values for connecting terminals for gas group IIC				
• U_o (no-load voltage), max.			19.4 V	27.9 V
• I_o (short-circuit current), max.			118 mA	110 mA
• P_o (power output), max.			572 mW	764 mW
• C_o (permissible external capacity), max.			241 nF; For IIC, 1507 nF for IIB	81 nF; For IIC, 651 nF for IIB
• L_o (permissible external inductivity), max.			1.7 mH; For IIC, 10.4 mH for IIB	1.7 mH; For IIC, 11.5 mH for IIB
Potential separation				
Potential separation digital outputs				
• between the channels and backplane bus	Yes	Yes	Yes	Yes

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200iSP

Digital electronic modules

Technical specifications

Article number	6ES7132-7GD00-0AB0 ET200iSP, EL-MOD., 4DO, DC 23,1V, 20MA	6ES7132-7GD10-0AB0 ET200iSP, EL-MOD., 4DO, DC 17,4V, 27MA	6ES7132-7GD21-0AB0 ET200iSP, EL-MOD., 4DO, DC 17,4V, 40MA	6ES7132-7GD30-0AB0 ET200iSP, EL-MOD., 4DO, DC 25.5V, 22MA
Standards, approvals, certificates				
CE mark	Yes	Yes	Yes	Yes
Highest safety class achievable in safety mode				
• SIL acc. to IEC 61508	No	No	No	No
Dimensions				
Width	30 mm	30 mm	30 mm	30 mm
Height	129 mm	129 mm	129 mm	129 mm
Depth	136.5 mm	136.5 mm	136.5 mm	136.5 mm
Weights				
Weight, approx.	255 g	255 g	255 g	255 g

Article number	6ES7193-7CA00-0AA0 ET200iSP, TERM.-MOD. TM-EM/EM60S F. EM	6ES7193-7CA10-0AA0 ET200iSP, TERM.-MOD. TM-EM/EM60C F. EM	6ES7193-7CA20-0AA0 ET200iSP, TERM.-MOD. TM-EM/EM60S F. EM
Standards, approvals, certificates			
CE mark	Yes	Yes	Yes
Use in hazardous areas			
• ATEX marking	see ET 200iSP system	see ET 200iSP system	
Dimensions			
Width	60 mm	60 mm	60 mm
Height	190 mm	190 mm	190 mm
Depth	52 mm	52 mm	52 mm
Weights			
Weight, approx.	275 g	275 g	235 g

Article number	6ES7132-7HB00-0AB0 ET200iSP, RELAY-MOD., 2DO, UC60V, 2A
General information	
Product type designation	2DQ relay 60 V UC/2 A
Digital outputs	
Type of digital output	Relays
Number of digital outputs	2
Short-circuit protection	No
Output current	
• for signal "1" rated value	2 A
Output delay with resistive load	
• "0" to "1", max.	7 ms
• "1" to "0", max.	3 ms
Parallel switching of two outputs	
• for uprating	No
• for redundant control of a load	No

Article number	6ES7132-7HB00-0AB0 ET200iSP, RELAY-MOD., 2DO, UC60V, 2A
Switching frequency	
• with resistive load, max.	100 Hz
• with inductive load, max.	2 Hz
Relay outputs	
Switching capacity of contacts	
- with resistive load, up to 60 °C, max.	2 A; See data in manual
- Thermal continuous current, max.	2 A; See data in manual
Interrupts/diagnostics/status information	
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes; Parameterizable
• Hardware interrupt	No

Technical specifications

Article number	6ES7132-7HB00-0AB0 ET200iSP, RELAY-MOD., 2DO, UC60V, 2A
Diagnoses	
• Diagnostic information readable	Yes
• Wire-break	No; Cannot be determined in contact power circuit
• Short-circuit	No; Cannot be determined in contact power circuit
Diagnostics indication LED	
• Group error SF (red)	Yes
• Status indicator digital output (green)	Yes; Per channel
Ex(i) characteristics	
maximum values for connecting terminals for gas group IIC	
• Um (voltage at non-intrinsically safe connecting terminals), max.	250 V; DC/AC

Article number	6ES7132-7HB00-0AB0 ET200iSP, RELAY-MOD., 2DO, UC60V, 2A
Standards, approvals, certificates	
UKCA mark	DEKRA 21UKEX0025 Importer UK: Siemens plc Manchester M20 2UR
Highest safety class achievable in safety mode	
• SIL acc. to IEC 61508	No
Use in hazardous areas	
• ATEX marking	II 2 G and I M2 Ex eb ib mb IIC T4 Gb Ex eb ib mb I Mb
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	255 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200iSP

Analog electronic modules

Overview



Analog input modules

- 4-channel analog input module AI 2 WIRE HART EEx i for current measurement in the range 4 to 20 mA, suitable for connection of 2-wire transmitters (with/without HART functionality)
 - Resolution 12 bit + sign
 - Max. load of transmitter 750 Ω
 - Short-circuit and wire break monitoring
- 4-channel analog input module AI 4 WIRE HART EEx i for current measurement in the range 0/4 to 20 mA, suitable for connection of 4-wire transmitters (with/without HART functionality)
 - Resolution 12 bit + sign
 - Max. load of transmitter 750 Ω
 - Wire break monitoring

- 4-channel analog input module AI RTD EEx i for resistance testing and for temperature measurement by Pt100/Ni100 resistance thermometer
 - Resolution 15 bit + sign
 - 2, 3, or 4-wire connection possible
 - Resistance measurements 600 Ω absolute and 1 000 Ω absolute
 - Wire break monitoring
- 4-channel analog input module AI TC EEx i for thermoelectric EMF measurements and for temperature measurement by thermocouple, type B, E, N, J, K, L, S, R, T, U
 - Resolution 15 bit + sign
 - Internal temperature compensation possible using TC sensor module (included in scope of delivery of module)
 - External temperature compensation by means of a temperature value acquired at an analog module of the same ET 200iSP station
 - Wire break monitoring

Analog output modules

- 4-channel analog output module AO I HART EEx i for output of current signals in the range 0/4 to 20 mA to field devices (with/without HART functionality)
 - Resolution 14 bit
 - Parameterizable substitute value in case of CPU failure
 - Short-circuit and wire break monitoring

Extra functions

Temperature compensation

A TC sensor module for internal temperature compensation is provided with the 4 AI TC module, and is fitted on the corresponding terminals of the associated terminal module.

External temperature compensation is possible via a Pt100 on a 4 AI RTD module.

Ordering data

Article No.

Analog input modules

EEx i analog input modules

4 AI I 2 WIRE HART

For measuring currents with 2-wire transmitters with/without HART functionality

- 4 × 4 ... 20 mA, HART, 2-wire transmitter
- Transmitter load: max. 750 Ω
- Resolution 12 bit + sign
- Short-circuit monitoring
- Wire-break monitoring

6ES7134-7TD00-0AB0

4 AI I 4 WIRE HART

For measuring currents with 4-wire transmitters with/without HART functionality

- 4 × 0/4 ... 20 mA, HART, 4-wire transmitter
- Transmitter load: max. 750 Ω
- Resolution 12 bit + sign
- Wire-break monitoring

6ES7134-7TD50-0AB0

4 AI RTD

For measuring resistances as well as for temperature measurements with resistance thermometers

- 4 × RTD, resistance thermometer Pt100/Ni100
- 2, 3, 4-wire
- Resolution 15 bit + sign
- Short-circuit monitoring
- Wire-break monitoring

6ES7134-7SD51-0AB0

Article No.

4 AI TC

For thermoelectric EMF measurements as well as for temperature measurements with thermocouples

- 4 × TC (thermocouples)
- Type B [PtRh-PtRh]
- Type N [NiCrSi-NiSi]
- Type E [NiCr-CuNi]
- Type R [PtRh-Pt]
- Type S [PtPh-Pt]
- Type J [Fe-CuNi]
- Type L [Fe-CuNi]
- Type T [Cu-CuNi]
- Type K [NiCr-Ni]
- Type U [Cu-CuNi]
- Resolution 15 bit + sign
- Internal compensation of reference junction temperature possible using TC sensor module (included in scope of supply of module)
- External temperature compensation via Pt100, connected to RTD module of same ET 200iSP station
- Wire-break monitoring

6ES7134-7SD00-0AB0

Ordering data	Article No.	Ordering data	Article No.
Analog output modules		Accessories	
Analog output modules EEx i		Reserve module For any electronic module	6ES7138-7AA00-0AA0
4 AO I HART For output of currents to field devices with/without HART functionality • 4 × 0/4 ... 20 mA, HART (max. load 750 Ω) • Resolution 14-bit • Short-circuit monitoring • Wire-break monitoring • Parameterizable substitute value in case of CPU failure	6ES7135-7TD00-0AB0	Labeling sheet DIN A4, perforated, each consisting of 10 sheets of 30 strips each for electronic modules and 20 strips each for IM 151 • Petrol • Yellow	6ES7193-7BH00-0AA0 6ES7193-7BB00-0AA0
Terminal modules		Labels, inscribed For slot numbering, label size H × W (in mm): 5 × 7 • 204 labels, for slots 1 to 20 • 204 labels, for slots 1 to 40	8WA8361-0AB 8WA8361-0AC
ET 200iSP TM-EM/EM60 terminal module For two modules (reserve module, watchdog module and all electronic modules except 2 DQ relays can be plugged in) • For hazardous environments - TM-EM/EM60S (blue screw-type terminals) - TM-EM/EM60C (blue spring-loaded terminals) • For non-hazardous environments - TM-EM/EM60S (black screw-type terminals)	6ES7193-7CA00-0AA0 6ES7193-7CA10-0AA0 6ES7193-7CA20-0AA0	Labels, blank 136 labels for slot numbering, label size H × W (in mm): 5 × 7	8WA8348-2AY
		S7-300 DIN rails • 585 mm long, suitable for assembly of ET 200iSP in a 650 mm wide wall box • 885 mm long, suitable for assembly of ET 200iSP in a 950 mm wide wall box	6ES7390-1AF85-0AA0 6ES7390-1AJ85-0AA0

Technical specifications

Article number	6ES7135-7TD00-0AB0 ET200iSP, EL-MOD., 4 AO, 4-20MA, HART
General information	
Product type designation	4AQ I HART
Analog outputs	
Number of analog outputs	4
Cycle time (all channels) max.	3.6 ms
Output ranges, current	
• 0 to 20 mA	Yes
• 4 mA to 20 mA	Yes
Connection of actuators	
• for current output two-wire connection	Yes
Load impedance (in rated range of output)	
• with current outputs, max.	750 Ω
Cable length	
• shielded, max.	500 m
Analog value generation for the outputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	14 bit
Settling time	
• for resistive load	4 ms
• for capacitive load	40 ms
• for inductive load	40 ms

Article number	6ES7135-7TD00-0AB0 ET200iSP, EL-MOD., 4 AO, 4-20MA, HART
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Current, relative to output range, (+/-)	0.1 %
Interrupts/diagnostics/status information	
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Diagnostic information readable	Yes
• Wire-break	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• Group error SF (red)	Yes
Potential separation	
Potential separation analog outputs	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
CE mark	Yes
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	265 g

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200iSP

Safety-related electronic modules

Overview



The electronic modules of the SIMATIC ET 200iSP distributed I/O system equipped with safety functions can be used together with the safety-related automation systems (controllers) for the implementation of safety applications. The input modules record the process signals, evaluate them, and prepare them for additional processing by the automation system. The output modules convert the safety-related signals output by the automation systems so that they are suitable for controlling the connected actuators.

F-digital input modules

- 8 F-DI Ex NAMUR
 - Safety-related digital input module for evaluating the signals from IEC 60947-5-6/NAMUR sensors and connected/non-connected mechanical contacts in hazardous and non-hazardous areas
 - SIL3/Cat.3/PLe with 8 inputs (1-channel/1oo1 evaluation) or 4 inputs (2-channel/1oo2 evaluation)
 - 8 short-circuit-proof sensor supplies (8 V DC) for 1 channel each
 - Inputs and sensor supplies electrically isolated from power bus and backplane bus
 - Diagnostics evaluation (deactivated for non-connected mechanical contacts)
 - Internal diagnostics buffer
 - Programmable diagnostics interrupt
 - Supports time stamping
 - Channel-selective passivation
 - Firmware update using HW Config possible
 - Exclusively for safety mode
 - LED displays for safety mode, group errors and channel status/fault

F-digital output modules

- 4 F-DO Ex DC 17.4 V/40 mA
 - Safety-related digital output module for controlling actuators in hazardous and non-hazardous areas, e.g. solenoid valves, DC current relays or indicator lights
 - SIL3/Cat.3/PLe with 4 outputs, switching to P/P potential
 - Electrical isolation from power bus and backplane bus
 - Rated load voltage 17.4 V DC
 - Max. output current 40 mA
 - Performance enhancement through parallel connection of two digital outputs for one actuator
 - Short-circuit, overload and wire-break monitoring
 - Configurable diagnostics
 - Internal diagnostics buffer
 - Programmable diagnostics interrupt
 - Channel-selective passivation
 - Firmware update using HW Config possible
 - Exclusively for safety mode
 - LED displays for safety mode, group errors and channel status/fault

F-analog input modules

- 4 F-AI Ex HART (0 ... 20 mA or 4 ... 20 mA)
 - Safety-related digital input module for evaluating the signals from current simulators in hazardous and non-hazardous areas, e.g. 2-wire transmitters and HART field devices
 - SIL3/Cat.3/PLe with 4 inputs of one module (1-channel/1oo1 evaluation) or 4 inputs of two modules (2-channel/1oo2 evaluation)
 - Measuring ranges: 0 ... 20 mA or 4 ... 20 mA
 - Resolution 15 bit + sign
 - HART communication in measuring range 4 ... 20 mA
 - 4 short-circuit-proof sensor supplies (min. 12 V DC; max. 26 V DC) for 1 channel each
 - Inputs and sensor supplies electrically isolated from backplane bus
 - Configurable diagnostics
 - Programmable diagnostics interrupt
 - Internal diagnostics buffer
 - Firmware update using HW Config possible
 - Exclusively for safety mode
 - LED displays for safety mode, group errors, channel faults and HART status per channel

Ordering data	Article No.	Ordering data	Article No.
Safety-related electronic modules		Terminal modules	
<u>F-digital input modules</u>		ET 200iSP TM-EM/EM60 terminal module	
8 F-DI Ex NAMUR For evaluating the signals from IEC 60947-5-6/NAMUR sensors and connected/non-connected mechanical contacts in hazardous and non-hazardous areas • SIL3/Cat.3/PLe with 8 inputs (1-channel/1oo1 evaluation) or 4 inputs (2-channel/1oo2 evaluation)	6ES7138-7FN00-0AB0	For two modules (reserve module, watchdog module and all electronic modules except 2 DQ relays can be plugged in) • For hazardous environments - TM-EM/EM60S (blue screw-type terminals) - TM-EM/EM60C (blue spring-loaded terminals) • For non-hazardous environments - TM-EM/EM60S (black screw-type terminals)	6ES7193-7CA00-0AA0 6ES7193-7CA10-0AA0 6ES7193-7CA20-0AA0
<u>F-digital output modules</u>		Accessories	
4 F-DO Ex 17.4 V DC/40 mA For controlling actuators in hazardous and non-hazardous areas, e.g. solenoid valves, DC current relays or indicator lights • SIL3/Cat.3/PLe with 4 outputs, switching to P/P potential	6ES7138-7FD00-0AB0	Reserve module For any electronic module	6ES7138-7AA00-0AA0
<u>F-analog input modules</u>		Labeling sheet	
4 F-AI Ex HART (0 ... 20 mA or 4 ... 20 mA) For evaluating the signals from current simulators in hazardous and non-hazardous areas, e.g. 2-wire transmitters and HART field devices • SIL3/Cat.3/PLe with 4 inputs of one module (1-channel/1oo1 evaluation) or 4 inputs of two modules (2-channel/1oo2 evaluation) • Resolution 15 bit + sign • HART communication in measuring range 4 ... 20 mA	6ES7138-7FA00-0AB0	DIN A4, perforated, each consisting of 10 sheets of 30 strips each for electronic modules and 20 strips each for IM 151 • Petrol • Yellow	6ES7193-7BH00-0AA0 6ES7193-7BB00-0AA0
		Labels, inscribed	
		For slot numbering, label size H x W (in mm): 5 x 7 • 204 labels, for slots 1 to 20 • 204 labels, for slots 1 to 40	8WA8361-0AB 8WA8361-0AC
		Labels, blank	
		136 labels for slot numbering, label size H x W (in mm): 5 x 7	8WA8348-2AY
		S7-300 DIN rails	
		• 585 mm long, suitable for assembly of ET 200iSP in a 650 mm wide wall box	6ES7390-1AF85-0AA0
		• 885 mm long, suitable for assembly of ET 200iSP in a 950 mm wide wall box	6ES7390-1AJ85-0AA0

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200iSP

Safety-related electronic modules

Technical specifications

Article number	6ES7138-7FN00-0AB0 ET200iSP, 8F-DI NAMUR EX, FAILSAFE
General information	
Product type designation	8F-DI ExNAMUR
Encoder supply	
Number of outputs	8
Digital inputs	
Number of digital inputs	8
Input current	
• for signal "0", max. (permissible quiescent current)	1.2 mA
• for signal "1", min.	2.1 mA
• for signal "1", typ.	9.5 mA
Encoder	
Number of connectable encoders, max.	8
Connectable encoders	
• NAMUR encoder	Yes
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes; Parameterizable
• Hardware interrupt	No
Diagnoses	
• Diagnostic information readable	Yes
• Wire-break	Yes; NAMUR encoders or single contact with 10 kOhm parallel resistor
• Short-circuit	Yes; R load < 150 ohms with NAMUR sensor/sensor and NAMUR changeover contact/sensor to DIN 19234
Diagnostics indication LED	
• Group error SF (red)	Yes
Potential separation	
Potential separation digital inputs	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
CE mark	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Use in hazardous areas	
• ATEX marking	II 2 G (1) GD Ex ib[ja Ga][ia IIIC Da] IIC T4 GB and I M2 Ex ib[ja Ma] I Mb
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	288 g

Article number	6ES7138-7FD00-0AB0 ET200iSP, 4F-DO 40MA EX, FAILSAFE
General information	
Product type designation	4F-DQ Ex(i) 17.4 V DC/40 mA
Digital outputs	
Type of digital output	Transistor
Number of digital outputs	4
Short-circuit protection	Yes
Controlling a digital input	No
No-load voltage U_{ao} (DC)	17.4 V
Internal resistor R_i	167 Ω
Load resistance range	
• lower limit	270 Ω
• upper limit	18 k Ω
Trend key points E	
• Voltage U_e (DC)	10.7 V
• Current I_e	40 mA
Output voltage	
• for signal "1", max.	17.4 V
Output current	
• for signal "0" residual current, max.	10 μ A
Parallel switching of two outputs	
• for uprating	Yes
• for redundant control of a load	No
Switching frequency	
• with resistive load, max.	30 Hz
• with inductive load, max.	2 Hz
Interrupts/diagnostics/ status information	
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Diagnostic information readable	Yes
• Wire-break	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• Group error SF (red)	Yes
• Status indicator digital output (green)	Yes
Potential separation	
Potential separation digital outputs	
• between the channels and backplane bus	Yes
Standards, approvals, certificates	
CE mark	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm
Weights	
Weight, approx.	285 g

Overview



The watchdog module has two fundamental functions:

- Monitoring of the ET 200iSP remote I/O station for hardware failures (hardware lifebeat); external, applicative failure monitoring is also possible via an I/O address area of the module
- Intrinsically-safe power supply for external actuator switch-off

The watchdog module must be plugged onto a terminal module (order separately). The following terminal modules are suitable for this:

- TM-IM/EM60 terminal modules for one interface module and one watchdog, reserve or electronics module (for versions, see Interface module section)
- TM-EM/EM60 terminal modules with two slots for watchdog module, reserve module or electronics modules (except 2 DO relay):
 - with blue screw-type or spring-loaded terminals for hazardous environments
 - with black screw-type terminals for non-hazardous environments

The first slot directly next to the interface module is provided for the watchdog module.

Ordering data

Article No.

Watchdog module	
Watchdog module For failure monitoring and for the intrinsically safe power supply of an external actuator disconnection	6ES7138-7BB00-0AB0
Terminal modules	
ET 200iSP TM-EM/EM60 terminal module For two modules (reserve module, watchdog module and all electronic modules except 2 DQ relays can be plugged in)	
• For hazardous environments - TM-EM/EM60S (blue screw-type terminals)	6ES7193-7CA00-0AA0
- TM-EM/EM60C (blue spring-loaded terminals)	6ES7193-7CA10-0AA0
• For non-hazardous environments - TM-EM/EM60S (black screw-type terminals)	6ES7193-7CA20-0AA0
Accessories	
Labeling sheet DIN A4, perforated, each consisting of 10 sheets of 30 strips each for electronic modules and 20 strips each for IM 151	
• Petrol	6ES7193-7BH00-0AA0
• Yellow	6ES7193-7BB00-0AA0
Labels, inscribed For slot numbering, label size H x W (in mm): 5 x 7	
• 204 labels, for slots 1 to 20	8WA8361-0AB
• 204 labels, for slots 1 to 40	8WA8361-0AC
Labels, blank 136 labels for slot numbering, label size H x W (in mm): 5 x 7	8WA8348-2AY

Technical specifications

Article number	6ES7138-7BB00-0AB0
	ET 200iSP, WATCHDOG MOD.
General information	
Product type designation	Watchdog module
Digital inputs	
Number of digital inputs	0
Dimensions	
Width	30 mm
Height	129 mm
Depth	136.5 mm

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200iSP

RS 485-iS coupler

Overview



Tasks of the RS 485-iS coupler

- Conversion of the electrical PROFIBUS DP RS 485 transmission technology into the intrinsically-safe RS 485-iS transmission technology with a transmission rate of 1.5 Mbps
- Required to connect intrinsically-safe PROFIBUS DP stations, e.g. ET 200iSP or devices from other vendors with Ex i DP connection
- Acts as a safety barrier
- Additional use as a repeater in the hazardous area
- Passive bus station (no configuration necessary)
- Certified according to ATEX 100a

Ordering data

RS 485-iS coupler

Isolating transformer for connection of PROFIBUS DP segments with RS 485 and RS 485-iS transmission systems

Article No.

6ES7972-0AC80-0XA0

Accessories

PROFIBUS connection plug with selectable terminating resistor

For connection of IM 152 to PROFIBUS DP with RS 485-iS transmission technology

6ES7972-0DA60-0XA0

S7-300 DIN rails

Lengths:

- 160 mm
- 482 mm
- 530 mm
- 830 mm
- 2 000 mm

6ES7390-1AB60-0AA0

6ES7390-1AE80-0AA0

6ES7390-1AF30-0AA0

6ES7390-1AJ30-0AA0

6ES7390-1BC00-0AA0

Article No.

PROFIBUS FastConnect standard cable, violet

Standard type with special design for fast mounting, 2-wire, shielded, cut-to-length

Specify length in m
Max. delivery unit 1 000 m,
minimum order quantity 20 m

Preferred lengths

- 20 m
- 50 m
- 100 m
- 200 m
- 500 m
- 1 000 m

6XV1830-0EH10

6XV1830-0EN20

6XV1830-0EN50

6XV1830-0ET10

6XV1830-0ET20

6XV1830-0ET50

6XV1830-0EU10

PROFIBUS FastConnect standard cable IS GP, blue

Cable type for use in potentially explosive atmospheres, with special design for fast mounting, 2-wire, shielded, cut-to-length

Specify length in m
Max. delivery unit 1 000 m,
minimum order quantity 20 m

6XV1831-2A

Technical specifications

Technical specifications - RS 485-iS coupler

Dimensions and weight

Dimensions W x H x D (mm) 80 × 125 × 130

Weight Approx. 500 g

Technical specifications - General

Degree of protection IP20

Ambient temperature - 20 ... + 60 °C

Technical specifications

Technical specifications - RS 485-iS coupler

Standards and approvals

• PROFIBUS	IEC 61784-1:2002 Ed1 CP 3/1
• EU directive	94/9/EG (ATEX 100a)
• CENELEC	II 3 (2) G EEx nA[ib] IIC T4
• UL and CSA	Class I, Division2, Group A, B, C, D T4 Class I Zone 2, Group IIC T4 AIS Class I, Division 1, Group A, B, C, D [Aexib] IIC, Class I, Zone 1, 2, Group IIC
• FM	Class I, Division2, Group A, B, C, D T4 Class I Zone 2, Group IIC T4 AIS Class I, Division 1, Group A, B, C, D [Aexib] IIC, Class I, Zone 1, 2, Group IIC
• IEC	IEC61131-2, Part 2
• CE	Conforming with 89/336/EWG Conforming with 73/23/EWG
• Ship-building certification	Classification companies •ABS (American Bureau of Shipping) •BV (Bureau Veritas) •DNV (Det Norske Veritas) •GL (Germanischer Lloyd) •LRD (Lloyds Register of Shipping) •Class NK (Nippon Kaiji Kyokai)

Module-specific Data

Transfer rate on PROFIBUS DP, PROFIBUS RS 485-iS	9.6; 19.2; 45.45; 93.75; 187.5; 500 kbps 1.5 Mbps
Bus-Protocol	PROFIBUS DP

Voltages, Currents, Potentials

Rated supply voltage of RS 485-iS coupler	24 V DC (20.4 ... 28.8 V)
• Reverse polarity protection	Yes
• Voltage failure bypass	Min. 5 ms

Electrical isolation of 24 V power supply

• to PROFIBUS DP	Yes
- tested with	500 V DC
• to PROFIBUS RS 485-iS	Yes
- tested with	AC 500 V

Current consumption RS 485-iS coupler (24 V DC), max.	150 mA
--	--------

Power loss of the module, typically	3 Watts
-------------------------------------	---------

Status, alarms, diagnostics

Status display	no
Alarms	None
Diagnostic functions	Yes
• Bus monitoring PROFIBUS DP (primary)	Yellow LED "DP1"
• Bus monitoring PROFIBUS RS 485-iS (secondary)	Yellow LED "DP2"
• Monitoring 24 V power supply	Green LED "ON"

Technical safety notice

V_{DC}	±4.2 V
I_{SC}	±93 mA
P_0	0.1 Watts
V_{max}	±4.2 V
L_i	0
C_i	0
U_m	AC 250 V
T_a	-25 ... +60 °C

RS 485-IS segment

permissible cable length on a single line	RS 485-iS	DP Ex i
• 9.6 to 187.5 Kbps	1 000 m	200 m
• 500 kbit/s	400 m	200 m
• 1.5 Mbps	200 m	200 m
Number of PROFIBUS DP nodes that can be connected, max.	31	16
PROFIBUS RS 485-iS bus terminator switch	integrated, can be added	

I/O systems

SIMATIC ET 200 systems for the control cabinet
SIMATIC ET 200iSP

Stainless steel wall enclosures

Design



ET 200iSP modules can also be installed in stainless steel wall enclosures designed to meet more exacting degree of protection requirements. The enclosures are available in various sizes. They comply with degree of protection IP65 and can be used in Ex zones 1 and 21.

Delivery can be an empty enclosure or include components, depending on the order.

Send your request to: cabinets.industry@siemens.com

Ordering data

Stainless steel enclosure IP65 for SIMATIC ET 200iSP	6DL2804-	■	■	■	■	■
I/O enclosure						
Stainless steel enclosure, max. IP66, with mounting plate and equipotential bonding rail, empty enclosure for installation of ET 200iSP components ¹⁾	0					
I/O device consisting of stainless steel enclosure with installed ET 200iSP components ²⁾	1					
I/O device consisting of stainless steel enclosure with installed ET 200iSP and pneumatic components ²⁾⁶⁾	2					
Device group						
Device group II, up to zone 1 (including zone 2)	A					
Device group II, up to zone 21 (including zone 22)	D					
Enclosure dimensions W × H × D (in mm)						
650 × 450 × 230, for up to 15 ET 200iSP modules	D					
950 × 450 × 230, for up to 25 ET 200iSP modules	E					
Cable entries/number						
M16 cable entries for signals, 3 rows, 39 or 66 units ³⁾ , 2 × M32 for supply voltage, 4 × M20 for bus cables	3					
M20 cable entries for signals, 3 rows, 36 or 57 units ³⁾ , 2 × M32 for supply voltage, 4 × M20 for bus cables	4					
M16 cable entries for signals, 5 rows, 65 or 110 units ³⁾ , 2 × M32 for supply voltage, 4 × M20 for bus cables	5					
M20 cable entries for signals, 5 rows, 60 or 95 units ³⁾ , 2 × M32 for supply voltage, 4 × M20 for bus cables	6					
Cable entries/material						
Cable entry in plastic, black						0
Ambient operating temperatures: • Surface casing -40...+70 °C • I/O device -40 ... +xx °C ⁴⁾⁵⁾						
Cable entry in metal (nickel-plated brass)						1
Ambient operating temperatures: • Surface casing -40...+70 °C • I/O device -40 ... +xx °C ⁴⁾⁵⁾						
Cable entry in plastic, blue						2
Ambient operating temperatures: • Surface casing -40...+70 °C • I/O device -40 ... +xx °C ⁴⁾⁵⁾						

- 1) The supplied certificate is only valid for the empty enclosure.
- 2) The supplied certificate is valid for the supplied enclosure, including the installed components.
- 3) Number of cable entries/signals depends on enclosure dimensions
- 4) Maximum temperature depends on installed components.
- 5) Minus temperatures down to -40 °C when heater installed. This takes up 2 slots for ET 200iSP modules. The heating (6DL9910-8AA) must be ordered separately.
- 6) Limited to enclosures with 950 mm width and M20 cable entries for signals


Note:

Depending on the cables used, other types and sizes of cable entries can be fitted (on request).

Overview



SIMATIC ET 200pro video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6187716010001

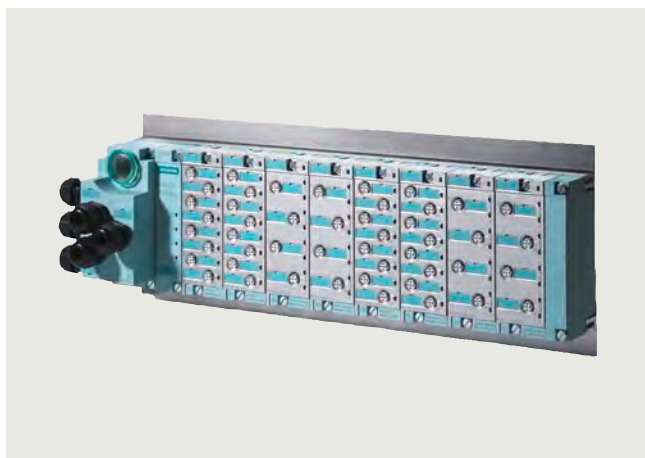

- SIMATIC ET 200pro distributed I/O system with IP65/67 degree of protection for cabinet-free use at the machine
- Small, multifunctional complete solution: Digital inputs/outputs, fail-safe modules, motor starters up to 5.5 kW, etc.
- Communication over PROFIBUS or PROFINET
- Mixed arrangement of fail-safe and standard modules in the same station
- Freely selectable connection technique: M12 7/8", M12 M12-L, direct, ECOFAST, push pull (CU, FO)
- Power module for easy implementation of load groups
- Module replacement during operation (hot swap)
- Easy installation as well as permanent wiring
- Transmission rate for PROFIBUS DP up to 12 Mbps
- Extensive diagnostics: module-specific or channel-specific
- Intelligent motor starters for starting and protection of motors and loads up to 5.5 kW
 - Versions: direct and reversing starters - Standard and High Feature
- Safety motor starters
- Fail-safe modules with safety-related signal processing according to PROFIsafe
- Frequency converters
- RFID communications modules
- Pneumatic interface modules
- IO-Link master

Technical specifications

General technical specifications	
Electronic modules	<ul style="list-style-type: none"> • Digital inputs/outputs • Analog inputs • Analog outputs
Connections	M12 and M8 round connector with standard assignment for actuator/sensor
Transmission rate, max.	12 Mbps (PROFIBUS DP), 100 Mbps (PROFINET IO)
Supply voltage	24 V DC
Current consumption of ET 200pro (internal and sensor supply, non-switched voltage), up to 55 °C, max.	≤ 5 A
Load current for ET 200pro per incoming supply (IM, PM, switched voltage), up to 55 °C, max.	10 A
For overall configuration with looping through (multiple ET 200pros), up to 55 °C, max.	16 A (with terminal module, directly)
Degree of protection	IP65/66/IP67 for interface, digital and analog modules
Material	Thermoplastic (reinforced with glass fiber)
Ambient conditions	
Temperature	From -25 °C/0 °C to +55 °C
Relative humidity	From 5 to 100%
Air pressure	From 795 to 1080 hPa
Mechanical stress	
• Vibration	Vibration test according to IEC 60068, Part 2-6 (sinusoidal) <ul style="list-style-type: none"> • Constant acceleration 5 g, occasionally 10 g for interface, digital and analog modules • 2 g motor starters
• Shock	Shock test according to IEC 680068 Part 2-27, half-sine, 30 g, 18 ms duration for interface, digital and analog modules <ul style="list-style-type: none"> • 15 g, 11 ms duration for motor starters
Approvals	UL, CSA or cULus

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

Interface modules > IM 154-1 and IM 154-2**Overview**

Interface modules for handling communication between the ET 200pro and the higher-level master over PROFIBUS DP.

Ordering data**Article No.****Article No.****IM154-1 interface module**

6ES7154-1AA01-0AB0

For ET 200pro;
for communication between
ET 200pro and higher-level
masters over PROFIBUS DP.

IM154-2 DP High Feature interface module

6ES7154-2AA01-0AB0

For ET 200pro;
for communication between
ET 200pro and higher-level
masters over PROFIBUS DP;
supports PROFI-safe.

Accessories**CM IM DP ECOFAST connection module**

6ES7194-4AA00-0AA0

For connecting PROFIBUS DP
and the 24 V power supply to
PROFIBUS interface modules,
2 ECOFAST Cu connections.

CM IM DP direct connection module

6ES7194-4AC00-0AA0

For connecting PROFIBUS DP
and the 24 V power supply directly
to PROFIBUS interface modules,
up to six M20 cable glands.

CM IM DP M12, 7/8" connection module

6ES7194-4AD00-0AA0

For connecting PROFIBUS DP
and the 24 V power supply to
PROFIBUS interface modules,
2 x M12 and 2 x 7/8".

Accessories for CM IM DP ECOFAST**PROFIBUS ECOFAST hybrid cable, preassembled**

With 2 ECOFAST connectors,
trailable cable
with 2 x Cu 0.64 mm² and
4 x Cu 1.5 mm²,
in various lengths:

1.5 m
3.0 m
5.0 m
10 m
15 m
20 m

6XV1830-7BH15

6XV1830-7BH30

6XV1830-7BH50

6XV1830-7BN10

6XV1830-7BN15

6XV1830-7BN20

PROFIBUS ECOFAST hybrid cable GP, preassembled

With 2 ECOFAST connectors,
trailable cable
with 2 x Cu 0.64 mm² and
4 x Cu 1.5 mm²,
in various lengths:

1.5 m
3.0 m
5.0 m
10 m
15 m
20 m

6XV1860-3PH15

6XV1860-3PH30

6XV1860-3PH50

6XV1860-3PN10

6XV1860-3PN15

6XV1860-3PN20

PROFIBUS ECOFAST hybrid cable, unassembled

6XV1830-7AH10

Trailable cable with 2 x Cu
0.64 mm² and 4 x Cu 1.5 mm²,
sold by the meter, minimum order
quantity 20 m, maximum order
quantity 1 000 m.

PROFIBUS ECOFAST hybrid connector 180

ECOFAST Cu, 2 x Cu, 4 x 1.5 mm²,
HANBRID connector

- With male contact insert, 5-pack
- With female contact insert, 5-pack

6GK1905-0CA00

6GK1905-0CB00

PROFIBUS ECOFAST hybrid connector angular

ECOFAST Cu, 2 x Cu, 4 x 1.5 mm²,
HANBRID connector

- With male contact insert, 5-pack
- With female contact insert, 5-pack

6GK1905-0CC00

6GK1905-0CD00

Accessories for CM IM DP direct**PROFIBUS trailing cable**

6XV1830-3EH10

Max. acceleration 4 m/s²,
at least 3 million bending cycles,
bending radius at least 60 mm,
2-wire shielded, sold by the meter,
minimum order quantity 20 m,
maximum order quantity 1 000 m.

Ordering data	Article No.	Article No.
PROFIBUS FC food bus cable With PE sheath for use in the food, beverages and tobacco industries, 2-wire, shielded, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m.	6XV1830-0GH10	M12 sealing cap For protection of unused M12 connections with ET 200pro.
PROFIBUS FC robust bus cable With PUR sheath for use in environments subject to harsh chemicals and extreme mechanical stress, 2-wire, shielded, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m.	6XV1830-0JH10	Sealing cap 7/8" For protection of unused 7/8" connections with ET 200pro; 10 units per packing unit
Power cable 5-wire, 5 x 1.5 mm ² , trailable, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m.	6XV1830-8AH10	General accessories
Accessories for CM IM DP M12, 7/8"		ET 200pro rack
PROFIBUS M12 connecting cable Preassembled with two M12 plugs, 5-pin, in various lengths:		<ul style="list-style-type: none"> Narrow, for interface, electronics and power modules <ul style="list-style-type: none"> 500 mm 1000 mm 2000 mm, can be cut to length Compact, for interface, electronics and power modules <ul style="list-style-type: none"> 500 mm 1000 mm 2000 mm, can be cut to length Wide, for interface, electronics, power modules and motor starters <ul style="list-style-type: none"> 500 mm 1000 mm 2000 mm, can be cut to length Wide, for I/O modules and motor starters <ul style="list-style-type: none"> 500 mm 1000 mm 2000 mm
1.5 m	6XV1830-3DH15	6ES7194-4GA00-0AA0 6ES7194-4GA60-0AA0 6ES7194-4GA20-0AA0
2.0 m	6XV1830-3DH20	6ES7194-4GC70-0AA0 6ES7194-4GC60-0AA0 6ES7194-4GC20-0AA0
3.0 m	6XV1830-3DH30	6ES7194-4GB00-0AA0 6ES7194-4GB60-0AA0 6ES7194-4GB20-0AA0
5.0 m	6XV1830-3DH50	6ES7194-4GD00-0AA0 6ES7194-4GD10-0AA0 6ES7194-4GD20-0AA0
10 m	6XV1830-3DN10	
15 m	6XV1830-3DN15	
7/8" connecting cable to power supply 5-wire, 5 x 1.5 mm ² , trailable, preassembled with two 7/8" connectors, 5-pin, in various lengths:		Spare fuse 12.5 A quick-response, for interface and power modules, 10 units per packing unit.
1.5 m	6XV1822-5BH15	6ES7194-4HB00-0AA0
2.0 m	6XV1822-5BH20	
3.0 m	6XV1822-5BH30	
5.0 m	6XV1822-5BH50	
10 m	6XV1822-5BN10	
15 m	6XV1822-5BN15	
M12 connection plug For ET 200eco, with axial cable outlet.		PROFIBUS FastConnect bus cable Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m.
<ul style="list-style-type: none"> With male contact insert, 5-pack With female contact insert, 5-pack 	6GK1905-0EA00 6GK1905-0EB00	6XV1830-0EH10
PROFIBUS M12 bus termination connector With male contact insert.	6GK1905-0EC00	PROFIBUS hybrid standard cable GP Standard PROFIBUS hybrid cable with 2 power cables (1.5 mm ²) for supplying data and energy for ET 200pro.
7/8" connection plug For ET 200eco, with axial cable outlet.		SIMATIC Manual Collection Electronic manuals on DVD, multilingual: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT
<ul style="list-style-type: none"> With male contact insert, 5-pack With female contact insert, 5-pack 	6GK1905-0FA00 6GK1905-0FB00	6ES7998-8XC01-8YE0
		SIMATIC Manual Collection – Update service for 1 year Scope of supply: Current DVD S7 Manual Collection and the three subsequent updates.
		6ES7998-8XC01-8YE2

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**Interface modules > IM 154-1 and IM 154-2****Technical specifications**

Article number	6ES7154-1AA01-0AB0 ET 200pro, IM 154-1 DP	6ES7154-2AA01-0AB0 ET 200pro, IM154-2 DP HF
General information		
Product type designation	IM 154-1 DP	IM 154-2 DP HF
Supply voltage		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes; against destruction	Yes; against destruction
Short-circuit protection	Yes; over exchangeable fuses	Yes; over exchangeable fuses
Load voltage 2L+		
• Rated value (DC)	24 V	24 V
• Reverse polarity protection	Yes; against destruction	Yes; against destruction
Input current		
from supply voltage 1L+, max.	200 mA	200 mA
Address area		
Addressing volume		
• Inputs	244 byte	244 byte
• Outputs	244 byte	244 byte
Interfaces		
Interfaces/bus type	PROFIBUS DP	PROFIBUS DP
Interface types		
RS 485		
• Transmission rate, max.	12 Mbit/s	12 Mbit/s
• automatic detection of transmission rate	Yes	Yes
Protocols		
PROFIBUS DP		
Services		
- SYNC capability	Yes	Yes
- FREEZE capability	Yes	Yes
- Direct data exchange (slave-to-slave communication)	Yes	Yes
Interrupts/diagnostics/status information		
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable
• Hardware interrupt	Yes; Parameterizable	Yes; Parameterizable
Diagnostics indication LED		
• For load voltage monitoring	Yes	Yes
• Bus fault BF (red)	Yes	Yes
• Group error SF (red)	Yes	Yes
• Monitoring 24 V voltage supply ON (green)	Yes	Yes
Potential separation		
between supply voltage and electronics	Yes	Yes
Degree and class of protection		
IP degree of protection	IP65/67	IP65/67
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C	-25 °C
• max.	55 °C	55 °C
Ambient temperature during storage/transportation		
• min.	-40 °C	-40 °C
• max.	70 °C	70 °C
Dimensions		
Width	90 mm	90 mm
Height	130 mm	130 mm
Depth	60 mm	60 mm
Weights		
Weight, approx.	375 g	375 g

Overview



Interface module for processing the communication between ET 200pro and a higher-level controller over PROFINET IO.

Ordering data

Ordering data	Article No.	Ordering data	Article No.
IM 154-3 PN High Feature interface module For communication between ET 200pro and higher-level controllers via PROFINET IO; supports PROFI-safe. Connection module 6ES7194-4AK00-0AA0 must be ordered separately.	6ES7154-3AB00-0AB0	M12 sealing cap For protection of unused M12 connections with ET 200pro.	3RX9802-0AA00
IM 154-4 PN High Feature interface module For communication between ET 200pro and higher-level controllers via PROFINET IO; supports PROFI-safe. Order connection module 6ES7194-4A.00-0AA0 separately.	6ES7154-4AB10-0AB0	IE M12 connecting cables Preassembled with two M12 plugs, up to 85 m, in various lengths:	
		0.3 m	6XV1870-8AE30
		0.5 m	6XV1870-8AE50
		1.0 m	6XV1870-8AH10
		1.5 m	6XV1870-8AH15
		2.0 m	6XV1870-8AH20
		3.0 m	6XV1870-8AH30
		5.0 m	6XV1870-8AH50
		10 m	6XV1870-8AN10
		15 m	6XV1870-8AN15
		20 m	6XV1870-8AN20
		30 m	6XV1870-8AN30
		40 m	6XV1870-8AN40
		50 m	6XV1870-8AN50
Accessories		7/8" sealing caps 1 pack = 10 units	6ES7194-3JA00-0AA0
Connection modules for IM 154-3 PN High Feature		7/8" connecting cable to power supply 5-wire, 5 x 1.5 mm ² , trailable, preassembled with two 7/8" connectors, 5-pin, up to 50 m, in various lengths:	
<ul style="list-style-type: none"> CM IM PN M12 connection module 7/8" S for connecting PROFINET PN and 24 V power supply to PROFINET interface modules, 2 x M12 and 2 x 7/8" 	6ES7194-4AK00-0AA0	1.5 m	6XV1822-5BH15
<ul style="list-style-type: none"> CM IM PN M12 connection module M12-L S for connecting PROFINET PN and 24 V power supply to PROFINET interface modules, 2x M12-D and 2x M12-L 	6ES7194-4AL00-0AA0	2.0 m	6XV1822-5BH20
		3.0 m	6XV1822-5BH30
		5.0 m	6XV1822-5BH50
		10 m	6XV1822-5BN10
		15 m	6XV1822-5BN15
Connection modules for IM 154-4 PN High Feature			
<ul style="list-style-type: none"> CM IM PN M12 connection module, 7/8" for connecting PROFINET PN and 24 V power supply to PROFINET interface modules, 2 x M12 and 2 x 7/8" 	6ES7194-4AJ00-0AA0		
<ul style="list-style-type: none"> CM IM PN 2xRJ45 connection module for connecting PROFINET PN and 24 V power supply to PROFINET interface modules, 2 x RJ45 and 2 x push-pull power connector 	6ES7194-4AF00-0AA0		
<ul style="list-style-type: none"> CM IM PN 2xSCRJ FO connection module for connecting PROFINET PN and 24 V power supply to PROFINET interface modules, 2 x SCRJ FO and 2 x push-pull power connector 	6ES7194-4AG00-0AA0		

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**Interface modules > IM 154-3 PN and IM 154-4 PN**

Ordering data	Article No.	Article No.
Power cable 5-wire, 5 x 1.5 mm ² , trailable, sold by the meter, minimum order quantity 20 m, maximum order quantity 1000 m.	6XV1830-8AH10	
7/8" connection plug For ET 200eco, with axial cable outlet. • With male contact insert, 5-pack • With female contact insert, 5-pack	6GK1905-0FA00 6GK1905-0FB00	
Industrial Ethernet FastConnect installation cables • IE FC TP standard cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m. • IE FC TP trailing cable 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m. • IE FC TP trailing cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m. • IE TP torsion cable GP 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m. • IE FC TP marine cable 2 x 2; sold by the meter, max. delivery unit 1000 m; minimum order quantity 20 m.	6XV1840-2AH10 6XV1840-3AH10 6XV1870-2D 6XV1870-2F 6XV1840-4AH10	
IE RJ45 plug PRO RJ45 plug connector in degree of protection IP65/IP67 for on-site assembly, plastic enclosure, insulation displacement connection system, for SCALANCE X-200IRT PRO and ET 200pro: 1 pack = 1 unit.	6GK1901-1BB10-6AA0	
IE SC RJ POF plug PRO SC RJ plug connector for POF fibers in degree of protection IP65/IP67, for on-site assembly, plastic enclosure, for SCALANCE X-200IRT PRO and ET 200pro 1 pack = 1 unit	6GK1900-0MB00-6AA0	
IE SC RJ PCF plug PRO SC RJ plug connector for PCF fibers in degree of protection IP65/IP67, for on-site assembly, plastic enclosure, for SCALANCE X-200IRT PRO 1 pack = 1 unit.	6GK1900-0NB00-6AA0	
Power plug PRO 5-pin power plug connector for 2 x 24 V power supply in degree of protection IP65/67, for on-site assembly, plastic enclosure, for SCALANCE X-200IRT and ET 200pro 1 pack = 1 unit.	6GK1907-0AB11-6AA0	
		IE Panel Feedthrough Control cabinet bushing for converting M12 D-coded connection system (IP65) to RJ45 connection system (IP20) • 1 pack = 5 units 6GK1901-0DM20-2AA5
		Push-pull connection plug For 1L+/ 2L+, unassembled 6GK1907-0AB11-6AA0
		Cover caps for push-pull RJ45 female connectors 5 items per pack 6ES7194-4JD50-0AA0
		Cover caps for push-pull female connectors power (1L+, 2L+) 5 units 6ES7194-4JA50-0AA0
		General accessories
		ET 200pro rack • Narrow, for interface, electronics and power modules - 500 mm - 1000 mm - 2000 mm, can be cut to length • Compact, for interface, electronics and power modules - 500 mm - 1000 mm - 2000 mm, can be cut to length • Wide, for interface, electronics, power modules and motor starters - 500 mm - 1000 mm - 2000 mm, can be cut to length • Wide, for I/O modules and motor starters - 500 mm - 1000 mm - 2000 mm 6ES7194-4GA00-0AA0 6ES7194-4GA60-0AA0 6ES7194-4GA20-0AA0 6ES7194-4GC70-0AA0 6ES7194-4GC60-0AA0 6ES7194-4GC20-0AA0 6ES7194-4GB00-0AA0 6ES7194-4GB60-0AA0 6ES7194-4GB20-0AA0 6ES7194-4GD00-0AA0 6ES7194-4GD10-0AA0 6ES7194-4GD20-0AA0
		Spare fuse 12.5 A quick-response, for interface and power modules, 10 units per packing unit. 6ES7194-4HB00-0AA0
		SIMATIC Manual Collection Electronic manuals on DVD, multilingual: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT 6ES7998-8XC01-8YE0
		SIMATIC Manual Collection – Update service for 1 year Current Manual Collection DVD and the three subsequent updates 6ES7998-8XC01-8YE2

Technical specifications

Article number	6ES7154-3AB00-0AB0 ET 200pro, IM 154-3 PN HF	6ES7154-4AB10-0AB0 ET 200pro, IM 154-4 PN HF
General information		
Product type designation	IM 154-3 PN HF	IM 154-4 PN HF
Supply voltage		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes; against destruction	Yes; against destruction
Short-circuit protection	Yes; Fuse in lower part is exchangeable, the fuse on the IM-LP is not	Yes; Fuse in lower part is exchangeable, the fuse on the IM-LP is not
Load voltage 2L+		
• Rated value (DC)	24 V	24 V
• Reverse polarity protection	Yes; against destruction	Yes; against destruction
Input current		
from supply voltage 1L+, max.	300 mA	400 mA; Dependent on terminal module, typ. maximum value for FO connection method, full load on RWB and 20.4 V input voltage
Address area		
Addressing volume		
• Inputs	256 byte	256 byte
• Outputs	256 byte	256 byte
Interfaces		
Interfaces/bus type	PROFINET IO	PROFINET IO
Interface types		
M12 port		
• Autonegotiation	Yes	Yes
• Transmission rate, max.	100 Mbit/s	100 Mbit/s
Protocols		
Protocols (Ethernet)		
• SNMP	Yes	Yes
• LLDP	Yes	
• ping	Yes	Yes
• ARP	Yes	Yes
Redundancy mode		
Media redundancy		
- MRP	Yes	Yes
Interrupts/diagnostics/ status information		
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable
• Hardware interrupt	Yes; Parameterizable	Yes; Parameterizable
Diagnostics indication LED		
• MAINT LED	Yes	Yes
• LINK LED	Yes	Yes
• RX/TX LED	Yes	Yes
• For load voltage monitoring	Yes	Yes
• Bus fault BF (red)	Yes	Yes
• Group error SF (red)	Yes	Yes
• Monitoring 24 V voltage supply ON (green)	Yes	Yes

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

Interface modules > IM 154-3 PN and IM 154-4 PN**Technical specifications**

Article number	6ES7154-3AB00-0AB0 ET 200pro, IM 154-3 PN HF	6ES7154-4AB10-0AB0 ET 200pro, IM 154-4 PN HF
Potential separation		
between backplane bus and electronics	No	No
between supply voltage and electronics	Yes	Yes
Degree and class of protection		
IP degree of protection	IP65/67	IP65/67
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C	-25 °C
• max.	55 °C	55 °C
Ambient temperature during storage/transportation		
• min.	-40 °C	-40 °C
• max.	70 °C	70 °C
Dimensions		
Width	90 mm	135 mm
Height	130 mm	130 mm
Depth	60 mm	60 mm
Weights		
Weight, approx.	375 g	490 g

Overview



- Expansion modules with digital inputs/outputs for connection of actuators/sensors
- With scalable diagnostics
 - Standard modules with module-specific diagnostics
 - High Feature module with channel-specific diagnostics and parameterizable input delay or hardware interrupts
- Double or single assignment can be implemented for each M12 in the case of the 8 DI and 8 DO module by selecting CM IO 4 x M12 or CM IO 8 x M12
- IO connection modules are available in metal and plastic versions

Ordering data

Ordering data	Article No.	Ordering data	Article No.
8 DI digital input module 24 V DC, with module-specific diagnostics, including bus module. Connection module must be ordered separately	6ES7141-4BF00-0AA0	CM IO 4 x M12 inverse connection module 4 M12 sockets for connection of digital actuators to ET 200pro (4 DQ and 4 DQ HF); 2 x M12 single assignment, 2 x M12 double assignment	6ES7194-4CA50-0AA0
8 DI High Feature digital input module 24 V DC, with channel-specific diagnostics, including bus module. Connection module must be ordered separately	6ES7141-4BF00-0AB0	CM IO 4 x M12 P connection module 4 M12 sockets for connecting digital sensors/actuators to ET 200pro; plastic version	6ES7194-4CA10-0AA0
16 DI digital input module 24 V DC, with module-specific diagnostics, including bus module. Connection module 6ES7194-4CB50-0AA0 must be ordered separately	6ES7141-4BH00-0AA0	CM IO 8 x M12 connection module 8 M12 sockets for connecting digital sensors or actuators to ET 200pro	6ES7194-4CB00-0AA0
4 DQ digital output module 24 V DC, 2 A, with module-specific diagnostics, including bus module. Connection module must be ordered separately	6ES7142-4BD00-0AA0	CM IO 8 x M12 P connection module 8 M12 sockets for connecting digital sensors or actuators to ET 200pro; plastic version	6ES7194-4CB10-0AA0
4 DQ High Feature digital output module 24 V DC, 2 A, with channel-specific diagnostics, including bus module. Connection module must be ordered separately	6ES7142-4BD00-0AB0	CM IO 8 x M12D connection module 8 M12 sockets for connecting digital sensors or actuators to ET 200pro	6ES7194-4CB50-0AA0
8 DQ digital output module 24 V DC, 0.5 A, with module-specific diagnostics, including bus module. Connection module must be ordered separately	6ES7142-4BF00-0AA0	CM IO 8 x M8 connection module 8 sockets M8 for connection of digital sensors or actuators to ET 200pro	6ES7194-4EB00-0AA0
4 DI/4 DQ digital input and output module 24 V DC, 0.5 A, with module-specific diagnostics, including bus module. Connection module must be ordered separately	6ES7143-4BF50-0AA0	CM IO 2 x M12 connection module 2 M12 8-pin sockets; for use with: EM 8 DI, 24 V DC and 8 DQ, 24 V DC/0.5 A	6ES7194-4FB00-0AA0
4 DIQ/4 DQ digital input and output module 24 V DC, 0.5 A, with module-specific diagnostics, including bus module. Connection module must be ordered separately	6ES7143-4BF00-0AA0	CM IO 1 x M23 connection module 1 M23 socket; for use with: EM 8 DI, 24 V DC and 8 DQ, 24 V DC/0.5 A	6ES7194-4FA00-0AA0
Accessories		Module identification labels For color coding of the CM IOs in the colors of white, red, blue and green; pack with 100 units each	6ES7194-4HA00-0AA0
CM IO 4 x M12 connection module 4 M12 sockets for connecting digital or analog sensors or actuators to ET 200pro	6ES7194-4CA00-0AA0	M12 sealing cap For protection of unused M12 connections with ET 200pro	3RX9802-0AA00
		M12 Y circular connector For double connection of sensors via a single cable, 5-pin; cannot be used for F-DI 4/8	6ES7194-1KA01-0XA0
		M12 Y-cable For double connection of I/O by means of a single cable to ET 200, 5-pin	6ES7194-6KA00-0XA0
		M8 sealing cap For IP67 modules	3RK1901-1PN00

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**I/O modules > Digital expansion modules****Technical specifications**

Article number	6ES7141-4BF00-0AA0 ET 200pro, EM 8DI 24V DC	6ES7141-4BF00-0AB0 ET 200pro, EM 8DI 24V DC HF	6ES7141-4BH00-0AA0 ET 200pro, EM 16DI DC 24V
General information			
Product function			
• Isochronous mode	No	No	No
Supply voltage			
Rated value (DC)	24 V	24 V	24 V
Reverse polarity protection	Yes; Against destruction; encoder power supply outputs applied with reversed polarity	Yes; against destruction; load increasing	Yes; Against destruction; encoder power supply outputs applied with reversed polarity
Input current			
from supply voltage 1L+, max.	20 mA	40 mA	30 mA
from backplane bus 3.3 V DC, max.	20 mA	20 mA	20 mA
Encoder supply			
Number of outputs	8	8	8
Short-circuit protection	Yes; per module, electronic	Yes; per channel, electronic	Yes; per module, electronic
Output current			
• up to 55 °C, max.	1 A	1 A	1 A
Digital inputs			
Number of digital inputs	8	8	16
Input characteristic curve in accordance with IEC 61131, type 1	Yes	No	Yes
Input characteristic curve in accordance with IEC 61131, type 2	No	Yes	
Number of simultaneously controllable inputs all mounting positions			
- up to 55 °C, max.	8	8	16
Input voltage			
• Rated value (DC)	24 V	24 V	24 V
• for signal "0"	-3 to +5V	-3 to +5V	-3 to +5V
• for signal "1"	13 to 30V	+11 to +30V	+11 to +30V
Input current			
• for signal "1", typ.	7 mA	7 mA	4 mA
Input delay (for rated value of input voltage) for standard inputs			
- parameterizable	No	Yes	No
Cable length			
• unshielded, max.	30 m	30 m	30 m
Encoder			
Connectable encoders			
• 2-wire sensor	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA	1.5 mA
Interrupts/diagnostics/ status information			
Diagnostics function	Yes	Yes; channel by channel, parameterizable	Yes
Alarms			
• Diagnostic alarm	Yes	Yes	Yes
• Hardware interrupt		Yes	
Diagnoses			
• Diagnostic information readable	Yes	Yes	Yes
• Wire-break		Yes; Monitoring, I < 0.3 mA; per channel	
• Short-circuit	Yes; Sensor supply to M; module by module	Yes; channel by channel	Yes; Sensor supply to M; module by module
Diagnostics indication LED			
• Group error SF (red)	Yes	Yes	Yes
• Status indicator digital input (green)	Yes; Per channel	Yes; Per channel	Yes; Per channel

Technical specifications

Article number	6ES7141-4BF00-0AA0 ET 200pro, EM 8DI 24V DC	6ES7141-4BF00-0AB0 ET 200pro, EM 8DI 24V DC HF	6ES7141-4BH00-0AA0 ET 200pro, EM 16DI DC 24V
Potential separation			
between backplane bus and all other circuit components	Yes	Yes	Yes
Potential separation digital inputs			
• between the channels	No	No	No
• between the channels and backplane bus	Yes	Yes	Yes
Dimensions			
Width	45 mm	45 mm	45 mm
Height	130 mm	130 mm	130 mm
Depth	35 mm	35 mm; without terminal module	35 mm
Weights			
Weight, approx.	140 g	140 g	140 g
Article number	6ES7142-4BD00-0AA0 ET 200pro, EM 4DO 24V DC/2.0A	6ES7142-4BD00-0AB0 ET 200pro, EM 4DO 24VDC/2.0A HF	6ES7142-4BF00-0AA0 ET 200pro, EM 8DO DC24V/0.5A
Supply voltage			
Load voltage 2L+			
• Rated value (DC)	24 V	24 V	24 V
• Short-circuit protection	Yes; per channel, electronic	Yes; per channel, electronic	Yes; per channel, electronic
• Reverse polarity protection	Yes; against destruction; load increasing	Yes; against destruction; load increasing	Yes; against destruction; load increasing
Input current			
from load voltage 2L+ (without load), max.	20 mA	40 mA	30 mA
from backplane bus 3.3 V DC, max.	20 mA	30 mA	30 mA
Digital outputs			
Number of digital outputs	4	4	8
Short-circuit protection	Yes	Yes	Yes
Limitation of inductive shutdown voltage to	2L+ (-47 V)	2L+ (-47 V)	2L+ (-47 V)
Controlling a digital input	Yes	Yes	Yes; Isolation between 1L+ and 2L+ is no longer provided, as 1M and 2M are jumpered
Switching capacity of the outputs			
• on lamp load, max.	10 W	10 W	5 W
Load resistance range			
• lower limit	12 Ω	12 Ω	48 Ω
• upper limit	4 kΩ	4 kΩ	4 kΩ
Output voltage			
• for signal *1*, min.	2L+ (-0,8 V)	2L+ (-0,8 V)	2L+ (-0,8 V)
Output current			
• for signal *1* rated value	2 A	2 A	0.5 A
• for signal *0* residual current, max.	0.5 mA	0.5 mA	0.5 mA
Parallel switching of two outputs			
• for uprating	No	No	No
• for redundant control of a load	Yes	Yes	Yes
Switching frequency			
• with resistive load, max.	100 Hz	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz	0.5 Hz
• on lamp load, max.	1 Hz	1 Hz	1 Hz
Total current of the outputs (per group)			
all mounting positions			
- up to 55 °C, max.	4 A	4 A	4 A
Cable length			
• shielded, max.	30 m	30 m	30 m
• unshielded, max.	30 m	30 m	30 m

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**I/O modules > Digital expansion modules****Technical specifications**

Article number	6ES7142-4BD00-0AA0 ET 200pro, EM 4DO 24V DC/2.0A	6ES7142-4BD00-0AB0 ET 200pro, EM 4DO 24VDC/2.0A HF	6ES7142-4BF00-0AA0 ET 200pro, EM 8DO DC24V/0.5A
Interrupts/diagnostics/ status information			
Diagnostics function	Yes	Yes	Yes
Substitute values connectable		Yes	
Alarms			
• Diagnostic alarm	Yes	Yes	Yes
Diagnoses			
• Diagnostic information readable	Yes	Yes	Yes
• Wire-break		Yes; channel by channel	
• Short-circuit	Yes; Short-circuit of outputs to ground; module by module	Yes; channel by channel	Yes; Short-circuit of outputs to ground; module by module
Diagnostics indication LED			
• Group error SF (red)	Yes	Yes	Yes
• Status indicator digital output (green)	Yes	Yes	Yes
• Channel fault indicator F (red)		Yes	
Potential separation			
between backplane bus and all other circuit components	Yes	Yes	Yes
Potential separation digital outputs			
• between the channels	No	No	No
• between the channels and backplane bus	Yes	Yes	Yes
Standards, approvals, certificates			
Suitable for safety-related tripping of standard modules	Yes	Yes	Yes
Highest safety class achievable for safety-related tripping of standard modules			
• Performance level according to ISO 13849-1	PL d	PL d	PL d
• Category according to ISO 13849-1	Cat. 3	Cat. 3	Cat. 3
• SIL acc. to IEC 62061	SIL 2	SIL 2	SIL 2
Dimensions			
Width	45 mm	45 mm	45 mm
Height	130 mm	130 mm	130 mm
Depth	35 mm	35 mm; without terminal module	35 mm
Weights			
Weight, approx.	140 g	140 g	140 g

Article number	6ES7143-4BF50-0AA0 ET 200pro, EM 4DI / 4DO DC 24V, 0.5A	6ES7143-4BF00-0AA0 ET 200pro, EM 4 DIO / 4 DO DC 24V, 0.5A
Supply voltage		
Rated value (DC)		24 V
Reverse polarity protection		Yes; Against destruction; encoder power supply outputs applied with reversed polarity
Load voltage 2L+		
• Rated value (DC)	24 V	24 V
• Short-circuit protection	Yes	Yes
• Reverse polarity protection	Yes	Yes; against destruction; load increasing
Input current		
from supply voltage 1L+, max.		20 mA
from load voltage 2L+ (without load), max.	20 mA	20 mA
from backplane bus 3.3 V DC, max.	20 mA	30 mA
Encoder supply		
Short-circuit protection	Yes; per module, electronic	Yes; per module, electronic
Output current		
• up to 55 °C, max.	1 A	1 A

Technical specifications

Article number	6ES7143-4BF50-0AA0 ET 200pro, EM 4DI / 4DO DC 24V, 0.5A	6ES7143-4BF00-0AA0 ET 200pro, EM 4 DIO / 4 DO DC 24V, 0.5A
Digital inputs		
Number of digital inputs	4	4; 4 DIos can be parameterized
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes
Number of simultaneously controllable inputs all mounting positions		
- up to 55 °C, max.		4
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal "0"	-3 to +5V	-3 to +5V
• for signal "1"	+11 to +30V	+11 to +30V
Input current		
• for signal "1", typ.	7 mA	7 mA
Cable length		
• unshielded, max.	30 m	30 m
Digital outputs		
Number of digital outputs	4	8; 4 DO fixed, 4 DIO parameterizable
• in groups of		4; 2 load groups for 4 outputs each
Short-circuit protection	Yes; per channel, electronic	Yes; per channel, electronic
Limitation of inductive shutdown voltage to	Typ. (2L+) -47 V	Typ. (L1+, L2+) -47 V
Controlling a digital input	Yes	Yes
Switching capacity of the outputs		
• on lamp load, max.	5 W	5 W
Load resistance range		
• lower limit	48 Ω	48 Ω
• upper limit	4 kΩ	4 kΩ
Output voltage		
• for signal "1", min.		2L+ (-0,8 V)
Output current		
• for signal "1" rated value	0.5 A	0.5 A
• for signal "0" residual current, max.	0.5 mA	0.5 mA
Parallel switching of two outputs		
• for uprating	No	No
• for redundant control of a load	Yes	Yes
Switching frequency		
• with resistive load, max.	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz
• on lamp load, max.	1 Hz	1 Hz
Total current of the outputs (per group) all mounting positions		
- up to 55 °C, max.	2 A	2 A
Cable length		
• unshielded, max.	30 m	30 m
Encoder		
Connectable encoders		
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**I/O modules > Digital expansion modules****Technical specifications**

Article number	6ES7143-4BF50-0AA0 ET 200pro, EM 4DI / 4DO DC 24V, 0.5A	6ES7143-4BF00-0AA0 ET 200pro, EM 4 DIO / 4 DO DC 24V, 0.5A
Interrupts/diagnostics/ status information		
Diagnostics function	Yes	Yes
Alarms		
• Diagnostic alarm	Yes	Yes
Diagnoses		
• Diagnostic information readable	Yes	Yes
• Short-circuit	Yes; Short-circuit of outputs to ground; module by module	Yes; Short-circuit of outputs to ground; module by module
Diagnostics indication LED		
• Group error SF (red)		Yes
• Status indicator digital input (green)	Yes	Yes
• Status indicator digital output (green)	Yes	Yes
Potential separation		
between backplane bus and all other circuit components	Yes	Yes
Potential separation digital inputs		
• between the channels	No	No
• between the channels and backplane bus	Yes	Yes
Potential separation digital outputs		
• between the channels	No	
• between the channels and backplane bus	Yes	Yes
Standards, approvals, certificates		
Suitable for safety-related tripping of standard modules		Yes
Highest safety class achievable for safety-related tripping of standard modules		
• Performance level according to ISO 13849-1		PL d
• Category according to ISO 13849-1		Cat. 3
• SIL acc. to IEC 62061		SIL 2
Dimensions		
Width	45 mm	45 mm
Height	130 mm	130 mm
Depth	35 mm	35 mm
Weights		
Weight, approx.	140 g	140 g

Overview



- Expansion modules with analog inputs and outputs for connecting sensors/actuators
- With diagnostics functionality, limit values and substitute values

Ordering data

Article No.

Article No.

4AI U analog input module

6ES7144-4FF01-0AB0

High Feature, ± 10 V; ± 5 V;
0 to 10 V; 1 to 5 V,
channel-specific diagnostics,
including bus module. Connection
module must be ordered separately

4AI I analog input module

6ES7144-4GF01-0AB0

High Feature, ± 20 mA; 0 to 20 mA;
4 to 20 mA, channel-specific
diagnostics, including bus module.
Connection module must be
ordered separately

4AI RTD analog input module

6ES7144-4JF00-0AB0

High Feature; resistances:
150, 300, 600 and 3000 Ohm;
resistance thermometer: Pt100,
200, 500, 1000, Ni100, 120, 200,
500 and 1000; channel-specific
diagnostics, incl. bus module.
Connection module must be
ordered separately

4AI TC analog input module

6ES7144-4PF00-0AB0

High Feature; thermocouples:
Type B, E, J, K, L, N, R, S, T;
voltage measurement ± 80 mV;
channel diagnostics, including bus
module. Connection module must
be ordered separately

4AO U analog output module

6ES7145-4FF00-0AB0

High Feature, ± 10 V; 0 to 10 V;
1 to 5 V, channel-specific
diagnostics, including bus module.
Connection module must be
ordered separately

4AO I analog output module

6ES7145-4GF00-0AB0

High Feature, ± 20 mA; 0 to 20 mA;
4 to 20 mA, channel-specific
diagnostics, including bus module.
Connection module must be
ordered separately

Accessories**CM IO 4 x M12 connection module**

6ES7194-4CA00-0AA0

4 M12 sockets for connecting
digital or analog sensors or
actuators to ET 200pro

M12 compensation connectors

6ES7194-4AB00-0AA0

With integral Pt100 for cold junction
compensation when connecting
thermocouples

Module identification labels

6ES7194-4HA00-0AA0

For color coding of the CM IOs in
the colors of white, red, blue and
green; pack with 100 units each

M12 sealing cap

3RX9802-0AA00

For protection of unused M12
connections with ET 200pro

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**I/O modules > Analog expansion modules****Technical specifications**

Article number	6ES7144-4FF01-0AB0 ET 200pro, EM 4AI-U HF	6ES7144-4GF01-0AB0 ET 200pro, EM 4AI-I HF	6ES7144-4JF00-0AB0 ET 200pro, EM 4 AI-RTD HF	6ES7144-4PF00-0AB0 ET 200pro, EM 4 AI-TC HF
Supply voltage				
Rated value (DC)	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes; against destruction	Yes; against destruction	Yes; against destruction	Yes; against destruction
Input current				
from supply voltage 1L+, max.	40 mA; Typical	40 mA; Typical	27 mA; Typical	34 mA; Typical
from backplane bus 3.3 V DC, max.	12 mA; Typical	12 mA; Typical	10 mA; Typical	20 mA; Typical
Encoder supply				
Number of outputs	4	4		
Short-circuit protection	Yes; per module, electronic to frame	Yes; per module, electronic to frame		
Output current				
• up to 55 °C, max.	1 A	1 A		
Analog inputs				
Number of analog inputs	4	4	4	4
permissible input voltage for voltage input (destruction limit), max.	35 V			20 V
permissible input current for current input (destruction limit), max.		40 mA		
Constant measurement current for resistance-type transmitter, typ.			1.25 mA; 1.25 / 0.5 mA depending on measuring range	
Cycle time (all channels) max.	5 ms	10 ms	83 ms; 83 ms at 50 Hz; 69 ms at 60 Hz	Number of active channels per module x basic conversion time
Technical unit for temperature measurement adjustable			Yes; Degrees Celsius/degrees Fahrenheit	Yes; °C/°F/K
Input ranges (rated values), voltages				
• 0 to +10 V	Yes			
• 1 V to 5 V	Yes			
• -10 V to +10 V	Yes			
• -5 V to +5 V	Yes			
• -80 mV to +80 mV				Yes
Input ranges (rated values), currents				
• 0 to 20 mA		Yes		
• -20 mA to +20 mA		Yes		
• 4 mA to 20 mA		Yes		
Input ranges (rated values), thermocouples				
• Type B				Yes
• Type E				Yes
• Type J				Yes
• Type K				Yes
• Type L				Yes
• Type N				Yes
• Type R				Yes
• Type S				Yes
• Type T				Yes
Input ranges (rated values), resistance thermometer				
• Cu 10			No	
• Ni 100			Yes	
• Ni 1000			Yes	
• Ni 120			Yes	
• Ni 200			Yes	
• Ni 500			Yes	
• Pt 100			Yes	
• Pt 1000			Yes	
• Pt 200			Yes	
• Pt 500			Yes	

Technical specifications

Article number	6ES7144-4FF01-0AB0 ET 200pro, EM 4AI-U HF	6ES7144-4GF01-0AB0 ET 200pro, EM 4AI-I HF	6ES7144-4JF00-0AB0 ET 200pro, EM 4 AI-RTD HF	6ES7144-4PF00-0AB0 ET 200pro, EM 4 AI-TC HF
Input ranges (rated values), resistors				
• 0 to 150 ohms			Yes	
• 0 to 300 ohms			Yes	
• 0 to 600 ohms			Yes	
• 0 to 3000 ohms			Yes	
Thermocouple (TC)				
Temperature compensation				
- internal temperature compensation				Yes
- external temperature compensation with compensations socket				Yes
Characteristic linearization				
• parameterizable			Yes	
- for resistance thermometer			Ptxxx, Nixxx	
Cable length				
• shielded, max.	30 m	30 m	30 m	30 m
Analog value generation for the inputs				
Measurement principle	integrating	integrating	integrating	integrating
Integration and conversion time/resolution per channel				
• Resolution with overrange (bit including sign), max.	15 bit; 15 bit + sign at ±10 V, at ±5 V; 15 bit at 0 V to 10 V, at 1 V to 5 V	15 bit; 15 bit + sign at ±10 V, at ±5 V; 15 bit at 0 V to 10 V, at 1 V to 5 V	15 bit; at 150, 300, 600 and 3 000 ohms; otherwise 15 bits + sign	15 bit; + sign
• Integration time (ms)	0,3 / 16,7 / 20 / 60	0,3 / 16,7 / 20 / 60	20 / 16,667	2,5 / 16,67 / 20 / 100 ms
• Interference voltage suppression for interference frequency f1 in Hz	16,67 / 50 / 60 / 3 600	16,67 / 50 / 60 / 3 600	50 / 60 Hz	10 / 50 / 60 / 400 Hz
• Conversion time (per channel)	1.1 ms	1.1 ms	20.625 ms; 20.625 ms at 50 Hz; 17.25 ms at 60 Hz	4.7/19/22/102 ms
Smoothing of measured values				
• parameterizable	Yes	Yes	Yes	Yes
Encoder				
Connection of signal encoders				
• for voltage measurement	Yes			Yes
• for current measurement as 2-wire transducer		Yes		
• for current measurement as 4-wire transducer		Yes		
• for resistance measurement with two-wire connection			Yes; Line resistances are also measured	
• for resistance measurement with three-wire connection			Yes	
• for resistance measurement with four-wire connection			Yes	
Errors/accuracies				
Linearity error (relative to input range), (+/-)	0.0075 %	0.0075 %	0.05 %	0.01 %
Temperature error (relative to input range), (+/-)	0.00075 %/K	0.00075 %/K	0.002 %/K	0.0004 %/K; Positive temperature
Crosstalk between the inputs, min.	-70 dB	-70 dB	-50 dB	-90 dB; max.
Repeat accuracy in steady state at 25 °C (relative to input range), (+/-)	0.004 %	0.004 %	0.015 %	0.01 %
Operational error limit in overall temperature range				
• Voltage, relative to input range, (+/-)	0.1 %			0.12 %; Positive temperature
• Current, relative to input range, (+/-)		0.1 %		
• Resistance thermometer, relative to input range, (+/-)			0.175 %	

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**I/O modules > Analog expansion modules****Technical specifications**

Article number	6ES7144-4FF01-0AB0 ET 200pro, EM 4AI-U HF	6ES7144-4GF01-0AB0 ET 200pro, EM 4AI-I HF	6ES7144-4JF00-0AB0 ET 200pro, EM 4 AI-RTD HF	6ES7144-4PF00-0AB0 ET 200pro, EM 4 AI-TC HF
Basic error limit (operational limit at 25 °C)				
<ul style="list-style-type: none"> Voltage, relative to input range, (+/-) Current, relative to input range, (+/-) Resistance thermometer, relative to input range, (+/-) 	0.075 %	0.075 %	0.125 %	0.1 %
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, $f1 =$ interference frequency				
<ul style="list-style-type: none"> Series mode interference (peak value of interference < rated value of input range), min. Common mode interference (USS < 2.5 V), min. 			50 dB 70 dB; Interference voltage < 5 V	42 dB 85 dB; Interference voltage < 10 V
Interference voltage suppression for $f = n \times (f1 \pm 0.5 \%)$, $f1 =$ interference frequency				
<ul style="list-style-type: none"> Series mode interference (peak value of interference < rated value of input range), min. Common mode interference (USS < 2.5 V), min. 	60 dB 80 dB; Interference voltage < 10 V	60 dB 80 dB; Interference voltage < 5 V		
Interrupts/diagnostics/status information				
Diagnostics function	Yes	Yes	Yes	Yes
Alarms				
<ul style="list-style-type: none"> Diagnostic alarm Hardware interrupt 	Yes; Parameterizable Yes; (limit value alarm), can be parameterized for channel 0	Yes; Parameterizable Yes; (limit value alarm), can be parameterized for channel 0	Yes; Parameterizable No	Yes; Parameterizable No
Diagnoses				
<ul style="list-style-type: none"> Diagnostic information readable Wire-break Short-circuit Overflow/underflow 	Yes Yes; at 1 to 5 V Yes; at 1 to 5 V	Yes Yes; at 4 to 20 mA Yes; at 4 to 20 mA	Yes Yes Yes	Yes Yes Yes
Diagnostics indication LED				
<ul style="list-style-type: none"> Group error SF (red) 	Yes	Yes	Yes	Yes
Potential separation				
<ul style="list-style-type: none"> between the channels between the channels and backplane bus 	No Yes	No Yes	No Yes	No Yes
Standards, approvals, certificates				
Suitable for applications according to AMS 2750				Yes; Declaration of Conformity, see online support entry 109757262
Suitable for applications according to CQI-9				Yes; Based on AMS 2750 E
Dimensions				
Width	45 mm	45 mm	45 mm	45 mm
Height	130 mm	130 mm	130 mm	130 mm
Depth	35 mm	35 mm	35 mm	35 mm
Weights				
Weight, approx.	150 g	150 g	150 g	150 g

Technical specifications

Article number	6ES7145-4FF00-0AB0 ET 200pro, EM 4AO-U HF	6ES7145-4GF00-0AB0 ET 200pro, EM 4 AO-I HF
Supply voltage		
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes; against destruction	Yes; against destruction
Input current		
from supply voltage 1L+, max.	65 mA	110 mA
from backplane bus 3.3 V DC, max.	10 mA	10 mA
Actuator supply		
Number of outputs	4	4
Short-circuit protection	Yes; per module	Yes; per module
Output current		
• up to 55 °C, max.	1 A	1 A
Analog outputs		
Number of analog outputs	4	4
Voltage output, short-circuit protection	Yes; per channel, electronic to chassis	Yes; per module, electronic to frame
Voltage output, short-circuit current, max.	50 mA	
Current output, no-load voltage, max.		16 V
Cycle time (all channels) max.	3 ms	3 ms
Output ranges, voltage		
• 0 to 10 V	Yes	
• 1 V to 5 V	Yes	
• -10 V to +10 V	Yes	
Output ranges, current		
• 0 to 20 mA		Yes
• -20 mA to +20 mA		Yes
• 4 mA to 20 mA		Yes
Connection of actuators		
• for voltage output two-wire connection	Yes	
• for voltage output four-wire connection	Yes	
• for current output two-wire connection		Yes
• for current output four-wire connection		Yes
Load impedance (in rated range of output)		
• with voltage outputs, min.	1 000 Ω	
• with voltage outputs, capacitive load, max.	1 μF	
• with current outputs, max.		600 Ω
• with current outputs, inductive load, max.		1 mH
Cable length		
• shielded, max.	30 m	30 m
Analog value generation for the outputs		
Integration and conversion time/resolution per channel		
• Resolution with overrange (bit including sign), max.	15 bit; at -10 to +10 V; 14 bit at 1 to 5 V; 15 bit at 0 to 10 V	15 bit; at ±20 mA; 14 bit at 0 to 20 mA; 15 bit at 4 to 20 mA
• Conversion time (per channel)	0.7 ms	0.7 ms
Settling time		
• for resistive load	0.1 ms	0.1 ms
• for capacitive load	6 ms	
• for inductive load		1 ms

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**I/O modules > Analog expansion modules****Technical specifications**

Article number	6ES7145-4FF00-0AB0 ET 200pro, EM 4AO-U HF	6ES7145-4GF00-0AB0 ET 200pro, EM 4 AO-I HF
Errors/accuracies		
Output ripple (relative to output range, bandwidth 0 to 50 kHz), (+/-)	0.02 %	0.02 %
Linearity error (relative to output range), (+/-)	0.1 %	0.1 %
Temperature error (relative to output range), (+/-)	0.01 %/K	0.01 %/K
Repeat accuracy in steady state at 25 °C (relative to output range), (+/-)	0.05 %	0.05 %
Operational error limit in overall temperature range		
• Voltage, relative to output range, (+/-)	0.2 %	
• Current, relative to output range, (+/-)		0.2 %
Basic error limit (operational limit at 25 °C)		
• Voltage, relative to output range, (+/-)	0.15 %	
• Current, relative to output range, (+/-)		0.15 %
Interrupts/diagnostics/status information		
Diagnostics function		Yes
Substitute values connectable	Yes	Yes
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable
• Hardware interrupt	No	No
Diagnoses		
• Diagnostic information readable	Yes	Yes
• Wire-break	No	Yes; per channel, not in zero range
• Short-circuit	Yes; per channel, not in zero range	No
Diagnostics indication LED		
• Group error SF (red)	Yes	Yes
Potential separation		
Potential separation analog outputs		
• between the channels	No	No
• between the channels and backplane bus	Yes	Yes
Dimensions		
Width	45 mm	45 mm
Height	130 mm	130 mm
Depth	35 mm	35 mm
Weights		
Weight, approx.	150 g	150 g

Overview

- 45 mm wide 4 IO-LINK HF electronic module
- 4 IO-Link ports according to IO-Link specification V1.1
- Port Class B
- The IO-Link parameters are configured using the Port Configuration Tool (S7-PCT), version V3.4 and higher

Ordering data**Article No.**

4 IO-Link HF electronic module	6ES7147-4JD00-0AB0
4 IO-Link ports according to IO-Link specification V1.1, port Class B; High Feature, channel-specific diagnostics, including bus module. Connection module must be ordered separately	
Accessories	
CM IO-Link 4 x M12 P connection module	6ES7194-4CA20-0AA0
4 M12 sockets for connecting IO-Link devices to ET 200pro electronic module 4 IO-Link HF	
Module identification labels	6ES7194-4HA00-0AA0
For color coding of the CM IOs in the colors of white, red, blue and green; pack with 100 units each	
M12 sealing cap	3RX9802-0AA00
For protection of unused M12 connections with ET 200pro	

Technical specifications

Article number	6ES7147-4JD00-0AB0 ET200pro, EM 4 IO-Link HF
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Load voltage 2L+	
• Rated value (DC)	24 V
• Short-circuit protection	Yes
• Reverse polarity protection	Yes; against destruction; load increasing
Input current	
from supply voltage 1L+, max.	40 mA
from load voltage 2L+ (without load), max.	20 mA
from backplane bus 3.3 V DC, max.	20 mA
Encoder supply	
Number of outputs	4
Short-circuit protection	Yes; per module, electronic
Output current	
• up to 55 °C, max.	2 A

Article number	6ES7147-4JD00-0AB0 ET200pro, EM 4 IO-Link HF
IO-Link	
Number of ports	4
• of which simultaneously controllable	4
IO-Link protocol 1.0	Yes
IO-Link protocol 1.1	Yes
Transmission rate	4.8 kBaud (COM1); 38.4 kBaud (COM2), 230.4 kBaud (COM3)
Size of process data, input per port	32 byte
Size of process data, input per module	32 byte
Size of process data, output per port	32 byte
Size of process data, output per module	32 byte
Memory size for device parameter	2 kbyte; for each port
Master backup	Possible with function block IO_LINK_MASTER
Configuration without S7-PCT	Possible; autostart/manual function
Cable length unshielded, max.	20 m
Operating modes	
• IO-Link	Yes
• DI	Yes
• DQ	Yes; max. 100 mA
Connection of IO-Link devices	
• Port type A	Yes; via 3-core cable
• Port type B	Yes; Additional device supply: for X1 and X2 max. 2 A in total, for X3 and X4 max. 2 A in total
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Diagnostic information readable	Yes
• Wire-break	Yes; channel by channel
• Short-circuit	Yes; channel by channel
Diagnostics indication LED	
• Channel status display	Yes; One green LED for channel status Qn (SIO mode) and port status IO-Ln (IO-Link mode)
• Group error SF (red)	Yes
• Channel fault indicator F (red)	Yes; combined with the IO-Link port status
Potential separation	
between the load voltages	Yes
between backplane bus and all other circuit components	Yes
Potential separation channels	
• between the channels	No
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	No
Dimensions	
Width	45 mm
Height	130 mm
Depth	35 mm
Weights	
Weight, approx.	150 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

I/O modules > Fail-safe expansion modules > Fail-safe digital expansion modules

Overview



Fail-safe digital inputs/outputs with IP65/66/67 degree of protection for cabinet-free application on the machine level.

Fail-safe digital inputs

- For fail-safe reading of sensor information (1 or 2 channels)
- Provide integral discrepancy evaluation for 2-out-of-2 signals
- Internal sensor supplies (incl. test function) available

Fail-safe digital outputs

- Fail-safe 2-channel activation (switching to P/M potential) of actuators
- Actuators can be controlled up to 2 A

All modules are certified up to SIL 3 (IEC 61508) and feature detailed diagnostics.

The modules support PROFIsafe in both PROFIBUS and PROFINET configurations. They can be used with IM151-7 F-CPU, CPU31xF-2 DP, CPU31xF-2 PN/DP and CPU416F-2.

Ordering data

Article No.

**Fail-safe digital input module
8/16 F-DI PROFIsafe** **6ES7148-4FA00-0AB0**

24 V DC, including bus module.
Terminal module must be ordered separately

**Fail-safe digital input/output
module 4/8 F-DI, 4 F-DO 2 A** **6ES7148-4FC00-0AB0**

24 V DC, including bus module.
Terminal module must be ordered separately

**Fail-safe electronic module
F-Switch PROFIsafe** **6ES7148-4FS00-0AB0**

Three fail-safe outputs switching to PP potential for safe switching of the rear panel busbar (2L+, F0, F1); two fail-safe digital inputs, 45 mm; usable up to SIL3 (IEC 61508)

Accessories

Terminal module **6ES7194-4DA00-0AA0**

For the fail-safe electronic module F-Switch PROFIsafe

Terminal module **6ES7194-4DC00-0AA0**

For the fail-safe electronic module 4/8 F-DI/4 F-DO, 24 V DC/2 A

Terminal module **6ES7194-4DD00-0AA0**

For the fail-safe electronic module 8/16 F-DI, 24 V DC

**PROFIBUS DP IM154-2
interface module** **6ES7154-2AA01-0AB0**

Including termination module

**PROFINET IM154-4 PN
interface module** **6ES7154-4AB10-0AB0**

Including termination module

M12 sealing cap **3RX9802-0AA00**

For protection of unused M12 connections with ET 200pro

Technical specifications

Article number	6ES7148-4FA00-0AB0 ET200PRO, EI-Mod., 8/16 F-DI 24V DC	Article number	6ES7148-4FA00-0AB0 ET200PRO, EI-Mod., 8/16 F-DI 24V DC
Supply voltage		Standards, approvals, certificates	
Rated value (DC)	24 V	Highest safety class achievable in safety mode	
Reverse polarity protection	Yes	• Performance level according to ISO 13849-1	e
Input current		• SIL acc. to IEC 61508	3
from supply voltage 1L+, max.	120 mA; Typical	Dimensions	
from backplane bus 3.3 V DC, max.	20 mA	Width	90 mm
Digital inputs		Height	130 mm
Number of digital inputs	16	Depth	65 mm
Input current			
• for signal *1*, typ.	3.7 mA		

Article number	6ES7148-4FC00-0AB0 ET200PRO, EI-Mod., 4/8 F-DI/4 F-DO 24VDC/2A	6ES7148-4FS00-0AB0 ET200PRO, EI-Mod., F-Switch PROFIsafe
Supply voltage		
Rated value (DC)	24 V	24 V
Input current		
from supply voltage 1L+, max.	100 mA; Typical	50 mA
from load voltage 2L+ (without load), max.	50 mA; Typical	25 mA; Typical
from backplane bus 3.3 V DC, max.	20 mA	40 mA
Digital inputs		
Number of digital inputs	8	2
Input current		
• for signal *1*, typ.	3.7 mA	3.5 mA
Digital outputs		
Number of digital outputs	4	3
Short-circuit protection	Yes	Yes
Controlling a digital input	Yes; digital output, according to IEC 61131-2, type 2	
Output current		
• for signal *1* rated value	2 A	
Total current of the outputs (per group)		
all mounting positions		
- up to 55 °C, max.		6 A
Dimensions		
Width	90 mm	45 mm
Height	130 mm	130 mm
Depth	65 mm	65 mm

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

I/O modules > PM-E power module**Overview**

- PM-E DC 24 V power module

Ordering data**Article No.****Article No.****PM-E DC 24 V power module**

For backfeed and group formation of the 24 V DC load voltage for electronic modules within an ET 200pro station.

6ES7148-4CA00-0AA0**Accessories****CM PM-E ECOFAST connection module**

For backfeed of 24 V load voltage, 1 ECOFAST Cu connection

6ES7194-4BA00-0AA0**CM PM-E direct connection module**

For backfeed of 24 V load voltage, up to 2 M20 screwed cable glands

6ES7194-4BC00-0AA0**CM PM-E 7/8" connection module**

For backfeed of 24 V load voltage, 1 x 7/8"

6ES7194-4BD00-0AA0**CM PM-E PP connection module**

For supplying 24 V load voltage, 2 x push-pull, with spare fuse

6ES7194-4BE00-0AA0**PM-E M12-L connection module**

For backfeed of 24 V load voltage, 1x M12-L

6ES7194-4BL00-0AA0**Spare fuse**

12.5 A quick-response, for interface and power modules, 10 items per package unit

6ES7194-4HB00-0AA0**PROFIBUS ECOFAST hybrid cable, copper**

Trailing-type cable (PUR sheath), with two shielded Cu wires for PROFIBUS DP plus four Cu wires of 1.5 mm², sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m

Preassembled with ECOFAST male and female connector, fixed length

- 1.5 m
- 3 m
- 5 m
- 10 m
- 15 m
- 20 m

6XV1830-7AH10

6XV1830-7BH15
6XV1830-7BH30
6XV1830-7BH50
6XV1830-7BN10
6XV1830-7BN15
6XV1830-7BN20

PROFIBUS ECOFAST hybrid cable, GP

Trailing-type cable with 4 x copper cores and 2 x copper cores, shielded, with UL approval

Preassembled with ECOFAST male and female connector

- 1.5 m
- 3 m
- 5 m
- 10 m
- 15 m
- 20 m

6XV1860-3PH15
6XV1860-3PH30
6XV1860-3PH50
6XV1860-3PN10
6XV1860-3PN15
6XV1860-3PN20

Ordering data	Article No.	Ordering data	Article No.
ECOFAST connection plug, for user assembly Female connector; ordering unit 5 items	6GK1905-0CB00	Accessories for CM PM-E 7/8"	
PROFIBUS ECOFAST hybrid plug, angled With 2 x shielded copper cores and 4 x 1.5 mm ² copper cores; 5 items; with assembly instructions; female contact insert	6GK1905-0CD00	7/8" connecting cable to power supply 5-wire, 5 x 1.5 mm ² , trailing type, preassembled with two 7/8" connectors, 5-pin • 1.5 m long • 2.0 m long • 3.0 m long • 5.0 m long • 10 m long • 15 m long	6XV1822-5BH15 6XV1822-5BH20 6XV1822-5BH30 6XV1822-5BH50 6XV1822-5BN10 6XV1822-5BN15
Push-pull connection plug For 1L+/ 2L+, unassembled	6GK1907-0AB11-6AA0	7/8" connection plug With axial cable outlet • with female contact insert, 5 per pack	6GK1905-0FB00
Cover caps for push-pull female connectors 5 units	6ES7194-4JA50-0AA0		
Accessories for CM PM-E direct			
Power line 5-wire, 5 x 1.5 mm ² , trailing type, sold by the meter, minimum order quantity 20 m, maximum order quantity 1 000 m	6XV1830-8AH10		

Technical specifications

Article number	6ES7148-4CA00-0AA0 ET 200pro, PM-E 24V DC
Supply voltage	
Load voltage 2L+	
• Rated value (DC)	24 V
• Short-circuit protection	Yes; via an exchangeable fuse in the power module
• Reverse polarity protection	Yes; against destruction
Input current	
from load voltage 2L+, max.	3 mA
Current carrying capacity	
max.	10 A; up to 55 °C (on the internal busbars of the ET 200pro)
Power loss	
Power loss, typ.	0.1 W
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Diagnoses	
• Diagnostic information readable	Yes
• missing load voltage	Yes
Diagnostics indication LED	
• For load voltage monitoring	Yes
• Group error SF (red)	Yes

Article number	6ES7148-4CA00-0AA0 ET 200pro, PM-E 24V DC
Potential separation	
between load voltage and backplane bus	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Dimensions	
Width	45 mm
Height	130 mm
Depth	35 mm
Weights	
Weight, approx.	140 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

I/O modules > PM-O power module output**Overview**

PM-O 2 x 24 V DC power module with CM PM-O PP

- PM-O 2x 24 V DC power module

Ordering data**Article No.****PM-O 2 x 24 V DC power module**

For drawing the 24 V load voltage 2L+ and electronic/encoder supply voltage 1L+ within an ET 200pro station.

6ES7148-4CA60-0AA0**Accessories****CM PM-O PP connection module**

For drawing the 24 V load voltage and electronic/encoder supply voltage, 2 x push-pull connector

6ES7194-4BH00-0AA0**Article No.****Push-pull cable connector**

For 1L+/ 2L+, unassembled

6GK1907-0AB11-6AA0**Cover caps for push-pull female connectors**

5 units

6ES7194-4JA50-0AA0**Technical specifications**

Article number	6ES7148-4CA60-0AA0 ET200PRO, PM-O DC 2x24V
Supply voltage	
Load voltage 2L+	
• Rated value (DC)	24 V
• Short-circuit protection	Yes
• Reverse polarity protection	Yes; against destruction
Input current	
from load voltage 2L+, max.	3 mA
Current carrying capacity	
max.	10 A; up to 55 °C (on the internal busbars of the ET 200pro)
Power loss	
Power loss, typ.	1.1 W
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Diagnoses	
• Diagnostic information readable	Yes
• missing load voltage	No
Diagnostics indication LED	
• For load voltage monitoring	No; Signalled in IM or in PM
• Group error SF (red)	Yes

Article number	6ES7148-4CA60-0AA0 ET200PRO, PM-O DC 2x24V
Potential separation	
between load voltage and backplane bus	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Dimensions	
Width	45 mm
Height	130 mm
Depth	35 mm
Weights	
Weight, approx.	150 g

Overview



- Interface for holding an original FESTO CPV 10 or CPV 14 compact performance valve terminal
- For using ET 200pro in applications with flexible pneumatics
- Highly flexible pneumatics due to a variety of valve functions and choice of flow rates

Ordering data

EM 148-P pneumatic interface

DO 16 x P/CPV 10 for direct accommodation of FESTO valve terminal CPV 10 16 DO x P

DO 16 x P/CPV 14 for direct accommodation of FESTO valve terminal CPV 14 16 DO x P

Article No.

6ES7148-4EA00-0AA0

6ES7148-4EB00-0AA0

Article No.

FESTO CPV 10 valve terminal

FESTO CPV 14 valve terminal

available from FESTO

available from FESTO

FESTO AG & Co
Ruiterstr. 82
D-73732 Esslingen

More addresses
on the Internet at:
<http://www.festo.com>

Technical specifications

Article number	6ES7148-4EA00-0AA0	6ES7148-4EB00-0AA0
	ET200PRO, 16DO, Pneumatic Interface CPV10	ET200PRO, 16DO, Pneumatic Interface CPV14
Supply voltage		
Load voltage 2L+		
• Rated value (DC)	24 V	24 V
• Short-circuit protection	Yes	Yes
• Reverse polarity protection	Yes	Yes
Input current		
from load voltage 2L+, max.	300 mA; Including valves	370 mA; Including valves
from backplane bus 3.3 V DC, max.	25 mA	25 mA
Power loss		
Power loss, typ.	2.6 W	3.7 W
Address area		
Address space per module		
• Address space per module, max.	2 byte	2 byte
Digital outputs		
Number of digital outputs	16	16
Load resistance range		
• lower limit	500 Ω	500 Ω
• upper limit	2 500 Ω	2 500 Ω
Output current		
• for signal "1" rated value	12 mA	16 mA
Switching frequency		
• with inductive load, max.	25 Hz	20 Hz
Total current of the outputs (per group)		
all mounting positions		
- up to 55 °C, max.	250 mA; only up to 50 °C, limited by valves	330 mA; only up to 50 °C, limited by valves

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

I/O modules > ET 200pro pneumatic interface**Technical specifications**

Article number	6ES7148-4EA00-0AA0 ET200PRO, 16DO, Pneumatic Interface CPV10	6ES7148-4EB00-0AA0 ET200PRO, 16DO, Pneumatic Interface CPV14
Interrupts/diagnostics/ status information		
Diagnostics function	Yes	Yes
Alarms		
• Diagnostic alarm	Yes	Yes
Diagnoses		
• Diagnostic information readable	Yes	Yes
Diagnostics indication LED		
• Group error SF (red)	Yes	Yes
• Status indicator digital output (green)	Yes	Yes
Pneumatics		
Number of connectable valves, max.	16	16
permissible working pressure, min.	3 bar	3 bar
permissible working pressure, max.	8 bar	8 bar
Rated flow rate	400 l/min	800 l/min
Standards, approvals, certificates		
Suitable for safety-related tripping of standard modules	Yes	Yes
Highest safety class achievable for safety-related tripping of standard modules		
• Performance level according to ISO 13849-1	PL d	PL d
• Category according to ISO 13849-1	Cat. 3	Cat. 3
• SIL acc. to IEC 62061	SIL 2	SIL 2
Dimensions		
Width	90 mm	120 mm
Height	130 mm	152 mm
Depth	47 mm	47 mm

Overview



The SIMATIC RF170C is a communications module for connecting the SIMATIC identification systems to the ET 200pro distributed I/O system. The readers of all RFID systems as well as the MV400 optical readers and MV300 optical handheld readers can be operated on the RF170C. In addition, the RF170C provides a universal RS232/RS422 interface for connecting devices using the Freeprot protocol.

Thanks to the high degree of protection and ruggedness, ET 200pro is particularly suitable for machine-level use. The modular structure with PROFIBUS and PROFINET connection systems allows it to be used in all applications. The uniform plug-in connection system ensures rapid commissioning.

Ordering data

Ordering data	Article No.	Ordering data	Article No.
SIMATIC RF170C communications module For connecting to the ET 200pro distributed I/O system	6GT2002-0HD01	Connecting cable for SIMATIC RF1000 Prefabricated RS232, between RF1040R or RF1070R and a communications module; black, length 2 m	6GT2891-4UH20
Accessories Connection block for SIMATIC RF170C For connecting 2 readers or other RS422/RS232 devices via an M12 connector	6GT2002-1HD01	Reader cable for MV300 handheld readers Coiled cable with usable length of 1.6 m to 4 m for MV320, PUR material	6GT2191-0BH50
Reader cable for SIMATIC RF200 / RF300 / RF600 / MV440 Or MOBY D extension cable and SIMATIC RF200 / RF300 / RF600 / MV400, PUR material, trailable 2 m, straight plug 5 m, straight plug 10 m, straight plug 20 m, straight plug 50 m, straight plug 2 m, plug angled at reader 5 m, plug angled at reader 10 m, plug angled at reader	6GT2891-4FH20 6GT2891-4FH50 6GT2891-4FN10 6GT2891-4FN20 6GT2891-4FN50 6GT2891-4JH20 6GT2891-4JH50 6GT2891-4JN10	Plug for connection of other RS422/RS232 devices 8-pole M12 plug, male, screw connections for wires up to 0.5 mm ² . Order quantity 1 pack with 5 units	6GT2090-0BE00
		M12 sealing caps for unused reader connections Minimum order quantity 10 units, price per 100 units	3RX9802-0AA00

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**I/O modules > RF170C****Technical specifications**

Article number	6GT2002-0HD01
product type designation	RF170C communication module
suitability for operation	ET 200pro distributed I/O together with RF200/300/1000, MV300/400/500, MOBY D/E//U and RS-232 devices
transfer rate	
transfer rate at the point-to-point connection serial maximum	115.2 kbit/s
interfaces	
design of the interface for point-to-point connection	RS422/RS232 via connection block
number of readers connectable	2
type of electrical connection	
<ul style="list-style-type: none"> of the backplane bus of the PROFIBUS interface of Industrial Ethernet interface for supply voltage 	ET 200pro backplane bus (according to the head module) (according to the head module) ET 200pro backplane bus
design of the interface to the reader for communication	Internal plug to the connection block
mechanical data	
material	Thermoplastic (Valox 467, fiberglass reinforced)
color	IP Basic 714
tightening torque of the screw for securing the equipment maximum	1.5 N·m
supply voltage, current consumption, power loss	
supply voltage at DC	
<ul style="list-style-type: none"> rated value 	24 V 20 ... 30 V
<ul style="list-style-type: none"> consumed current at DC at 24 V without connected devices typical Consumed current from supply voltage 1L+ maximum 	0.13 A 1 A
ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> during operation during storage during transport 	-25 ... +55 °C -40 ... +70 °C -40 ... +70 °C
protection class IP	IP67
shock resistance	According to IEC 61131-2
shock acceleration	300 m/s ²
vibrational acceleration	100 m/s ²

Article number	6GT2002-0HD01
product type designation	RF170C communication module
design, dimensions and weights	
width	90 mm
height	130 mm
depth	35 mm
net weight	0.27 kg
fastening method	ET 200pro rack
wire length for RS 422 interface maximum	1 000 m
product features, product functions, product components general	
display version	(see connection block)
product function addressable	No
transponder file handler	
protocol is supported	
<ul style="list-style-type: none"> S7 communication 	Yes
product functions management, configuration, engineering	
type of parameterization	HSP
type of programming	FB 45, FB 55, ID profile, library with functions, (FC 45/55 with restricted functionality)
type of computer-switched communication	acyclic communication
standards, specifications, approvals	
certificate of suitability	CE, FCC, cULus
MTBF	77 a
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO2 eq]	
<ul style="list-style-type: none"> total during manufacturing during operation after end of life 	112.73 kg 15.07 kg 97.62 kg 0.042 kg
accessories	
accessories	Connection block for RF170C

Overview

**Power supply for ET200pro:**

- 3-phase, 24 V DC/8 A

The SIMATIC ET200pro PS power supply unit with IP67 degree of protection is used as the electronics/encoder supply and load voltage supply of the new SIMATIC ET 200pro distributed I/O system for use close to the machine without a cabinet. With a second connector for looping the input voltage.

Product highlights

- 3-phase, 24 V DC/8 A
- Wide-range input, input voltage 340 ... 550 V
- Up to 88% efficiency
- With signaling contact for "24 V OK" and "Overtemperature"
- Status indicator on the device by means of LED (green = "24 V OK")
- Temperature range from -25 °C to +55 °C

Ordering data

SIMATIC ET 200pro PS

Stabilized power supply in distributed I/O system design, permitting the loop-through of energy to further modules; with degree of protection IP67; Input: 400–480 V 3 AC Output: 24 V DC/8 A

Accessories**Power connector**

For connecting to the distributed I/O system

- For X1 (6 mm²)
- For X2 (4 mm²)

Article No.

6ES7148-4PC00-0HA0

3RK1911-2BE30
3RK1911-2BF10

Article No.

National Fire Protection Association compatible

These devices are only approved for installation in industrial machinery according to the NFPA79 Electrical Standard for Industrial Machinery.

- For X1 SIMATIC ET 200pro PS 61 88 201 1003.xx (AWG10)*
- For X1 SITOP PSU300P 61 88 201 1000.xx / 61 88 201 1002.xx (AWG14)*
- For X2 SIMATIC ET 200pro PS 61 88 202 1010.xx (AWG10)*
supplied blanking cap for X2
- For X3 Phoenix-Contact SAC-5P-M12-M12FS
supplied blanking cap for X3

Sealing cap

For 9-pin power sockets

- X2 (1 unit)
- X2 (10 units)

* <http://www.harting.com/startseite>

3RK1902-0CK00

3RK1902-0CK00
3RK1902-0CJ00

Technical specifications

Article number	6ES7148-4PC00-0HA0
product brand name	SIMATIC ET200pro PS
type of current supply	24 V/8 A
input	
type of the power supply network	3-phase AC
supply voltage at AC minimum rated value	400 ... 480 V
supply voltage at AC maximum rated value	
supply voltage at AC initial value	340 ... 550 V
supply voltage at AC full-scale value	
supply voltage at AC	320 ... 340 V for max. 1 min
wide range input	Yes
overvoltage overload capability	Implemented internally with varistors
buffering time for rated value of the output current in the event of power failure minimum	15 ms

Article number	6ES7148-4PC00-0HA0
product brand name	SIMATIC ET200pro PS
type of current supply	24 V/8 A
operating condition of the mains buffering	at $V_{in} = 400 V$
line frequency	50 Hz/60 Hz
line frequency initial value	45 ... 66 Hz
line frequency full-scale value	
input current	
• at rated input voltage 400 V	0.5 A
current limitation of inrush current at 25 °C maximum	40 A
I^2t value maximum	3.5 A ² ·s
fuse protection type	T 4 A
fuse protection type in the feeder	Required: Circuit breaker 3RV2011-1DA10 or 3RV2711-1DD10 (UL 489)

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**Power supplies > 3-phase, 24 V DC (ET200pro PS, IP67)****Technical specifications**

Article number	6ES7148-4PC00-0HA0
product brand name	SIMATIC ET200pro PS
type of current supply	24 V/8 A
output	
voltage curve at output	Controlled, isolated DC voltage
output voltage at DC rated value	24 V
output voltage	
• at output 1 at DC rated value	24 V
output voltage adjustable	No; -
relative overall tolerance of the voltage	3 %
relative control precision of the output voltage	
• on slow fluctuation of input voltage	0.5 %
• on slow fluctuation of ohm loading	0.5 %
residual ripple	
• maximum	200 mV
voltage peak	
• maximum	250 mV
display version for normal operation	Green LED for 24 V OK
type of signal at output	max. 30 V, 10 mA; Power-Good (High-Pegel 1L+ for V_{out} in range 21.3 ... 29 V); Overtemperature warning at least 30 s before switch-off (high level 1L+ when the max. internal temperature is exceeded)
behavior of the output voltage when switching on	Overshoot of $V_{out} < 2 %$
response delay maximum	1.5 s
voltage increase time of the output voltage	
• typical	40 ms
output current	
• rated value	8 A
• rated range	0 ... 8 A
supplied active power typical	192 W
short-term overload current	
• on short-circuiting during the start-up typical	50 A
• at short-circuit during operation typical	50 A
duration of overloading capability for excess current	
• on short-circuiting during the start-up	100 ms
• at short-circuit during operation	100 ms
bridging of equipment	No
efficiency in percent	88 %
power loss [W]	
• at rated output voltage for rated value of the output current typical	25 W

Article number	6ES7148-4PC00-0HA0
product brand name	SIMATIC ET200pro PS
type of current supply	24 V/8 A
closed-loop control	
relative control precision of the output voltage with rapid fluctuation of the input voltage by +/- 15% typical	0.5 %
relative control precision of the output voltage load step of resistive load 50/100/50 % typical	1 %
setting time	
• maximum	2 ms
protection and monitoring	
design of the overvoltage protection	< 33 V
property of the output short-circuit proof	Yes
design of short-circuit protection	Electronic shutdown, automatic restart
• response value current limitation typical	9.4 A
enduring short circuit current RMS value	
• maximum	10 A
safety	
galvanic isolation between input and output	Yes
galvanic isolation	Protective extra low output voltage V_{out} according to EN 60950-1 and EN 50178
operating resource protection class	Class I
leakage current	
• maximum	3.5 mA
• typical	0.4 mA
protection class IP standard	IP67, enclosure type 5 indoor
• for emitted interference	EN 55022 Class A
• for mains harmonics limitation	-
• for interference immunity	EN 61000-6-2
standards, specifications, approvals	
certificate of suitability	
• CE marking	Yes
• UL approval	Yes; UL-Listed (UL 508) according to NFPA compatibility (National Fire Protection Association), see operating instructions
• CSA approval	No; -
• EAC approval	Yes
• NEC Class 2	No
type of certification	
• CB-certificate	Yes
MTBF at 40 °C	196 354 h
standards, specifications, approvals hazardous environments	
certificate of suitability	
• IECEx	No
• ATEX	No
• ULhazloc approval	No
• cCSAus, Class 1, Division 2	No
• FM registration	No

Technical specifications

Article number	6ES7148-4PC00-0HA0
product brand name	SIMATIC ET200pro PS
type of current supply	24 V/8 A
standards, specifications, approvals	
marine classification	
shipbuilding approval	No
Marine classification association	
• American Bureau of Shipping Europe Ltd. (ABS)	No
• French marine classification society (BV)	No
• Det Norske Veritas (DNV)	No
• Lloyds Register of Shipping (LRS)	No
ambient conditions	
ambient temperature	
• during operation	-25 ... +55 °C; with natural convection
• during transport	-40 ... +70 °C
• during storage	-40 ... +70 °C
environmental category according to IEC 60721	Climate class 3K3, 5 ... 95% no condensation

Article number	6ES7148-4PC00-0HA0
product brand name	SIMATIC ET200pro PS
type of current supply	24 V/8 A
connection method	
type of electrical connection	screw-type terminals
• at input	L1, L2, L3, PE: Plug connector HAN Q4/2 (counterpart see "Electrical accessories")
• at output	L+, M: 2 x 1.5 mm ² each (4-pole cable for +/- with open, labeled ends, 4 x 1.5 mm ²)
• for auxiliary contacts	Alarm signals: M12 plug-in connector 5-pin
mechanical data	
width x height x depth of the enclosure	310 mm x 135 mm x 90 mm
fastening method	Can be mounted onto ET200pro mounting rail
• standard rail mounting	No
• S7 rail mounting	No
• wall mounting	Yes
housing can be lined up	No
net weight	2.8 kg
accessories	
electrical accessories	Power connector (Input: 3RK1911-2BE30 (6 mm ²)) (Output: 3RK1911-2BF10 (4 mm ²))
additional information	
other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

ET 200pro motor starters > General data

Overview

ET 200pro motor starters in I/O system ET 200pro

SIMATIC ET 200pro is the modular I/O system with high degree of protection IP65/66/67 for local, cabinet-free use. The ET 200pro motor starters with the high degree of protection IP65 are an integral part of ET 200pro.



ET 200pro motor starter: Isolator module, Standard starter and High Feature starter mounted on a wide module rack

ET 200pro motor starters (see pages 10/421 and 10/422)

- Only two variants up to 5.5 kW
- All settings can be parameterized by bus
- Comprehensive diagnostic signals
- Support for PROFlenergy
- Overload can be acknowledged by remote reset
- Current unbalance monitoring
- Stall protection
- EMERGENCY START function on overload
- Current value transmission by bus
- Current limit monitoring
- Full support of acyclic services
- Direct-on-line or reversing starters
- Power bus connection can be plugged in using Han Q4/2 plug-in connectors
- Motor feeder with Han Q8/0 connector
- Conductor cross-section up to 6 x 4 mm²
- 25 A per segment (power looped through using jumper plug)
- In the Standard and High Feature versions (with 4 DI on-board)
- Electromechanical switching and electronic switching
- Electronic starter for direct activation or with integrated soft starter function
- Supplied with 400 V AC brake contact as an option
- Temperature sensor can be connected (Thermoclick or PTC type A)
- Provision of the motor current in PROFlenergy format to higher-level systems, motor current shutdown in dead times using PROFlenergy

More information

Homepage see <https://www.siemens.com/sirius-motor-starter-et200sp>

SiePortall see <https://www.siemens.com/product?ET200pro>

Decision support for motor start – Starting and operating three-phase asynchronous motors efficiently, see <https://www.siemens.com/motorstart-guide>

Further components in the ET 200pro distributed I/O system:

- Interface modules, CPUs, I/O modules, ET 200pro PS see from page 10/383
- ET 200pro FC-2 frequency converter see page 10/431

Catalog IC 10 see <https://www.siemens.com/ic10>

ET 200pro isolator modules (see page 10/423)

The isolator module with switch disconnecter function is used for safe disconnection of the 400 V operational voltage during repair work in the plant and provides an integrated group fusing function (i.e. additional group short-circuit protection for all subsequently supplied motor starters).

Depending on the power distribution concept, all stations can be equipped with an isolator module as an option.

Safety applications

Safety Solution PROFIsafe (see page 10/424)

With the Safety PROFIsafe modules

- F-Switch and
 - 400 V disconnecting module
- with an appropriate connection, safety levels SIL 3 (according to IEC 62061) and PL e (according to ISO 13849-1) can also be reached.

Functionality

With the ET 200pro motor starters, any three-phase loads can be protected and switched.

The ET 200pro motor starters are available with mechanical and also electronic contacts.

The ET 200pro electromechanical starters are offered as direct-on-line starters (DSe) and reversing starters (RSe) as **Standard** and **High Feature** versions. There are device versions with or without control for externally fed brakes with 400 V AC.

Compared with the Standard motor starters, the **High Feature, mechanical** motor starter also has:

- Four digital inputs
- Advanced parameterization options

The ET 200pro electronic starters are offered as direct-on-line starters (sDSSt/sDSt) and reversing starters (sRSSt/sRSt) in the High Feature version.

Compared with the High Feature mechanical motor starters, the **High Feature, electronic** motor starter also has:

- Soft starting and smooth ramp-down function
- Deactivated soft start function as an electronic starter for applications with a high switching frequency
- Advanced parameterization options



As a result of the protection concept with solid-state overload evaluation and the use of SIRIUS switching devices, size S00, additional advantages are realized on the Standard and High Feature motor starters – advantages that soon make themselves positively felt particularly in manufacturing processes with high plant stoppage costs:

- Configuration is made easier by the fine modular structure with ET 200pro. When using ET 200pro motor starters, the parts list per load feeder is reduced to two main items: the bus module and the motor starter. This makes the ET 200pro ideal for modular machine concepts or solutions for conveying systems and in machine-tool building.
- Expansions are easily possible through the subsequent adding of modules. The innovative plug-in technology also does away with the wiring needed up to now. Through the hot swapping function (disconnection and connection during operation) a motor starter can be replaced within seconds if necessary, without having to shut down the ET 200pro station and with it the process in the plant. The motor starters are therefore recommendable in particular for applications with special demands on availability. Storage costs are also optimized by the low level of variance (two units up to 5.5 kW).

- With four locally acting inputs available on the High Feature motor starter it is possible to realize autonomous special functions that work independently of the bus and the higher level control system, e.g. as a quick stop on gate valve controls or limit position disconnectors. In parallel with this, the states of these inputs are signaled to the control system.

Voltages

The specifications for 3-phase line supply according to IEC 60947-4-1 are valid for the following line system configurations:

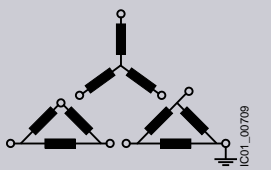Voltage U_e	Line system configurations	
	Three-phase four-wire systems	Three-phase three-wire systems
		
V	V	V
230	--	230
400	230/400	400
440	260/440	440
500	--	500

-- Not specified

Article No. scheme

Product versions		Article number			
Motor starters		3RK1304	- 5	<input type="checkbox"/> S <input type="checkbox"/> 0	<input type="checkbox"/> A A <input type="checkbox"/>
Setting range	0.15 ... 2.0 A 1.5 ... 12 A			K L	
Product function	Direct-on-line starters DSe		4	4	Standard
	Reversing starters RSe		4	5	Standard
	Direct-on-line starters DSe		4	2	High Feature
	Reversing starters RSe		4	3	High Feature
	Direct-on-line starters sDSSte/sDSte		7	2	High Feature
	Reversing starters sDSSte/sDSte		7	3	High Feature
Inputs/outputs	Without brake output				0
	With brake output				3 400 V AC, with High Feature + 4 inputs
Example		3RK1304	- 5	K S 4 0	- 4 A A 0
Product versions		Article number			
Modules		3RK1304	- 0	H S 0 0	<input type="checkbox"/> A A <input type="checkbox"/>
Product function	Isolator modules				6
	400 V disconnecting module				8 Safety modules PROFIsafe
Example		3RK1304	- 0	H S 0 0	- 6 A A 0

Note:

The article number schemes show an overview of product versions for better understanding of the logic behind the article numbers.

For your orders, please use the article numbers quoted in the selection and ordering data.

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

ET 200pro motor starters > General data

Type	Standard motor starters		High Feature motor starters	
	DSe, RSe		DSe, RSe	sDSSSte, sDSte, sRSSSte, sRSte
Technology designation ¹⁾				
Device functions (firmware features)				
Parameterizable rated operational current	✓			
Integrated short-circuit protection	✓			
Parameterizable current limit values	--		✓ 2 limit values	
Parameterizable response in case of current limit violation	--		✓	
Zero current monitoring	✓			
Parameterizable response in case of zero current violation	✓			
Parameterizable current unbalance limit	%	-- Fixed limit value	✓ 30 ... 60 x I _e	
Parameterizable response in case of unbalance limit violation	✓			
Motor blocking monitoring	--		✓	
Parameterizable blocking current limit	%	--	✓ 150 ... 1 000 x I _e	
Parameterizable blocking time limit	s	--	✓ 1 ... 5	
Current value transmission	✓			
Group warning diagnostics	--		✓ Parameterizable	
Group diagnostics	✓ Parameterizable			
EMERGENCY START	✓			
Digital inputs	--		✓ 4 inputs	
• Parameterizable input signal	--		✓ Latching/non-latching	
• Parameterizable input level	--		✓ NC/NO contacts	
• Parameterizable input signal delay	ms	--	✓ 10 ... 80	
• Parameterizable input signal extension	ms	--	✓ 0 ... 200	
• Parameterizable input control actions	--		✓ 12 different actions	
Brake output (400 V AC)	✓ Order option			
Parameterizable brake enabling delay	s	✓ -2.5 ... +2.5		
Parameterizable holding time of the brake during stopping	s	✓ 0 ... 25		
Parameterizable start up type	--		✓	
Parameterizable ramp-down time	--		✓	
Parameterizable starting voltage	--		✓	
Parameterizable stopping voltage	--		✓	
Local device interface	✓			
Firmware update	✓ By specialists			
Thermal motor model	✓			
Parameterizable trip class	-- CLASS 10 fixed		✓ CLASS 5, 10, 15, 20	
Parameterizable response in case of overload of thermal motor model	--		✓ 3 possible states	
Advance warning limit for motor heating	%	--	✓ Parameterizable 0 ... 95	
Advance warning limit time-related trip reserve	s	--	✓ Parameterizable 0 ... 500	
Parameterizable recovery time	min	--	✓ 1 ... 30	
Parameterizable protection against voltage failure	-- Permanently		✓	
Reversing start function	✓ Order option			
Parameterizable interlock time for reversing starters	-- 150 ms fixed		✓ 0 ... 60 s	
Integrated logbook functions	✓ 3 device logbooks			
Integrated statistics data memory	✓			
Parameterizable response in case of CPU/master stop	✓			
PROFenergy profile support	✓			
• Disconnection of the motor current during idle times	✓			
• Measured motor current values	✓			
Device indications	SF LED (red)		IN 1 ... IN 4, LED	
• Group fault	STATE LED (red, yellow, green)			
• Switching state	DEVICE LED (red, yellow, green)			
• Device status	--			
• Digital inputs	--			

✓ Function available

-- Function not available

¹⁾ DS Direct-on-line starters

RS Reversing starters

DSS .. Direct-on-line soft starters

RSS .. Reversing soft starters

e Electronic motor protection

te Full motor protection (thermal + electronic)

s Electronic switching with semiconductor.

Benefits

ET 200pro motor starters provide the following advantages:

- High flexibility thanks to a modular and compact design
- Little variance among all motor starter versions (two units up to 5.5 kW)
- Extensive parameterization using STEP 7 HW Config
- Increase of plant availability through fast replacement of units (easy mounting and plug-in technology)
- Extensive diagnostics and information for preventive maintenance
- Parameterizable inputs for on-site control functions (High Feature)
- Cabinet-free design thanks to high degree of protection IP65

Application

The SIMATIC ET 200pro motor starters are ideal for the use of several spatially concentrated distributed drive solutions in which several motors, or digital or analog sensors and actuators are addressed from a distributed station. They are perfectly suited for protecting and switching any AC loads.

Application areas

The SIMATIC ET 200pro motor starters are suitable for numerous sectors of industry, e.g. machinery and plant engineering or conveying applications.

Use of ET 200pro motor starters in conjunction with IE3 and IE4 motors

Note:

For the use of ET 200pro motor starters in conjunction with highly efficient IE3 and IE4 motors, please observe the information on dimensioning and configuring [see Application manual](#), <https://support.industry.siemens.com/cs/ww/en/view/94770820>.

More Information [see Catalog IC 10](#), <https://www.siemens.com/ic10>.

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

ET 200pro motor starters > General data

Technical specifications

More information			
Manual, see https://support.industry.siemens.com/cs/ww/en/view/22332388		Notes on security: System networking requires suitable protective measures (including network segmentation for IT security) in order to ensure safe plant operation. For more information on the subject of industrial cybersecurity, see https://www.siemens.com/cybersecurity-industry .	
Type		Standard motor starters Mechanically switching without inputs	High Feature motor starters Mechanically switching with inputs
Technology designation ¹⁾		DSe, RSe	DSe, RSe Mechanically switching with inputs and soft starter function sDSSSte, sDSte, sRSSSte, sRSte
Mechanics and environment			
Motor starters or modules that can be connected to ET 200pro With width of 110 mm		max. 8	
Mounting dimensions (W x H x D) • Direct-on-line starters and reversing starters	mm	110 x 230 x 150	110 x 230 x 160
Permissible ambient temperature • During operation • During storage	°C °C	-25 ... +55, from +40 with derating -40 ... +70	
Permissible mounting position		Vertical, horizontal	
Vibration resistance acc. to IEC 60068-2-6	g	2	
Shock resistance acc. to IEC 60068-2-27	g/ms	Half-sine 15/11	
Degree of protection		IP65	
Pollution degree		3, IEC 60664 (IEC 61131)	
Electrical specifications			
Power consumption at 24 V DC • From auxiliary circuit L+/M (U1) • From auxiliary circuit A1/A2 (U2)	mA mA	Approx. 40 Approx. 200	
Rated operational current I_e for power bus	A	25	
Rated operational voltage U_e • Approval according to EN 60947-1, Appendix N • Approval according to CSA and UL	AC V AC V AC V	400 (50/60 Hz) Up to 400 (50/60 Hz) Up to 600 (50/60 Hz)	Up to 400 (50/60 Hz) Up to 480 (50/60 Hz)
Approval • DIN VDE 0106, Part 101 • CSA and UL approval	V V	Up to 400 Up to 600	Up to 480 Up to 480
Conductor cross-sections • Incoming power supply	mm ²	Max. 6 x 4	
Touch protection		Finger-safe	
Rated impulse withstand voltage U_{imp}	kV	6	
Rated insulation voltage U_i	V	400	
Rated operational current I_e for starters • AC-1, AC-2, AC-3, AC-3e at 40 °C - At 400 V - At 500 V • AC-4 at 40 °C - At 400 V	A A A	0.15 ... 2.0/1.5 ... 12.0 0.15 ... 2.0/1.5 ... 9.0 0.15 ... 2.0/1.5 ... 4.0	0.15 ... 2.0/1.5 ... 12.0 ²⁾
Rated short-circuit breaking capacity	kA	100 at 400 V	
Type of coordination acc. to IEC 60947-4-1		1	
Power of three-phase motors at 400 V	kW	Max. 5.5	Max. 5.5/4 ³⁾
Utilization categories		AC-1, AC-3, AC-3e, AC-4	AC-53a ⁴⁾ (max. 9 A with deactivated soft start function up to CLASS 10)
Protective separation between main and auxiliary circuits	V	400, acc. to EN 60947-1, Appendix N	
Endurance of contactor • Mechanical • Electrical	Oper. cycles Oper. cycles	30 million Up to 10 million; depending on the current loading (see manual, https://support.industry.siemens.com/cs/ww/en/view/22332388)	-- --
Permissible switching frequency		Depending on the current loading, motor starting time, and relative ON period (see manual, https://support.industry.siemens.com/cs/ww/en/view/22332388)	
Operating times at 0.85 ... 1.1 x U_e • Closing delay • Opening delay	ms ms	11 ... 50 5 ... 45	-- --

¹⁾ DS Direct-on-line starters
RS Reversing starters
DSS .. Direct-on-line soft starters
RSS .. Reversing soft starters
e Electronic motor protection
te Full motor protection (thermal + electronic)
s Electronic switching with semiconductor.

²⁾ If the soft starter control function is deactivated, the permissible rated operational current is reduced to 9 A to CLASS 10.

³⁾ With parameterization as electronic starter max. 4 kW.

⁴⁾ 8-hour operation.

Overview

The functionality, device functions, and technical specifications of the Standard motor starter are described in

ET 200pro motor starters, General data, (see page 10/416 onwards).

Selection and ordering data

Version

Article No.

Standard motor starters, mechanical Motor protection: thermal model



DSe Standard

DSe direct-on-line starters¹⁾

- Without brake output
- With brake output 400 V AC

3RK1304-5□S40-4AA0
3RK1304-5□S40-4AA3

RSe reversing starters¹⁾

- Without brake output
- With brake output 400 V AC

3RK1304-5□S40-5AA0
3RK1304-5□S40-5AA3

Setting range
Rated operational current

- 0.15 ... 2.0 A
- 1.5 ... 12.0 A

K
L

¹⁾ Only functions when used together with the backplane bus module and the wide module rack. The backplane bus module and the wide module rack must be ordered separately (see Accessories for ET 200pro motor starters, page 10/430).

I/O systems

SIMATIC ET 200 systems without control cabinet SIMATIC ET 200pro

ET 200pro motor starters > High Feature motor starters **IE3/IE4 ready** **AC-3e**

Overview

The functionality, device functions, and technical specifications of the High Feature motor starter are described in ET 200pro motor starters, General data (see page 10/416 onwards).

The High Feature motor starter differs from the Standard motor starter in having more parameters and four integrated, freely-parameterizable digital inputs.

Selection and ordering data

Version	Article No.
---------	-------------

High Feature motor starters, mechanical Motor protection: thermal model



RSe High Feature

DSe direct-on-line starters¹⁾

- Without brake output and with 4 inputs
- With brake output 400 V AC and 4 inputs

3RK1304-5□S40-2AA0
3RK1304-5□S40-2AA3

RSe reversing starters¹⁾

- Without brake output and with 4 inputs
- With brake output 400 V AC and 4 inputs

3RK1304-5□S40-3AA0
3RK1304-5□S40-3AA3

Setting range Rated operational current

- 0.15 ... 2.0 A
- 1.5 ... 12.0 A

K
L

High Feature motor starters²⁾, electronic Full motor protection, comprising thermal motor protection and thermistor motor protection



sRSSe High Feature

Direct-on-line starters sDSSe/sDSte¹⁾²⁾

- Without brake output and with 4 inputs
- With brake output 400 V AC and 4 inputs

3RK1304-5□S70-2AA0
3RK1304-5□S70-2AA3

Reversing starters sRSSe/sRSte¹⁾²⁾

- Without brake output and with 4 inputs
- With brake output 400 V AC and 4 inputs

3RK1304-5□S70-3AA0
3RK1304-5□S70-3AA3

Setting range Rated operational current

- 0.15 ... 2.0 A
- 1.5 ... 12.0 A

K
L

¹⁾ Only functions when used together with the backplane bus module and the wide module rack. The backplane bus module and the wide module rack must be ordered separately (see Accessories for ET 200pro motor starters, page 10/430).

²⁾ The solid-state motor starters can be used not only as solid-state motor starters with a high level of switching frequency but also as fully fledged soft starters for soft starting and stopping. The changeover from motor starter to soft starter takes place through reparameterization in HW Config. Depending on the setting, this results in the following current ranges:

- Parameterization as solid-state motor starter: 0.15 to 2 A and 1.5 to 9 A (4 kW).
- Parameterization as soft starter: 0.15 to 2 A and 1.5 to 12 A (5.5 kW).

IE3/IE4 ready

ET 200pro motor starters > ET 200pro isolator modules

Overview

The isolator module with integrated group fusing function (i.e. additional group short-circuit protection for all subsequently supplied motor starters) and switch disconnecter function is used to safely disconnect the 400 V operating voltage during repair work in the plant.

Depending on the power distribution concept, all stations can be equipped with an isolator module as an option.

The following properties apply to the isolator module:

- Increase of plant availability through fast replacement of units (easy mounting and plug-in technology)
- Cabinet-free design thanks to high degree of protection IP65

Technical specifications

Type	Isolator modules	
General data		
Mounting dimensions (W x H x D)		
• Direct-on-line starters and reversing starters	mm	110 x 230 x 170
Permissible ambient temperature	°C	
• During operation	°C	-25 ... +55
• During storage	°C	-40 ... +70
Permissible mounting position	Any	
Vibration resistance acc. to IEC 60068-2-6	g	2
Shock resistance acc. to IEC 60068-2-27	g/ms	Half-sine 15/11
Power consumption	mA	
• From auxiliary circuit L+/M (U1)		Approx. 20
• From auxiliary circuit A1/A2 (U2)		--
Rated operational current I_e for power bus	A	25
Rated operational voltage U_e	V	400
Approvals according to	V	
• DIN VDE 0106, Part 101	V	Up to 500
• CSA and UL	V	Up to 600
Conductor cross-sections	mm ²	
• Incoming power supply		Max. 6 x 4

Type	Isolator modules	
Degree of protection	IP65	
Touch protection	Finger-safe	
Pollution degree	3, IEC 60664 (IEC 61131)	
Rated impulse withstand voltage U_{imp}	kV	6
Rated insulation voltage U_i	V	400
Rated operational current I_e for starters		
• AC-1, AC-2, AC-3 at 40 °C		
- At 400 V	A	25
- At 500 V	A	25
Rated short-circuit breaking capacity	kA	50 at 400 V
Type of coordination acc. to IEC 60947-4-1	2	
Protective separation between main and auxiliary circuits	V	400, according to DIN VDE 0106, Part 101
Device functions		
• Group diagnostics	Yes, parameterizable	
Device indications		
• Group fault	SF LED (red)	

Selection and ordering data

Version	Article No.

ET 200pro isolator module, mechanical

3RK1304-OHS00-6AA0

Isolator module¹⁾

Rated operational current 25 A

3RK1304-OHS00-6AA0

¹⁾ Only functions when used together with the backplane bus module and the wide module rack. The backplane bus module and the wide module rack must be ordered separately (see [Accessories for ET 200pro motor starters](#), page 10/430).

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

ET 200pro Solution PROFIsafe Safety motor starters > PROFIsafe Safety modules

Overview

Safety Solution PROFIsafe

With the Safety PROFIsafe modules

- F-Switch and
- 400 V disconnecting module

With an appropriate connection, safety levels SIL 3 (according to IEC 62061) and PL e (according to ISO 13849-1) can be reached.

F-Switch PROFIsafe

Fail-safe digital inputs/outputs in degrees of protection IP65 to IP67 for near-machine, cabinet-free use.

Fail-safe digital inputs

- For the fail-safe reading in of sensor information (1-/2-channel)
- Including integrated discrepancy evaluation for 2V2 signals
- Internal sensor supplies (including testing) available

Fail-safe digital outputs

- Three fail-safe switching to PP potential outputs for safe switching of the backplane busbars

The F-Switch is certified up to SIL 3/PL e and has detailed diagnostics. It supports PROFIsafe in PROFIBUS configurations as well as in PROFINET configurations.

Note:

Safety characteristics, see <https://support.industry.siemens.com/cs/ww/en/view/109739348>.

Functionality

The PROFIsafe F-Switch is a fail-safe solid-state module for PROFIsafe safety applications. It has two fail-safe inputs and outputs for safe switching of the 24 V supply over backplane busbars. In combination with the 400 V disconnecting module, fail-safe disconnection of ET 200pro motor starters is possible in PROFIsafe applications up to SIL 3/PL e.

400 V disconnecting module

The 400 V disconnecting module enables the safe disconnection of an operational voltage of 400 V up to PL e. For operation in a Safety PROFIsafe application it functions only in combination with the F-Switch.

Functionality



The 400 V disconnecting module can be used together with the F-Switch for PROFIsafe safety applications. It contains two contactors connected in series for safety-related disconnection of the main circuit. The auxiliary circuit supply of the device is over a safety power rail in the backplane bus module. The 400 V disconnecting module can be used in conjunction with the F-Switch for safety applications up to PL e.

Technical specifications

Type		400 V disconnecting module
General data		
Mounting dimensions (W x H x D)		
• Direct-on-line starters and reversing starters	mm	110 x 230 x 150
Permissible ambient temperature		
• During operation	°C	-25 ... +55
• During storage	°C	-40 ... +70
Permissible mounting position		Any
Vibration resistance acc. to IEC 60068-2-6		2 g
Shock resistance acc. to IEC 60068-2-27		Half-sine 15 g/11 ms
Power consumption		
• From auxiliary circuit L+/M (U1)	mA	Approx. 20
• From auxiliary circuit A1/A2 (U2)		--
Rated operational current I_e for power bus	A	25
Rated operational voltage U_e	V	400 (50/60 Hz)
Approval DIN VDE 0106, Part 101	V	Up to 500
CSA and UL approval	V	Up to 600
Conductor cross-sections		
Incoming power supply	mm ²	Max. 6 x 4
Degree of protection		IP65
Touch protection		Finger-safe
Pollution degree		3, IEC 60664 (IEC 61131)

Type		400 V disconnecting module
Rated impulse withstand voltage U_{imp}	kV	6
Rated insulation voltage U_i	V	400
Rated operational current I_e for starters		
• AC-1, AC-2, AC-3 at 40 °C		
- At 400 V	A	25
- At 500 V	A	25
Rated short-circuit breaking capacity	kA	50 at 400 V
Type of coordination acc. to IEC 60947-4-1		2
Protective separation between main and auxiliary circuits	V	400, according to DIN VDE 0106, Part 101
Operating times at 0.85 ... 1.1 x U_s		
• Closing delay	ms	25 ... 100
• Opening delay	ms	7 ... 10
Device functions		
• Group diagnostics		Yes, parameterizable
Device indications		
• Group fault		SF LED (red)

Selection and ordering data

Version	Article No.
Safety modules PROFIsafe	
 400 V disconnecting module¹⁾²⁾ Rated operational current 25 A 3RK1304-0HS00-8AA0	3RK1304-0HS00-8AA0
 F-Switch PROFIsafe 24 V DC, including bus module <u>Note:</u> Connection module must be ordered separately 6ES7148-1FS00-0AB0	6ES7148-4FS00-0AB0
Connection module for F-Switch 24 V DC 6ES7194-4DA00-0AA0	6ES7194-4DA00-0AA0


- ¹⁾ The 400 V disconnecting module functions only when used together with the Safety local isolator module or with the F-Switch.
- ²⁾ The 400 V disconnecting module functions only when used together with the backplane bus module and the wide module rack. The backplane bus module and the wide module rack must be ordered separately (see [Accessories for ET 200pro motor starters, page 10/430](#)).

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

Accessories for ET 200pro motor starters

Overview

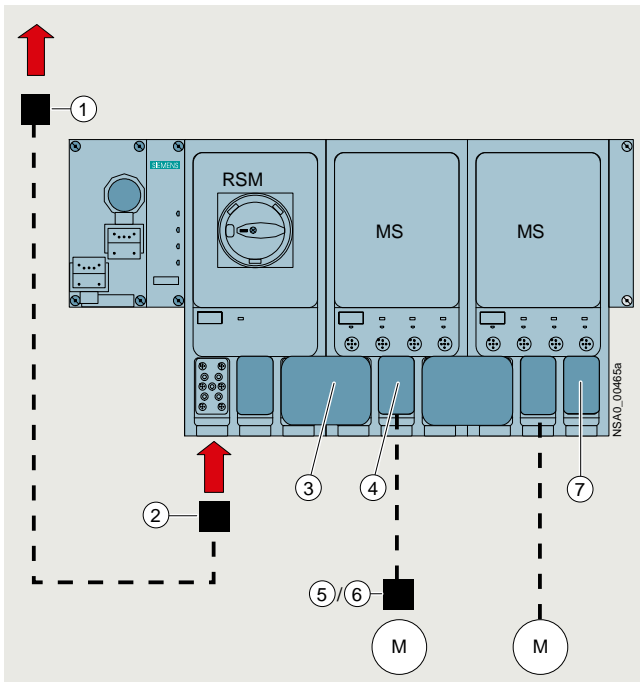


Legend:


- ① Power feeder plug (see page 10/428)
- ② Power connection plug (see page 10/428)
- ③ Power jumper plug (see page 10/428)
- ④ Motor connection plug (see page 10/428)
- ⑤ Motor plug (see page 10/428)
- ⑥ Motor plug with EMC suppressor circuit (see page 10/428)
- ⑦ Power loop-through plug (see page 10/428)
- ⑧ Power connection cable (see page 10/428)
- ⑨ Power connection cable for isolator module (see page 10/428)
- ⑩ Motor cable (see page 10/429)

Basic design of an ET 200pro version with (from the left) connection module for IM, interface module for communication (IM), RSM isolator module, two ET 200pro motor starters (MS), and connections for energy and

10

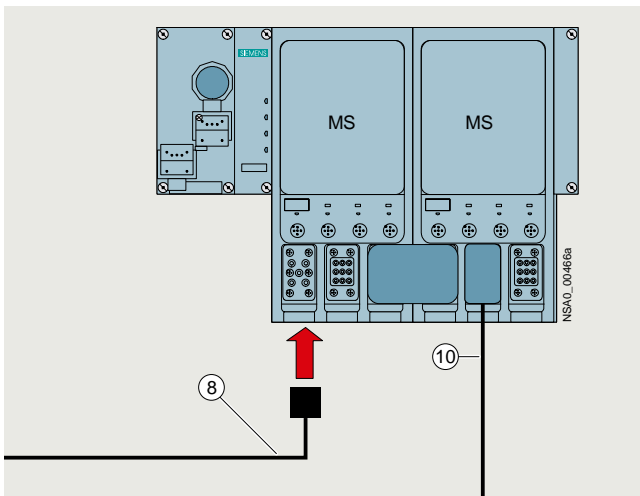

Infeed on the ET 200pro motor starter

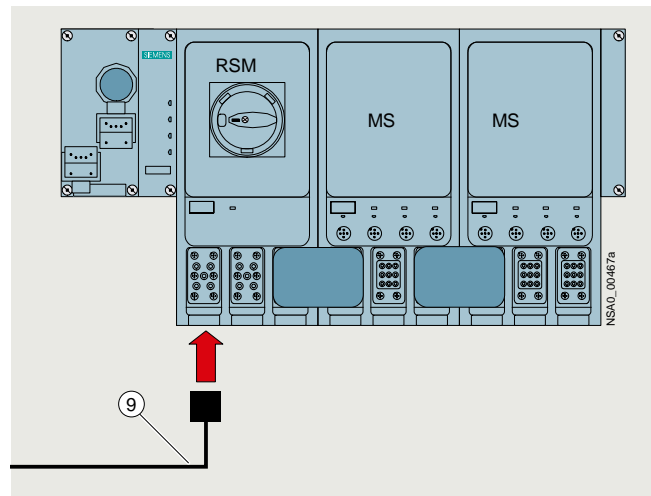

Infeed on the RSM isolator module

Power bus


The power supply to the field devices (ET 200pro motor starters, M200D motor starters) is provided via the power bus, in which the power T terminal connectors or power double-T terminal connectors are connected by power bus cables.

Feeders

From the terminal connectors, spur lines with Han Q4/2 plugs lead to the field devices, from which the motors are supplied with power via motor connection cables.

Interruption-free thanks to power terminal connectors

In finger-safe connection technology the power T terminal connectors and power double-T terminal connectors connect the components of a feeder to the power bus. They ensure interruption-free operation, i.e. the power bus is not interrupted when the components are plugged in.

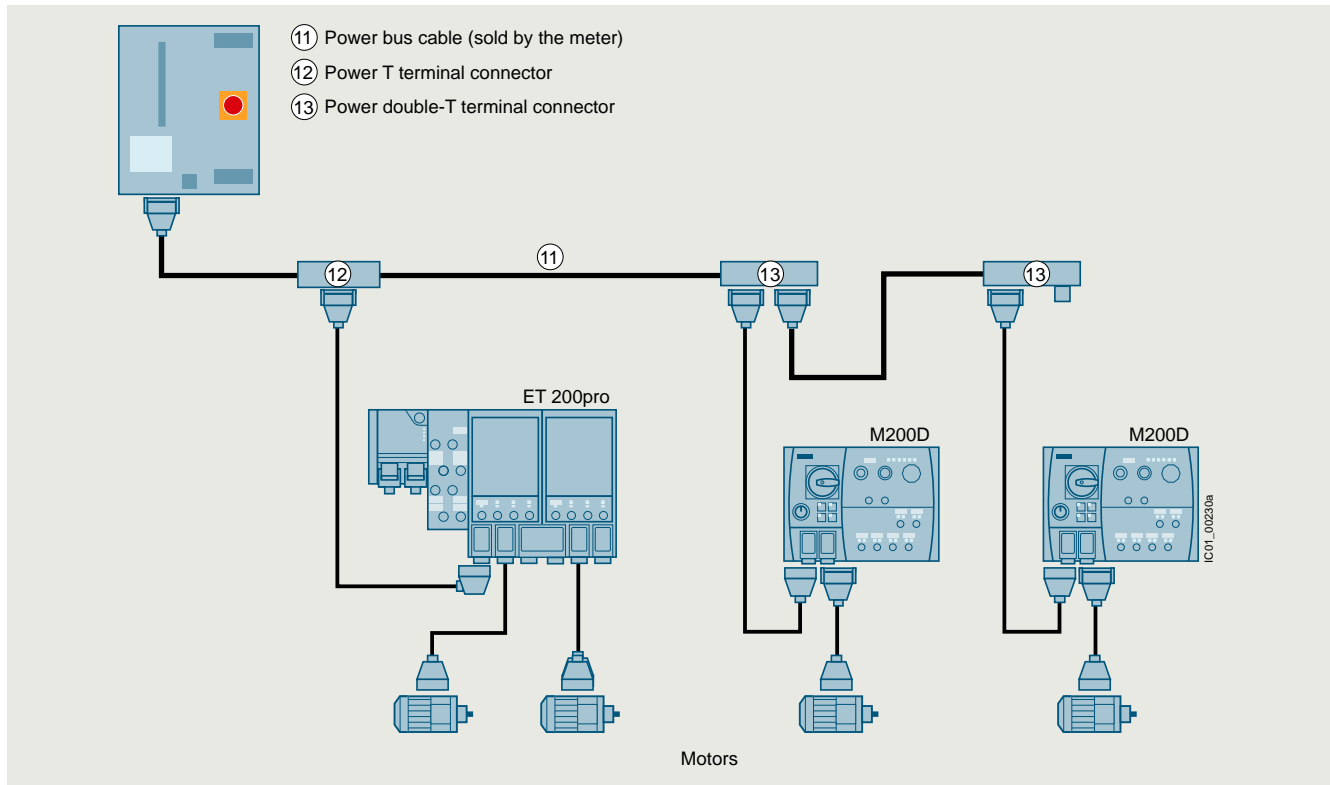

Power supply to the motors via the power bus with power T and double-T terminal connectors linked by power bus cables, spur lines to the field devices (motor starters), and power loop-through connections to the motors via motor connection cables

Motor control via PROFIBUS

The interface modules (IM) for PROFIBUS can be combined with two different connection modules for connecting PROFIBUS DP and the power supply:

- Direct connection with cable bushings
- M12, 7/8" connection
 - with M12 connecting cable and M12 plugs for data transmission with PROFIBUS DP
 - with 7/8" connecting cable and 7/8" plugs for the power supply

For the connection modules with the associated accessories, see [Accessories for ET 200pro interface modules, page 10/384](#).



Motor control via PROFINET

For the connection modules with the associated accessories, see [Accessories for ET 200pro interface modules, page 10/384](#).





I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**Accessories for ET 200pro motor starters****Selection and ordering data**

Version	Article No.
Incoming power supply	
① Power feeder plugs Connector set for incoming power supply, e.g. for connecting to T terminal connectors, comprising a coupling enclosure, straight outgoing feeder (with bracket), pin insert for Han Q4/2, incl. bushing <ul style="list-style-type: none"> • 5 male contacts, 2.5 mm² • 5 male contacts, 4 mm² • 5 male contacts, 6 mm² 	3RK1911-2BS60 3RK1911-2BS20 3RK1911-2BS40
② Power connection plugs Connector set for incoming power supply for connection to ET 200pro motor starters/ET 200pro isolator modules, comprising a cable-end connector hood, angular outgoing feeder, female insert for Han Q4/2, including bushing <ul style="list-style-type: none"> • 5 female contacts, 2.5 mm² • 5 female contacts, 4 mm² • 5 female contacts, 6 mm² 	3RK1911-2BE50 3RK1911-2BE10 3RK1911-2BE30
⑧ Power connection cables, assembled at one end Power connection cable for ET 200pro motor starters, open at one end, for Han Q4/2, angular, 4 x 4 mm ² <ul style="list-style-type: none"> • Length 1.5 m • Length 5.0 m 	3RK1911-0DB13 3RK1911-0DB33
⑨ Power connection cables for isolator module, assembled at one end Power connection cable for ET 200pro isolator modules, open at one end, for Han Q4/2, angular, insert turned at isolator module end, 4 x 4 mm ² <ul style="list-style-type: none"> • Length 1.5 m • Length 5.0 m 	3RK1911-0DF13 3RK1911-0DF33
Power loop-through on the field device	
③ Power jumper plug	3RK1922-2BQ00
⑦ Power loop-through plugs Connector set for power loop-through for connection to ET 200pro motor starters/ET 200pro isolator modules, comprising a cable-end connector hood, angular outgoing feeder, pin insert for Han Q4/2, including bushing <ul style="list-style-type: none"> • 4 male contacts, 2.5 mm² • 4 male contacts, 4 mm² 	3RK1911-2BF50 3RK1911-2BF10
Motor cables	
④ Motor connection plugs Connector set for motor cable for connection to ET 200pro motor starters, comprising a cable-end connector hood, angular outgoing feeder, pin insert for Han Q8/0, incl. bushing <ul style="list-style-type: none"> • 8 male contacts, 1.5 mm² • 6 male contacts, 2.5 mm² 	3RK1902-OCE00 3RK1902-OCC00
⑤ Motor plugs Connector set for motor cable for connection to motors, comprising a cable-end connector hood, straight outgoing feeder, female insert for Han 10e, incl. star jumper, including bushing <ul style="list-style-type: none"> • 7 female contacts, 1.5 mm² • 7 female contacts, 2.5 mm² 	3RK1911-2BM21 3RK1911-2BM22
⑥ Motor plugs with EMC suppressor circuit Connector set for motor cable for connection to motors, comprising a cable-end connector hood, straight outgoing feeder, female insert for Han 10e with EMC suppressor circuit, including star jumper, including bushing <ul style="list-style-type: none"> • 7 female contacts, 1.5 mm² • 7 female contacts, 2.5 mm² 	3RK1911-2BL21 3RK1911-2BL22

Accessories for ET 200pro motor starters

Version	Article No.
Motor cables (continued)	
<p>⑩ Motor cables, assembled at one end Open at one end, Han Q8, angular, length 5 m</p> <ul style="list-style-type: none"> • For motor without brake, for ET 200pro, 4 x 1.5 mm² • For motor with brake for ET 200pro, 6 x 1.5 mm² • For motor without brake, with thermistor, for ET 200pro, 6 x 1.5 mm² • For motor with brake and thermistor for ET 200pro, 8 x 1.5 mm² 	<p>3RK1911-0EB31 3RK1911-0ED31 3RK1911-0EF31 3RK1911-0EG31</p>
Power bus	
<p>⑫ Power T terminal connectors For 400 V AC, for connection of feeders (e.g. motor starters) by means of standard round cable at any point of the power bus, by insulation displacement connection, used with preassembled bus segments</p> <ul style="list-style-type: none"> • 2.5 mm²/4 mm² • 4 mm²/6 mm² 	<p>3RK1911-2BF01 3RK1911-2BF02</p>
<p>⑬ Power double-T terminal connectors For 400 V AC, for connection of feeders (e.g. motor starters) by means of standard round cable at any point of the power bus, by insulation displacement connection, used with preassembled bus segments, connection of two motor starters possible</p> <ul style="list-style-type: none"> • 4 mm²/6 mm² 	<p>3RK1911-2BG02</p>
<p>Sealing set (comprising 2 seals) For power T/power double-T terminal connectors</p> <ul style="list-style-type: none"> • For power cables with Ø 10 ... 13 mm • For power cables with Ø 13 ... 16 mm • For power cables with Ø 16 ... 19 mm • For power cables with Ø 19 ... 22 mm • Blanking plugs 	<p>3RK1911-5BA00 3RK1911-5BA10 3RK1911-5BA20 3RK1911-5BA30 3RK1911-5BA50</p>
Further accessories for power connections	
 3RK1902-0CW00 <p>Crimping tool for pins/sockets, 4 mm² and 6 mm²</p>	<p>3RK1902-0CW00</p>
<p>Dismantling tools</p> <ul style="list-style-type: none"> • For male and female contacts for 9-pole Han Q4/2 inserts • For male and female contacts for 9-pole Han Q8 inserts 	<p>3RK1902-0AB00 3RK1902-0AJ00</p>
 3RK1902-0CK00 <p>Sealing caps For 9-pole power socket connectors</p> <ul style="list-style-type: none"> • 1 unit per pack • 10 units per pack 	<p>3RK1902-0CK00 3RK1902-0CJ00</p>

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro**Accessories for ET 200pro motor starters**

Version	Article No.	
Further accessories		
Module racks, wide¹⁾ <ul style="list-style-type: none"> Length 500 mm Length 1 000 mm Length 2 000 mm 	6ES7194-4GB00-0AA0 6ES7194-4GB60-0AA0 6ES7194-4GB20-0AA0	
Module racks, wide, compact¹⁾ <ul style="list-style-type: none"> Length 500 mm Length 1 000 mm Length 2 000 mm 	6ES7194-4GD00-0AA0 6ES7194-4GD10-0AA0 6ES7194-4GD20-0AA0	
Backplane bus module 110 mm²⁾	3RK1922-2BA00	
Handheld device For ET 200pro motor starters (or for M200D motor starters) for local operation Notes: <ul style="list-style-type: none"> The motor-starter-specific serial interface cables must be ordered separately. The RS 232 interface cable 3RK1922-2BP00 is used for the MS ET 200pro. 	3RK1922-3BA00	
 3RK1922-3BA00	RS 232 interface cable Serial data connection between ET 200pro (or M200D) motor starters and the RS 232 interface of a PC/PG/laptop (with the Motor Starter ES software) or the handheld device 3RK1922-3BA00	3RK1922-2BP00
USB interface cable, 2.5 m Serial data connection between ET 200pro (or M200D) motor starters and the USB interface of a PC/PG/laptop (with the Motor Starter ES software)	6SL3555-0PA00-2AA0	
 3RK1901-1KA00	M12 sealing caps For sealing unused M12 input or output sockets (one set contains ten sealing caps)	3RK1901-1KA00
 3RK1911-6EA00	Motor suppression modules RC element for installation in motor terminal box <ul style="list-style-type: none"> Type of construction square 	3RK1911-6EA00
 3RK1911-6EB00	<ul style="list-style-type: none"> Type of construction round 	3RK1911-6EB00

¹⁾ The wide module rack can accommodate all ET 200pro motor starters and any optional modules (isolator module, Safety local isolator module and 400 V disconnecting module).

²⁾ The backplane bus module is a prerequisite for operation of the ET 200pro motor starter and the optional module.

For more connection technology products, see <https://support.industry.siemens.com/cs/ww/en/view/65355810>.

Overview



SIMATIC ET 200pro FC-2 frequency converter

The SIMATIC ET 200pro FC-2 frequency converter has the design of a SIMATIC ET 200pro module. It supplements the SIMATIC ET 200pro system range with distributed, speed-controlled drives. It is suitable for the open-loop and closed-loop control of asynchronous (induction) motors in a wide range of industrial applications. It is predestined for conveyor technology applications using drives networked via PROFIBUS and PROFINET, in particular in distributed designs without control cabinet with high degree of protection (IP65), when combining several drives. The modular, service-friendly concept is ideally suited to manufacturing processes with high plant standstill costs.

Reasons for using distributed drive systems

- Modular drive solutions – therefore standardized mechatronic elements that can be individually tested
- A control cabinet is not required, resulting in a smaller space requirement and lower cooling requirements
- Long motor cables between converter and motor are not required
 - Less power losses
 - Reduced noise radiation
 - Reduced costs for shielded cables
 - No additional filters
- Distributed configurations offer considerable benefits for conveyor systems with their extensive coverage (e.g. in the automotive and logistics sectors)

Siemens family of distributed drives

Siemens offers an innovative portfolio of frequency converters to optimally implement distributed drive solutions. The strengths of the individual members of the drive family permit simple adaptation to the widest range of application demands:

- Identical connection systems
- User-friendly commissioning and configuration tools

Products from the family of distributed drives:

- SINAMICS G115D distributed drive system
- SINAMICS G120D frequency converters
- SIMATIC ET 200pro FC-2 frequency converters
- SIRIUS M200D motor starters

Safety Integrated

The distributed SIMATIC ET 200pro FC-2 frequency converters are already equipped with the integrated STO (Safe Torque Off) safety function, certified in accordance with IEC 61508 SIL 2 as well as ISO 13849-1 PL d and Category 3. It can be activated locally via the F-RSM or by means of PROFIsafe.

STARTER commissioning tool

The STARTER commissioning tool (V4.4 and higher) plus the corresponding SINAMICS Support Package (SSP) supports the commissioning and maintenance of SIMATIC ET 200pro FC-2 frequency converters.

The operator guidance combined with comprehensive, user-friendly functions for the relevant drive solution allow you to commission the device quickly and easily.

Engineering Framework STEP7 classic (V5.5 and higher)

Hardware Support Packages (HSP) are available to integrate SIMATIC ET 200pro FC-2 in STEP7 classic.

Engineering Framework TIA Portal (as from V13 SP1)

TIA Portal is a powerful engineering framework providing full access to the whole digitized automation.

Hardware Support Packages (HSP) are available to integrate SIMATIC ET 200pro FC-2 in TIA Portal.

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

SIMATIC ET 200pro FC-2 frequency converters

Ordering data	Article No.	Ordering data	Article No.
SIMATIC ET 200pro FC-2 frequency converter with integrated safety function STO (Safe Torque Off)	6SL3514-1KE13-5AE0	STARTER commissioning tool ¹⁾ on DVD-ROM	6SL3072-0AA00-0AG0
Backplane bus module for mounting the frequency converter (absolutely essential for operation of the converter)	6SL3260-2TA00-0AA0	PC converter connection kit 2 Mini USB interface cable for communication with a PC, 3 m (9.84 ft) long	6SL3255-0AA00-2CA0
Accessories		Connecting cable pre-assembled at one end Power supply cable, open at one end, for Q4/2, angled, 4 x 4 mm ²	
IOP-2 Handheld For use with SINAMICS G120 SINAMICS G120C SINAMICS G120P SINAMICS G120D SIMATIC ET 200pro FC-2 Included in the scope of delivery:	6SL3255-0AA00-4HA1	<ul style="list-style-type: none"> • 1.5 m (4.92 ft) long • 5 m (16.4 ft) long 	3RK1911-0DB13 3RK1911-0DB33
<ul style="list-style-type: none"> • IOP-2 • Handheld housing • Rechargeable batteries (4 x AA) • Charging unit (international) • RS232 connecting cable 3 m (9.84 ft) long, can be used in combination with SINAMICS G120, SINAMICS G120C, SINAMICS G120P • USB cable 1 m (3.28 ft) long 		Connector set for the power supply Q4/2	3RK1911-2BE50 3RK1911-2BE10 3RK1911-2BE30
RS232 connecting cable 2.5 m (8.20 ft) long, with optical interface for connecting the IOP-2 Handheld to SINAMICS G120D, SIMATIC ET 200pro FC-2	3RK1922-2BP00	Motor cables pre-assembled at one end for motors with brake and temperature sensor with Q8 plug, shielded	(HTG: supplied by Harting) (ZKT: supplied by KnorrTec)
<u>Memory Cards</u>		Cross-section	4 x 1.5 mm ² 2 x (2 x 0.75 mm ²)
SINAMICS SD card 512 MB	6SL3054-4AG00-2AA0	<ul style="list-style-type: none"> • 1.5 m (4.92 ft) long • 3 m (9.84 ft) long • 5 m (16.4 ft) long • 10 m (32.8 ft) long 	HTG: 61 88 201 0288 ZKT: 70020501000150 HTG: 61 88 201 0289 ZKT: 70020501000300 HTG: 61 88 201 0290 ZKT: 70020501000500 HTG: 61 88 201 0299 ZKT: 70020501001000
<u>Optional firmware memory cards</u>		Connector set for motor cable Q8, shielded	HTG: 61 83 401 0131 ZKT: 10032001
SINAMICS SD card 512 MB + firmware V4.7 SP13 (Multicard V4.7 SP13)	6SL3054-7TG00-2BA0		
SINAMICS SD card 512 MB + firmware V4.7 SP14 (Multicard V4.7 SP14)	6SL3054-7TH00-2BA0		

¹⁾ The STARTER commissioning tool is also available on the internet at <http://www.siemens.com/starter>

Technical specifications

Distributed frequency converter	SIMATIC ET 200pro FC-2
Selection features	
Integrated safety functions acc. to IEC 61508 SIL 2 and ISO 13849-1 PL d and Category 3	<ul style="list-style-type: none"> • Safe Torque Off (STO) • Control of the integrated safety function via the Safety Local isolator module F-RSM or via F-Switch PROFIsafe
Electrical specifications	
Line voltage	380 ... 480 V 3 AC ±10 %
Power	
<ul style="list-style-type: none"> • With an ambient temperature of 0 ... 55 °C (32 °F ... 131 °F) • With an ambient temperature of 0 ... 45 °C (32 °F ... 113 °F) 	1.1 kW 1.5 kW
Rated input current/output current	
<ul style="list-style-type: none"> • With an ambient temperature of 0 ... 55 °C (32 °F ... 131 °F) • With an ambient temperature of 0 ... 45 °C (32 °F ... 113 °F) 	2 A/3.5 A 2.5 A/3.9 A
Line frequency	47 ... 63 Hz
Overload capability	<ul style="list-style-type: none"> • Overload current 1.5 x rated output current (i.e. 150 % overload) for 60 s, cycle time 300 s • Overload current 2 x rated output current (i.e. 200 % overload) for 3 s, cycle time 300 s

Technical specifications


Distributed frequency converter	SIMATIC ET 200pro FC-2															
Output frequency	0 ... 550 Hz															
Pulse frequency	4 kHz (standard), 4 ... 16 kHz (in 2-kHz increments)															
Standard SCCR (Short Circuit Current Rating)	10 kA															
Skipped frequency range	1, parameterizable															
Converter efficiency	95 ... 97 %															
Interfaces	<ul style="list-style-type: none"> • Connection to PROFIBUS and PROFINET over the SIMATIC ET 200pro backplane bus • Mini USB interface for commissioning via PC (as from STARTER V4.4 plus SSP) • Optical interface for commissioning via the IOP-2 Handheld • Slot for an optional memory card (SD) for uploading or downloading parameter settings. Facilitates easy device replacement. • PTC, bimetal, KTY84, Pt1000 interface for motor temperature monitoring 															
Functions																
Open-loop/closed-loop control methods	<ul style="list-style-type: none"> • V/f control – linear ($M \sim n$) with/without flux current control (FCC), quadratic ($M \sim n^2$) or parameterizable • Vector control – sensorless • Closed-loop torque control 															
Operating functions	<ul style="list-style-type: none"> • Jogging • BICO technology • Automatic restart following interruptions in operation due to a power failure • Smooth connection of converter to rotating motor 															
Braking functions	<ul style="list-style-type: none"> • Integrated regenerative feedback functionality • Control of an electromagnetic holding brake <p>Integrated brake control supplies DC power supply to the brake</p> <table border="1"> <thead> <tr> <th>Line voltage</th> <th>380 V AC</th> <th>400 V AC</th> <th>440 V AC</th> <th>480 V AC</th> </tr> </thead> <tbody> <tr> <td>Rectified brake voltage</td> <td>171 V DC</td> <td>180 V DC</td> <td>198 V DC</td> <td>216 V DC</td> </tr> <tr> <td>Recommended brake coil voltage for Siemens motors</td> <td>170 ... 200 V DC</td> <td>170 ... 200 V DC 184 ... 218 V DC</td> <td>184 ... 218 V DC</td> <td>184 ... 218 V DC</td> </tr> </tbody> </table> <p>Disconnection on the DC side permits "fast" braking.</p>	Line voltage	380 V AC	400 V AC	440 V AC	480 V AC	Rectified brake voltage	171 V DC	180 V DC	198 V DC	216 V DC	Recommended brake coil voltage for Siemens motors	170 ... 200 V DC	170 ... 200 V DC 184 ... 218 V DC	184 ... 218 V DC	184 ... 218 V DC
Line voltage	380 V AC	400 V AC	440 V AC	480 V AC												
Rectified brake voltage	171 V DC	180 V DC	198 V DC	216 V DC												
Recommended brake coil voltage for Siemens motors	170 ... 200 V DC	170 ... 200 V DC 184 ... 218 V DC	184 ... 218 V DC	184 ... 218 V DC												
Protection functions	<ul style="list-style-type: none"> • Undervoltage • Overvoltage • Ground fault • Short-circuit • Stall protection • Thermal motor protection (\hat{P}_{tor} sensor) • Converter overtemperature • Motor blocking protection • Phase failure detection 															
Connectable motors	<ul style="list-style-type: none"> • Low-voltage asynchronous (induction) motors • Motor cable lengths: max. 15 m (49 ft) (shielded) 															
Mechanical specifications																
Degree of protection	IP65															
Operating temperature	0 ... 55 °C (32 ... 131 °F)															
Mounting position	Vertical wall mounting (vertical alignment of the cooling fins)															
Dimensions (W × H × D)	155 mm × 246 mm × 248 mm (6.10 in × 9.69 in × 9.76 in)															
Weight, approx.	4 kg (8.8 lb)															
Standards																
Certificates of suitability	UL508C, cUL, CE, UKCA, Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU															

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

ET 200pro software > Motor Starter ES

Overview

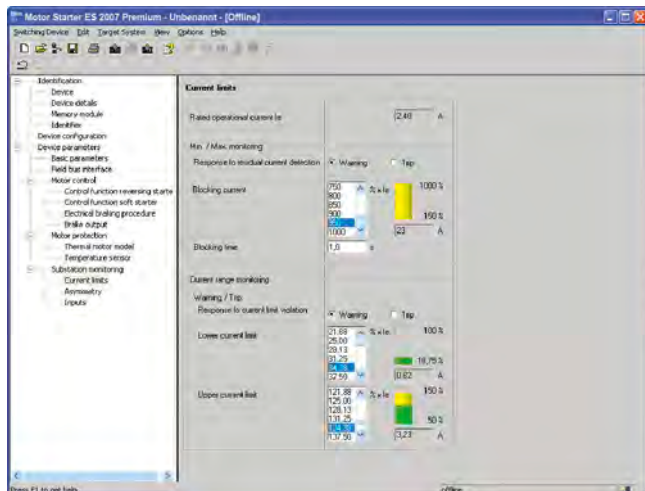

Motor Starter ES for parameterization, monitoring, diagnostics and testing of motor starters

More information

SiePortal see <https://www.siemens.com/product?3ZS1>

Technical specifications and system requirements, see <https://support.industry.siemens.com/cs/ww/en/ps/16713/td>

Catalog IC 10 see <https://www.siemens.com/ic10>

Motor Starter ES is used for the startup, parameterization, diagnostics, documentation and preventive maintenance of SIMATIC ET 200S, ET 200pro, ECOFAST and M200D motor starters.

Interfacing is performed

- Via the local interface on the device
- With PROFIBUS DP-V1-capable motor starters from any point in PROFIBUS (applies to ET 200S DP V1/ET 200pro/ECOFAST/M200D)
- With PROFINET-capable motor starters from any point in PROFINET (applies to ET 200S DP V1/ET 200pro/M200D).

Using Motor Starter ES, the communication-capable motor starters are easily parameterized during startup, monitored during normal operation and successfully diagnosed for service purposes. Preventative maintenance is supported by a function for reading out diverse statistical data (e.g. operating hours, operating cycles, cut-off currents, etc.). The user is supported during these procedures with comprehensive Help functions and plain text displays.

Motor Starter ES can either be used as a stand-alone program or it can be integrated into STEP 7 via an Object Manager.

Note:

The Motor Starter ES functionalities in relation to startup, parameterization and diagnostics are integrated directly in the TIA Portal from V17 and are accessible online for the SIMATIC ET 200pro, ET 200SP and M200D motor starters.

Efficient engineering with three program versions

The Motor Starter ES software program is available in three versions which differ in their user-friendliness, scope of functions and price.

Motor Starter ES	Basic	Standard	Premium
ET 200S High Feature PROFIBUS IM	✓	✓	✓
ET 200S High Feature PROFINET IM	✓	✓	✓
ECOFAST AS-Interface High Feature	✓	✓	--
ECOFAST PROFIBUS	✓	✓	✓
ET 200pro PROFIBUS IM	✓	✓	✓
ET 200pro PROFINET IM	✓	✓	✓
M200D AS-Interface Standard	✓	✓	(✓)
M200D PROFIBUS	✓	✓	✓
M200D PROFINET	✓	✓	✓

✓ Function available,

(✓) Available with restricted functionality

-- Function not available

Motor Starter ES	Basic	Standard	Premium
Access via the local interface on the device	✓	✓	✓
Parameter assignment	✓	✓	✓
Operating	✓	✓	✓
Diagnostics	--	✓	✓
Creation of typicals	--	✓	✓
Comparison functions	--	✓	✓
Standard-compliant printout according to EN ISO 7200	--	✓	✓
Service data (slave pointer, statistics data)	--	✓	✓
Access via PROFIBUS	--	--	✓
Access via PROFINET	--	--	✓
S7 routing	--	--	✓
Teleservice via MPI	--	--	✓
STEP 7 object manager ¹⁾	--	--	✓
Trace function	--	✓	✓

✓ Function available

-- Function not available

¹⁾ Only for STEP 7 V5.x

Additional functions

Standard-compliant printouts

The software tool greatly simplifies machine documentation. It enables parameterization printouts according to EN ISO 7200. The elements to be printed are easy to select and group as required.

Easy creation of typicals

Typicals can be created for devices and applications with only minimum differences in their parameters. These typicals contain all the parameters which are needed for the parameterization. In addition it is possible to specify which of these parameters are fixed and which can be adapted, e.g. by the startup engineer.

Teleservice via MPI

The Motor Starter ES Premium version supports the use of MPI Teleservice (comprising the Teleservice software and various Teleservice adapters) for remote diagnostics of the devices. This facilitates diagnostics and maintenance, and it shortens response times for service purposes.




Benefits

- Fast, error-free configuration and startup of motor starters even without extensive previous knowledge
- Transparent setting of the device functions and their parameters – online and offline
- Effective diagnostics functions on the soft starter and display of the most important measured values
- Trace function (oscilloscope function) for recording measured values and events (included in the Motor Starter ES Standard and Premium software version for M200D PROFIBUS and PROFINET).

Selection and ordering data**Parameterization, startup and diagnostics software
Motor Starter ES 2007**

For ECOFAST Motor Starter, SIMATIC ET 200S High-Feature Starter, SIMATIC ET 200pro Starter and M200D (AS-I Standard, PROFIBUS, PROFINET)

- Delivered without PC cable

Version	Article No.
Motor Starter ES 2007 Basic	
 <p>Floating license for one user Engineering software in limited-function version for diagnostics purposes, Class A, 3 languages (German/English/French), communication via system interface <u>Type of delivery:</u></p> <ul style="list-style-type: none"> • Software and documentation on CD and floating license on USB flash drive • Floating license as download <p>3ZS1310-4CC10-0YA5</p>	<p>3ZS1310-4CC10-0YA5</p> <p>3ZS1310-4CE10-0YB5</p>
Motor Starter ES 2007 Standard	
 <p>Floating license for one user Engineering software, Class A, 3 languages (German/English/French), communication via system interface <u>Type of delivery:</u></p> <ul style="list-style-type: none"> • Software and documentation on CD and floating license on USB flash drive • Floating license as download <p>3ZS1310-5CC10-0YA5</p>	<p>3ZS1310-5CC10-0YA5</p> <p>3ZS1310-5CE10-0YB5</p>
Motor Starter ES 2007 Premium	
 <p>Floating license for one user Engineering-Software, Class A, 3 languages (German/English/French), communication via system interface or PROFIBUS/PROFINET, STEP 7 Object Manager <u>Type of delivery:</u></p> <ul style="list-style-type: none"> • Software and documentation on CD and floating license on USB flash drive • Floating license as download <p>3ZS1310-6CC10-0YA5</p>	<p>3ZS1310-6CC10-0YA5</p> <p>3ZS1310-6CE10-0YB5</p>

For a description of the software versions, [see page 10/434](#).

Accessories

Version	Article No.
Optional accessories	
<p>RS 232 interface cable Serial data connection between ET 200pro MS/FC, M200D and laptop/PC/PG or MS</p>	3RK1922-2BP00
<p>USB interface cable Serial data connection between ET 200pro MS/FC, M200D and laptop/PC/PG or MS</p>	6SL3555-0PA00-2AA0
<p>USB/serial adapter For connecting an RS 232 PC cable to the USB interface of a PC, recommended for use in conjunction with ET 200S/ECOFAST/ET 200pro motor starters</p>	3UF7946-0AA00-0

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200pro

Add-on products for ET 200pro > EtherNet/IP interface module

Overview

An interface module (EtherNet/IP adapter) is available for operating ET 200pro on EtherNet/IP.

It can be used together with system and IO components of the ET 200pro distributed I/O system.

Ordering data

SIMATIC ET 200pro interface module for EtherNet/IP

Including:

- Bus terminating module for ET 200pro
- Companion disk with the manuals and the Configuration Tool

Article No.

ZNX:EIP200PRO

Article No.

Terminal module for EtherNet/IP

For connecting the interface module to EtherNet/IP

ZNX:EIP200PROC1

Technical specifications

Article number	ZNX:EIP200PRO Ethernet/IP Head Assembly for ET 200PRO
General information	
Product type designation	Ethernet/IP
Supply voltage	
Rated value (DC)	24 V
Input current	
from supply voltage 1L+, max.	400 mA
Address area	
Addressing volume	
• Inputs	255 byte
• Outputs	255 byte
Interface types	
M12 port	
• Autonegotiation	Yes
• Transmission rate, max.	100 Mbit/s
Interrupts/diagnostics/status information	
Diagnostics indication LED	
• For load voltage monitoring	Yes
• Bus fault BF (red)	Yes
• Group error SF (red)	Yes
• Monitoring 24 V voltage supply ON (green)	Yes
Potential separation	
between backplane bus and electronics	Yes
between supply voltage and electronics	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C
• max.	55 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Dimensions	
Width	135 mm
Height	130 mm
Depth	59.3 mm
Weights	
Weight, approx.	490 g

Article number	ZNX:EIP200PROC1 ET 200pro, CM IM DP M12 / 7/8"
Input current	
from supply voltage 1L+, max.	No current input, only infeed current, max. 8 A
from load voltage 2L+ (without load), max.	No current input, only infeed current, max. 8 A
Dimensions	
Width	90 mm
Height	130 mm
Depth	51 mm
Weights	
Weight, approx.	540 g

Overview



SIMATIC ET 200AL video
https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6141316253001



- Modular, distributed I/O system with compact I/O modules in IP65/67.
- Especially easy and flexible installation, even in extremely confined spaces.
- Easy wiring
- Easy commissioning
- SIMATIC ET 200AL consists of the following components:
 - Interface module for communication with IO controllers using the Ethernet-based protocols PROFINET, EtherNet/IP and Modbus TCP (MultiFieldbus).
 - Interface module for communication with IO controllers on PROFINET.
 - Interface module for communication with all masters on the PROFIBUS.
 - BusAdapter for connection to the ET 200SP I/O system.
 - Various I/O modules, 30 mm and 45 mm wide.
 - IO-Link I/O modules for connection to IO-Link Master
- Maximum configuration of an ET 200AL station:
 - Up to 32 I/O modules with PROFINET or PROFIBUS in any combination
 - Up to 16 I/O modules at the ET 200SP I/O system in any combination
- Connection of the modules via an internal backplane bus established using bus cables (ET connection).

Highlights

- Compact dimensions
- Low weight
- Safety-related collective shutdown of the outputs
- High degree of user-friendliness due to the following design features:
 - Flexible mounting in all positions possible due to screw fastening through the front or side
 - Direct installation on even surfaces or aluminum DIN rails
 - Labels for the identification of channels, modules and slots
 - Integrated cable tie opening
 - Clear and CAx-compliant interface designations
 - Uniform coloring of the system interfaces and system cables
 - 1:1 assignment of channel status LED, I/O socket and labeling strip
 - Pin assignment on the side
- I/O module portfolio comprising digital and analog modules, digital fail-safe module, IO-Link communications module and IO-Link I/O modules
- Ambient temperature range from -30 °C/-25 °C to +55 °C
- Extensive system functions
 - All interface and I/O modules support firmware update
 - Configuration control (option handling) via user software
 - System support of PROFlenergy for power saving purposes
 - Consistent use of identification and maintenance data IM0 to IM3/4 (electronic rating plate) for fast electronic and unambiguous identification of individual modules (Article No., serial number, etc.).

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**Interface modules > IM 157-1 MF****Overview**

- Multi-protocol capability:
Operation of the ET 200AL interface module on Ethernet controllers via the PROFINET, EtherNet/IP and Modbus TCP protocols
- Max. 32 I/O modules can be connected
- Max. data volume of 1440 bytes, for input and output data respectively (depends on protocol)
- Shortest bus cycle time 250 µs (depends on protocol)
- Automatic start-up by means of topology discovery (depends on protocol)
- Shared device:
Simultaneous access from different controllers via different Ethernet protocols PROFINET, EtherNet/IP and Modbus TCP
- Local data links:
Deterministic, easy-to-configure data exchange between controllers, also via different Ethernet protocols PROFINET, EtherNet/IP and Modbus TCP
- S2 system redundancy
- Support for the MRP (media redundancy protocol) and MRPD (media redundancy with planned duplication) functions
- Identification and maintenance data IMO ... IM4
- Autocrossover
- Firmware update
- Configuration management (option handling)
- PROFinergy
- Security functions

10

Ordering data**Article No.**

IM 157-1 MF interface module	6ES7157-1MA00-0AB0
For connecting ET 200AL to PROFINET	
Accessories	
Bus cable for backplane bus (ET connection)	
4-pin, shielded	
Pre-assembled at both ends, 2 M8 plugs	
0.19 m	6ES7194-2LH02-0AA0
0.3 m	6ES7194-2LH03-0AA0
1 m	6ES7194-2LH10-0AA0
2 m	6ES7194-2LH20-0AA0
5 m	6ES7194-2LH50-0AA0
10 m	6ES7194-2LN10-0AA0
15 m	6ES7194-2LN15-0AA0
Pre-assembled at both ends, 2 M8 plugs, angled	
0.3 m	6ES7194-2LH03-0AB0
1 m	6ES7194-2LH10-0AB0
2 m	6ES7194-2LH20-0AB0
5 m	6ES7194-2LH50-0AB0
10 m	6ES7194-2LN10-0AB0
15 m	6ES7194-2LN15-0AB0
Pre-assembled at one end, 1 M8 plug	
2 m	6ES7194-2LH20-0AC0
5 m	6ES7194-2LH50-0AC0
10 m	6ES7194-2LN10-0AC0
15 m	6ES7194-2LN15-0AC0

Article No.

M8 power cable	
4-pin	
Pre-assembled at both ends, M8 plug and M8 socket	
0.19 m	6ES7194-2LH02-1AA0
0.3 m	6ES7194-2LH03-1AA0
1 m	6ES7194-2LH10-1AA0
2 m	6ES7194-2LH20-1AA0
5 m	6ES7194-2LH50-1AA0
10 m	6ES7194-2LN10-1AA0
15 m	6ES7194-2LN15-1AA0
Pre-assembled at both ends, angled M8 plug and angled M8 socket	
0.3 m	6ES7194-2LH03-1AB0
1 m	6ES7194-2LH10-1AB0
2 m	6ES7194-2LH20-1AB0
5 m	6ES7194-2LH50-1AB0
10 m	6ES7194-2LN10-1AB0
15 m	6ES7194-2LN15-1AB0
Pre-assembled at one end, M8 socket	
2 m	6ES7194-2LH20-1AC0
5 m	6ES7194-2LH50-1AC0
10 m	6ES7194-2LN10-1AC0
15 m	6ES7194-2LN15-1AC0

Ordering data	Article No.	Ordering data	Article No.
M8 plug for ET connection 4-pin, shielded	6ES7194-2AB00-0AA0	ET connection FastConnect stripping tool Stripping tool for stripping the ET connection bus cable	6ES7194-2KA00-0AA0
M8 power connector Male contact insert, 4-pin Female contact insert, 4-pin	6ES7194-2AA00-0AA0 6ES7194-2AC00-0AA0	Labels 10 x 5 mm, RAL 9016; 5 frames with 40 labels each	6ES7194-2BA00-0AA0

Technical specifications

Article number	6ES7157-1MA00-0AB0 ET 200AL, IM 157-1 MF
General information	
Product type designation	IM 157-1 MF
Product function	
• I&M data	Yes; I&M0 to I&M4
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V19 or higher
• STEP 7 configurable/ integrated from version	from V5.6
• PROFINET from GSD version/ GSD revision	GSDML V2.4.x
• Multi Fieldbus Configuration Tool (MFCT)	from V1.5
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Input current	
Current consumption (rated value)	80 mA
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Address area	
Address space per module	
• Address space per module, max.	264 byte; For input and output data respectively
Address space per station	
• Address space per station, max.	1 440 byte
Hardware configuration	
Submodules	
• Number of submodules per station, max.	125
Interfaces	
Number of PROFINET interfaces	1; 2 ports (switch)
1. Interface	
Interface type	PROFINET
Interface types	
• M12 port	Yes; 2x M12 D-coded
• Integrated switch	Yes
Protocols	
• PROFINET IO Device	Yes
• Open IE communication	Yes

Article number	6ES7157-1MA00-0AB0 ET 200AL, IM 157-1 MF
Interface types	
M12 port	
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 100 Mbps	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• Autonegotiation	Yes
• Autocrossing	Yes
Protocols	
Modbus TCP	Yes
PROFINET IO Device	
Services	
- IRT	Yes; 250 µs, 500 µs, 1 ms, 2 ms, 4 ms, 8 ms, 16 ms, 32 ms, 64 ms, 128 ms
- PROFIenergy	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	14; 4x PN controller + 2x EtherNet/IP scanner + 10x Modbus TCP master
Redundancy mode	
• PROFINET system redundancy (S2)	Yes
- on S7-1500R/H	Yes
- on S7-400H	Yes
• PROFINET system redundancy (R1)	No
• H-Sync forwarding	Yes
Media redundancy	
- MRP	Yes
- MRPD	Yes
EtherNet/IP	
Services	
- CIP Implicit Messaging	Yes
- CIP Explicit Messaging	Yes
- CIP Safety	No
- Configuration control via Explicit Messaging	No
- Shared device	Yes; 4x PN controller + 2x EtherNet/IP scanner + 10x Modbus TCP master
- Number of scanners with shared device, max.	2
Updating times	
- Requested Packet Interval (RPI)	2 ms
Redundancy mode	
- DLR (Device Level Ring)	No
Address area	
- Address space per module, max.	264 byte
- ForwardOpen (Class1 & 32 bit Header)	500 byte
- LargeForwardOpen (Class3)	4 002 byte

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**Interface modules > IM 157-1 MF****Technical specifications**

Article number	6ES7157-1MA00-0AB0 ET 200AL, IM 157-1 MF
Modbus TCP Services	
- read coils (code=1)	Yes
- read discrete inputs (code=2)	Yes
- Read Holding Registers (Code=3)	Yes
- Read Input Register (Code=4)	Yes
- write single coil (code=5)	Yes
- Write Single Register (Code=6)	Yes
- write multiple coils (code=15)	Yes
- Write Multiple Registers (Code=16)	Yes
- Read/Write Multiple Registers (Code=23)	Yes
- Parameter change by master	Yes
- Modbus TCP Security Protocol	No
Address space per station	
- Address space per station, max.	500 byte; (246 byte outputs / 500 byte inputs)
- Access-consistent address space	250 byte; (246 byte outputs / 250 byte inputs)
Updating time	
- I/O request interval	2 ms
Connections	
- Number of connections per slave	9; (1x inputs / 2x outputs / 4x volatile registers / 2x Device Info)
Open IE communication	
• TCP/IP	Yes
• SNMP	Yes
• LLDP	Yes
• ARP	Yes
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• NS LED	Yes; green/red LED
• MS LED	Yes; green/red LED
• IO LED	Yes; red/green/yellow LEDs
• Connection display LINK TX/RX	Yes; 2x green LED

Article number	6ES7157-1MA00-0AB0 ET 200AL, IM 157-1 MF
Potential separation	
between the load voltages	Yes
between PROFINET and all other circuits	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
product functions / security / header	
PROFINET Security Class	1
signed firmware update	Yes
Secure Boot	Yes
safely removing data	Yes
data integrity	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
connection method	
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	45 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	215 g

Overview



- Interface module for connecting ET 200AL to PROFINET
- Handles data exchange with the PROFINET I/O controller in the PLC
- Max. 32 I/O modules can be connected
- Max. data volume of 1430 bytes, for input and output data respectively
- Shortest bus cycle 250 µs
- Automatic power-up by means of topology recognition
- Autocrossover
- Shared device on up to 4 IO controllers
- Support for the MRP (media redundancy protocol) and MRPD (media redundancy with planned duplication) functions
- Identification and maintenance data IM0 ... IM4
- Firmware update
- Configuration management (option handling)
- PROFINET energy

Ordering data

Ordering data	Article No.	Ordering data	Article No.
IM 157-1 PN interface module	6ES7157-1AB00-0AB0	Power cable M8	
For connecting ET 200AL to PROFINET		4-pin	
Accessories		Pre-assembled at both ends, M8 connector and M8 socket	
Bus cable for backplane bus (ET connection)		0.19 m	6ES7194-2LH02-1AA0
4-pin, shielded		0.3 m	6ES7194-2LH03-1AA0
Pre-assembled at both ends, 2 M8 connectors		1 m	6ES7194-2LH10-1AA0
0.19 m	6ES7194-2LH02-0AA0	2 m	6ES7194-2LH20-1AA0
0.3 m	6ES7194-2LH03-0AA0	5 m	6ES7194-2LH50-1AA0
1 m	6ES7194-2LH10-0AA0	10 m	6ES7194-2LN10-1AA0
2 m	6ES7194-2LH20-0AA0	15 m	6ES7194-2LN15-1AA0
5 m	6ES7194-2LH50-0AA0	Pre-assembled at both ends, angled M8 connector and angled M8 socket	
10 m	6ES7194-2LN10-0AA0	0.3 m	6ES7194-2LH03-1AB0
15 m	6ES7194-2LN15-0AA0	1 m	6ES7194-2LH10-1AB0
Pre-assembled at both ends, 2 M8 connectors, angled		2 m	6ES7194-2LH20-1AB0
0.3 m	6ES7194-2LH03-0AB0	5 m	6ES7194-2LH50-1AB0
1 m	6ES7194-2LH10-0AB0	10 m	6ES7194-2LN10-1AB0
2 m	6ES7194-2LH20-0AB0	15 m	6ES7194-2LN15-1AB0
5 m	6ES7194-2LH50-0AB0	Pre-assembled at one end, M8 socket	
10 m	6ES7194-2LN10-0AB0	2 m	6ES7194-2LH20-1AC0
15 m	6ES7194-2LN15-0AB0	5 m	6ES7194-2LH50-1AC0
Pre-assembled at one end, 1 M8 connector		10 m	6ES7194-2LN10-1AC0
2 m	6ES7194-2LH20-0AC0	15 m	6ES7194-2LN15-1AC0
5 m	6ES7194-2LH50-0AC0	M8 connector for ET connection	6ES7194-2AB00-0AA0
10 m	6ES7194-2LN10-0AC0	4-pin, shielded	
15 m	6ES7194-2LN15-0AC0	M8 power connector	
		Male contact insert, 4-pin	6ES7194-2AA00-0AA0
		Female contact insert, 4-pin	6ES7194-2AC00-0AA0
		ET connection FastConnect stripping tool	6ES7194-2KA00-0AA0
		Stripping tool for stripping the ET connection bus cable	
		Labels	6ES7194-2BA00-0AA0
		10 x 5 mm, RAL 9016; 5 frames with 40 labels each	

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**Interface modules > IM 157-1 PN****Technical specifications**

Article number	6ES7157-1AB00-0AB0 ET 200AL, IM 157-1 PN
General information	
Product type designation	IM 157-1 PN
Product function	
• I&M data	Yes; I&M0 to I&M4
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher
• STEP 7 configurable/ integrated from version	From V5.5 SP4 Hotfix 3
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Input current	
Current consumption (rated value)	100 mA
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Address area	
Address space per station	
• Address space per station, max.	1 430 byte
Interfaces	
Number of PROFINET interfaces	1
1. Interface	
Interface type	PROFINET
Interface types	
• M12 port	Yes; 2x M12 D-coded
• integrated switch	Yes
Protocols	
• PROFINET IO Device	Yes
• Open IE communication	Yes
Interface types	
M12 port	
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 10 Mbps	Yes; for Ethernet services
• 100 Mbps	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• Autonegotiation	Yes
• Autocrossing	Yes
Protocols	
PROFINET IO Device	
Services	
- IRT	Yes; 250 µs, 500 µs, 1 ms, 2 ms, 4 ms, 8 ms, 16 ms, 32 ms, 64 ms, 128 ms
- PROFIenergy	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4
Redundancy mode	
Media redundancy	
- MRP	Yes
- MRPD	Yes
Open IE communication	
• TCP/IP	Yes
• SNMP	Yes
• LLDP	Yes

Article number	6ES7157-1AB00-0AB0 ET 200AL, IM 157-1 PN
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Connection display LINK TX/RX	Yes; 2x green LED
Potential separation	
between the load voltages	Yes
between PROFINET and all other circuits	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C
• max.	55 °C
connection method	
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	45 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	263 g

Overview



- Interface module for connecting ET 200AL to PROFIBUS
- As DPV1 slave it handles the data exchange with the PROFIBUS master in the PLC
- Max. 32 I/O modules can be connected
- Max. data volume of 244 bytes, for input and output data respectively
- Automatic detection of baud rate 9.6 kBd ... 12 MBd
- PROFIBUS addresses 1 ... 99; can be set by means of rotary switch
- Identification and maintenance data IM0 ... IM3
- Firmware update
- Configuration management (option handling)

Ordering data

Ordering data	Article No.	Ordering data	Article No.
IM 157-1 DP interface module For connecting ET 200AL to PROFIBUS	6ES7157-1AA00-0AB0	M8 power cable 4-pin Pre-assembled at both ends, M8 connector and M8 socket	
Accessories		0.19 m	6ES7194-2LH02-1AA0
Bus cable for backplane bus (ET connection) 4-pin, shielded Pre-assembled at both ends, 2 M8 connectors		0.3 m	6ES7194-2LH03-1AA0
0.19 m	6ES7194-2LH02-0AA0	1 m	6ES7194-2LH10-1AA0
0.3 m	6ES7194-2LH03-0AA0	2 m	6ES7194-2LH20-1AA0
1 m	6ES7194-2LH10-0AA0	5 m	6ES7194-2LH50-1AA0
2 m	6ES7194-2LH20-0AA0	10 m	6ES7194-2LN10-1AA0
5 m	6ES7194-2LH50-0AA0	15 m	6ES7194-2LN15-1AA0
10 m	6ES7194-2LN10-0AA0	Pre-assembled at both ends, angled M8 connector and angled M8 socket	
15 m	6ES7194-2LN15-0AA0	0.3 m	6ES7194-2LH03-1AB0
Pre-assembled at both ends, 2 M8 connectors, angled		1 m	6ES7194-2LH10-1AB0
0.3 m	6ES7194-2LH03-0AB0	2 m	6ES7194-2LH20-1AB0
1 m	6ES7194-2LH10-0AB0	5 m	6ES7194-2LH50-1AB0
2 m	6ES7194-2LH20-0AB0	10 m	6ES7194-2LN10-1AB0
5 m	6ES7194-2LH50-0AB0	15 m	6ES7194-2LN15-1AB0
10 m	6ES7194-2LN10-0AB0	Pre-assembled at one end, M8 socket	
15 m	6ES7194-2LN15-0AB0	2 m	6ES7194-2LH20-1AC0
Pre-assembled at one end, 1 M8 connector		5 m	6ES7194-2LH50-1AC0
2 m	6ES7194-2LH20-0AC0	10 m	6ES7194-2LN10-1AC0
5 m	6ES7194-2LH50-0AC0	15 m	6ES7194-2LN15-1AC0
10 m	6ES7194-2LN10-0AC0	M8 connector for ET connection 4-pin, shielded	6ES7194-2AB00-0AA0
15 m	6ES7194-2LN15-0AC0	M8 power connector Male contact insert, 4-pin	6ES7194-2AA00-0AA0
		Female contact insert, 4-pin	6ES7194-2AC00-0AA0
		ET connection FastConnect Stripping Tool Stripping tool for stripping the ET connection bus cable	6ES7194-2KA00-0AA0
		Labels 10 x 5 mm, RAL 9016; 5 frames with 40 labels each	6ES7194-2BA00-0AA0

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**Interface modules > IM 157-1 DP****Technical specifications**

Article number	6ES7157-1AA00-0AB0 ET 200AL, IM 157-1 DP
General information	
Product type designation	IM 157-1 DP
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher
• STEP 7 configurable/ integrated from version	From V5.5 SP4 Hotfix 3
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Input current	
Current consumption (rated value)	50 mA
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Address area	
Address space per station	
• Address space per station, max.	244 byte
Interfaces	
Number of PROFIBUS interfaces	1
1. Interface	
Interface type	PROFIBUS DP
Interface types	
• RS 485	Yes
• M12 port	Yes; 2x M12 B-coded
Protocols	
• PROFIBUS DP slave	Yes
Interface types	
RS 485	
• Transmission rate, max.	12 Mbit/s
Protocols	
PROFIBUS DP	
Services	
- SYNC capability	Yes
- FREEZE capability	Yes
- Direct data exchange (slave-to-slave communication)	Yes
- DPV0	Yes
- DPV1	Yes

Article number	6ES7157-1AA00-0AB0 ET 200AL, IM 157-1 DP
Interrupts/diagnostics/ status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• Connection display DP	Yes; green LED
Potential separation	
between the load voltages	Yes
between PROFIBUS DP and all other circuit components	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
connection method	
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	45 mm
Height	159 mm
Depth	46 mm
Weights	
Weight, approx.	211 g

Overview



- 30 and 45 mm wide modules with parameters and diagnostic functions
- 8-channel digital input module with M8 or M12 connection
- 16-channel digital input module with M12 connection
- 8-channel digital input/output module with M8 or M12 connection
- 16-channel digital input / output module with M12 connection
- 8-channel digital output module 2A with M12 connection

Ordering data

Digital input modules

Article No.	Ordering data
6ES7141-5BF00-0BA0	DI 8X24VDC, 8XM8
6ES7141-5AF00-0BA0	DI 8X24VDC, 4XM12
6ES7141-5AH00-0BA0	DI 16X24VDC, 8XM12

Digital output modules

Article No.	Ordering data
6ES7142-5AF00-0BA0	DQ 8X24VDC/2A, 8XM12

Digital input/output modules

Article No.	Ordering data
6ES7143-5BF00-0BA0	4 DIQ / 4 DQ, 24 V DC, 0.5 A
6ES7143-5AF00-0BA0	DIQ 4+DQ 4X24VDC/0.5A, 4XM12
6ES7143-5AH00-0BA0	DIQ 16X24VDC/0.5A, 8XM12

Accessories

Bus cable for backplane bus (ET connection)

Article No.	Ordering data
	4-pin, shielded
	Pre-assembled at both ends, 2 M8 connectors
6ES7194-2LH02-0AA0	0.19 m
6ES7194-2LH03-0AA0	0.3 m
6ES7194-2LH10-0AA0	1 m
6ES7194-2LH20-0AA0	2 m
6ES7194-2LH50-0AA0	5 m
6ES7194-2LN10-0AA0	10 m
6ES7194-2LN15-0AA0	15 m
	Pre-assembled at both ends, 2 M8 connectors, angled
6ES7194-2LH03-0AB0	0.3 m
6ES7194-2LH10-0AB0	1 m
6ES7194-2LH20-0AB0	2 m
6ES7194-2LH50-0AB0	5 m
6ES7194-2LN10-0AB0	10 m
6ES7194-2LN15-0AB0	15 m
	Pre-assembled at one end, 1 M8 connector
6ES7194-2LH20-0AC0	2 m
6ES7194-2LH50-0AC0	5 m
6ES7194-2LN10-0AC0	10 m
6ES7194-2LN15-0AC0	15 m

Power cable M8

Article No.	Ordering data
	4-pin
	Pre-assembled at both ends, M8 connector and M8 socket
6ES7194-2LH02-1AA0	0.19 m
6ES7194-2LH03-1AA0	0.3 m
6ES7194-2LH10-1AA0	1 m
6ES7194-2LH20-1AA0	2 m
6ES7194-2LH50-1AA0	5 m
6ES7194-2LN10-1AA0	10 m
6ES7194-2LN15-1AA0	15 m
	Pre-assembled at both ends, angled M8 connector and angled M8 socket
6ES7194-2LH03-1AB0	0.3 m
6ES7194-2LH10-1AB0	1 m
6ES7194-2LH20-1AB0	2 m
6ES7194-2LH50-1AB0	5 m
6ES7194-2LN10-1AB0	10 m
6ES7194-2LN15-1AB0	15 m
	Pre-assembled at one end, M8 socket
6ES7194-2LH20-1AC0	2 m
6ES7194-2LH50-1AC0	5 m
6ES7194-2LN10-1AC0	10 m
6ES7194-2LN15-1AC0	15 m
6ES7194-2AB00-0AA0	M8 connector for ET connection
	4-pin, shielded
6ES7194-2AA00-0AA0	M8 power connector
6ES7194-2AC00-0AA0	Male contact insert, 4-pin
	Female contact insert, 4-pin
6ES7194-2KA00-0AA0	ET connection FastConnect stripping tool
	Stripping tool for stripping the ET connection bus cable
6ES7194-2BA00-0AA0	Labels
	10 x 5 mm, RAL 9016; 5 frames with 40 plates each

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**I/O modules > Digital I/O modules****Technical specifications**

Article number	6ES7141-5BF00-0BA0 ET 200AL, DI 8x24VDC, 8xM8	6ES7141-5AF00-0BA0 ET 200AL, DI 8x24VDC, 4xM12	6ES7141-5AH00-0BA0 ET 200AL, DI 16x24VDC, 8xM12
General information			
Product type designation	DI 8x24VDC	DI 8x24VDC	DI 16x24VDC
Product function			
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
Engineering with			
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher	STEP 7 V13 SP1 or higher	STEP 7 V13 SP1 or higher
• STEP 7 configurable/ integrated from version	From V5.5 SP4 Hotfix 3	V5.5 SP4 Hotfix 7 or higher	V5.5 SP4 Hotfix 7 or higher
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5	GSD as of Revision 5	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1	GSDML V2.3.1	GSDML V2.3.1
Supply voltage			
Load voltage 1L+			
• Rated value (DC)	24 V	24 V	24 V
• Reverse polarity protection	Yes; Against destruction; encoder power supply outputs applied with reversed polarity	Yes; Against destruction; encoder power supply outputs applied with reversed polarity	Yes; Against destruction; encoder power supply outputs applied with reversed polarity
Input current			
Current consumption (rated value) from load voltage 1L+ (unswitched voltage)	25 mA; without load 4 A; Maximum value	25 mA; without load 4 A; Maximum value	30 mA; without load 4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value	4 A; Maximum value	4 A; Maximum value
Encoder supply			
Number of outputs	8	4	8
Digital inputs			
Number of digital inputs	8	8	16
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes	Yes
Number of simultaneously controllable inputs			
all mounting positions			
- up to 55 °C, max.	8	8	16
Input voltage			
• Rated value (DC)	24 V	24 V	24 V
• for signal "0"	-30 to +5 V	-30 to +5 V	-30 to +5 V
• for signal "1"	+11 to +30V	+11 to +30V	+11 to +30V
Input current			
• for signal "1", typ.	3.2 mA	3.2 mA	3.2 mA
Encoder			
Connectable encoders			
• 2-wire sensor	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA	1.5 mA
Interrupts/diagnostics/ status information			
Alarms			
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
Diagnoses			
• Short-circuit	Yes; Sensor supply to M; module by module	Yes; Sensor supply to M; module by module	Yes; Sensor supply to M; module by module
Diagnostics indication LED			
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED
• for module diagnostics	Yes; green/red LED	Yes; green/red LED	Yes; green/red LED

Technical specifications

Article number	6ES7141-5BF00-0BA0 ET 200AL, DI 8x24VDC, 8xM8	6ES7141-5AF00-0BA0 ET 200AL, DI 8x24VDC, 4xM12	6ES7141-5AH00-0BA0 ET 200AL, DI 16x24VDC, 8xM12
Potential separation			
between the load voltages	Yes	Yes	Yes
Potential separation channels			
• between the channels	No	No	No
• between the channels and backplane bus	Yes	Yes	Yes
• between the channels and the power supply of the electronics	No	No	No
Degree and class of protection			
IP degree of protection	IP65/67	IP65/67	IP65/67
Standards, approvals, certificates			
Suitable for safety-related tripping of standard modules	Yes; From FS01	Yes; From FS01	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules			
• Performance level according to ISO 13849-1	PL d	PL d	PL d
• Category according to ISO 13849-1	Cat. 3	Cat. 3	Cat. 3
• SIL acc. to IEC 62061	SIL 2	SIL 2	SIL 2
Ambient conditions			
Ambient temperature during operation			
• min.	-30 °C	-30 °C	-30 °C
• max.	55 °C	55 °C	55 °C
connection method			
Design of electrical connection for the inputs and outputs	M8, 3-pole	M12, 5-pole	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole	M8, 4-pole	M8, 4-pole
ET-Connection			
• ET-Connection	M8, 4-pin, shielded	M8, 4-pin, shielded	M8, 4-pin, shielded
Dimensions			
Width	30 mm	30 mm	45 mm
Height	159 mm	159 mm	159 mm
Depth	40 mm	40 mm	40 mm
Weights			
Weight, approx.	145 g	145 g	184 g
Article number	6ES7142-5AF00-0BA0 ET 200AL, DQ 8x24VDC/2A, 8xM12	Article number	6ES7142-5AF00-0BA0 ET 200AL, DQ 8x24VDC/2A, 8xM12
General information		Load voltage 2L+	
Product type designation	DQ 8x24VDC/2A	• Rated value (DC)	24 V
Product function		• Reverse polarity protection	Yes; against destruction; load increasing
• I&M data	Yes; I&M0 to I&M3	Input current	
Engineering with		Current consumption (rated value)	40 mA; without load
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V13 SP1 or higher	from load voltage 1L+ (unswitched voltage)	4 A; Maximum value
• STEP 7 configurable/integrated from version	V5.5 SP4 Hotfix 7 or higher	from load voltage 2L+, max.	4 A; Maximum value
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5	Digital outputs	
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1	Number of digital outputs	8
Supply voltage		• in groups of	4; 2 load groups for 4 outputs each
Load voltage 1L+		Short-circuit protection	Yes; per channel, electronic
• Rated value (DC)	24 V	Limitation of inductive shutdown voltage to	2L+ (-47 V)
• Reverse polarity protection	Yes; against destruction; load increasing	Switching capacity of the outputs	
		• on lamp load, max.	10 W

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Digital I/O modules

Technical specifications

Article number	6ES7142-5AF00-0BA0 ET 200AL, DQ 8x24VDC/2A, 8xM12
Load resistance range	
• lower limit	12 Ω
• upper limit	4 kΩ
Output voltage	
• for signal "1", min.	L+ (-0.8 V)
Output current	
• for signal "1" rated value	2 A
• for signal "0" residual current, max.	0.5 mA
Switching frequency	
• with resistive load, max.	100 Hz
• with inductive load, max.	0.1 Hz; 0.25 Hz at 25 °C
• on lamp load, max.	1 Hz
Total current of the outputs	
• Current per group, max.	4 A; For inductive load max. 2 channels per group
Interrupts/diagnostics/ status information	
Substitute values connectable	Yes; channel by channel, parameterizable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Short-circuit	Yes; Outputs to ground; module by module
Diagnostics indication LED	
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red LED
• For load voltage monitoring	Yes; green LED
Potential separation	
between the load voltages	Yes
Potential separation channels	
• between the channels, in groups of	4
• between the channels and backplane bus	Yes
• between the channels and the power supply of the electronics	No; 4 channels are non-isolated and 4 channels are isolated from supply voltage 1L+

Article number	6ES7142-5AF00-0BA0 ET 200AL, DQ 8x24VDC/2A, 8xM12
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
connection method	
Design of electrical connection for the inputs and outputs	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	45 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	192 g

Article number	6ES7143-5BF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 8xM8	6ES7143-5AF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 4xM12	6ES7143-5AH00-0BA0 ET 200AL, DIQ 16x24VDC/0,5A, 8xM12
General information			
Product type designation	DIQ 4+DQ 4x24VDC/0.5A	DIQ 4+DQ 4x24VDC/0.5A	DIQ 16x24VDC/0.5A
Product function			
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
Engineering with			
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V13 SP1 or higher	STEP 7 V13 SP1 or higher	STEP 7 V14 or higher
• STEP 7 configurable/integrated from version	From V5.5 SP4 Hotfix 3	V5.5 SP4 Hotfix 7 or higher	V5.5 SP4 Hotfix 7 or higher
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5	GSD as of Revision 5	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1	GSDML V2.3.1	GSDML V2.3.1
Operating mode			
• DI			Yes
• Counter			Yes
• DQ			Yes

Technical specifications

Article number	6ES7143-5BF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 8xM8	6ES7143-5AF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 4xM12	6ES7143-5AH00-0BA0 ET 200AL, DIQ 16x24VDC/0,5A, 8xM12
Supply voltage			
Load voltage 1L+			
• Rated value (DC)	24 V	24 V	24 V
• Reverse polarity protection	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up
Load voltage 2L+			
• Rated value (DC)	24 V	24 V	24 V
• Reverse polarity protection	Yes; against destruction; load increasing	Yes; against destruction; load increasing	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up
Input current			
Current consumption (rated value)	40 mA; without load	40 mA; without load	75 mA; without load
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value	4 A; Maximum value	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value	4 A; Maximum value	4 A; Maximum value
Encoder supply			
Number of outputs	4	4	8
Digital inputs			
Number of digital inputs	4; Parameterizable as DIQ	4; Parameterizable as DIQ	16; Parameterizable as DIQ
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes	Yes
Number of simultaneously controllable inputs			
all mounting positions			
- up to 55 °C, max.	4	4	16
Digital input functions, parameterizable			
• Freely usable digital input			Yes
• Counter			Yes
Input voltage			
• Rated value (DC)	24 V	24 V	24 V
• for signal *0*	-3 to +5V	-3 to +5V	-3 to +5V
• for signal *1*	+11 to +30V	+11 to +30V	+11 to +30V
Input current			
• for signal *1*, typ.	3.2 mA	3.2 mA	3 mA
Input delay (for rated value of input voltage) for standard inputs			
- parameterizable			Yes
for technological functions			
- parameterizable			Yes
Digital outputs			
Number of digital outputs	8; 4 DQ fixed, 4 DIQ parameterizable	8; 4 DQ fixed, 4 DIQ parameterizable	16; Parameterizable as DIQ
• in groups of	4; 2 load groups for 4 outputs each	4; 2 load groups for 4 outputs each	8; 2 load groups for 8 outputs each
Short-circuit protection	Yes; per channel, electronic	Yes; per channel, electronic	Yes; per channel, electronic
Limitation of inductive shutdown voltage to	2L+ (-47 V)	2L+ (-47 V)	L+ (-53 V)
Digital output functions, parameterizable			
• Switching tripped by comparison values			Yes
• Freely usable digital output			Yes
Switching capacity of the outputs			
• on lamp load, max.	5 W	5 W	5 W
Load resistance range			
• lower limit	48 Ω	48 Ω	48 Ω
• upper limit	4 kΩ	4 kΩ	4 kΩ
Output voltage			
• for signal *1*, min.	L+ (-0.8 V)	L+ (-0.8 V)	L+ (-0.8 V)
Output current			
• for signal *1* rated value	0.5 A	0.5 A	0.5 A
• for signal *0* residual current, max.	0.5 mA	0.5 mA	0.5 mA

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**I/O modules > Digital I/O modules****Technical specifications**

Article number	6ES7143-5BF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 8xM8	6ES7143-5AF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 4xM12	6ES7143-5AH00-0BA0 ET 200AL, DIQ 16x24VDC/0,5A, 8xM12
Switching frequency			
• with resistive load, max.	100 Hz	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz	0.5 Hz
• on lamp load, max.	1 Hz	1 Hz	1 Hz
Total current of the outputs			
• Current per group, max.	2 A	2 A	4 A
Encoder			
Connectable encoders			
• 2-wire sensor	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA	1.5 mA
Interrupts/diagnostics/ status information			
Substitute values connectable	Yes; channel by channel, parameterizable	Yes; channel by channel, parameterizable	Yes; channel by channel, parameterizable
Alarms			
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable	Yes; Parameterizable
Diagnoses			
• Short-circuit	Yes; Outputs to M; encoder supply to M; module by module	Yes; Outputs to M; encoder supply to M; module by module	Yes; Outputs to M; encoder supply to M; module by module
Diagnostics indication LED			
• Channel status display	Yes; green LED	Yes; green LED	Yes; green LED
• for module diagnostics	Yes; green/red LED	Yes; green/red LED	Yes; green/red LED
• For load voltage monitoring	Yes; green LED	Yes; green LED	Yes; green LED
Potential separation			
between the load voltages	Yes	Yes	Yes
Potential separation channels			
• between the channels, in groups of	4; DIQ channels are isolated from DQ channels	4; DIQ channels are isolated from DQ channels	8
• between the channels and backplane bus	Yes	Yes	Yes
• between the channels and the power supply of the electronics	No; DIQ channels are non-isolated and DQ channels are isolated from supply voltage 1L+	No; DIQ channels are non-isolated and DQ channels are isolated from supply voltage 1L+	No; 8 channels are non-isolated and 8 channels are isolated from supply voltage 1L+
Degree and class of protection			
IP degree of protection	IP65/67	IP65/67	IP65/67
Standards, approvals, certificates			
Suitable for safety-related tripping of standard modules	Yes; From FS01	Yes; From FS01	
Highest safety class achievable for safety-related tripping of standard modules			
• Performance level according to ISO 13849-1	PL d	PL d	
• Category according to ISO 13849-1	Cat. 3	Cat. 3	
• SIL acc. to IEC 62061	SIL 2	SIL 2	
Ambient conditions			
Ambient temperature during operation			
• min.	-30 °C	-30 °C	-30 °C
• max.	55 °C	55 °C	55 °C

Technical specifications

Article number	6ES7143-5BF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 8xM8	6ES7143-5AF00-0BA0 ET 200AL, DIQ 4+DQ 4x24VDC/0,5A, 4xM12	6ES7143-5AH00-0BA0 ET 200AL, DIQ 16x24VDC/0,5A, 8xM12
connection method			
Design of electrical connection for the inputs and outputs	M8, 3-pole	M12, 5-pole	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole	M8, 4-pole	M8, 4-pole
ET-Connection			
• ET-Connection	M8, 4-pin, shielded	M8, 4-pin, shielded	M8, 4-pin, shielded
Dimensions			
Width	30 mm	30 mm	45 mm
Height	159 mm	159 mm	159 mm
Depth	40 mm	40 mm	40 mm
Weights			
Weight, approx.	145 g	145 g	195 g

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**I/O modules > Analog I/O modules****Overview**

- 30 mm wide module with parameters and diagnostic functions
- For connecting analog actuators and sensors without additional amplifiers
- 4-channel analog input modules with M12 connection
- 4-channel analog output module with M12 connection

Ordering data**Article No.****Article No.****Analog input modules**

AI 4xU/I/RTD, 4xM12

6ES7144-5KD00-0BA0

AI 4xRTD/TC, 4xM12

6ES7144-5KD50-0BA0

AQ 4xU/I, 4xM12

6ES7145-5ND00-0BA0**Accessories****Bus cable for backplane bus (ET connection)**

4-pin, shielded

Pre-assembled at both ends,
2 M8 connectors

0.19 m

6ES7194-2LH02-0AA0

0.3 m

6ES7194-2LH03-0AA0

1 m

6ES7194-2LH10-0AA0

2 m

6ES7194-2LH20-0AA0

5 m

6ES7194-2LH50-0AA0

10 m

6ES7194-2LN10-0AA0

15 m

6ES7194-2LN15-0AA0Pre-assembled at both ends,
2 M8 connectors, angled

0.3 m

6ES7194-2LH03-0AB0

1 m

6ES7194-2LH10-0AB0

2 m

6ES7194-2LH20-0AB0

5 m

6ES7194-2LH50-0AB0

10 m

6ES7194-2LN10-0AB0

15 m

6ES7194-2LN15-0AB0Pre-assembled at one end,
1 M8 connector

2 m

6ES7194-2LH20-0AC0

5 m

6ES7194-2LH50-0AC0

10 m

6ES7194-2LN10-0AC0

15 m

6ES7194-2LN15-0AC0**Power cable M8**

4-pin

Pre-assembled at both ends,
M8 connector and M8 socket

0.19 m

6ES7194-2LH02-1AA0

0.3 m

6ES7194-2LH03-1AA0

1 m

6ES7194-2LH10-1AA0

2 m

6ES7194-2LH20-1AA0

5 m

6ES7194-2LH50-1AA0

10 m

6ES7194-2LN10-1AA0

15 m

6ES7194-2LN15-1AA0Pre-assembled at both ends,
angled M8 connector and angled
M8 socket

0.3 m

6ES7194-2LH03-1AB0

1 m

6ES7194-2LH10-1AB0

2 m

6ES7194-2LH20-1AB0

5 m

6ES7194-2LH50-1AB0

10 m

6ES7194-2LN10-1AB0

15 m

6ES7194-2LN15-1AB0Pre-assembled at one end,
M8 socket

2 m

6ES7194-2LH20-1AC0

5 m

6ES7194-2LH50-1AC0

10 m

6ES7194-2LN10-1AC0

15 m

6ES7194-2LN15-1AC0**M8 connector for ET connection****6ES7194-2AB00-0AA0**

4-pin, shielded

M8 power connector

Male contact insert, 4-pin

6ES7194-2AA00-0AA0

Female contact insert, 4-pin

6ES7194-2AC00-0AA0**ET connection FastConnect stripping tool****6ES7194-2KA00-0AA0**Stripping tool for stripping the
ET connection bus cable**Labels****6ES7194-2BA00-0AA0**10 x 5 mm, RAL 9016;
5 frames with 40 labels each

Technical specifications

Article number	6ES7144-5KD00-0BA0 ET 200AL, AI 4xU/I/RTD, 4xM12	6ES7144-5KD50-0BA0 ET 200AL, AI 4xRTD/TC, 4xM12
General information		
Product type designation	AI 4xU/I/RTD	AI 4xRTD/TC
Product function		
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher	STEP 7 V16 or higher
• STEP 7 configurable/ integrated from version	From V5.5 SP4 Hotfix 3	V5.5 SP4 and higher
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1	GSDML V2.34
Supply voltage		
Load voltage 1L+		
• Rated value (DC)	24 V	24 V
• Reverse polarity protection	Yes; against destruction	Yes; against destruction
Input current		
Current consumption (rated value)	35 mA; without load	25 mA; without load
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value	4 A; Maximum value
Encoder supply		
Number of outputs	4	
Analog inputs		
Number of analog inputs	4	4
• For current measurement	4	
• For voltage measurement	4	4
• For resistance/resistance thermometer measurement	4	4
• For thermocouple measurement		4
permissible input voltage for voltage input (destruction limit), max.	30 V	15 V
permissible input current for current input (destruction limit), max.	50 mA	
Constant measurement current for resistance-type transmitter, typ.		230 ... 300 µA
Cycle time (all channels), min.	8 ms	90 ms
Technical unit for temperature measurement adjustable	Yes; Degrees Celsius / degrees Fahrenheit / Kelvin	Yes; Degrees Celsius / degrees Fahrenheit / Kelvin
Input ranges (rated values), voltages		
• 0 to +10 V	Yes	
• 1 V to 5 V	Yes	
• -80 mV to +80 mV		Yes; 16 bit incl. sign
Input ranges (rated values), currents		
• 0 to 20 mA	Yes	
• 4 mA to 20 mA	Yes	

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**I/O modules > Analog I/O modules****Technical specifications**

Article number	6ES7144-5KD00-0BA0 ET 200AL, AI 4xU/I/RTD, 4xM12	6ES7144-5KD50-0BA0 ET 200AL, AI 4xRTD/TC, 4xM12
Input ranges (rated values), thermocouples		
<ul style="list-style-type: none"> • Type B • Type C • Type E • Type J • Type K • Type L • Type N • Type R • Type S • Type T • Type U 		Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign Yes; 16 bit incl. sign
Input ranges (rated values), resistance thermometer		
<ul style="list-style-type: none"> • Ni 100 • Ni 1000 • Pt 100 • Pt 1000 	Yes; Standard/climate Yes; Standard/climate	Yes; Standard/climate Yes; Standard/climate Yes; Standard/climate Yes; Standard/climate
Input ranges (rated values), resistors		
<ul style="list-style-type: none"> • 0 to 150 ohms • 0 to 300 ohms 	Yes Yes	Yes Yes
Thermocouple (TC)		
Temperature compensation - parameterizable		Yes
Cable length		
<ul style="list-style-type: none"> • shielded, max. 	30 m	30 m
Analog value generation for the inputs		
Integration and conversion time/resolution per channel		
<ul style="list-style-type: none"> • Resolution with overrange (bit including sign), max. • Integration time, parameterizable • Integration time (ms) • Basic conversion time, including integration time (ms) • Interference voltage suppression for interference frequency f1 in Hz • Conversion time (per channel) 	16 bit Yes; channel by channel 0,3 / 16,7 / 20 / 60 3 600 / 60 / 50 / 16.7 2 / 18 / 21 / 61 ms	16 bit Yes; channel by channel 16.7 / 20 / 60 18 / 21 / 61 ms 60 / 50 / 16.7
Smoothing of measured values		
<ul style="list-style-type: none"> • parameterizable 	Yes	Yes
Encoder		
Connection of signal encoders		
<ul style="list-style-type: none"> • for voltage measurement • for current measurement as 2-wire transducer • for current measurement as 4-wire transducer • for resistance measurement with two-wire connection • for resistance measurement with three-wire connection • for resistance measurement with four-wire connection 	Yes Yes Yes Yes Yes Yes	Yes Yes Yes Yes

Technical specifications

Article number	6ES7144-5KD00-0BA0 ET 200AL, AI 4xU/I/RTD, 4xM12	6ES7144-5KD50-0BA0 ET 200AL, AI 4xRTD/TC, 4xM12
Errors/accuracies		
Temperature error of internal compensation		±4 °C
Basic error limit (operational limit at 25 °C)		
• Voltage, relative to input range, (+/-)	0.25 %	0.25 %
• Current, relative to input range, (+/-)	0.25 %	
• Resistance, relative to input range, (+/-)	0.15 %	0.15 %
• Resistance thermometer, relative to input range, (+/-)	0.15 %	0.15 %
• Thermocouple, relative to input range, (+/-)		0.25 %
Interference voltage suppression for $f = n \times (f1 \pm 0.5 \%)$, $f1 = \text{interference frequency}$		
• Series mode interference (peak value of interference < rated value of input range), min.	40 dB	40 dB
Interrupts/diagnostics/status information		
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable
• Limit value alarm	Yes; Parameterizable	Yes; Parameterizable
Diagnoses		
• Wire-break	Yes; at 4 mA to 20 mA and 1 V to 5 V	Yes; Not for ±80 mV
• Short-circuit	Yes; Encoder supply to M, channel by channel	
• Overflow/underflow	Yes	Yes
Diagnostics indication LED		
• Channel status display	Yes; green LED	Yes; green LED
• for module diagnostics	Yes; green/red LED	Yes; green/red LED
Potential separation		
between the load voltages	Yes	Yes
Potential separation channels		
• between the channels	No	No
• between the channels and backplane bus	Yes	Yes
• between the channels and the power supply of the electronics	No	No
Degree and class of protection		
IP degree of protection	IP65/67	IP65/67
Standards, approvals, certificates		
Suitable for safety-related tripping of standard modules	Yes; From FS02	Yes; From FS01
Suitable for applications according to AMS 2750		Yes; Declaration of Conformity, see online support entry 109757262
Suitable for applications according to CQI-9		Yes; Based on AMS 2750 E

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Analog I/O modules

Technical specifications

Article number	6ES7144-5KD00-0BA0 ET 200AL, AI 4xU/I/RTD, 4xM12	6ES7144-5KD50-0BA0 ET 200AL, AI 4xRTD/TC, 4xM12
Highest safety class achievable for safety-related tripping of standard modules		
• Performance level according to ISO 13849-1	PL d	PL d
• Category according to ISO 13849-1	Cat. 3	Cat. 3
• SIL acc. to IEC 62061	SIL 2	SIL 2
Ambient conditions		
Ambient temperature during operation		
• min.	-30 °C	-30 °C
• max.	55 °C	55 °C
connection method		
Design of electrical connection for the inputs and outputs	M12, 5-pole	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole	M8, 4-pole
ET-Connection		
• ET-Connection	M8, 4-pin, shielded	M8, 4-pin, shielded
Dimensions		
Width	30 mm	30 mm
Height	159 mm	159 mm
Depth	40 mm	40 mm
Weights		
Weight, approx.	168 g	168 g

Article number	6ES7145-5ND00-0BA0 ET 200AL, AQ 4xU/I, 4xM12
General information	
Product type designation	AQ 4xU/I
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V14 or higher
• STEP 7 configurable/ integrated from version	V5.5 SP4 Hotfix 7 or higher
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; Against destruction; actuator power supply outputs applied with reversed polarity
Input current	
Current consumption (rated value)	110 mA; without load
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Actuator supply	
Number of outputs	4

Article number	6ES7145-5ND00-0BA0 ET 200AL, AQ 4xU/I, 4xM12
Analog outputs	
Number of analog outputs	4
Voltage output, short-circuit protection	Yes
Voltage output, short-circuit current, max.	24 mA
Current output, no-load voltage, max.	15 V
Cycle time (all channels) max.	1 ms
Output ranges, voltage	
• 0 to 10 V	Yes; 15 bit
• 1 V to 5 V	Yes; 14 bit
• -10 V to +10 V	Yes; 16 bit incl. sign
Output ranges, current	
• 0 to 20 mA	Yes; 15 bit
• -20 mA to +20 mA	Yes; 16 bit incl. sign
• 4 mA to 20 mA	Yes; 14 bit
Connection of actuators	
• for voltage output two-wire connection	Yes
• for voltage output four-wire connection	Yes
• for current output two-wire connection	Yes
• for current output four-wire connection	Yes

10

Technical specifications

Article number	6ES7145-5ND00-0BA0 ET 200AL, AQ 4xU/I, 4xM12
Load impedance (in rated range of output)	
• with voltage outputs, min.	1 kΩ
• with voltage outputs, capacitive load, max.	1 μF
• with current outputs, max.	500 Ω
• with current outputs, inductive load, max.	1 mH
Cable length	
• shielded, max.	30 m
Analog value generation for the outputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
Settling time	
• for resistive load	1 ms
• for capacitive load	1 ms
• for inductive load	1 ms
Errors/accuracies	
Basic error limit (operational limit at 25 °C)	
• Voltage, relative to output range, (+/-)	0.15 %
• Current, relative to output range, (+/-)	0.15 %
Interrupts/diagnostics/status information	
Substitute values connectable	Yes; channel by channel, parameterizable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Wire-break	Yes; channel-by-channel, only for output type "current"
• Short-circuit	Yes; Actuator supply module by module; channel by channel for output type "voltage"
Diagnostics indication LED	
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red LED

Article number	6ES7145-5ND00-0BA0 ET 200AL, AQ 4xU/I, 4xM12
Potential separation	
between the load voltages	Yes
Potential separation channels	
• between the channels	No
• between the channels and backplane bus	Yes
• between the channels and the power supply of the electronics	No
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; from FS04
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
connection method	
Design of electrical connection for the inputs and outputs	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	30 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	175 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Fail-safe I/O modules

Overview



The ET 200AL fail-safe I/O module expands the ET 200AL PN system family. It is incorporated seamlessly into the Safety Integrated concept of SIMATIC. It also supports safety-related communication via PROFIsafe. The functional safety is certified in accordance with IEC 61508. It is designed for safety-related use up to SIL 3 according to IEC 62061 and PL e according to ISO 13849. The following fail-safe I/O module with 4x digital inputs and 2x digital outputs with 45 mm width is available:

- F-DI 4+F-DQ 2x24VDC/2A, 4xM12 PROFIsafe

Ordering data

Fail-safe digital input/output modules

F-DI 4+F-DQ 2x24VDC/2A, 4xM12

Article No.

6ES7146-5FF00-0BA0

Accessories

M12 Y-cable

For connection of single-channel sensors (1oo1 evaluation), 5-pin

6ES7194-6KB00-0XA0

For joint connection of an F-DQ and an F-DI channel by means of an 8-pin M12 socket

6ES7194-6KC00-0XA0

E-coding plug (metal) for fail-safe ET 200 distributed I/O, IP65/67

6ES7194-6KB01-0AA0

Bus cable for backplane bus (ET connection)

4-pin, shielded

Pre-assembled at both ends, 2 M8 plugs

0.19 m

6ES7194-2LH02-0AA0

0.3 m

6ES7194-2LH03-0AA0

1 m

6ES7194-2LH10-0AA0

2 m

6ES7194-2LH20-0AA0

5 m

6ES7194-2LH50-0AA0

10 m

6ES7194-2LN10-0AA0

15 m

6ES7194-2LN15-0AA0

Pre-assembled at both ends, 2 M8 plugs, angled

0.3 m

6ES7194-2LH03-0AB0

1 m

6ES7194-2LH10-0AB0

2 m

6ES7194-2LH20-0AB0

5 m

6ES7194-2LH50-0AB0

10 m

6ES7194-2LN10-0AB0

15 m

6ES7194-2LN15-0AB0

Pre-assembled at one end, 1 M8 plug

2 m

6ES7194-2LH20-0AC0

5 m

6ES7194-2LH50-0AC0

10 m

6ES7194-2LN10-0AC0

15 m

6ES7194-2LN15-0AC0

M8 power cable

4-pin

Pre-assembled at both ends, M8 plug and M8 socket

0.19 m

6ES7194-2LH02-1AA0

0.3 m

6ES7194-2LH03-1AA0

1 m

6ES7194-2LH10-1AA0

2 m

6ES7194-2LH20-1AA0

5 m

6ES7194-2LH50-1AA0

10 m

6ES7194-2LN10-1AA0

15 m

6ES7194-2LN15-1AA0

Pre-assembled at both ends, angled M8 plug and angled M8 socket

0.3 m

6ES7194-2LH03-1AB0

1 m

6ES7194-2LH10-1AB0

2 m

6ES7194-2LH20-1AB0

5 m

6ES7194-2LH50-1AB0

10 m

6ES7194-2LN10-1AB0

15 m

6ES7194-2LN15-1AB0

Pre-assembled at one end, M8 socket

2 m

6ES7194-2LH20-1AC0

5 m

6ES7194-2LH50-1AC0

10 m

6ES7194-2LN10-1AC0

15 m

6ES7194-2LN15-1AC0

M8 plug for ET connection

6ES7194-2AB00-0AA0

4-pin, shielded

M8 power connector

Male contact insert, 4-pin

6ES7194-2AA00-0AA0

Female contact insert, 4-pin

6ES7194-2AC00-0AA0

ET connection FastConnect stripping tool

6ES7194-2KA00-0AA0

Stripping tool for stripping the ET connection bus cable

Labels, yellow

6ES7194-2BB00-0AA0

10 x 5 mm; 5 frames with 40 labels each

Technical specifications

Article number	6ES7146-5FF00-0BA0 ET 200AL, F-DI 4+F-DQ 2x24VDC/2A, 4xM12
General information	
Product type designation	F-DI 4+F-DQ 2x24VDC/2A, 4xM12
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V17 or higher
Operating mode	
• DI	Yes
• DQ	Yes
Supply voltage	
Rated value (DC)	24 V
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Load voltage 2L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction; outputs applied with reversed polarity for loads connected between M-switch and 2L+ will conduct
Input current	
Current consumption (rated value)	55 mA (1L+) / 40 mA (2L+); without load
from load voltage 1L+ (unswitched voltage)	4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Encoder supply	
Number of outputs	2
Digital inputs	
Number of digital inputs	4
Input characteristic according to IEC 61131	Type 1
Number of simultaneously controllable inputs	
all mounting positions	
- up to 55 °C, max.	4
Input voltage	
• Rated value (DC)	24 V
• for signal "0"	-30 to +5 V
• for signal "1"	+15 to +30 V
Input current	
• for signal "1", typ.	4.85 mA
Input delay (for rated value of input voltage)	
for standard inputs	
- parameterizable	Yes
Digital outputs	
Number of digital outputs	2
• in groups of	2
Short-circuit protection	Yes; per channel, electronic
Open-circuit detection	Yes; per channel, only detects when output is off
Overload protection	Yes
Limitation of inductive shutdown voltage to	P-switch: -26 V DC referenced to 2M, M-switch: +48 V DC referenced to 2M

Article number	6ES7146-5FF00-0BA0 ET 200AL, F-DI 4+F-DQ 2x24VDC/2A, 4xM12
Switching capacity of the outputs	
• on lamp load, max.	10 W
Load resistance range	
• lower limit	12 Ω
• upper limit	2 kΩ
Output voltage	
• for signal "1", min.	L+ (-2.0 V), P-switch is L+ (-1.5 V), M-switch is 0.5 V
Output current	
• for signal "1" rated value	2 A
• for signal "0" residual current, max.	0.5 mA
Switching frequency	
• with resistive load, max.	30 Hz
• with inductive load, max.	0.1 Hz
• on lamp load, max.	10 Hz
Total current of the outputs	
• Current per group, max.	4 A
Encoder	
Connectable encoders	
• 2-wire sensor	No
- permissible quiescent current (2-wire sensor), max.	0.5 mA
Interrupts/diagnostics/ status information	
Substitute values connectable	No
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; outputs when off
• Short-circuit	Yes; inputs, outputs, encoder supply
Diagnostics indication LED	
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• for module diagnostics	Yes; green/red LED
• For load voltage monitoring	Yes; green LED
Potential separation	
between the load voltages	Yes
Potential separation channels	
• between the channels, in groups of	4 DI channels are isolated from 2 DQ channels
• between the channels and backplane bus	Yes
• between the channels and the power supply of the electronics	DI channels are non-isolated from supply voltage 1L+ and DQ channels are isolated from the supply voltage 1L+
Degree and class of protection	
IP degree of protection	IP65/67

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

I/O modules > Fail-safe I/O modules**Technical specifications**

Article number	6ES7146-5FF00-0BA0 ET 200AL, F-DI 4+F-DQ 2x24VDC/2A, 4xM12
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
<ul style="list-style-type: none"> Performance level according to ISO 13849-1 SIL acc. to IEC 61508 	PLd (DI single-channel), PLe (DI two-channel, DQ) SIL 2 (DI single-channel), SIL 3 (DI two-channel, DQ)
Ambient conditions	
Ambient temperature during operation	
<ul style="list-style-type: none"> min. max. 	-30 °C 55 °C

Article number	6ES7146-5FF00-0BA0 ET 200AL, F-DI 4+F-DQ 2x24VDC/2A, 4xM12
connection method	
Design of electrical connection for the inputs and outputs	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pin
ET-Connection	
<ul style="list-style-type: none"> ET-Connection 	M8, 4-pin, shielded
Dimensions	
Width	45 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	220 g

Overview



- 30 mm wide CM IO-Link communications module
- For the connection of up to 4 IO-Link devices according to IO-Link Specification V1.0 and V1.1 and port Class B
- The IO-Link parameters are configured using the S7-PCT Port Configuration Tool, V3.2 and higher.

Ordering data

CM IO-Link

CM 4X IO-Link, 4XM12;
for the connection of up to
4 IO-Link devices
according to IO-Link Specification
V1.0 and V1.1 and port Class B

Article No.

6ES7147-5JD00-0BA0

Accessories

Bus cable for backplane bus
(ET connection)

4-pin, shielded

Pre-assembled at both ends,
2 M8 connectors

0.19 m

6ES7194-2LH02-0AA0

0.3 m

6ES7194-2LH03-0AA0

1 m

6ES7194-2LH10-0AA0

2 m

6ES7194-2LH20-0AA0

5 m

6ES7194-2LH50-0AA0

10 m

6ES7194-2LN10-0AA0

15 m

6ES7194-2LN15-0AA0

Pre-assembled at both ends,
2 M8 connectors, angled

0.3 m

6ES7194-2LH03-0AB0

1 m

6ES7194-2LH10-0AB0

2 m

6ES7194-2LH20-0AB0

5 m

6ES7194-2LH50-0AB0

10 m

6ES7194-2LN10-0AB0

15 m

6ES7194-2LN15-0AB0

Pre-assembled at one end,
1 M8 connector

2 m

6ES7194-2LH20-0AC0

5 m

6ES7194-2LH50-0AC0

10 m

6ES7194-2LN10-0AC0

15 m

6ES7194-2LN15-0AC0

Article No.

Power cable M8

4-pin

Pre-assembled at both ends,
M8 connector and M8 socket

0.19 m

6ES7194-2LH02-1AA0

0.3 m

6ES7194-2LH03-1AA0

1 m

6ES7194-2LH10-1AA0

2 m

6ES7194-2LH20-1AA0

5 m

6ES7194-2LH50-1AA0

10 m

6ES7194-2LN10-1AA0

15 m

6ES7194-2LN15-1AA0

Pre-assembled at both ends,
angled M8 connector and angled
M8 socket

0.3 m

6ES7194-2LH03-1AB0

1 m

6ES7194-2LH10-1AB0

2 m

6ES7194-2LH20-1AB0

5 m

6ES7194-2LH50-1AB0

10 m

6ES7194-2LN10-1AB0

15 m

6ES7194-2LN15-1AB0

Pre-assembled at one end,
M8 socket

2 m

6ES7194-2LH20-1AC0

5 m

6ES7194-2LH50-1AC0

10 m

6ES7194-2LN10-1AC0

15 m

6ES7194-2LN15-1AC0

M8 connector for ET connection

6ES7194-2AB00-0AA0

4-pin, shielded

M8 power connector

Male contact insert, 4-pin

6ES7194-2AA00-0AA0

Female contact insert, 4-pin

6ES7194-2AC00-0AA0

ET connection FastConnect
stripping tool

6ES7194-2KA00-0AA0

Stripping tool for stripping the
ET connection bus cable

Labels

6ES7194-2BA00-0AA0

10 x 5 mm, RAL 9016;
5 frames with 40 labels each

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**I/O modules > Communication > CM IO-Link****Technical specifications**

Article number	6ES7147-5JD00-0BA0 ET 200AL, CM 4x IO-Link, 4xM12
General information	
Product type designation	CM 4x IO-Link
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V13 SP1 or higher
• STEP 7 configurable/ integrated from version	From V5.5 SP4 Hotfix 3
• PROFIBUS from GSD version/ GSD revision	GSD as of Revision 5
• PROFINET from GSD version/ GSD revision	GSDML V2.3.1
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
Load voltage 2L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction; load increasing
Input current	
Current consumption (rated value) from load voltage 1L+ (unswitched voltage)	40 mA; without load 4 A; Maximum value
from load voltage 2L+, max.	4 A; Maximum value
Encoder supply	
Number of outputs	4
IO-Link	
Number of ports	4
• of which simultaneously controllable	4
IO-Link protocol 1.0	Yes
IO-Link protocol 1.1	Yes
Transmission rate	4.8 kBaud (COM1); 38.4 kBaud (COM2), 230 kBaud (COM3)
Size of process data, input per port	32 byte
Size of process data, input per module	132 byte
Size of process data, output per port	32 byte
Size of process data, output per module	128 byte
Memory size for device parameter Master backup	2 kbyte; for each port Possible with function block IO_LINK_MASTER
Configuration without S7-PCT	Possible; autostart/manual function
Cable length unshielded, max.	20 m
Operating modes	
• IO-Link	Yes
• DI	Yes
• DQ	Yes; max. 100 mA
Connection of IO-Link devices	
• Port type A	Yes; via 3-core cable
• Port type B	Yes; Additional device supply: 1.6 A total current of all ports

Article number	6ES7147-5JD00-0BA0 ET 200AL, CM 4x IO-Link, 4xM12
Interrupts/diagnostics/ status information	
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Monitoring the supply voltage	Yes
• Wire-break	Yes
• Short-circuit	Yes
Diagnostics indication LED	
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red LED
• For load voltage monitoring	Yes; green LED
Potential separation	
between the load voltages	Yes
Potential separation channels	
• between the channels	No
• between the channels and backplane bus	Yes
• between the channels and the power supply of the electronics	No
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SILCL according to IEC 62061	SILCL 2
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
connection method	
Design of electrical connection for the inputs and outputs	M12, 5-pole
Design of electrical connection for supply voltage	M8, 4-pole
ET-Connection	
• ET-Connection	M8, 4-pin, shielded
Dimensions	
Width	30 mm
Height	159 mm
Depth	40 mm
Weights	
Weight, approx.	145 g

Overview



The IO-Link communication standard enables and standardizes communication between machine and plant PLCs, on the one hand, and sensors, actuators and other field devices, on the other hand.

The IO-Link I/O modules enable the simple connection of binary standard sensors and actuators, whereby the signals and energy supply are transferred via IO-Link (IO-Link master).

The IO-Link I/O modules can be connected to any IO-Link masters and, in this way, fieldbus-independent and distributed I/O units can be formed. The universal usage of the IO-Link DIQ I/O modules enables additional flexibility here.

With the ET 200AL IO-Link I/O modules, a comprehensive portfolio of digital input, output and input/output modules with the design and system features of the ET 200AL is available.

Ordering data

IO-Link digital input modules

- Degree of protection IP67
- DI 8x 24VDC, 8x M8
 - DI 16x 24VDC, 8x M12

6ES7141-5BF00-0BLO
6ES7141-5AH00-0BLO

IO-Link digital output modules

- Degree of protection IP67
- DQ 8x 24VDC/2A, 8x M12

6ES7142-5AF00-0BLO

IO-Link digital input/output modules

- Degree of protection IP67
- DIQ 4+DQ 4x 24VDC/0.5A, 8x M8
 - DIQ 16x24VDC/0.5A, 8x M12

6ES7143-5BF00-0BLO
6ES7143-5AH00-0BLO

Accessories

- Control connecting cable 5 x 0.25**
- Flexible IO-Link cable with 5 copper cores (0.25 mm²) for connecting IO-Link sensors/actuators (IO-Link port class B);
sold by the meter;
max. delivery unit 1 000 m
minimum order quantity 20 m

6XV1801-2C

M12 circular connector

- Can be assembled, for connecting actuators or sensors, 5-pin, screw terminal, max. 0.75 mm², A-coded, max. 4 A
- Straight
 - Angled

3RK1902-4BA00-5AA0
3RK1902-4DA00-5AA0

Control line

- Preassembled on one side with 1 x M12 plug angled, 5-pin, 5 x 0.34 mm², A-coded, max. 4 A, PUR casing, black
- 1.5 m
 - 5 m
 - 10 m

3RK1902-4HB15-5AA0
3RK1902-4HB50-5AA0
3RK1902-4HC01-5AA0

Article No.

M12-180/M12-180 control connecting cable

Flexible 5-core cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket, both ends with a straight cable outlet, for connection of IO-Link sensors/actuators

- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m

6XV1801-2CE50
6XV1801-2CH10
6XV1801-2CH15
6XV1801-2CH20
6XV1801-2CH30
6XV1801-2CH50
6XV1801-2CN10
6XV1801-2CN15

Power M12 cable connector PRO

Connection socket for 24 V DC supply voltage, 4-pin, L-coded, with installation instructions, 1 unit

6GK1906-0EB00

M12 sealing cap

For protection of unused M12 connections with ET 200pro

3RX9802-0AA00

M12 sealing cap for IP67 modules

15 mm outer diameter, with O-ring, 10 units

3RK1901-1KA00

M8 sealing cap

For IP67 modules

3RK1901-1PN00

M12 Y-cable

For double connection of I/O by means of a single cable to ET 200, 5-pin

6ES7194-6KA00-0XA0

Energy cable 4 x 1.5

Trailable power cable, with 4 copper cores (1.5 mm²) for connecting to M12 plug-in connector;
sold by the meter;
max. delivery unit 1000 m,
minimum order quantity 20 m

6XV1801-2B

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

IO-Link I/O modules

Ordering data

M12-180/M12-180

M12 power connecting cable

Flexible 4-core power connecting cable, preassembled with L-coded, 4-pin M12 plug and L-coded, 4-pin M12 socket to supply terminal devices with 24 V DC

Length:

- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m

Article No.

6XV1801-6DE50
6XV1801-6DH10
6XV1801-6DH15
6XV1801-6DH20
6XV1801-6DH30
6XV1801-6DH50
6XV1801-6DN10
6XV1801-6DN15

Article No.

M12-90/M12-90

M12 power connecting cable

Flexible 4-core power connecting cable, preassembled with L-coded, 4-pin M12 plug and L-coded, 4-pin M12 socket, both sides angled 90°, to supply terminal devices with 24 V DC

Length:

- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m

Labels

10 x 5 mm, RAL 9016;
5 frames with 40 labels each

6XV1801-6GE50
6XV1801-6GH10
6XV1801-6GH15
6XV1801-6GH20
6XV1801-6GH30
6XV1801-6GH50
6XV1801-6GN10
6XV1801-6GN15

6ES7194-2BA00-0AA0

Technical specifications

Article number	6ES7141-5BF00-0BL0 ET 200AL, IO-Link, DI 8x24VDC, 8xM8	6ES7141-5AH00-0BL0 ET 200AL, IO-Link, DI 16x24VDC, 8xM12
General information		
Product type designation	IO-Link DI 8x24VDC	IO-Link DI 16x24VDC
Engineering with		
• IODD file	Yes	Yes
Supply voltage		
Load voltage 1L+		
• Rated value (DC)	24 V; Supply from 1Us+ of the IO-Link master	24 V; Supply from 1Us+ of the IO-Link master
• Reverse polarity protection	Yes; Against destruction; encoder power supply outputs applied with reversed polarity	Yes; Against destruction; encoder power supply outputs applied with reversed polarity
Input current		
Current consumption (rated value)	15 mA; without load	20 mA; without load
Encoder supply		
Number of outputs	8; Supply from 1Us+ of the IO-Link master	8; Supply from 1Us+ of the IO-Link master
Digital inputs		
Number of digital inputs	8	16
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes
Number of simultaneously controllable inputs		
all mounting positions		
- up to 55 °C, max.	8	16
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal *0*	-30 to +5 V	-30 to +5 V
• for signal *1*	+11 to +30V	+11 to +30V
Input current		
• for signal *1*, typ.	3 mA	3 mA
Encoder		
Connectable encoders		
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA

Technical specifications

Article number	6ES7141-5BF00-0BL0 ET 200AL, IO-Link, DI 8x24VDC, 8xM8	6ES7141-5AH00-0BL0 ET 200AL, IO-Link, DI 16x24VDC, 8xM12
IO-Link		
IO-Link protocol 1.1	Yes	Yes
Transmission rate	38.4 kBd (COM2)	38.4 kBd (COM2)
Cycle time, min.	2.1 ms	2.5 ms
Size of process data, input per module	1 byte	2 byte
Size of process data, output per module	0 byte	0 byte
Supported IO-Link profiles	common profile	common profile
Cable length unshielded, max.	20 m	20 m
Connection of IO-Link devices		
• Port type A	Yes	Yes
Interrupts/diagnostics/status information		
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable
Diagnoses		
• Short-circuit	Yes; Sensor supply to M; module by module	Yes; Sensor supply to M; module by module
Diagnostics indication LED		
• Channel status display	Yes; green LED	Yes; green LED
• for module diagnostics	Yes; green/red LED	Yes; green/red LED
Potential separation		
Potential separation channels		
• between the channels	No	No
• between the channels and the power supply of the electronics	No	No
Degree and class of protection		
IP degree of protection	IP65/67	IP65/67
Ambient conditions		
Ambient temperature during operation		
• min.	-30 °C	-30 °C
• max.	55 °C	55 °C
connection method		
Design of electrical connection for the inputs and outputs	M8, 3-pole	M12, 5-pin, A-coded
Type of electrical connection for IO-Link	M12, 5-pin, A-coded	M12, 5-pin, A-coded
Dimensions		
Width	30 mm	45 mm
Height	159 mm	159 mm
Depth	40 mm	40 mm
Weights		
Weight, approx.	124 g	155 g

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**IO-Link I/O modules****Technical specifications**

Article number	6ES7142-5AF00-0BL0 ET 200AL, IO-Link, DQ 8x24VDC/2A, 8xM12
General information	
Product type designation	IO-Link DQ 8x24VDC/2A
Engineering with	
• IODD file	Yes
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V; Supply from 1Us+ of the IO-Link master
• Reverse polarity protection	Yes; against destruction
Load voltage 2L+	
• Rated value (DC)	24 V; Supply via M12 connector L-coded
• Reverse polarity protection	Yes; against destruction; load increasing
Input current	
Current consumption (rated value) from load voltage 2L+, max.	12 mA; without load 8 A; Maximum value
Digital outputs	
Number of digital outputs	8
Short-circuit protection	Yes; per channel, electronic
Limitation of inductive shutdown voltage to	2L+ (-47 V)
Switching capacity of the outputs	
• on lamp load, max.	10 W
Load resistance range	
• lower limit	12 Ω
• upper limit	4 kΩ
Output voltage	
• for signal *1*, min.	L+ (-0.8 V)
Output current	
• for signal *1* rated value	2 A (45 °C); 1 A (55 °C)
• for signal *0* residual current, max.	0.5 mA
Switching frequency	
• with resistive load, max.	100 Hz
• with inductive load, max.	0.1 Hz; 0.25 Hz at 25 °C
• on lamp load, max.	1 Hz
Total current of the outputs	
• Current per module, max.	8 A
IO-Link	
IO-Link protocol 1.1	Yes
Transmission rate	38.4 kBd (COM2)
Cycle time, min.	2.1 ms
Size of process data, input per module	0 byte
Size of process data, output per module	1 byte
Supported IO-Link profiles	common profile
Cable length unshielded, max.	20 m
Connection of IO-Link devices	
• Port type A	Yes

Article number	6ES7142-5AF00-0BL0 ET 200AL, IO-Link, DQ 8x24VDC/2A, 8xM12
Interrupts/diagnostics/status information	
Substitute values connectable	Yes; channel by channel, parameterizable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
Diagnoses	
• Short-circuit	Yes; Outputs to ground; module by module
Diagnostics indication LED	
• Channel status display	Yes; green LED
• for module diagnostics	Yes; green/red LED
• For load voltage monitoring	Yes; green LED
Potential separation	
between the load voltages	Yes
Potential separation channels	
• between the channels	No
• between the channels and the power supply of the electronics	Yes
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C
• max.	55 °C
connection method	
Design of electrical connection for the inputs and outputs	M12, 5-pin, A-coded
Type of electrical connection for IO-Link	M12, 5-pin, A-coded
Design of electrical connection for supply voltage	M12, 4-pin, L-coded
Dimensions	
Width	45 mm
Height	159 mm
Depth	45 mm
Weights	
Weight, approx.	168 g

Technical specifications

Article number	6ES7143-5BF00-0BL0 ET 200AL, IO-Link, DIQ 4+DQ 4x24VDC/0,5A	6ES7143-5AH00-0BL0 ET 200AL, IO-Link, DIQ 16x24VDC/0,5A
General information		
Product type designation	IO-Link DIQ 4+DQ 4x24VDC/0,5A	IO-Link DIQ 16x24VDC/0,5A
Engineering with		
• IODD file	Yes	Yes
Supply voltage		
Load voltage 1L+		
• Rated value (DC)	24 V; Supply from 1Us+ of the IO-Link master	24 V; Supply from 1Us+ of the IO-Link master
• Reverse polarity protection	Yes; against destruction	Yes; against destruction
Load voltage 2L+		
• Rated value (DC)	24 V; Supply from 2UA+ of the IO-Link master	24 V; Supply from 2UA+ of the IO-Link master
• Reverse polarity protection	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up
Input current		
Current consumption (rated value)	15 mA; without load	20 mA; without load
from load voltage 2L+, max.	4 A; Maximum value	4 A; Maximum value
Encoder supply		
Number of outputs	8; Supply from 2UA+ of the IO-Link master	8; Supply from 2UA+ of the IO-Link master
Digital inputs		
Number of digital inputs	4; Parameterizable as DIQ	16; Parameterizable as DIQ
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes
Number of simultaneously controllable inputs all mounting positions		
- up to 55 °C, max.	4	16
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal "0"	-3 to +5V	-3 to +5V
• for signal "1"	+11 to +30V	+11 to +30V
Input current		
• for signal "1", typ.	3 mA	3 mA
Digital outputs		
Number of digital outputs	8; 4 DQ fixed, 4 DIQ parameterizable	16; Parameterizable as DIQ
Short-circuit protection	Yes; per channel, electronic	Yes; per channel, electronic
Limitation of inductive shutdown voltage to	2L+ (-50 V)	2L+ (-50 V)
Switching capacity of the outputs		
• on lamp load, max.	5 W	5 W
Load resistance range		
• lower limit	48 Ω	48 Ω
• upper limit	4 kΩ	4 kΩ
Output voltage		
• for signal "1", min.	L+ (-0.8 V)	L+ (-0.8 V)
Output current		
• for signal "1" rated value	0.5 A	0.5 A
• for signal "0" residual current, max.	0.5 mA	0.5 mA
Switching frequency		
• with resistive load, max.	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz
• on lamp load, max.	1 Hz	1 Hz
Total current of the outputs		
• Current per module, max.	4 A	4 A
Encoder		
Connectable encoders		
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**IO-Link I/O modules****Technical specifications**

Article number	6ES7143-5BF00-0BL0 ET 200AL, IO-Link, DIQ 4+DQ 4x24VDC/0,5A	6ES7143-5AH00-0BL0 ET 200AL, IO-Link, DIQ 16x24VDC/0,5A
IO-Link		
IO-Link protocol 1.1	Yes	Yes
Transmission rate	38.4 kBd (COM2)	38.4 kBd (COM2)
Cycle time, min.	2.4 ms	3 ms
Size of process data, input per module	1 byte	2 byte
Size of process data, output per module	1 byte	2 byte
Supported IO-Link profiles	common profile	common profile
Cable length unshielded, max.	20 m	20 m
Connection of IO-Link devices		
• Port type B	Yes	Yes
Interrupts/diagnostics/status information		
Substitute values connectable	Yes; channel by channel, parameterizable	Yes; channel by channel, parameterizable
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable
Diagnoses		
• Short-circuit	Yes; outputs to ground; encoder supply to ground; module by module	Yes; outputs to ground; encoder supply to ground; module by module
Diagnostics indication LED		
• Channel status display	Yes; green LED	Yes; green LED
• for module diagnostics	Yes; green/red LED	Yes; green/red LED
• For load voltage monitoring	Yes; green LED	Yes; green LED
Potential separation		
between the load voltages	Yes	Yes
Potential separation channels		
• between the channels	No	No
• between the channels and the power supply of the electronics	Yes	Yes
Degree and class of protection		
IP degree of protection	IP65/67	IP65/67
Standards, approvals, certificates		
Suitable for safety-related tripping of standard modules	Yes; From FS01	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules		
• Performance level according to ISO 13849-1	PL d	PL d
• Category according to ISO 13849-1	Cat. 3	Cat. 3
• SIL acc. to IEC 62061	SIL 2	SIL 2
Ambient conditions		
Ambient temperature during operation		
• min.	-30 °C	-30 °C
• max.	55 °C	55 °C
connection method		
Design of electrical connection for the inputs and outputs	M8, 3-pole	M12, 5-pin, A-coded
Type of electrical connection for IO-Link	M12, 5-pin, A-coded	M12, 5-pin, A-coded
Dimensions		
Width	30 mm	45 mm
Height	159 mm	159 mm
Depth	40 mm	40 mm
Weights		
Weight, approx.	125 g	157 g

Overview

- Pre-assembled cables in various designs and lengths:
 - For connecting the interface modules and I/O modules via the internal backplane bus (ET connection).
 - For power supply.

Ordering data**Bus cable for backplane bus (ET connection)**

4-pin, shielded

Pre-assembled at both ends,
2 M8 connectors

0.19 m

0.3 m

1 m

2 m

5 m

10 m

15 m

PUR line, pre-assembled at both
ends, 2 M8 connectors

0.19 m

0.3 m

1 m

2 m

5 m

10 m

15 m

PUR line, pre-assembled at both
ends, 2 M8 connectors, angled

0.3 m

1 m

2 m

5 m

10 m

15 m

Pre-assembled at both ends,
2 M8 connectors, angled

0.3 m

1 m

2 m

5 m

10 m

15 m

Pre-assembled at one end,
1 M8 connector

2 m

5 m

10 m

15 m

PUR line, pre-assembled at one
end, 1 M8 connector

2 m

5 m

10 m

15 m

Article No.**6ES7194-2LH02-0AA0****6ES7194-2LH03-0AA0****6ES7194-2LH10-0AA0****6ES7194-2LH20-0AA0****6ES7194-2LH50-0AA0****6ES7194-2LN10-0AA0****6ES7194-2LN15-0AA0****6ES7194-2MH02-0AA0****6ES7194-2MH03-0AA0****6ES7194-2MH10-0AA0****6ES7194-2MH20-0AA0****6ES7194-2MH50-0AA0****6ES7194-2MN10-0AA0****6ES7194-2MN15-0AA0****6ES7194-2MH03-0AB0****6ES7194-2MH10-0AB0****6ES7194-2MH20-0AB0****6ES7194-2MH50-0AB0****6ES7194-2MN10-0AB0****6ES7194-2MN15-0AB0****6ES7194-2LH03-0AB0****6ES7194-2LH10-0AB0****6ES7194-2LH20-0AB0****6ES7194-2LH50-0AB0****6ES7194-2LN10-0AB0****6ES7194-2LN15-0AB0****6ES7194-2LH20-0AC0****6ES7194-2LH50-0AC0****6ES7194-2LN10-0AC0****6ES7194-2LN15-0AC0****6ES7194-2MH20-0AC0****6ES7194-2MH50-0AC0****6ES7194-2MN10-0AC0****6ES7194-2MN15-0AC0****Article No.****Connecting cable for bus cable for backplane bus (ET connection)**

4-pin, shielded

Pre-assembled at both ends,
2 M8 connectors. 0.2 mPUR line, pre-assembled at both
ends, 2 M8 connectors. 0.2 m**Power cable M8**

4-pin

Pre-assembled at both ends,
M8 connector and M8 socket

0.19 m

0.3 m

1 m

2 m

5 m

10 m

15 m

PUR line, pre-assembled at both
ends, M8 connector and M8 socket

0.19 m

0.3 m

1 m

2 m

5 m

10 m

15 m

Pre-assembled at both ends,
angled M8 connector and angled
M8 socket

0.3 m

1 m

2 m

5 m

10 m

15 m

PUR line, pre-assembled at both
ends, angled M8 connector and
angled M8 socket

0.3 m

1 m

2 m

5 m

10 m

15 m

6ES7194-2LH02-0AD0**6ES7194-2MH02-0AD0****6ES7194-2LH02-1AA0****6ES7194-2LH03-1AA0****6ES7194-2LH10-1AA0****6ES7194-2LH20-1AA0****6ES7194-2LH50-1AA0****6ES7194-2LN10-1AA0****6ES7194-2LN15-1AA0****6ES7194-2MH02-1AA0****6ES7194-2MH03-1AA0****6ES7194-2MH10-1AA0****6ES7194-2MH20-1AA0****6ES7194-2MH50-1AA0****6ES7194-2MN10-1AA0****6ES7194-2MN15-1AA0****6ES7194-2LH03-1AB0****6ES7194-2LH10-1AB0****6ES7194-2LH20-1AB0****6ES7194-2LH50-1AB0****6ES7194-2LN10-1AB0****6ES7194-2LN15-1AB0****6ES7194-2MH03-1AB0****6ES7194-2MH10-1AB0****6ES7194-2MH20-1AB0****6ES7194-2MH50-1AB0****6ES7194-2MN10-1AB0****6ES7194-2MN15-1AB0**

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Accessories > Cables and connectors

Ordering data	Article No.	Article No.
Pre-assembled at one end, M8 socket		M8 connector for ET connection 4-pin, shielded
2 m	6ES7194-2LH20-1AC0	
5 m	6ES7194-2LH50-1AC0	M8 power connector
10 m	6ES7194-2LN10-1AC0	Male contact insert, 4-pin
15 m	6ES7194-2LN15-1AC0	Female contact insert, 4-pin
PUR line, pre-assembled at one end, M8 socket		ET connection FastConnect stripping tool
2 m	6ES7194-2MH20-1AC0	Stripping tool for stripping the ET connection bus cable
5 m	6ES7194-2MH50-1AC0	
10 m	6ES7194-2MN10-1AC0	
15 m	6ES7194-2MN15-1AC0	

Technical specifications

Article number	6ES7194-2LH02-0AA0	6ES7194-2LH03-0AA0	6ES7194-2LH10-0AA0	6ES7194-2LH20-0AA0	6ES7194-2LH50-0AA0	6ES7194-2LN10-0AA0	6ES7194-2LN15-0AA0
	Bus Cable ET-Connection, 0,19m	Bus Cable ET-Connection, 0,3m	Bus Cable ET-Connection, 1,0M	Bus Cable ET-Connection, 2,0M	Bus Cable ET-Connection, 5,0M	Bus Cable ET-Connection, 10m	Bus Cable ET-Connection, 15m
General information							
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable
Product description	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67
Degree and class of protection							
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions							
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation							
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables							
Cable designation	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires
Cable length	0.19 m	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm

Technical specifications

Article number	6ES7194-2LH02-0AA0	6ES7194-2LH03-0AA0	6ES7194-2LH10-0AA0	6ES7194-2LH20-0AA0	6ES7194-2LH50-0AA0	6ES7194-2LN10-0AA0	6ES7194-2LN15-0AA0
Bus Cable ET-Connection, 0,19m	Bus Cable ET-Connection, 0,3m	Bus Cable ET-Connection, 1,0M	Bus Cable ET-Connection, 2,0M	Bus Cable ET-Connection, 5,0M	Bus Cable ET-Connection, 10m	Bus Cable ET-Connection, 15m	Bus Cable ET-Connection, 15m
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Color of cable sheath	green	green	green	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material							
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC	PVC	PVC	PVC
Material of core insulation	PE	PE	PE	PE	PE	PE	PE
Material property							
• Halogen-free	No	No	No	No	No	No	No
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH02-0AA0	6ES7194-2MH03-0AA0	6ES7194-2MH10-0AA0	6ES7194-2MH20-0AA0	6ES7194-2MH50-0AA0	6ES7194-2MN10-0AA0	6ES7194-2MN15-0AA0
Bus Cable ET-Connection, 0,19m	Bus Cable ET-Connection, 0,3m	Bus Cable ET-Connection, 1,0M	Bus Cable ET-Connection, 2,0M	Bus Cable ET-Connection, 5,0M	Bus Cable ET-Connection, 10m	Bus Cable ET-Connection, 15m	Bus Cable ET-Connection, 15m
General information							
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable
Product description	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, 4-pin, shielded
Suitability for use	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET- CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67
Degree and class of protection							
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions							
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation							
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**Accessories > Cables and connectors****Technical specifications**

Article number	6ES7194-2MH02-0AA0	6ES7194-2MH03-0AA0	6ES7194-2MH10-0AA0	6ES7194-2MH20-0AA0	6ES7194-2MH50-0AA0	6ES7194-2MN10-0AA0	6ES7194-2MN15-0AA0
	Bus Cable ET-Connection, 0,19m	Bus Cable ET-Connection, 0,3m	Bus Cable ET-Connection, 1,0M	Bus Cable ET-Connection, 2,0M	Bus Cable ET-Connection, 5,0M	Bus Cable ET-Connection, 10m	Bus Cable ET-Connection, 15m
Cables							
Cable designation	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN	2Y(ST)C11Y 2x2x0.5/1.0- 100-GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin- plated copper wires
Cable length	0.19 m	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Color of cable sheath	green	green	green	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material							
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PUR	PUR	PUR	PUR	PUR	PUR	PUR
Material of core insulation	PE	PE	PE	PE	PE	PE	PE
Material property							
• Halogen-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Technical specifications

Article number	6ES7194-2LH03-0AB0	6ES7194-2LH10-0AB0	6ES7194-2LH20-0AB0	6ES7194-2LH50-0AB0	6ES7194-2LN10-0AB0	6ES7194-2LN15-0AB0
	Bus Cable ET-Con., angled, 0,3m	Bus Cable ET-Con., angled, 1,0M	Bus Cable ET-Con., angled, 2,0M	Bus Cable ET-Con., angled, 5,0M	Bus Cable ET-Connection, angled, 10m	Bus Cable ET-Connection, angled, 15m
General information						
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable
Product description	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67
Degree and class of protection						
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions						
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation						
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables						
Cable designation	2Y(ST)CY 1x4x0.5/1.0-100- GN	2Y(ST)CY 1x4x0.5/1.0-100- GN	2Y(ST)CY 1x4x0.5/1.0-100- GN	2Y(ST)CY 1x4x0.5/1.0-100- GN	2Y(ST)CY 1x4x0.5/1.0-100- GN	2Y(ST)CY 1x4x0.5/1.0-100- GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires
Cable length	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**Accessories > Cables and connectors****Technical specifications**

Article number	6ES7194-2LH03-0AB0	6ES7194-2LH10-0AB0	6ES7194-2LH20-0AB0	6ES7194-2LH50-0AB0	6ES7194-2LN10-0AB0	6ES7194-2LN15-0AB0
Bus Cable ET-Con., angled, 0,3m	Bus Cable ET-Con., angled, 1,0M	Bus Cable ET-Con., angled, 2,0M	Bus Cable ET-Con., angled, 5,0M	Bus Cable ET-Connection, angled, 10m	Bus Cable ET-Connection, angled, 15m	
Color of cable sheath	green	green	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material						
Outgoing feeder type	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC	PVC	PVC
Material of core insulation	PE	PE	PE	PE	PE	PE
Material property						
• Halogen-free	No	No	No	No	No	No
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH03-0AB0	6ES7194-2MH10-0AB0	6ES7194-2MH20-0AB0	6ES7194-2MH50-0AB0	6ES7194-2MN10-0AB0	6ES7194-2MN15-0AB0
Bus Cable ET-Connection, angled, 0,3m	Bus Cable ET-Connection, angled, 1,0M	Bus Cable ET-Connection, angled, 2,0M	Bus Cable ET-Connection, angled, 5,0M	Bus Cable ET-Connection, angled, 10m	Bus Cable ET-Connection, angled, 15m	
General information						
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable	Bus cable
Product description	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded	Flexible cable (4-core), preassembled at both ends with 2x M8 plugs, angled, 4-pin, shielded
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67
Degree and class of protection						
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions						
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation						
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables						
Cable designation	2Y(ST)C11Y 2x2x0.5/1.0-100- GN	2Y(ST)C11Y 2x2x0.5/1.0-100- GN	2Y(ST)C11Y 2x2x0.5/1.0-100- GN	2Y(ST)C11Y 2x2x0.5/1.0-100- GN	2Y(ST)C11Y 2x2x0.5/1.0-100- GN	2Y(ST)C11Y 2x2x0.5/1.0-100- GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires
Cable length	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm

10

Technical specifications

Article number	6ES7194-2MH03-0AB0	6ES7194-2MH10-0AB0	6ES7194-2MH20-0AB0	6ES7194-2MH50-0AB0	6ES7194-2MN10-0AB0	6ES7194-2MN15-0AB0
	Bus Cable ET-Connection, angled, 0,3m	Bus Cable ET-Connection, angled, 1,0M	Bus Cable ET-Connection, angled, 2,0M	Bus Cable ET-Connection, angled, 5,0M	Bus Cable ET-Connection, angled, 10m	Bus Cable ET-Connection, angled, 15m
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Color of cable sheath	green	green	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material						
Outgoing feeder type	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet
Material of cable sheath	PUR	PUR	PUR	PUR	PUR	PUR
Material of core insulation	PE	PE	PE	PE	PE	PE
Material property						
• Halogen-free	Yes	Yes	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes
Article number	6ES7194-2LH20-0AC0	6ES7194-2LH50-0AC0	6ES7194-2LN10-0AC0	6ES7194-2LN15-0AC0		
	Bus Cable ET-Connection, 2,0M	Bus Cable ET-Connection, 5,0M	Bus Cable ET-Connection, 10m	Bus Cable ET-Connection, 15m		
General information						
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable		
Product description	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded		
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67		
Degree and class of protection						
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67		
Ambient conditions						
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C		
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C		
Ambient temperature during storage/transportation						
• min.	-40 °C	-40 °C	-40 °C	-40 °C		
• max.	80 °C	80 °C	80 °C	80 °C		
Cables						
Cable designation	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN	2Y(ST)CY 1x4x0.5/1.0-100-GN		
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires		
Cable length	2 m	5 m	10 m	15 m		
Number of electrical cores	4	4	4	4		
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm		
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm		
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm		

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**Accessories > Cables and connectors****Technical specifications**

Article number	6ES7194-2LH20-0AC0 Bus Cable ET-Connection, 2,0M	6ES7194-2LH50-0AC0 Bus Cable ET-Connection, 5,0M	6ES7194-2LN10-0AC0 Bus Cable ET-Connection, 10m	6ES7194-2LN15-0AC0 Bus Cable ET-Connection, 15m
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm
Color of cable sheath	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material				
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC
Material of core insulation	PE	PE	PE	PE
Material property				
• Halogen-free	No	No	No	No
• Silicone-free	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH20-0AC0 Bus Cable ET-Connection, 2,0M	6ES7194-2MH50-0AC0 Bus Cable ET-Connection, 5,0M	6ES7194-2MN10-0AC0 Bus Cable ET-Connection, 10m	6ES7194-2MN15-0AC0 Bus Cable ET-Connection, 15m
General information				
Product type designation	Bus cable	Bus cable	Bus cable	Bus cable
Product description	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded	Flexible cable (4-core), preassembled at one end with 1x M8 plug, 4-pin, shielded
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67
Degree and class of protection				
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions				
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation				
• min.	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C
Cables				
Cable designation	2Y(ST)C11Y 2x2x0.5/1.0-100-GN	2Y(ST)C11Y 2x2x0.5/1.0-100-GN	2Y(ST)C11Y 2x2x0.5/1.0-100-GN	2Y(ST)C11Y 2x2x0.5/1.0-100-GN
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires
Cable length	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4
Outer diameter of inner conductor	0.5 mm	0.5 mm	0.5 mm	0.5 mm
Outer diameter of core insulation	1 mm	1 mm	1 mm	1 mm
Outer diameter of cable sheath	5 mm	5 mm	5 mm	5 mm

Technical specifications

Article number	6ES7194-2MH20-0AC0 Bus Cable ET-Connection, 2,0M	6ES7194-2MH50-0AC0 Bus Cable ET-Connection, 5,0M	6ES7194-2MN10-0AC0 Bus Cable ET-Connection, 10m	6ES7194-2MN15-0AC0 Bus Cable ET-Connection, 15m
Number of bending cycles	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²	1 000 000; cable carrier compliant for 1 million bending cycles with a bending radius of 100 mm, a speed of 4 m/s and an acceleration of 4 m/s ²
Permissible bending radius, single bend, min.	20 mm	20 mm	20 mm	20 mm
Permissible bending radius, multiple bends, min.	40 mm	40 mm	40 mm	40 mm
Bending radius for continuous bending	100 mm	100 mm	100 mm	100 mm
Color of cable sheath	green	green	green	green
Color of core insulation of data cores	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange	white / yellow / blue / orange
Weight per length	34 kg/km	34 kg/km	34 kg/km	34 kg/km
Mechanics/material				
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PUR	PUR	PUR	PUR
Material of core insulation	PE	PE	PE	PE
Material property				
• Halogen-free	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes

Article number	6ES7194-2LH02-1AA0 Power Cable M8, 0,19m	6ES7194-2LH03-1AA0 Power Cable M8, 0,3m	6ES7194-2LH10-1AA0 Power Cable M8, 1,0M	6ES7194-2LH20-1AA0 Power Cable M8, 2,0M	6ES7194-2LH50-1AA0 Power Cable M8, 5,0M	6ES7194-2LN10-1AA0 Power Cable M8, 10m	6ES7194-2LN15-1AA0 Power Cable M8, 15m
General information							
Product type designation	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable
Product description	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection							
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions							
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation							
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables							
Cable designation	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y
Cable length	0.19 m	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4	4
Outer diameter of inner conductor	0.8 mm	0.8 mm	0.8 mm	0.8 mm	0.8 mm	0.8 mm	0.8 mm
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm
Outer diameter of cable sheath	5.2 mm	5.2 mm	5.2 mm	5.2 mm	5.2 mm	5.2 mm	5.2 mm

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL

Accessories > Cables and connectors

Technical specifications

Article number	6ES7194-2LH02-1AA0 Power Cable M8, 0,19m	6ES7194-2LH03-1AA0 Power Cable M8, 0,3m	6ES7194-2LH10-1AA0 Power Cable M8, 1,0M	6ES7194-2LH20-1AA0 Power Cable M8, 2,0M	6ES7194-2LH50-1AA0 Power Cable M8, 5,0M	6ES7194-2LN10-1AA0 Power Cable M8, 10m	6ES7194-2LN15-1AA0 Power Cable M8, 15m
Number of bending cycles	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm
Bending radius for continuous bending	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm
Color of cable sheath	gray	gray	gray	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material							
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC	PVC	PVC	PVC
Material of core insulation	PP	PP	PP	PP	PP	PP	PP
Material property							
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH02-1AA0 Power Cable M8 0,19m	6ES7194-2MH03-1AA0 Power Cable M8, 0,3m	6ES7194-2MH10-1AA0 Power Cable M8, 1,0M	6ES7194-2MH20-1AA0 Power Cable M8, 2,0M	6ES7194-2MH50-1AA0 Power Cable M8, 5,0M	6ES7194-2MN10-1AA0 Power Cable M8, 10m	6ES7194-2MN15-1AA0 Power Cable M8, 15m
General information							
Product type designation	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable
Product description	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection							
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions							
Ambient temperature during assembly, min.	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation							
• min.	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables							
Cable designation	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²
Cable length	0.19 m	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4	4
Outer diameter of inner conductor	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm
Outer diameter of cable sheath	5.1 mm	5.1 mm	5.1 mm	5.1 mm	5.1 mm	5.1 mm	5.1 mm

Technical specifications

Article number	6ES7194-2MH02-1AA0	6ES7194-2MH03-1AA0	6ES7194-2MH10-1AA0	6ES7194-2MH20-1AA0	6ES7194-2MH50-1AA0	6ES7194-2MN10-1AA0	6ES7194-2MN15-1AA0
	Power Cable M8 0,19m	Power Cable M8, 0,3m	Power Cable M8, 1,0M	Power Cable M8, 2,0M	Power Cable M8, 5,0M	Power Cable M8, 10m	Power Cable M8, 15m
Number of bending cycles	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm
Bending radius for continuous bending	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm
Color of cable sheath	gray	gray	gray	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material							
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PE-PUR	PE-PUR	PE-PUR	PE-PUR	PE-PUR	PE-PUR	PE-PUR
Material of core insulation	PP	PP	PP	PP	PP	PP	PP
Material property							
• Halogen-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Article number	6ES7194-2LH03-1AB0	6ES7194-2LH10-1AB0	6ES7194-2LH20-1AB0	6ES7194-2LH50-1AB0	6ES7194-2LN10-1AB0	6ES7194-2LN15-1AB0	
	Power Cable M8, angled, 0,3m	Power Cable M8, angled, 1,0M	Power Cable M8, angled, 2,0M	Power Cable M8, angled, 5,0M	Power Cable M8, angled, 10m	Power Cable M8, angled, 15m	
General information							
Product type designation	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable	
Product description	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	
Degree and class of protection							
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	
Ambient conditions							
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	-30 °C	
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	
Ambient temperature during storage/transportation							
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C	
Cables							
Cable designation	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	
Cable length	0.3 m	1 m	2 m	5 m	10 m	15 m	
Number of electrical cores	4	4	4	4	4	4	
Outer diameter of inner conductor	0.8 mm	0.8 mm	0.8 mm	0.8 mm	0.8 mm	0.8 mm	
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	
Outer diameter of cable sheath	5.2 mm	5.2 mm	5.2 mm	5.2 mm	5.2 mm	5.2 mm	

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**Accessories > Cables and connectors****Technical specifications**

Article number	6ES7194-2LH03-1AB0	6ES7194-2LH10-1AB0	6ES7194-2LH20-1AB0	6ES7194-2LH50-1AB0	6ES7194-2LN10-1AB0	6ES7194-2LN15-1AB0
	Power Cable M8, angled, 0,3m	Power Cable M8, angled, 1,0M	Power Cable M8, angled, 2,0M	Power Cable M8, angled, 5,0M	Power Cable M8, angled, 10m	Power Cable M8, angled, 15m
Number of bending cycles	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm
Bending radius for continuous bending	52 mm	52 mm	52 mm	52 mm	52 mm	52 mm
Color of cable sheath	gray	gray	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material						
Outgoing feeder type	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC	PVC	PVC
Material of core insulation	PP	PP	PP	PP	PP	PP
Material property						
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH03-1AB0	6ES7194-2MH10-1AB0	6ES7194-2MH20-1AB0	6ES7194-2MH50-1AB0	6ES7194-2MN10-1AB0	6ES7194-2MN15-1AB0
	Power Cable M8, angled, 0,3m	Power Cable M8, angled, 1,0M	Power Cable M8, angled, 2,0M	Power Cable M8, angled, 5,0M	Power Cable M8, angled, 10m	Power Cable M8, angled, 15m
General information						
Product type designation	Power cable	Power cable	Power cable	Power cable	Power cable	Power cable
Product description	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled	Flexible cable (4-core), preassembled at each end with a 4-pin M8 male / female connector, angled
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection						
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions						
Ambient temperature during assembly, min.	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation						
• min.	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C	-25 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	80 °C
Cables						
Cable designation	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²
Cable length	0.3 m	1 m	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4	4	4
Outer diameter of inner conductor	1 mm	1 mm	1 mm	1 mm	1 mm	1 mm
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm	1.46 mm
Outer diameter of cable sheath	5.1 mm	5.1 mm	5.1 mm	5.1 mm	5.1 mm	5.1 mm

Technical specifications

Article number	6ES7194-2MH03-1AB0	6ES7194-2MH10-1AB0	6ES7194-2MH20-1AB0	6ES7194-2MH50-1AB0	6ES7194-2MN10-1AB0	6ES7194-2MN15-1AB0
	Power Cable M8, angled, 0,3m	Power Cable M8, angled, 1,0M	Power Cable M8, angled, 2,0M	Power Cable M8, angled, 5,0M	Power Cable M8, angled, 10m	Power Cable M8, angled, 15m
Number of bending cycles	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm
Bending radius for continuous bending	51 mm	51 mm	51 mm	51 mm	51 mm	51 mm
Color of cable sheath	gray	gray	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material						
Outgoing feeder type	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet	90 degree cable outlet
Material of cable sheath	PE-PUR	PE-PUR	PE-PUR	PE-PUR	PE-PUR	PE-PUR
Material of core insulation	PP	PP	PP	PP	PP	PP
Material property						
• Halogen-free	Yes	Yes	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes	Yes	Yes
Article number	6ES7194-2LH20-1AC0	6ES7194-2LH50-1AC0	6ES7194-2LN10-1AC0	6ES7194-2LN15-1AC0		
	Power Cable M8, 2,0M	Power Cable M8, 5,0M	Power Cable M8, 10m	Power Cable M8, 15m		
General information						
Product type designation	Power cable	Power cable	Power cable	Power cable		
Product description	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector		
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply		
Degree and class of protection						
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67		
Ambient conditions						
Ambient temperature during assembly, min.	-30 °C	-30 °C	-30 °C	-30 °C		
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C		
Ambient temperature during storage/transportation						
• min.	-40 °C	-40 °C	-40 °C	-40 °C		
• max.	80 °C	80 °C	80 °C	80 °C		
Cables						
Cable designation	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y	4 Li9Y 0.50 mm ² Y		
Cable length	2 m	5 m	10 m	15 m		
Number of electrical cores	4	4	4	4		
Outer diameter of inner conductor	0.8 mm	0.8 mm	0.8 mm	0.8 mm		
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm		
Outer diameter of cable sheath	5.2 mm	5.2 mm	5.2 mm	5.2 mm		

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**Accessories > Cables and connectors****Technical specifications**

Article number	6ES7194-2LH20-1AC0 Power Cable M8, 2,0M	6ES7194-2LH50-1AC0 Power Cable M8, 5,0M	6ES7194-2LN10-1AC0 Power Cable M8, 10m	6ES7194-2LN15-1AC0 Power Cable M8, 15m
Number of bending cycles	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²	2 500 000; cable carrier compliant for 2.5 million bending cycles with a bending radius of 52 mm, a speed of 3 m/s and an acceleration of 10 m/s ²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	52 mm	52 mm	52 mm	52 mm
Bending radius for continuous bending	52 mm	52 mm	52 mm	52 mm
Color of cable sheath	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material				
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PVC	PVC	PVC	PVC
Material of core insulation	PP	PP	PP	PP
Material property				
• Silicone-free	Yes	Yes	Yes	Yes
Article number	6ES7194-2MH20-1AC0 Power Cable M8, 2,0M	6ES7194-2MH50-1AC0 Power Cable M8, 5,0M	6ES7194-2MN10-1AC0 Power Cable M8, 10m	6ES7194-2MN15-1AC0 Power Cable M8, 15m
General information				
Product type designation	Power cable	Power cable	Power cable	Power cable
Product description	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector	Flexible cable (4-core), preassembled at one end with 1x M8 female connector
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection				
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67
Ambient conditions				
Ambient temperature during assembly, min.	-25 °C	-25 °C	-25 °C	-25 °C
Ambient temperature during assembly, max.	80 °C	80 °C	80 °C	80 °C
Ambient temperature during storage/transportation				
• min.	-25 °C	-25 °C	-25 °C	-25 °C
• max.	80 °C	80 °C	80 °C	80 °C
Cables				
Cable designation	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²	LIF9Y11YFHF 4x 0.50 mm ²
Cable length	2 m	5 m	10 m	15 m
Number of electrical cores	4	4	4	4
Outer diameter of inner conductor	1 mm	1 mm	1 mm	1 mm
Outer diameter of core insulation	1.46 mm	1.46 mm	1.46 mm	1.46 mm
Outer diameter of cable sheath	5.1 mm	5.1 mm	5.1 mm	5.1 mm
Number of bending cycles	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²	2 000 000; cable carrier compliant for 2 million bending cycles with a bending radius of 51 mm, a speed of 5 m/s and an acceleration of 5 m/s ²
Permissible bending radius, single bend, min.	26 mm	26 mm	26 mm	26 mm
Permissible bending radius, multiple bends, min.	51 mm	51 mm	51 mm	51 mm
Bending radius for continuous bending	51 mm	51 mm	51 mm	51 mm

Technical specifications

Article number	6ES7194-2MH20-1AC0	6ES7194-2MH50-1AC0	6ES7194-2MN10-1AC0	6ES7194-2MN15-1AC0
	Power Cable M8, 2,0M	Power Cable M8, 5,0M	Power Cable M8, 10m	Power Cable M8, 15m
Color of cable sheath	gray	gray	gray	gray
Color of core insulation of energy core	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black	white / brown / blue / black
Weight per length	44 kg/km	44 kg/km	44 kg/km	44 kg/km
Mechanics/material				
Outgoing feeder type	180° cable outlet	180° cable outlet	180° cable outlet	180° cable outlet
Material of cable sheath	PE-PUR	PE-PUR	PE-PUR	PE-PUR
Material of core insulation	PP	PP	PP	PP
Material property				
• Halogen-free	Yes	Yes	Yes	Yes
• Silicone-free	Yes	Yes	Yes	Yes
Article number	6ES7194-2LH02-0AD0		6ES7194-2MH02-0AD0	
	Connecting Cable ET-Connection, 0,2m		Connecting cable ET-Connection 0,2m	
General information				
Product type designation	Connecting cable for bus cable		Connecting cable for bus cable	
Product description	Flexible cable (4-core), preassembled at both ends with 2x M8 sockets, 4-pin, shielded		Flexible cable (4-core), preassembled at both ends with 2x M8 sockets, 4-pin, shielded	
Suitability for use	For connecting two ET CONNECTION bus cables		For connecting two ET CONNECTION bus cables	
Degree and class of protection				
IP degree of protection	IP65/67		IP65/67	
Ambient conditions				
Ambient temperature during assembly, min.	-30 °C		-30 °C	
Ambient temperature during assembly, max.	80 °C		80 °C	
Ambient temperature during storage/transportation				
• min.	-40 °C		-40 °C	
• max.	80 °C		80 °C	
Cables				
Cable designation	2Y(ST)CY 1x4x0.5/1.0-100-GN		2Y(ST)C11Y 2x2x0.5/1.0-100-GN	
Design of shield	Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires		Overlapped aluminum-clad foil, sheathed in a braid of tin-plated copper wires	
Cable length	0.2 m		0.2 m	
Number of electrical cores	4		4	
Outer diameter of inner conductor	0.5 mm		0.5 mm	
Outer diameter of core insulation	1 mm		1 mm	
Outer diameter of cable sheath	5 mm		5 mm	
Permissible bending radius, single bend, min.	20 mm		20 mm	
Permissible bending radius, multiple bends, min.	40 mm		40 mm	
Bending radius for continuous bending	100 mm		100 mm	
Color of cable sheath	green		green	
Color of core insulation of data cores	white / yellow / blue / orange		white / yellow / blue / orange	
Weight per length	34 kg/km		34 kg/km	
Mechanics/material				
Outgoing feeder type	180° cable outlet		180° cable outlet	
Material of cable sheath	PVC		PUR	
Material of core insulation	PE		PE	
Material property				
• Halogen-free	No		Yes	
• Silicone-free	Yes		Yes	

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200AL**Accessories > Cables and connectors****Technical specifications**

Article number	6ES7194-2AA00-0AA0 M8 Power Connector	6ES7194-2AC00-0AA0 M8 Power Connector, Socket
General information		
Product type designation	Power connector	Power connector
Product description	M8 plug connector with high degree of protection, 4-pin, plastic version	M8 plug connector with high degree of protection, socket insert, 4-pin, plastic version
Suitability for use	For connection to ET 200AL for 24 V DC power supply	For connection to ET 200AL for 24 V DC power supply
Degree and class of protection		
IP degree of protection	IP65/67	IP65/67
Ambient conditions		
Ambient temperature during assembly, min.	-30 °C	-30 °C
Ambient temperature during assembly, max.	85 °C	85 °C
Ambient temperature during storage/transportation		
• min.	-40 °C	-40 °C
• max.	85 °C	85 °C
connection method		
Connector type	M8, 4-pole	M8, 4-pole
Type of electrical connection for mains supply line	Screw terminals	Screw terminals
• connectable cable cross-section for mains supply line, min.	0.14 mm ²	0.14 mm ²
• connectable cable cross-section for mains supply line, max.	0.5 mm ²	0.5 mm ²
• Connectable conductor cross-section for AWG cables, min.	26	26
• Connectable conductor cross-section for AWG cables, max.	20	20
Suitable for cable diameter, min.	4 mm	4 mm
usable for cable diameter, max.	5.5 mm	5.5 mm
Mechanics/material		
Outgoing feeder type	180° cable outlet	180° cable outlet
Material of housing	plastic	plastic
Dimensions		
Width	14 mm	14 mm
Depth	47 mm	47 mm
Article number	6ES7194-2AB00-0AA0 M8 Connector ET-Connection	Article number 6ES7194-2AB00-0AA0 M8 Connector ET-Connection
General information		
Product type designation	Connection plug	
Product description	M8 plug connector with high degree of protection, 4-pin, metal version	
Suitability for use	for connecting ET-CONNECTION nodes (e.g. SIMATIC ET 200AL) in degree of protection IP65 / 67	
Degree and class of protection		
IP degree of protection	IP65/67	
Ambient conditions		
Ambient temperature during assembly, min.	-30 °C	
Ambient temperature during assembly, max.	80 °C	
Ambient temperature during storage/transportation		
• min.	-40 °C	
• max.	80 °C	
Mechanics/material		
Outgoing feeder type	180° cable outlet	
Material of housing	metal	
Dimensions		
Width	14 mm	
Depth	47 mm	

Overview

- Labels for the identification of channels, modules and slots of ET 200AL components
- Can be used for interface modules and I/O modules

Ordering data**Labels**

10 x 5 mm, RAL 9016;
5 frames with 40 labels each

Article No.**6ES7194-2BA00-0AA0**

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200eco PN

Overview



SIMATIC ET 200eco PN video

https://players.brightcove.net/1813624294001/70fecf0f-fbad-4fad-a077-d0e26af4d84c_default/index.html?videoId=6187715895001



- Compact block I/O for processing digital, fail-safe digital, analog and IO-Link signals for connecting to bus systems with Ethernet-based protocols PROFINET, EtherNet/IP and Modbus TCP
- Cabinet-free installation in degree of protection IP65/67/69K with M12 connection system
- Extremely rugged and resistant metal enclosure
- Housing type of the I/O devices with 2x M12 L-coded power connectors
 - 45 mm x 200 mm x 48 mm (W x H x D) with 8 x M12 for digital signals and IO-Link
- Housing type of the I/O devices with 2x M12 A-coded power connectors
 - 30 mm x 200 mm x 37 mm (W x H x D) with 4 x M12 for digital signals and IO-Link
 - 60 mm x 175 mm x 37 mm (W x H x D) with 8 x M12 for digital and fail-safe digital signals as well as IO-Link
 - 60 mm x 175 mm x 37 mm (W x H x D) with 4 x M12 or 8 x M12 for analog signals

- Fieldbus connection: 2 x M12 D-coded and automatic PROFINET addressing
- Data transfer rate 100 Mbps
- LLDP neighborhood discovery for topological configuration
- Fast startup (run-up within approx. 0.5 seconds)
- Channel-specific diagnostics, identification and maintenance data IM0 ... IM3
- Firmware update
- Ambient temperature range -40 °C to 60 °C
- Can be used in hazardous areas in zones 2 and 22
- Can be used outdoors
- Increase in communication availability due to Media Redundancy Protocol (MRP) on PROFINET as well as operation on S7-1500 R/H or S7-400H by means of S2 redundancy
- Variants of the I/O devices with M12 L-coded power connectors:
 - DI 8
 - DI 16
 - DQ 8 (0.5 A)
 - DQ 8 (2 A)
 - DIQ 16 (0.5A/2A)
 - 8 IO-Link + DI 4
 - 8 IO-Link + DIQ 8
 - 4 IO-Link + DIQ 12
 - AI 8 (TC, RTD)
 - AIQ 8 (U, I)
 - TM PosInput 2
- Variants of the I/O devices with M12 A-coded power connectors:
 - 8 DI
 - 16 DI
 - 8 DQ (2 A)
 - 8 DQ (1.3 A)
 - 8 DQ (0.5 A)
 - 16 DQ (1.3 A)
 - 8 DI/DQ (1.3 A)
 - 8 F-DI/3 F-DO (2 A)
 - 8 AI (U, I, TC, RTD)
 - 8 AI (TC, RTD)
 - 4 AO (U, I)
 - 4 IO-Link
 - 4 IO-Link + 8 DI + 4 DQ (1.3 A)

Overview



- Digital I/O devices with 2x M12 L-coded power connectors and 45 mm width
 - 8 digital input signals with 8xM12 connection
 - 16 digital input signals with 8xM12 connection
 - 8 digital output signals 8-channel digital output module 0.5A with 8xM12 connection
 - 8 digital output signals 2A with 8xM12 connection
 - 16 digital input/output signals 0.5A/2A with 8xM12 connection



- Digital I/O devices with 2x M12 A-coded power connectors and 60 mm width
 - 8 digital input signals with 8xM12 connection
 - 16 digital input signals with 8xM12 connection
 - 8 digital output signals 1.3 A with 8xM12 connection
 - 8 digital output signals 2 A with 8xM12 connection
 - 16 digital output signals 1.3 A with 8xM12 connection
 - 8 digital input/output signals 1.3 A with 8xM12 connection



- Digital I/O devices with 2x M12 A-coded power connectors and 30 mm width
 - 8 digital input signals with 4xM12 connection
 - 8 digital output signals 0.5 A with 4xM12 connection
 - 8 digital output signals 1.3 A with 4xM12 connection

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > Digital I/O devices****Ordering data****Article No.****Article No.****ET 200eco PN****digital input modules**

with M12 L-coded power connector

- DI 8 x 24 V DC;
8 x M12, single and dual assignment, degree of protection IP67
- DI 16 x 24 V DC,
8 x M12, dual assignment, degree of protection IP67

6ES7141-6BG00-0BB0**6ES7141-6BH00-0BB0**

with M12 A-coded power connector

- 8 DI 24 V DC;
4 x M12, dual assignment, degree of protection IP67
- 8 DI 24 V DC;
8 x M12, degree of protection IP67
- 16 DI 24 V DC;
8 x M12, dual assignment, degree of protection IP67

6ES7141-6BF00-0AB0**6ES7141-6BG00-0AB0****6ES7141-6BH00-0AB0****ET 200eco PN****digital output modules**

with M12 L-coded power connector

- DQ 8 x 24 V DC/0.5 A;
8 x M12, single and dual assignment, degree of protection IP67
- DQ 8 x 24 V DC/2 A;
8 x M12, single and dual assignment, degree of protection IP67

6ES7142-6BG00-0BB0**6ES7142-6BR00-0BB0**

with M12 A-coded power connector

- 8 DQ 24 V DC/0.5 A;
4 x M12, dual assignment, 1 load voltage supply DQ; degree of protection IP67
- 8 DQ 24 V DC/1.3 A;
4 x M12, dual assignment, degree of protection IP67
- 8 DQ 24 V DC/1.3 A;
8 x M12, degree of protection IP67
- 8 DQ 24 V DC/2 A; 8 x M12,
degree of protection IP67
- 16 DQ 24 V DC/1.3 A;
8 x M12, dual assignment, degree of protection IP67

6ES7142-6BF50-0AB0**6ES7142-6BF00-0AB0****6ES7142-6BG00-0AB0****6ES7142-6BR00-0AB0****6ES7142-6BH00-0AB0****ET 200eco PN****digital input/output modules**

with M12 L-coded power connector

- DIQ 16 x 24 V DC/0.5 A/2 A;
dual assignment, degree of protection IP67

6ES7143-6BH00-0BB0

with M12 A-coded power connector

- 8 DI/DQ 24 V DC/1.3 A;
8 x M12, degree of protection IP67

6ES7147-6BG00-0AB0**Accessories**

- PD voltage distributor, 24 V DC;
1 X 7/8", 4 X M12
- Terminal block for ET 200eco PN,
10 A insulation displacement terminals
- Spare fuses for terminal block,
10 units
- Mounting rail 0.5 m
- Profile screw for mounting rail,
50 units
- Sealing cap M12 for IP67
modules, 12 mm outer diameter,
without O-ring, 10 units
- Sealing cap M12 for IP67
modules, 15 mm outer diameter,
with O-ring, 10 units
- Labels 10 mm x 5 mm RAL9016, for
I/O devices with 2x M12 L-coded
power connectors; 5 frames with
40 labels each
- Labels 10 mm x 7 mm Ti-grey, for
I/O devices with 2x M12 A-coded
power connectors; 5 frames with
40 labels each

6ES7148-6CB00-0AA0**6ES7194-6CA00-0AA0****6ES7194-6HB00-0AA0****6ES7194-6GA00-0AA0****6ES7194-6MA00-0AA0****3RX9802-0AA00****3RK1901-1KA00****6ES7194-2BA00-0AA0****3RT2900-1SB10****PROFINET M12 connection plug,
for user assembly**Connector for PROFINET, 4-core,
shielded**3RK1902-2DA00**

IE M12 plug PRO connector

- 1 unit
- 8 units

6GK1901-0DB10-6AA0
6GK1901-0DB10-6AA8IE FC M12 plug PRO connector,
for user assembly

- 1 unit
- 8 units

6GK1901-0DB20-6AA0
6GK1901-0DB20-6AA8**M12 connection plug for 24 V DC
load power supply**Connection socket for
24 V DC infeed;
4-pin, A-coded, 3 units**6GK1907-0DC10-6AA3**Connector for loop-through
of 24 V DC;
4-pin, A-coded, 3 units**6GK1907-0DB10-6AA3****Power M12 plug PRO**Connector for 24 V DC supply
voltage, with installation
instructions, 4-pin, L-coded, 1 unit**6GK1906-0EA00****Power M12 cable connector PRO**Connection socket for 24 V DC
supply voltage, 4-pin, L-coded,
with installation instructions, 1 unit**6GK1906-0EB00****M12 circular connector**Can be assembled, for connecting
actuators or sensors, 5-pin, screw
terminal, max. 0.75 mm², A-coded,
max. 4 A

- Straight
- Angled

3RK1902-4BA00-5AA0
3RK1902-4DA00-5AA0**M12 coupling socket**4-pin, screw terminal,
max. 0.75 mm², A-coded,
max. 4 A, angled**3RK1902-4CA00-4AA0****PROFINET bus cable**Preassembled on one side with
1 x M12, D-coded, 4-wire, shielded

- 3 m
- 5 m
- 10 m

3RK1902-2HB30
3RK1902-2HB50
3RK1902-2HC10**IE connecting cable
M12-90/M12-90**Preassembled IE FC TP trailing
cable GP 2 x 2 (PROFINET type C)
with two 4-pin M12 plugs (D-coded)
up to 85 m, degree of protection
IP65/IP67, 90° cable outlet

- Length:
- 0.3 m
 - 0.5 m
 - 1.0 m
 - 1, 5 m
 - 2.0 m
 - 3.0 m
 - 5.0 m
 - 10 m
 - 15 m

6XV1870-8GE30
6XV1870-8GE50
6XV1870-8GH10
6XV1870-8GH15
6XV1870-8GH20
6XV1870-8GH30
6XV1870-8GH50
6XV1870-8GN10
6XV1870-8GN15

Ordering data	Article No.	Article No.	
IE connecting cable M12-180/IE FC RJ45 plug-145 Preassembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with M12 plug (D-coded) and IE FC RJ45 plug, degree of protection IP65/IP67 Length: <ul style="list-style-type: none"> • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1871-5TH20 6XV1871-5TH30 6XV1871-5TH50 6XV1871-5TN10 6XV1871-5TN15	M12-90/M12-90 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket to supply the ET 200 with 24 V DC; 90° cable outlet Length: <ul style="list-style-type: none"> • 0.3 m • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1801-5GE30 6XV1801-5GE50 6XV1801-5GH10 6XV1801-5GH15 6XV1801-5GH20 6XV1801-5GH30 6XV1801-5GH50 6XV1801-5GN10 6XV1801-5GN15
M12-180/M12-180 IE robust connecting cable Preassembled IE FC TP robust food cable 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (D-coded), degree of protection IP69 Length: <ul style="list-style-type: none"> • 1.0 m • 2.0 m • 3.0 m • 5.0 m 	6XV1881-5AH10 6XV1881-5AH20 6XV1881-5AH30 6XV1881-5AH50	M12-90/M12-90 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with L-coded, 4-pin M12 plug and L-coded, 4-pin M12 socket, both sides angled 90°, to supply terminal devices with 24 V DC Length: <ul style="list-style-type: none"> • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1801-6GE50 6XV1801-6GH10 6XV1801-6GH15 6XV1801-6GH20 6XV1801-6GH30 6XV1801-6GH50 6XV1801-6GN10 6XV1801-6GN15
M12 Y-cable For double connection of I/O by means of a single cable to ET 200, 5-pin	6ES7194-6KA00-0XA0		
Control line Preassembled on one side with 1 x M12 plug angled, 5-pin, 5 x 0.34 mm ² , A-coded, max. 4 A, PUR casing, black <ul style="list-style-type: none"> • 1.5 m • 5 m • 10 m Preassembled, 1 x M12 cable box straight, 1 x M12 plug, 3 x 0.34 mm ² , A-coded, max. 4 A, PUR casing, black	3RK1902-4HB15-5AA0 3RK1902-4HB50-5AA0 3RK1902-4HC01-5AA0 3RK1902-4PB15-3AA0		
IO-Link connecting cables Between IO-Link master and reader, on both sides with M12 plug, 4-pin <ul style="list-style-type: none"> • 5 m • 10 m 	6GT2891-4MH50 6GT2891-4MN10		
Energy cable 4 x 1.5 Trailable power cable, with 4 copper cores (1.5 mm ²) for connecting to M12 plug-in connector; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1801-2B		
		M12-180/M12-180 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with L-coded, 4-pin M12 plug and L-coded, 4-pin M12 socket to supply terminal devices with 24 V DC Length: <ul style="list-style-type: none"> • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1801-6DE50 6XV1801-6DH10 6XV1801-6DH15 6XV1801-6DH20 6XV1801-6DH30 6XV1801-6DH50 6XV1801-6DN10 6XV1801-6DN15
		M12-180/M12-180 M12 robust power connecting cable Flexible 4-core power connecting cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket to supply IP69 components with 24 V DC; Length: <ul style="list-style-type: none"> • 1.0 m • 2.0 m • 3.0 m • 5.0 m 	6XV1801-5AH10 6XV1801-5AH20 6XV1801-5AH30 6XV1801-5AH50

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > Digital I/O devices****Technical specifications**

Article number	6ES7141-6BG00-0BB0 ET 200eco PN, DI 8x24VDC, M12-L	6ES7141-6BH00-0BB0 ET 200eco PN, DI 16x24VDC, M12-L
General information		
Product function		
• Isochronous mode	Yes	Yes
• Prioritized startup	Yes	Yes
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V17 or higher with HSP 0363	STEP 7 V17 or higher with HSP 0363
• PROFINET from GSD version/ GSD revision	GSDML V2.3.x	GSDML V2.3.x
• Multi Fieldbus Configuration Tool (MFCT)	from V1.3 SP1	from V1.3 SP1
Operating mode		
• DI	Yes	Yes
• Counter	No	No
• MSI	Yes	Yes
Supply voltage		
Load voltage 1L+		
• Rated value (DC)	24 V	24 V
• Reverse polarity protection	Yes; Against destruction; encoder power supply outputs applied with reversed polarity	Yes; Against destruction; encoder power supply outputs applied with reversed polarity
Input current		
Current consumption (rated value) from load voltage 1L+ (unswitched voltage)	85 mA; without load 12 A; Maximum value	90 mA; without load 12 A; Maximum value
from load voltage 2L+, max.	12 A; Maximum value	12 A; Maximum value
Encoder supply		
Number of outputs	8	8
Hardware configuration		
Submodules		
• Number of configurable submodules, max.	2	2
Digital inputs		
Number of digital inputs	8	16
Digital inputs, parameterizable	Yes	Yes
Source/sink input	P-reading	P-reading
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes
Number of simultaneously controllable inputs		
all mounting positions		
- up to 60 °C, max.	8	16
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal "0"	-30 to +5 V	-30 to +5 V
• for signal "1"	+11 to +30V	+11 to +30V
Input current		
• for signal "1", typ.	2.4 mA	2.4 mA
Input delay (for rated value of input voltage) for standard inputs		
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
Cable length		
• unshielded, max.	30 m	30 m
Encoder		
Connectable encoders		
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA
Interfaces		
Number of PROFINET interfaces	1	1

Technical specifications

Article number	6ES7141-6BG00-0BB0 ET 200eco PN, DI 8x24VDC, M12-L	6ES7141-6BH00-0BB0 ET 200eco PN, DI 16x24VDC, M12-L
1. Interface		
Interface type	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
Interface types		
• M12 port	Yes; 2x M12, 4-pin, D-coded	Yes; 2x M12, 4-pin, D-coded
• Number of ports	2	2
• integrated switch	Yes	Yes
Protocols		
• PROFINET IO Device	Yes	Yes
• Open IE communication	Yes	Yes
Interface types		
M12 port		
• Autonegotiation	Yes	Yes
• Autocrossing	Yes	Yes
• Transmission rate, max.	100 Mbit/s	100 Mbit/s
Protocols		
Supports protocol for PROFINET IO	Yes	Yes
PROFIsafe	No	No
EtherNet/IP	Yes	Yes
Modbus TCP	Yes	Yes
PROFINET IO Device		
Services		
- IRT	Yes; 250 µs to 4 ms in 125 µs frame	Yes; 250 µs to 4 ms in 125 µs frame
- Prioritized startup	Yes	Yes
Redundancy mode		
• PROFINET system redundancy (S2)	Yes	Yes
• PROFINET system redundancy (R1)	No	No
• H-Sync forwarding	Yes	Yes
Media redundancy		
- MRP	Yes	Yes
EtherNet/IP		
Services		
- CIP Implicit Messaging	Yes	Yes
- CIP Explicit Messaging	Yes	Yes
- CIP Safety	No	No
- Shared device	Yes; 2x EtherNet/IP Scanner	Yes; 2x EtherNet/IP Scanner
- Number of scanners with shared device, max.	2	2
Updating times		
- Requested Packet Interval (RPI)	2 ms	2 ms
Redundancy mode		
- DLR (Device Level Ring)	No	No
Address area		
- Address space per module, max.	20 byte	20 byte
- LargeForwardOpen (Class3)	No	No
Modbus TCP		
Services		
- read coils (code=1)	Yes	Yes
- read discrete inputs (code=2)	Yes	Yes
- Read Holding Registers (Code=3)	Yes	Yes
- write single coil (code=5)	Yes	Yes
- write multiple coils (code=15)	Yes	Yes
- Write Multiple Registers (Code=16)	Yes	Yes
- Parameter change by master	No	No
- Modbus TCP Security Protocol	No	No
Address space per station		
- Address space per station, max.	20 byte	20 byte
- Access-consistent address space	2 byte	2 byte

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > Digital I/O devices****Technical specifications**

Article number	6ES7141-6BG00-0BB0 ET 200eco PN, DI 8x24VDC, M12-L	6ES7141-6BH00-0BB0 ET 200eco PN, DI 16x24VDC, M12-L
Updating time		
- I/O request interval	2 ms	2 ms
Connections		
- Number of connections per slave	12	12
Open IE communication		
• TCP/IP	Yes; (only EtherNet/IP or Modbus TCP)	Yes; (only EtherNet/IP or Modbus TCP)
• SNMP	Yes	Yes
• LLDP	Yes	Yes
• ARP	Yes	Yes
Isochronous mode		
Equidistance	Yes	Yes
shortest clock pulse	250 µs	250 µs
max. cycle	4 ms	4 ms
Interrupts/diagnostics/ status information		
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable
• Maintenance interrupt	Yes; Parameterizable	Yes; Parameterizable
• Hardware interrupt	Yes; Parameterizable	Yes; Parameterizable
Diagnoses		
• Diagnostic information readable	Yes	Yes
• Monitoring the supply voltage	Yes	Yes
- parameterizable	Yes	Yes
• Wire-break	Yes; DI, input current < 0.3 mA, per channel	Yes; DI, input current < 0.3 mA, per channel
• Short-circuit encoder supply	Yes; Per channel group	Yes; Per channel group
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED
• NS LED	Yes; green/red LED	Yes; green/red LED
• MS LED	Yes; green/red LED	Yes; green/red LED
• IO LED	Yes; red/green/yellow LEDs	Yes; red/green/yellow LEDs
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• Connection display LINK TX/RX	Yes; green LED, only link	Yes; green LED, only link
Potential separation		
between the load voltages	Yes	Yes
between Ethernet and electronics	Yes	Yes
Potential separation channels		
• between the channels	No	No
• between the channels and the power supply of the electronics	No	No
Degree and class of protection		
IP degree of protection	IP65/67/69K	IP65/67/69K
Standards, approvals, certificates		
Suitable for safety-related tripping of standard modules	Yes; From FS01	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules		
• Performance level according to ISO 13849-1	PL d	PL d
• Category according to ISO 13849-1	Cat. 3	Cat. 3
• SIL acc. to IEC 62061	SIL 2	SIL 2
Use in hazardous areas		
• Explosion protection category for gas	ATEX, UKEX, IECEx, CCCEX for Zone 2	ATEX, UKEX, IECEx, CCCEX for Zone 2
• Explosion protection category for dust	ATEX, UKEX, IECEx, CCCEX for Zone 22	ATEX, UKEX, IECEx, CCCEX for Zone 22

Technical specifications

Article number	6ES7141-6BG00-0BB0 ET 200eco PN, DI 8x24VDC, M12-L	6ES7141-6BH00-0BB0 ET 200eco PN, DI 16x24VDC, M12-L	
Ambient conditions			
Ambient temperature during operation			
• min.	-40 °C	-40 °C	
• max.	60 °C	60 °C	
Altitude during operation relating to sea level			
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions	
connection method			
Design of electrical connection	4/5-pin M12 circular connectors	4/5-pin M12 circular connectors	
Design of electrical connection for the inputs and outputs	M12, 5-pin, A-coded	M12, 5-pin, A-coded	
Design of electrical connection for supply voltage	M12, 4-pin, L-coded	M12, 4-pin, L-coded	
Dimensions			
Width	45 mm	45 mm	
Height	200 mm	200 mm	
Depth	48 mm	48 mm	
Weights			
Weight, approx.	780 g	780 g	
Article number	6ES7141-6BF00-0AB0 ET 200eco PN, 8DI, DC24V, 4xM12	6ES7141-6BG00-0AB0 ET 200eco PN, 8DI, DC24V, 8xM12	6ES7141-6BH00-0AB0 ET 200eco PN, 16DI, DC24V, 8xM12
Supply voltage			
Rated value (DC)	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes
Input current			
Current consumption, typ.	100 mA	100 mA	100 mA
from supply voltage 1L+, max.	4 A	4 A	4 A
Encoder supply			
Number of outputs	4	8	8
Digital inputs			
Number of digital inputs	8	8	16
• in groups of	2	1	2
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes	Yes
Number of simultaneously controllable inputs			
all mounting positions			
- up to 60 °C, max.	8	8	16
Input voltage			
• Rated value (DC)	24 V	24 V	24 V
• for signal *0*	-3 to +5V	-3 to +5V	-3 to +5V
• for signal *1*	+11 to +30V	+11 to +30V	+11 to +30V
Input current			
• for signal *1*, typ.	7 mA	7 mA	7 mA
Cable length			
• unshielded, max.	30 m	30 m	30 m
Encoder			
Connectable encoders			
• 2-wire sensor	Yes	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA	1.5 mA
Interfaces			
Transmission procedure	100BASE-TX	100BASE-TX	100BASE-TX
Number of PROFINET interfaces	1	1	1

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > Digital I/O devices****Technical specifications**

Article number	6ES7141-6BF00-0AB0 ET 200eco PN, 8DI, DC24V, 4xM12	6ES7141-6BG00-0AB0 ET 200eco PN, 8DI, DC24V, 8xM12	6ES7141-6BH00-0AB0 ET 200eco PN, 16DI, DC24V, 8xM12
1. Interface			
Interface types			
• M12 port	Yes	Yes	Yes
• integrated switch	Yes	Yes	Yes
Interface types			
M12 port			
• Autonegotiation	Yes	Yes	Yes
• Autocrossing	Yes	Yes	Yes
• Transmission rate, max.	100 Mbit/s	100 Mbit/s	100 Mbit/s
Protocols			
Supports protocol for PROFINET IO	Yes	Yes	Yes
PROFINET CBA	No	No	No
PROFIsafe	No	No	No
PROFINET IO Device			
Services			
- IRT with the option "high flexibility"	Yes	Yes	Yes
- Prioritized startup	Yes	Yes	Yes
Redundancy mode			
Media redundancy			
- MRP	Yes	Yes	Yes
Open IE communication			
• TCP/IP	No	No	No
• SNMP	Yes	Yes	Yes
• DCP	Yes	Yes	Yes
• LLDP	Yes	Yes	Yes
• ping	Yes	Yes	Yes
• ARP	Yes	Yes	Yes
Interrupts/diagnostics/ status information			
Diagnostics function	Yes	Yes	Yes
Alarms			
• Diagnostic alarm	Yes	Yes	Yes
Diagnoses			
• Diagnostic information readable	Yes	Yes	Yes
• Monitoring the supply voltage	Yes; green "ON" LED	Yes; green "ON" LED	Yes; green "ON" LED
• Wire-break in signal transmitter cable	Yes	Yes	Yes
• Short-circuit encoder supply	Yes; Per channel group	Yes; Per channel group	Yes; Per channel group
• Group error	Yes; Red/yellow "SF/MT" LED	Yes; Red/yellow "SF/MT" LED	Yes; Red/yellow "SF/MT" LED
Potential separation			
between the load voltages	Yes	Yes	Yes
between load voltage and all other switching components	No	No	No
between Ethernet and electronics	Yes	Yes	Yes
Potential separation channels			
• between the channels	No	No	No
Degree and class of protection			
IP degree of protection	IP65/67	IP65/67	IP65/67
Standards, approvals, certificates			
Use in hazardous areas			
• Explosion protection category for gas	ATEX II 3G Ex nA II T4	ATEX II 3G Ex nA II T4	ATEX II 3G Ex nA II T4
• Explosion protection category for dust	ATEX II 3D Ex tc IIIC T90°C Dc	ATEX II 3D Ex tc IIIC T90°C Dc	ATEX II 3D Ex tc IIIC T90°C Dc
connection method			
Design of electrical connection	4/5-pin M12 circular connectors	4/5-pin M12 circular connectors	4/5-pin M12 circular connectors
Dimensions			
Width	30 mm	60 mm	60 mm
Height	200 mm	175 mm	175 mm
Depth	49 mm	49 mm	49 mm
Weights			
Weight, approx.	550 g	910 g	910 g

Technical specifications

Article number	6ES7142-6BG00-0BB0 ET 200eco PN, DQ 8x24VDC/0,5A, M12-L	6ES7142-6BR00-0BB0 ET 200eco PN, DQ 8x24VDC/2A, M12-L
General information		
Product function		
• Isochronous mode	Yes	Yes
• Prioritized startup	Yes	Yes
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V17 or higher with HSP 0363	STEP 7 V17 or higher with HSP 0363
• PROFINET from GSD version/ GSD revision	GSDML V2.3.x	GSDML V2.3.x
• Multi Fieldbus Configuration Tool (MFCT)	from V1.3 SP1	from V1.3 SP1
Operating mode		
• DQ	Yes	Yes
• MSO	Yes	Yes
Supply voltage		
Load voltage 1L+		
• Rated value (DC)	24 V	24 V
• Reverse polarity protection	Yes	Yes
Load voltage 2L+		
• Rated value (DC)	24 V	24 V
• Reverse polarity protection	Yes; against destruction; load increasing	Yes; against destruction
Input current		
Current consumption (rated value)	65 mA; without load	65 mA; without load
from load voltage 1L+ (unswitched voltage)	12 A; Maximum value	12 A; Maximum value
from load voltage 2L+, max.	12 A; Maximum value	12 A; Maximum value
Hardware configuration		
Submodules		
• Number of configurable submodules, max.	2	2
Digital outputs		
Number of digital outputs	8	8
Current-sourcing	Yes	Yes
Short-circuit protection	Yes; per channel, electronic	Yes; per channel, electronic
Limitation of inductive shutdown voltage to	Typ. 2L+ (-52 V)	Type -14 V
Controlling a digital input	Yes	Yes
Switching capacity of the outputs		
• with resistive load, max.	0.5 A	2 A
• with inductive load, max.	0.5 A	2 A
• on lamp load, max.	5 W	10 W
Load resistance range		
• lower limit	48 Ω	12 Ω
• upper limit	4 kΩ	4 kΩ
Output voltage		
• for signal "1", min.	2L+ (-0,8 V)	2L+ (-0,8 V)
Output current		
• for signal "1" rated value	0.5 A	2 A
• for signal "0" residual current, max.	0.1 mA	0.2 mA
Parallel switching of two outputs		
• for uprating	No	No
• for redundant control of a load	Yes	Yes
Switching frequency		
• with resistive load, max.	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz
• on lamp load, max.	1 Hz	1 Hz
Total current of the outputs		
• Current per module, max.	4 A	8 A
Cable length		
• unshielded, max.	30 m	30 m

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > Digital I/O devices****Technical specifications**

Article number	6ES7142-6BG00-0BB0 ET 200eco PN, DQ 8x24VDC/0,5A, M12-L	6ES7142-6BR00-0BB0 ET 200eco PN, DQ 8x24VDC/2A, M12-L
Interfaces		
Number of PROFINET interfaces	1	1
1. Interface		
Interface type	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
Interface types		
• M12 port	Yes; 2x M12, 4-pin, D-coded	Yes; 2x M12, 4-pin, D-coded
• Number of ports	2	2
• integrated switch	Yes	Yes
Protocols		
• PROFINET IO Device	Yes	Yes
• Open IE communication	Yes	Yes
Interface types		
M12 port		
• Autonegotiation	Yes	Yes
• Autocrossing	Yes	Yes
• Transmission rate, max.	100 Mbit/s	100 Mbit/s
Protocols		
Supports protocol for PROFINET IO	Yes	Yes
PROFIsafe	No	No
EtherNet/IP	Yes	Yes
Modbus TCP	Yes	Yes
PROFINET IO Device		
Services		
- IRT	Yes; 250 µs to 4 ms in 125 µs frame	Yes; 250 µs to 4 ms in 125 µs frame
- Prioritized startup	Yes	Yes
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	2	2
Redundancy mode		
• PROFINET system redundancy (S2)	Yes	Yes
• PROFINET system redundancy (R1)	No	No
• H-Sync forwarding	Yes	Yes
Media redundancy		
- MRP	Yes	Yes
EtherNet/IP		
Services		
- CIP Implicit Messaging	Yes	Yes
- CIP Explicit Messaging	Yes	Yes
- CIP Safety	No	No
- Shared device	Yes; 2x EtherNet/IP Scanner	Yes; 2x EtherNet/IP Scanner
- Number of scanners with shared device, max.	2	2
Updating times		
- Requested Packet Interval (RPI)	2 ms	2 ms
Redundancy mode		
- DLR (Device Level Ring)	No	No
Address area		
- Address space per module, max.	20 byte	20 byte
- LargeForwardOpen (Class3)	No	No
Modbus TCP		
Services		
- read coils (code=1)	Yes	Yes
- read discrete inputs (code=2)	Yes	Yes
- Read Holding Registers (Code=3)	Yes	Yes
- write single coil (code=5)	Yes	Yes
- write multiple coils (code=15)	Yes	Yes
- Write Multiple Registers (Code=16)	Yes	Yes
- Parameter change by master	No	No
- Modbus TCP Security Protocol	No	No

Technical specifications

Article number	6ES7142-6BG00-0BB0 ET 200eco PN, DQ 8x24VDC/0,5A, M12-L	6ES7142-6BR00-0BB0 ET 200eco PN, DQ 8x24VDC/2A, M12-L
Address space per station		
- Address space per station, max.	20 byte	20 byte
- Access-consistent address space	2 byte	2 byte
Updating time		
- I/O request interval	2 ms	2 ms
Connections		
- Number of connections per slave	12	12
Open IE communication		
• TCP/IP	Yes; (only EtherNet/IP or Modbus TCP)	Yes; (only EtherNet/IP or Modbus TCP)
• SNMP	Yes	Yes
• LLDP	Yes	Yes
• ARP	Yes	Yes
Isochronous mode		
Equidistance	Yes	Yes
shortest clock pulse	250 µs	250 µs
max. cycle	4 ms	4 ms
Interrupts/diagnostics/ status information		
Substitute values connectable	Yes	Yes
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable
• Maintenance interrupt	Yes; Parameterizable	Yes; Parameterizable
Diagnoses		
• Diagnostic information readable	Yes	Yes
• Monitoring the supply voltage	Yes	Yes
- parameterizable	Yes	Yes
• Wire-break	Yes	Yes
• Short-circuit	Yes; Outputs to M; channel by channel	Yes; Outputs to M; channel by channel
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED
• NS LED	Yes; green/red LED	Yes; green/red LED
• MS LED	Yes; green/red LED	Yes; green/red LED
• IO LED	Yes; red/green/yellow LEDs	Yes; red/green/yellow LEDs
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• For load voltage monitoring	Yes; green LED	Yes; green LED
• Connection display LINK TX/RX	Yes; green LED, only link	Yes; green LED, only link
Potential separation		
between the load voltages	Yes	Yes
between Ethernet and electronics	Yes	Yes
Potential separation channels		
• between the channels	No	No
• between the channels and the power supply of the electronics	Yes	Yes
Degree and class of protection		
IP degree of protection	IP65/67/69K	IP65/67/69K
Standards, approvals, certificates		
Suitable for safety-related tripping of standard modules	Yes; From FS02	Yes; From FS02

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > Digital I/O devices****Technical specifications**

Article number	6ES7142-6BG00-0BB0 ET 200eco PN, DQ 8x24VDC/0,5A, M12-L		6ES7142-6BR00-0BB0 ET 200eco PN, DQ 8x24VDC/2A, M12-L		
Highest safety class achievable for safety-related tripping of standard modules					
• Performance level according to ISO 13849-1	PL d		PL d		
• Category according to ISO 13849-1	Cat. 3		Cat. 3		
• SIL acc. to IEC 62061	SIL 2		SIL 2		
Use in hazardous areas					
• Explosion protection category for gas	ATEX, UKEX, IECEx, CCCEX for Zone 2		ATEX, UKEX, IECEx, CCCEX for Zone 2		
• Explosion protection category for dust	ATEX, UKEX, IECEx, CCCEX for Zone 22		ATEX, UKEX, IECEx, CCCEX for Zone 22		
Ambient conditions					
Ambient temperature during operation					
• min.	-40 °C		-40 °C		
• max.	60 °C		60 °C		
Altitude during operation relating to sea level					
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions		Up to max. 5 000 m, at installation height > 2 000 m additional restrictions		
connection method					
Design of electrical connection	4/5-pin M12 circular connectors		4/5-pin M12 circular connectors		
Design of electrical connection for the inputs and outputs	M12, 5-pin, A-coded		M12, 5-pin, A-coded		
Design of electrical connection for supply voltage	M12, 4-pin, L-coded		M12, 4-pin, L-coded		
Dimensions					
Width	45 mm		45 mm		
Height	200 mm		200 mm		
Depth	48 mm		48 mm		
Weights					
Weight, approx.	780 g		780 g		
Article number	6ES7142-6BF50-0AB0 ET 200eco PN, 8DO, DC24V/0,5A, 4xM12	6ES7142-6BF00-0AB0 ET 200eco PN, 8DO, DC24V/1,3A, 4xM12	6ES7142-6BG00-0AB0 ET 200eco PN, 8DO, DC24V/1,3A, 8xM12	6ES7142-6BR00-0AB0 ET 200eco PN, 8 DO, DC24V/2A, 8xM12	6ES7142-6BH00-0AB0 ET 200eco PN, 16DO DC24V/1,3A, 8xM12
Supply voltage					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Reverse polarity protection	Yes	Yes	Yes	Yes	Yes
Load voltage 1L+					
• Rated value (DC)	24 V	24 V	24 V	24 V	24 V
• Reverse polarity protection	Yes	Yes	Yes	Yes	Yes
Load voltage 2L+					
• Rated value (DC)	24 V	24 V	24 V	24 V	24 V
• Reverse polarity protection	Yes	Yes	Yes	Yes	Yes
Input current					
Current consumption, typ.	100 mA	100 mA	100 mA	100 mA	100 mA
from supply voltage 1L+, max.	4 A	4 A	4 A	4 A	4 A
from load voltage 1L+ (unswitched voltage)	100 mA	4 A	4 A	4 A	4 A
from load voltage 2L+, max.	4 A	4 A	4 A	4 A	4 A
Digital outputs					
Number of digital outputs	8	8	8	8	16
• in groups of	8	4	4	4	8
Short-circuit protection	Yes	Yes	Yes	Yes	Yes
Limitation of inductive shutdown voltage to	Typ. (L1+, L2+) -47 V	Typ. (L1+, L2+) -47 V	Typ. (L1+, L2+) -47 V	Typ. (L1+, L2+) -47 V	Typ. (L1+, L2+) -47 V
Controlling a digital input	Yes	Yes	Yes	Yes	Yes
Switching capacity of the outputs					
• on lamp load, max.	5 W	5 W	5 W	10 W	5 W

Technical specifications

Article number	6ES7142-6BF50-0AB0	6ES7142-6BF00-0AB0	6ES7142-6BG00-0AB0	6ES7142-6BR00-0AB0	6ES7142-6BH00-0AB0
	ET 200eco PN, 8DO, DC24V/0,5A, 4xM12	ET 200eco PN, 8DO, DC24V/1,3A, 4xM12	ET 200eco PN, 8DO, DC24V/1,3A, 8xM12	ET 200eco PN, 8 DO, DC24V/2A, 8xM12	ET 200eco PN, 16DO DC24V/1,3A, 8xM12
Output current					
• for signal "1" rated value	0.5 A	1.3 A; Maximum	1.3 A; Maximum	2 A	1.3 A; Maximum
• for signal "0" residual current, max.	1.5 mA	1.5 mA	1.5 mA	1.5 mA	1.5 mA
Parallel switching of two outputs					
• for uprating	No	No	No	No	No
• for redundant control of a load	Yes	Yes	Yes	Yes	Yes
Switching frequency					
• with resistive load, max.	100 Hz	100 Hz	100 Hz	100 Hz	100 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz	0.5 Hz
• on lamp load, max.	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz
Total current of the outputs (per group)					
all mounting positions					
- up to 55 °C, max.		3.9 A			
- up to 60 °C, max.	4 A	2.6 A	3.9 A	3.9 A	3.9 A
Cable length					
• unshielded, max.	30 m	30 m	30 m	30 m	30 m
Interfaces					
Transmission procedure	100BASE-TX	100BASE-TX	100BASE-TX	100BASE-TX	100BASE-TX
Number of PROFINET interfaces	1	1	1	1	1
1. Interface					
Interface types					
• M12 port		Yes			
• integrated switch	Yes	Yes	Yes	Yes	Yes
Interface types					
M12 port					
• Autonegotiation	Yes	Yes	Yes	Yes	Yes
• Autocrossing	Yes	Yes	Yes	Yes	Yes
• Transmission rate, max.	100 Mbit/s	100 Mbit/s	100 Mbit/s	100 Mbit/s	100 Mbit/s
Protocols					
Supports protocol for PROFINET IO	Yes	Yes	Yes	Yes	Yes
PROFINET CBA	No	No	No	No	No
PROFIsafe	No	No	No	No	No
PROFINET IO Device					
Services					
- IRT with the option "high flexibility"	Yes	Yes	Yes	Yes	Yes
- Prioritized startup	Yes	Yes	Yes	Yes	Yes
Redundancy mode					
Media redundancy					
- MRP	Yes	Yes	Yes	Yes	Yes
Open IE communication					
• TCP/IP	No	No	No	No	No
• SNMP	Yes	Yes	Yes	Yes	Yes
• DCP	Yes	Yes	Yes	Yes	Yes
• LLDP	Yes	Yes	Yes	Yes	Yes
• ping	Yes	Yes	Yes	Yes	Yes
• ARP	Yes	Yes	Yes	Yes	Yes
Interrupts/diagnostics/status information					
Diagnostics function	Yes	Yes	Yes	Yes	Yes
Alarms					
• Diagnostic alarm	Yes	Yes	Yes	Yes	Yes

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN

I/O devices > Digital I/O devices

Technical specifications

Article number	6ES7142-6BF50-0AB0	6ES7142-6BF00-0AB0	6ES7142-6BG00-0AB0	6ES7142-6BR00-0AB0	6ES7142-6BH00-0AB0
	ET 200eco PN, 8DO, DC24V/0,5A, 4xM12	ET 200eco PN, 8DO, DC24V/1,3A, 4xM12	ET 200eco PN, 8DO, DC24V/1,3A, 8xM12	ET 200eco PN, 8 DO, DC24V/2A, 8xM12	ET 200eco PN, 16DO DC24V/1,3A, 8xM12
Diagnoses					
• Diagnostic information readable	Yes	Yes	Yes	Yes	Yes
• Monitoring the supply voltage	Yes; green "ON" LED	Yes; green "ON" LED	Yes; green "ON" LED	Yes; green "ON" LED	Yes; green "ON" LED
• Wire-break in actuator cable	Yes	Yes	Yes	Yes	Yes
• Short-circuit	Yes	Yes	Yes	Yes	Yes
• Group error	Yes; Red/yellow "SF/MT" LED	Yes; Red/yellow "SF/MT" LED	Yes; Red/yellow "SF/MT" LED	Yes; Red/yellow "SF/MT" LED	Yes; Red/yellow "SF/MT" LED
Potential separation					
between the load voltages	Yes	Yes	Yes	Yes	Yes
between load voltage and all other switching components	No	No	No	No	No
between Ethernet and electronics	Yes	Yes	Yes	Yes	Yes
Potential separation channels					
• between the channels	No	No	No	No	No
Degree and class of protection					
IP degree of protection	IP65/67	IP65/67	IP65/67	IP65/67	IP65/67
Standards, approvals, certificates					
Suitable for safety-related tripping of standard modules	Yes	Yes	Yes	Yes	Yes
Highest safety class achievable for safety-related tripping of standard modules					
• Performance level according to ISO 13849-1	PL d	PL d	PL d	PL d	PL d
• Category according to ISO 13849-1	Cat. 3	Cat. 3	Cat. 3	Cat. 3	Cat. 3
• SIL acc. to IEC 62061	SIL 2	SIL 2	SIL 2	SIL 2	SIL 2
Use in hazardous areas					
• Explosion protection category for gas	ATEX II 3G Ex nA II T4	ATEX II 3G Ex nA II T4	ATEX II 3G Ex nA II T4	ATEX II 3G Ex nA II T4	ATEX II 3G Ex nA II T4
• Explosion protection category for dust	ATEX II 3D Ex tc IIIC T90°C Dc	ATEX II 3D Ex tc IIIC T90°C Dc	ATEX II 3D Ex tc IIIC T90°C Dc	ATEX II 3D Ex tc IIIC T90°C Dc	ATEX II 3D Ex tc IIIC T90°C Dc
connection method					
Design of electrical connection	4/5-pin M12 circular connectors	4/5-pin M12 circular connectors	4/5-pin M12 circular connectors	4/5-pin M12 circular connectors	4/5-pin M12 circular connectors
Dimensions					
Width	30 mm	30 mm	60 mm	60 mm	60 mm
Height	200 mm	200 mm	175 mm	175 mm	175 mm
Depth	49 mm	49 mm	49 mm	49 mm	49 mm
Weights					
Weight, approx.	550 g	550 g	910 g	910 g	910 g

Article number	6ES7143-6BH00-0BB0
	ET 200eco PN, DIQ 16x24VDC/2A, M12-L
General information	
Product function	
• Isochronous mode	No
• Prioritized startup	Yes
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V17 or higher with HSP 0363
• PROFINET from GSD version/GSD revision	GSDML V2.3.x
• Multi Fieldbus Configuration Tool (MFCT)	from V1.3 SP1
Operating mode	
• DI	Yes
• Counter	No
• DQ	Yes
• MSI	Yes
• MSO	Yes

Article number	6ES7143-6BH00-0BB0
	ET 200eco PN, DIQ 16x24VDC/2A, M12-L
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; Against destruction; encoder power supply outputs applied with reversed polarity, loads pick up
Load voltage 2L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Input current	
Current consumption (rated value) from load voltage 1L+ (unswitched voltage)	90 mA; without load 12 A; Maximum value
from load voltage 2L+, max.	12 A; Maximum value

Technical specifications

Article number	6ES7143-6BH00-0BB0 ET 200eco PN, DIQ 16x24VDC/2A, M12-L
Encoder supply	
Number of outputs	8
Hardware configuration	
Submodules	
• Number of configurable submodules, max.	2
Digital inputs	
Number of digital inputs	16; Parameterizable as DIQ
• in groups of	8
Digital inputs, parameterizable	Yes
Source/sink input	P-reading
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Number of simultaneously controllable inputs	
all mounting positions	
- up to 60 °C, max.	16
Input voltage	
• Rated value (DC)	24 V
• for signal *0*	-3 to +5V
• for signal *1*	+11 to +30V
Input current	
• for signal *1*, typ.	2.4 mA
Input delay (for rated value of input voltage) for standard inputs	
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
Cable length	
• unshielded, max.	30 m
Digital outputs	
Number of digital outputs	16; Parameterizable as DIQ
• in groups of	8; 2 load groups for 8 outputs each
Current-sourcing	Yes
Short-circuit protection	Yes; per channel, electronic
Limitation of inductive shutdown voltage to	0.5 A: Type 1L+ (-70 V) / 2 A: Type (-18 V)
Controlling a digital input	Yes
Switching capacity of the outputs	
• with resistive load, max.	0.5 A / 2 A
• with inductive load, max.	0.5 A / 2 A
• on lamp load, max.	0.5 A: 5 W / 2 A 10 W
Load resistance range	
• lower limit	0.5 A: 48 ohms / 2 A: 12 ohms
• upper limit	4 kΩ
Output voltage	
• for signal *1*, min.	1L+ (-0.8 V) / 2L+ (-0.8 V)
Output current	
• for signal *1* rated value	0.5 A / 2 A
• for signal *0* residual current, max.	0.1 mA
Parallel switching of two outputs	
• for uprating	No
• for redundant control of a load	Yes

Article number	6ES7143-6BH00-0BB0 ET 200eco PN, DIQ 16x24VDC/2A, M12-L
Switching frequency	
• with resistive load, max.	0.5 A: 100 Hz / 2 A: 40 Hz
• with inductive load, max.	0.5 Hz
• on lamp load, max.	1 Hz
Total current of the outputs	
• Current per group, max.	1L+: 2 A / 2L+: 6 A
• Current per module, max.	8 A
Cable length	
• unshielded, max.	30 m
Encoder	
Connectable encoders	
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA
Interfaces	
Number of PROFINET interfaces	1
1. Interface	
Interface type	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
Interface types	
• M12 port	Yes; 2x M12, 4-pin, D-coded
• Number of ports	2
• integrated switch	Yes
Protocols	
• PROFINET IO Device	Yes
• Open IE communication	Yes
Interface types	
M12 port	
• Autonegotiation	Yes
• Autocrossing	Yes
• Transmission rate, max.	100 Mbit/s
Protocols	
Supports protocol for PROFINET IO	Yes
PROFIsafe	No
EtherNet/IP	Yes
Modbus TCP	Yes
PROFINET IO Device	
Services	
- IRT	Yes; 250 μs to 4 ms in 125 μs frame
- Prioritized startup	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	2
Redundancy mode	
• PROFINET system redundancy (S2)	Yes
• PROFINET system redundancy (R1)	No
• H-Sync forwarding	Yes
Media redundancy	
- MRP	Yes

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > Digital I/O devices****Technical specifications**

Article number	6ES7143-6BH00-0BB0 ET 200eco PN, DIQ 16x24VDC/2A, M12-L
EtherNet/IP	
Services	
- CIP Implicit Messaging	Yes
- CIP Explicit Messaging	Yes
- CIP Safety	No
- Shared device	Yes; 2x EtherNet/IP Scanner
- Number of scanners with shared device, max.	2
Updating times	
- Requested Packet Interval (RPI)	2 ms
Redundancy mode	
- DLR (Device Level Ring)	No
Address area	
- Address space per module, max.	20 byte
- LargeForwardOpen (Class3)	No
Modbus TCP	
Services	
- read coils (code=1)	Yes
- read discrete inputs (code=2)	Yes
- Read Holding Registers (Code=3)	Yes
- write single coil (code=5)	Yes
- write multiple coils (code=15)	Yes
- Write Multiple Registers (Code=16)	Yes
- Parameter change by master	No
- Modbus TCP Security Protocol	No
Address space per station	
- Address space per station, max.	20 byte
- Access-consistent address space	2 byte
Updating time	
- I/O request interval	2 ms
Connections	
- Number of connections per slave	12
Open IE communication	
• TCP/IP	Yes; (only EtherNet/IP or Modbus TCP)
• SNMP	Yes
• LLDP	Yes
• ARP	Yes
Interrupts/diagnostics/ status information	
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes; Parameterizable
• Maintenance interrupt	Yes; Parameterizable
• Hardware interrupt	Yes; Parameterizable
Diagnoses	
• Diagnostic information readable	Yes
• Monitoring the supply voltage	Yes
- parameterizable	Yes
• Wire-break	Yes; DI, input current < 0.3 mA, per channel
• Short-circuit	Yes; Outputs to M and P; channel by channel
• Short-circuit encoder supply	Yes; Per channel group

Article number	6ES7143-6BH00-0BB0 ET 200eco PN, DIQ 16x24VDC/2A, M12-L
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• NS LED	Yes; green/red LED
• MS LED	Yes; green/red LED
• IO LED	Yes; red/green/yellow LEDs
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• For load voltage monitoring	Yes; green LED
• Connection display LINK TX/RX	Yes; green LED, only link
Potential separation	
between the load voltages	Yes
between Ethernet and electronics	Yes
Potential separation channels	
• between the channels	Yes
• between the channels, in groups of 8	8
• between the channels and the power supply of the electronics	8 channels are non-isolated and 8 channels are isolated from supply voltage 1L+
Degree and class of protection	
IP degree of protection	IP65/67/69K
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Use in hazardous areas	
• Explosion protection category for gas	ATEX, UKEX, IECEx, CCCEX for Zone 2
• Explosion protection category for dust	ATEX, UKEX, IECEx, CCCEX for Zone 22
Ambient conditions	
Ambient temperature during operation	
• min.	-40 °C
• max.	60 °C
Altitude during operation relating to sea level	
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method	
Design of electrical connection	4/5-pin M12 circular connectors
Design of electrical connection for the inputs and outputs	M12, 5-pin, A-coded
Design of electrical connection for supply voltage	M12, 4-pin, L-coded
Dimensions	
Width	45 mm
Height	200 mm
Depth	48 mm
Weights	
Weight, approx.	780 g

Technical specifications

Article number	6ES7147-6BG00-0AB0 ET 200eco PN, 8 DIO, DC24V/1,3A, 8xM12
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Load voltage 2L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes
Input current	
Current consumption, typ.	100 mA
from supply voltage 1L+, max.	4 A
from load voltage 1L+ (unswitched voltage)	4 A
from load voltage 2L+, max.	4 A
Digital inputs	
Number of digital inputs	8
• in groups of	4
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Number of simultaneously controllable inputs	
all mounting positions	
- up to 60 °C, max.	8
Input voltage	
• Rated value (DC)	24 V
• for signal "0"	-3 to +5V
• for signal "1"	+11 to +30V
Input current	
• for signal "1", typ.	7 mA
Cable length	
• unshielded, max.	30 m
Digital outputs	
Number of digital outputs	8
• in groups of	4
Short-circuit protection	Yes; Electronic
Limitation of inductive shutdown voltage to	Typ. (L1+, L2+) -47 V
Controlling a digital input	Yes
Switching capacity of the outputs	
• on lamp load, max.	5 W
Output current	
• for signal "1" rated value	1.3 A; Maximum
• for signal "0" residual current, max.	1.5 mA
Parallel switching of two outputs	
• for uprating	No
• for redundant control of a load	Yes
Switching frequency	
• with resistive load, max.	100 Hz
• with inductive load, max.	0.5 Hz
• on lamp load, max.	1 Hz

Article number	6ES7147-6BG00-0AB0 ET 200eco PN, 8 DIO, DC24V/1,3A, 8xM12
Total current of the outputs (per group)	
all mounting positions	
- up to 60 °C, max.	3.9 A
Cable length	
• unshielded, max.	30 m
Encoder	
Connectable encoders	
• 2-wire sensor	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA
Interfaces	
Transmission procedure	100BASE-TX
Number of PROFINET interfaces	1
1. Interface	
Interface types	
• M12 port	Yes
• integrated switch	Yes
Interface types	
M12 port	
• Autonegotiation	Yes
• Autocrossing	Yes
• Transmission rate, max.	100 Mbit/s
Protocols	
Supports protocol for PROFINET IO	Yes
PROFINET CBA	No
PROFIsafe	No
PROFINET IO Device	
Services	
- IRT with the option "high flexibility"	Yes
- Prioritized startup	Yes
Redundancy mode	
Media redundancy	
- MRP	Yes
Open IE communication	
• TCP/IP	No
• SNMP	Yes
• DCP	Yes
• LLDP	Yes
• ping	Yes
• ARP	Yes
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN

I/O devices > Digital I/O devices

Technical specifications

Article number	6ES7147-6BG00-0AB0 ET 200eco PN, 8 DIO, DC24V/1,3A, 8xM12
Diagnoses	
• Diagnostic information readable	Yes
• Monitoring the supply voltage	Yes; green "ON" LED
• Wire-break in actuator cable	Yes
• Wire-break in signal transmitter cable	Yes
• Short-circuit	Yes
• Short-circuit encoder supply	Yes
• Group error	Yes; Red/yellow "SF/MT" LED
Potential separation	
between the load voltages	Yes
between load voltage and all other switching components	No
between Ethernet and electronics	Yes
Potential separation channels	
• between the channels	No

Article number	6ES7147-6BG00-0AB0 ET 200eco PN, 8 DIO, DC24V/1,3A, 8xM12
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	No
Use in hazardous areas	
• Explosion protection category for gas	ATEX II 3G Ex nA II T4
• Explosion protection category for dust	ATEX II 3D Ex tc IIIC T90°C Dc
connection method	
Design of electrical connection	4/5-pin M12 circular connectors
Dimensions	
Width	60 mm
Height	175 mm
Depth	49 mm
Weights	
Weight, approx.	910 g

Overview



Analog distributed I/O devices with 2x M12 L-coded power connectors and 45 mm width

- 8 analog input signals RTD/TC with 8xM12 connection
- 6 analog input signals U/I and 2 analog input or output signals U/I with 8xM12 connection

Analog I/O devices with 2x M12 A-coded power connectors and 60 mm width

- 8 analog input signals U/I/RTD/TC with 8xM12 connection
- 8 analog input signals RTD/TC with 8xM12 connection
- 4 analog output signals U/I with 4xM12 connection

Ordering data

ET 200eco PN
analog input modules

- 8 AI 4 U/I + 4 RTD/TC; 8 x M12, degree of protection IP67
- 8 AI RTD/TC; 8 x M12, degree of protection IP67
- 8 AI RTD/TC; 8 x M12-L, degree of protection IP67

Article No.

6ES7144-6KD00-0AB0

6ES7144-6KD50-0AB0

6ES7144-6JF00-0BB0

ET 200eco PN
analog output modules

- 4 AQ U/I; 4 x M12, degree of protection IP67

6ES7145-6HD00-0AB0

ET 200eco PN analog
input/output modules

- 6 AI U/I, 2 AI/AQ U/I, 8 x M12, degree of protection IP67

6ES7146-6HF00-0BB0

Accessories

- PD voltage distributor, 24 V DC; 1 X 7/8", 4 X M12
- Terminal block for ET 200eco PN, 10 A insulation displacement terminals
- Spare fuses for terminal block, 10 units
- Mounting rail 0.5 m
- Profile screw for mounting rail, 50 units
- Sealing cap M12 for IP67 modules, 12 mm outer diameter, without O-ring, 10 units
- Sealing cap M12 for IP67 modules, 15 mm outer diameter, with O-ring, 10 units
- Labels 10 mm x 7 mm Ti-grey, for I/O devices with 2x M12 A-coded power connectors; 5 frames with 40 labels each

6ES7148-6CB00-0AA0

6ES7194-6CA00-0AA0

6ES7194-6HB00-0AA0

6ES7194-6GA00-0AA0

6ES7194-6MA00-0AA0

3RX9802-0AA00

3RK1901-1KA00

3RT2900-1SB10

PROFINET M12 connection plug,
for user assembly

Connector for PROFINET, 4-core, shielded

3RK1902-2DA00

IE M12 plug PRO connector

- 1 unit
- 8 units

6GK1901-0DB10-6AA0

6GK1901-0DB10-6AA8

IE FC M12 plug PRO connector, for user assembly

- 1 unit
- 8 units

6GK1901-0DB20-6AA0

6GK1901-0DB20-6AA8

Article No.

M12 connection plug for 24 V DC
load power supply

Connection socket for 24 V DC infeed; 4-pin, A-coded, 3 units

6GK1907-0DC10-6AA3

Connector for loop-through of 24 V DC; 4-pin, A-coded, 3 units

6GK1907-0DB10-6AA3

M12 circular connector

Can be assembled, for connecting actuators or sensors, 5-pin, screw terminal, max. 0.75 mm², A-coded, max. 4 A

- Straight
- Angled

3RK1902-4BA00-5AA0

3RK1902-4DA00-5AA0

M12 coupling socket

4-pin, screw terminal, max. 0.75 mm², A-coded, max. 4 A, angled

3RK1902-4CA00-4AA0

PROFINET bus cable

Preassembled on one side with 1 x M12, D-coded, 4-wire, shielded

- 3 m
- 5 m
- 10 m

3RK1902-2HB30

3RK1902-2HB50

3RK1902-2HC10

IE connecting cable
M12-90/M12-90

Preassembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (D-coded) up to 85 m, degree of protection IP65/IP67, 90° cable outlet
Length:

- 0.3 m
- 0.5 m
- 1.0 m
- 1.5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m

6XV1870-8GE30

6XV1870-8GE50

6XV1870-8GH10

6XV1870-8GH15

6XV1870-8GH20

6XV1870-8GH30

6XV1870-8GH50

6XV1870-8GN10

6XV1870-8GN15

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN

I/O devices > Analog I/O devices

Ordering data	Article No.	Article No.	
IE connecting cable M12-180/IE FC RJ45 plug-145 Preassembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with M12 plug (D-coded) and IE FC RJ45 plug, degree of protection IP65/IP67 Length: <ul style="list-style-type: none"> • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1871-5TH20 6XV1871-5TH30 6XV1871-5TH50 6XV1871-5TN10 6XV1871-5TN15	M12-90/M12-90 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket to supply the ET 200 with 24 V DC; 90° cable outlet Length: <ul style="list-style-type: none"> • 0.3 m • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1801-5GE30 6XV1801-5GE50 6XV1801-5GH10 6XV1801-5GH15 6XV1801-5GH20 6XV1801-5GH30 6XV1801-5GH50 6XV1801-5GN10 6XV1801-5GN15
M12-180/M12-180 IE robust connecting cable Preassembled IE FC TP robust food cable 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (D-coded), degree of protection IP69 Length: <ul style="list-style-type: none"> • 1.0 m • 2.0 m • 3.0 m • 5.0 m 	6XV1881-5AH10 6XV1881-5AH20 6XV1881-5AH30 6XV1881-5AH50	M12-180/M12-180 M12 robust power connecting cable Flexible 4-core power connecting cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket to supply IP69 components with 24 V DC; Length: <ul style="list-style-type: none"> • 1.0 m • 2.0 m • 3.0 m • 5.0 m 	6XV1801-5AH10 6XV1801-5AH20 6XV1801-5AH30 6XV1801-5AH50

10

Technical specifications

Article number	6ES7144-6KD00-0AB0	6ES7144-6KD50-0AB0	6ES7144-6JF00-0BB0
	ET 200eco PN, 8AI; 4 U/I; 4 RTD/TC 8xM12	ET 200eco PN, 8AI RTD/TC 8xM12	ET 200eco PN, AI 8xRTD/TC, M12-L
General information			
Product function			
• Isochronous mode			No
• Prioritized startup			Yes
• Measuring range scalable			Yes
Engineering with			
• STEP 7 TIA Portal configurable/ integrated from version			STEP 7 V17 or higher with HSP 0369
• PROFINET from GSD version/ GSD revision			GSDML V2.4.x
• Multi Fieldbus Configuration Tool (MFCT)			from V1.3 SP1
Operating mode			
• MSI			Yes
CiR - Configuration in RUN			
Calibration possible in RUN			Yes
Supply voltage			
Rated value (DC)	24 V	24 V	
Reverse polarity protection	Yes	Yes; against destruction	
Load voltage 1L+			
• Rated value (DC)			24 V
• Reverse polarity protection			Yes; against destruction
Input current			
Current consumption (rated value)			85 mA; without load
Current consumption, typ. from load voltage 1L+ (unswitched voltage)	110 mA	110 mA	12 A; Maximum value
from load voltage 2L+, max.			12 A; Maximum value

Technical specifications

Article number	6ES7144-6KD00-0AB0	6ES7144-6KD50-0AB0	6ES7144-6JF00-0BB0
	ET 200eco PN, 8AI; 4 U/I; 4 RTD/TC 8xM12	ET 200eco PN, 8AI RTD/TC 8xM12	ET 200eco PN, AI 8xRTD/TC, M12-L
Encoder supply			
Number of outputs	4		
Hardware configuration			
Submodules			
• Number of configurable submodules, max.			2
Analog inputs			
Number of analog inputs	8	8	8
Constant measurement current for resistance-type transmitter, typ.			0.7 mA
Cycle time (all channels), min.			Sum of the basic conversion times and additional processing times (depending on the parameterization of the active channels); for line compensation in case of a three-wire connection, an additional cycle is necessary
Technical unit for temperature measurement adjustable			Yes; Degrees Celsius / degrees Fahrenheit / Kelvin
Input ranges (rated values), voltages			
• 0 to +10 V	Yes		
• 1 V to 5 V	Yes		
• -10 V to +10 V	Yes		
• -80 mV to +80 mV	Yes	Yes	Yes; 16 bit incl. sign
Input ranges (rated values), currents			
• 0 to 20 mA	Yes		
• -20 mA to +20 mA	Yes		
• 4 mA to 20 mA	Yes		
Input ranges (rated values), thermocouples			
• Type B			Yes; 16 bit incl. sign
• Type C			Yes; 16 bit incl. sign
• Type E	Yes	Yes	Yes; 16 bit incl. sign
• Type J	Yes	Yes	Yes; 16 bit incl. sign
• Type K	Yes	Yes	Yes; 16 bit incl. sign
• Type L			Yes; 16 bit incl. sign
• Type N	Yes	Yes	Yes; 16 bit incl. sign
• Type R			Yes; 16 bit incl. sign
• Type S			Yes; 16 bit incl. sign
• Type T			Yes; 16 bit incl. sign
• Type U			Yes; 16 bit incl. sign
Input ranges (rated values), resistance thermometer			
• Ni 100	Yes	Yes	Yes; Standard/climate
• Ni 1000	Yes	Yes	Yes; Standard/climate
• Ni 120	Yes	Yes	Yes; Standard/climate
• Ni 200	Yes	Yes	Yes; Standard/climate
• Ni 500	Yes	Yes	Yes; Standard/climate
• Pt 100	Yes	Yes	Yes; Standard/climate
• Pt 1000	Yes	Yes	Yes; Standard/climate
• Pt 200	Yes	Yes	Yes; Standard/climate
• Pt 500	Yes	Yes	Yes; Standard/climate
Input ranges (rated values), resistors			
• 0 to 150 ohms	Yes	Yes	Yes
• 0 to 300 ohms	Yes	Yes	Yes
• 0 to 600 ohms	Yes	Yes	Yes
• 0 to 3000 ohms	Yes	Yes	Yes
• 0 to 6000 ohms			Yes

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > Analog I/O devices****Technical specifications**

Article number	6ES7144-6KD00-0AB0 ET 200eco PN, 8AI; 4 U/I; 4 RTD/TC 8xM12	6ES7144-6KD50-0AB0 ET 200eco PN, 8AI RTD/TC 8xM12	6ES7144-6JF00-0BB0 ET 200eco PN, AI 8xRTD/TC, M12-L
Thermocouple (TC)			
Temperature compensation			
- parameterizable	Yes	Yes	Yes
- internal temperature compensation	Yes	Yes	Yes
- external temperature compensation with Pt100		Yes	
- external temperature compensation with compensations socket	Yes	Yes	Yes
- dynamic reference temperature value		Yes	Yes
- for definable comparison point temperature		Yes	
- fixed reference temperature			Yes
Cable length			
• shielded, max.	30 m	30 m	30 m
Analog value generation for the inputs			
Analog value display	SIMATIC S7 format	SIMATIC S7 format	SIMATIC S7 format
Measurement principle	integrating	integrating	integrating
Integration and conversion time/resolution per channel			
• Resolution with overrange (bit including sign), max.	16 bit	16 bit	16 bit
• Integration time, parameterizable	Yes	Yes	Yes; channel by channel
• Integration time (ms)	2/16.67/20/100 ms	2/16.67/20/100 ms	0.84 / 16.7 (50) / 20 (60) / 60 (180)
• Basic conversion time, including integration time (ms)			4.50 / 21.5 (54) / 24 (64) / 64 (184)
• Interference voltage suppression for interference frequency f1 in Hz	500 / 60 / 50 / 10 Hz	500 / 60 / 50 / 10 Hz	none / 60 / 50 / 16.7
• Conversion time (per channel)	4 / 19 / 22 / 102 ms	4 / 19 / 22 / 102 ms	
Smoothing of measured values			
• parameterizable	Yes	Yes	Yes
Encoder			
Number of connectable encoders, max.	8	8	
Connection of signal encoders			
• for voltage measurement	Yes		
• for current measurement as 2-wire transducer	Yes		
• for current measurement as 4-wire transducer	Yes		
• for resistance measurement with two-wire connection	Yes	Yes	Yes
• for resistance measurement with three-wire connection	Yes	Yes	Yes
• for resistance measurement with four-wire connection	Yes	Yes	Yes
Errors/accuracies			
Linearity error (relative to input range), (+/-)	0.01 %	0.01 %	0.01 %; ±0.1 % for resistance thermometers and resistance
Temperature error (relative to input range), (+/-)	U: 0.0035%/°C; I: 0.006%/°C; RTD: 0.0005%/°C; TC: 0.0035%/°C	RTD: 0.0005%/°C; TC: 0.0035%/°C	0.0009%/K; ±0.005 % / K at thermocouple
Crosstalk between the inputs, min.	85 dB	-85 dB	
Crosstalk between the inputs, max.			-70 dB
Repeat accuracy in steady state at 25 °C (relative to input range), (+/-)	0.008 %	0.008 %	0.008 %
Temperature error of internal compensation			±1,5 °C

Technical specifications

Article number	6ES7144-6KD00-0AB0 ET 200eco PN, 8AI; 4 U/I; 4 RTD/TC 8xM12	6ES7144-6KD50-0AB0 ET 200eco PN, 8AI RTD/TC 8xM12	6ES7144-6JF00-0BB0 ET 200eco PN, AI 8xRTD/TC, M12-L
Interference voltage suppression for $f = n \times (f1 \pm 1 \%)$, f1 = interference frequency			
• Series mode interference (peak value of interference < rated value of input range), min.	46 dB	46 dB	
• Common mode interference, min.	70 dB	70 dB	
Interference voltage suppression for $f = n \times (f1 \pm 0.5 \%)$, f1 = interference frequency			
• Series mode interference (peak value of interference < rated value of input range), min.			40 dB
Interfaces			
Transmission procedure	100BASE-TX	100BASE-TX	
Number of PROFINET interfaces	1	1	1
1. Interface			
Interface type			PROFINET with 100 Mbit/s full duplex (100BASE-TX)
Interface types			
• M12 port	Yes		Yes; 2x M12, 4-pin, D-coded
• Number of ports			2
• integrated switch	Yes	Yes	Yes
Protocols			
• PROFINET IO Device			Yes
• Open IE communication			Yes
Interface types			
M12 port			
• Autonegotiation	Yes	Yes	Yes
• Autocrossing	Yes	Yes	Yes
• Transmission rate, max.	100 Mbit/s	100 Mbit/s	100 Mbit/s
Protocols			
Supports protocol for PROFINET IO	Yes	Yes	Yes
PROFINET CBA	No	No	
PROFIsafe	No	No	No
EtherNet/IP			Yes
Modbus TCP			Yes
PROFINET IO Device			
Services			
- IRT			Yes; 250 µs to 4 ms in 125 µs frame
- IRT with the option "high flexibility"	Yes		
- Prioritized startup	Yes	Yes	Yes
- Shared device			Yes
- Number of IO Controllers with shared device, max.			2
Redundancy mode			
• PROFINET system redundancy (S2)			Yes
• PROFINET system redundancy (R1)			No
• H-Sync forwarding			Yes
Media redundancy			
- MRP	Yes	Yes	Yes
EtherNet/IP			
Services			
- CIP Implicit Messaging			Yes
- CIP Explicit Messaging			Yes
- CIP Safety			No
- Shared device			Yes; 2x EtherNet/IP Scanner
- Number of scanners with shared device, max.			2

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > Analog I/O devices****Technical specifications**

Article number	6ES7144-6KD00-0AB0 ET 200eco PN, 8AI; 4 U/I; 4 RTD/TC 8xM12	6ES7144-6KD50-0AB0 ET 200eco PN, 8AI RTD/TC 8xM12	6ES7144-6JF00-0BB0 ET 200eco PN, AI 8xRTD/TC, M12-L
Updating times - Requested Packet Interval (RPI)			2 ms
Redundancy mode - DLR (Device Level Ring)			No
Address area - Address space per module, max. - LargeForwardOpen (Class3)			38 byte No
Modbus TCP Services - read coils (code=1) - read discrete inputs (code=2) - Read Holding Registers (Code=3) - write single coil (code=5) - write multiple coils (code=15) - Write Multiple Registers (Code=16) - Parameter change by master - Modbus TCP Security Protocol			Yes Yes Yes Yes Yes Yes No No
Address space per station - Address space per station, max. - Access-consistent address space			38 byte 2 byte
Updating time - I/O request interval			2 ms
Connections - Number of connections per slave			12
Open IE communication • TCP/IP • SNMP • DCP • LLDP • ping • ARP	No Yes Yes Yes Yes Yes	No Yes Yes Yes Yes Yes	Yes; (only EtherNet/IP or Modbus TCP) Yes Yes Yes Yes Yes
Interrupts/diagnostics/ status information Diagnostics function	Yes	Yes	
Alarms • Diagnostic alarm • Maintenance interrupt • Limit value alarm	Yes	Yes	Yes; Parameterizable Yes; Parameterizable Yes; two upper and two lower limit values in each case
Diagnoses • Diagnostic information readable • Monitoring the supply voltage - parameterizable • Wire-break • Short-circuit encoder supply • Group error • Overflow/underflow	Yes Yes; green "ON" LED Yes; per module Yes; Red/yellow "SF/MT" LED Yes	Yes Yes; green "ON" LED Yes; Red/yellow "SF/MT" LED Yes	Yes Yes Yes Yes; Not for ±80 mV Yes
Diagnostics indication LED • RUN LED • ERROR LED • MAINT LED • NS LED • MS LED • IO LED • Channel status display • for channel diagnostics • Connection display LINK TX/RX			Yes; green LED Yes; red LED Yes; Yellow LED Yes; green/red LED Yes; green/red LED Yes; red/green/yellow LEDs Yes; green LED Yes; red LED Yes; green LED, only link

Technical specifications

Article number	6ES7144-6KD00-0AB0 ET 200eco PN, 8AI; 4 U/I; 4 RTD/TC 8xM12	6ES7144-6KD50-0AB0 ET 200eco PN, 8AI RTD/TC 8xM12	6ES7144-6JF00-0BB0 ET 200eco PN, AI 8xRTD/TC, M12-L
Potential separation			
between the load voltages	Yes	Yes	Yes
between load voltage and all other switching components	No	No	
between Ethernet and electronics	Yes	Yes	Yes
Potential separation channels			
• between the channels	No	No	No
• between the channels and the power supply of the electronics			Yes
Degree and class of protection			
IP degree of protection	IP65/67	IP65/67	IP65/67/69K
Standards, approvals, certificates			
Suitable for safety-related tripping of standard modules			Yes; From FS01
Suitable for applications according to AMS 2750	Yes; Declaration of Conformity, see online support entry 109757262	Yes; Declaration of Conformity, see online support entry 109757262	Yes; Declaration of Conformity, see online support entry 109757262
Suitable for applications according to CQI-9	Yes; Based on AMS 2750 E	Yes; Based on AMS 2750 E	Yes; based on AMS 2750 F
Highest safety class achievable for safety-related tripping of standard modules			
• Performance level according to ISO 13849-1			PL d
• Category according to ISO 13849-1			Cat. 3
• SIL acc. to IEC 62061			SIL 2
Use in hazardous areas			
• Explosion protection category for gas	ATEX gas explosion protection, Zone 2	ATEX gas explosion protection, Zone 2	ATEX, UKEX, IECEx, CCCEX for Zone 2
• Explosion protection category for dust	ATEX dust explosion protection, Zone 22	ATEX dust explosion protection, Zone 22	ATEX, UKEX, IECEx, CCCEX for Zone 22
Ambient conditions			
Ambient temperature during operation			
• min.			-40 °C
• max.			60 °C
Altitude during operation relating to sea level			
• Ambient air temperature-barometric pressure-altitude			Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method			
Design of electrical connection	4/5-pin M12 circular connectors	4/5-pin M12 circular connectors	4/5-pin M12 circular connectors
Design of electrical connection for the inputs and outputs			M12, 5-pin, A-coded
Design of electrical connection for supply voltage			M12, 4-pin, L-coded
Dimensions			
Width	60 mm	60 mm	45 mm
Height	175 mm	175 mm	200 mm
Depth	49 mm	49 mm	48 mm
Weights			
Weight, approx.	930 g	930 g	780 g
Article number	6ES7145-6HD00-0AB0 ET 200eco PN, 4AO U/I 4xM12	Article number	6ES7145-6HD00-0AB0 ET 200eco PN, 4AO U/I 4xM12
Supply voltage		Analog outputs	
Rated value (DC)	24 V	Number of analog outputs	4
Reverse polarity protection	Yes	Voltage output, short-circuit protection	Yes
Input current		Voltage output, short-circuit current, max.	30 mA
Current consumption, typ.	280 mA	Current output, no-load voltage, max.	20 V
Actuator supply			
Number of outputs	4		

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > Analog I/O devices****Technical specifications**

Article number	6ES7145-6HD00-0AB0 ET 200eco PN, 4AO U/I 4xM12
Output ranges, voltage	
• 0 to 10 V	Yes
• 1 V to 5 V	Yes
• -10 V to +10 V	Yes
Output ranges, current	
• 0 to 20 mA	Yes
• -20 mA to +20 mA	Yes
• 4 mA to 20 mA	Yes
Connection of actuators	
• for voltage output two-wire connection	Yes
• for current output two-wire connection	Yes
Load impedance (in rated range of output)	
• with voltage outputs, min.	1 kΩ
• with voltage outputs, capacitive load, max.	1 μF
• with current outputs, max.	600 Ω
• with current outputs, inductive load, max.	1 mH
Cable length	
• shielded, max.	30 m
Analog value generation for the outputs	
Analog value display	SIMATIC S7 format
Conversion principle	Resistor network
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
• Conversion time (per channel)	1 ms
Settling time	
• for resistive load	2 ms
• for capacitive load	1.8 ms
• for inductive load	2 ms
Errors/accuracies	
Output ripple (relative to output range, bandwidth 0 to 50 kHz), (+/-)	U: ±0.6 mVrms; I: ±0.4 nArms
Linearity error (relative to output range), (+/-)	0.02 %
Temperature error (relative to output range), (+/-)	U: 0.001%/°C; I: 0.0025%/°C
Crosstalk between the outputs, min.	70 dB
Repeat accuracy in steady state at 25 °C (relative to output range), (+/-)	0.008 %
Interfaces	
Transmission procedure	100BASE-TX
Number of PROFINET interfaces	1
1. Interface	
Interface types	
• M12 port	Yes
• integrated switch	Yes

Article number	6ES7145-6HD00-0AB0 ET 200eco PN, 4AO U/I 4xM12
Interface types	
M12 port	
• Autonegotiation	Yes
• Autocrossing	Yes
• Transmission rate, max.	100 Mbit/s
Protocols	
Supports protocol for PROFINET IO	Yes
PROFINET CBA	No
PROFIsafe	No
PROFINET IO Device	
Services	
- IRT with the option "high flexibility"	Yes
- Prioritized startup	Yes
Redundancy mode	
Media redundancy	
- MRP	Yes
Open IE communication	
• TCP/IP	No
• SNMP	Yes
• DCP	Yes
• LLDP	Yes
• ping	Yes
• ARP	Yes
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Diagnostic information readable	Yes
• Monitoring the supply voltage	Yes; green "ON" LED
• Wire-break	Yes; Channel-by-channel with current output
• Short-circuit	Yes; Channel-by-channel with voltage output
• Group error	Yes; Red/yellow "SF/MT" LED
Potential separation	
between the load voltages	Yes
between load voltage and all other switching components	No
between Ethernet and electronics	Yes
Potential separation channels	
• between the channels	No
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Use in hazardous areas	
• Explosion protection category for gas	ATEX gas explosion protection, Zone 2
• Explosion protection category for dust	ATEX dust explosion protection, Zone 22
connection method	
Design of electrical connection	4/5-pin M12 circular connectors
Dimensions	
Width	60 mm
Height	175 mm
Depth	49 mm
Weights	
Weight, approx.	930 g

Technical specifications

Article number	6ES7146-6HF00-0BB0 ET 200eco PN, AI 6xU/I +AIQ 2xU/I, M12-L
General information	
Product function	
• Isochronous mode	No
• Prioritized startup	Yes
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V18 or higher with HSP 0391
• PROFINET from GSD version/ GSD revision	GSDML V2.4.x
• Multi Fieldbus Configuration Tool (MFCT)	V1.5 or higher
Operating mode	
• MSI	Yes
• MSO	Yes
CiR - Configuration in RUN	
Calibration possible in RUN	Yes
Supply voltage	
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Input current	
Current consumption (rated value) from load voltage 1L+ (unswitched voltage)	110 mA; without load 12 A; Maximum value
from load voltage 2L+, max.	12 A; Maximum value
Encoder supply	
Number of outputs	8
Actuator supply	
Number of outputs	2
Hardware configuration	
Submodules	
• Number of configurable submodules, max.	2
Analog inputs	
Number of analog inputs	8; 6 AI fixed, 2 AIQ can be parameterized
Cycle time (all channels), min.	sum of the basic conversion times
Input ranges (rated values), voltages	
• 0 to +10 V	Yes
• 1 V to 5 V	Yes
• -10 V to +10 V	Yes
Input ranges (rated values), currents	
• 0 to 20 mA	Yes; 17 V for 2-wire transformers
• -20 mA to +20 mA	Yes; 17 V for 2-wire transformers
• 4 mA to 20 mA	Yes; 17 V for 2-wire transformers
Cable length	
• shielded, max.	30 m
Analog outputs	
Number of analog outputs	2; AIQ can be parameterized
Voltage output, short-circuit protection	Yes
Voltage output, short-circuit current, max.	40 mA
Current output, no-load voltage, max.	19 V
Cycle time (all channels) max.	1 ms
Output ranges, voltage	
• 0 to 10 V	Yes
• 1 V to 5 V	Yes
• -10 V to +10 V	Yes

Article number	6ES7146-6HF00-0BB0 ET 200eco PN, AI 6xU/I +AIQ 2xU/I, M12-L
Output ranges, current	
• 0 to 20 mA	Yes
• -20 mA to +20 mA	Yes
• 4 mA to 20 mA	Yes
Connection of actuators	
• for voltage output two-wire connection	Yes
• for voltage output four-wire connection	Yes
• for current output two-wire connection	Yes
• for current output four-wire connection	Yes
Load impedance (in rated range of output)	
• with voltage outputs, min.	1 kΩ
• with voltage outputs, capacitive load, max.	1 μF
• with current outputs, max.	600 Ω
• with current outputs, inductive load, max.	1 mH
Cable length	
• shielded, max.	30 m
Analog value generation for the inputs	
Analog value display	SIMATIC S7 format
Measurement principle	integrating
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
• Integration time, parameterizable	Yes; channel by channel
• Integration time (ms)	0.84 / 16.7 (50) / 20 (60) / 60 (180)
• Basic conversion time, including integration time (ms)	4.50 / 21.5 (54) / 24 (64) / 64 (184)
• Interference voltage suppression for interference frequency f1 in Hz	none / 60 / 50 / 16.7
Smoothing of measured values	
• parameterizable	Yes
Analog value generation for the outputs	
Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
Settling time	
• for resistive load	1 ms
• for capacitive load	1 ms
• for inductive load	1 ms
Encoder	
Connection of signal encoders	
• for voltage measurement	Yes
• for current measurement as 2-wire transducer	Yes
• for current measurement as 4-wire transducer	Yes

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN

I/O devices > Analog I/O devices

Technical specifications

Article number	6ES7146-6HF00-0BB0 ET 200eco PN, AI 6xU/I +AIQ 2xU/I, M12-L
Errors/accuracies	
Linearity error (relative to input range), (+/-)	0.01 %
Temperature error (relative to input range), (+/-)	0.006 %/K
Crosstalk between the inputs, max.	-70 dB
Repeat accuracy in steady state at 25 °C (relative to input range), (+/-)	0.008 %
Output ripple (relative to output range, bandwidth 0 to 50 kHz), (+/-)	0.02 %
Linearity error (relative to output range), (+/-)	0.02 %
Temperature error (relative to output range), (+/-)	0.002 %/K
Crosstalk between the outputs, max.	-70 dB
Repeat accuracy in steady state at 25 °C (relative to output range), (+/-)	0.008 %
Interference voltage suppression for $f = n \times (f1 \pm 0.5 \%)$, $f1 = \text{interference frequency}$	
• Series mode interference (peak value of interference < rated value of input range), min.	46 dB
Interfaces	
Number of PROFINET interfaces	1
1. Interface	
Interface type	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
Interface types	
• M12 port	Yes; 2x M12, 4-pin, D-coded
• Number of ports	2
• integrated switch	Yes
Protocols	
• PROFINET IO Device	Yes
• Open IE communication	Yes
Interface types	
M12 port	
• Autonegotiation	Yes
• Autocrossing	Yes
• Transmission rate, max.	100 Mbit/s
Protocols	
Supports protocol for PROFINET IO	Yes
PROFIsafe	No
EtherNet/IP	Yes
Modbus TCP	Yes
PROFINET IO Device	
Services	
- IRT	Yes; 250 µs to 4 ms in 125 µs frame
- Prioritized startup	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	2

Article number	6ES7146-6HF00-0BB0 ET 200eco PN, AI 6xU/I +AIQ 2xU/I, M12-L
Redundancy mode	
• PROFINET system redundancy (S2)	Yes
• PROFINET system redundancy (R1)	No
• H-Sync forwarding	Yes
Media redundancy	
- MRP	Yes
EtherNet/IP	
Services	
- CIP Implicit Messaging	Yes
- CIP Explicit Messaging	Yes
- CIP Safety	No
- Shared device	Yes; 2x EtherNet/IP Scanner
- Number of scanners with shared device, max.	2
Updating times	
- Requested Packet Interval (RPI)	2 ms
Redundancy mode	
- DLR (Device Level Ring)	No
Address area	
- Address space per module, max.	48 byte; of which 44 bytes for inputs and 4 bytes for outputs
- LargeForwardOpen (Class3)	No
Modbus TCP	
Services	
- read coils (code=1)	Yes
- read discrete inputs (code=2)	Yes
- Read Holding Registers (Code=3)	Yes
- write single coil (code=5)	Yes
- write multiple coils (code=15)	Yes
- Write Multiple Registers (Code=16)	Yes
- Parameter change by master	No
- Modbus TCP Security Protocol	No
Address space per station	
- Address space per station, max.	48 byte; of which 44 bytes for inputs and 4 bytes for outputs
- Access-consistent address space	2 byte
Updating time	
- I/O request interval	2 ms
Connections	
- Number of connections per slave	12
Open IE communication	
• TCP/IP	Yes; (only EtherNet/IP or Modbus TCP)
• SNMP	Yes
• LLDP	Yes
• ARP	Yes

Technical specifications

Article number	6ES7146-6HF00-0BB0 ET 200eco PN, AI 6xU/I +AIQ 2xU/I, M12-L
Interrupts/diagnostics/ status information	
Substitute values connectable	Yes; channel by channel, parameterizable
Alarms	
• Diagnostic alarm	Yes; Parameterizable
• Maintenance interrupt	Yes; Parameterizable
• Limit value alarm	Yes; two upper and two lower limit values in each case
Diagnoses	
• Diagnostic information readable	Yes
• Monitoring the supply voltage	Yes
- parameterizable	Yes
• Wire-break	Yes; at 4 mA to 20 mA and 1 V to 5 V
• Short-circuit	Yes; encoder and actuator supply module to ground, for output type voltage; channel by channel
• Overflow/underflow	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• NS LED	Yes; green/red LED
• MS LED	Yes; green/red LED
• IO LED	Yes; red/green/yellow LEDs
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• Connection display LINK TX/RX	Yes; green LED, only link
Potential separation	
between the load voltages	Yes
between Ethernet and electronics	Yes
Potential separation channels	
• between the channels	No
• between the channels and the power supply of the electronics	No

Article number	6ES7146-6HF00-0BB0 ET 200eco PN, AI 6xU/I +AIQ 2xU/I, M12-L
Degree and class of protection	
IP degree of protection	IP65/67/69K
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Use in hazardous areas	
• Explosion protection category for gas	ATEX, UKEX, IECEx, CCCEX for Zone 2
• Explosion protection category for dust	ATEX, UKEX, IECEx, CCCEX for Zone 22
Ambient conditions	
Ambient temperature during operation	
• min.	-40 °C
• max.	60 °C
Altitude during operation relating to sea level	
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method	
Design of electrical connection	4/5-pin M12 circular connectors
Design of electrical connection for the inputs and outputs	M12, 5-pin, A-coded
Design of electrical connection for supply voltage	M12, 4-pin, L-coded
Dimensions	
Width	45 mm
Height	200 mm
Depth	48 mm
Weights	
Weight, approx.	795 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN

I/O devices > TM PosInput 2 counter and position detection module

Overview



Technical properties

- Counter and position detection module for ET 200eco PN
- Interfaces:
 - Encoder signals A, B and N for RS 422 differential signals or 24 V signals
 - SSI interface with clock and data for RS-422 differential signals
 - 24 V encoder supply, short-circuit-proof
 - 2 digital inputs for controlling the counting process, for saving or setting the counter or position value
 - 2 digital outputs for fast reactions depending on the counter reading, position value or measured value

- Counting frequency 1 MHz (4 MHz with fourfold evaluation)
- Counting range: +/- 31 bits
- Measurement function
- Parameterizable input filters for suppressing interferences at encoder and digital inputs

Supported types of encoders/signals

- Incremental encoders with and without N signal
- Pulse encoders with directional signal
- Pulse encoders without directional signal
- Pulse encoders for forward or reverse pulses
- SSI encoders with a frame length of 10 to 40 bits, of which up to 32 bits position value

Supported system functions

- Isochronous mode
- Firmware update
- Identification data I&M

Ordering data

TM PosInput 2 counter and position detection module

2 channels, max. 1 MHz for RS-422 differential signals or SSI absolute encoders
200 kHz for 24 V count signals

Accessories

- Mounting rail 0.5 m
- Profile screw for mounting rail, 50 units
- Sealing cap M12 for IP67 modules, 12 mm outer diameter, without O-ring, 10 units
- Sealing cap M12 for IP67 modules, 15 mm outer diameter, with O-ring, 10 units
- Labels 10 mm x 5 mm RAL9016, for I/O devices with 2x M12 L-coded power connectors; 5 frames with 40 labels each

PROFINET M12 connection plug, for user assembly

Connector for PROFINET, 4-core, shielded

IE M12 plug PRO connector

- 1 unit
- 8 units

IE FC M12 plug PRO connector, for user assembly

- 1 unit
- 8 units

Article No.

6ES7147-6AB00-0BB0

6ES7194-6GA00-0AA0

6ES7194-6MA00-0AA0

3RX9802-0AA00

3RK1901-1KA00

6ES7194-2BA00-0AA0

3RK1902-2DA00

6GK1901-0DB10-6AA0

6GK1901-0DB10-6AA8

6GK1901-0DB20-6AA0

6GK1901-0DB20-6AA8

Article No.

Power M12 plug PRO

Connector for 24 V DC supply voltage, with installation instructions, 4-pin, L-coded, 1 unit

6GK1906-0EA00

Power M12 cable connector PRO

Connection socket for 24 V DC supply voltage, 4-pin, L-coded, with installation instructions, 1 unit

6GK1906-0EB00

M12 circular connector

Can be assembled, for connecting actuators or sensors, 5-pin, screw terminal, max. 0.75 mm², A-coded, max. 4 A

- Straight
- Angled

3RK1902-4BA00-5AA0

3RK1902-4DA00-5AA0

M12 coupling socket

4-pin, screw terminal, max. 0.75 mm², A-coded, max. 4 A, angled

3RK1902-4CA00-4AA0

PROFINET bus cable

Preassembled on one side with 1 x M12, D-coded, 4-wire, shielded

- 3 m
- 5 m
- 10 m

3RK1902-2HB30

3RK1902-2HB50

3RK1902-2HC10

Ordering data	Article No.	Article No.	
M12-90/M12-90 IE connecting cable Preassembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (D-coded) up to 85 m, degree of protection IP65/IP67, 90° cable outlet Length: <ul style="list-style-type: none"> • 0.3 m • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1870-8GE30 6XV1870-8GE50 6XV1870-8GH10 6XV1870-8GH15 6XV1870-8GH20 6XV1870-8GH30 6XV1870-8GH50 6XV1870-8GN10 6XV1870-8GN15	M12-90/M12-90 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket to supply the ET 200 with 24 V DC; 90° cable outlet Length: <ul style="list-style-type: none"> • 0.3 m • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1801-5GE30 6XV1801-5GE50 6XV1801-5GH10 6XV1801-5GH15 6XV1801-5GH20 6XV1801-5GH30 6XV1801-5GH50 6XV1801-5GN10 6XV1801-5GN15
M12-180/IE FC RJ45 plug-145 IE connecting cable Preassembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with M12 plug (D-coded) and IE FC RJ45 plug, degree of protection IP65/IP67 Length: <ul style="list-style-type: none"> • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1871-5TH20 6XV1871-5TH30 6XV1871-5TH50 6XV1871-5TN10 6XV1871-5TN15	M12-90/M12-90 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with L-coded, 4-pin M12 plug and L-coded, 4-pin M12 socket, both sides angled 90°, to supply terminal devices with 24 V DC Length: <ul style="list-style-type: none"> • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1801-6GE50 6XV1801-6GH10 6XV1801-6GH15 6XV1801-6GH20 6XV1801-6GH30 6XV1801-6GH50 6XV1801-6GN10 6XV1801-6GN15
M12-180/M12-180 IE robust connecting cable Preassembled IE FC TP robust food cable 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (D-coded), degree of protection IP69 Length: <ul style="list-style-type: none"> • 1.0 m • 2.0 m • 3.0 m • 5.0 m 	6XV1881-5AH10 6XV1881-5AH20 6XV1881-5AH30 6XV1881-5AH50	M12-180/M12-180 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with L-coded, 4-pin M12 plug and L-coded, 4-pin M12 socket to supply terminal devices with 24 V DC Length: <ul style="list-style-type: none"> • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1801-6DE50 6XV1801-6DH10 6XV1801-6DH15 6XV1801-6DH20 6XV1801-6DH30 6XV1801-6DH50 6XV1801-6DN10 6XV1801-6DN15
M12 Y-cable For double connection of I/O by means of a single cable to ET 200, 5-pin	6ES7194-6KA00-0XA0		
Control line Preassembled on one side with 1 x M12 plug angled, 5-pin, 5 x 0.34 mm ² , A-coded, max. 4 A, PUR casing, black <ul style="list-style-type: none"> • 1.5 m • 5 m • 10 m Preassembled, 1 x M12 cable box straight, 1 x M12 plug, 3 x 0.34 mm ² , A-coded, max. 4 A, PUR casing, black	3RK1902-4HB15-5AA0 3RK1902-4HB50-5AA0 3RK1902-4HC01-5AA0 3RK1902-4PB15-3AA0		
Energy cable 4 x 1.5 Trailable power cable, with 4 copper cores (1.5 mm ²) for connecting to M12 plug-in connector; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1801-2B	M12-180/M12-180 M12 robust power connecting cable Flexible 4-core power connecting cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket to supply IP69 components with 24 V DC; Length: <ul style="list-style-type: none"> • 1.0 m • 2.0 m • 3.0 m • 5.0 m 	6XV1801-5AH10 6XV1801-5AH20 6XV1801-5AH30 6XV1801-5AH50

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN

I/O devices > TM PosInput 2 counter and position detection module

Technical specifications

Article number	6ES7147-6AB00-0BB0 ET 200eco PN, TM PosInput 2, M12-L
General information	
Number of channels	2
Product function	
• Isochronous mode	Yes
• Fast startup	Yes
• Prioritized startup	Yes
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V18 or higher with HSP
• PROFINET from GSD version/ GSD revision	GSDML V2.42
• Multi Fieldbus Configuration Tool (MFCT)	V1.5 or higher
Supply voltage	
Rated value (DC)	24 V
Load voltage 1L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction; encoder power supply outputs applied with reversed polarity, loads conduct
Load voltage 2L+	
• Rated value (DC)	24 V
• Reverse polarity protection	Yes; against destruction
Input current	
Current consumption (rated value) from load voltage 1L+ (unswitched voltage)	100 mA; without load 12 A; Maximum value
from load voltage 2L+, max.	12 A; Maximum value
Encoder supply	
Number of outputs	4; 1 per encoder connection
Hardware configuration	
Submodules	
• Number of configurable submodules, max.	2
Digital inputs	
Number of digital inputs	4; 2 per channel
Digital inputs, parameterizable	Yes
Source/sink input	P-reading
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Digital input functions, parameterizable	
• Gate start/stop	Yes; only for pulse and incremental encoders
• Capture	Yes
• Synchronization	Yes; only for pulse and incremental encoders
• Freely usable digital input	Yes
Input voltage	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-5 ... +5 V
• for signal "1"	+11 to +30V
• permissible voltage at input, min.	-30 V; -5 V continuous, -30 V brief reverse polarity protection
• permissible voltage at input, max.	30 V
Input current	
• for signal "1", typ.	2.5 mA

Article number	6ES7147-6AB00-0BB0 ET 200eco PN, TM PosInput 2, M12-L
Input delay (for rated value of input voltage) for standard inputs	
- parameterizable	Yes; none / 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
for technological functions	
- parameterizable	Yes
Cable length	
• shielded, max.	30 m
• unshielded, max.	30 m
Digital outputs	
Type of digital output	Transistor
Number of digital outputs	4; 2 per channel
Digital outputs, parameterizable	Yes
Short-circuit protection	Yes; electronic/thermal
Limitation of inductive shutdown voltage to	2L+ (-39 V)
Controlling a digital input	Yes
Digital output functions, parameterizable	
• Switching tripped by comparison values	Yes
• Freely usable digital output	Yes
Switching capacity of the outputs	
• with resistive load, max.	0.5 A; Per digital output
• with inductive load, max.	0.5 A
Load resistance range	
• lower limit	48 Ω
• upper limit	12 kΩ
Output voltage	
• Type of output voltage	DC
• for signal "1", min.	23.2 V; 2L+ (-0,8 V)
Output current	
• for signal "1" rated value	0.5 A
• for signal "0" residual current, max.	0.5 mA
Output delay with resistive load	
• "0" to "1", max.	50 μs
• "1" to "0", max.	50 μs
Parallel switching of two outputs	
• for uprating	No
Switching frequency	
• with resistive load, max.	10 kHz
• with inductive load, max.	0.5 Hz; According to IEC 60947-5-1, DC-13
Total current of the outputs	
• Current per module, max.	2 A; Supply from 2L+
Cable length	
• shielded, max.	30 m
• unshielded, max.	30 m

Technical specifications

Article number	6ES7147-6AB00-0BB0 ET 200eco PN, TM PosInput 2, M12-L
Encoder	
Encoder signals, incremental encoder (symmetrical)	
• Input voltage	RS 422
• Input frequency, max.	1 MHz
• Counting frequency, max.	4 MHz; with quadruple evaluation
• Cable length, shielded, max.	30 m
• Signal filter, parameterizable	Yes
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes
• pulse encoder	Yes
• Pulse encoder with direction	Yes
• pulse encoder with one impulse signal per count direction	Yes
Encoder signals, incremental encoder (asymmetrical)	
• Input voltage	24 V
• Input frequency, max.	200 kHz
• Counting frequency, max.	800 kHz; with quadruple evaluation
• Cable length, shielded, max.	30 m
• Signal filter, parameterizable	Yes
• Incremental encoder with A/B tracks, 90° phase offset	Yes
• Incremental encoder with A/B tracks, 90° phase offset and zero track	Yes
• pulse encoder	Yes
• pulse encoder with direction	Yes
• pulse encoder with one impulse signal per count direction	Yes
Encoder signals, absolute encoder (SSI)	
• Input signal	to RS-422
• Telegram length, parameterizable	10 ... 40 bit
• Clock frequency, max.	2 MHz; 125 kHz, 250 kHz, 500 kHz, 1 MHz, 1.5 MHz or 2 MHz
• Binary code	Yes
• Gray code	Yes
• Cable length, shielded, max.	30 m; Up to 500 kHz
• Parity bit, parameterizable	Yes
• Monoflop time	16, 32, 48, 64 µs & automatic
• Multiturn	Yes
• Singleturn	Yes
Interfaces	
Number of PROFINET interfaces	1
1. Interface	
Interface type	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
Interface types	
• M12 port	Yes; 2x M12, 4-pin, D-coded
• Number of ports	2
• integrated switch	Yes
Protocols	
• PROFINET IO Device	Yes
• Open IE communication	Yes
Interface types	
M12 port	
• Autonegotiation	Yes
• Autocrossing	Yes
• Transmission rate, max.	100 Mbit/s

Article number	6ES7147-6AB00-0BB0 ET 200eco PN, TM PosInput 2, M12-L
Protocols	
Supports protocol for PROFINET IO	Yes
PROFIsafe	No
EtherNet/IP	Yes
Modbus TCP	Yes
PROFINET IO Device	
Services	
- IRT	Yes; 500 µs to 4 ms at an interval of 125 µs
- Prioritized startup	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	2
Redundancy mode	
• PROFINET system redundancy (S2)	Yes
• PROFINET system redundancy (R1)	No
• H-Sync forwarding	Yes
Media redundancy	
- MRP	Yes
EtherNet/IP	
Services	
- CIP Implicit Messaging	Yes
- CIP Explicit Messaging	Yes
- CIP Safety	No
- Shared device	Yes; 2x EtherNet/IP Scanner
- Number of scanners with shared device, max.	2
Updating times	
- Requested Packet Interval (RPI)	2 ms
Address area	
- Address space per module, max.	32 byte
- LargeForwardOpen (Class3)	No
Modbus TCP	
Services	
- read coils (code=1)	Yes
- read discrete inputs (code=2)	Yes
- Read Holding Registers (Code=3)	Yes
- write single coil (code=5)	Yes
- write multiple coils (code=15)	Yes
- Write Multiple Registers (Code=16)	Yes
- Parameter change by master	No
- Modbus TCP Security Protocol	No
Address space per station	
- Address space per station, max.	32 byte
- Access-consistent address space	2 byte
Updating time	
- I/O request interval	2 ms
Connections	
- Number of connections per slave	12
Open IE communication	
• TCP/IP	Yes; (only EtherNet/IP or Modbus TCP)
• SNMP	Yes
• LLDP	Yes
• ARP	Yes
Isochronous mode	
Equidistance	Yes
shortest clock pulse	500 µs
max. cycle	4 ms

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN

I/O devices > TM PosInput 2 counter and position detection module

Technical specifications

Article number	6ES7147-6AB00-0BB0 ET 200eco PN, TM PosInput 2, M12-L
Interrupts/diagnostics/status information	
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes; Parameterizable
• Maintenance interrupt	Yes; Parameterizable
• Hardware interrupt	No
Diagnoses	
• Diagnostic information readable	Yes
• Monitoring the supply voltage	Yes
- parameterizable	Yes
• Wire-break	Yes
• Short-circuit	Yes
• Short-circuit encoder supply	Yes
• A/B transition error at incremental encoder	Yes
• Telegram error at SSI encoder	Yes
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• NS LED	Yes; green/red LED
• MS LED	Yes; green/red LED
• IO LED	Yes; red/green/yellow LEDs
• Channel status display	Yes; green LED
• for channel diagnostics	Yes; red LED
• For load voltage monitoring	Yes; green LED
• Connection display LINK TX/RX	Yes; green LED, only link
Integrated Functions	
Counter	Yes
• Number of counters	2
• Counting frequency, max.	4 MHz; with quadruple evaluation
Fast mode	No
Counting functions	
• Can be used with TO High_Speed_Counter	Yes; only for pulse and incremental encoders
• Continuous counting	Yes
• Counter response parameterizable	Yes
• Hardware gate via digital input	Yes
• Software gate	Yes
• Event-controlled stop	Yes
• Synchronization via digital input	Yes
• Counting range, parameterizable	Yes
Comparator	
- Number of comparators	2; Per channel
- Direction dependency	Yes
- Can be changed from user program	Yes
Position detection	
• Incremental acquisition	Yes
• Absolute acquisition	Yes
• Suitable for S7-1500 Motion Control	Yes
Measuring functions	
• Measuring time, parameterizable	Yes
• Dynamic measurement period adjustment	Yes
• Number of thresholds, parameterizable	2

Article number	6ES7147-6AB00-0BB0 ET 200eco PN, TM PosInput 2, M12-L
Measuring range	
- Frequency measurement, min.	0.04 Hz
- Frequency measurement, max.	4 MHz
- Cycle duration measurement, min.	0.25 µs
- Cycle duration measurement, max.	25 s
Accuracy	
- Frequency measurement	100 ppm; depending on measuring interval and signal evaluation
- Cycle duration measurement	100 ppm; depending on measuring interval and signal evaluation
- Velocity measurement	100 ppm; depending on measuring interval and signal evaluation
Potential separation	
between the load voltages	Yes
between Ethernet and electronics	Yes
Potential separation channels	
• between the channels	Yes; DI channels are isolated from the DQ channels
Degree and class of protection	
IP degree of protection	IP65/67/69K
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	Yes
Highest safety class achievable for safety-related tripping of standard modules	
• Performance level according to ISO 13849-1	PL d
• Category according to ISO 13849-1	Cat. 3
• SIL acc. to IEC 62061	SIL 2
Use in hazardous areas	
• Explosion protection category for gas	No
• Explosion protection category for dust	No
Ambient conditions	
Ambient temperature during operation	
• min.	-40 °C
• max.	60 °C
Altitude during operation relating to sea level	
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method	
Design of electrical connection	4/5/8-pin M12 circular connectors
Design of electrical connection for the inputs and outputs	M12, 5-pin, A-coded
Design of electrical connection for supply voltage	M12, 4-pin, L-coded
Decentralized operation	
to SIMATIC S7-300	Yes
to SIMATIC S7-400	Yes
to SIMATIC S7-1200	Yes
to SIMATIC S7-1500	Yes
to standard PROFIBUS master	No
to standard PROFINET controller	Yes
Dimensions	
Width	45 mm
Height	200 mm
Depth	48 mm
Weights	
Weight, approx.	820 g

Overview



The ET 200eco PN fail-safe I/O device expands the ET 200eco PN system family. It is incorporated seamlessly into the Safety Integrated concept like with ET 200MP / ET 200SP and ET200pro. It also supports safety-related communication via PROFIsafe. The functional safety is certified in accordance with IEC 61508. It is designed for safety-related use up to SIL 3 according to IEC 62061 and PL e according to ISO 13849.

The following fail-safe I/O device with 2x M12 A-coded power connectors and 60 mm width is available:

- F-DI 8x24V /F-DQ 3x24V 2A with 8xM12 connection

Ordering data

ET 200eco PN fail-safe digital input/output modules

- 8 F-DI 24 V DC/
3 F-DQ 24 V DC/2 A;
PROFIsafe, certified up to SIL 3
(IEC 61508), PL e (ISO 13849);
4 x M12/3 x M12, degree of
protection IP65/67

Article No.

6ES7146-6FF00-0AB0

Accessories

- PD voltage distributor, 24 V DC;
1 X 7/8", 4 X M12
- Terminal block for ET 200eco PN,
10 A insulation displacement
terminals
- Spare fuses for terminal block,
10 units
- Mounting rail 0.5 m
- Profile screw for mounting rail,
50 units
- Sealing cap M12 for IP67
modules, 12 mm outer diameter,
without O-ring, 10 units
- Sealing cap M12 for IP67
modules, 15 mm outer diameter,
with O-ring, 10 units
- Labels 10 mm x 7 mm yellow, for
I/O devices with 2x M12 A-coded
power connectors; 17 frames with
48 labels each

6ES7148-6CB00-0AA0

6ES7194-6CA00-0AA0

6ES7194-6HB00-0AA0

6ES7194-6GA00-0AA0

6ES7194-6MA00-0AA0

3RX9802-0AA00

3RK1901-1KA00

6ES7194-6HA00-0AA0

PROFINET M12 connection plug,
for user assembly

Connector for PROFINET, 4-core,
shielded

IE M12 plug PRO connector

- 1 unit
- 8 units

IE FC M12 plug PRO connector,
for user assembly

- 1 unit
- 8 units

3RK1902-2DA00

6GK1901-0DB10-6AA0

6GK1901-0DB10-6AA8

6GK1901-0DB20-6AA0

6GK1901-0DB20-6AA8

M12 connection plug for 24 V DC
load power supply

Connection socket
for 24 V DC infeed;
4-pin, A-coded, 3 units

Connector for
loop-through of 24 V DC;
4-pin, A-coded, 3 units

6GK1907-0DC10-6AA3

6GK1907-0DB10-6AA3

Article No.

M12 circular connector

Can be assembled, for connecting
actuators or sensors, 5-pin,
screw terminal, max. 0.75 mm²,
A-coded, max. 4 A

- Straight
- Angled

3RK1902-4BA00-5AA0

3RK1902-4DA00-5AA0

M12 coupling socket

4-pin, screw terminal,
max. 0.75 mm², A-coded,
max. 4 A, angled

3RK1902-4CA00-4AA0

PROFINET bus cable

Preassembled on one side with
1 x M12, D-coded, 4-wire, shielded

- 3 m
- 5 m
- 10 m

3RK1902-2HB30

3RK1902-2HB50

3RK1902-2HC10

IE connecting cable
M12-90/M12-90

Preassembled
IE FC TP trailing cable GP 2 x 2
(PROFINET type C) with two
4-pin M12 plugs
(D-coded) up to 85 m,
degree of protection IP65/IP67,
90° cable outlet

Length:

- 0.3 m
- 0.5 m
- 1.0 m
- 1, 5 m
- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m

6XV1870-8GE30

6XV1870-8GE50

6XV1870-8GH10

6XV1870-8GH15

6XV1870-8GH20

6XV1870-8GH30

6XV1870-8GH50

6XV1870-8GN10

6XV1870-8GN15

IE connecting cable
M12-180/IE FC RJ45 plug-145

Preassembled
IE FC TP trailing cable GP 2 x 2
(PROFINET type C)
with M12 plug (D-coded)
and IE FC RJ45 plug,
degree of protection IP65/IP67

Length:

- 2.0 m
- 3.0 m
- 5.0 m
- 10 m
- 15 m

6XV1871-5TH20

6XV1871-5TH30

6XV1871-5TH50

6XV1871-5TN10

6XV1871-5TN15

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN

I/O devices > Fail-safe I/O device

Ordering data	Article No.	Article No.
M12-180/M12-180 IE robust connecting cable Preassembled IE FC TP robust food cable 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (D-coded), degree of protection IP69 Length: <ul style="list-style-type: none"> • 1.0 m • 2.0 m • 3.0 m • 5.0 m 	6XV1881-5AH10 6XV1881-5AH20 6XV1881-5AH30 6XV1881-5AH50	IO-Link connecting cables Between IO-Link master and reader, on both sides with M12 plug, 4-pin <ul style="list-style-type: none"> • 5 m • 10 m 6GT2891-4MH50 6GT2891-4MN10
M12 Y-cable For connection of single-channel sensors (1oo1 evaluation), 5-pin For joint connection of an F-DQ and an F-DI channel by means of an 8-pin M12 socket	6ES7194-6KB00-0XA0 6ES7194-6KC00-0XA0	M12-90/M12-90 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket to supply the ET 200 with 24 V DC; 90° cable outlet Length: <ul style="list-style-type: none"> • 0.3 m • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m
E-coding plug for fail-safe ET 200 distributed I/O, IP65/IP67	6ES7194-6KB00-0AA0	
E-coding plug (metal) for fail-safe ET 200 distributed I/O, IP65/IP67	6ES7194-6KB01-0AA0	
Control line Preassembled on one side with 1 x M12 plug angled, 5-pin, 5 x 0.34 mm ² , A-coded, max. 4 A, PUR casing, black <ul style="list-style-type: none"> • 1.5 m • 5 m • 10 m Preassembled, 1 x M12 cable box straight, 1 x M12 plug, 3 x 0.34 mm ² , A-coded, max. 4 A, PUR casing, black	3RK1902-4HB15-5AA0 3RK1902-4HB50-5AA0 3RK1902-4HC01-5AA0 3RK1902-4PB15-3AA0	M12-180/M12-180 M12 robust power connecting cable Flexible 4-core power connecting cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket to supply IP69 components with 24 V DC; Length: <ul style="list-style-type: none"> • 1.0 m • 2.0 m • 3.0 m • 5.0 m
		6XV1801-5GE30 6XV1801-5GE50 6XV1801-5GH10 6XV1801-5GH15 6XV1801-5GH20 6XV1801-5GH30 6XV1801-5GH50 6XV1801-5GN10 6XV1801-5GN15
		6XV1801-5AH10 6XV1801-5AH20 6XV1801-5AH30 6XV1801-5AH50

Technical specifications

Article number	6ES7146-6FF00-0AB0 ET 200eco PN, F-DI 8x24V /F-DQ 3x24V 2A
General information	
Engineering with	V15 with HSP 204
<ul style="list-style-type: none"> • STEP 7 TIA Portal configurable/ integrated from version 	
Operating mode	
<ul style="list-style-type: none"> • DI • DQ 	Yes Yes
Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Load voltage 1L+	
<ul style="list-style-type: none"> • Rated value (DC) • Reverse polarity protection 	24 V Yes
Load voltage 2L+	
<ul style="list-style-type: none"> • Rated value (DC) • Reverse polarity protection 	24 V Yes
Input current	
Current consumption, typ.	200 mA
from supply voltage 1L+, max.	4 A
from load voltage 2L+, max.	4 A

Article number	6ES7146-6FF00-0AB0 ET 200eco PN, F-DI 8x24V /F-DQ 3x24V 2A
Encoder supply	
Number of outputs	2
Digital inputs	
Number of digital inputs	8; 8 (one-channel); 4 (two-channel)
Digital inputs, parameterizable	Yes
Input characteristic curve in accordance with IEC 61131, type 1	Yes
Number of simultaneously controllable inputs	
all mounting positions	
- up to 60 °C, max.	8
Input voltage	
<ul style="list-style-type: none"> • Rated value (DC) • for signal "0" • for signal "1" 	24 V -30 V DC to +5 V DC 15 V DC to 30 V DC
Input delay (for rated value of input voltage)	
for standard inputs	
- parameterizable	Yes; 0.8 / 1.6 / 3.2 / 6.4 / 12.8 ms
Cable length	
• unshielded, max.	30 m

Technical specifications

Article number	6ES7146-6FF00-0AB0 ET 200eco PN, F-DI 8x24V /F-DQ 3x24V 2A
Digital outputs	
Number of digital outputs	3
• in groups of	3
Short-circuit protection	Yes; Electronic
Limitation of inductive shutdown voltage to	PM-switching: Typ. -26 V to (-48 V)
Controlling a digital input	No
Switching capacity of the outputs	
• on lamp load, max.	10 W
Output current	
• for signal "1" rated value	2 A
• for signal "0" residual current, max.	0.5 mA
Parallel switching of two outputs	
• for uprating	No
• for redundant control of a load	No
Switching frequency	
• with resistive load, max.	30 Hz
• with inductive load, max.	0.1 Hz
• on lamp load, max.	10 Hz
Total current of the outputs (per group)	
all mounting positions	
- up to 60 °C, max.	3.9 A
Cable length	
• unshielded, max.	30 m
Encoder	
Connectable encoders	
• 2-wire sensor	No
- permissible quiescent current (2-wire sensor), max.	0.5 mA
Interfaces	
Transmission procedure	100BASE-TX
Number of PROFINET interfaces	1
1. Interface	
Interface types	
• M12 port	Yes
• integrated switch	Yes
Interface types	
M12 port	
• Autonegotiation	Yes
• Autocrossing	Yes
• Transmission rate, max.	100 Mbit/s
Protocols	
Supports protocol for PROFINET IO	Yes
PROFINET CBA	No
PROFIsafe	Yes
PROFINET IO Device	
Services	
- IRT with the option "high flexibility"	No; module will participate within an IRT topology
- Prioritized startup	No

Article number	6ES7146-6FF00-0AB0 ET 200eco PN, F-DI 8x24V /F-DQ 3x24V 2A
Open IE communication	
• TCP/IP	No
• SNMP	Yes
• DCP	Yes
• LLDP	Yes
• ping	Yes
• ARP	Yes
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnoses	
• Diagnostic information readable	Yes
• Monitoring the supply voltage	Yes; green "ON" LED
• Wire-break in actuator cable	Yes
• Wire-break in signal transmitter cable	Yes
• Short-circuit	Yes
• Short-circuit encoder supply	Yes
• Group error	Yes; Red/yellow "SF/MT" LED
Potential separation	
between the load voltages	Yes
between load voltage and all other switching components	No
between Ethernet and electronics	Yes
Potential separation channels	
• between the channels	No
Degree and class of protection	
IP degree of protection	IP65/67
Standards, approvals, certificates	
Suitable for safety-related tripping of standard modules	No
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 2 (single-channel), SIL 3 (two-channel)
• SILCL according to IEC 62061	SIL 3
Use in hazardous areas	
• Explosion protection category for gas	ATEX II 3G Ex nA IIC T4 Gc
• Explosion protection category for dust	ATEX II 3D Ex tc IIIC T90°C Dc
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C
• max.	60 °C
connection method	
Design of electrical connection	4/5-pin M12 circular connectors
Dimensions	
Width	60 mm
Height	175 mm
Depth	49 mm
Weights	
Weight, approx.	940 g

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN

I/O devices > IO-Link master**Overview**

IO-Link master with 2x M12 L-coded power connectors and 45 mm width

- IO-Link communication modules for connecting up to 8 IO-Link devices
- Options: IO-Link master
 - with 4x Class A port and 4x Class B port as well as additional 4 digital inputs,
 - with 4x Port Class A and additional 12 digital inputs/outputs or
 - with 8x Port Class A and additional 8 digital inputs/outputs.
- The IO-Link specifications V1.0 and V1.1 are supported



IO-Link master with 2x M12 A-coded power connectors and 60 mm width

- IO-Link communication modules for connecting up to 4 IO-Link devices
- IO-Link master with 4x Class A port and additional 8 digital inputs and 4 digital outputs
- The IO-Link specification V1.0 is supported



IO-Link master with 2x M12 A-coded power connectors and 30 mm width

- IO-Link communication modules for connecting up to 4 IO-Link devices
- IO-Link master with 4x Class B port
- The IO-Link specifications V1.0 and V1.1 are supported

Ordering data	Article No.	Article No.	
ET 200eco PN IO-Link master			
<ul style="list-style-type: none"> 4 IO-L + 8 DI + 4 DQ, 24 V DC/1.3 A; 8 x M12, degree of protection IP67, enclosure width 60 mm; for connecting up to 4 IO-Link devices according to IO-Link specification V1.0 and Class A port as well as 8 digital inputs and 4 digital outputs 	6ES7148-6JA00-0AB0	PROFINET M12 connection plug, for user assembly Connector for PROFINET, 4-core, shielded IE M12 plug PRO connector <ul style="list-style-type: none"> 1 unit 8 units IE FC M12 plug PRO connector, for user assembly <ul style="list-style-type: none"> 1 unit 8 units 	3RK1902-2DA00 6GK1901-0DB10-6AA0 6GK1901-0DB10-6AA8 6GK1901-0DB20-6AA0 6GK1901-0DB20-6AA8
<ul style="list-style-type: none"> 4 IO-L; 4 x M12, degree of protection IP67, enclosure width 30 mm; for connecting up to 4 IO-Link devices according to IO-Link specification V1.0 and V1.1 and Class B port 	6ES7148-6JD00-0AB0		
<ul style="list-style-type: none"> 8 IO-L + 4 DI 24 V DC; 8 x M12, degree of protection IP67, enclosure width 45 mm; for connecting up to 8 IO-Link devices according to IO-Link specification V1.0 and V1.1, 4x Class A port and 4 x Class B port, as well as 4 additional digital inputs 	6ES7148-6JG00-0BB0	M12 connection plug for 24 V DC load power supply Connection socket for 24 V DC infeed; 4-pin, A-coded, 3 units Connector for loop-through of 24 V DC; 4-pin, A-coded, 3 units	6GK1907-0DC10-6AA3 6GK1907-0DB10-6AA3
<ul style="list-style-type: none"> 8 IO-L + 8 DIQ 24 V DC; 8 x M12, degree of protection IP67, enclosure width 45 mm; for connecting up to 8 IO-Link devices according to IO-Link specification V1.0 and V1.1, 8x Class A ports, as well as 8 additional digital inputs/outputs 	6ES7148-6JJ00-0BB0	M12 circular connector Can be assembled, for connecting actuators or sensors, 5-pin, screw terminal, max. 0.75 mm ² , A-coded, max. 4 A <ul style="list-style-type: none"> Straight Angled 	3RK1902-4BA00-5AA0 3RK1902-4DA00-5AA0
<ul style="list-style-type: none"> 4 IO-L + 12 DIQ 24 V DC; 8 x M12, degree of protection IP67, enclosure width 45 mm; for connecting up to 4 IO-Link devices according to IO-Link specification V1.0 and V1.1, 4x Class A ports, as well as 12 additional digital inputs/outputs 	6ES7148-6JE00-0BB0	M12 coupling socket 4-pin, screw terminal, max. 0.75 mm ² , A-coded, max. 4 A, angled	3RK1902-4CA00-4AA0
Accessories		PROFINET bus cable	
<ul style="list-style-type: none"> PD voltage distributor, 24 V DC; 1 X 7/8", 4 X M12 	6ES7148-6CB00-0AAA	Preassembled on one side with 1 x M12, D-coded, 4-wire, shielded <ul style="list-style-type: none"> 3 m 5 m 10 m 	3RK1902-2HB30 3RK1902-2HB50 3RK1902-2HC10
<ul style="list-style-type: none"> Terminal block for ET 200eco PN, 10 A insulation displacement terminals 	6ES7194-6CA00-0AAA	IE connecting cable M12-90/M12-90 Preassembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (D-coded) up to 85 m, degree of protection IP65/IP67, 90° cable outlet Length: <ul style="list-style-type: none"> 0.3 m 0.5 m 1.0 m 1.5 m 2.0 m 3.0 m 5.0 m 10 m 15 m 	6XV1870-8GE30 6XV1870-8GE50 6XV1870-8GH10 6XV1870-8GH15 6XV1870-8GH20 6XV1870-8GH30 6XV1870-8GH50 6XV1870-8GN10 6XV1870-8GN15
<ul style="list-style-type: none"> Spare fuses for terminal block, 10 units 	6ES7194-6HB00-0AAA		
<ul style="list-style-type: none"> Mounting rail 0.5 m 	6ES7194-6GA00-0AAA		
<ul style="list-style-type: none"> Profile screw for mounting rail, 50 units 	6ES7194-6MA00-0AAA		
<ul style="list-style-type: none"> Sealing cap M12 for IP67 modules, 12 mm outer diameter, without O-ring, 10 units 	3RX9802-0AAA00		
<ul style="list-style-type: none"> Sealing cap M12 for IP67 modules, 15 mm outer diameter, with O-ring, 10 units 	3RK1901-1KA00		
<ul style="list-style-type: none"> Labels 10 mm x 5 mm RAL9016, for I/O devices with 2x M12 L-coded power connectors; 5 frames with 40 labels each 	6ES7194-2BA00-0AAA		
<ul style="list-style-type: none"> Labels 10 mm x 7 mm Ti-grey, for I/O devices with 2x M12 A-coded power connectors; 5 frames with 40 labels each 	3RT2900-1SB10	IE connecting cable M12-180/IE FC RJ45 plug-145 Preassembled IE FC TP trailing cable GP 2 x 2 (PROFINET type C) with M12 plug (D-coded) and IE FC RJ45 plug, degree of protection IP65/IP67 Length: <ul style="list-style-type: none"> 2.0 m 3.0 m 5.0 m 10 m 15 m 	6XV1871-5TH20 6XV1871-5TH30 6XV1871-5TH50 6XV1871-5TN10 6XV1871-5TN15

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > IO-Link master**

Ordering data	Article No.	Article No.
M12-180/M12-180 IE robust connecting cable Preassembled IE FC TP robust food cable 2 x 2 (PROFINET type C) with two 4-pin M12 plugs (D-coded), degree of protection IP69 Length: <ul style="list-style-type: none"> • 1.0 m • 2.0 m • 3.0 m • 5.0 m 	6XV1881-5AH10 6XV1881-5AH20 6XV1881-5AH30 6XV1881-5AH50	
M12 Y-cable For double connection of I/O by means of a single cable to ET 200, 5-pin	6ES7194-6KA00-0XA0	
Control line Preassembled on one side with 1 x M12 plug angled, 5-pin, 5 x 0.34 mm ² , A-coded, max. 4 A, PUR casing, black <ul style="list-style-type: none"> • 1.5 m • 5 m • 10 m Preassembled, 1 x M12 cable box straight, 1 x M12 plug, 3 x 0.34 mm ² , A-coded, max. 4 A, PUR casing, black	3RK1902-4HB15-5AA0 3RK1902-4HB50-5AA0 3RK1902-4HC01-5AA0 3RK1902-4PB15-3AA0	
IO-Link connecting cables Between IO-Link master and reader, on both sides with M12 plug, 4-pin <ul style="list-style-type: none"> • 5 m • 10 m 	6GT2891-4MH50 6GT2891-4MN10	
Energy cable 4 x 1.5 Trailable power cable, with 4 copper cores (1.5 mm ²) for connecting to M12 plug-in connector; sold by the meter; max. delivery unit 1000 m, minimum order quantity 20 m	6XV1801-2B	
M12-90/M12-90 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket to supply the ET 200 with 24 V DC; 90° cable outlet Length: <ul style="list-style-type: none"> • 0.3 m • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 	6XV1801-5GE30 6XV1801-5GE50 6XV1801-5GH10 6XV1801-5GH15 6XV1801-5GH20 6XV1801-5GH30 6XV1801-5GH50 6XV1801-5GN10 6XV1801-5GN15	
M12-180/M12-180 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with L-coded, 4-pin M12 plug and L-coded, 4-pin M12 socket to supply terminal devices with 24 V DC Length: <ul style="list-style-type: none"> • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 		6XV1801-6DE50 6XV1801-6DH10 6XV1801-6DH15 6XV1801-6DH20 6XV1801-6DH30 6XV1801-6DH50 6XV1801-6DN10 6XV1801-6DN15
M12-90/M12-90 M12 power connecting cable Flexible 4-core power connecting cable, preassembled with L-coded, 4-pin M12 plug and L-coded, 4-pin M12 socket, both sides angled 90°, to supply terminal devices with 24 V DC Length: <ul style="list-style-type: none"> • 0.5 m • 1.0 m • 1.5 m • 2.0 m • 3.0 m • 5.0 m • 10 m • 15 m 		6XV1801-6GE50 6XV1801-6GH10 6XV1801-6GH15 6XV1801-6GH20 6XV1801-6GH30 6XV1801-6GH50 6XV1801-6GN10 6XV1801-6GN10
M12-180/M12-180 M12 robust power connecting cable Flexible 4-core power connecting cable, preassembled with A-coded, 5-pin M12 plug and A-coded, 5-pin M12 socket to supply IP69 components with 24 V DC; Length: <ul style="list-style-type: none"> • 1.0 m • 2.0 m • 3.0 m • 5.0 m 		6XV1801-5AH10 6XV1801-5AH20 6XV1801-5AH30 6XV1801-5AH50
Power M12 plug PRO Connector for 24 V DC supply voltage, with installation instructions, 4-pin, L-coded, 1 unit		6GK1906-0EA00
Power M12 cable connector PRO Connection socket for 24 V DC supply voltage, 4-pin, L-coded, with installation instructions, 1 unit		6GK1906-0EB00

Technical specifications

Article number	6ES7148-6JA00-0AB0	6ES7148-6JD00-0AB0	6ES7148-6JG00-0BB0
	ET 200eco PN, 4xIO-Link + 8DI/4DO, 8xM12	ET 200eco PN, 4xIO-Link 4xM12	ET 200eco PN, CM 8x IO-Link, M12-L
General information			
Product function			
• Isochronous mode			No
• Prioritized startup			Yes
Engineering with			
• STEP 7 TIA Portal configurable/ integrated from version			STEP 7 V17 or higher with HSP 0378
• PROFINET from GSD version/ GSD revision			GSDML V2.3.x
• Multi Fieldbus Configuration Tool (MFCT)			from V1.3 SP1
Operating mode			
• DI			Yes
• Counter			No
• DQ			No
• MSI			No
• MSO			No
Supply voltage			
Rated value (DC)	24 V	24 V	
Reverse polarity protection	Yes	Yes	
Load voltage 1L+			
• Rated value (DC)			24 V
• Reverse polarity protection			Yes; Against destruction; encoder power supply outputs applied with reversed polarity
Load voltage 2L+			
• Rated value (DC)	24 V	24 V	24 V
• Reverse polarity protection	Yes	Yes; against destruction; load increasing	Yes; against destruction
Input current			
Current consumption (rated value)			70 mA; without load
Current consumption, typ.	200 mA	100 mA	
from supply voltage 1L+, max.	4 A	4 A	
from load voltage 1L+ (unswitched voltage)			12 A; Maximum value
from load voltage 2L+, max.	4 A	4 A	12 A; Maximum value
Encoder supply			
Number of outputs	6	4	8
Hardware configuration			
Submodules			
• Number of configurable submodules, max.			9
Digital inputs			
Number of digital inputs	8		4
Source/sink input			P-reading
Input characteristic curve in accordance with IEC 61131, type 3	Yes		Yes
Number of simultaneously controllable inputs			
all mounting positions			
- up to 60 °C, max.	8		4
Input voltage			
• Rated value (DC)	24 V		24 V
• for signal *0*	-3 to +5V		-3 to +5V
• for signal *1*	+11 to +30V		+11 to +30V
Input current			
• for signal *0*, max. (permissible quiescent current)	1.5 mA		
• for signal *1*, typ.	7 mA		2.5 mA
Cable length			
• unshielded, max.	30 m		30 m

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > IO-Link master****Technical specifications**

Article number	6ES7148-6JA00-0AB0 ET 200eco PN, 4xIO-Link + 8DI/4DO, 8xM12	6ES7148-6JD00-0AB0 ET 200eco PN, 4xIO-Link 4xM12	6ES7148-6JG00-0BB0 ET 200eco PN, CM 8x IO-Link, M12-L
Digital outputs			
Number of digital outputs	4		
Short-circuit protection	Yes; Electronic		
Limitation of inductive shutdown voltage to	Typ. (L1+, L2+) -47 V		
Controlling a digital input	Yes		
Switching capacity of the outputs			
• on lamp load, max.	5 W		
Output current			
• for signal "1" rated value	1.3 A; Maximum		
• for signal "0" residual current, max.	1.5 mA		
Parallel switching of two outputs			
• for uprating	No		
• for redundant control of a load	Yes		
Switching frequency			
• with resistive load, max.	100 Hz		
• with inductive load, max.	0.5 Hz		
• on lamp load, max.	1 Hz		
Total current of the outputs (per group)			
all mounting positions			
- up to 60 °C, max.	3.9 A		
Cable length			
• unshielded, max.	30 m		
IO-Link			
Number of ports	4	4	8
• of which simultaneously controllable	4	4	8
IO-Link protocol 1.0	Yes	Yes	Yes
IO-Link protocol 1.1	No	Yes	Yes
Transmission rate	4.8 kBd (COM1); 38.4 kBd (COM2)	4.8 kBaud (COM1); 38.4 kBaud (COM2), 230 kBaud (COM3)	4.8 kBaud (COM1); 38.4 kBaud (COM2), 230 kBaud (COM3)
Cycle time, min.			2 ms
Size of process data, input per port	32 byte	32 byte	33 byte
Size of process data, input per module	32 byte	128 bytes + 4 bytes PQI	264 byte
Size of process data, output per port	32 byte	32 byte	32 byte
Size of process data, output per module	32 byte	128 byte	256 byte
Memory size for device parameter		2 kbyte; for each port	2 kbyte; for each port
Master backup		Possible with function block IO_LINK_MASTER	possible with LIOLink_Master function block
Configuration without S7-PCT		Possible; autostart/manual function	Possible; autostart/manual function
Cable length unshielded, max.	20 m	20 m	20 m
Operating modes			
• IO-Link	Yes	Yes	Yes
• DI	Yes	Yes	Yes
• DQ	Yes	Yes; max. 100 mA	Yes; max. 100 mA
Connection of IO-Link devices			
• Port type A	Yes	Yes; via 3-core cable	Yes; via 3-core cable
• Port type B		Yes; Additional device supply: max. 2 A per port, max. 4 A per module	Yes; additional device supply: max. 2 A per port, max. 6 A per module
• via three-wire connection	Yes		
Interfaces			
Transmission procedure	100BASE-TX	100BASE-TX	
Number of PROFINET interfaces	1	1	1
1. Interface			
Interface type			PROFINET with 100 Mbit/s full duplex (100BASE-TX)

Technical specifications

Article number	6ES7148-6JA00-0AB0 ET 200eco PN, 4xIO-Link + 8DI/4DO, 8xM12	6ES7148-6JD00-0AB0 ET 200eco PN, 4xIO-Link 4xM12	6ES7148-6JG00-0BB0 ET 200eco PN, CM 8x IO-Link, M12-L
Interface types			
• M12 port	Yes	Yes	Yes; 2x M12, 4-pin, D-coded
• Number of ports			2
• integrated switch	Yes	Yes	Yes
Protocols			
• PROFINET IO Device			Yes
• Open IE communication			Yes
Interface types			
M12 port			
• Autonegotiation	Yes	Yes	Yes
• Autocrossing	Yes	Yes	Yes
• Transmission rate, max.	100 Mbit/s	100 Mbit/s	100 Mbit/s
Protocols			
Supports protocol for PROFINET IO	Yes	Yes	Yes
PROFINET CBA	No	No	
PROFIsafe	No	No	No
EtherNet/IP	No	No	Yes
Modbus TCP			Yes
PROFINET IO Device			
Services			
- IRT			Yes; 250 µs to 4 ms in 125 µs frame
- IRT with the option "high flexibility"	Yes	Yes	
- Prioritized startup			Yes
- Shared device			Yes
- Number of IO Controllers with shared device, max.			2
Redundancy mode			
• PROFINET system redundancy (S2)			Yes
• PROFINET system redundancy (R1)			No
• H-Sync forwarding			Yes
Media redundancy			
- MRP	Yes	Yes	Yes
EtherNet/IP			
Services			
- CIP Implicit Messaging			Yes
- CIP Explicit Messaging			Yes
- CIP Safety			No
- Shared device			Yes; 2x EtherNet/IP Scanner
- Number of scanners with shared device, max.			2
Updating times			
- Requested Packet Interval (RPI)			2 ms
Redundancy mode			
- DLR (Device Level Ring)			No
Address area			
- Address space per module, max.			300 byte
- LargeForwardOpen (Class3)			No
Modbus TCP			
Services			
- read coils (code=1)			Yes
- read discrete inputs (code=2)			Yes
- Read Holding Registers (Code=3)			Yes
- write single coil (code=5)			Yes
- write multiple coils (code=15)			Yes
- Write Multiple Registers (Code=16)			Yes
- Parameter change by master			No
- Modbus TCP Security Protocol			No

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > IO-Link master****Technical specifications**

Article number	6ES7148-6JA00-0AB0 ET 200eco PN, 4xIO-Link + 8DI/4DO, 8xM12	6ES7148-6JD00-0AB0 ET 200eco PN, 4xIO-Link 4xM12	6ES7148-6JG00-0BB0 ET 200eco PN, CM 8x IO-Link, M12-L
Address space per station			300 byte
- Address space per station, max.			2 byte
- Access-consistent address space			
Updating time			2 ms
- I/O request interval			
Connections			12
- Number of connections per slave			
Open IE communication			
• TCP/IP	No	No	Yes; (only EtherNet/IP or Modbus TCP)
• SNMP	Yes	Yes	Yes
• DCP	Yes	Yes	
• LLDP	Yes	Yes	Yes
• ping	Yes	Yes	
• ARP	Yes	Yes	Yes
Interrupts/diagnostics/ status information			
Diagnostics function	Yes	Yes	
Alarms			
• Diagnostic alarm	Yes	Yes	Yes; Parameterizable
• Maintenance interrupt			Yes; Parameterizable
Diagnoses			
• Diagnostic information readable	Yes	Yes	Yes
• Monitoring the supply voltage	Yes; green "ON" LED	Yes; green "ON" LED	Yes
- parameterizable			Yes
• Wire-break			Yes
• Wire-break in actuator cable	Yes		
• Wire-break in signal transmitter cable	Yes		
• Short-circuit		Yes; Device supply to M	
• Short-circuit encoder supply	Yes		Yes; Per channel
• Group error	Yes; Red/yellow "SF/MT" LED	Yes; Red/yellow "SF/MT" LED	
Diagnostics indication LED			
• RUN LED			Yes; green LED
• ERROR LED			Yes; red LED
• MAINT LED			Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)			Yes; green LED
• NS LED			Yes; green/red LED
• MS LED			Yes; green/red LED
• IO LED			Yes; red/green/yellow LEDs
• Channel status display			Yes; green LED
• for channel diagnostics			Yes; red LED
• For load voltage monitoring			Yes; green LED
• Connection display LINK TX/RX			Yes; green LED, only link
Potential separation			
between the load voltages	Yes	Yes	Yes
between load voltage and all other switching components	No	No	
between Ethernet and electronics	Yes	Yes	Yes
Potential separation channels			
• between the channels	No		No
• between the channels and the power supply of the electronics			No
Degree and class of protection			
IP degree of protection	IP65/67	IP65/67	IP65/67/69K
Standards, approvals, certificates			
Suitable for safety-related tripping of standard modules		No	Yes; From FS01

Technical specifications

Article number	6ES7148-6JA00-0AB0	6ES7148-6JD00-0AB0	6ES7148-6JG00-0BB0
	ET 200eco PN, 4xIO-Link + 8DI/4DO, 8xM12	ET 200eco PN, 4xIO-Link 4xM12	ET 200eco PN, CM 8x IO-Link, M12-L
Highest safety class achievable for safety-related tripping of standard modules			PL d
<ul style="list-style-type: none"> Performance level according to ISO 13849-1 Category according to ISO 13849-1 SIL acc. to IEC 62061 			Cat. 3 SIL 2
Use in hazardous areas			
<ul style="list-style-type: none"> Explosion protection category for gas Explosion protection category for dust 	ATEX II 3G Ex nA II T4 ATEX II 3D Ex tc IIIC T90°C Dc	ATEX II 3G Ex nA II T4 ATEX II 3D Ex tc IIIC T90°C Dc	ATEX, UKEX, IECEx, CCCEX for Zone 2 ATEX, UKEX, IECEx, CCCEX for Zone 22
Ambient conditions			
Ambient temperature during operation			
<ul style="list-style-type: none"> min. max. 			-40 °C 60 °C
Altitude during operation relating to sea level			
<ul style="list-style-type: none"> Ambient air temperature-barometric pressure-altitude 			Up to max. 5 000 m, at installation height > 2 000 m additional restrictions, see manual for details
connection method			
Design of electrical connection		3/5-pin M12 round connectors	4/5-pin M12 circular connectors
Design of electrical connection for the inputs and outputs			M12, 5-pin, A-coded
Design of electrical connection for supply voltage			M12, 4-pin, L-coded
Dimensions			
Width	60 mm	30 mm	45 mm
Height	175 mm	200 mm	200 mm
Depth	49 mm	49 mm	48 mm
Weights			
Weight, approx.	910 g	550 g	780 g
Article number	6ES7148-6JJ00-0BB0	6ES7148-6JE00-0BB0	
	ET 200eco PN, CM 8x IO-Link, M12-L	ET 200eco PN, CM 4x IO-Link, M12-L	
General information			
Product function			
<ul style="list-style-type: none"> Isochronous mode Prioritized startup 	No Yes	No Yes	
Engineering with			
<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/integrated from version PROFINET from GSD version/GSD revision Multi Fieldbus Configuration Tool (MFCT) 	STEP 7 V17 or higher with HSP 0378 GSDML V2.3.x V1.4.1 or higher	STEP 7 V17 or higher with HSP 0378 GSDML V2.3.x V1.4.1 or higher	
Operating mode			
<ul style="list-style-type: none"> DI Counter DQ MSI MSO 	Yes No Yes Yes Yes	Yes No Yes Yes Yes	
Supply voltage			
Load voltage 1L+			
<ul style="list-style-type: none"> Rated value (DC) Reverse polarity protection 	24 V Yes; Against destruction; encoder power supply outputs applied with reversed polarity	24 V Yes; Against destruction; encoder power supply outputs applied with reversed polarity	
Load voltage 2L+			
<ul style="list-style-type: none"> Rated value (DC) Reverse polarity protection 	24 V Yes; against destruction	24 V Yes; against destruction	

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > IO-Link master****Technical specifications**

Article number	6ES7148-6JJ00-0BB0 ET 200eco PN, CM 8x IO-Link, M12-L	6ES7148-6JE00-0BB0 ET 200eco PN, CM 4x IO-Link, M12-L
Input current		
Current consumption (rated value)	70 mA; without load	70 mA; without load
from load voltage 1L+ (unswitched voltage)	12 A; Maximum value	12 A; Maximum value
from load voltage 2L+, max.	12 A; Maximum value	12 A; Maximum value
Encoder supply		
Number of outputs	8	4
Hardware configuration		
Submodules		
• Number of configurable submodules, max.	10	6
Digital inputs		
Number of digital inputs	8; Parameterizable as DIQ	12; Parameterizable as DIQ
• in groups of	8	4
Digital inputs, parameterizable	Yes	Yes
Source/sink input	P-reading	P-reading
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes
Number of simultaneously controllable inputs all mounting positions		
- up to 60 °C, max.	8	12
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal "0"	-3 to +5V	-3 to +5V
• for signal "1"	+11 to +30V	+11 to +30V
Input current		
• for signal "1", typ.	2.5 mA	2.5 mA
Input delay (for rated value of input voltage) for standard inputs		
- parameterizable	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
Cable length		
• unshielded, max.	30 m	30 m
Digital outputs		
Number of digital outputs	8; Parameterizable as DIQ	12; Parameterizable as DIQ
• in groups of	8	2 load groups for 4 or 8 outputs each
Current-sourcing	Yes	Yes
Short-circuit protection	Yes; per channel, electronic	Yes; per channel, electronic
Limitation of inductive shutdown voltage to	0.5 A: typ. 1L+ (-70 V)	0.5 A: Type 1L+ (-70 V) / 2 A: Type (-18 V)
Controlling a digital input	Yes	Yes
Switching capacity of the outputs		
• with resistive load, max.	0.5 A	0.5 A / 2 A
• with inductive load, max.	0.5 A	0.5 A / 2 A
• on lamp load, max.	5 W	0.5 A: 5 W / 2 A 10 W
Load resistance range		
• lower limit	48 Ω	0.5 A: 48 ohms / 2 A: 12 ohms
• upper limit	4 kΩ	4 kΩ
Output voltage		
• for signal "1", min.	1L+ (-0.8V)	1L+ (-0.8 V) / 2L+ (-0.8 V)
Output current		
• for signal "1" rated value	0.5 A	0.5 A / 2 A
• for signal "0" residual current, max.	0.1 mA	0.1 mA
Parallel switching of two outputs		
• for uprating	No	No
• for redundant control of a load	Yes	Yes
Switching frequency		
• with resistive load, max.	100 Hz	0.5 A: 100 Hz / 2 A: 40 Hz
• with inductive load, max.	0.5 Hz	0.5 Hz
• on lamp load, max.	1 Hz	1 Hz

Technical specifications

Article number	6ES7148-6JJ00-0BB0 ET 200eco PN, CM 8x IO-Link, M12-L	6ES7148-6JE00-0BB0 ET 200eco PN, CM 4x IO-Link, M12-L
Total current of the outputs		
• Current per group, max.	1L+: 4 A	1L+: 2 A / 2L+: 5.5 A
• Current per module, max.	4 A	7.5 A
Cable length		
• unshielded, max.	30 m	30 m
Encoder		
Connectable encoders		
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA
IO-Link		
Number of ports	8	4
• of which simultaneously controllable	8	4
IO-Link protocol 1.0	Yes	Yes
IO-Link protocol 1.1	Yes	Yes
Transmission rate	4.8 kBaud (COM1); 38.4 kBaud (COM2), 230 kBaud (COM3)	4.8 kBaud (COM1); 38.4 kBaud (COM2), 230 kBaud (COM3)
Cycle time, min.	2 ms	2 ms
Size of process data, input per port	33 byte	33 byte
Size of process data, input per module	264 byte	132 byte
Size of process data, output per port	32 byte	32 byte
Size of process data, output per module	256 byte	128 byte
Memory size for device parameter	2 kbyte; for each port	2 kbyte; for each port
Master backup	Possible with function block IO_LINK_MASTER	Possible with function block IO_LINK_MASTER
Configuration without S7-PCT	Possible; autostart/manual function	Possible; autostart/manual function
Cable length unshielded, max.	20 m	20 m
Operating modes		
• IO-Link	Yes	Yes
• DI	Yes	Yes
• DQ	Yes; max. 100 mA	Yes; max. 100 mA
Connection of IO-Link devices		
• Port type A	Yes; via 3-core cable	Yes; via 3-core cable
• Port type B	No	No
• via three-wire connection	Yes	Yes
Interfaces		
Number of PROFINET interfaces	1	1
1. Interface		
Interface type	PROFINET with 100 Mbit/s full duplex (100BASE-TX)	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
Interface types		
• M12 port	Yes; 2x M12, 4-pin, D-coded	Yes; 2x M12, 4-pin, D-coded
• Number of ports	2	2
• integrated switch	Yes	Yes
Protocols		
• PROFINET IO Device	Yes	Yes
• Open IE communication	Yes	Yes
Interface types		
M12 port		
• Autonegotiation	Yes	Yes
• Autocrossing	Yes	Yes
• Transmission rate, max.	100 Mbit/s	100 Mbit/s
Protocols		
Supports protocol for PROFINET IO	Yes	Yes
PROFIsafe	No	No
EtherNet/IP	Yes	Yes
Modbus TCP	Yes	Yes

I/O systemsSIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN**I/O devices > IO-Link master****Technical specifications**

Article number	6ES7148-6JJ00-0BB0 ET 200eco PN, CM 8x IO-Link, M12-L	6ES7148-6JE00-0BB0 ET 200eco PN, CM 4x IO-Link, M12-L
PROFINET IO Device		
Services		
- IRT	Yes; 250 µs to 4 ms in 125 µs frame	Yes; 250 µs to 4 ms in 125 µs frame
- Prioritized startup	Yes	Yes
- Shared device	Yes	Yes
- Number of IO Controllers with shared device, max.	2	2
Redundancy mode		
• PROFINET system redundancy (S2)	Yes	Yes
• PROFINET system redundancy (R1)	No	No
• H-Sync forwarding	Yes	Yes
Media redundancy		
- MRP	Yes	Yes
EtherNet/IP		
Services		
- CIP Implicit Messaging	Yes	Yes
- CIP Explicit Messaging	Yes	Yes
- CIP Safety	No	No
- Shared device	Yes; 2x EtherNet/IP Scanner	Yes; 2x EtherNet/IP Scanner
- Number of scanners with shared device, max.	2	2
Updating times		
- Requested Packet Interval (RPI)	2 ms	2 ms
Redundancy mode		
- DLR (Device Level Ring)	No	No
Address area		
- Address space per module, max.	300 byte	300 byte
- LargeForwardOpen (Class3)	No	No
Modbus TCP		
Services		
- read coils (code=1)	Yes	Yes
- read discrete inputs (code=2)	Yes	Yes
- Read Holding Registers (Code=3)	Yes	Yes
- write single coil (code=5)	Yes	Yes
- write multiple coils (code=15)	Yes	Yes
- Write Multiple Registers (Code=16)	Yes	Yes
- Parameter change by master	No	No
- Modbus TCP Security Protocol	No	No
Address space per station		
- Address space per station, max.	300 byte	300 byte
- Access-consistent address space	2 byte	2 byte
Updating time		
- I/O request interval	2 ms	2 ms
Connections		
- Number of connections per slave	12	12
Open IE communication		
• TCP/IP	Yes; (only EtherNet/IP or Modbus TCP)	Yes; (only EtherNet/IP or Modbus TCP)
• SNMP	Yes	Yes
• LLDP	Yes	Yes
• ARP	Yes	Yes
Interrupts/diagnostics/status information		
Substitute values connectable	Yes	Yes
Alarms		
• Diagnostic alarm	Yes; Parameterizable	Yes; Parameterizable
• Maintenance interrupt	Yes; Parameterizable	Yes; Parameterizable
• Hardware interrupt	Yes; Parameterizable	Yes; Parameterizable

Technical specifications

Article number	6ES7148-6JJ00-0BB0 ET 200eco PN, CM 8x IO-Link, M12-L	6ES7148-6JE00-0BB0 ET 200eco PN, CM 4x IO-Link, M12-L
Diagnoses		
• Diagnostic information readable	Yes	Yes
• Monitoring the supply voltage	Yes	Yes
- parameterizable	Yes	Yes
• Wire-break	Yes; DI, input current < 0.3 mA, per channel	Yes; DI, input current < 0.3 mA, per channel
• Short-circuit encoder supply	Yes; Per channel	Yes; Per channel
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)		Yes; green LED
• NS LED	Yes; green/red LED	Yes; green/red LED
• MS LED	Yes; green/red LED	Yes; green/red LED
• IO LED	Yes; red-green-yellow LED	Yes; red-green-yellow LED
• Channel status display	Yes; green LED	Yes; green LED
• for channel diagnostics	Yes; red LED	Yes; red LED
• For load voltage monitoring	Yes; green LED	Yes; green LED
• Connection display LINK TX/RX	Yes; green LED, only link	Yes; green LED, only link
Potential separation		
between the load voltages	Yes	Yes
between Ethernet and electronics	Yes	Yes
Potential separation channels		
• between the channels	No	Yes
• between the channels and the power supply of the electronics		8 channels are non-isolated and 8 channels are isolated from supply voltage 1L+
Degree and class of protection		
IP degree of protection	IP65/67/69K	IP65/67/69K
Standards, approvals, certificates		
Suitable for safety-related tripping of standard modules	Yes; From FS01	Yes; From FS01
Highest safety class achievable for safety-related tripping of standard modules		
• Performance level according to ISO 13849-1	PL d	PL d
• Category according to ISO 13849-1	Cat. 3	Cat. 3
• SIL acc. to IEC 62061	SIL 2	SIL 2
Use in hazardous areas		
• Explosion protection category for gas	ATEX, UKEX, IECEx, CCCEX for Zone 2	No
• Explosion protection category for dust	ATEX, UKEX, IECEx, CCCEX for Zone 22	No
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C	-40 °C
• max.	60 °C	60 °C
Altitude during operation relating to sea level		
• Ambient air temperature-barometric pressure-altitude	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions	Up to max. 5 000 m, at installation height > 2 000 m additional restrictions
connection method		
Design of electrical connection	4/5-pin M12 circular connectors	4/5-pin M12 circular connectors
Design of electrical connection for the inputs and outputs	M12, 5-pin, A-coded	M12, 5-pin, A-coded
Design of electrical connection for supply voltage	M12, 4-pin, L-coded	M12, 4-pin, L-coded

I/O systems

SIMATIC ET 200 systems without control cabinet

SIMATIC ET 200eco PN

I/O devices > IO-Link master**Technical specifications**


Article number	6ES7148-6JJ00-0BB0	6ES7148-6JE00-0BB0
	ET 200eco PN, CM 8x IO-Link, M12-L	ET 200eco PN, CM 4x IO-Link, M12-L
Dimensions		
Width	45 mm	45 mm
Height	200 mm	200 mm
Depth	48 mm	48 mm
Weights		
Weight, approx.	780 g	780 g

Overview Mounting rail

- Aluminum mounting rail for installation of SIMATIC ET 200eco PN
- Securing the I/O devices via two profile screws
- Length of mounting rail 0.5 m

Ordering data**Article No.****Mounting rail for ET 200eco PN****6ES7194-6GA00-0AA0**

Length 0.5 m

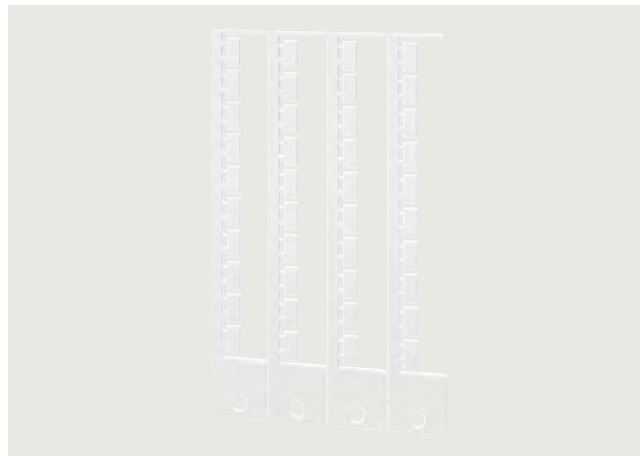Profile screw for mounting rail**6ES7194-6MA00-0AA0**For fixing the I/O devices on the mounting rail;
50 units**Overview Labels**

- Labels for channel and device labeling of the ET 200eco PN components

Ordering data**Article No.****Labels 10 mm x 5 mm RAL9016****6ES7194-2BA00-0AA0**For I/O devices with
2x M12 L-coded power connectors;
5 frames with 40 labels each**Labels 10 x 7 mm Ti-grey****3RT2900-1SB10**For I/O devices with
2x M12 A-coded power connectors;
5 frames with 40 labels each**Labels 10 mm x 7 mm yellow****6ES7194-6HA00-0AA0**For I/O devices with
2x M12 A-coded power connectors;
17 frames with 48 labels each

I/O systems

SIMATIC ET 200 systems without control cabinet
SIMATIC ET 200eco PN

Accessories > Connector cover

Overview

- Stainless steel connector cover for ET 200ecoPN M12-L
- Optional use in hazardous area zone 2 / 22
- Can be used as protection against shocks and unintentional disconnection of cables

Ordering data**Article No.**

Stainless steel connector cover
For using ET 200eco PN M12-L in hazardous area zone 2 / 22

6ES7194-6JA00-0BB0

Technical specifications

Article number	6ES7194-6JA00-0BB0
	Connector cover for ET200ecoPN M12-L
General information	
Product description	connector cover for ET200ecoPN M12-L
Suitability for use	accessories for use of the ET200ecoPN M12-L in hazardous area Zone 2/22
Degree and class of protection	
IP degree of protection	IP20
Ambient conditions	
Ambient temperature during assembly, min.	-40 °C
Ambient temperature during assembly, max.	80 °C
Ambient temperature during operation	
• min.	-40 °C
• max.	60 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	80 °C
Mechanics/material	
Material of housing	stainless steel with plastic edge protection
Material property	
• Silicone-free	Yes
Dimensions	
Width	50 mm
Height	200 mm
Depth	110 mm
Weights	
Weight, approx.	710 g

Overview


- RS 485 repeater with online line diagnostics for PROFIBUS DP
- PROFIBUS DP standard slaves (DP-V1)
- Automatic determination of fault types and locations
- Data transmission rate 9.6 kbps to 12 Mbps
- Connection via FastConnect using IDC

Ordering data
Article No.
Article No.
RS 485 diagnostic repeater
6ES7972-0AB01-0XA0

For connection of up to 2 segments to PROFIBUS DP; with online diagnostics functions for monitoring the bus cables

Accessories
RS 485 bus connector with 90° cable outlet

With screw-type connections, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6ES7972-0BA12-0XA0
6ES7972-0BB12-0XA0
PROFIBUS FastConnect bus connector RS 485 with 90° cable outlet

With insulation displacement terminals, max. transfer rate 12 Mbps

Without PG interface

- 1 unit
- 100 units

6ES7972-0BA52-0XA0
6ES7972-0BA52-0XB0

With PG interface

- 1 unit
- 100 units

6ES7972-0BB52-0XA0
6ES7972-0BB52-0XB0

Without PG interface, grounding via control cabinet cover

- 1 unit

6ES7972-0BA70-0XA0

With PG interface, grounding via control cabinet cover

- 1 unit

6ES7972-0BB70-0XA0
RS 485 bus connector with angled cable outlet (35°)

With screw-type connections, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6ES7972-0BA42-0XA0
6ES7972-0BB42-0XA0
PROFIBUS FastConnect RS 485 bus connector with angular cable outlet (35°)

With insulation displacement terminals, max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6ES7972-0BA61-0XA0
6ES7972-0BB61-0XA0
PROFIBUS FastConnect stripping tool
6GK1905-6AA00

Pre-adjusted stripping tool for fast stripping of PROFIBUS FastConnect bus cables

PROFIBUS FC standard cable
6XV1830-0EH10

Standard type with special design for quick mounting, 2-wire, shielded, sold by the meter, max. delivery unit 1000 m, minimum order quantity 20 m

S7 Manual Collection
6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:
 All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

S7 Manual Collection update service for 1 year
6ES7998-8XC01-8YE2

Scope of supply: Current DVD S7 Manual Collection and the three subsequent updates

Connecting cable for PROFIBUS
6ES7901-4BD00-0XA0

12 Mbps, for PG connection to PROFIBUS DP, pre-assembled with 2 x 9-pin sub D plug, 3.0 m

I/O systems

PROFIBUS components

Diagnostics

Diagnostic repeater for PROFIBUS DP**Technical specifications**

Article number	6ES7972-0AB01-0XA0 Diagnostic repeater f. PROFIBUS-DP,
Supply voltage	
Rated value (DC)	24 V
Power loss	
Power loss, typ.	4 W
Interfaces	
PROFIBUS DP	
• Transmission rate, max.	12 Mbit/s; 9.6 kbit/s to 12 Mbit/s
Degree and class of protection	
IP degree of protection	IP20
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	60 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Relative humidity	
• Operation, max.	95 %; at 25 °C

Article number	6ES7972-0AB01-0XA0 Diagnostic repeater f. PROFIBUS-DP,
connection method	
Design of electrical connection for supply voltage	Terminal module
Design of electrical connection for PROFIBUS cables	FastConnect insulation displacement, 10 clamping cycles possible
Dimensions	
Width	80 mm
Height	125 mm
Depth	67.5 mm
Weights	
Weight, approx.	300 g

SIPLUS diagnostic repeater for PROFIBUS
Overview


- RS 485 repeater with online line diagnostics for PROFIBUS DP
- PROFIBUS DP standard slave (DP-V1)
- Automatic determination of fault type and location
- Transmission rate from 9.6 kbps to 12 Mbps
- Connection via FastConnect IDC

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

For technical documentation on SIPLUS, see:

<http://www.siemens.com/siplus-extreme>

Ordering data
Article No.
Article No.
SIPLUS RS 485 diagnostic repeater

To connect up to 2 segments to PROFIBUS DP, with online diagnostics functions for monitoring the bus cables

Exposure to environmental substances

6AG1972-0AB01-4XA0
Accessories
RS 485 bus connector with 90° cable outlet

Max. transfer rate 12 Mbps

Extended temperature range and exposure to environmental substances

- Without PG interface
- With PG interface

6AG1972-0BA12-2XA0
6AG1972-0BB12-2XA0
RS 485 bus connector with angled cable outlet

(Extended temperature range -40 °C ... +70 °C and exposure to environmental substances)

Max. transfer rate 12 Mbps

- Without PG interface
- With PG interface

6AG1972-0BA42-7XA0
6AG1972-0BB42-7XA0
Other accessories

See SIMATIC RS 485 diagnostic repeater, page 10/539

I/O systems


PROFIBUS components

Diagnostics

SIPLUS diagnostic repeater for PROFIBUS**Technical specifications**

Article number	6AG1972-0AB01-4XA0	Article number	6AG1972-0AB01-4XA0
Based on	6ES7972-0AB01-0XA0 SIPLUS DP diagnostic repeater	Based on	6ES7972-0AB01-0XA0 SIPLUS DP diagnostic repeater
Ambient conditions		Usage in industrial process technology	
Ambient temperature during operation		<ul style="list-style-type: none"> - Against chemically active substances acc. to EN 60654-4 - Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04 	Yes; Class 3 (excluding trichlorethylene) Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<ul style="list-style-type: none"> • min. • max. 	0 °C; = Tmin (incl. condensation/frost) 60 °C; = Tmax		
Ambient temperature during storage/transportation		Remark <ul style="list-style-type: none"> - Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04 	* The supplied plug covers must remain in place over the unused interfaces during operation!
<ul style="list-style-type: none"> • min. • max. 	-40 °C 70 °C		
Altitude during operation relating to sea level		Conformal coating	
<ul style="list-style-type: none"> • Installation altitude above sea level, max. • Ambient air temperature-barometric pressure-altitude 	5 000 m Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	<ul style="list-style-type: none"> • Coatings for printed circuit board assemblies acc. to EN 61086 • Protection against fouling acc. to EN 60664-3 • Military testing according to MIL-I-46058C, Amendment 7 • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	Yes; Class 2 for high reliability Yes; Type 1 protection Yes; Discoloration of coating possible during service life Yes; Conformal coating, Class A
Relative humidity			
<ul style="list-style-type: none"> • With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)		
Resistance			
Use in stationary industrial systems			
<ul style="list-style-type: none"> - to biologically active substances according to EN 60721-3-3 - to chemically active substances according to EN 60721-3-3 - to mechanically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 3S4 incl. sand, dust, *		
Use on ships/at sea			
<ul style="list-style-type: none"> - to biologically active substances according to EN 60721-3-6 - to chemically active substances according to EN 60721-3-6 - to mechanically active substances according to EN 60721-3-6 	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); * Yes; Class 6S3 incl. sand, dust; *		

Overview

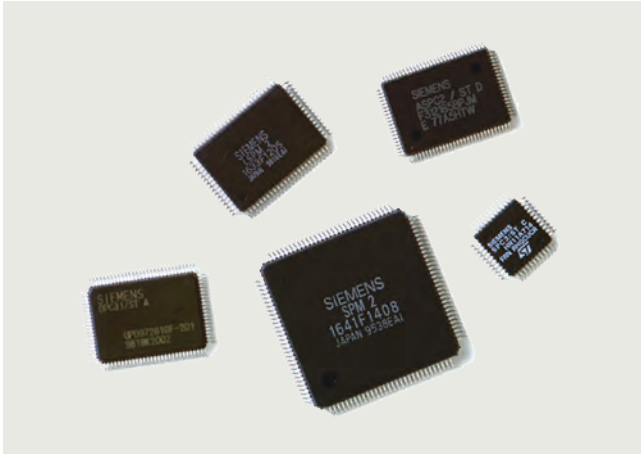

- Easy connection of field devices to PROFIBUS
- Integrated low-power management
- Different ASICs for the different functional requirements and application areas

Ordering data

ASIC ASPC2

For constructing master interface modules (quantity discount)

- 6 units (lead-free)
- 66 units (lead-free)
- 660 units (lead-free)
- 4620 units (lead-free)

6ES7195-0AA05-0XA0
6ES7195-0AA15-0XA0
6ES7195-0AA25-0XA0
6ES7195-0AA35-0XA0

ASIC LSPM2

For constructing simple slave interface modules (quantity discount)

- 330 units (lead-free)

6ES7195-0BA22-0XA0

ASIC SPC3

For constructing intelligent DP slave interface modules (quantity discount)

- 6 units (lead-free)
- 96 units (lead-free)
- 960 units (lead-free)
- 4800 units (lead-free)
- 750 units (lead-free) (tape & reel)

6ES7195-0BD04-0XA0
6ES7195-0BD14-0XA0
6ES7195-0BD24-0XA0
6ES7195-0BD34-0XA0
6ES7195-0BD44-0XA0

Article No.

DPC31 ASIC STEP C1

For constructing intelligent DP slave interface modules (quantity discount)

- 6 units (lead-free)
- 66 units (lead-free)
- 660 units (lead-free)
- 4620 units (lead-free)

6ES7195-0BF02-0XA0
6ES7195-0BF12-0XA0
6ES7195-0BF22-0XA0
6ES7195-0BF32-0XA0

ASIC SPC 4-2

For constructing intelligent DP slave interface modules (quantity discount)

- 5 units for laboratory development (lead-free)
- 160 units (lead-free, 1 tray)

6GK1588-3AA00
6GK1588-3AA15

ASIC SIM 1-2

For connection according to IEC H1 for PROFIBUS PA with a transfer rate of 31.25 Kbps

- 60 units (in tube)
- 1000 units (tape & reel)

6GK1588-3BB02
6GK1588-3BB21

I/O systems

PROFIBUS components


PROFIBUS DP ASICs

Technical specifications

	LSPM2	SPC3	DPC31
Protocol	PROFIBUS DP	PROFIBUS DP	PROFIBUS DP, PROFIBUS PA
Application range	Simple slave application	Intelligent slave application	Intelligent slave application
Transmission rate, max.	12 Mbps	12 Mbps	12 Mbps
Bus access	in ASIC	in ASIC	in ASIC
Automatic determination of transmission rate	Yes	Yes	Yes
Microprocessor required	No	Yes	integrated
Scope of firmware	not required	6 to 24 KB	Approx. 38 KB
Message buffer	-	1.5 KB	6 KB
Power supply	5 V DC	5 V DC	3.3 V DC
Power loss, max.	0.35 W	0.5 W	0.2 W
Permissible ambient temperature	-40 °C to +75 °C	-40 °C to +85 °C	-40 °C to +85 °C
Enclosure	MQFP, 80-pin	PQFP, 44-pin	PQFP, 100-pin
Frame size	4 cm ²	2 cm ²	4 cm ²
Delivery quantities (pcs.)	6/66/330/4950	6/96/750/960/4800	STEP B: 6/60/300/5100 STEP C1: 6/66/660/4620

	SPC 4-2	ASPC2	SIM 1-2
Protocol	PROFIBUS DP PROFIBUS FMS PROFIBUS PA	PROFIBUS DP PROFIBUS FMS PROFIBUS PA	PROFIBUS PA
Application range	Intelligent slave application	Master application	Medium Attachment
Transfer rate, max.	12 Mbps	12 Mbps	31.25 Kbps
Bus access	in ASIC	in ASIC	-
Automatic determination of transfer rate	Yes	Yes	-
Microprocessor required	Yes	Yes	-
Scope of firmware	3 to 30 KB	80 KB	not required
Message buffer	3 KB	1 MB (external)	-
Power supply	5 V DC, 3.3 V	5 V DC	via bus
Power loss, max.	0.6 W at 5V 0.01 W at 3.3 V	0.9 W	0.05 W
Permissible ambient temperature	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C
Enclosure	TQFP, 44-pin	P-MQFP, 100-pin	MLPQ, 40-pin
Frame size	2 cm ²	4 cm ²	36 mm ²
Delivery quantities (pcs.)	5/160	6/66/660/4620	30/60/1000

Overview

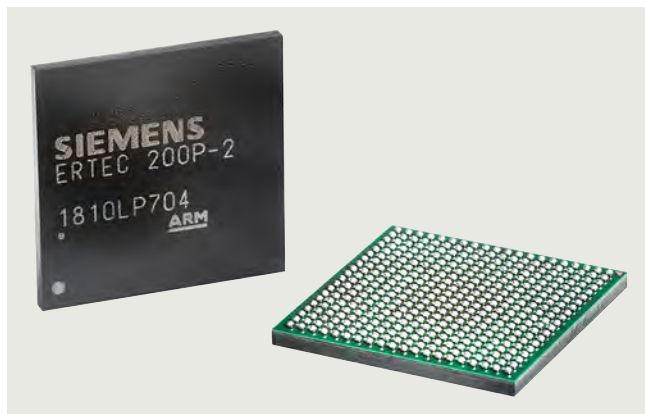

Innovative and well-proven

As a dedicated PI member, Siemens has been actively advancing the development of PROFINET from the beginning. Siemens technology components benefit from the accumulated know-how. They have been field-proven in countless products, provide maximum performance capability and can be scaled to exact requirements.

And that is not all. Siemens Competence Centers offer advice for choosing the right technology component for the device, training opportunities and support throughout the development process, up to and including successful certification.

ERTEC 200P-2 – Your path to the fastest PROFINET

The ERTEC 200P-2 (Enhanced Real-Time Controller) sets new standards for communication.


Designed for cycle times as low as 125 μ s, the performance upgrade for PROFINET has been integrated in the ERTEC 200P-2. With its 250 MHz ARM9 CPU and integrated IRT (isochronous real-time) switch, field devices with demanding performance requirements can be implemented. The reduced chip size simplifies integration into compact field devices. The CPU also allows integration of a user's own applications, which makes an external host CPU unnecessary depending on the application.

Development kit for ERTEC 200P-2

The development kit includes an evaluation board with sample applications so that commissioning can be completed in minimum time. The PROFINET stack is delivered as source code and includes the eCos open source real-time operating system and all development tools, analysis programs and documentation. Field devices with RT (real-time) and IRT (isochronous real-time) can be implemented with the ERTEC ASICs. The integrated switch allows the construction of field devices with two ports.

Functions:

- Isochronous mode
- Shared device for 4 controllers
- S2 system redundancy
- PROFINET performance upgrade with a minimum cycle time of 125 μ s.
- MRP/MRPD
- Regular, no-cost updates
- Current technology certificate

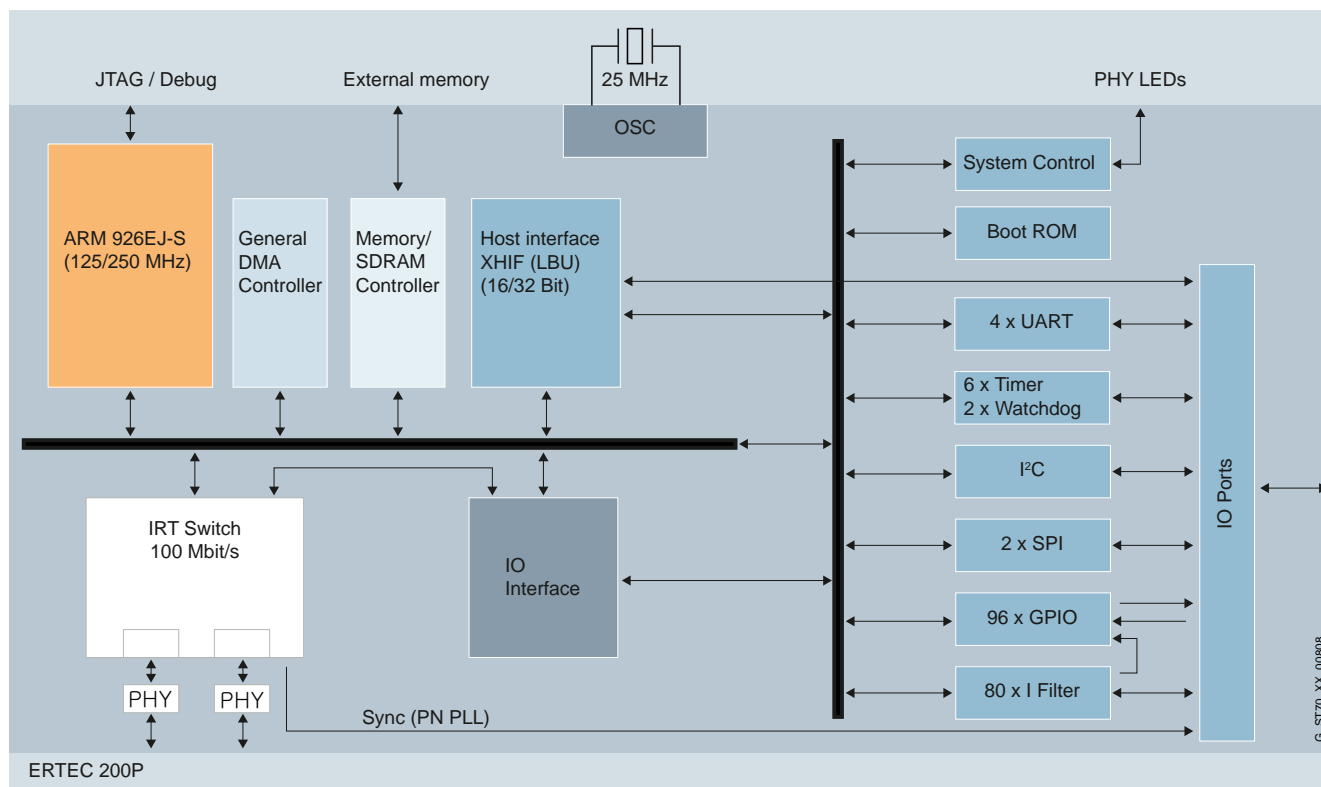

Internal structure of ERTEC 200P-2

I/O systems

PROFINET components

ERTEC Enhanced Real-Time Ethernet Controller**Ordering data****Article No.****ERTEC 200P-2**

ASIC for connection to switched Ethernet 100 Mbps, Ethernet controller with integrated 2-port switch, ARM 926 processor and integrated PHYs; recommended for new developments

- 10 units (evaluation pack)
- 90 units (single tray)
- 450 units (drypack, 5 trays)
- 1 000 units (tape & reel)

6ES7195-0BH02-0XA0**6ES7195-0BH12-0XA0****6ES7195-0BH22-0XA0****6ES7195-0BH32-0XA0****PROFINET Device Development Kit for ERTEC 200P****6ES7195-3BE00-0YA1****ERTEC 200**

ASIC ERTEC 200 for connection to Switched Ethernet 10/100 Mbps, Ethernet controller with integral 2-port switch, ARM 946 processor and integral PHYs

- 70 units (single tray)
- 350 units (drypack, 5 trays)
- 3500 units (package, 10 drypacks)
- 1050 units (tape & reel)

6GK1182-0BB01-0AA1**6GK1182-0BB01-0AA2****6GK1182-0BB01-0AA3****6GK1182-0BB01-0AA4****ERTEC 400**

ASIC ERTEC 400 for connection to Switched Ethernet 10/100 Mbps, Ethernet controller with integrated 4-port switch, ARM 946 processor and PCI interface (V2.2), data preparation for real-time and isochronous real-time for PROFINET IO

- 70 units (single tray)
- 350 units (drypack, 5 trays)

6GK1184-0BB01-0AA1**6GK1184-0BB01-0AA2****Technical specifications****ERTEC 200P-2**

Integrated IRT switch	2-port
Integrated PHYs	Yes
Copper and fiber-optic cable supported	Yes
Minimum cycle time	125 µs
ARM CPU	ARM 926
Clock frequency	250 MHz
Configurable IOs, general purpose IOs	96
Enclosure size	17x17 mm
Ball pitch	0.8 mm

Overview



With the development kits for PROFINET, compact or modular PROFINET field devices can be developed quickly and with little effort. Depending on the application, different development kits are available.

The development kits for the ASICs of the ERTEC family (Enhanced Real-Time Ethernet Controller) are suitable for the development of field devices with an integrated IRT switch (Isochronous Real-Time). The demand for real-time capability, linear topology capability, and for IT integration is therefore met perfectly.

With the help of the development kit for standard Ethernet controllers, PROFINET devices can be developed on the basis of a standard Ethernet controller. Devices with RT (Real-Time) can be implemented in the field device without special hardware.

The PROFI-safe starter kit permits the implementation of fail-safe devices. In so doing, the PROFI-safe stack applicatively builds on the PROFINET stack.

Ordering data

Article No.

ERTEC Development Kits / Evaluation Kits

PROFINET Device Development Kit for ERTEC 200P

6ES7195-3BE00-0YA1

PROFI-safe starter kit V3.5 according to the PROFI-safe V2.6.1 profile

6ES7195-3BF03-0YA0

ERTEC ASICs**ERTEC 200P-2**

ASIC for connection to Switched Ethernet 100 Mbps, Ethernet controller with integral 2-port switch, ARM 926 processor and integral PHYs

- 10 units (evaluation pack)
- 90 units (single tray)
- 450 units (drypack, 5 trays)
- 1 000 units (tape & reel)

6ES7195-0BH02-0XA0

6ES7195-0BH12-0XA0

6ES7195-0BH22-0XA0

6ES7195-0BH32-0XA0

I/O systems

PROFINET components

PROFINET driver

Overview

PROFINET driver for controllers


Reasonably priced components are a major competitive advantage, especially in series machine building. Here, users often develop in-house control software. For reasons of performance, flexibility and cost, the individual application is then implemented on standard PCs. The PROFINET driver supports this in-house development and requires no special hardware thanks to its conventional Ethernet interface.

Because the PROFINET driver is delivered as source code, proprietary solutions can be ported into various operating systems and hardware platforms. As a result, the PROFINET driver can also be optimally used in embedded systems for in-house controller solutions. Design and configuration is easy and takes place via an open XML interface without the need for engineering tools. The well-proven PROFINET stack from SIMATIC forms the centerpiece.

The PROFINET driver is suitable for both simple applications, such as individual PROFINET lines, as well as for complex machines. It supports PROFINET RT for cycle times starting from 1 ms via a standard Ethernet interface. Alternatively, PROFINET IRT can also be used for cycle times starting from 500 μ s, in connection with the CP1625 controller development kit.

PROFINET ConfigLib

PROFINET networks must be planned. This can be carried out for the PROFINET driver using the TIA Portal. A license is not required. ConfigLib is a standalone API for generating PROFINET hardware configurations. It can be used to create RT and IRT projects, whereby ConfigLib takes over the planning algorithm.

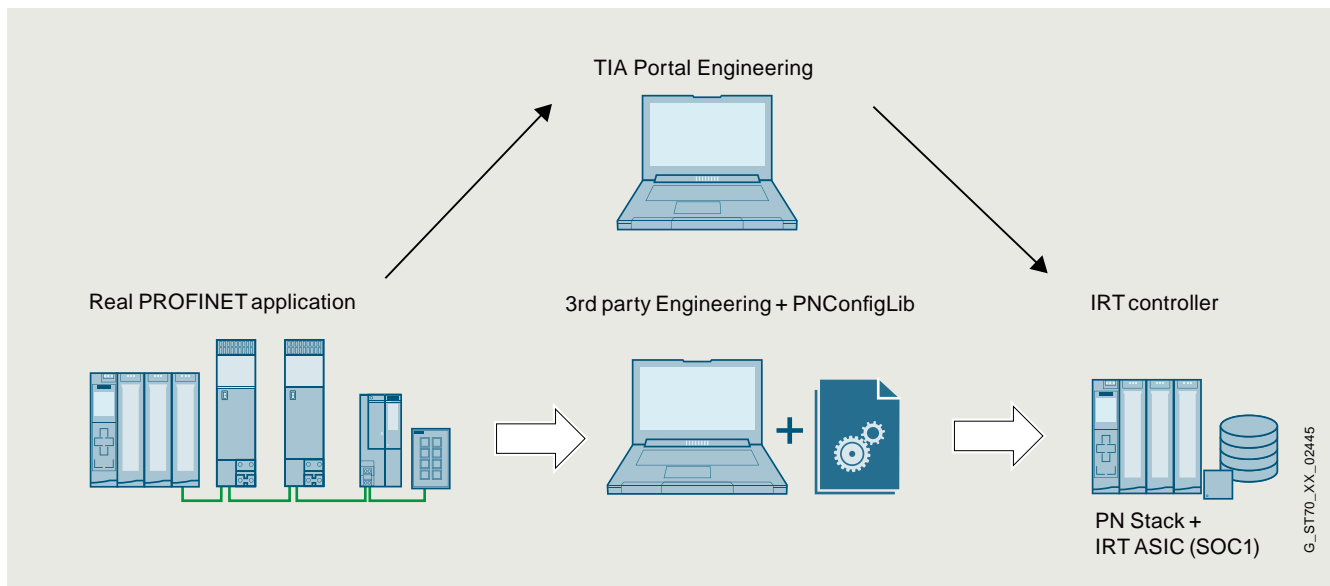

PNConfigLib – Efficient creation of hardware configurations without the TIA Portal

CP1625 Controller Development Kit

Siemens SOC1 gives you the hardware support required to build an IRT controller. The CP1625 Controller Development Kit is suitable for both standalone and host modes.

- Stand-alone mode: PN stack and application run on the CP1625
- Host mode: Application runs on the PC or, for example, ARM. The stack runs on the CP1625



SIMATIC CP1625

Ordering data**Article No.****PROFINET driver**

For connecting distributed I/O and drives to user-specific control applications via PROFINET

Development kit PROFINET controller and device for download; source code with example implementation, IRT controller in connection with CP1625 or CP1625 Dev (to be ordered separately);

Consignee email address required for delivery

SIMATIC CP1625 Development Board; PCIe card for PROFINET IRT

Runtime licenses

- 1 unit
- 10 units
- 50 units
- 200 units
- 500 units

6ES7195-3AA00-0YA1**6ES7648-2CF10-1BA0****6ES7195-3AA05-0XA0****6ES7195-3AA10-0XA0****6ES7195-3AA20-0XA0****6ES7195-3AA30-0XA0****6ES7195-3AA40-0XA0**

I/O systems

Network components for PROFIBUS
Electrical networks (RS 485)

Active RS 485 terminating element

Overview



- Used to terminate bus segments at transfer rates of 9.6 Kbps to 12 Mbps
- Power supply independent of the bus nodes

Designed for Industry

- End-device independent bus termination thanks to own power supply

Ordering data

Article No.

Active RS 485 terminating element for PROFIBUS

6ES7972-0DA00-0AA0

For terminating bus segments at transmission rates of 9.6 kbps to 12 Mbps

Technical specifications

Article number	6ES7972-0DA00-0AA0 RS485 Termin. resistor f. PROFIBUS/MPI,
Supply voltage	
Rated value (DC)	24 V
Input current	
Current consumption, typ.	30 mA
Power loss	
Power loss, max.	0.72 W
Interfaces	
PROFIBUS DP	
• Transmission rate, max.	12 Mbit/s; 9.6 kbit/s to 12 Mbit/s
Degree and class of protection	
IP degree of protection	IP20
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	60 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Relative humidity	
• Operation, max.	95 %; at +25 °C
connection method	
Design of electrical connection for supply voltage	Screw terminal block
Design of electrical connection for PROFIBUS cables	Screw terminal block
Dimensions	
Width	60 mm
Height	70 mm
Depth	43 mm
Weights	
Weight, approx.	95 g

Overview



- Automatic detection of transmission rates
- Transmission rates from 9.6 kbps to 12 Mbps are possible, incl. 45.45 kbps
- 24 V DC voltage display
- Indication of segment 1 and 2 bus activity
- The separation of segment 1 and segment 2 by means of switches is possible
- Separation of the right segment with an inserted terminating resistor
- Decoupling of segment 1 and segment 2 in the case of static interference

Designed for Industry

- For increasing the expansion
- Galvanic isolation of segments
- Commissioning support
 - Switches for separation of segments
 - Bus activity display
 - Segment separation in the case of an incorrectly inserted terminating resistor

In this context, please also note the diagnostics repeater that provides extensive diagnostics functions for physical line diagnostics in addition to the normal repeater functionality.

Technical specifications

Article number	6ES7972-0AA02-0XA0 Repeater RS485 f. PROFIBUS/MPI
Supply voltage	
Rated value (DC)	24 V
Input current	
Current consumption, max.	100 mA; 100 mA without loads at PG/OP socket; 130 mA load at PG/OP socket (5 V/90 mA); 200 mA load at PG/OP socket (24 V/100 mA)
Power loss	
Power loss, typ.	0.7 W
Interfaces	
PROFIBUS DP	
• Transmission rate, max.	12 Mbit/s; 9.6 kbit/s to 12 Mbit/s
Degree and class of protection	
IP degree of protection	IP20
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	60 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Relative humidity	
• Operation, max.	95 %; at 25 °C
connection method	
Design of electrical connection for supply voltage	Terminal module
Design of electrical connection for PROFIBUS cables	2 terminal blocks
Dimensions	
Width	45 mm
Height	128 mm
Depth	59.3 mm
Weights	
Weight, approx.	350 g

Ordering data

Article No.

RS 485 repeater for PROFIBUS

Transfer rate up to max. 12 Mbps,
24 V DC, IP20 enclosure

6ES7972-0AA02-0XA0

I/O systems

Network components for PROFIBUS
Electrical networks (RS 485)

SIPLUS DP active RS 485 terminating element

Overview



- Used to terminate bus segments at rates of 9.6 kbps to 12 Mbps
- Power supply independent of the bus participants

Designed for Industry

- End-device independent bus termination thanks to own power supply

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

For technical documentation on SIPLUS, see:

<http://www.siemens.com/siplus-extreme>

Ordering data

SIPLUS active RS 485 terminating element for PROFIBUS

To terminate bus segments at transfer rates of 9.6 kbps to 12 Mbps

Extended temperature range and exposure to environmental substances

Article No.

6AG1972-0DA00-2AA0

Technical specifications

Article number	6AG1972-0DA00-2AA0
Based on	6ES7972-0DA00-0AA0 SIPLUS DP RS485 terminator
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C; = Tmin (incl. condensation/frost)
• max.	60 °C; = Tmax
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
Resistance	
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *

Article number	6AG1972-0DA00-2AA0
Based on	6ES7972-0DA00-0AA0 SIPLUS DP RS485 terminator
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

I/O systems

Network components for PROFIBUS
Electrical networks (RS 485)

SIPLUS RS 485 repeater

Overview



- Automatically detects transmission rate
- 45.45 kbps transmission rate is possible
- 24 V DC voltage display
- Indication of segment 1 and 2 bus activity
- The separation of segment 1 and segment 2 by means of switches is possible
- Separation of the right segment with an inserted terminating resistor
- Decoupling of segment 1 and segment 2 in the case of static interference

Designed for Industry

- For increasing the number of participants and the expansion
- Electric isolation of segments
- Commissioning support
 - Segment separation switch
 - Bus activity display
 - Segment separation in the case of an incorrectly inserted terminating resistor

In this context, please also note the diagnostics repeater that provides extensive diagnostics functions for physical line diagnostics in addition to the normal repeater functionality. This is described in "Distributed I/O / Diagnostics / Diagnostic repeater for PROFIBUS DP".

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

For technical documentation on SIPLUS, see:

<http://www.siemens.com/siplus-extreme>

Ordering data

SIPLUS RS 485 repeater for PROFIBUS

Transfer rate up to max. 12 Mbps,
24 V DC, enclosure IP20

Extended temperature range and
exposure to environmental
substances

Article No.

6AG1972-0AA02-7XA0

Technical specifications

Article number	6AG1972-0AA02-7XA0	Article number	6AG1972-0AA02-7XA0
Based on	6ES7972-0AA02-0XA0 SIPLUS DP RS485 repeater	Based on	6ES7972-0AA02-0XA0 SIPLUS DP RS485 repeater
Ambient conditions		Use on ships/at sea	
Ambient temperature during operation		- to biologically active substances according to EN 60721-3-6	
• min.	-25 °C; = Tmin (incl. condensation/frost)	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	
• max.	70 °C; = Tmax	- to chemically active substances according to EN 60721-3-6	
Ambient temperature during storage/transportation		- to mechanically active substances according to EN 60721-3-6	
• min.	-40 °C	Yes; Class 6S3 incl. sand, dust; *	
• max.	70 °C	Usage in industrial process technology	
Altitude during operation relating to sea level		- Against chemically active substances acc. to EN 60654-4	
• Installation altitude above sea level, max.	5 000 m	- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Yes; Class 3 (excluding trichlorethylene)	
Relative humidity		Remark	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	
Resistance		Conformal coating	
Use in stationary industrial systems		• Coatings for printed circuit board assemblies acc. to EN 61086	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 2 for high reliability	
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Type 1 protection	
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	• Military testing according to MIL-I-46058C, Amendment 7	
		• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	
		Yes; Discoloration of coating possible during service life	
		Yes; Conformal coating, Class A	


I/O systems

Gateways

PN/PN coupler

Overview

- Fast deterministic data exchange between CPUs with PROFINET controller, even beyond network boundaries
- Configuration with two PROFINET devices completely independent of the communication technology

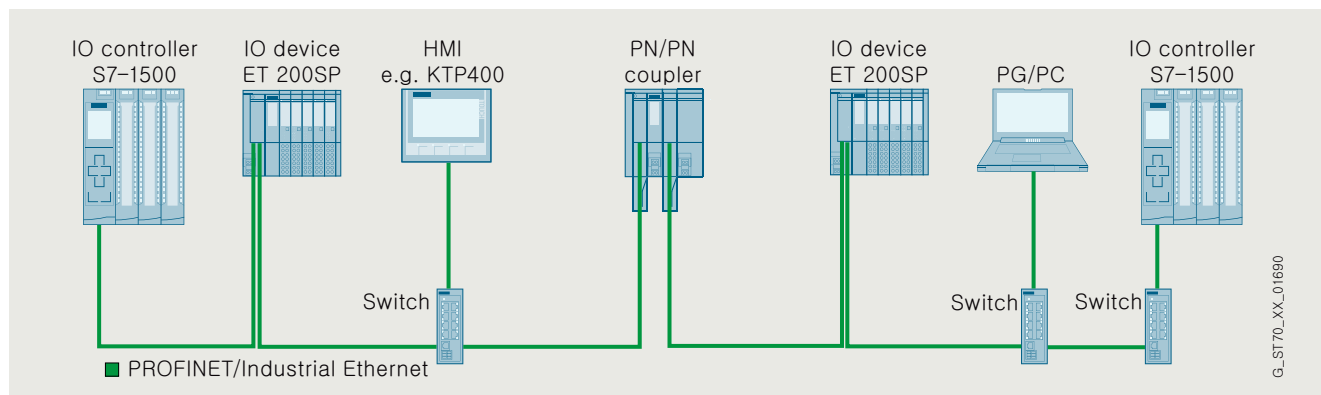

Data transmission between two S7-1500 IO controllers beyond a PROFINET limit

- Very simple configuration of the data exchange via virtual IO modules or alternatively via data records for larger amounts of data
- Simultaneous data transfer to up to 3 CPUs on own network side and/or up to 4 CPUs on opposite network side
- Easy to integrate into any PROFINET network with 2 ports per network side
- Fieldbus connection via a SIMATIC BusAdapter; this allows free selection of the connection system (RJ45, FC cable direct connection) and connection hardware (copper, POF, PCF, glass fiber). FO-to-copper media conversion can also be realized economically and without external converters.
- Firmware update
- Support for Ethernet services (ping, arp, SNMP, MIP-2, LLDP)
- Comprehensive diagnostics via LED displays and interrupts
- Extensive compatibility with the PN/PN coupler up to firmware version V3.0

Additional functions

- Quantity structures
 - Cyclic transmission: Up to 1 440 bytes each for input and output data
 - Data record transfer: Up to 4 096 bytes per slot. Buffering of up to eight data records per slot
 - Maximum 16 input/output areas for data exchange
 - Max. 254 bytes of input and 253 bytes of output data per module
- Exchange of fail-safe data between two F-CPU's via F-SendDP and F_ReceiveDP
- Shared device with up to four IO controllers per network side
- Module-internal shared input / shared output (MSI/MSO)
- Device replacement without programming device
 - With topological configuration via proximity detection (LLDP)
 - Without topological configuration via redundant storage of the station name in the BusAdapter. A separate removable memory card is not required.
- Reset button for restoring the factory settings
- Redundant power supply
- Galvanic isolation between the two PROFINET IO subnets
- Media redundancy (MRP and MRPD)
- I&M data

Ordering data	Article No.	Article No.
SIMATIC PN/PN coupler For deterministic data exchange between max. 4 PN controllers per side, also beyond network boundaries, transfer of PROFIsafe, I/O, MSI, MSO and data record communication, redundant power supply, PN connection via SIMATIC BusAdapter (BA), supplied without BusAdapter	6ES7158-3AD10-0XA0	SIMATIC BusAdapter BA 2xLC, 2x LC glass fiber-optic cable connections
Accessories		SIMATIC BusAdapter: BA LC/RJ45 Media converter glass FOC/CU 1x LC FO connection and 1x RJ45 connection
Mounting rail 35 mm		SIMATIC BusAdapter: BA LC/FC Media converter glass FOC/CU 1x LC FO connection and 1x FastConnect (FC) connection
SIMATIC, DIN rail 35 mm Length: 483 mm for 19" cabinets	6ES5710-8MA11	SIMATIC ET 200SP, 160 reference designation labels 10 sheets (160 labels), for BA, BU, IM and I/O modules
SIMATIC, DIN rail 35 mm Length: 530 mm for 600 mm cabinets	6ES5710-8MA21	Labeling strips
SIMATIC, DIN rail 35 mm Length 830 mm for 900 mm cabinets	6ES5710-8MA31	SIMATIC ET 200SP, 500 labeling strips light gray, roll with 500 strips
SIMATIC, DIN rail 35 mm, length 2 m	6ES5710-8MA41	SIMATIC ET 200SP, 500 labeling strips yellow, roll with 500 strips
SIMATIC ET 200SP, BusAdapter BA 2xRJ45 2 RJ45 sockets	6ES7193-6AR00-0AA0	SIMATIC ET 200SP, 1000 labeling strips light gray, 10 sheets DIN A4, perforated, paper, 180 g/sqm
SIMATIC ET 200SP, BusAdapter BA 2xFC 2x FastConnect connection	6ES7193-6AF00-0AA0	SIMATIC ET 200SP, 1000 labeling strips yellow gray, 10 sheets DIN A4, perforated, paper, 180 g/sqm
SIMATIC ET 200SP, BusAdapter BA 2xSCRJ 2 SCRJ FO connections	6ES7193-6AP00-0AA0	Spare parts
SIMATIC ET 200SP, BusAdapter BA SCRJ/RJ45 Media converter FOC-CU 1x SCRJ FO connection and 1x RJ45 connection	6ES7193-6AP20-0AA0	Cover for BusAdapter interface 5 units
SIMATIC ET 200SP, BusAdapter: BA SCRJ/FC Media converter FOC-CU 1x SCRJ FO connection and 1x FastConnect (FC) connection	6ES7193-6AP40-0AA0	Power supply connector
		Plug, female, 2x2-pole, for ET 200SP, interface module, KP32F, PN-PN coupler, grid size 5.08 mm spring-loaded terminals, internally bridged, color-coded, 10 units per packing unit

Technical specifications

Article number	6ES7158-3AD10-0XA0 SIMATIC PN/PN Coupler	Article number	6ES7158-3AD10-0XA0 SIMATIC PN/PN Coupler
General information		Engineering with	
Product type designation	PN/PN coupler	• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V15.1 or higher
Product function		• PROFINET from GSD version/ GSD revision	V2.3
• I&M data	Yes; I&M0 to I&M3	Installation type/mounting	
• Isochronous mode	No; For operation on isochronous bus	Mounting	Mounting rail 7.5 mm and 15 mm
• Tool changer	Yes; Docking station and docking unit	Supply voltage	
• Local coupling, IO data	Yes	Rated value (DC)	24 V
- Number of coupling modules	16	Reverse polarity protection	Yes
- Number of coupling submodules per module	4; 1x write, 3x read	Mains buffering	
• Local coupling, data records	Yes	• Mains/voltage failure stored energy time	10 ms
- Number of coupling modules	16	Input current	
- Number of coupling submodules per module	4; 1x write, 3x read	Current consumption, max.	360 mA; For 19.2 V input voltage at the right-hand supply terminal, including 2 plugged BA 2x LC
- Record length, max.	4 096 byte		
- FIFO depth in storage mode	8		

I/O systems

Gateways

PN/PN coupler

Technical specifications

Article number	6ES7158-3AD10-0XA0 SIMATIC PN/PN Coupler
from supply voltage 1L+, max.	320 mA; For 19.2 V input voltage at the left-hand supply terminal, including 2 plugged BA 2x LC
Power loss	
Power loss, typ.	4 W; For 24 V input voltage and 2 plugged BA 2x RJ45 If BusAdapters with an optical interface are plugged, there is an additional 750 mW per optical interface (3 W with 2 plugged BA 2x LC)
Address area	
Address space per module	
• Address space per module, max.	254 byte; max. 254 bytes of input data and 253 bytes of output data
Address space per station	
• Address space per station, max.	1 440 byte; per input / output
Hardware configuration	
Submodules	
• Number of submodules per station, max.	116
Interfaces	
Number of PROFINET interfaces	2; One PROFINET interface per line side
Optical interface	Yes; Via SIMATIC BusAdapter
Transmission rate, max.	100 Mbit/s
1. Interface	
Interface types	
• Number of ports	2; via BusAdapter
• integrated switch	Yes
• BusAdapter (PROFINET)	Yes; Compatible BusAdapter: BA 2x RJ45, BA 2x FC, BA 2x SCRJ, BA SCRJ / RJ45, BA SCRJ / FC, BA 2x LC, BA LC / RJ45, BA LC / FC
Protocols	
• PROFINET IO Device	Yes
• Open IE communication	Yes
• Media redundancy	Yes; As MRP or MRPD client; max. 50 or 30 devices in the ring
2. Interface	
Interface types	
• Number of ports	2; via BusAdapter
• integrated switch	Yes
Protocols	
• PROFINET IO Device	Yes
• Open IE communication	Yes
• Media redundancy	Yes; As MRP or MRPD client; max. 50 or 30 devices in the ring
Interface types	
RJ 45 (Ethernet)	
• Transmission procedure	PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• 10 Mbps	No
• 100 Mbps	Yes; PROFINET with 100 Mbit/s full duplex (100BASE-TX)
• Autonegotiation	Yes
• Autocrossing	Yes
Protocols	
Supports protocol for PROFINET IO	Yes
Protocols (Ethernet)	
• TCP/IP	Yes
• SNMP	Yes
• LLDP	Yes
• ping	Yes
• ARP	Yes

Article number	6ES7158-3AD10-0XA0 SIMATIC PN/PN Coupler
PROFINET IO Device Services	
- IRT	Yes
- PROFlenergy	No
- Prioritized startup	Yes
- Shared device	Yes
- Number of IO Controllers with shared device, max.	4; per line side
Redundancy mode	
• PROFINET system redundancy (S2)	Yes; NAP S2 acc. to IEC
• H-Sync forwarding	Yes
Media redundancy	
- MRP	Yes
- MRPD	Yes
Open IE communication	
• TCP/IP	Yes
• SNMP	Yes
• LLDP	Yes
Interrupts/diagnostics/status information	
Status indicator	Yes
Alarms	Yes
Diagnostics function	Yes; Parameterizable
Diagnostics indication LED	
• RUN LED	Yes; green LED
• ERROR LED	Yes; red LED
• MAINT LED	Yes; Yellow LED
• LINK LED	Yes; 2x green link LEDs on BusAdapter
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
Potential separation	
between supply voltage and electronics	Yes; to power input 2
between Ethernet and electronics	Yes
Standards, approvals, certificates	
Network loading class	3
Ambient conditions	
Ambient temperature during operation	
• min.	-30 °C; From FS05
• max.	60 °C; = Tmax for horizontal installation; for vertical installation Tmax = 50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m; restrictions for installation altitudes > 2 000 m, see section "Climatic and mechanical environmental conditions"
Mechanics/material	
Strain relief	Yes; Optional, for RJ45 and FC BusAdapter only
Dimensions	
Width	100 mm; Minimized with good handling
Height	117 mm
Depth	74 mm; with mounting rail
Weights	
Weight, approx.	200 g; without BusAdapter

Overview



- For data exchange between PROFINET and CAN Bus 2.0A/B or CANopen Manager or Slave (according to CiA 301 & 302)
- CANopen features:
 - Node / lifeguarding
 - Heartbeat
 - SYNC (producer / consumer)
- Integrated in TIA via HSP, TIA Portal V14 or higher
- PROFINET switch and 9-pin D-sub plug integrated for CAN
- Up to 126 CAN nodes
- 512 receiver/transmitter PDOs
- Electrical isolation between the two networks
- Diagnostic interrupts
- Supported controllers: S7-1200, S7-1500, ET 200SP, Open Controller
- Optionally with function block SIMATIC ECC CHAdeMO: Realization of digital communication as basis for conductible DC charging of electric vehicles in line with the CHAdeMO standard

Ordering data

SIMATIC PN/CAN LINK

PROFINET gateway according to CAN or CANopen networks
CAN Bus 2.0A/B, CANopen Manager according to CiA301/302, CANopen Slave according to CiA301/302; IP20

Article No.

6BK1620-0AA00-0AA0

Article No.

Accessories

SIMATIC ECC CHAdeMO

Function block single license, electric vehicle communication according to CHAdeMO 1.x-2.0 specification.
In combination with SIMATIC PN/CA 6BK 1620-0AA00-0AA0 or ET 200SP CM CAN 6ES7137-6EA00-0BA0

6FE1263-8FB10-0AA0

Technical specifications

Article number	6BK1620-0AA00-0AA0 SIMATIC PN/CAN LINK
General information	
Product type designation	PN/CAN Link
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V14 or higher
Installation type/mounting	
Mounting	DIN rail, wall mounting, portrait mounting
Mounting position	any
Recommended mounting position	Horizontal
Rail mounting	Yes
Control cabinet installation	Yes
Supply voltage	
Type of supply voltage	DC
Rated value (DC)	24 V
Reverse polarity protection	Yes
Overvoltage protection	Yes
Short-circuit protection	Yes
Mains buffering	
• Mains/voltage failure stored energy time	10 ms

Article number	6BK1620-0AA00-0AA0 SIMATIC PN/CAN LINK
Input current	
Current consumption (rated value)	0.09 A
Current consumption, max.	0.11 A
Power loss	
Power loss, typ.	2.2 W
Interfaces	
Interfaces/bus type	2x Ethernet (RJ45), 1x Sub-D (9-pin)
Supports protocol for PROFINET IO	
• automatic detection of transmission rate	No
• Transmission rate, max.	100 Mbit/s
• Number of RJ45 ports	2
• Number of FC (FastConnect) connections	2
PROFINET functions	
• Assignment of the IP address, supported	Yes
• Assignment of the device name, supported	Yes

I/O systems

Gateways

PN/CAN LINK

Technical specifications

Article number	6BK1620-0AA00-0AA0 SIMATIC PN/CAN LINK
1. Interface	
Interface type	CAN according to CiA 303-1
Isolated	Yes; 500 V AC or 707 V DC
Interface types	
• Number of ports	1
• Design of the connection	9-pin sub D socket
CAN	
• CAN operating modes	CAN Standard CAN 2.0A/B; CANopen Manager / Slave acc. to CiA
• Specification acc. to CiA	CiA 301 & CiA 302
• Transmission rate, min.	50 kbit/s
• Transmission rate, max.	1 000 kbit/s
• Number of slaves, max.	126
• Number of SDOs in parallel	16; Parallel
• Number of PDOs	512; Send / receive
Services	
- Node/life-guarding	Yes
- Heartbeat	Yes
- SYNC	Yes
2. Interface	
Interface type	PROFINET
Isolated	Yes; 1 500 V AC or 2 250 V DC
Interface types	
• RJ 45 (Ethernet)	Yes
• Number of ports	2
• integrated switch	Yes
Protocols	
• PROFINET IO Device	Yes
Interrupts/diagnostics/ status information	
Status indicator	Yes
Alarms	Yes
Diagnostics function	Yes
Diagnostics indication LED	
• RUN LED	Yes
• ERROR LED	Yes
• MAINT LED	Yes
• LINK LED	Yes
• RX/TX LED	Yes

Article number	6BK1620-0AA00-0AA0 SIMATIC PN/CAN LINK
Potential separation	
Potential separation exists	Yes
Degree and class of protection	
IP degree of protection	IP20
Standards, approvals, certificates	
CE mark	Yes
UL approval	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
PNO certificate	Yes
RoHS conformity	Yes
Marine approval	
• Germanischer Lloyd (GL)	Yes
• American Bureau of Shipping (ABS)	Yes
• Bureau Veritas (BV)	Yes
• Lloyds Register of Shipping (LRS)	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C
• vertical installation, max.	55 °C
• ceiling installation, min.	-25 °C
• ceiling installation, max.	45 °C
• floor installation, min.	-25 °C
• floor installation, max.	45 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	85 °C
Relative humidity	
• Operation, max.	95 %
Software	
Runtime software	
Target system	
- ET 200SP	Yes
- Open Controller	Yes
- S7-1200	Yes
- S7-1500	Yes
Dimensions	
Width	70 mm
Height	112 mm
Depth	75 mm
Weights	
Weight, approx.	212 g

Overview



- For data exchange between PROFINET and CAN Bus 2.0A/B or CANopen Manager or Slave (according to CiA 301 & 302)
- CANopen features:
 - Node / lifeguarding
 - Heartbeat
 - SYNC (producer / consumer)
- Integrated in TIA via HSP, TIA Portal V14 or higher
- PROFINET switch and 9-pin D-sub plug integrated for CAN
- Up to 126 CAN nodes
- 512 receiver/transmitter PDOs
- Galvanic isolation between the two networks
- Diagnostic interrupts
- PLCs supported: S7-1200, S7-1500, ET 200SP, Open Controller

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the corresponding standard products. SIPLUS extreme-specific information was added.

For technical documentation on SIPLUS, see:

<http://www.siemens.com/siplus-extreme>

Ordering data

SIPLUS PN/CAN Link

PROFINET gateway according to CAN Bus 2.0A/B, CANopen Manager according to CiA301/302, CANopen Slave according to CiA301/302; IP20
Ambient temperature -40 ... +70 °C (+85 °C for 10 min.)

Article No.

6AG1620-0AA00-7AA0

I/O systems

Gateways

SIPLUS PN/CAN LINK

Technical specifications

Article number	6AG1620-0AA00-7AA0
Based on	6BK1620-0AA00-0AA0 SIPLUS PN/CAN LINK
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-40 °C; = Tmin (incl. condensation/frost)
• horizontal installation, max.	70 °C; = Tmax
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	85 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
Relative humidity	
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; incl. condensation / frost permitted (no commissioning under condensation conditions)
Resistance	
Coolants and lubricants	
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Available soon
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *

Article number	6AG1620-0AA00-7AA0
Based on	6BK1620-0AA00-0AA0 SIPLUS PN/CAN LINK
Use on ships/at sea	
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *
Usage in industrial process technology	
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
Remark	
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!
Conformal coating	
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A

Overview



- For data exchange between PROFINET and SAE J1939 networks
- J1939 functions:
 - Broadcast Announce Message (BAM)
 - Connection Mode Data Transfer (CMDT)
 - PDU 1 & 2
- Integrated into Totally Integrated Automation via gsdml file in TIA Portal. No separate software required
- Integrated PROFINET switch with 9-pin Sub-D socket for J1939
- Up to 253 logical nodes
- Up to 30 addressable ECUs
- Galvanic isolation between the two networks
- Diagnostic interrupts
- Controllers supported: S7-1200, S7-1500, ET 200SP, Open Controller

Ordering data

Article No.

SIMATIC PN/J1939 LINK**6BK1623-0AA00-0AA0**

PROFINET gateway to J1939 networks; IP20

Technical specifications

Article number	6BK1623-0AA00-0AA0 SIMATIC PN/J1939 LINK
General information	
Product type designation	PN/J1939 LINK
Product function	
• I&M data	Yes
• Isochronous mode	No
Engineering with	
• STEP 7 TIA Portal configurable/ integrated from version	STEP 7 V14 SP1 or higher
Installation type/mounting	
Mounting	DIN rail, wall mounting, portrait mounting
Mounting position	any
Recommended mounting position	Horizontal
Rail mounting	Yes
Control cabinet installation	Yes
Supply voltage	
Type of supply voltage	DC
Rated value (DC)	24 V
Reverse polarity protection	Yes
Overvoltage protection	Yes
Short-circuit protection	Yes
Mains buffering	
• Mains/voltage failure stored energy time	10 ms; PN side
Input current	
Current consumption (rated value)	0.09 A
Current consumption, max.	0.11 A
Power loss	
Power loss, typ.	2.2 W
Interfaces	
Interfaces/bus type	2x Ethernet (RJ45), 1x Sub-D (9-pin)
Supports protocol for PROFINET IO	
• automatic detection of transmission rate	No
• Transmission rate, max.	100 Mbit/s
• Number of RJ45 ports	2
• Number of FC (FastConnect) connections	2
PROFINET functions	
• Assignment of the IP address, supported	Yes
• Assignment of the device name, supported	Yes

I/O systems

Gateways

PN/J1939 LINK

Technical specifications

Article number	6BK1623-0AA00-0AA0 SIMATIC PN/J1939 LINK
1. Interface	
Interface type	J1939 according to the standard "SAE J1939"
Isolated	Yes; 500 V AC or 707 V DC
Interface types	
• Number of ports	1
• Design of the connection	9-pin sub D socket
CAN	
• CAN operating modes	J1939 according to the standard "SAE J1939"
• Transmission rate, min.	100 kbit/s
• Transmission rate, max.	500 kbit/s
• Number of slaves, max.	30
J1939	
• Addressable ECUs, max.	30
• Logical nodes, max.	253
• PDU 1	Yes
• PDU 2	Yes
• DM data	Yes
• BAM	Yes
• CMDT	Yes
2. Interface	
Interface type	PROFINET
Isolated	Yes; 1 500 V AC or 2 250 V DC
Interface types	
• RJ 45 (Ethernet)	Yes
• Number of ports	2
• integrated switch	Yes
Protocols	
• PROFINET IO Device	Yes
Interrupts/diagnostics/status information	
Status indicator	Yes
Alarms	Yes
Diagnostics function	Yes
Diagnostics indication LED	
• RUN LED	Yes
• ERROR LED	Yes
• MAINT LED	Yes
• LINK LED	Yes
• RX/TX LED	Yes
Potential separation	
Potential separation exists	Yes
Degree and class of protection	
IP degree of protection	IP20

Article number	6BK1623-0AA00-0AA0 SIMATIC PN/J1939 LINK
Standards, approvals, certificates	
CE mark	Yes
UL approval	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
PNO certificate	Yes
RoHS conformity	Yes
Marine approval	
• Germanischer Lloyd (GL)	Yes
• Det Norske Veritas (DNV)	Yes
• Lloyds Register of Shipping (LRS)	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C
• vertical installation, max.	55 °C
• ceiling installation, min.	-25 °C
• ceiling installation, max.	45 °C
• floor installation, min.	-25 °C
• floor installation, max.	45 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	85 °C
Relative humidity	
• Operation, max.	95 %
Software	
Runtime software	
Target system	
- ET 200SP	Yes
- Open Controller	Yes
- S7-1200	Yes
- S7-1500	Yes
Dimensions	
Width	70 mm
Height	112 mm
Depth	75 mm
Weights	
Weight, approx.	212 g

Overview



- Gateway between PROFINET and BACnet/IP networks according to EN ISO16484-5 and Addendum ANSI/ASHRAE Standard 135-2012.
- Integrated in Totally Integrated Automation via HSP, TIA Portal V14 or higher
- Integrated PROFINET switch and RJ45 socket for BACnet
- 1 000 BACnet objects/object references
- 1 000 subscribe services
- BACnet features:
 - Client & Server
 - Device profile: B-GW
 - Change of value / cyclic and acyclic data exchange
 - Scan of BACnet/IP network
- Supported BACnet object types:
 - Device
 - Binary input
 - Binary output
 - Analog input
 - Analog output
- Supported BACnet services:
 - DS-COV-A/B
 - DM-DDB-A/B
 - DM-DOB-B
 - DS-RP-A/B
 - DS-WP-A/P
 - GW-EO-B
- Galvanic isolation between the two networks
- Diagnostic interrupts
- Controllers supported: S7-1200, S7-1500, ET 200SP, Open Controller

Ordering data

Article No.

SIMATIC PN/BACnet LINK

Gateway from PROFINET to BACnet/IP networks, device profile: B-GW, IP20

6BK1621-0AA00-0AA0

Technical specifications

Article number	6BK1621-0AA00-0AA0 SIMATIC PN/BACnet LINK
General information	
Product type designation	PN/BACnet Link
Product function	
• I&M data	Yes
• Isochronous mode	No
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	V14 SP1
Installation type/mounting	
Mounting	DIN rail, wall mounting, portrait mounting
Mounting position	any
Recommended mounting position	Horizontal
Rail mounting	Yes
Control cabinet installation	Yes
Supply voltage	
Type of supply voltage	DC
Rated value (DC)	24 V
Reverse polarity protection	Yes
Overvoltage protection	Yes
Short-circuit protection	Yes
Mains buffering	
• Mains/voltage failure stored energy time	10 ms
Input current	
Current consumption (rated value)	0.11 A
Current consumption, max.	0.13 A
Power loss	
Power loss, typ.	2.7 W
Interfaces	
Supports protocol for PROFINET IO	
• automatic detection of transmission rate	No
• Transmission rate, max.	100 Mbit/s
• Number of RJ45 ports	2
• Number of FC (FastConnect) connections	2
PROFINET functions	
• Assignment of the IP address, supported	Yes
• Assignment of the device name, supported	Yes
1. Interface	
Interface type	BACnet/IP
Isolated	Yes; 1 500 V AC or 2 250 V DC
Interface types	
• RJ 45 (Ethernet)	Yes
• Number of ports	1
• Design of the connection	RJ45
BACnet	
• BACnet device profile	B-GW
• Supported character sets	ISO 10646 (UTF-8)
• Network Security	No
• Number of BACnet objects/object references	1 000
• Number of subscription services	1 000

I/O systems

Gateways

PN/BACnet LINK

Technical specifications

Article number	6BK1621-0AA00-0AA0 SIMATIC PN/BACnet LINK
2. Interface	
Interface type	PROFINET
Isolated	Yes; 1 500 V AC or 2 250 V DC
Interface types	
• RJ 45 (Ethernet)	Yes
• Number of ports	2
• integrated switch	Yes
Protocols	
• PROFINET IO Device	Yes
Interrupts/diagnostics/ status information	
Status indicator	Yes
Alarms	Yes
Diagnostics function	Yes
Diagnostics indication LED	
• RUN LED	Yes
• ERROR LED	Yes
• MAINT LED	Yes
• LINK LED	Yes
• RX/TX LED	Yes
Potential separation	
Potential separation exists	Yes
Degree and class of protection	
IP degree of protection	IP20
Standards, approvals, certificates	
CE mark	Yes
UL approval	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
PNO certificate	Yes
BTL certificate	Yes
RoHS conformity	Yes

Article number	6BK1621-0AA00-0AA0 SIMATIC PN/BACnet LINK
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C
• vertical installation, max.	55 °C
• ceiling installation, min.	-25 °C
• ceiling installation, max.	45 °C
• floor installation, min.	-25 °C
• floor installation, max.	45 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	85 °C
Relative humidity	
• Operation, max.	95 %
Software	
Runtime software	
Target system	
- ET 200SP	Yes
- Open Controller	Yes
- S7-1200	Yes
- S7-1500	Yes
connection method	
Design of electrical connection	Screw connection
Dimensions	
Width	70 mm
Height	112 mm
Depth	75 mm
Weights	
Weight, approx.	210 g

Overview



- For data exchange between PROFINET and M-Bus networks
- M-Bus functions:
 - M-Bus master
 - Primary address
 - Secondary address
 - Read-only access to M-Bus slaves
 - Short-circuit detection
- Integrated into Totally Integrated Automation via gsdml file in TIA Portal. No separate software required
- Integrated PROFINET switch with 3-pin screw terminal for M-Bus
- Up to 40 slaves (loads/units)
- Diagnostic interrupts
- Controllers supported: S7-1200, S7-1500, ET 200SP, Open Controller

Ordering data

Article No.

SIMATIC PN/M-Bus LINK
Gateway from PROFINET to
M-Bus networks, M-Bus Master, IP20

6BK1622-0AA00-0AA0

Technical specifications

Article number	6BK1622-0AA00-0AA0 SIMATIC PN/M-Bus LINK
General information	
Product type designation	PN/M-Bus LINK
Product function	
• I&M data	Yes
• Isochronous mode	No
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V15 or higher
Installation type/mounting	
Mounting	DIN rail, wall mounting, portrait mounting
Mounting position	any
Recommended mounting position	Horizontal
Rail mounting	Yes
Control cabinet installation	Yes
Supply voltage	
Type of supply voltage	DC
Rated value (DC)	24 V
Reverse polarity protection	Yes
Overvoltage protection	Yes
Short-circuit protection	Yes
Mains buffering	
• Mains/voltage failure stored energy time	10 ms; PN side
Input current	
Current consumption (rated value)	0.11 A; At 24 V and 5 loads
Current consumption, max.	0.4 A; At 20.4 V, 40 loads + 100 mA short-circuit current
Power loss	
Power loss, typ.	2.4 W
Interfaces	
Supports protocol for PROFINET IO	
• automatic detection of transmission rate	No
• Transmission rate, max.	100 Mbit/s
• Number of RJ45 ports	2
• Number of FC (FastConnect) connections	2

I/O systems

Gateways

PN/M-Bus LINK

Technical specifications

Article number	6BK1622-0AA00-0AA0 SIMATIC PN/M-Bus LINK
PROFINET functions	
• Assignment of the IP address, supported	Yes
• Assignment of the device name, supported	Yes
1. Interface	
Interface type	M-Bus master
Isolated	No
Interface types	
• Number of ports	1
• Design of the connection	3-wire screw-type terminal
M-Bus	
• Bus voltage, typ.	36 V
• Transmission rate, min.	300 bit/s
• Transmission rate, max.	9 600 bit/s
• Number of slaves, max.	40
• Short-circuit detection	Yes
• short-circuit proof	Yes
• Connectable conductor cross-section	1.5 mm ²
• Cable length, max.	300 m
2. Interface	
Interface type	PROFINET
Isolated	Yes; 1 500 V AC or 2 250 V DC
Interface types	
• RJ 45 (Ethernet)	Yes
• Number of ports	2
• integrated switch	Yes
Protocols	
• PROFINET IO Device	Yes
Interrupts/diagnostics/status information	
Status indicator	Yes
Alarms	Yes
Diagnostics function	Yes
Diagnostics indication LED	
• RUN LED	Yes
• ERROR LED	Yes
• MAINT LED	Yes
• LINK LED	Yes
• RX/TX LED	Yes

Article number	6BK1622-0AA00-0AA0 SIMATIC PN/M-Bus LINK
Potential separation	
Potential separation exists	Yes
Degree and class of protection	
IP degree of protection	IP20
Standards, approvals, certificates	
CE mark	Yes
RoHS conformity	Yes
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	-25 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-25 °C
• vertical installation, max.	55 °C
• ceiling installation, min.	-25 °C
• ceiling installation, max.	45 °C
• floor installation, min.	-25 °C
• floor installation, max.	45 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Relative humidity	
• Operation, max.	95 %
Software	
Runtime software	
Target system	
- ET 200SP	Yes
- Open Controller	Yes
- S7-1200	Yes
- S7-1500	Yes
Dimensions	
Width	70 mm
Height	112 mm
Depth	75 mm
Weights	
Weight, approx.	215 g

Overview



- For interconnecting two PROFIBUS DP networks
- The interchange of data between both DP networks takes place by internal copying in the coupler

Ordering data

Article No.

SIMATIC DP, DP/DP coupler**6ES7158-0AD01-0XA0**

Coupling module for connecting two PROFIBUS DP networks, redundant power supply


Note:

The manual is available free on the Internet.

Technical specifications

DP/DP transceiver

PROFIBUS transmission rate	max. 12 Mbit/s
Interfaces	9-pin Sub-D connector
• PROFIBUS DP	9-pin Sub-D connector
Supply voltage	24 V DC
Current consumption typ.	150 mA
Mounting	Upright (DIP switches above)
Perm. environmental conditions	
• Operating temperature	
- horizontal mounting	0°C ... +60°C
- all other mounting positions	0°C ... +40°C
• Transport/storage temperature	-40 °C ... +70 °C
• Relative humidity	10-95 % at +25 °C
Design	
• Dimensions (W x H x D) in mm	40 x 127 x 117
• Weight	approx. 250 g
Degree of protection	IP20

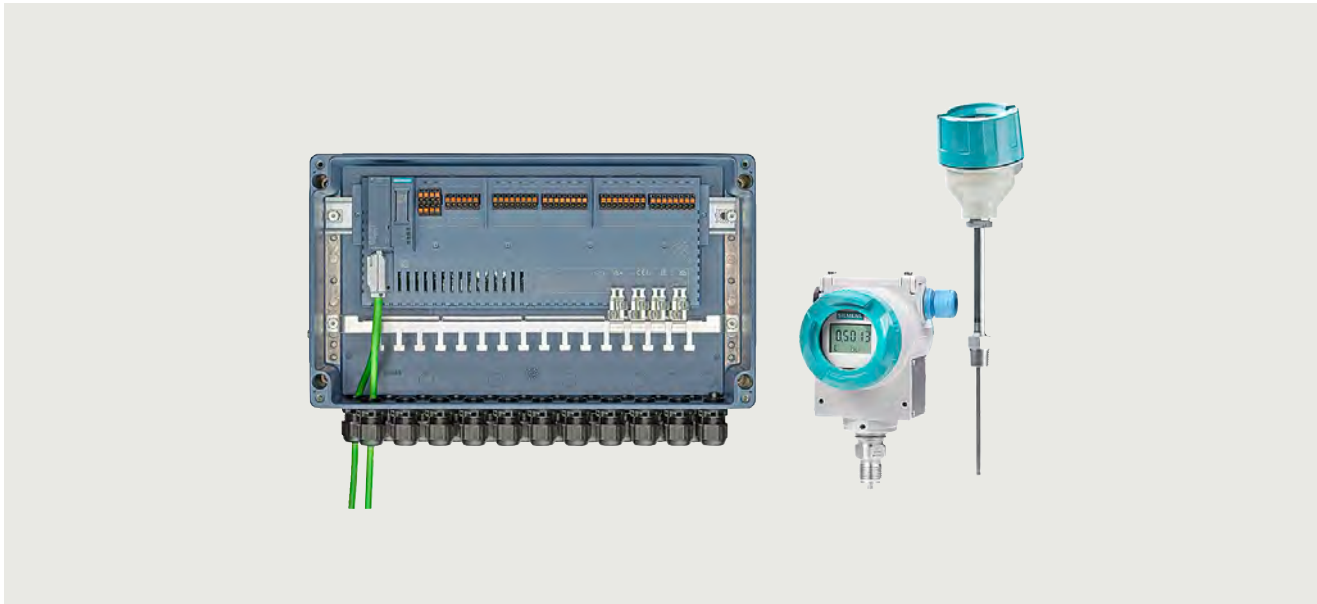


Smart Field Distributor – SIMATIC Compact Field Unit

With the new SIMATIC Compact Field Unit (CFU), we are re-interpreting the conventional approach to field device connection. The smart field distributor is installed at the process level and is connected via PROFINET, the world's leading Industrial Ethernet standard, directly to the automation system to form the foundation for digitalization in the field.

You benefit from greater flexibility and very simple handling coupled with maximum availability. This allows you to efficiently transfer your familiar system concept to the digital world.

Today's challenges for field device connection:

- High overhead for device integration and replacement
- Complicated, error-prone wiring and routing over multiple levels, making the hardware FAT very complex
- Extremely long copper cables and numerous terminal points in the field
- Multiple individual control cabinets
- Large numbers of different components and protocols necessitate costly spare parts inventories and training sessions
- High planning and documentation costs

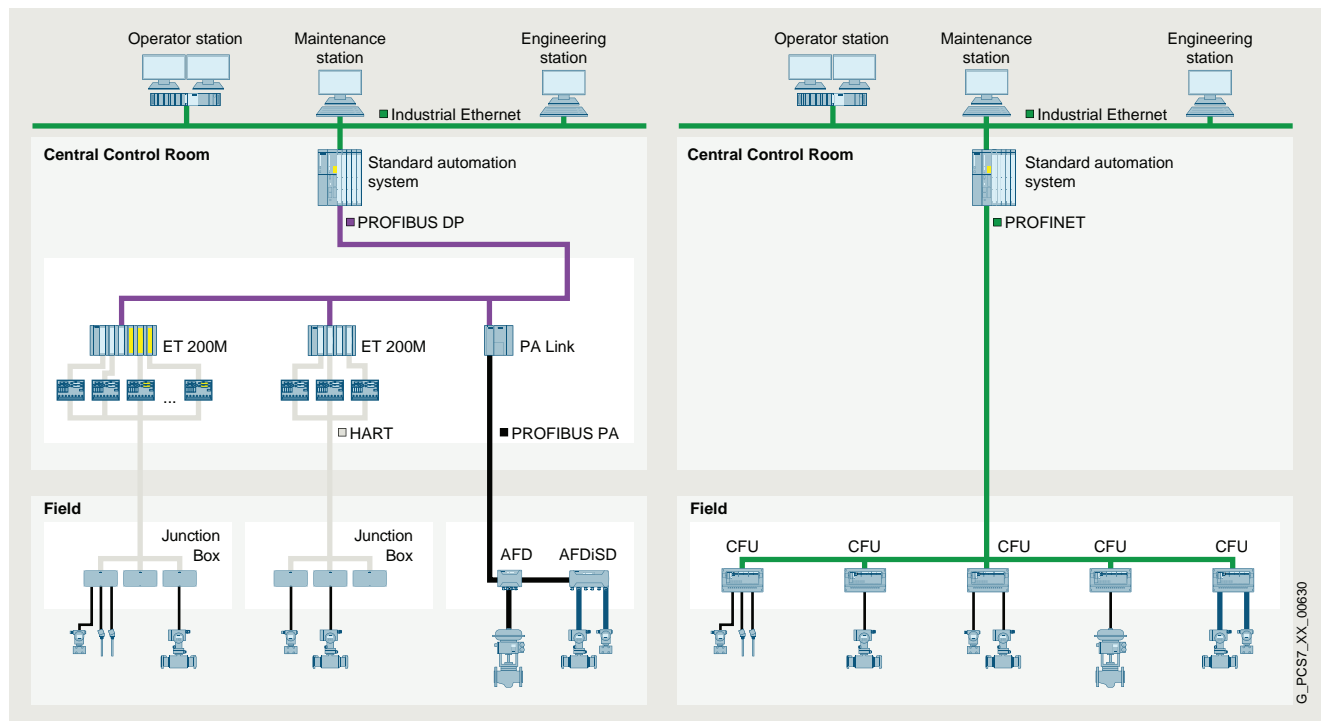
Overview***SIMATIC CFU – The answer to these challenges***Mode of operation

Field device connection with previous technology (left) and with SIMATIC CFU (right)

The SIMATIC Compact Field Unit (CFU) is a real game-changer in field device connection and offers you entirely new prospects regarding simplicity, flexibility and standardization. The smart field distributor is installed at the process level and is connected via PROFINET directly to the automation system to form the foundation for digitalization in the field. Utilization of digital fieldbus communication considerably simplifies device interfacing compared to conventional 4 ... 20 mA engineering.

Greater flexibility thanks to consistent decentralization

Distributed installation of the SIMATIC CFU means that classic control cabinets are no longer required and you can make considerable savings in cabling and the number of terminal points, as well as reducing planning and documentation overheads. The high granularity (16 I/O per SIMATIC CFU) enables flexible assignment to the higher-level controllers.

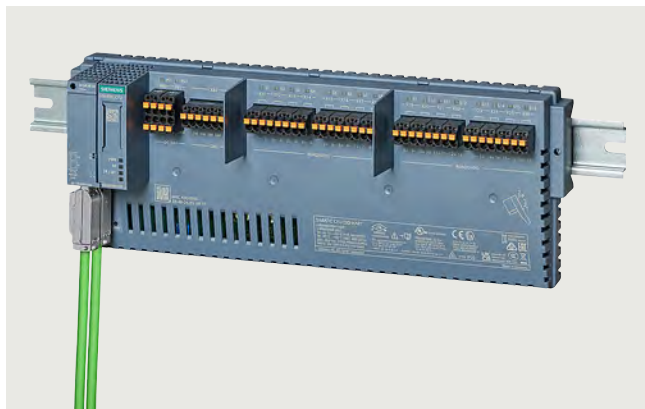I/O systemsGateways
SIMATIC CFU**SIMATIC CFU CIO HART edition****Overview**


SIMATIC CFU CIO HART edition, in this case with BusAdapter, PROFINET bus cable and push-in terminals

SIMATIC CFU CIO HART editionOne device for all signal types

The SIMATIC CFU CIO HART is an innovative PROFINET device and offers the possibility of flexibly connecting all signal types to any channel. It is possible to process analog inputs (optionally with HART), analog outputs (optionally with HART), digital inputs and digital outputs. The corresponding signal types are configured conveniently using drag-and-drop in engineering. The SIMATIC CFU CIO HART thus offers a versatile solution for using the different signal types in your system with just one device.

16 freely configurable IO channels:

- Analog input/analog output:
 - 0-20 mA, 4-20 mA, 4-20 mA with HART
- Digital input/digital output:
 - Multiple modes available: Standard-DI, DI-Namur, DI Open-Collector
 - Counter up to 5 kHz
 - DI 24 V DC; DQ 24 V DC 0.5/2 A

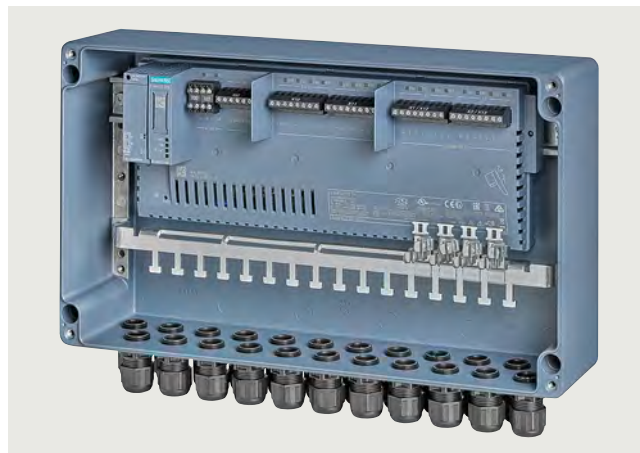Aluminum field housing

SIMATIC CFU CIO HART edition, aluminum field housing, open



SIMATIC CFU CIO HART edition, aluminum field housing, closed

The die-cast aluminum housing is suitable for use in zone 2/22 hazardous areas. The following are included in the housing scope of delivery:

- 22 × M20 plastic cable glands (incl. blanking plugs)
- 35 mm DIN rail
- Rail for strain relief and shield support

The enclosure has a display window for LED diagnostics.

Ordering data**Article No.****SIMATIC CFU CIO HART with aluminum enclosure**

Comprising:

- 1 × SIMATIC CFU CIO HART (6ES7655-5PX41-1XX0)
- 1 × aluminum enclosure with cable glands, shield busbar, shield terminals

pre-assembled and tested

6ES7655-5PX41-1AX0

Article No.**SIMATIC CFU CIO HART**

SIMATIC Compact Field Unit CIO HART edition with 16 × freely configurable channels (AI; AQ; HART; DI 24 V DC; DI NAMUR; DQ 24 V DC 0.5/2 A; Counter)

- Installation up to hazardous zone 2
- Channel diagnostics
- PROFINET interface
- Use of PROFINET BusAdapter
- Configuration in RUN (CiR)
- Media redundancy (MRP)
- PROFINET system redundancy (S2)
- Temperature range -40 ... +70 °C
- Installation on a 35 mm DIN rail

6ES7655-5PX41-1XX0

Technical specifications

Article number	6ES7655-5PX41-1AX0 SIMATIC CFU CIO HART with Alu housing	6ES7655-5PX41-1XX0 SIMATIC CFU CIO HART
General information		
Product type designation	CFU CIO HART with aluminum enclosure	CFU CIO HART
Number of channels	16	16
Product function		
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Isochronous mode	No	No
• The user can configure digital channels as input/output as required	Yes	Yes
• Digital channels can be parameterized	Yes	Yes
Engineering with		
• STEP 7 TIA Portal configurable/integrated from version	V19 Update 2	V19 Update 2
• STEP 7 configurable/integrated from version	STEP 7 V5.7	STEP 7 V5.7
• PCS 7 configurable/integrated from version	V9.1 SP2 UC5	V9.1 SP2 UC5
• PROFIBUS from GSD version/GSD revision	- / -	- / -
• PROFINET from GSD version/GSD revision	GSDML V2.43	GSDML V2.43
Operating mode		
• DI	Yes	Yes
• Counter	Yes	Yes
• DQ	Yes	Yes
Installation type/mounting		
Mounting	For horizontal and vertical mounting	on 35 mm DIN rail, 2 spacing units wide
Mounting position	Horizontal, vertical	Horizontal, vertical
Recommended mounting position	horizontal set up	horizontal set up
Supply voltage		
Type of supply voltage	24 V DC	24 V DC
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes	Yes
Short-circuit protection	Yes	Yes
Redundant power supply	Yes	Yes
Mains buffering		
• Mains/voltage failure stored energy time	1 ms; For communication	1 ms; For communication
Input current		
Current consumption (rated value)	4.1 A; RJ45 BusAdapter, 8xDI, 4xAI, 2xAQ, 2xDQ with 2 A each	4.1 A; RJ45 BusAdapter, 8xDI, 4xAI, 2xAQ, 2xDQ with 2 A each
Current consumption, max.	9 A	9 A
Inrush current, max.	7 A	7 A
I ² t	0.5 A ² ·s	0.5 A ² ·s
Encoder supply		
Number of outputs	16	16
Output voltage, min.	12 V	12 V
Short-circuit protection	Yes; Electronic	Yes; Electronic
Output current		
• up to 60 °C, max.	6 A; total current DQ + additional current for analog channels	8 A; total current DQ + additional current for analog channels
• up to 70 °C, max.		6 A; total current DQ + additional current for analog channels
Power loss		
Power loss, typ.	6.6 W; RJ45 BusAdapter, 8xDI, 4xAI, 2xAQ, 2xDQ with 12 ohms load each	6.6 W; RJ45 BusAdapter, 8xDI, 4xAI, 2xAQ, 2xDQ with 12 ohms load each
Address area		
Address space per station		
• Address space per station, max.	1 440 byte; Dependent on configuration	1 440 byte; Dependent on configuration

I/O systems

Gateways

SIMATIC CFU

SIMATIC CFU CIO HART edition**Technical specifications**

Article number	6ES7655-5PX41-1AX0 SIMATIC CFU CIO HART with Alu housing	6ES7655-5PX41-1XX0 SIMATIC CFU CIO HART
Digital inputs		
Number of digital inputs	16	16
Digital inputs, parameterizable	Yes	Yes
Source/sink input	Yes	Yes
Input characteristic curve in accordance with IEC 61131, type 1	Yes	Yes
Input characteristic curve in accordance with IEC 61131, type 2	No	No
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes
Pulse extension	Yes; off, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s	Yes; off, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s
Digital input functions, parameterizable		
• Gate start/stop	Yes	Yes; hardware gate, usable by multiple DI counters
• Freely usable digital input	Yes; Parameterizable input filter	Yes; Parameterizable input filter
• Counter	Yes	Yes
- Number, max.	16	16
- Counting frequency, max.	5 kHz	5 kHz; high-speed counter mode, sinking input; 1 kHz for sourcing input, NAMUR
- Counting width	32 bit	32 bit
- Counting direction up/down	Yes; Up	Yes; Up
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal "0"	-9 V to +5 V	-9 V to +5 V
• for signal "1"	+11 to +30V	+11 to +30V
Input current		
• for signal "1", typ.	2.5 mA	2.5 mA
Input delay (for rated value of input voltage) for standard inputs		
- parameterizable	Yes; none / 0.05 / 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms	Yes; none / 0.05 / 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms
Cable length		
• shielded, max.	1 000 m	1 000 m
• unshielded, max.	600 m	600 m
Digital outputs		
Type of digital output	Transistor	Transistor
Number of digital outputs	16	16
Current-sinking	No	No
Current-sourcing	Yes	Yes
Short-circuit protection	Yes	Yes
• Response threshold, typ.	4.1 A	4.1 A
Open-circuit detection	Yes	Yes
Overload protection	Yes	Yes
Limitation of inductive shutdown voltage to	typ. L+ (-11 V)	typ. L+ (-11 V)
Controlling a digital input	Yes	Yes
Switching capacity of the outputs		
• with resistive load, max.	2 A	2 A
• on lamp load, max.	5 W	5 W
Load resistance range		
• lower limit	12 Ω	12 Ω
• upper limit	12 kΩ	12 kΩ
Output voltage		
• Type of output voltage	DC	DC
• for signal "1", min.	U _e minus 1 V	U _e minus 1 V
Output current		
• for signal "1" rated value	2 A	2 A
• for signal "0" residual current, max.	0.1 mA	0.1 mA

Technical specifications

Article number	6ES7655-5PX41-1AX0 SIMATIC CFU CIO HART with Alu housing	6ES7655-5PX41-1XX0 SIMATIC CFU CIO HART
Output delay with resistive load		
• "0" to "1", typ.	50 µs	50 µs
• "0" to "1", max.	100 µs	100 µs
• "1" to "0", typ.	50 µs	50 µs
• "1" to "0", max.	100 µs	100 µs
Parallel switching of two outputs		
• for uprating	No	No
• for redundant control of a load	No	No
Switching frequency		
• with resistive load, max.	100 Hz	100 Hz
• with inductive load, max.	1 Hz; at 2 A; 2 Hz at 0.5 A	1 Hz; at 2 A; 2 Hz at 0.5 A
• on lamp load, max.	10 Hz	10 Hz
Total current of the outputs		
• Current per channel, max.	2 A	2 A
horizontal installation		
- up to 60 °C, max.	6 A	8 A
- up to 70 °C, max.		6 A
vertical installation		
- up to 60 °C, max.	6 A	8 A
- up to 70 °C, max.		6 A
Cable length		
• shielded, max.	1 000 m	1 000 m
• unshielded, max.	600 m	600 m
Analog inputs		
Number of analog inputs	16	16
Input ranges (rated values), currents		
• 0 to 20 mA	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
• 4 mA to 20 mA	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
HART communication		
• Primary Master	Yes	Yes
• input resistance (with HART communication)	233 Ω	233 Ω
Cable length		
• shielded, max.	1 000 m	1 000 m
• unshielded, max.	600 m	600 m
Analog outputs		
Number of analog outputs	16; short-circuit proof with respect to ground	16; short-circuit proof with respect to ground
Output ranges, current		
• 0 to 20 mA	Yes; 15 bit	Yes; 15 bit
• -20 mA to +20 mA	No	No
• 4 mA to 20 mA	Yes; 16 bit incl. sign	Yes; 16 bit incl. sign
Connection of actuators		
• for current output two-wire connection	Yes	Yes
Load impedance (in rated range of output)		
• for current outputs, min.	50 Ω	50 Ω
• with current outputs, max.	750 Ω	750 Ω
• with current outputs, inductive load, max.	10 mH	10 mH
Cable length		
• shielded, max.	1 000 m	1 000 m
• unshielded, max.	600 m	600 m

I/O systemsGateways
SIMATIC CFU**SIMATIC CFU CIO HART edition****Technical specifications**

Article number	6ES7655-5PX41-1AX0 SIMATIC CFU CIO HART with Alu housing	6ES7655-5PX41-1XX0 SIMATIC CFU CIO HART
Analog value generation for the inputs		
Integration and conversion time/resolution per channel		
• Resolution with overrange (bit including sign), max.	16 bit	16 bit
• Integration time, parameterizable	Yes; channel by channel	Yes; channel by channel
Smoothing of measured values		
• parameterizable	Yes; none, weak, medium, strong, channel-by-channel	Yes; none, weak, medium, strong, channel-by-channel
Analog value generation for the outputs		
Settling time		
• for resistive load	2 ms; 750 ohm	2 ms; 750 ohm
• for inductive load	1.2 ms	1.2 ms
Encoder		
Connection of signal encoders		
• for current measurement as 2-wire transducer	Yes	Yes
Connectable encoders		
• NAMUR encoder/changeover contact according to EN 60947	Yes; no CO contact	Yes; no CO contact
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA
Errors/accuracies		
Basic error limit (operational limit at 25 °C)		
• Current, relative to input range, (+/-)	0.1 %	0.1 %
• Current, relative to output range, (+/-)	0.1 %	0.1 %
Interfaces		
Number of PROFINET interfaces	1	1
1. Interface		
Interface type	PROFINET	PROFINET
Isolated	Yes	Yes
Interface types		
• Number of ports	2; via BusAdapter	2; via BusAdapter
• integrated switch	Yes	Yes
• BusAdapter (PROFINET)	Yes	Yes
Protocols		
• PROFINET IO Device	Yes	Yes
• Media redundancy	Yes; as MRP client	Yes; as MRP client
Interface types		
RJ 45 (Ethernet)		
• 100 Mbps	Yes	Yes
• Autonegotiation	Yes	Yes
• Autocrossing	Yes	Yes
Protocols		
Supports protocol for PROFINET IO	Yes	Yes
HART protocol	Yes	Yes
• Protocol version	up to Revision 7	up to Revision 7
PROFINET IO Device		
Services		
- Shared device	No	No
Redundancy mode		
• PROFINET system redundancy (S2)	Yes	Yes; Type S2
Media redundancy		
- MRP	Yes	Yes
Open IE communication		
• LLDP	Yes	Yes

Technical specifications

Article number	6ES7655-5PX41-1AX0 SIMATIC CFU CIO HART with Alu housing	6ES7655-5PX41-1XX0 SIMATIC CFU CIO HART
Interrupts/diagnostics/ status information		
Status indicator	Yes	Yes
Alarms	Yes	Yes
Diagnostics function	Yes	Yes
Substitute values connectable	Yes	Yes
Alarms		
• Diagnostic alarm	Yes	Yes
• Maintenance interrupt	Yes	Yes
• Limit value alarm	Yes	Yes
• Hardware interrupt	Yes	Yes
Diagnoses		
• Monitoring the supply voltage	Yes	Yes
• Wire-break	Yes; channel by channel	Yes; channel by channel
• Short-circuit	Yes; channel by channel	Yes; channel by channel
• Group error	Yes	Yes
• Overflow/underflow	Yes; channel by channel	Yes; channel by channel
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes; green/red LED	Yes; green/red LED
• Channel status display	Yes; green/red LED	Yes; green/red LED
• Status indicator digital input (green)	Yes	Yes
• Status indicator digital output (green)	Yes	Yes
• Connection display LINK TX/RX	Yes; 2x green link LEDs on BusAdapter	Yes; 2x green link LEDs on BusAdapter
Integrated Functions		
Frequency measurement	Yes	Yes
• Number of frequency meters	16	16
Counting functions		
• Continuous counting	Yes	Yes
• Counter response parameterizable	Yes	Yes
• Hardware gate via digital input	Yes	Yes
• Software gate	Yes	Yes
Measuring functions		
• Dynamic measurement period adjustment	Yes	Yes
Measuring range		
- Frequency measurement, min.	0.1 Hz	0.1 Hz
- Frequency measurement, max.	25 kHz	25 kHz; high-speed counter mode, sinking input; 1 kHz for sourcing input, NAMUR
Accuracy		
- Frequency measurement	100 ppm; depending on measuring interval and signal evaluation	100 ppm; depending on measuring interval and signal evaluation
Potential separation		
Potential separation digital inputs		
• between the channels	No	No
• between the channels and the power supply of the electronics	No	No
Potential separation digital outputs		
• between the channels	No	No
• between the channels and the power supply of the electronics	No	No

I/O systems

Gateways

SIMATIC CFU

SIMATIC CFU CIO HART edition**Technical specifications**

Article number	6ES7655-5PX41-1AX0 SIMATIC CFU CIO HART with Alu housing	6ES7655-5PX41-1XX0 SIMATIC CFU CIO HART
Degree and class of protection		
IP degree of protection	IP66	IP20
connection method		
Design of electrical connection	Connection plug	Connection plug
Dimensions		
Width	414 mm	329 mm
Height	266 mm	123 mm
Depth	111 mm	74 mm
Weights		
Weight, approx.	5.5 kg	0.7 kg

Overview

SIMATIC CFU here with BusAdapter, PROFINET bus cable and push-in terminals

SIMATIC CFU PA editionPlug-and-produce simplicity

Digitalization requires a digital infrastructure facilitating integrated digital communication right down to the sensors and actuators. You can use the established and proven PROFIBUS PA standard to achieve this. It is integrated into the PA edition of the SIMATIC CFU, thus combining ruggedness and easy handling with all the advantages of the PROFINET standard based on Industrial Ethernet. Connected devices are automatically addressed. The device is integrated via standardized communication profiles.


This innovative new implementation of the PROFIBUS PA concept makes it possible to combine the simplicity of a point-to-point wiring system with the scalability of digital PROFIBUS PA fieldbus communication. As with digital field devices, it is not necessary to know prior to connection whether the discrete field device is a sensor or actuator – This can be easily configured afterwards via software.

Combination of digital fieldbus and discrete I/Os

- 8 × digital fieldbus (PROFIBUS PA)
- 8 × digital inputs/outputs, freely configurable (1 × counter functionality / frequency measurement)

Easy to use

- Automatic addressing of PROFIBUS PA field devices
- System-supported detection and integration of PROFIBUS PA field devices into the process control system
 - Utilization of standardized PA profiles
 - Commissioning, device replacement and maintenance wizards
- Implementation of diagnostic messages according to NAMUR NE 107
- Installation on a 35 mm DIN rail

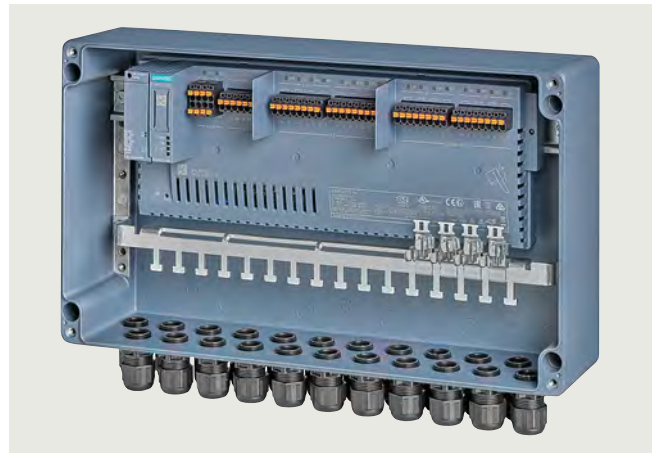Aluminum field enclosure

SIMATIC CFU aluminum field enclosure, open



SIMATIC CFU aluminum field enclosure, closed

The die-cast aluminum housing is suitable for use in zone 2/22 hazardous areas. The following are included in the housing scope of delivery:

- 22 × M20 plastic cable glands (incl. blanking plugs)
- 35 mm DIN rail
- Rail for strain relief and shield support

The enclosure has a display window for LED diagnostics.

Ordering data**Article No.****SIMATIC CFU PA bundle with push-in terminals**

Comprising:

- SIMATIC CFU PA, Article No. 6ES7655-5PX11-0XX0
- SIMATIC CFU push-in terminals, Article No. 6ES7655-5PX00-1XX0

pre-assembled and tested

6ES7655-5PX11-1XX0

Article No.**SIMATIC CFU PA bundle with aluminum enclosure**

Comprising:

- SIMATIC CFU PA, Article No. 6ES7655-5PX11-0XX0
- SIMATIC CFU push-in terminals, Article No. 6ES7655-5PX00-1XX0
- Aluminum enclosure with cable glands, shield busbar, shield connection clamps

pre-assembled and tested

6ES7655-5PX11-1AX0

I/O systemsGateways
SIMATIC CFU**SIMATIC CFU PA edition****Technical specifications**

Article number	6ES7655-5PX11-1XX0 SIMATIC CFU PA BUNDLE	6ES7655-5PX11-1AX0 SIMATIC CFU PA Bundle with Alu enclosure
General information		
Product type designation	PA Bundle	
Number of channels	16	
Product function		
• I&M data	Yes; I&M0 to I&M4	
• Isochronous mode	No	
• The user can configure digital channels as input/output as required	Yes	
• Digital channels can be parameterized	Yes	
Engineering with		
• STEP 7 TIA Portal configurable/integrated from version	V17	
• STEP 7 configurable/integrated from version	V5.6 HF2 and higher	
• PCS 7 configurable/integrated from version	V9.0 SP2 and higher	
• PCS neo can be configured/integrated from version	V3.0	
• PROFIBUS from GSD version/GSD revision	- / -	
• PROFINET from GSD version/GSD revision	GSDML V2.3	
Operating mode		
• Counter	Yes	
Installation type/mounting		
Mounting	on 35 mm DIN rail, 2 spacing units wide	
Mounting position	Horizontal, vertical	Horizontal, vertical
Recommended mounting position		horizontal set up
Supply voltage		
Type of supply voltage	24 V DC	
Rated value (DC)	24 V	
Reverse polarity protection	Yes	
Short-circuit protection	Yes	
Redundant power supply	Yes	
Mains buffering		
• Mains/voltage failure stored energy time	5 ms; Bridging for field devices and communication	
Input current		
Current consumption (rated value)	2.5 A	
Current consumption, max.	2.55 A	
Inrush current, max.	8 A	
I^2t	0.3 A ² s	
Encoder supply		
Number of outputs	8	
Output voltage, min.	18.2 V	
Short-circuit protection	Yes; Electronic	
Output current		
• up to 60 °C, max.	2 A	
• up to 70 °C, max.	1 A	
Power loss		
Power loss, typ.	8.2 W; Depending on the type of BusAdapter used (typ. RJ45)	
Address area		
Address space per station		
• Address space per station, max.	1 440 byte; Dependent on configuration	
Digital inputs		
Number of digital inputs	8	
Source/sink input	Yes; P-reading	
Input characteristic curve in accordance with IEC 61131, type 1	Yes	
Input characteristic curve in accordance with IEC 61131, type 2	No	
Input characteristic curve in accordance with IEC 61131, type 3	Yes	
Pulse extension	No	

Technical specifications

Article number	6ES7655-5PX11-1XX0 SIMATIC CFU PA BUNDLE	6ES7655-5PX11-1AX0 SIMATIC CFU PA Bundle with Alu enclosure
Number of simultaneously controllable inputs		
horizontal installation		
- up to 60 °C, max.	8; Total current must be observed, see DQ	
- up to 70 °C, max.	8; Total current must be observed, see DQ	
vertical installation		
- up to 60 °C, max.	8; Total current must be observed, see DQ	
Digital input functions, parameterizable		
• Counter	Yes	
- Number, max.	1	
- Counting frequency, max.	1 kHz	
- Counting width	32 bit	
- Counting direction up/down	Yes; Up	
Input voltage		
• Rated value (DC)	24 V	
• for signal *0*	-30 to +5 V	
• for signal *1*	+11 to +30V	
Input current		
• for signal *1*, typ.	2.5 mA; Typical	
Input delay (for rated value of input voltage) for standard inputs		
- parameterizable	No	
- at *0* to *1*, max.	3.2 ms; for counter function 0,1 ms	
- at *1* to *0*, max.	3.2 ms; for counter function 0,1 ms	
Cable length		
• shielded, max.	1 000 m	
• unshielded, max.	600 m	
Digital outputs		
Type of digital output	Transistor	
Number of digital outputs	8	
Current-sinking	No	
Current-sourcing	Yes	
Short-circuit protection	Yes	
• Response threshold, typ.	0.7 to 1.3 A	
Limitation of inductive shutdown voltage to	Typ. L+ (-50 V)	
Controlling a digital input	Yes	
Switching capacity of the outputs		
• on lamp load, max.	5 W	
Load resistance range		
• lower limit	48 Ω	
• upper limit	12 kΩ	
Output voltage		
• Type of output voltage	DC	
• for signal *1*, min.	Ue minus 1 V	
Output current		
• for signal *1* rated value	0.5 A	
• for signal *0* residual current, max.	0.1 mA	
Output delay with resistive load		
• *0* to *1*, max.	50 μs	
• *1* to *0*, max.	100 μs	
Parallel switching of two outputs		
• for uprating	No	
• for redundant control of a load	No	
Switching frequency		
• with resistive load, max.	100 Hz	
• with inductive load, max.	2 Hz	
• on lamp load, max.	10 Hz	

I/O systems

Gateways

SIMATIC CFU

SIMATIC CFU PA edition**Technical specifications**

Article number	6ES7655-5PX11-1XX0 SIMATIC CFU PA BUNDLE	6ES7655-5PX11-1AX0 SIMATIC CFU PA Bundle with Alu enclosure
Total current of the outputs		
• Current per channel, max.	0.5 A	
horizontal installation		
- up to 60 °C, max.	2 A	
- up to 70 °C, max.	1 A	
vertical installation		
- up to 60 °C, max.	2 A	
Cable length		
• shielded, max.	1 000 m	
• unshielded, max.	600 m	
Encoder		
Connectable encoders		
• 2-wire sensor	Yes	
- permissible quiescent current (2-wire sensor), max.	1.5 mA	
Interfaces		
Number of PROFINET interfaces	1	
Number of PROFIBUS interfaces	0	
PROFIBUS PA		
• Transmission rate, max.	31.25 kbit/s	
• Number of connectable PA field devices	8; electrically isolated from other interfaces, isolation tested at 2 500 V DC	
• Current output to PA field devices, max.	320 mA	
• permissible current per spur line	40 mA	
• Automatic addressing	Yes	
• System-supported integration of field devices via PA profiles	Yes	
• Extended fieldbus diagnostics	Yes	
1. Interface		
Interface type	PROFINET	
Isolated	Yes	
Interface types		
• Number of ports	2	
• integrated switch	Yes	
• BusAdapter (PROFINET)	Yes	
Protocols		
• PROFINET IO Device	Yes	
• PROFIBUS DP slave	No	
Interface types		
RJ 45 (Ethernet)		
• 100 Mbps	Yes	
• Autonegotiation	Yes	
• Autocrossing	Yes	
Protocols		
Supports protocol for PROFINET IO	Yes	
Redundancy mode		
• PROFINET system redundancy (S2)	Yes; Type S2	
Media redundancy		
- MRP	Yes	
Open IE communication		
• LLDP	Yes	
Interrupts/diagnostics/status information		
Status indicator	Yes	
Alarms	Yes	
Diagnostics function	Yes	
Diagnoses		
• Monitoring of encoder power supply	Yes	
• Wire-break	Yes	
• Short-circuit	Yes	

Technical specifications


Article number	6ES7655-5PX11-1XX0 SIMATIC CFU PA BUNDLE	6ES7655-5PX11-1AX0 SIMATIC CFU PA Bundle with Alu enclosure
Diagnostics indication LED		
• RUN LED	Yes; green LED	
• ERROR LED	Yes; red LED	
• MAINT LED	Yes; Yellow LED	
• Monitoring of the supply voltage (PWR-LED)	Yes	
• Status indicator digital input (green)	Yes	
• Status indicator digital output (green)	Yes	
• Spur line status/fault	Yes	
Potential separation		
between the channels and PROFINET	Yes	
Potential separation digital inputs		
• between the channels	No	
• between the channels and the power supply of the electronics	No	
Potential separation digital outputs		
• between the channels	No	
• between the channels and the power supply of the electronics	No	
Degree and class of protection		
IP degree of protection	IP20	IP66
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C	
• max.	70 °C	
connection method / header		
Design of electrical connection	Connection plug	
connection method / spur line / header		
• Number of spur lines	8	
• Type of cable	Type A	
• Cable diameter, min.	6 mm	
• Cable diameter, max.	12 mm	
• Conductor cross-section, min.	0.2 mm ²	
• Conductor cross-section, max.	2.5 mm ²	
• Cable length, max.	120 m	
• total current output to field devices, max.	320 mA	
• Number of connectable field devices	8	
• Current limitation per field device, max.	40 mA	
• No-load voltage, max.	15.3 V	
• short-circuit proof	Yes	
• Short-circuit current (test current); max.	8 mA	
• intrinsically safe according to FISCO model	Yes	
• Debounce logic	Yes	
Dimensions		
Width	329 mm	414 mm
Height	123 mm	266 mm
Depth	74 mm	111 mm
Weights		
Weight, approx.	650 g	5.5 kg

I/O systems

Gateways
SIMATIC CFU

SIMATIC CFU DIQ edition

Overview

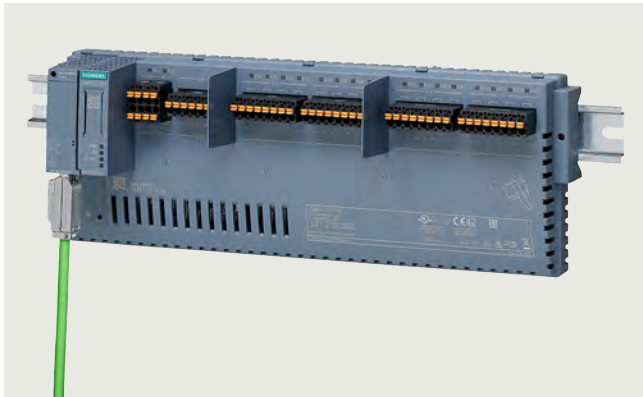

SIMATIC CFU DIQ edition

Individual, customer-specific solutions and flexible system/plant extensions are requirements that are becoming increasingly important in the process industry due to digitalization. SIMATIC CFU DIQ edition with 16 freely configurable digital IO channels offers a solution for the growing demands of distributed I/O.

SIMATIC CFU also has expansion functions for optional configuration. Two additional operating modes can be activated for selected digital inputs. "Counter" operating mode and "Frequency measurement" operating mode with a cut-off frequency of 1 kHz.

Actuator shutdown can be set for the digital outputs. The actuator shutdown of the SIMATIC CFU uses a monitoring channel (DI channel) to quickly set all digital outputs to a low digital level.

- 16 × digital inputs/outputs, freely configurable (2 x counter functionality / frequency measurement)

Aluminum field housing



SIMATIC CFU aluminum field housing, open



SIMATIC CFU aluminum field housing, closed

The die-cast aluminum housing is suitable for use in zone 2/22 hazardous areas. The following are included in the housing scope of delivery:

- 22 × M20 plastic cable glands (incl. blanking plugs)
- 35 mm DIN rail
- Rail for strain relief and shield support

The enclosure has a display window for LED diagnostics.

Ordering data

Article No.

SIMATIC CFU DIQ with aluminum housing

Comprising:

- SIMATIC CFU DIQ, Article No. 6ES7655-5PX31-0XX0
- SIMATIC CFU push-in terminals, Article No. 6ES7655-5PX00-1XX0
- Aluminum housing with cable glands, shield busbar, shield connection clamp

pre-assembled and tested

6ES7655-5PX31-1AX0

Article No.

SIMATIC CFU DIQ

Comprising:

- SIMATIC CFU DIQ, Article No. 6ES7655-5PX31-0XX0
- SIMATIC CFU push-in terminals, Article No. 6ES7655-5PX31-1XX0

pre-assembled and tested

6ES7655-5PX31-1XX0

Technical specifications

Article number	6ES7655-5PX31-1AX0 SIMATIC CFU DIQ with Alu housing	6ES7655-5PX31-1XX0 SIMATIC CFU DIQ
General information		
Product type designation		DIQ Bundle
Number of channels	16	16
Product function		
• I&M data	Yes; I&M0 to I&M3	Yes; I&M0 to I&M3
• Isochronous mode	No	No
• The user can configure digital channels as input/output as required	Yes	Yes
• Digital channels can be parameterized	Yes	Yes
Engineering with		
• STEP 7 TIA Portal configurable/ integrated from version	V17	V17
• STEP 7 configurable/ integrated from version	V5.6 HF2 and higher	V5.6 HF2 and higher
• PCS 7 configurable/ integrated from version	V9.0 SP2 and higher	V9.0 SP2 and higher
• PCS neo can be configured/ integrated from version	V3.1	V3.1
• PROFIBUS from GSD version/ GSD revision	- / -	- / -
• PROFINET from GSD version/ GSD revision	GSDML V2.3	GSDML V2.3
Operating mode		
• Counter	Yes	Yes
Installation type/mounting		
Mounting	For horizontal and vertical mounting	on 35 mm DIN rail, 2 spacing units wide
Mounting position	Horizontal, vertical	Horizontal, vertical
Supply voltage		
Type of supply voltage	24 V DC	24 V DC
Rated value (DC)	24 V	24 V
Reverse polarity protection	Yes	Yes
Short-circuit protection	Yes	Yes
Redundant power supply	Yes	Yes
Mains buffering		
• Mains/voltage failure stored energy time	5 ms; For communication	5 ms; For communication
Input current		
Current consumption (rated value)	5.12 A	5.12 A
Current consumption, max.	5.13 A	5.13 A
Inrush current, max.	4.8 A	4.8 A
I^2t	0.073 A ² ·s	0.073 A ² ·s
Encoder supply		
Number of outputs	16	16
Output voltage, min.	18.2 V	18.2 V
Short-circuit protection	Yes; Electronic	Yes; Electronic
Output current		
• up to 60 °C, max.	5 A	5 A
• up to 70 °C, max.	4 A	4 A
Power loss		
Power loss, typ.	2.88 W; Depending on the type of BusAdapter used (typ. RJ45)	2.88 W; Depending on the type of BusAdapter used (typ. RJ45)
Address area		
Address space per station		
• Address space per station, max.	1 440 byte; Dependent on configuration	1 440 byte; Dependent on configuration

I/O systems

Gateways

SIMATIC CFU

SIMATIC CFU DIQ edition**Technical specifications**

Article number	6ES7655-5PX31-1AX0 SIMATIC CFU DIQ with Alu housing	6ES7655-5PX31-1XX0 SIMATIC CFU DIQ
Digital inputs		
Number of digital inputs	16	16
Source/sink input	Yes; P-reading	Yes; P-reading
Input characteristic curve in accordance with IEC 61131, type 1	Yes	Yes
Input characteristic curve in accordance with IEC 61131, type 2	No	No
Input characteristic curve in accordance with IEC 61131, type 3	Yes	Yes
Pulse extension	No	No
Number of simultaneously controllable inputs		
horizontal installation		
- up to 60 °C, max.	16; Total current must be observed, see DQ	16; Total current must be observed, see DQ
- up to 70 °C, max.	16; Total current must be observed, see DQ	16; Total current must be observed, see DQ
vertical installation		
- up to 60 °C, max.	16; Total current must be observed, see DQ	16; Total current must be observed, see DQ
Digital input functions, parameterizable		
• Counter	Yes	Yes
- Number, max.	2	2
- Counting frequency, max.	1 kHz	1 kHz
- Counting width	32 bit	32 bit
- Counting direction up/down	Yes; Up	Yes; Up
Input voltage		
• Rated value (DC)	24 V	24 V
• for signal *0*	-30 to +5 V	-30 to +5 V
• for signal *1*	+11 to +30V	+11 to +30V
Input current		
• for signal *1*, typ.	2.5 mA; Typical	2.5 mA; Typical
Input delay (for rated value of input voltage) for standard inputs		
- parameterizable	No	No
- at *0* to *1*, max.	3.2 ms; for counter function 0,1 ms	3.2 ms; for counter function 0,1 ms
- at *1* to *0*, max.	3.2 ms; for counter function 0,1 ms	3.2 ms; for counter function 0,1 ms
Cable length		
• shielded, max.	1 000 m	1 000 m
• unshielded, max.	600 m	600 m
Digital outputs		
Type of digital output	Transistor	Transistor
Number of digital outputs	16	16
Current-sinking	No	No
Current-sourcing	Yes	Yes
Short-circuit protection	Yes	Yes
• Response threshold, typ.	0.7 to 1.3 A	0.7 to 1.3 A
Limitation of inductive shutdown voltage to	Typ. L+ (-50 V)	Typ. L+ (-50 V)
Controlling a digital input	Yes	Yes
Switching capacity of the outputs		
• on lamp load, max.	5 W	5 W
Load resistance range		
• lower limit	48 Ω	48 Ω
• upper limit	12 kΩ	12 kΩ
Output voltage		
• Type of output voltage	DC	DC
• for signal *1*, min.	Ue minus 1 V	Ue minus 1 V
Output current		
• for signal *1* rated value	0.5 A	0.5 A
• for signal *0* residual current, max.	0.1 mA	0.1 mA

Technical specifications

Article number	6ES7655-5PX31-1AX0 SIMATIC CFU DIQ with Alu housing	6ES7655-5PX31-1XX0 SIMATIC CFU DIQ
Output delay with resistive load		
• "0" to "1", max.	50 µs	50 µs
• "1" to "0", max.	100 µs	100 µs
Parallel switching of two outputs		
• for uprating	No	No
• for redundant control of a load	No	No
Switching frequency		
• with resistive load, max.	100 Hz	100 Hz
• with inductive load, max.	2 Hz	2 Hz
• on lamp load, max.	10 Hz	10 Hz
Total current of the outputs		
• Current per channel, max.	0.5 A	0.5 A
horizontal installation		
- up to 60 °C, max.	5 A	5 A
- up to 70 °C, max.	4 A	4 A
vertical installation		
- up to 60 °C, max.	5 A	5 A
Cable length		
• shielded, max.	1 000 m	1 000 m
• unshielded, max.	600 m	600 m
Encoder		
Connectable encoders		
• 2-wire sensor	Yes	Yes
- permissible quiescent current (2-wire sensor), max.	1.5 mA	1.5 mA
Interfaces		
Number of PROFINET interfaces	1	1
Number of PROFIBUS interfaces	0	0
1. Interface		
Interface type	PROFINET	PROFINET
Isolated	Yes	Yes
Interface types		
• Number of ports	2	2
• integrated switch	Yes	Yes
• BusAdapter (PROFINET)	Yes	Yes
Protocols		
• PROFINET IO Device	Yes	Yes
• PROFIBUS DP slave	No	No
Interface types		
RJ 45 (Ethernet)		
• 100 Mbps	Yes	Yes
• Autonegotiation	Yes	Yes
• Autocrossing	Yes	Yes
Protocols		
Supports protocol for PROFINET IO	Yes	Yes
Redundancy mode		
• PROFINET system redundancy (S2)	Yes; Type S2	Yes; Type S2
Media redundancy		
- MRP	Yes	Yes
Open IE communication		
• LLDP	Yes	Yes

I/O systems

Gateways

SIMATIC CFU

SIMATIC CFU DIQ edition**Technical specifications**

Article number	6ES7655-5PX31-1AX0 SIMATIC CFU DIQ with Alu housing	6ES7655-5PX31-1XX0 SIMATIC CFU DIQ
Interrupts/diagnostics/ status information		
Status indicator	Yes	Yes
Alarms	Yes	Yes
Diagnostics function	Yes	Yes
Diagnoses		
• Monitoring of encoder power supply	Yes	Yes
• Wire-break	Yes	Yes
• Short-circuit	Yes	Yes
Diagnostics indication LED		
• RUN LED	Yes; green LED	Yes; green LED
• ERROR LED	Yes; red LED	Yes; red LED
• MAINT LED	Yes; Yellow LED	Yes; Yellow LED
• Monitoring of the supply voltage (PWR-LED)	Yes	Yes
• Status indicator digital input (green)	Yes	Yes
• Status indicator digital output (green)	Yes	Yes
Potential separation		
between the channels and PROFINET	Yes	Yes
Potential separation digital inputs		
• between the channels	No	No
• between the channels and the power supply of the electronics	No	No
Potential separation digital outputs		
• between the channels	No	No
• between the channels and the power supply of the electronics	No	No
Degree and class of protection		
IP degree of protection	IP66	IP20
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C	-40 °C
• max.	60 °C	70 °C
connection method / header		
Design of electrical connection	Connection plug	Connection plug
Dimensions		
Width	414 mm	329 mm
Height	266 mm	123 mm
Depth	111 mm	74 mm
Weights		
Weight, approx.	5.5 kg	610 g

Overview


BA 2xRJ45, 2xFC and 2xLC BusAdapter

BusAdapters

A BusAdapter as a separate component allows a free choice of SIMATIC CFU connection to PROFINET:

- BA 2xRJ45:
2 electrical connections for bus cables with standard RJ45 connectors
- BA 2xFC:
2 electrical connections for direct connection of FastConnect bus cable
- BA 2xLC:
2 optical ports for fiber-optic cables
- BA 1xLC, 1xRJ45:
Mixed BusAdapter 1 optical connection and 1 electrical connection standard RJ45
- BA 1xLC, 1xFC:
Mixed BusAdapter 1 optical connection and 1 electrical connection for direct connection of FastConnect bus cable
- BA 2xRJ45 VD:
2 electrical connections for Ethernet communication via 2-, 4- or 8-wire copper cables and distances up to 500 m

Ordering data
Article No.

BusAdapters	Article No.
BA 2xRJ45 BusAdapter 2 × RJ45 connections for PROFINET (standard Ethernet socket)	6DL1193-6AR00-0AA0
BA 2xFC BusAdapter 2 × FastConnect (FC) connections for PROFINET	6DL1193-6AF00-0AA0
BA 2xLC BusAdapter 2 × glass fiber-optic connections	6DL1193-6AG00-0AA0
BA LC/RJ45 BusAdapter 2 × glass fiber-optic connections	6DL1193-6AG20-0AA0
BA LC/FC BusAdapter 2 × glass fiber-optic connections	6DL1193-6AG40-0AA0
BA 2xRJ45 (VD) BusAdapter 2 × electrical connections for Ethernet communication via 2-, 4- or 8-wire copper cables and distances up to 500 m	6GK5991-2VA00-8AA2

I/O systems

Gateways

SIMATIC CFU

BusAdapters

Technical specifications

Article number	6DL1193-6AG20-0AA0 ET 200SP HA, BUSADAPTER BA LC/RJ45	6DL1193-6AG40-0AA0 ET 200SP HA, BUSADAPTER BA LC/FC
General information		
Product type designation	BA LC/RJ45	BA LC/FC
Interfaces		
Number of PROFINET interfaces	1; 2 ports (switch) LC / RJ45	1; 2 ports (switch) LC / FC
Supports protocol for PROFINET IO		
• Number of RJ45 ports	1	1
• Number of FC (FastConnect) connections		
• Number of LC ports	1; Wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-FX	1; Wavelength of 1 270 ... 1 380 nm, corresponds to 100BASE-FX
Cable length		
- Cu conductors	100 m	100 m
- Multimode graded-index fiber 50/125 µm	3 km; min. transmit power -23.5 dB, min. receiver sensitivity -31 dB	3 km; min. transmit power -23.5 dB, min. receiver sensitivity -31 dB
- Multimode graded-index fiber 62.5/125 µm	3 km; min. transmit power -20 dB, min. receiver sensitivity -31 dB	3 km; min. transmit power -20 dB, min. receiver sensitivity -31 dB
Standards, approvals, certificates		
RoHS conformity	Yes	Yes
China RoHS compliance	Yes	Yes
Ambient conditions		
Ambient temperature during operation		
• min.	-40 °C	-40 °C
• max.	70 °C; = Tmax for horizontal installation; for vertical installation Tmax = 60 °C; redundant setup (2x 6DL1155-6AU00-0PM0): max. 65 °C horizontally, max. 60 °C vertically. When using different IO Devices, the derating specified there must be observed.	65 °C; = Tmax for horizontal installation; for vertical installation Tmax = 60 °C; redundant setup (2x 6DL1155-6AU00-0PM0): max. 60 °C horizontally, max. 55 °C vertically. When using different IO Devices, the derating specified there must be observed.
Dimensions		
Width	20 mm	20 mm
Height	75 mm; Without protective caps (approx. 8 mm)	75 mm; Without protective caps (approx. 8 mm)
Depth	59 mm	59 mm
Weights		
Weight, approx.	32 g	50 g

10

Ordering data	Article No.
Connection system	
SIMATIC CFU screw-type terminals Complete set of screw-type terminals for SIMATIC CFU: two-tier 2x2 (24 V), single-tier 1x6 (GND) and single-tier 4x8 (IO)	6ES7655-5PX00-2XX0
SIMATIC CFU push-in terminals Complete set of push-in terminals for SIMATIC CFU: two-tier 2x2 (24 V), single-tier 1x6 (GND) and single-tier 4x8 (IO)	6ES7655-5PX00-1XX0

I/O systems


Data enablers

FDE Industrial Data Enabler

Overview

The SIMATIC Field Data Enabler (FDE) portfolio enables access to data from automation and process engineering plants. Data that cannot be read out via the fieldbus level and requires separate access can also be acquired. The acquired data can be transmitted to IT environments for further processing. This makes it possible to make data that was previously only available at the OT level accessible to the IT level as well.

The data available at the field level can be acquired in two ways:

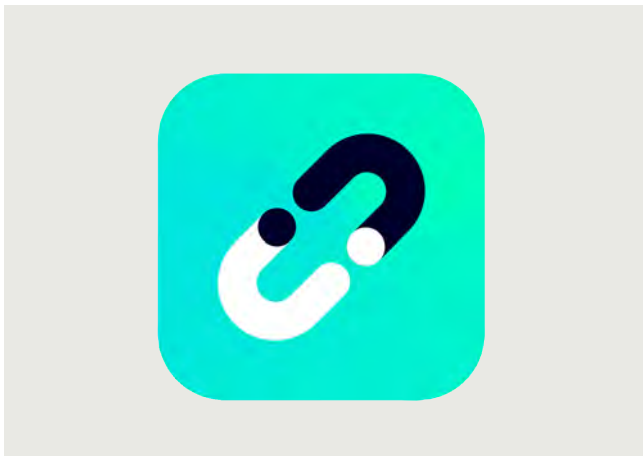

On the one hand, data acquisition and forwarding can be performed using the Linux-based software product **SIMATIC Field Data Enabler PN**, which can be installed on SIMATIC IPC or SIMATIC IoT with little effort. An existing PROFINET network is used for this purpose. The access takes place parallel to the data usage by the controller.



SIMATIC FDE Gateway

For direct access to data that is not available at the field level or to data that can be accessed with serial communication, the **SIMATIC FDE Gateway** is used, which requires very little space in the control cabinet and can be integrated in the system without any negative effects. The gateway has interfaces to directly access data of sensors and motors. In the process, specific data is buffered on the gateway to ensure trouble-free data availability. A WLAN interface is also implemented for easy on-site communication. Commissioning takes place via the integrated web interface.

Ordering data

Article No.

SIMATIC Field Data Enabler PN for Linux

OPC UA server for mapping the diagnostic and asset information of a PROFINET network according to the OPC UA 30140 (PROFINET) and OPC UA 30120 (IO-Link) Companion Specifications.
Runs under Debian 11 (arm64, x86).
Recommended hardware:
SIMATIC IoT2050,
SIMATIC IPC127E;
single license,
software for download¹⁾;
email address required for delivery

6ES7853-5BE00-0AA0

SIMATIC FDE Gateway V1

6ES7617-0BA01-0AB0

¹⁾ Up-to-date information and download availability can be found under <https://www.siemens.com/tia-online-software-delivery>.

SIMATIC control systems



11/2 SIMATIC TDC multiprocessor control system

- 11/2 Introduction, UR6021 rack
- 11/3 CPU555 processor module
- 11/4 CP50M1 communications module, CP51M1 communications module
- 11/5 CP53M0 coupling module, SM500 DIDQ I/O module
- 11/6 GlobalDataMemory
- 11/7 D7-SYS
- 11/8 Accessories

SIMATIC control systems

SIMATIC TDC multiprocessor control system

Introduction, UR6021 rack

Introduction



SIMATIC TDC (Technology and Drives Control) is a digital automation system featuring very high computing power and the ability to process very large programs. An extensive library with approx. 300 ready-made function blocks is available for fast engineering.

Overview UR6021 rack



- UR6021 rack as the base component for SIMATIC TDC
- Integrated system power supply and system fan
- With high-performance 64-bit backplane bus for high-speed data exchange between the inserted modules
- Requirement for operating the CPU555

Ordering data

Article No.

SIMATIC TDC, rack UR6021

21 slots, VMEBUS, 8 P0 slots, replaceable fans, suitable for GDM, 5-row plug-in connector

Spare-part compatible successor of 6DD1682-0CH2

6DD1682-0CH3

Accessories

SIMATIC TDC slot cover SR51

6DD1682-0DA1

Spare parts

SIMATIC S7-400, buffer battery 3.6 V/2.3 Ah

For PS 405 4 A/10 A/20 A and PS 407 4 A/10 A/20 A

6ES7971-0BA00

SIMATIC TDC, fan insert

For UR6021 rack

6DD1683-0CH3

Overview



- Graphic freely configurable processor module
- For implementing highly dynamic open and closed-loop control functions

Ordering data

Article No.

SIMATIC TDC, CPU555 64-bit processor module with PROFINET IRT	6DD1600-0BB0
Accessories	
SIMATIC Micro Memory Card	
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3, 3 V Nflash, 2 MB	6ES7953-8LL31-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3, 3 V Nflash, 4 MB	6ES7953-8LM32-0AA0
SIMATIC S7, Micro Memory Card for S7-300/C7/ET 200 3, 3 V Nflash, 8 MB	6ES7953-8LP31-0AA0
Crossed twisted pair cables 4x2 with RJ45 connectors	
Industrial Ethernet TP XP cord RJ45/RJ45 Cat6A, crossed TP cable 4X2, pre-assembled with 2 RJ45 plugs, length 0.5 m.	6XV1870-3RE50
Industrial Ethernet TP XP cord RJ45/RJ45 Cat6A, crossed TP cable 4X2, pre-assembled with 2 RJ45 plugs, length 1 m.	6XV1870-3RH10
Industrial Ethernet TP XP cord RJ45/RJ45 Cat6A, crossed TP cable 4X2, pre-assembled with 2 RJ45 plugs, length 2 m.	6XV1870-3RH20
Industrial Ethernet TP XP cord RJ45/RJ45 Cat6A, crossed TP cable 4X2, pre-assembled with 2 RJ45 plugs, length 6 m.	6XV1870-3RH60
Industrial Ethernet TP XP cord RJ45/RJ45 Cat6A, crossed TP cable 4X2, pre-assembled with 2 RJ45 plugs, length 10 m.	6XV1870-3RN10

SIMATIC control systems

SIMATIC TDC multiprocessor control system

CP50M1 communications module, CP51M1 communications module**Overview CP50M1 communications module**

The CP50M1 communications module provides two PROFIBUS DP/MPI interfaces and an 8 MB interprocessor memory for inter-CPU communication. The interfaces can be used as PROFIBUS DP master, slave, as master and slave simultaneously or as MPI node.

Overview CP51M1 communications module

The CP51M1 communications module is an Industrial Ethernet interface module for the SIMATIC TDC automation system.

Ordering data**Article No.****SIMATIC TDC CP 50M1 communications module****6DD1661-0AD1**

With 8 MB interprocessor memory, up to 1 MPI interface, up to 2 PROFIBUS DP interfaces

Ordering data**Article No.****SIMATIC TDC CP51M1 communications module****6DD1661-0AE1**

For Industrial Ethernet with TCP/IP and/or UDP

Technical specifications**Power supply**

Voltage / power supply	+5 V, 1.0 A typically
Power loss, typically	5 W
Required space / width	1 slot
Weight	0.34 kg

Technical specifications

Up-to-date technical specifications can be taken from the user documentation provided at the start of delivery

Required space / width	1 slot
Weight	
Connection for Industrial Ethernet	RJ45
Protocols	TCP/IP and/or UDP
Message frame lengths	also larger than 2 KB
Modes of transfer	Refresh, Handshake, Multiple and Select
Autosensing	for 10 Mbit or 100 Mbit network
Default router	adjustable

SIMATIC control systems

SIMATIC TDC multiprocessor control system

CP53M0 coupling module, SM500 DIDQ I/O module

Overview CP53M0 coupling module



The CP53M0 coupling module allows coupling of a SIMATIC TDC system to a SIMADYN D system for fast data exchange, e.g. when expanding existing SIMADYN D systems.

Ordering data

Article No.

SIMATIC TDC CP53M0 communications module
Rack coupling TDC <-> SIMADYN

6DD1660-0BJ0

Technical specifications

CP53M0 coupling module	
Memory	
Communication memory	SRAM, 128 KB
Communications buffer	SDRAM, 8 MB
FOC interface	
Number	2 (master mode) 1 (slave mode)
Data transfer rate	96 Mbit/s
Coding	5B/6B
Voltage, currents	
Voltages / currents	+5 V / 0.3 A 3.3 V / 0.5 A
Power loss	
Power loss, typically	3.1 W
Dimensions	
Number of slots required in rack	1
Dimensions W x H x D (in mm)	20 x 233 x 160
Weight	0.6 kg

Overview SM500 DIDQ I/O module

The SM500 DI/DQ I/O module provides digital inputs and outputs.

Ordering data

Article No.

SIMATIC TDC SM500 DI/DQ signal module
With 16 DQ/16 DI, 6 LEDs

6DD1640-0AH1

Technical specifications

Power supply

Voltage / power supply (at 25 °C)	+5 V typically 0.4 A +3.3 V typically 0.05 A
Typical power loss	3 W
Required space / width	1 slot
Weight	0.6 kg

Digital outputs

Number	16
Galvanic isolation	Only through optional interface modules

External power supply:

• Nominal voltage	24 V
• Permissible range	20.4 V to 28.8 V
• Short-term	35 V for max. 0.5 s
• Max. current consumption, without load	40mA

Output voltage range:

• At 0 signal, max.	3 V
• At 1 signal, min.	ext. supply voltage -2.5 V

Output current:

• At 0 signal, min.	- 20 µA
• At 1 signal	
- Rated value	50 mA
- Permissible range, max.	100 mA

Delay time

Delay time	100 µs
------------	--------

Max. switching frequency of the outputs with resistive load

Max. switching frequency of the outputs with resistive load	6 kHz
---	-------

Short-circuit protection to

• Ground	Yes
• Ext. power supply	No

Max. short-circuit current

Max. short-circuit current	250 mA
----------------------------	--------

Total current of outputs (up to 60 °C)

Total current of outputs (up to 60 °C)	16 x 50mA
--	-----------

Limiting of inductive cut-off voltage.

Limiting of inductive cut-off voltage.	External supply voltage +1 V
--	------------------------------

Digital inputs

Number	16
Galvanic isolation	Only through optional interface modules

Input voltage:

• Nominal voltage	24 V
• For 0 signal	-1 V to +6 V
• For 1 signal	+13.5 V to +33 V

Input current:

• At 0 signal	0 mA
• At 1 signal	3 mA

Delay time


Delay time	100 µs
------------	--------

SIMATIC control systems

SIMATIC TDC multiprocessor control system

GlobalDataMemory

Overview

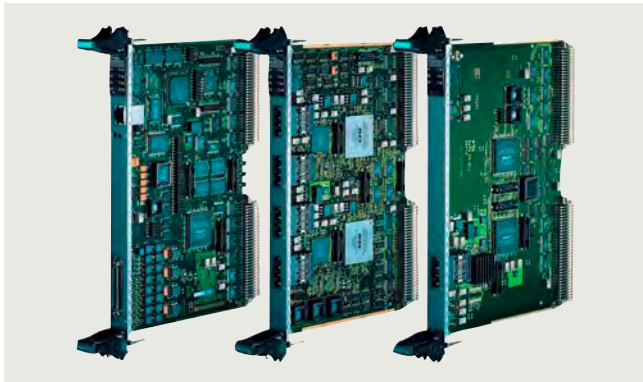

GlobalDataMemory

Data can be exchanged between all of the CPU modules in the system, over all of the networked subracks, using the memory in the GlobalDataMemory (GDM). Up to 44 subracks can be coupled in synchronism through the central memory. This means that a maximum of 836 CPU modules can be used.

Ordering data

Article No.

SIMATIC TDC CP 52M0 communications module

Memory module for Global Data Memory (GDM) with 2 MB SRAM memory

6DD1660-0BF0

SIMATIC TDC CP 52IO communications module

Interface module for Global Data Memory (GDM) with 4 interfaces

6DD1660-0BG0

SIMATIC TDC CP 52A0 communications module

Access module for Global Data Memory (GDM)

6DD1660-0BH1

Technical specifications

CP52M0

Power supply

Voltage / power supply (at 25 °C)	+5 V typically 0.4 A +3.3 V typically 0.7 A +12 V typically 0.01 A -12 V typically 0.01 A
-----------------------------------	--

Power loss, typically	4.5 W
-----------------------	-------

Required space / width	1 slot
------------------------	--------

Weight	0.6 kg
--------	--------

Digital outputs

Number	16
--------	----

Galvanic isolation	No
--------------------	----

External power supply:

• Nominal voltage	24 V
• Permissible range	20 to 30
• Short-term	35 V for max. 0.5 s
• Max. current consumption, without load	40 mA

Output voltage range:

• With 0 signal, max.	3 V
• At 1 signal, min.	External supply voltage -2.5 V

Output current:

• With 0 signal, min.	-20 µA
• At 1 signal	
- Rated value	50 mA
- Permissible range, max.	100 mA

Delay time	100 µs
------------	--------

Max. switching frequency of the outputs with resistive load	6 kHz
---	-------

Short-circuit protection to

• Ground	Yes
• External power supply	No

Max. short-circuit current	250 mA
----------------------------	--------

Total current of outputs (up to 60 °C)	16 x 50mA
--	-----------

Limiting of inductive cut-off voltage.	External supply voltage +1 V
--	------------------------------

CP52IO

Power supply

Voltage / power supply (at 25 °C)	+5 V typically 3 A +3.3 V typically 0.8 A
-----------------------------------	--

Power loss, typically	18 W
-----------------------	------

Required space / width	1 slot
------------------------	--------

Weight	0.6 kg
--------	--------

CP52A0

Power supply


Voltage / power supply (at 25 °C)	+5 V typ. 1.5 A +3.3 V typ. 0.4 A
-----------------------------------	--------------------------------------

Power loss, typically	9 W
-----------------------	-----

Required space / width	1 slot
------------------------	--------

Weight	0.6 kg
--------	--------

Overview

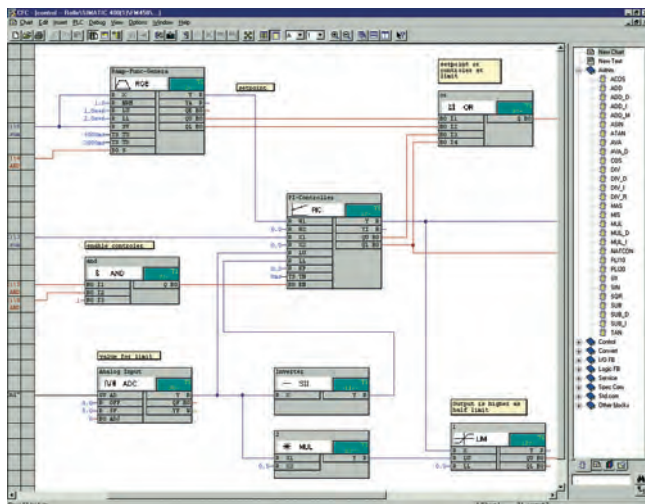

- Optional package for STEP 7 V5.6 SP2 or STEP 7 V5.7 for configuring closed-loop control and automation tasks with SIMATIC TDC and FM 458-1 DP
- Extensive block library
- Generation of user libraries in ANSI C with D7-FB-GEN function block generator

Licensing

- D7-SYS is delivered with a floating license. The floating license allows installation of the software on any number of computers. This means one user per license can use the software independently of the computer used and without being tied to a specific workstation. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- An upgrade to version 9.1 is available for users of previous versions from V8.1.
- A separate Software Update Service can be purchased for D7-SYS.
- As of version 8.1, the D7-FB-GEN block generator that was previously sold separately is included in the D7-SYS scope of delivery.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

SIMATIC D7-SYS V9.1

Reference hardware:
SIMATIC TDC, FM 458-1 DP
Requirement:
MS Windows 10 Pro and Enterprise (64 bit);
MS Windows Server 2016 Standard Edition (64 bit);
MS Windows Server 2019 Standard Edition (64 bit);
STEP 7 V5.6 SP2 or STEP 7 V5.7
Type of delivery:
On DVD, en, de, with electronic documentation

Floating license

Upgrade license from V8.1 to V9.1

Software Update Service¹⁾

6ES7852-0CC07-0YA5

6ES7852-0CC07-0YE5

6ES7852-0CC01-0YL5

¹⁾ For more information on the Software Update Service, see Catalog section 12.

SIMATIC control systems

SIMATIC TDC multiprocessor control system

Accessories**Overview SB10 interface module**

May deviate from figure.

The interface module is used to connect 8 digital inputs or outputs.

Overview SB70 interface module

The interface module is used to connect 8 digital outputs with conversion of the 24 V DC voltage on the module side to a max. of 120 V DC/AC on the plant side using relays.

Overview SB60 interface module

Interface module for connecting 8 digital inputs with 120 V DC/AC to 24 V DC conversion.

Overview SB71 interface module

The interface module is used to connect 8 digital outputs with conversion of the module-side 24 V DC to system-side max. 24/48 V DC by means of transistors.

Overview SB61 interface module

It is used to connect 8 digital inputs with conversion from 24/48 V DC to 24 V DC.

Overview SC62 interface cable

Cable for connecting the SIMATIC TDC SM500 I/O module or SIMATIC S7-400 EXM 438-1 expansion module with up to five SB10, SB60, SB70, SB61 SB71 and/or SU12 interface modules.

Overview SC63 interface cable



Cable for connecting the SIMATIC TDC SM500 I/O module or SIMATIC S7-400 EXM 438-1 expansion module with an SU13 interface module.

Overview SU12 interface module



The interface module is used to connect 10 signals; there is no electronic conversion.

Overview SC66 interface cable



Interface cable for the SIMATIC TDC CPU551 processor module and the SB10, SB60, SB61 and SU12 interface modules

Overview SU13 interface module



This interface module can be used to connect 50 signals; there is no electronic conversion.

SIMATIC control systems

SIMATIC TDC multiprocessor control system

Accessories

Ordering data	Article No.		Article No.
SIMATIC TDC, binary input or output SB10 8 BI or 8 BO, 24 V DC LED display	6DD1681-0AE2	SIMATIC TDC round cable SC62 50-pin shielded, length 2 m	6DD1684-0GC0
SIMADYN D binary input SB60 8 BI, 115 V DC/AC, LED display, galvanic isolation	6DD1681-0AF4	SIMATIC TDC round cable SC63 50-pin shielded, length 2 m	6DD1684-0GD0
SIMATIC TDC, binary input SB61 Isolated 24/48 V, 8 BI 24 or 48 V DC, LED display, galvanic isolation	6DD1681-0EB3	SIMATIC TDC round cable SC66 10-pin shielded, length 2 m	6DD1684-0GG0
SIMATIC TDC, binary output SB70 8 BO, max. 120 V DC/AC, LED display, galvanic isolation	6DD1681-0AG2	SIMATIC TDC service cable SC67 For connection to the CPU service interface, 10-pin shielded, length 7 m	6DD1684-0GH0
SIMATIC TDC, binary output SB71 8 BO, 24 V or 48 V DC, LED display, galvanic isolation	6DD1681-0DH1	SIMATIC TDC, converter SU12 10-pin, 10 screw-type plug-in terminals, 10-pin connector	6DD1681-0AJ1
		SIMATIC TDC, converter SU13 50 terminals (1:1 connection)	6DD1681-0GK0

Technical specifications

Technical specifications for SB 10 interface module	
Number of digital inputs/outputs	8
Galvanic isolation	No
Connectable conductor cross-section	1.5 mm ²
Dimensions (W x H x D) in mm	45 x 130 x 156
Weight	0.3 kg
Technical specifications for SB 60 interface module	
Number of digital inputs	8
• Input voltage	120 V DC/AC
Insulation voltage	<ul style="list-style-type: none"> • Safe isolation assured between inputs and outputs • Galvanic isolation assured between input circuits • 1125 V AC test voltage
Connectable conductor cross-section	1.5 mm ²
Dimensions (W x H x D) in mm	45 x 130 x 156
Weight	0.31 kg
Technical specifications for SB 61 interface module	
Number of digital inputs	8
• Input voltage	24/48 V DC
Galvanic isolation	Yes, via optocoupler
Connectable conductor cross-section	1.5 mm ²
Dimensions (W x H x D) in mm	45 x 130 x 156
Weight	0.32 kg
Technical specifications for SB 70 interface module	
Number of digital outputs	8
• Output voltage, max.	120 V DC/AC
Relay switching current	
• At 120 V AC	2 A
• At 120 V DC	0.2 A
Galvanic isolation	via relay
Insulation voltage	<ul style="list-style-type: none"> • Safe isolation assured between inputs and outputs • Galvanic isolation assured between input circuits • 1125 V AC test voltage
Connectable conductor cross-section	1.5 mm ²
Dimensions (W x H x D) in mm	45 x 130 x 156
Weight	0.32 kg

Technical specifications for SB 71 interface module	
Number of digital outputs	8
• Output voltage, max.	24/48 V DC
Output current, max.	40 mA, short-circuit-proof
Galvanic isolation	Yes, via optocoupler
Connectable conductor cross-section	1.5 mm ²
Dimensions (W x H x D) in mm	45 x 130 x 156
Weight	0.32 kg
Technical specifications for SU 12 interface module	
Number of connectable signal lines	10
Signal strength per signal, max.	60 V, 0.5 A
Galvanic isolation	No
Connectable conductor cross-section	1.5 mm ²
Dimensions (W x H x D) in mm	45 x 130 x 156
Weight	0.28 kg
Technical specifications for SU 13 interface module	
Number of connectable signal lines	50
Signal strength per signal, max.	60 V, 0.5 A
Galvanic isolation	No
Connectable conductor cross-section	1.5 mm ²
Dimensions (W x H x D) in mm	45 x 130 x 156
Weight	0.3 kg

SIMATIC control systems

Notes

11

Software for SIMATIC Controllers



12/2	Introduction	12/58	<u>Options for technology and drive systems</u>
12/2	Information on software licensing	12/58	Loadable function blocks
12/2	Software Update Service	12/58	- Standard PID Control
12/3	TIA Portal	12/60	- Modular PID Control
12/3	TIA Portal Cloud	12/63	- PID Self-Tuner
12/4	<u>PLC programming</u>	12/64	S7-Technology
12/4	STEP 7 Basic (TIA Portal)	12/65	Easy Motion Control
12/6	STEP 7 Professional (TIA Portal)	12/66	D7-SYS
12/10	STEP 7 (TIA Portal) options	12/67	Drive ES engineering software
12/10	- STEP 7 CFC (TIA Portal)	12/69	Software for robotics
12/12	- STEP 7 Safety (TIA Portal)	12/69	SIMATIC Robot Library
12/14	- S7-PLCSIM Advanced	12/70	SIMATIC Cartesian Portal
12/16	- ODK 1500S	12/71	SIMATIC Robot Pick AI
12/17	- SIMATIC Target for Simulink	12/72	Software for common tasks
12/19	- SIMATIC Safe Kinematics	12/72	<u>For network planning/commissioning</u>
12/20	- SIMATIC Kinematics Operate	12/72	SINETPLAN 2.0 network planning
12/21	- S7-1500T Motion Control KinPlus	12/73	PROFINET Asset Management
12/22	- PID Professional (TIA Portal)		PRONETA Professional
12/23	- Easy Motion Control (TIA Portal)	12/74	<u>For maintenance</u>
12/24	- SIMATIC TPCamGen technology package	12/74	SIMATIC Automation Tool
12/25	- OPC UA S7-1200/S7-1500	12/76	SIMATIC PDM
12/26	<u>TIA Portal options</u>	12/82	<u>For administration</u>
12/26	TIA Portal Multiuser Engineering	12/82	Central user management (UMC)
12/27	TIA Project Server Cloud	12/83	SIMATIC Version Cross Manager
12/28	TIA Portal Test Suite	12/84	Version Trail
12/29	TIA Portal Cloud Connector		
12/30	TIA Portal Teamcenter Gateway		
12/31	TIA Portal CAx Publication Tools		
12/32	SIMATIC Visualization Architect		
12/33	SIMATIC ProDiag		
12/34	SIMATIC Modular Application Creator		
12/35	Central user management (UMC)		
12/36	STEP 7 V5.x		
12/36	<u>Basic software and editors</u>		
12/36	STEP 7		
12/38	STEP 7 Professional		
12/41	S7-SCL		
12/43	S7-GRAPH		
12/45	S7-PLCSIM		
12/46	<u>Options for programming and design</u>		
12/46	CFC		
12/48	S7 Distributed Safety		
12/49	Safety Integrated for Process Automation		
12/51	- SIMATIC S7 F Systems		
12/52	- SIMATIC S7 Safety Matrix		
12/54	Software redundancy		
12/55	DOCPRO		
12/56	<u>Options for diagnostics and service</u>		
12/56	S7-PDIAG		
12/57	PRODAVE		

Software for SIMATIC Controllers

Introduction

Information on software licensing, Software Update Service

Overview Licensing

Software types

Every software subject to a license is assigned to a type. The following software types are defined:

- Engineering software
- Runtime software

For more information, see catalog section 17, page 17/15.

Overview Software Update Service

- Service for automatic dispatch of all new software versions during contract lifetime
- Reduced logistics effort thanks to automatic contract extension
- Reduced costs as updates are provided free of charge

Ordering

- The Software Update Service is ordered in the same way as any other product. The corresponding order number is given in the ordering information of the software product in question.
- You must own the current version of the software.
- One Software Update Service is ordered for each software license installed.
- The Software Update Service runs for 1 year from date of order.
- It is extended automatically by a further year in each case, as long as it is not canceled 3 months before it expires.
- An annual lump sum is invoiced per license.

Application

SIMATIC Software is continuously enhanced and improved. The **Software Update Service** (previously: software maintenance service) is the easiest way to regularly take advantage of these improvements. It ensures automatic delivery of all new software versions that are released after ordering the Software Update Service so that your software is always up to date.

The Software Update Service


- Saves time and effort:
Once it is ordered, the Software Update Service is automatically renewed every year.
- Lowers costs:
The service pays for itself after the first update as it costs less than an individually ordered update.
- Makes budgeting easier:
Software expenditures can be accounted for early in the budgeting process and they are easier to write off.

Design

Scope of supply

- All new software versions that are released after ordering the Software Update Service (usually several deliveries per year)
- CD-ROM SIMATIC Customer Support Knowledge Base with FAQs, tips & tricks and downloads (several times per year).

Overview

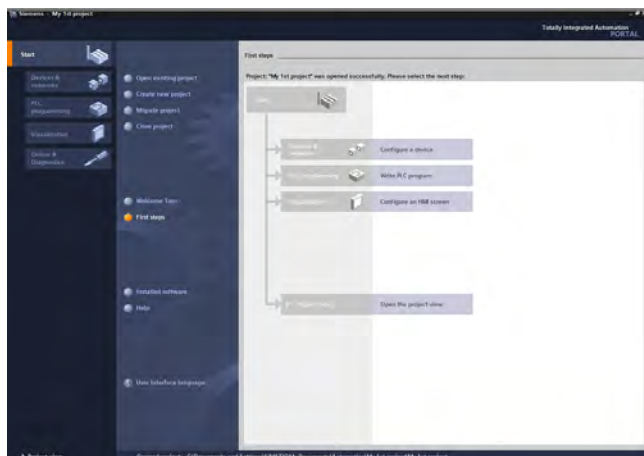

TIA Portal Cloud enables the use of the TIA Portal software in a virtualized cloud environment. No local installation of the software is required. Local projects can be transferred to the cloud via a file share service and also loaded back.

TIA Portal Cloud includes the main packages of the TIA Portal versions V15.1 and higher, as well as the most important option packages of these versions.

Licensing

TIA Portal Cloud is offered under the new subscription licensing model. This model increases flexibility and enables a quick start.

- With the pay-per-use variant, the actual usage time is booked on an hourly basis and billed at the end of the month.
- The monthly subscription offers unlimited use within one month. The subscription is automatically renewed for a further month unless it is canceled before the end of the contract period.
- In addition to unlimited use of TIA Portal Cloud, the annual subscription provides free access to "SITRAIN access - the digital learning platform".
- The 365-day subscription is a Certificate of Contract (CoC) with a fixed term of 365 days and is not automatically renewed. A PDF with the information on how to activate the TIA Portal Cloud access is supplied.

More information

More information is available on this at <https://support.industry.siemens.com/cs/de/en/view/109794456>.

Ordering data

Article No.

TIA Portal Cloud

TIA Portal software packages for use in a virtual cloud environment without local installation. Can only be ordered via SiePortal. Consignee email address required for delivery

TIA Portal Cloud, pay-per-use (hourly).

Only available via Industry Mall. Consignee email address required for delivery.

For this service, the following T&Cs apply exclusively <https://www.siemens.com/premiumdocs>
(i) Documentation and Supplemental Terms for the Subscription to free accessible services of Industry Premium Portal – Basic Services,
(ii) Documentation and Supplemental Terms for the Subscription to the TIA Portal Cloud and
(iii) Universal Customer Agreement.

6ES7804-0CP41-3YA0

TIA Portal Cloud, monthly subscription.

Only available via Industry Mall. Consignee email address required for delivery.

For this service, the following T&Cs apply exclusively <https://www.siemens.com/premiumdocs>
(i) Documentation and Supplemental Terms for the Subscription to free accessible services of Industry Premium Portal – Basic Services
(ii) Documentation and Supplemental Terms for the Subscription to the TIA Portal Cloud and
(iii) Universal Customer Agreement.

6ES7804-0CP41-2YA0

TIA Portal Cloud and SITRAIN access, annual subscription.

Your benefit:
In addition to use of TIA Portal Cloud, you receive free access to SITRAIN access - the digital learning platform. Your engineering environment and know-how are always up to date, thanks to cloud technology anywhere at any time.
Consignee email address required for delivery.

The specific terms under <https://www.siemens.com/premiumdocs> apply exclusively

6ES7804-0CP41-1YA0

TIA Portal Cloud, 365-day subscription.

You will receive a Certificate of Contract to unlock TIA Portal Cloud for 365 days, starting from the date of delivery. This subscription ends automatically.

Contents: Certificate of Contract (CoC)

Consignee email address required for delivery.

The specific terms under <https://www.siemens.com/premiumdocs> apply exclusively


6ES7804-0CP41-1YA8

Software for SIMATIC Controllers


TIA Portal
PLC programming

STEP 7 Basic (TIA Portal)

Overview

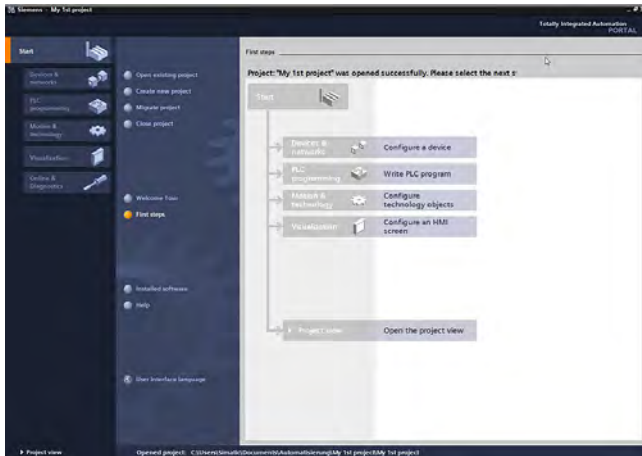

STEP 7 Basic V19 (TIA Portal), portal view

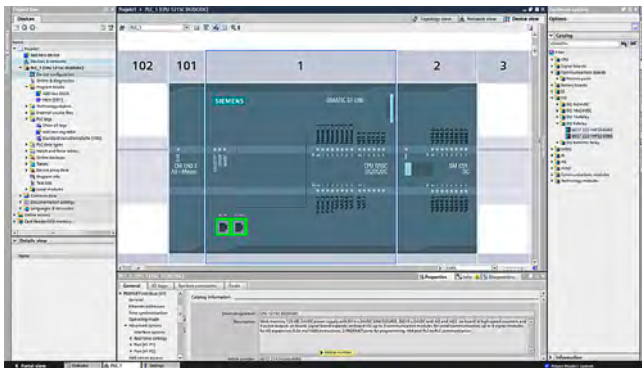

STEP 7 Basic V19 (TIA Portal), device view: Configuring and parameterizing in realistic photo-quality representation

Intuitive, efficient and future-oriented - the engineering software for programming SIMATIC Controllers

SIMATIC STEP 7 Basic V19 is the engineering system for the SIMATIC S7-1200.

STEP 7 Basic V19 is based on the Totally Integrated Automation Portal (TIA Portal) central engineering framework which offers users a uniform, efficient and intuitive solution to all automation tasks.

New with V19

- Filtering of PLC variable tables:
PLC variable tables can now be filtered. A new filter view is available for this purpose. Filters support users in particular in the targeted search and replacement of entries.
- Improved user interface for S7-PLCSIM V19, which can also be used for PLCSIM Advanced
- Configuration of the new S7-1200 firmware
- Extended functions for TIA Portal Openness

Licensing

- STEP 7 Basic V19 is supplied with a floating license. The floating license allows the software to be used on any number of computers. This means one user per license can use the software independently of the computer used and without being tied to a specific workstation. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- With the STEP 7 Basic V19 license, S7-PLCSIM V19 is also licensed, which enables the simulation of S7-1200 controllers.
- Existing STEP 7 Basic licenses of versions V11-18 can be upgraded to V19. This requires an upgrade license.
- The STEP 7 Basic V19 license can be upgraded to a STEP 7 Professional V19 license with a PowerPack.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

STEP 7 Basic V19

Target system:
SIMATIC S7-1200

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSB
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC

Windows 11 (64-bit)

- Windows 11 Home Version 21H2
- Windows 11 Home Version 22H2
- Windows 11 Professional Version 21H2
- Windows 11 Professional Version 22H2
- Windows 11 Enterprise 21H2
- Windows 11 Enterprise 22H2

Windows Server (64-bit)

- Windows Server 2016 Standard (full installation)
- Windows Server 2019 Standard (full installation)
- Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

STEP 7 Basic V19, floating license **6ES7822-0AA23-0YA5**

STEP 7 Basic V19, floating license, software download including license key¹⁾ **6ES7822-0AE23-0YA5**

Consignee email address required for delivery

Upgrade from STEP 7 Basic V11...V18 to STEP 7 Basic V19, floating license **6ES7822-0AA23-0YE5**

Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Technical specifications																										
Upgrade from STEP 7 Basic V11...V18 to STEP 7 Basic V19, floating license, software download incl. license key¹⁾ Consignee email address required for delivery	6ES7822-0AE23-0YE5	<table border="1"> <thead> <tr> <th colspan="2">STEP 7 Basic V19 (TIA Portal)</th> </tr> </thead> <tbody> <tr> <td>Type of license</td> <td>Floating license</td> </tr> <tr> <td>Software class</td> <td>A</td> </tr> <tr> <td>Current version</td> <td>V19</td> </tr> <tr> <td>Target system</td> <td>SIMATIC S7-1200</td> </tr> <tr> <td>Operating systems</td> <td> Windows 10 (64-bit) <ul style="list-style-type: none"> Windows 10 Home version 22H2. Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) </td> </tr> <tr> <th colspan="2">Recommended PC hardware</th> </tr> <tr> <td>Computer</td> <td>SIMATIC IPC MD-57A (successor of the Field PG M6) or comparable PC</td> </tr> <tr> <td>Processor</td> <td>Intel® Core™ i5 -12600HE processor (16 threads, 18 MB cache, up to 4.50 GHz)</td> </tr> <tr> <td>RAM</td> <td>16 GB or more (min. 8 GB, 32 GB for large projects)</td> </tr> <tr> <td>Hard disk</td> <td>SSD with at least 50 GB storage space available</td> </tr> <tr> <td>Network</td> <td>1 Gbit (for multi-user)</td> </tr> <tr> <td>Screen</td> <td>15.6" full HD display (1920 x 1080 or higher)</td> </tr> </tbody> </table>	STEP 7 Basic V19 (TIA Portal)		Type of license	Floating license	Software class	A	Current version	V19	Target system	SIMATIC S7-1200	Operating systems	Windows 10 (64-bit) <ul style="list-style-type: none"> Windows 10 Home version 22H2. Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) 	Recommended PC hardware		Computer	SIMATIC IPC MD-57A (successor of the Field PG M6) or comparable PC	Processor	Intel® Core™ i5 -12600HE processor (16 threads, 18 MB cache, up to 4.50 GHz)	RAM	16 GB or more (min. 8 GB, 32 GB for large projects)	Hard disk	SSD with at least 50 GB storage space available	Network	1 Gbit (for multi-user)	Screen	15.6" full HD display (1920 x 1080 or higher)
STEP 7 Basic V19 (TIA Portal)																												
Type of license	Floating license																											
Software class	A																											
Current version	V19																											
Target system	SIMATIC S7-1200																											
Operating systems	Windows 10 (64-bit) <ul style="list-style-type: none"> Windows 10 Home version 22H2. Windows 10 Professional Version 22H2 Windows 10 Enterprise Version 2009/20H2 Windows 10 Enterprise Version 21H2 Windows 10 Enterprise Version 22H2 Windows 10 Enterprise 2016 LTSC Windows 10 Enterprise 2019 LTSC Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> Windows 11 Home Version 21H2 Windows 11 Home Version 22H2 Windows 11 Professional Version 21H2 Windows 11 Professional Version 22H2 Windows 11 Enterprise 21H2 Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> Windows Server 2016 Standard (full installation) Windows Server 2019 Standard (full installation) Windows Server 2022 Standard (full installation) 																											
Recommended PC hardware																												
Computer	SIMATIC IPC MD-57A (successor of the Field PG M6) or comparable PC																											
Processor	Intel® Core™ i5 -12600HE processor (16 threads, 18 MB cache, up to 4.50 GHz)																											
RAM	16 GB or more (min. 8 GB, 32 GB for large projects)																											
Hard disk	SSD with at least 50 GB storage space available																											
Network	1 Gbit (for multi-user)																											
Screen	15.6" full HD display (1920 x 1080 or higher)																											
PowerPack STEP 7 Basic V19 to STEP 7 Professional V19, floating license	6ES7822-1AA23-0YC5																											
PowerPack STEP 7 Basic V19 to STEP 7 Professional V19, floating license, software download including license key¹⁾ Consignee email address required for delivery	6ES7822-1AE23-0YC5																											
Software Update Service For a period of 12 months and for a fixed price, the customer is automatically provided with all upgrades and Service Packs for each installed software package. The contract is automatically extended by a further year unless canceled at least 12 weeks prior to expiration. Requires the current software version																												
Software Update Service (Standard Edition)²⁾ The delivery is implemented according to the number of ordered SUS products (e.g. 10 upgrade packages with 10 DVDs, 10 USB flash drives, etc.) <ul style="list-style-type: none"> STEP 7 Basic 	6ES7822-0AA00-0YLO																											
Software Update Service (Compact Edition)²⁾ The delivery items are combined. For several contracts, only 1 package with 1 data storage medium set, 1 USB flash drive with the corresponding number of licenses and the corresponding number of CoLs will be supplied. Delivery items to be combined must be ordered as one item. <ul style="list-style-type: none"> STEP 7 Basic 	6ES7822-0AA00-0YM0																											
Software Update Service (Download)²⁾ Upgrades and Service Packs are available for downloading. Consignee email address required for delivery <ul style="list-style-type: none"> STEP 7 Basic 	6ES7822-0AE00-0YY0																											

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

²⁾ For more information on the Software Update Service, see page 12/2.

Compatibility with other SIMATIC products

STEP 7 V19 can be installed on a PC in parallel with other versions of STEP 7 V13 SSP2 to V18 and STEP 7 V5.6. You can find more information on compatibility in the FAQ "Compatibility Tool for Automation and Drive Technology" under <https://support.industry.siemens.com/cs/ww/en/view/64847781>.

As of TIA Portal project version V13 SP1, projects can be directly upgraded to V19. Upgrading of projects from previous project versions (V11 ... V13) is carried out on the basis of the TIA Portal products (e.g. STEP 7) used in the project in version V13 SP1 or V13 SP2 (latest update recommended).

Important note

TIA Portal project versions V13 SP1.. V18 are upgraded with TIA Portal V19 to the project version V19. If you need to edit a TIA Portal project version V13 SP1.. V18, we recommend an additional installation of the corresponding software to TIA Portal V19. The license purchased for V19 is also valid for all older TIA Portal versions.


Program code and hardware configuration from STEP 7 V5.4 SP5 can be migrated directly to a TIA Portal V19 project with STEP 7 V19.

Software for SIMATIC Controllers


TIA Portal
PLC programming

STEP 7 Professional (TIA Portal)

Overview

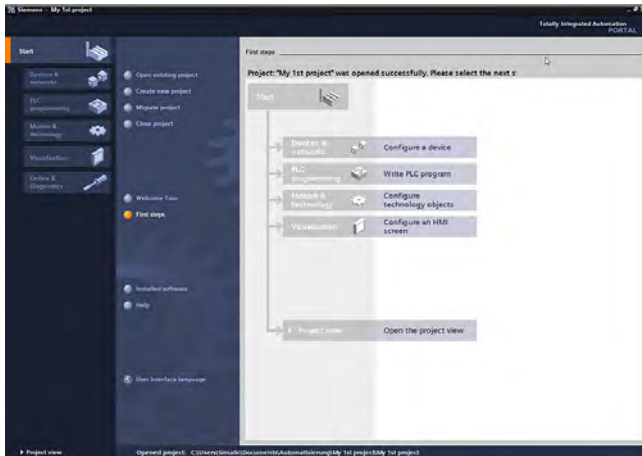

STEP 7 Professional V19 (TIA Portal), portal view

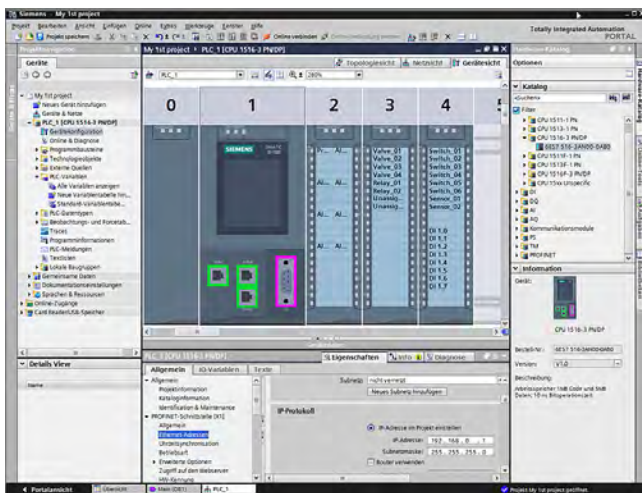

STEP 7 Professional V19 (TIA Portal), device view: Configuring and parameterizing in realistic photo-quality representation

Intuitive, efficient and future-oriented - the engineering software for programming the SIMATIC Controllers

SIMATIC STEP 7 Professional V19 is the engineering system for the SIMATIC S7-1200, S7-1500, S7-300, S7-400 Controllers, WinAC and Software Controllers.

STEP 7 V19 is based on the Totally Integrated Automation Portal (TIA Portal) central engineering framework which offers users a uniform, efficient and intuitive solution to all automation tasks.

New in V19

- **Named value data types (S7-1500):**
As of V19, "named values" can be used in the program – exclusively within the software units. They are defined in standard 61131-3 as a way to define constants with a name and a value. These can then be used in programs to improve the readability and maintainability
- The "Symbolic access during runtime" function offers the following new features (S7-1500):
 - The following types of data can also be accessed via symbolic names at runtime: Structured data types such as ARRAY or STRUCT; STRING and WSTRING; DTL.
 - The list of tag names which are specified at the "nameList" parameter of the "ResolveSymbols" system function block may also be located in a non-optimized memory area.
 - As of FW version 3.0, the "ResolvedSymbol" system data type may be declared as an element of a PLC data type.
- **Filtering of PLC variable tables:**
PLC variable tables can now be filtered. A new filter view is available for this purpose. Filters support users in particular in the targeted search and replacement of entries.
- **Long-term trace:**
The values can be displayed and analyzed directly in the diagram during recording. Superimposed measurements can be used for the long-term trace. The time bases can be synchronized. R/H-CPU's support the long-term trace via a connection with the primary CPU. In the case of a system-related switchover to the backup CPU, the data continue to be recorded in the backup CPU. This data cannot be saved until the primary CPU is active again and the long-term trace has been restarted.
- **"Filter_Universal" instruction:**
The new "Filter_Universal" auxiliary function for SIMATIC S7-1500 controllers is a configurable digital filter of the order 1 to 10. This instruction is used to manipulate signals in such a way that specific frequency parts of the signal are transmitted or attenuated. The frequency, bandwidth, type, characteristic, and order filter parameters can be specified by the user to generate the desired result.
- **PID_Compact V3.0 with adjustable deadband:**
The new version V3.0 of the PID_Compact controller for SIMATIC S7-1500 Controllers can be used to set the deadband so as to reduce output signal fluctuations with noisy input values. If a process value is influenced by noise, the noise can also strongly affect the output value when the controller gain is high. The adjustable deadband can contribute towards reducing such fluctuations.

Overview

- Improved user interface for S7-PLCSIM V19, which can also be used for PLCSIM Advanced.
- Configuration of the innovative S7-1200 / S7-1500 / ET 200SP CPUs (higher performance and more memory).
- Comprehensive extensions for Motion Control and T-CPU's, e.g. SIMATIC Motion Interpreter, torque feedforward control, listening probe, and much more.
- Function extensions for TIA Portal Openness

Licenses

- STEP 7 Professional V19 is supplied with a STEP 7 Professional V19 floating license. The floating license allows the software to be used on any number of computers. This means one user per license can use the software independently of the computer used and without being tied to a specific workstation. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- With the STEP 7 Professional V19 license, S7-PLCSIM V19 is also licensed, which enables the simulation of S7-1200 and S7-1500 controllers.
- Existing STEP 7 Professional licenses of versions V11-18 can be upgraded to V19. This requires an upgrade license.
- The user receives a combo license when upgrading from STEP 7 V5.x. The combo license enables engineering to be performed both on the STEP 7 V5.x and the STEP 7 V19 platform.
- The STEP 7 Basic V19 license can be upgraded to a STEP 7 Professional V19 license with a PowerPack.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under <http://www.siemens.com/simatic-licenses>.

Ordering data**Article No.****STEP 7 Professional V19**

Target system:
SIMATIC S7-1200, S7-1500,
S7-300, S7-400, WinAC

Requirement:

- Windows 10 (64-bit)
- Windows 10 Home Version 22H2
 - Windows 10 Professional Version 22H2
 - Windows 10 Enterprise Version 2009/20H2
 - Windows 10 Enterprise Version 21H2
 - Windows 10 Enterprise Version 22H2
 - Windows 10 Enterprise 2016 LTSB
 - Windows 10 Enterprise 2019 LTSC
 - Windows 10 Enterprise 2021 LTSC
- Windows 11 (64-bit)
- Windows 11 Home Version 21H2
 - Windows 11 Home Version 22H2
 - Windows 11 Professional Version 21H2
 - Windows 11 Professional Version 22H2
 - Windows 11 Enterprise 21H2
 - Windows 11 Enterprise 22H2

- Windows Server (64-bit)
- Windows Server 2016 Standard (full installation)
 - Windows Server 2019 Standard (full installation)
 - Windows Server 2022 Standard (full installation)

Type of delivery:

9 languages: en, de, zh included, fr, sp, it, ru, jp, kr as download

STEP 7 Professional V19, floating license **6ES7822-1AA23-0YA5**

STEP 7 Professional V19, floating license, software download including license key ¹⁾ **6ES7822-1AE23-0YA5**

Consignee email address required for delivery

STEP 7 Professional V19/2021 SR2 Combo, floating license **6ES7810-5CC16-0YA5**

STEP 7 Professional V19/2021 SR2 Combo, floating license, software download incl. license key ¹⁾ **6ES7810-5CE16-0YB5**

Consignee email address required for delivery

Upgrade from STEP 7 Professional V11...18 to STEP 7 Professional V19 or STEP 7 Professional V17/2021 Combo...V18/2021 SR1 Combo to V19/2021 SR2 Combo, floating license **6ES7822-1AA23-0YE5**

Upgrade from STEP 7 Professional V11...18 to STEP 7 Professional V19 or STEP 7 Professional V17/2021 Combo...V18/2021 SR1 Combo to V19/2021 SR2 Combo, floating license Software download incl. license key ¹⁾ **6ES7822-1AE23-0YE5**

Consignee email address required for delivery

Upgrade from STEP 7 Professional V11/2010...V16/2017 Combo to STEP 7 Professional V19/2021 SR2 Combo, floating license **6ES7822-1AA23-0YE3**

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Software for SIMATIC Controllers

TIA Portal

PLC programming

STEP 7 Professional (TIA Portal)

Ordering data	Article No.	Article No.
Upgrade STEP 7 Professional V11/2010...V16/2017 Combo to STEP 7 Professional V19/2021 SR2 Combo, floating license; Software download, incl. license key¹⁾ Consignee email address required for delivery	6ES7822-1AE23-0YE3	Software Update Service For a period of 12 months and for a fixed price, the customer is automatically provided with all upgrades and Service Packs for each installed software package. The contract is automatically extended by a further year unless canceled at least 12 weeks prior to expiration. Requires the current software version
PowerPack STEP 7 Professional V19 Trial 365 to STEP 7 Prof. V19, floating license. Only valid if ordered together with Software Update Service 6ES7 822-1AE00-0YY0 (STEP 7 Professional V1x) Prerequisite is a STEP 7 V19 Trial 365 license. License key download ¹⁾ Consignee email address required for delivery	6ES7822-1BE23-0YC5	
50 hours of engineering with STEP 7 Professional V19, STEP 7 Professional 2021 SR2, WinCC Professional V19 (incl. WinCC flexible 2008) and STEP 7 Safety Advanced V19 (incl. Distributed Safety V5.4), floating license Software download incl. license key ¹⁾ Consignee email address required for delivery	6ES7823-1GE23-0YA5	Software Update Service (Standard Edition)²⁾ The delivery is implemented according to the number of ordered SUS products (e.g. 10 upgrade packages with 10 DVDs, 10 USB flash drives, etc.) <ul style="list-style-type: none"> STEP 7 Professional in the TIA Portal STEP 7 Professional and STEP 7 Professional in the TIA Portal
PowerPack STEP 7 Basic V19 to STEP 7 Professional V19, floating license	6ES7822-1AA23-0YC5	
PowerPack STEP 7 Basic V19 to STEP 7 Professional V19, floating license, software download including license key ¹⁾ Consignee email address required for delivery	6ES7822-1AE23-0YC5	Software Update Service (Compact Edition)²⁾ The delivery items are combined. For several contracts, only 1 package with 1 data storage medium set, 1 USB flash drive with the corresponding number of licenses and the corresponding number of CoLs will be supplied. Delivery items to be combined must be ordered as one item. <ul style="list-style-type: none"> STEP 7 Professional in the TIA Portal STEP 7 Professional and STEP 7 Professional in the TIA Portal
PowerPack & upgrade from STEP 7 V5.7 to STEP 7 Professional V19/2021 SR2 combo, floating license	6ES7822-1AA23-0XC5	
PowerPack & upgrade from STEP 7 V5.7 to STEP 7 Professional V19/2021 SR2 combo, floating license Software download incl. license key ¹⁾ Consignee email address required for delivery	6ES7822-1AE23-0XC5	Software Update Service (Download)²⁾ Upgrades and Service Packs are available for downloading. Consignee email address required for delivery <ul style="list-style-type: none"> STEP 7 Professional V1x STEP 7 Professional and STEP 7 Professional in the TIA Portal
PowerPack & upgrade from STEP 7 V5.3...V5.6 to STEP 7 Professional V19/2021 SR2 combo, floating license	6ES7822-1AA23-0XC3	
PowerPack & upgrade from STEP 7 V5.3...V5.6 to STEP 7 Professional V19/2021 SR2 combo, floating license Software download incl. license key ¹⁾ Consignee email address required for delivery	6ES7822-1AE23-0XC3	TIA Portal Cloud TIA Portal software packages for use in a virtual cloud environment without local installation. TIA Portal Cloud includes the main packages of the TIA Portal versions V15.1 and higher, as well as the most important option packages of these versions. Can only be ordered via SiePortal. Consignee email address required for delivery.

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

²⁾ For more information on the Software Update Service, see page 12/2.

Ordering data	Article No.	Technical specifications														
<p>TIA Portal Cloud, pay-per-use (hourly).</p> <p>Only available via Industry Mall. Consignee email address required for delivery.</p> <p>For this service, the following T&Cs apply exclusively https://www.siemens.com/premiumdocs (i) Documentation and Supplemental Terms for the Subscription to free accessible services of Industry Premium Portal – Basic Services, (ii) Documentation and Supplemental Terms for the Subscription to the TIA Portal Cloud and (iii) Universal Customer Agreement.</p>	6ES7804-0CP41-3YA0	<table border="1"> <thead> <tr> <th colspan="2" data-bbox="813 287 1465 319">STEP 7 Professional V19 (TIA Portal)</th> </tr> </thead> <tbody> <tr> <td data-bbox="813 319 1141 351">Type of license</td> <td data-bbox="1141 319 1465 351">Floating license</td> </tr> <tr> <td data-bbox="813 351 1141 383">Software class</td> <td data-bbox="1141 351 1465 383">A</td> </tr> <tr> <td data-bbox="813 383 1141 414">Current version</td> <td data-bbox="1141 383 1465 414">V19</td> </tr> <tr> <td data-bbox="813 414 1141 478">Target system</td> <td data-bbox="1141 414 1465 478">SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC, Software Controllers</td> </tr> <tr> <td data-bbox="813 478 1141 1085">Operating systems</td> <td data-bbox="1141 478 1465 1085"> Windows 10 (64-bit) <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H2 • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC • Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) </td> </tr> </tbody> </table>	STEP 7 Professional V19 (TIA Portal)		Type of license	Floating license	Software class	A	Current version	V19	Target system	SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC, Software Controllers	Operating systems	Windows 10 (64-bit) <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H2 • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC • Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) 		
STEP 7 Professional V19 (TIA Portal)																
Type of license	Floating license															
Software class	A															
Current version	V19															
Target system	SIMATIC S7-1200, S7-1500, S7-300, S7-400, WinAC, Software Controllers															
Operating systems	Windows 10 (64-bit) <ul style="list-style-type: none"> • Windows 10 Home Version 22H2 • Windows 10 Professional Version 22H2 • Windows 10 Enterprise Version 2009/20H2 • Windows 10 Enterprise Version 21H2 • Windows 10 Enterprise Version 22H2 • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC • Windows 10 Enterprise 2021 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> • Windows 11 Home Version 21H2 • Windows 11 Home Version 22H2 • Windows 11 Professional Version 21H2 • Windows 11 Professional Version 22H2 • Windows 11 Enterprise 21H2 • Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation) 															
<p>TIA Portal Cloud, monthly subscription.</p> <p>Only available via Industry Mall. Consignee email address required for delivery.</p> <p>For this service, the following T&Cs apply exclusively https://www.siemens.com/premiumdocs (i) Documentation and Supplemental Terms for the Subscription to free accessible services of Industry Premium Portal – Basic Services (ii) Documentation and Supplemental Terms for the Subscription to the TIA Portal Cloud and (iii) Universal Customer Agreement.</p>	6ES7804-0CP41-2YA0	<table border="1"> <thead> <tr> <th colspan="2" data-bbox="813 1085 1465 1117">Recommended PC hardware</th> </tr> </thead> <tbody> <tr> <td data-bbox="813 1117 1141 1170">Computer</td> <td data-bbox="1141 1117 1465 1170">SIMATIC IPC MD-57A (successor of the Field PG M6) or comparable PC</td> </tr> <tr> <td data-bbox="813 1170 1141 1244">Processor</td> <td data-bbox="1141 1170 1465 1244">Intel® Core™ i5 -12600HE processor (16 threads, 18 MB cache, up to 4.50 GHz)</td> </tr> <tr> <td data-bbox="813 1244 1141 1298">RAM</td> <td data-bbox="1141 1244 1465 1298">16 GB or more (min. 8 GB, 32 GB for large projects)</td> </tr> <tr> <td data-bbox="813 1298 1141 1351">Hard disk</td> <td data-bbox="1141 1298 1465 1351">SSD with at least 50 GB storage space available</td> </tr> <tr> <td data-bbox="813 1351 1141 1383">Network</td> <td data-bbox="1141 1351 1465 1383">1 Gbit (for multi-user)</td> </tr> <tr> <td data-bbox="813 1383 1141 1436">Screen</td> <td data-bbox="1141 1383 1465 1436">15.6" full HD display (1920 x 1080 or higher)</td> </tr> </tbody> </table> <p>Compatibility with other SIMATIC products</p> <p>STEP 7 V19 can be installed on a PC in parallel with other versions of STEP 7 V13 SP2 to V18 and STEP 7 V5.6. You can find more information on compatibility in the FAQ "Compatibility Tool for Automation and Drive Technology" under https://www.siemens.com/compatool.</p> <p>As of TIA Portal project version V13 SP1, projects can be directly upgraded to V19. Upgrading of projects from previous project versions (V11 ... V13) is carried out on the basis of the TIA Portal products (e.g. STEP 7) used in the project in version V13 SP1 or V13 SP2 (latest update recommended).</p> <p>Important note</p> <p>TIA Portal project versions V13 SP1.. V18 are upgraded with TIA Portal V19 to the project version V19. If you need to edit a TIA Portal project version V13 SP1.. V18, we recommend an additional installation of the corresponding software to TIA Portal V19. The license purchased for V19 is also valid for all older TIA Portal versions.</p> <p>Program code and hardware configuration from STEP 7 V5.4 SP5 can be migrated directly to a TIA Portal V19 project with STEP 7 V19.</p>	Recommended PC hardware		Computer	SIMATIC IPC MD-57A (successor of the Field PG M6) or comparable PC	Processor	Intel® Core™ i5 -12600HE processor (16 threads, 18 MB cache, up to 4.50 GHz)	RAM	16 GB or more (min. 8 GB, 32 GB for large projects)	Hard disk	SSD with at least 50 GB storage space available	Network	1 Gbit (for multi-user)	Screen	15.6" full HD display (1920 x 1080 or higher)
Recommended PC hardware																
Computer	SIMATIC IPC MD-57A (successor of the Field PG M6) or comparable PC															
Processor	Intel® Core™ i5 -12600HE processor (16 threads, 18 MB cache, up to 4.50 GHz)															
RAM	16 GB or more (min. 8 GB, 32 GB for large projects)															
Hard disk	SSD with at least 50 GB storage space available															
Network	1 Gbit (for multi-user)															
Screen	15.6" full HD display (1920 x 1080 or higher)															
<p>TIA Portal Cloud and SITRAIN access, annual subscription.</p> <p>Your benefit: In addition to use of TIA Portal Cloud, you receive free access to SITRAIN access - the digital learning platform. Your engineering environment and know-how are always up to date, thanks to cloud technology anywhere at any time.</p> <p>Consignee email address required for delivery.</p> <p>The specific terms under https://www.siemens.com/premiumdocs apply exclusively</p>	6ES7804-0CP41-1YA0															
<p>TIA Portal Cloud, 365-day subscription.</p> <p>You will receive a Certificate of Contract to unlock TIA Portal Cloud for 365 days, starting from the delivery date. This subscription ends automatically.</p> <p>Contents: Certificate of Contract (CoC)</p> <p>Consignee email address required for delivery.</p> <p>The specific terms under https://www.siemens.com/premiumdocs apply exclusively</p>	6ES7804-0CP41-1YA8															


Software for SIMATIC Controllers

TIA Portal

PLC programming

STEP 7 (TIA Portal) options > STEP 7 CFC (TIA Portal)

Overview

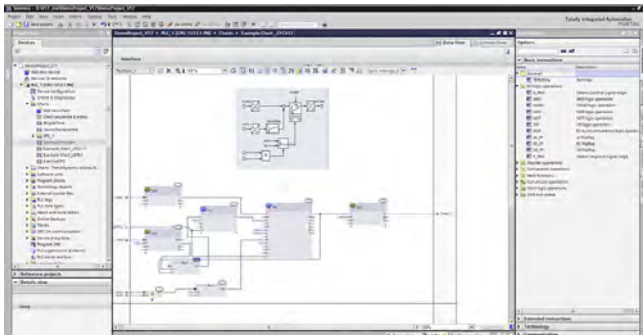

- Creation of automation programs by drawing a technology chart
- Minimized outlay and reduced error susceptibility due to the interconnection of ready-made blocks
- Optimal integration in the TIA Portal automation world
- Released for the standard, T, TF and R/H-CPU's of the SIMATIC S7-1500 automation system
- For more information on the supported hardware, see <https://support.industry.siemens.com/cs/ww/en/view/109821813>.

Licensing

- SIMATIC STEP 7 CFC requires an engineering license and a runtime license for each CPU.
- Engineering license: For configuration of CFC charts, a license key needs to be installed on the PC.
- Runtime licenses: A license key is required for each PLC. Depending on the number of instance data blocks created during configuration with CFC, a limited or unlimited license is required:
 - A limited license allows a limited number of instance DBs to be created and loaded into the PLC.
 - With an unlimited license, any number of instance DBs can be created and loaded.

Ordering data

SIMATIC STEP 7 CFC V19

Task:

Graphic configuring and programming of automation applications in the form of technology charts

Target system:

SIMATIC S7-1500

Requirement:

STEP 7 V19 or higher

Type of delivery:

Engineering software and electronic documentation on CD-ROM, license key on USB flash drive

Floating license

Article No.

6ES7658-1ET23-0YA5

Floating license for download.

6ES7658-1ET23-0YH5Email address required for delivery²⁾

Upgrade of Advanced Engineering License from V18.0 to V19.0

6ES7658-1ET23-0YE5

Upgrade of Advanced Engineering License from V18.0 to V19.0
For downloading.

6ES7658-1ET23-0YK5Email address required for delivery²⁾

Runtime license for 100 objects;
one runtime license is required
per PLC

6ES7658-1ET00-3YH5

Runtime license for an unlimited
number of objects;
one runtime license is required
per PLC

6ES7658-1ET00-4YH5

Software Update Service (requires
current software version)¹⁾

6ES7658-1ET00-0YV8

¹⁾ For more information on the Software Update Service, see page 12/2.

²⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Engineering tool	SIMATIC STEP 7 CFC
Current version	V19.0
Software class	A
Application areas	
Can be used for	Graphical creation, interconnection and parameterization of (preconfigured) blocks and functions
Marketing message	Simply interconnect and configure instead of programming!
Advantages	<ul style="list-style-type: none"> • Can be used to optimum effect even during the design phase • Reduced configuration effort thanks to graphical interconnection • High degree of reusability of charts that have already been created • Quick and easy familiarization • Quick and transparent interconnection of preconfigured functions • Technological creation of the program as a whole • Clear representation of control loop structures • Comment fields with texts and images • Short commissioning time
Sectors	<ul style="list-style-type: none"> • Automobile engineering • Chemicals industry • Power engineering and supply • Rubber and plastics processing machines • Metalworking machines • Food and beverage machines • Petrochemicals • Rolling mills • Water industry • Coilers

Target systems	
Can be used in	S7-1500
System prerequisites	
Operating system	Windows 10 (64-bit) <ul style="list-style-type: none"> • Windows 10 Enterprise 2016 LTSC • Windows 10 Enterprise 2019 LTSC Windows 11 (64-bit) <ul style="list-style-type: none"> • Windows 11 Enterprise 22H2 Windows Server (64-bit) <ul style="list-style-type: none"> • Windows Server 2016 Standard (full installation) • Windows Server 2019 Standard (full installation) • Windows Server 2022 Standard (full installation)
Required software	SIMATIC STEP 7 V19 or higher
Properties	
Monitoring tags	Yes
Controlling tags	Yes
Single-step processing	-
Integration in CFC	Yes
Program runtimes	
With S7-1500 (typical)	Depending on the interconnected blocks
Supported standards	
IEC 61131-3	Based on the IEC standard
Status of PLCopen activities	-
Available versions/licenses	
Floating license	<ul style="list-style-type: none"> • 1 CD • 1 license key memory stick


Software for SIMATIC Controllers

TIA Portal

PLC programming

STEP 7 (TIA Portal) options > STEP 7 Safety (TIA Portal)

Overview

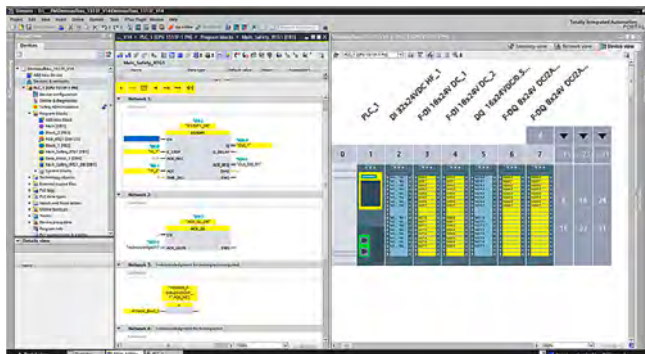

STEP 7 Safety Advanced, configuration and programming

- For creating safety-related programs on the STEP 7 user interface
- For seamless and easy to use integration of safety-related functions into the standard automation
- All the required configuration and programming tools are integrated into the STEP 7 user interface and utilize a common project structure
- STEP 7 Safety Basic option package for parameter assignment and programming of the fail-safe S7-1200 Basic Controller
- STEP 7 Safety Advanced option package for all fail-safe TIA SIMATIC controller classes (S7-1200, S7-1500, S7-1500 Software Controller, S7-300, S7-400, WinAC)

Licensing

- The engineering software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- STEP 7 Safety Basic is a subset of STEP 7 Safety Advanced for programming the fail-safe S7-1200 F Basic Controller.
- PowerPacks can be used to upgrade an existing STEP 7 Safety Basic license.
- Combo licenses allow you to choose between programming with the predecessor product S7 Distributed Safety and STEP 7 Safety Advanced.
- An upgrade to a combo license is offered for the latest version of S7 Distributed Safety.
- Software Update Service (SUS) contracts can be concluded for both STEP 7 Safety Basic and STEP 7 Safety Advanced.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

STEP 7 Safety Advanced V19

Task:

Engineering tool for configuring and programming fail-safe user programs for SIMATIC S7-1200 FC, S7-1500F, S7-1500F Software Controller, S7-300F, S7-400F, WinAC RTX F, ET 200SP F Controller and the fail-safe ET 200SP, ET 200MP, ET 200S, ET 200M, ET 200ISP, ET 200pro and ET 200eco I/O

Requirement:

STEP 7 Professional V19

Note:

As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.

Floating license for 1 user;
license key on USB flash drive

6ES7833-1FA23-0YA5

Floating license for 1 user,
license key for download²⁾;
Email address required for delivery

6ES7833-1FA23-0YH5

STEP 7 Safety Advanced V19 Combo

Delivery includes STEP 7 Safety Advanced V19 and S7 Distributed Safety V5.4 SP5 Update 2

Floating combo license for 1 user;
software and documentation on DVD;
license key on USB flash drive

6ES7833-1FC23-0YA5

Floating combo license for 1 user;
software, documentation and license key for download²⁾;
Email address required for delivery

6ES7833-1FC23-0YH5

Software Update Service

Software Update Service (Standard Edition)¹⁾

The delivery is implemented according to the number of ordered SUS products (e.g. 10 upgrade packages with 10 DVDs, 10 USB flash drives, etc.). Requires the current software version.

6ES7833-1FC00-0YX2

Software Update Service (Compact Edition)¹⁾

The delivery items are combined. For several contracts, only 1 package with 1 data storage medium set, 1 USB flash drive with the corresponding number of licenses and the corresponding number of CoLs will be supplied. The deliveries that are to be grouped together must be ordered as a single item. Requires the current software version.

6ES7833-1FC00-0YM2

Minimum order quantity: 3 units

¹⁾ For more information on the Software Update Service, see page 12/2.

²⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Article No.
<p><u>Software Update Service (Download)</u>¹⁾</p> <p>Requires the current software version.</p> <p>Email address required for delivery</p>	6ES7833-1FC00-0YY0	
<p>STEP 7 Safety Advanced Upgrade</p> <p><u>Note:</u></p> <p>As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p> <p>Upgrade from Distributed Safety V5.4 SP5 or STEP 7 Safety Advanced V11..V18 (Combo) to STEP 7 Safety Advanced V19 (Combo) for parallel use of the versions; upgrade of combo license for 1 user; license key on USB flash drive</p> <p>Upgrade from Distributed Safety V5.4 SP5 or STEP 7 Safety Advanced V11..V18 (Combo) to STEP 7 Safety Advanced V19 (Combo) for parallel use of the versions; upgrade of combo license for 1 user; license key for download²⁾; Email address required for delivery</p>	6ES7833-1FA23-0YF5	
<p>STEP 7 Safety Advanced PowerPack</p> <p>PowerPack STEP 7 Safety Basic V19 to STEP 7 Safety Advanced V19; floating license for 1 user; license key on USB flash drive</p> <p>PowerPack STEP 7 Safety Basic V19 to STEP 7 Safety Advanced V19; floating license for 1 user; license key for download²⁾; Email address required for delivery</p>	6ES7833-1FA23-0YC5	
<p>STEP 7 Safety Basic V19</p> <p><u>Task:</u> Engineering tool for configuring fail-safe user programs for SIMATIC S7-1200 FC</p> <p><u>Requirement:</u> STEP 7 Basic V19 or higher</p> <p><u>Note:</u></p> <p>As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p> <p>Floating license for 1 user; license key on USB flash drive</p> <p>Floating license for 1 user; license key for download²⁾; Email address required for delivery</p>	6ES7833-1FA23-0YJ5	
		<p>STEP 7 Safety Basic Upgrade</p> <p><u>Note:</u></p> <p>As of TIA Portal V16, the SIMATIC STEP 7 Safety software is an integral component of the SIMATIC STEP 7 product setup. The functionality of SIMATIC STEP 7 Safety is activated by means of the license key supplied in each case.</p> <p>Upgrade from STEP 7 Safety Basic V13 SP1...V18 to STEP 7 Safety Basic V19 for parallel use of the versions; upgrade license for 1 user; license key on USB flash drive;</p> <p>Upgrade from STEP 7 Safety Basic V13 SP1...V18 to STEP 7 Safety Basic V19 for parallel use of the versions; upgrade license for 1 user; license key for download²⁾; Email address required for delivery</p> <p><u>Software Update Service (Standard Edition)</u>¹⁾</p> <p>The delivery is implemented according to the number of ordered SUS products (e.g. 10 upgrade packages with 10 DVDs, 10 USB flash drives, etc.). Requires the current software version.</p> <p><u>Software Update Service (Compact Edition)</u>¹⁾</p> <p>The delivery items are combined. For several contracts, only 1 package with 1 data storage medium set, 1 USB flash drive with the corresponding number of licenses and the corresponding number of CoLs will be supplied. The deliveries that are to be grouped together must be ordered as a single item. Requires the current software version.</p> <p>Minimum order quantity: 3 units</p> <p><u>Software Update Service (Download)</u>¹⁾</p> <p>Requires the current software version.</p> <p>Email address required for delivery</p>
		6ES7833-1FB23-0YE5
		6ES7833-1FB23-0YK5
		6ES7833-1FD00-0YX2
		6ES7833-1FD00-0YM2
		6ES7833-1FD00-0YN2

¹⁾ For more information on the Software Update Service, see page 12/2.

²⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Software for SIMATIC Controllers

TIA Portal

PLC programming

STEP 7 (TIA Portal) options > S7-PLCSIM Advanced

Overview

With SIMATIC S7-PLCSIM Advanced, digital twins can be used for simulation of S7-1500 and ET 200SP controllers and for extensive function simulation.

The digital twins can also be tested and validated in conjunction with a plant/machine. An extensive API is available for interfacing plant/machine simulations.

Highlights of SIMATIC S7-PLCSIM Advanced V6.0

New CPU types

- Support of Software Controllers and Open Controllers from V30.0, including synchronous SIMATIC ODK
- Support of all new S7-1500 CPUs with firmware 3.1 (incl. SIPLUS)

Compatibility

S7-PLCSIM Advanced now supports TIA Portal projects of versions V14 to V19 and CPU firmware versions V1.8 – V3.1.

The user interface of S7-PLCSIM V19 is also intended for use with S7-PLCSIM Advanced V6.0.

Licensing

- The engineering software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
For each license, the use of two simultaneously started S7-PLCSIM Advanced instances is permitted.
- For users of the previous versions 1.0/2.x/3.0/4.x/5.0, an upgrade to version 6.0 is offered.
- In addition, it is possible to purchase the software as an annual subscription.
- It is possible to conclude Software Update Service (SUS) contracts.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

SIMATIC S7-PLCSIM Advanced V6.0

Option for simulation of S7-1500 and ET 200SP

Floating license, software and documentation on DVD; license key on USB flash drive

6ES7823-1FA05-0YA5

Floating license, software, documentation and license key for download ¹⁾

6ES7823-1FE05-0YA5

Email address required for delivery

Upgrade

Upgrade SIMATIC S7-PLCSIM Advanced V1.0 ... V5.0 to V6.0, floating license

6ES7823-1FA05-0YE5

Upgrade SIMATIC S7-PLCSIM Advanced V1.0 ... V5.0 to V6.0, floating license for download ¹⁾;

6ES7823-1FE05-0YE5

Email address required for delivery

Software Subscription Service

SIMATIC S7-PLCSIM Advanced Subscription Download, Single License, software, documentation and license key for download ¹⁾

6ES7823-1FE00-0YN5

Email address required for delivery

Software Update Service²⁾

For a period of 12 months and for a fixed price, the customer is automatically provided with all upgrades and Service Packs for each installed software package. The contract is automatically extended by a further year unless canceled at least 12 weeks prior to expiration. Requires the current software version.

6ES7823-1FA00-0YL5

Software Update Service: Upgrades and Service Packs are provided in the form of DVDs, USB flash drives etc.

6ES7823-1FE00-0YL5

Software Update Service (Download)¹⁾

Upgrades and Service Packs are available for downloading.

Email address required for delivery

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

²⁾ For more information on the Software Update Service, see page 12/2.

Technical specifications**Minimum requirements for use**

Hardware / software	Requirements
Processor	<ul style="list-style-type: none"> • One logical Intel Core™ i7 6th generation core for each started instance • At least one additional core for the operating system • At least one additional core for additional active applications
RAM	<ul style="list-style-type: none"> • 1 GB for each started instance • At least 4 GB for the Windows operating system • Additional RAM work memory according to the requirements of the remaining active applications
Free hard disk space	5 GB
Operating systems (64-bit version)	As TIA Portal
Screen resolution	min. 1024 x 768

Compatibility with other products

- S7-PLCSIM Advanced V6.0 and S7-PLCSIM V19 can be installed and operated on the same PC or the same virtual machine. Communication between the two applications cannot be simulated.
- Compatible with TIA Portal projects from versions V14 to V19
- Support of the CPU firmware versions V1.8 to V3.1

Software for SIMATIC Controllers

TIA Portal

PLC programming

STEP 7 (TIA Portal) options > ODK 1500S

Overview

- For developing dynamically loadable function libraries for the S7-1500 Software Controllers and S7-1500 Advanced Controllers CPU 1518 MFP and PLCSIM Advanced:
 - Implementation of function libraries for the SIMATIC S7-1500 Software Controllers that are executed under Windows with the high-level languages C/C++, C# and VB
 - Implementation of function libraries for the PLCSIM Advanced that are executed under Windows with the high-level languages C/C++
 - Implementation of function libraries that are executed in real-time in the context of the user program of the CPU with the high-level language C++
 - Implementation of applications for the C++ runtime of the CPU 1518 MFP
- "Eclipse" development environment for real-time function libraries in the CPU user program and applications for the C++ runtime in the scope of delivery.
- Development of library functions under Windows with MS Visual Studio (optional)
- Easy introduction to development by using basic projects via templates
- Automatic creation of function blocks for calling the library functions
- Simple integration of the function blocks into STEP 7 by importing.
- Simple use of the library functions in the PLC without specific high-level language know-how.

Licensing

- ODK 1500S is supplied with a floating license. The floating license allows installation of the software on any number of computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously.
- The integrated development environment Eclipse, required for developing real-time libraries, is included in the scope of supply of ODK 1500S as well as templates for Visual Studio.
- SIMATIC ODK 1500S is available as a standalone product or in a bundle with SIMATIC Target 1500S™ for Simulink®.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under this

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

SIMATIC ODK 1500S

SIMATIC ODK 1500S V2.5, floating license for 1 user

E-SW, software and documentation on DVD, license key on USB flash drive, Class A, 6 languages (de, en, fr, es, it, cn), runs on Windows 7, Windows 8.1 and Windows 10

6ES7806-2CD03-0YA0

SIMATIC ODK 1500S V2.5, floating license for 1 user

E-SW, software, documentation and license key download¹⁾, Class A, 6 languages (de, en, fr, es, it, cn), runs on Windows 7, Windows 8.1 and Windows 10
Consignee email address required for delivery

6ES7806-2CD03-0YG0

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

System requirements

The SIMATIC ODK 1500S can be used on PC platforms with the following requirements:

- Operating systems Windows 7/8.1/10
- Min. 3 GB hard disk memory
- Min. 4 GB work memory
- Mouse, keyboard, monitor

Overview

SIMATIC Target™ is an add-on for the Simulink® software from The MathWorks. This makes it possible to also use model-based design with MATLAB® and Simulink for SIMATIC S7-1500 Controllers and Industrial Edge from Siemens. For this purpose, executable code for all ODK-compatible S7-1500 Controllers (S7-1500 Software Controllers, ET 200SP Open Controllers, CPU 1518 ODK/MFP and PLCSIM Advanced as of V3.0) or the LiveTwin Edge app is generated directly from Simulink via SIMATIC Target.

New with V6.0

- Support for Simulink External Mode for the LiveTwin Edge app: This allows the model behavior to be observed directly on the runtime. This enables a comparison of model behavior between Simulink simulation and real-time execution on LiveTwin. In addition, External Mode allows module parameters to be adjusted directly in the runtime, thus directly influencing the runtime behavior of the model.
- "Download in RUN" also for Simulink models: The handling of the Load and Unload ODK blocks is directly included in the generated PLC blocks. This eliminates the need for a RUN/STOP transition to run the updated model in an S7-1500.
- The web visualization of the Simulink model is now based on the new PLC Web API: This means that additional DBs are no longer created in the user program for the website. In addition, no special system function calls are required. Web visualization is also possible for up to four different Simulink models simultaneously.
- Support of TIA Portal Multiuser: Code generation from a Simulink model can now be done directly in a Local Session of a TIA Portal Multiuser project.

Licensing

- The engineering software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- SIMATIC Target™ for Simulink® V6.0 is available as a standalone product or in a bundle with the SIMATIC S7-1500 Software Controller Open Development Kit.
- An upgrade to latest versions is available for previous versions

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data**Article No.****SIMATIC Target (TM) for Simulink(R) V6.0 floating license download****6ES7823-1BE05-0YA5**

Engineering software; software, documentation and license key for download¹⁾; Class A; 2 languages: de, en; runs under Win10; Win11; Software for integrating Simulink models into the S7 program of the S7-1500 SW controller / CPU1518 ODK/MFP and the Industrial Edge runtime via the LiveTwin Edge app
Consignee email address required for delivery

SIMATIC Target (TM) for Simulink(R) V6.0 Upgrade V2.0 .. V5.0 -> V6.0 floating license download**6ES7823-1BE05-0YE5**

Engineering software; software, documentation and license key for download¹⁾; Class A; 2 languages: de, en; runs under Win10; Win11; Software for integrating Simulink models into the S7 program of the S7-1500 SW controller / CPU1518 ODK/MFP and the Industrial Edge runtime via the LiveTwin Edge app
Consignee email address required for delivery

Target + ODK 1500S bundle**6ES7823-1BE15-0YA0**

Contains: SIMATIC ODK 1500S V2.5 and SIMATIC Target (TM) for Simulink (R) V6.0, floating license download, E-SW, software, documentation and license key for download¹⁾, Class A, 2 languages: de, en; runs under Win10; Win11; Software for integrating Simulink models into the S7 program of the S7-1500 SW controller / CPU1518 ODK/MFP and the Industrial Edge runtime via the LiveTwin Edge app
Consignee email address required for delivery

SIMATIC Model Based Design 2023 PoC 90-day bundle download**6ES7823-1BE25-0YA3**

Contains: SIMATIC Target (TM) for Simulink (R) V6.0 SP1 PoC DL, SIMATIC ODK 1500S V2.5 PoC 90-day download, SIMATIC S7-PLCSIM Advanced V6.0 PoC 90-day download, SIMATIC STEP 7 Professional V19 PoC 90-day download, floating license download, E-SW, software, documentation and license key for download¹⁾, Class A, 2 languages: de, en; The system requirements specification can be found at <https://www.siemens.com/compatool>.
Consignee email address required for delivery

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Software for SIMATIC Controllers

TIA Portal

PLC programming

STEP 7 (TIA Portal) options > SIMATIC Target for Simulink


Technical specifications

Requirements at the MATLAB end

MATLAB 2019b (64-bit) or more recent version	<ul style="list-style-type: none"> • MATLAB 9.13 • MATLAB Coder 5.5 • Simulink 10.6 • Simulink Coder 9.8 • Embedded Coder 7.9 (optional) • Stateflow 10.7 (optional)
--	--

Requirements at the SIMATIC end

SIMATIC ODK 1500S V2.0/V2.5	Must be installed together with SIMATIC Target, MATLAB and Simulink on the same PC
STEP 7 Professional as of V15.1	For configuration of the S7-1500 CPUs, not essentially on the same PC as the SIMATIC Target
Supported CPUs	<ul style="list-style-type: none"> • CPU 1507S(F) with firmware V2.0 or higher • CPU 1515SP PC (F) with firmware V2.0 or higher • CPU 1518 (F) ODK/MFP • S7-PLCSIM Advanced as of V3.0

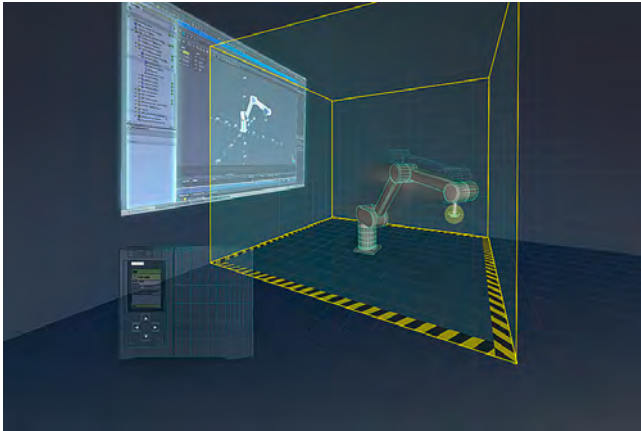Overview

SIMATIC Safe Kinematics V19 enables safe monitoring of the movement of predefined kinematics with up to 12 interpolating axes in multidimensional space. The following monitoring functions are available:

- **Safe Speed Monitor:**
Safe speed monitoring can be used to monitor the Cartesian speed of individual points in the kinematics, e.g. at the tool center point or at joints.
- **Safe Zone Monitor:**
Safe zone monitoring is used to monitor the position of the kinematics in the Cartesian space, e.g. to limit the traversing range of the kinematics or to monitor areas that can be entered by operating personnel.
- **Safe Orientation Monitor:**
Safe orientation monitoring enables monitoring of the orientation of the flange on user-defined serial kinematics, e.g. a workpiece may only be machined if the tool is perpendicular to the floor.

The following kinematics are supported:

- Cartesian portal
- Roller picker (vertical and horizontal)
- Delta pickers
- SCARA
- Articulated arm
- User-defined serial kinematics

SIMATIC Safe Kinematics V19 is an option package of the TIA Portal and is subsequently installed as setup in TIA Portal V19.

The product contains a fail-safe block library that can be integrated in the STEP 7 Safety Advanced programming environment and can be connected on the input and output side.

SIMATIC Safe Kinematics V19 supports the following control platforms:

- S7-1500 F-CPU
- Open Controller
- SIMATIC Drive Controller
- Software Controller
- SINUMERIK ONE

System requirements

- SIMATIC STEP 7 Professional (TIA Portal) V19
- STEP 7 Safety Advanced V19

SIMATIC Safe Kinematics requires as a subordinate drive system SINAMICS S120 with CU320-2 as of firmware V5.1 with Safety Integrated Advanced Functions.

Licensing

- The software is supplied with a Single Runtime License. A license is required for each F-CPU on which SIMATIC Safe Kinematics runs.
- The software can only be ordered via Online Software Delivery (OSD). The download contains one license certificate and the TIA Portal installation setup for SIMATIC Safe Kinematics.
- The following additional licenses are required to use SIMATIC Safe Kinematics:
 - SIMATIC STEP 7 Professional (TIA Portal) V19
 - STEP 7 Safety Advanced V19
 - SINAMICS Safety Integrated Advanced Functions (for each monitored axis of the kinematics)

Ordering data**Article No.****SIMATIC Safe Kinematics****SIMATIC Safe Kinematics V19 single Runtime license download¹⁾****6ES7823-0FE04-1AA0**

Includes license certificate and installation setup for the block library for safe monitoring of the movement of predefined kinematics with up to 12 interpolating axes. Runs on S7-1500 (T)F-CPU (1517, 1518) Open Controller, Drive Controller (1507D TF), Software Controller and SINUMERIK ONE with TIA Portal V19 and STEP 7 Safety Advanced V19. Consignee email address required for delivery.

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.


Software for SIMATIC Controllers

TIA Portal

PLC programming

STEP 7 (TIA Portal) options > SIMATIC Kinematics Operate

Overview

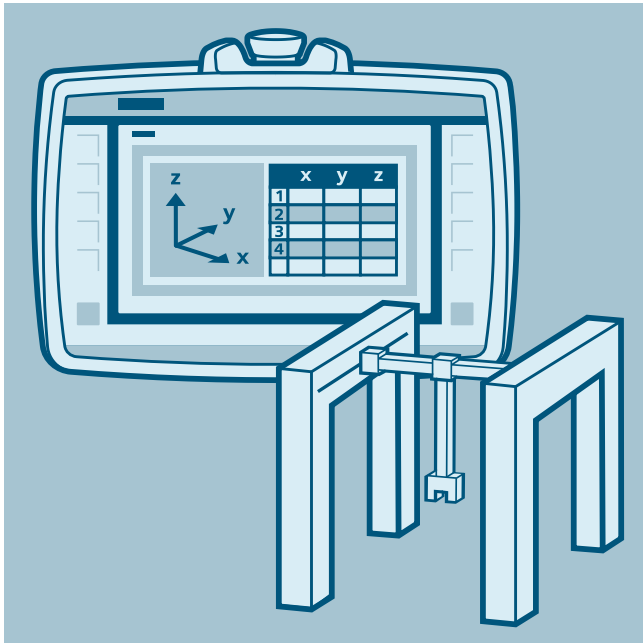

With SIMATIC Kinematics Operate, kinematics can be configured, programmed and operated with up to 6 positioning axes with synchronous point-to-point control (sPTP). The Plug & Play solution comprises a convenient user interface for programming, diagnostics and operation of the kinematics via HMI.

The SIMATIC Kinematics Operate V1.0 software solution consists of a TIA Portal project and an HMI project for TIA Portal as of V15.0.

SIMATIC Kinematics Operate V1.0 contains the following HMI configuration functions:

- Configuration of kinematics and additional axes; 6 axes are available in total for multi-axis positioning with sPTP. The axes not used in the multi-axis group can be created as independent single axes.
- Axis configuration; the dynamic parameters, the axis limits and the homing of the different axes can be configured.
- Tag and I/O configuration; Bool and Real tags can be created. Logical step enabling conditions consisting of multiple inputs and tags can be combined into one Boolean tag. Digital inputs and outputs can be configured via the I/O address.
- Points table; By means of input or teaching of axis positions, path points can be defined that can be used for programming the kinematics.
- Zone configuration; multiple restricted zones can be created in the workspace as protection zones. These are checked cyclically against both the target coordinates and the current axis values. A violation leads to a stop response of the axes

The program editor offers the following functions:

- Synchronous point-to-point commands; all axes are traversed synchronously with multi-axis positioning. The destination is specified either using the points table or by direct input with optional blending.
- Single axis commands; the additional axes can be homed, positioned, torque-limited or speed-controlled.
- Wait functions; Step enabling conditions, based on a digital input, a Bool tag or a wait time, can be programmed.
- Calculate tags and assign values; digital outputs can be set via an input mask. In addition, floating point tags can be calculated, incremented or assigned absolute values.
- Program control structures; labels, branches and parallel sequences allow flexible program design.

SIMATIC Kinematics Operate can be run on SIMATIC S7-1500 CPU S7-1511T-1 PN. Alternatively, SIMATIC S7-1500 CPU S7-1512C-1 PN or a faster CPU can be used. Please refer to the operating instructions for details on scalability and the configuration limits.

System requirements

- SIMATIC STEP 7 Professional (TIA Portal) as of V15
- SIMATIC WinCC Advanced ES as of V15

Licensing

- SIMATIC Kinematics Operate is available as Runtime option for TIA Portal. A license is required for each CPU on which SIMATIC Kinematics Operate runs.
- The product can only be ordered via Online Software Delivery (OSD). The download contains the license certificate. The software is downloaded via the Siemens Industry Online Support Portal.
- The following additional licenses are required to use SIMATIC Safe Kinematics:
 - SIMATIC STEP 7 Professional (TIA Portal) as of V15
 - SIMATIC WinCC Advanced ES as of V15

Ordering data

Article No.

SIMATIC Kinematics Operate V1.0 single machine license download ¹⁾

Includes license certificate, programming and control of multi-axis kinematics with sPTP for 2-6 positioning axes based on a SIMATIC S7-1500 PLC from SIMATIC S7-1511T upwards Including user operating concept
Consignee email address required for delivery

6ES7823-0GE00-1AA0

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Overview



The SIMATIC S7-1500 Technology CPUs support kinematics with up to 4 interpolating axes, e.g. for handling tasks such as pick & place, assembly and palletizing. With the Motion Control package "S7-1500T Motion Control KinPlus", this scope of functions is expanded so that kinematics with up to 6 interpolating axes can be controlled – e.g. for "oriented" handling of products by means of rotary and swivel axes.

The following additional kinematics are available with "S7-1500T Motion Control KinPlus":

- Predefined kinematics:
 - Cartesian portal 3D with 2 orientations
 - Delta-Picker 3D with 2 orientations
 - 6-axis articulated arm with central hand
- User-defined kinematics 3D with 3 orientations

Prerequisites:

- TIA Portal V18 with STEP 7 Professional
- SIMATIC CPU 1518T-4 PN/DP, CPU 1518TF-4 PN/DP or CPU 1507D TF; FW version V3.0 or higher
- Motion control package "S7-1500T Motion Control KinPlus" with up-to-date Motion Control firmware part
- Special SIMATIC Memory Card of the type "S7-1500T Motion Control KinPlus" (required for each CPU, available as 2 GB and as 32 GB variant)

The Motion Control package "S7-1500T Motion Control KinPlus" contains the complete Motion Control firmware part of a T-CPU and additionally the function extensions for up to 6 interpolating axes. This package must be copied to a SIMATIC Memory Card of the type "S7-1500T Motion Control KinPlus" and is loaded by the controller at runtime.

Ordering data

Article No.

S7-1500T Motion Control KinPlus	
S7-1500T Motion Control KinPlus Runtime software without documentation	6ES7823-0KE01-1AA0
Class A runs under T-CPU 1518 T//TF DriveController 1507D TF Download product ¹⁾	
Consignee email address required for delivery	
The SD card 6ES7 954-8LP80-0AA0 or 6ES7 954-8LT80-0AA0 is required for execution	
S7-1500T Motion Control KinPlus Runtime software without documentation	6ES7823-0KU01-1AA0
Class A runs under T-CPU 1518 T/TF and DriveController 1507D TF Supplied on USB flash drive	
The SD card 6ES7 954-8LP80-0AA0 or 6ES7 954-8LT80-0AA0 is required for execution	
SIMATIC S7, memory card for S7-1500T Motion Control KinPlus	6ES7954-8LP80-0AA0
3.3 V flash, 2 GB	
SIMATIC S7, memory card for S7-1500T Motion Control KinPlus	6ES7954-8LT80-0AA0
3.3 V flash, 32 GB	

¹⁾ Up-to-date information and download availability can be found at <https://www.siemens.com/tia-online-software-delivery>


Software for SIMATIC Controllers

TIA Portal

PLC programming

STEP 7 (TIA Portal) options > PID Professional (TIA Portal)

Overview

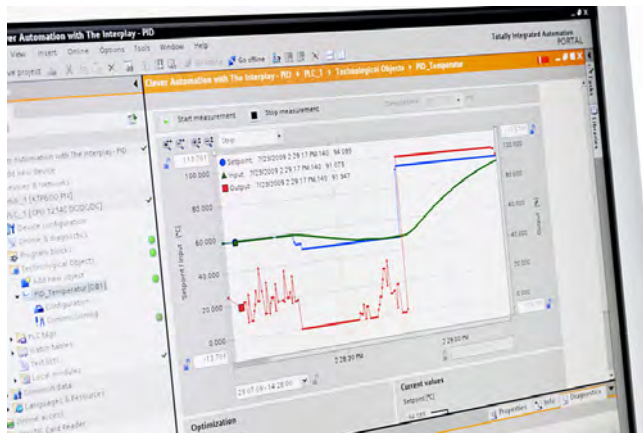

- PID Professional combines the two option packages Modular PID Control and Standard PID Control in TIA Portal.
- Permits the simple integration of continuous PID Controllers, pulse controllers and step controllers in the application program
- Can be used for simple to complex closed-loop control tasks in SIMATIC S7-300 (CPU 313 or higher), S7-400, and WinAC.
- The engineering software for PID Professional is already included in the STEP 7 package in STEP 7 V13 or higher.
- Tuning functionality by means of PID Self-Tuner (part of STEP 7 as of V11 SP1).
- Reduces engineering costs thanks to time-saving parameterization and optimization of the controller

Licensing

- The engineering software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- The engineering software requires STEP 7 Professional. The software is part of the STEP 7 Professional DVD and/or the program download. A license key is required for activation.
- During runtime, each CPU requires its own runtime license.
- Upgrades to PID Professional (engineering license or Runtime single license) are offered for Standard PID Control/Modular PID Control from V11 onwards.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

PID Professional for TIA Portal

SIMATIC S7 PID Professional for TIA Portal, floating license V11 or higher, Runtime single license

6ES7860-1XA02-0XA5

Without software and documentation
License key on USB flash drive, Class A,
requires STEP 7 Professional V1x,
reference hardware:
S7-300/400/WinAC

SIMATIC S7 PID Professional Runtime single license

6ES7860-1XA01-0XB0

Without software and documentation, Class A,
reference hardware: S7-300/400/WinAC

SIMATIC S7 PID Professional license key download¹⁾ floating license from V11

6ES7860-1XA01-0XH5

Without software and documentation, Class A,
requires STEP 7 Professional V1x,
reference hardware:
S7-300/400/WinAC

Consignee email address required for delivery

SIMATIC S7 PID Professional license key download¹⁾, upgrade license Standard PID Control/ Modular PID Control V5.1 or higher -> PID Professional V11 or higher

6ES7860-1XA01-0XK5

Without software and documentation, Class A,
requires STEP 7 Professional V1x,
reference hardware:
S7-300/400/WinAC

Consignee email address required for delivery

SIMATIC S7 PID Professional for TIA Portal, upgrade license Standard PID Control/ Modular PID Control V5.1 or higher -> PID Professional V11 or higher Runtime single license

6ES7860-1XA02-0XE5

Without software and documentation
License key on USB flash drive, Class A,
requires STEP 7 Professional V1x,
reference hardware:
S7-300/400/WinAC

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Overview

- Low-priced package for simple, controlled positioning and simple geared synchronous motion
- For use with any standard variable-speed drive, such as frequency converter or servo drive
- For incremental and absolute encoders

Licensing

- The engineering software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- The engineering software requires STEP 7 Professional. The software is part of the STEP 7 Professional DVD and/or the program download. A license key is required for activation.
- During runtime, each CPU requires its own runtime license.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data**Article No.****Easy Motion Control for TIA Portal**

Requirement:
STEP 7 from V12 SP1;
software included in STEP 7 V13

Floating license and single license (Runtime)

Type of delivery:
CoL for the configuration software,
USB flash drive with a license key for the configuration software,
CoL for a runtime license;
without software or documentation

6ES7864-2XA02-0XA5

Floating license download by email, valid for V11 or higher (email address required for delivery¹⁾);
without software or documentation

6ES7864-2XA01-0XH5**Easy Motion Control Runtime License**

Type of delivery:
CoL for one runtime single license (valid for Easy Motion Control V2.x and V11 or higher),
without software or documentation

6ES7864-0AF01-0YX0

¹⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications**Supported hardware:**

Easy Motion Control is runnable on the following CPUs:

- S7-300.
- S7-400.
- WinAC.
- ET 200S.
- ET 200pro.

Supported modules for the measuring of actual values:

- CPU 314C (FW version 2.0 of the CPU or higher).
- ET 200S 1 Count 5V/500 kHz.
- ET 200S 1 Count 24V/100kHz.
- ET 200S 1SSI.
- SM 338.
- FM 350-1, FM 450-1.
- SIMODRIVE Sensor with PROFIBUS DP.
- IM 174.
- Other modules for measuring actual values (using free driver).

Supported modules for setpoint output:

- ET 200S 2AO U.
- SM 332.
- SM 432.
- IM 174.
- Other modules for setpoint output (using free driver).

Supported drives using PROFIBUS DP:

- Micromaster 4.
- SINAMICS G120.
- SINAMICS S120.

Storage space requirements

Required work memory in bytes		
Block	Required work memory per block	Additional work memory required per instance
MC_Init	1086	-
MC_MoveAbsolute	3924	112
MC_MoveRelative	2982	110
MC_MoveJog	3110	110
MC_Home	2886	104
MC_StopMotion	1114	70
MC_Control	1756	58
MC_Simulation	410	64
MC_GearIn	3476	128
Input driver	1416 ... 2654	76 ... 128
Output driver	384 ... 1242	52 ... 68
Axis data block	-	294

Software for SIMATIC Controllers

TIA Portal

PLC programming

STEP 7 (TIA Portal) options > SIMATIC TPCamGen technology package

Overview

The SIMATIC Software option package, TPCamGen, is used to calculate optimized motion profiles for servo presses where the tool is connected to the drive axle via a connecting rod.

When calculating the profiles, TPCamGen takes into account various constraints, e.g.:

- Maximum eccentric speed
- Maximum ram speed
- Maximum acceleration
- etc.

It minimizes the drive load at the same time.

TPCamGen is the core of the SIMATIC SimaPressServo software package and can only be used suitably in conjunction with this application software.

The SIMATIC Open Controller platform (from TPCamGen V1.1) or a Windows 10 Industrial PC (IPC) with a SIMATIC S7-15xx technology CPU (from TPCamGen V1.2) serves as runtime environment.

System requirements:

- SIMATIC STEP 7 (TIA Portal) as of V17.
- ET 200 SP Open Controller: Technology CPU 1515SP PC2 T or 1515SP PC2 TF from V21.9 or any SIMATIC S7-15xx technology CPU from V2.9/V21.9 in connection with Windows 10 Industrial PC.

Licensing

- The software can only be obtained as download via Online Software Delivery (OSD). The download includes a license certificate and a ZIP file containing the Windows Installation Setup, TPCamGen function blocks for TIA Portal and the Function Manual (DE/EN).
- The software purchase includes the license for a specific servo press configuration.
- The software is additionally delivered with a Floating Runtime License. It allows the installation of the software on any number of Open Controller CPUs.
- To use the TPCamGen, a signature is additionally required, which is provided in coordination with Siemens. This signature corresponds to a technical license key and is queried each time the software package is generated in the context of the specific press solution. The signature must be stored once in the implemented solution.
You will find more information in the Siemens Industry Online Support at <https://support.industry.siemens.com/cs/ww/en/view/109804905>.
- Note:
You may use one software license and the associated signature for any number of presses with identical design. For a press with changed design data you need a new license, which has to be ordered separately.

Ordering data

TPCamGen technology package

Trend tool for servo presses, single license for one press configuration

Requirement:

SIMATIC STEP 7 (TIA Portal) as of V17

Runs on:

as of TPCamGen V1.1:

ET 200 SP Open Controller CPU 1515SP PC2 T or TF as of firmware V21.9;

as of TPCamGen V1.2:

S7-15xx T-CPU from firmware V2.9/V21.9 in connection with Windows 10 Industrial PC

Floating License Download¹⁾; contains license certificate, Windows Installation Setup, TPCamGen function blocks for TIA Portal and Function Manual (de/en); consignee email address required for delivery

Article No.

6ES7823-0FE30-1AA0

¹⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Overview

The vendor- and platform-independent OPC Unified Architecture (UA) is the communication standard for Industry 4.0 and is the standard mechanism for accessing SIMATIC S7-1500 and S7-1200 data from non-Siemens devices.

New with V17 and S7-1200 (firmware V4.5)

- OPC UA Server on S7-1200 CPUs with following functionality:
 - Methods for consistent data transfer
 - Structured data types and arrays
 - Additional diagnostic buffer entries for OPC UA Server and OPC UA diagnostics in the TIA Portal

New with V17 and S7-1500 (firmware V2.9)

- PC UA Server:
 - Alarms & Conditions on Standard SIMATIC Interface
- Global Discovery Service (GDS) support for certificate management
- Supports further PLC data types for mapping to OPC UA:
 - Localized Text and Byte strings
- Automatic creation of OPC UA instances in the server interface for data types of an OPC UA reference namespace to an FB or UDT
- Improvement of modeling for server interface or companion specifications
- OPC UA Client:
 - New blocks for easy handling

Licensing

An OPC UA Server or OPC UA Client is available on the target systems (CPUs) and is activated using runtime licenses. Runtime licenses are offered in three levels for different target systems:

Target system	OPC UA S7-1200 Basic	OPC UA S7-1500 Small	OPC UA S7-1500 Medium	OPC UA S7-1500 Large
S7-1200 CPUs	Yes	No	No	No
ET 200SP CPU 1510SP/1512SP/1515SP (Open Controller) S7-1500 CPU 1511/1513 CPU 1504D Drive Controller	No	Yes	Yes	Yes
ET 200pro CPU 1516pro S7-1500 CPU 1515/1516 PLC 1507S software	No	No	Yes	Yes
S7-1500 CPU 1517/1518/1508S CPU 1507D Drive Controller	No	No	No	Yes

The runtime license includes the certificate for OPC UA (Server and Client) and can be run on the respective target systems including F, C and T/TF as from firmware V2.0 (Client V2.6).

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data**Article No.****SIMATIC OPC UA S7-1200 Basic**

Single runtime license;
can run on all S7-1200 CPUs
(incl. F) from firmware V4.4

License certificate for
OPC UA server (data access)

6ES7823-0BA00-2BA0

Download incl. license certificate
for OPC UA server (data access) ¹⁾

6ES7823-0BE00-2BA0

Email address required for delivery

SIMATIC OPC UA S7-1500 Small

Single runtime license;
can run on ET 200SP CPU
1510SP/1512SP/1515SP
(Open Controller),
S7-1500 CPU 1511/1513,
CPU 1504D Drive Controller

License certificate for
OPC UA Server (Data Access and
OPC UA Client)

6ES7823-0BA00-1BA0

Download incl. license certificate
for OPC UA server (data access
and OPC UA client) ¹⁾

6ES7823-0BE00-1BA0

Email address required for delivery

SIMATIC OPC UA S7-1500 Medium

Single runtime license;
can run on ET 200pro
CPU 1516pro, ET 200SP
CPU 1510SP/1512SP/1515SP
(Open Controller), S7-1500
CPU 1511/1513/1515/1516,
PLC 1507S software,
CPU 1504D Drive Controller

License certificate for
OPC UA Server (Data Access and
OPC UA Client)

6ES7823-0BA00-1CA0

Download incl. license certificate
for OPC UA server (data access
and OPC UA client) ¹⁾

6ES7823-0BE00-1CA0

Email address required for delivery

SIMATIC OPC UA S7-1500 Large

Single runtime license;
can run on ET 200pro
CPU 1516pro, ET 200SP
CPU 1510SP/1512SP/1515SP
(Open Controller), S7-1500 CPU
1511/1513/1515/1516/1517/1518,
PLC 1507S software, 1508S,
CPU 1504D, CPU 1507D Drive
Controller

License certificate for
OPC UA Server (Data Access and
OPC UA Client)

6ES7823-0BA00-1DA0

Download incl. license certificate
for OPC UA server (data access
and OPC UA client) ¹⁾

6ES7823-0BE00-1DA0

Email address required for delivery

¹⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications**Can be used for**

SIMATIC OPC UA S7-1200	For all S7-1200 CPUs from firmware V4.4
SIMATIC OPC UA S7-1500	For all S7-1500 CPUs and ET 200SP CPUs with firmware V2.0 or higher (incl. S/F/T versions) and PLCSIM Advanced

Software for SIMATIC Controllers

TIA Portal

TIA Portal options

TIA Portal Multiuser Engineering

Overview

TIA Portal Multiuser Engineering allows several users to work on the same project simultaneously. This results in a significant reduction in configuration times, and projects can be commissioned faster.

The basic principle:

The project administration is handled by an autonomous server application. This can be installed independent of a TIA Portal.

New with V19

- Newly supported object types in a local session:
 - TIA Portal Test Suite rules
 - WinCC Unified images, HMI messages and HMI variables
- New "Exclusive Multiuser mode"
 - The new Exclusive Multiuser mode allows quick changes to objects that cannot be edited in a local session, e.g. changes in device configuration.
 - The Exclusive Multiuser mode is started from the local session without closing the local session. All changes in the local session are retained and are available in the exclusive session.
 - The prerequisite for a quick switch to the exclusive session is that the local session is based on the current project status.
 - Significantly reduced execution time for transferring the changes from an exclusive session to the TIA Project server.

Licensing

- The software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- The software is part of the STEP 7/WinCC (TIA Portal) DVD and/or of the program download; a license key is required for activation.
- An upgrade to version V19 is available for users of the previous V14...V18 versions.
- It is possible to conclude Software Update Service (SUS) contracts.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager at

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

TIA Portal Multiuser Engineering

V19

Software is a component of STEP 7 / WinCC as of V18. Only the Certificates of License (CoL) are delivered with the license.

Data storage medium package, floating license, license key on USB flash drive

6ES7823-1AA23-0YA5

Download incl. license key, floating license; license key for download ¹⁾
Email address required for delivery

6ES7823-1AE23-0YA5

Upgrade

Software is a component of STEP 7 / WinCC as of V18. Only the Certificates of License (CoL) are delivered with the license.

Upgrade TIA Portal Multiuser Engineering V14...V17 to V18, floating license; license key on USB flash drive

6ES7823-1AA23-0YE5

Upgrade TIA Portal Multiuser Engineering V14...V17 to V18, floating license; license key for download ¹⁾
Email address required for delivery

6ES7823-1AE23-0YE5

V18

Software is a component of STEP 7 / WinCC as of V17. Only the Certificates of License (CoL) are delivered with the license.

Data storage medium package, floating license, license key on USB flash drive

6ES7823-1AA08-0YA5

Download incl. license key, floating license; license key for download ¹⁾

6ES7823-1AE08-0YA5

Email address required for delivery

Upgrade

Software is a component of STEP 7 / WinCC as of V17. Only the Certificates of License (CoL) are delivered with the license.

Upgrade TIA Portal Multiuser Engineering V14...V16 to V17, floating license; license key on USB flash drive

6ES7823-1AA08-0YE5

Upgrade TIA Portal Multiuser Engineering V14...V16 to V17, floating license; license key for download ¹⁾

6ES7823-1AE08-0YE5

Email address required for delivery

Software Update Service ²⁾

Data storage medium package

6ES7823-1AA00-0YL5

Download ¹⁾

6ES7823-1AE00-0YL5

Email address required for delivery

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

²⁾ For more information on the Software Update Service, see page 12/2.

Overview

TIA Project Server Cloud allows multiple users to work simultaneously on a TIA Portal project over the Internet.

The TIA Project Server serves as a central storage location for TIA Portal projects.

Different users work simultaneously in local sessions, based on the projects that you manage with TIA Project Server Cloud.

Project management and administration is located on the TIA Project Server Cloud in the Industry Premium Portal.

Licensing

The license concept of the TIA Project Server Cloud is based on a new subscription license model. This model offers flexibility and allows for a quick start.

- The monthly subscription with 100 GB storage capacity offers unlimited use for the duration of one month. As long as you do not cancel the subscription, it will be extended for another month.
- The annual subscription with 250 GB storage capacity offers unlimited use for the duration of one year. As long as you do not cancel the subscription, it will be extended for another year.
- The annual Certificate of Contract subscription with 250 GB of storage capacity provides unlimited use for one year. The subscription ends after one year.
- To work on TIA Portal projects together, you need a TIA Portal Multiuser Engineering license.
- The TIA Portal Multiuser Engineering license is included with access via TIA Portal Cloud.

System requirements

- For TIA Project Server Cloud, you need at least TIA Portal V1
- The TIA Project Server Cloud is located in Germany.

Ordering data

Article No.

TIA Project Server Cloud, annual subscription

6ES7804-0PP01-1YA0

Only available through Industry Mall. Consignee email address required for delivery.

For this service, the following T&Cs apply exclusively
<https://www.siemens.com/premiumdocs>

- (i) Documentation and Supplemental Terms for the Subscription to free accessible services of Industry Premium Portal – Basic Services
- (ii) Documentation and Supplemental Terms for the Subscription to the TIA Portal Server Cloud and
- (iii) Universal Customer Agreement.

TIA Project Server Cloud, monthly subscription

6ES7804-0PP01-2YA0

Only available through Industry Mall. Consignee email address required for delivery.

For this service, the following T&Cs apply exclusively
<https://www.siemens.com/premiumdocs>

- (i) Documentation and Supplemental Terms for the Subscription to free accessible services of Industry Premium Portal – Basic Services
- (ii) Documentation and Supplemental Terms for the Subscription to the TIA Portal Server Cloud and
- (iii) Universal Customer Agreement.

TIA Project Server Cloud, 365-day certificate

6ES7804-0PP01-1YA8

You receive a Certificate of Contract to unlock TIA Project Server Cloud for 365 days with 250 GB of project storage.

Starting with the delivery date.

This certificate automatically expires after 365 days.

Content:

Certificate of Contract (CoC).

Consignee email address required for delivery.

Only the terms and conditions under

<https://www.siemens.com/premiumdocs> apply.

More information

TIA Portal highlights

Are available under

<https://www.siemens.com/global/en/products/automation/industry-software/automation-software/licenses.html>

Information on TIA Multiuser Engineering

Is available under

<https://www.siemens.com/global/en/products/automation/industry-software/automation-software/licenses.html>

Order data for the Industry Premium Portal

Is available under

<https://mall.industry.siemens.com/mall/ww/en/Catalog/Products/10360994?tree=CatalogTree>

Software download

Up-to-date information and download availability can be found under

<https://www.siemens.com/global/en/products/automation/industry-software/automation-software/licenses.html>

Software for SIMATIC Controllers

TIA Portal

TIA Portal options

TIA Portal Test Suite

Overview

Software to support quality assurance of automation programs in the TIA Portal

Contains tools for checking the programming style and for creating test routines for software modules:

- **Styleguide Checker:**
To ensure a unified programming style, rule sets with programming guidelines in the TIA Portal project can be defined as well as their compliance regularly checked.
- **Application test:**
To check the correct processing of individual logic blocks or entire S7-1500 applications, test routines with function tests can be created in a TIA Portal project and subsequently executed and validated with help of SIMATIC S7-PLCSIM Advanced V6.0.
- **System test:**
The system test allows the user to define and execute test cases for a PLC program using OPC UA server interfaces. The system test permits the following tests to be performed:
 - Software-in-the-loop tests with S7-1200 and S7-1500
 - Software-in-the-loop tests with PLCSIM Advanced

New with V19

General:

- The Test Suite can now also be used in the context of multiuser engineering. Changes to the style guide, application test or system test objects are marked in the project navigation in the local multi-user session. At the next check-in, they are transferred to the project server

Application test:

- In addition to PLCSIM Advanced V6.0, the S7-1500 Software Controller family and the Open Controller family as of FW V30.0 are now also supported.
- Significantly shortened test execution due to the new user mode "ExternallyManagedPLCSIMInstance". In this mode, the instance of PLCSIM Advanced is not set up by the Test Suite, but the user sets up the instance once. The application test connects to the prepared instance and performs the selected tests. This means that there is no need to set up and prepare a separate instance of PLCSIM for each individual test case.
- Assert statements can optionally be extended with comments and accompanying values.

System test:

- In addition to the standard SIMATIC and user-defined OPC UA interface, which you set up in the TIA Portal, the system test now also supports companion specifications generated with SiOME.
- The duration of the test execution has been significantly reduced, especially due to the extensive OPC UA server interface.
- System test cases can now also be saved as a copy template in a library.

Licensing

- The software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- The application tests created with the Test Suite can only be executed in conjunction with SIMATIC S7-PLCSIM Advanced V6.0 or higher. An additional SIMATIC S7-PLCSIM Advanced V6.0 license is only required in "ExternallyManagedPLCSIMInstance" mode.
- There is also the option of completing a Software Update Service.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

TIA Portal Test Suite Advanced V19

Software to support quality assurance of automation programs in the TIA Portal; Software can exclusively be used together with STEP 7 Prof. / WinCC as of V19. To execute application tests, the SIMATIC S7-PLCSIM Advanced V6.0 software must also be installed.

Floating license, software, documentation and license key for download ¹⁾

Email address required for delivery

6ES7823-1TE23-0AA5

TIA Portal Test Suite V19 + PLCSIM Advanced V6.0 bundle

Floating license, software, documentation and license key for download ¹⁾

Email address required for delivery

6ES7823-1TE23-0CA5

Upgrade

Upgrade TIA Portal Test Suite Advanced V16...V18 to V19, floating license, software, documentation and license key for download ¹⁾

Email address required for delivery

6ES7823-1TE23-0AE5

Software Update Service ²⁾

Download incl. license key ¹⁾

Email address required for delivery

6ES7823-1TE00-0AL5

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

²⁾ For more information on the Software Update Service, see page 12/2.

Overview

The TIA Portal Cloud Connector enables access to local PG/PC interfaces and connected SIMATIC hardware from the TIA Portal Engineering while the engineering is taking place via a remote desktop on a server of a private cloud.

Licensing

- The "<https://support.industry.siemens.com/cs/ww/en/view/109739390>" apply for software for use with separately licensed TIA Portal products that have been released for use with the Cloud Connector.
- The software is part of the STEP 7/WinCC (TIA Portal) DVD and/or the program download.

Ordering data**TIA Portal Cloud Connector**

Single license; software is component of STEP 7 / WinCC V14 and higher. Only the Certificates of License (CoL) are delivered with the license.

- Data storage medium package
- Download including license key ¹⁾
Email address required for delivery

¹⁾ For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

Article No.**6ES7823-1CA00-0YA0****6ES7823-1CE00-0YA0**

Software for SIMATIC Controllers

TIA Portal

TIA Portal options

TIA Portal Teamcenter Gateway

Overview

The Teamcenter Gateway permits storage and management of TIA Portal projects and global libraries in Teamcenter. Program handling is integrated into the TIA Portal.

Licensing

- Please note the compatibility of the installed program versions for the operation of the Teamcenter Gateway.
- The software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- An upgrade to version V17 is available for users of the previous V14...V16 versions.
- It is possible to conclude Software Update Service (SUS) contracts.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under <http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

TIA Portal Teamcenter Gateway

Data storage medium package, floating license, license key on USB flash drive

6ES7823-1EA07-0YA5

Download incl. license certificate and license key for TIA Portal Teamcenter Gateway V17, floating license¹⁾

6ES7823-1EE07-0YA5

Email address required for delivery

Upgrade

Upgrade TIA Portal Teamcenter Gateway V14...V16 to V17, floating license

6ES7823-1EA07-0YE5

Upgrade TIA Portal Teamcenter Gateway V14...V16 to V17, floating license; license key for download¹⁾;

6ES7823-1EE07-0YE5

Email address required for delivery

Software Update Service²⁾

For a period of 12 months and for a fixed price, the customer is automatically provided with all upgrades and Service Packs for each installed software package. The contract is automatically extended by a further year unless canceled at least 12 weeks prior to expiration. Requires the current software version

Data storage medium package

6ES7823-1EA00-0YL5

Download¹⁾

6ES7823-1EE00-0YL5

Email address required for delivery

¹⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

²⁾ For more information on the Software Update Service, see page 12/2.

Technical specifications

Can be used with:

- TIA Portal V17 with V14 or higher
- Teamcenter V11, V12 and V13

Overview

The TIA Portal CAx Publication Tools are used to export metadata from TIA Portal that is required for the exchange of Openness attributes using AutomationML. This allows Openness attributes to be exchanged with other tools, e.g. EPLAN P8, via an AutomationML file.

Licensing

- Please note the compatibility of the installed program versions for the operation of the CAx Publication Tool.
- The software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<https://www.siemens.com/simatic-licenses>.

Ordering data**Article No.****TIA Portal CAx Publication Tools****6ES7823-1JE01-0EA5**

Download incl. license certificate and license key for TIA Portal CAx Publication Tools V18, floating license ¹⁾

Email address required for delivery

¹⁾ Up-to-date information and download availability can be found under <https://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Can be used with:

- TIA Portal V18

Software for SIMATIC Controllers

TIA Portal

TIA Portal options

SIMATIC Visualization Architect

Overview

SIMATIC Visualization Architect (SiVArc)

Challenge:

- To standardize the user interfaces of the visualizations throughout the plant
- Significant reduction of the engineering costs for generating the visualizations
- To make the in-house work standard usable

Solution:

- Automatic generation and creation of the visualizations, based on the program code of the PLC and corresponding visualization objects within the framework of system-wide library concepts.

Licensing

- The software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- An upgrade to the subsequent version is offered for users of previous versions.
- A rental license is available for temporary use
- A trial license is available for testing purposes.
- It is possible to conclude Software Update Service (SUS) contracts.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

SIMATIC Visualization Architect V19

As package

- SIMATIC Visualization Architect V19
- SIMATIC Visualization Architect V19 Rental
- SIMATIC Visualization Architect V19 Trial
Download from Customer Support Portal

6AV2107-0PX02-3AA5

6AV2107-0PX02-3AA6

6AV2107-0PX02-3AA7

As download¹⁾

- SIMATIC Visualization Architect V19
- SIMATIC Visualization Architect V19 Rental

6AV2107-0PX02-3AH5

6AV2107-0PX02-3AH6

Upgrade SIMATIC Visualization Architect

Engineering software in the TIA Portal;
software and documentation on CD,
License key on USB flash drive
Class A;
6 languages: en, de, fr, es, it, zh

V18 -> V19

- As package
- As download¹⁾
Email address required for delivery

6AV2107-3PX02-3AA5

6AV2107-3PX02-3AH5

V18 -> V19

- As package
- As download¹⁾
Email address required for delivery

6AV2107-3PX08-0AA5

6AV2107-3PX08-0AH5

Software Update Service (SUS)

SIMATIC Visualization Architect

Within the framework of the SUS contract, you are provided with all software updates for the SiVArc product at no cost over a period of one year from the date of invoice. The contract is automatically extended by a further year unless canceled three months before expiration. The prerequisite for agreeing to an SUS is the presence of the current version.

- As package
- As download¹⁾
Email address required for delivery

6AV2107-0PX00-0AL0

6AV2107-0PX00-0AY0

¹⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

SIMATIC Visualization Architect

Operating system requirements	In accordance with the requirements of the TIA Portal components: <ul style="list-style-type: none"> • SIMATIC STEP 7 (TIA Portal) • SIMATIC WinCC Unified, Professional, Advanced, Comfort, Basic
Supported STEP 7 version	SIMATIC STEP 7 V19
Supported WinCC versions	SIMATIC WinCC V19 Unified, Professional, Advanced, Comfort, Basic

Overview

The TIA Portal option ProDiag makes it possible to monitor a machine or plant and to intervene in the event of a fault. The monitoring messages which can be generated for the various faults provide specific information on the monitoring mode, location and cause of the fault. Information on troubleshooting can be provided in addition. Plant operators can then not only recognize faults, they can also identify any potential danger in advance and take appropriate countermeasures.

Licensing

- The runtime license for controllers includes 250 supervisions or an unlimited number of supervisions per CPU. From FW 2.0 onwards, the software can run on S7-1500/ET 200SP CPUs regardless of the TIA Portal version.
- For the visualization of the messages, the controls are licensed according to the HMI runtime platforms.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data**Article No.**

Ordering data	Article No.
SIMATIC ProDiag for HMI	
For WinCC Unified PC Runtime	
Controls for SIMATIC WinCC Unified as of V18	
• Package with data storage medium	6AV2157-0BD02-3AB0
• Download incl. license key ¹⁾ Email address required for delivery	6AV2157-0BD02-3LB0
For WinCC Runtime Advanced	
Controls for SIMATIC WinCC as of V14.	
• Package with data storage medium	6AV2107-0UA00-0BB0
• Download incl. license key ¹⁾ Email address required for delivery	6AV2107-0UA00-0BH0
For WinCC Runtime Professional	
Controls for SIMATIC WinCC as of V14	
• Package with data storage medium	6AV2107-0UB00-0BB0
• Download incl. license key ¹⁾ Email address required for delivery	6AV2107-0UB00-0BH0
For SIMATIC Comfort / Mobile Panels	
Controls for SIMATIC WinCC as of V14.	
• Package with data storage medium	6AV2107-0UP00-0BB0
• Download incl. license key ¹⁾ Email address required for delivery	6AV2107-0UP00-0BH0
SIMATIC ProDiag S7-1500	
For 250 monitoring functions	
For SIMATIC S7-1500 CPUs and ET 200SP CPUs with FW 2.0 and higher. Independent of the TIA Portal version.	
• Package with data storage medium	6ES7823-0AA00-1AA0
• Download incl. license key ¹⁾ Email address required for delivery	6ES7823-0AE00-1AA0
For all configured monitoring functions on a CPU	
For SIMATIC S7-1500 CPUs and ET 200SP CPUs with FW 2.0 and higher. Independent of the TIA Portal version.	
• Package with data storage medium	6ES7823-0AA00-1DA0
• Download incl. license key ¹⁾ Email address required for delivery	6ES7823-0AE00-1DA0

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

Can be used for	
SIMATIC ProDiag for HMI	For all Comfort and Mobile Panels, WinCC Runtime Advanced and WinCC Runtime Professional as of TIA Portal V14 For WinCC Unified PC Runtime as of TIA Portal V18
SIMATIC ProDiag for S7-1500	For all S7-1500 CPUs and ET 200SP CPUs with FW V2.0 and higher

Software for SIMATIC Controllers

TIA Portal

TIA Portal options

SIMATIC Modular Application Creator

Overview

The SIMATIC Modular Application Creator enables the automated generation of TIA Portal projects based on pre-defined software modules. Especially with complex machine configurations, such as a multi-belt control, a printing machine or other applications with many axes, this is very efficient compared to manually creating and parameterizing the associated automation project directly in the TIA Portal.

The software modules provide a technological view of the application and can be used in the TIA Portal without programming knowledge.

They are stored in a separate repository, independent of the tool, which needs to be connected to the tool.

Licensing

- The SIMATIC Modular Application Creator and the existing modules are available as a free download via the Siemens Industry Online Support.
- For modules that are charged for, an Engineering license is required that entitles the holder to generate TIA Portal projects for 365 days.

Ordering data

Article No.

SIMATIC Modular Application Creator

For automated generation of TIA Portal projects with use of pre-configured software modules

Can be downloaded from <https://support.industry.siemens.com/cs/ww/en/view/109762852>.

SIMATIC Modular Application Creator Equipment modules

Pre-configured software modules for use with the SIMATIC Modular Application Creator

Can be downloaded from <https://support.industry.siemens.com/cs/ww/en/view/109762849>.

SIMATIC Modular Application Creator licenses

The license authorizes generation of TIA Portal projects with the corresponding equipment module for 365 days.

- Multi-Carrier-System / TS 2 Booster
- Converting Toolbox
- Print Standard

6ES7823-1ME01-0BN8

6ES7823-1ME02-0BN8

6ES7823-1ME03-0BN8

¹⁾ Up-to-date information and download availability can be found at <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

The SIMATIC Modular Application Creator can be used for:

- TIA Portal and StartDrive as of V16.0, with activated Openness interface and
- All SIMATIC S7-1500 CPUs as of FW version 4.8.

Overview

The User Management Component (UMC) provides the possibility of central user management. Through the connection to the TIA Portal, users and user groups can be defined and managed across projects. Connection to a Microsoft Active Directory is also possible.

Licensing

- Central user management (UMC) is supplied with the TIA Portal.
- The license model depends on the number of user accounts per UMC domain.
- Up to ten user accounts can be used without a license.
- For additional user accounts, 365-day rental licenses are available to accumulate the required number of centrally managed users.

Ordering data**Article No.****Central user management (UMC)**

Software component to implement central user management, included in the scope of supply of the respective products (e.g. TIA Portal).

The license model depends on the number of user accounts per UMC domain. Use of max. 10 user accounts possible without a license.

6 languages: en, de, fr, es, it, zh; executable under Windows 7 (64-bit), Windows 10 (64-bit), Windows Server 2012R2 (64-bit), Windows Server 2016/2019 (64-bit)

- Rental license 365 days with license certificate for 100 user accounts
- Rental license 365 days with license certificate for 4 000 user accounts

6ES7823-1UE30-0YA0**6ES7823-1UE10-0YA0**


Software for SIMATIC Controllers

STEP 7 V5.x

Basic software and editors

STEP 7

Overview

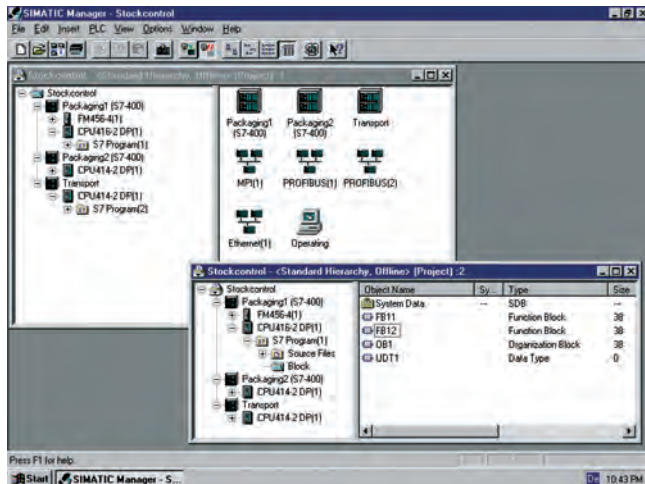

- Basic software STEP 7:
The standard tool for the SIMATIC S7, SIMATIC C7 and SIMATIC WinAC automation systems.
- For fully utilizing the performance capability of the systems.
- With user-friendly functions for all phases of an automation project:
 - Configuration and parameter assignment of the hardware
 - Specifying the communication
 - Programming
 - Testing, commissioning and service
 - Documentation, archiving
 - Operating, diagnostic functions

Note

The STEP 7 (TIA Portal) engineering software is required to program the new generation of S7-1200, S7-1500 and ET 200SP CPU PLCs as well as the S7-1500 Software Controller; of course it can also be used for programming the S7-300, S7-400 and SIMATIC WinAC.

Siemens offers a combo license for both platforms which enables you to work using both STEP 7 (TIA Portal) as well as traditional engineering software. See "STEP 7 Professional" for more information.

Licensing

- STEP 7 V5.7 can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- A 50 h rental license is available for limited use.
- An upgrade to version V5.7 is offered for users of the previous V5.3...5.6 versions.
- A 5.6 license is also valid for the version V5.7.
- A trial license is available for testing purposes.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

STEP 7 Version 5.7

Target system:
SIMATIC S7-300/400, SIMATIC C7
Requirement:
Windows 10 Professional/
Enterprise, Windows Server 2016,
Windows Server 2019
Type of delivery:
German, English, French, Spanish,
Italian;
incl. license key on USB flash drive,
with electronic documentation

Floating license on DVD

6ES7810-4CC12-0YA5

Floating license, download¹⁾;
Software, license key and
documentation as download;
Consignee email address required
for delivery

6ES7810-4CE12-0YB5

Rental license for 50 hours;

6ES7810-4CC12-0YA6

Software and documentation on
DVD, license key on USB flash drive

6ES7810-4CC12-0YA6

Rental license for 50 hours,
download¹⁾;
Software, license key and
documentation as download;
Consignee email address required
for delivery

6ES7810-4CE12-0YB6

Upgrade floating license
V5.3...5.6 to V5.7; on DVD

6ES7810-4CC12-0YE5

Upgrade floating license
V5.3...V5.6 to V5.7, download¹⁾;
Software, license key and
documentation as download;
Consignee email address required
for delivery

6ES7810-4CE12-0YE5

STEP 7 Version 5.7 Japanese

Target system:
SIMATIC S7-300/400, SIMATIC C7,
SIMATIC WinAC
Requirement:
Windows 10 Professional/
Enterprise, Windows Server 2016,
Windows Server 2019
Type of delivery:
English, Japanese;
incl. license key on USB flash drive,
with electronic documentation

Floating license Japanese on DVD

6ES7810-4CC12-0JA5

Upgrade floating license Japanese
V5.3...V5.6 to V5.7; on DVD

6ES7810-4CC12-0JE5

STEP 7 Version 5.7 Chinese

Target system:
SIMATIC S7-300/400, SIMATIC C7
Requirement:
Windows 10 Professional/
Enterprise, Windows Server 2016,
Windows Server 2019
Type of delivery:
English, Chinese;
incl. license key on USB flash drive,
with electronic documentation

Floating license Chinese on DVD

6ES7810-4CC12-0KA5

Upgrade floating license Chinese
V5.3...V5.6 to V5.7; on DVD

6ES7810-4CC12-0KE5

¹⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Ordering data	Article No.
SIMATIC Manual Collection Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT	6ES7998-8XC01-8YE0	Components for connecting a PC to MPI and PROFIBUS For PCs with a free PCI slot: CP 5612	6GK1561-2AA00
SIMATIC Manual Collection update service for 1 year Current Manual Collection DVD and the three subsequent updates	6ES7998-8XC01-8YE2	For PCs without a free PCI slot: USB A2 PC adapter	6GK1571-0BA00-0AA0
MPI cable For linking SIMATIC S7 and PG through MPI (5 m)	6ES7901-0BF00-0AA0	Components for connecting the PC to Industrial Ethernet For PCs with a free PCI slot: Layer 2 Ethernet cards	

Technical specifications

Article number	6GK1571-0BA00-0AA0
product type designation	PC adapter USB A2
transfer rate	
transfer rate	
<ul style="list-style-type: none"> at the 1st interface according to PROFIBUS 	9.6 kbit/s ... 12 Mbit/s
interfaces	
number of electrical connections	
<ul style="list-style-type: none"> at the 1st interface according to PROFIBUS 	1
number of interfaces according to USB	1
type of electrical connection	
<ul style="list-style-type: none"> at the 1st interface according to PROFIBUS 	9-pin Sub-D socket (RS 485)
<ul style="list-style-type: none"> of the USB interface 	Standard-B socket
standard for interfaces USB 2.0	Yes
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
type of voltage supply optional external power supply	No
supply voltage	
<ul style="list-style-type: none"> from USB 	5 V
<ul style="list-style-type: none"> note 	Supply direct from USB
relative symmetrical tolerance at DC	
<ul style="list-style-type: none"> at 5 V 	5 %
consumed current	
<ul style="list-style-type: none"> from USB 	0.2 A
power loss [W]	1 W
ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> during operation 	0 ... 60 °C
<ul style="list-style-type: none"> during storage 	-40 ... +70 °C
<ul style="list-style-type: none"> during transport 	-40 ... +70 °C
relative humidity at 30 °C during operation maximum	95 %
protection class IP	IP20

Article number	6GK1571-0BA00-0AA0
product type designation	PC adapter USB A2
design, dimensions and weights	
module format	USB V2.0 adapter
width	58 mm
height	26 mm
depth	105 mm
net weight	365 g
fastening method 35 mm top hat DIN rail mounting	No
product features, product functions, product components general	
number of plug-in cards of same design plug-in per PC station	1
number of units note	-
product functions diagnostics	
product function	
<ul style="list-style-type: none"> port diagnostics 	Yes
standards, specifications, approvals	
standard	
<ul style="list-style-type: none"> for EMC 	2004/108/EC
<ul style="list-style-type: none"> for safety from CSA and UL 	cULus, UL 60950-1, CSA22.2
<ul style="list-style-type: none"> for emitted interference 	EN 61000-6-3, EN 61000-6-4
<ul style="list-style-type: none"> for interference immunity 	EN 61000-6-1, EN 61000-6-2
certificate of suitability	
<ul style="list-style-type: none"> CE marking 	Yes
<ul style="list-style-type: none"> C-Tick 	Yes

Software for SIMATIC Controllers

STEP 7 V5.x

Basic software and editors

STEP 7 Professional

Overview



STEP 7 Professional supports all IEC languages.

In addition to the languages familiar from STEP 7:

- LAD
- FBD
- STL

the following are also available:

- "Sequential function chart"
- "Structured text"

An offline simulation of user programs created with these languages is included. STEP 7 Professional thus replaces the combination of the individual packages STEP 7, S7-GRAPH, S7-SCL and S7-PLCSIM.

A PowerPack (conversion package) is available for customers who use STEP 7 already and wish to change. A valid STEP 7 license is required for purchasing the POWERPACK. A separate Software Update Service can be purchased for STEP 7 Professional.

Note

The STEP 7 (TIA Portal) engineering software is required to program the new generation of S7-1200, S7-1500 and ET 200SP CPU PLCs as well as the S7-1500 Software Controller; it can also be used for programming the S7-300, S7-400 and SIMATIC WinAC.

Siemens offers a combo license for both platforms which enables you to work using both STEP 7 (TIA Portal) as well as traditional engineering software. See "Licensing" for more information.

Licensing

- New installations of STEP 7 Professional 2021 are only available as combo licenses together with STEP 7 Professional V17 (TIA Portal). The software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license). A 50 h rental license is available for limited use.
- An upgrade to V17/2021 Combo is available for users of the previous STEP 7 Professional 2006...2010 versions.
- The license of the version V16/2017 Combo can also be used for STEP 7 V5.7.
- PowerPack and upgrade enable migration from STEP 7 V5.7 to STEP 7 Professional V17/2021 Combo.
- A trial license is available for testing purposes.
- It is possible to conclude Software Update Service (SUS) contracts.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

Article No.

STEP 7 Professional V17/2021

Target system:
SIMATIC S7-300/-400,
SIMATIC S7-1200/-1500,
SIMATIC C7, SIMATIC WinAC

Requirement:
Windows Server 2016/2019,
Windows 10 Professional,
Windows 10 Enterprise

Type of delivery:
English, German, French, Spanish,
Italian;
license key on USB flash drive,
with electronic documentation

Floating combo license on DVD

6ES7810-5CC14-0YA5

Floating license, license key download²⁾

6ES7810-5CE14-0YB5

Software and documentation
as download;
Consignee email address
required for delivery

Rental license for 50 hours, license key download²⁾

6ES7823-1GE07-0YA5

Software and documentation
as download;
Consignee email address
required for delivery

Conversion package STEP 7 Professional V17

Only valid if ordered together
with a Software Update Service
6ES7810-5CC04-0YE2
(STEP 7 Professional and
STEP 7 Professional in the
TIA Portal).

- PowerPack & upgrade from STEP 7 V5.7 to STEP 7 Professional V17/2021 Combo, floating license. STEP 7 Software Update Service is a prerequisite.
- PowerPack & upgrade from STEP 7 V5.7 to STEP 7 Professional V17/2021 Combo, floating license. STEP 7 Software Update Service is a prerequisite. Software download including license key²⁾ Consignee email address required for delivery

6ES7822-1AA07-0XC2

6ES7822-1AE07-0XC2

²⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Ordering data	Article No.	Article No.
Upgrade from STEP 7 Professional V11...16 to STEP 7 Professional V17 or STEP 7 Professional V11...V16/2017 Combo to V17/2021 Combo or STEP 7 Professional 2006...2010 to V17/2021 Combo, floating license	6ES7822-1AA07-0YE5	Software Update Service (Compact Edition)¹⁾ The delivery items are combined. For several contracts, only 1 package with 1 data storage medium set, 1 USB flash drive with the corresponding number of licenses and the corresponding number of CoLs will be supplied. Delivery items to be combined must be ordered as one item. • STEP 7 Professional and STEP 7 Professional in the TIA Portal
Upgrade from STEP 7 Professional V11...16 to STEP 7 Professional V17 or STEP 7 Professional V11...V16/2017 Combo to V17/2021 Combo or STEP 7 Professional 2006...2010 to V17/2021 Combo, floating license Software download including license key²⁾ Consignee email address required for delivery	6ES7822-1AE07-0YE5	
PowerPack & upgrade from STEP 7 V5.3...V5.7 to STEP 7 Professional V17/2021 Combo, floating license	6ES7822-1AA07-0XC5	Software Update Service (download)¹⁾²⁾ Upgrades and Service Packs are available for downloading. Consignee email address required for delivery • STEP 7 Professional and STEP 7 Professional in the TIA Portal
Software Update Service For a period of 12 months and for a fixed price, the customer is automatically provided with all upgrades and Service Packs for each installed software package. The contract is automatically extended by a further year unless canceled at least 12 weeks prior to expiration. Requires the current software version		MPI cable For linking SIMATIC S7 and PG through MPI (5 m)
Software Update Service (Standard Edition)¹⁾ The delivery is implemented according to the number of ordered SUS products (e.g. 10 upgrade packages with 10 DVDs, 10 USB flash drives, etc.) • STEP 7 Professional and STEP 7 Professional in the TIA Portal	6ES7810-5CC04-0YE2	Components for connecting a PC to MPI and PROFIBUS For PCs with a free PCI slot: CP 5612 6GK1561-2AA00 For PCs without a free PCI slot: USB A2 PC adapter 6GK1571-0BA00-0AA0 For connecting a programming device/PC or notebook to PROFIBUS or MPI; USB cable included in scope of supply
		Components for connecting the PC to Industrial Ethernet • For PCs with a free PCI slot: Layer 2 Ethernet cards

¹⁾ For more information on the Software Update Service, see page 12/2.

²⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Software for SIMATIC Controllers

STEP 7 V5.x

Basic software and editors

STEP 7 Professional

Technical specifications

Article number	6GK1571-0BA00-0AA0
product type designation	PC adapter USB A2
transfer rate	
transfer rate	
• at the 1st interface according to PROFIBUS	9.6 kbit/s ... 12 Mbit/s
interfaces	
number of electrical connections	
• at the 1st interface according to PROFIBUS	1
number of interfaces according to USB	1
type of electrical connection	
• at the 1st interface according to PROFIBUS	9-pin Sub-D socket (RS 485)
• of the USB interface	Standard-B socket
standard for interfaces USB 2.0	Yes
supply voltage, current consumption, power loss	
type of voltage of the supply voltage	DC
type of voltage supply optional external power supply	No
supply voltage	
• from USB	5 V
• note	Supply direct from USB
relative symmetrical tolerance at DC	
• at 5 V	5 %
consumed current	
• from USB	0.2 A
power loss [W]	1 W
ambient conditions	
ambient temperature	
• during operation	0 ... 60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity at 30 °C during operation maximum	95 %
protection class IP	IP20

Article number	6GK1571-0BA00-0AA0
product type designation	PC adapter USB A2
design, dimensions and weights	
module format	USB V2.0 adapter
width	58 mm
height	26 mm
depth	105 mm
net weight	365 g
fastening method 35 mm top hat DIN rail mounting	No
product features, product functions, product components general	
number of plug-in cards of same design plug-in per PC station	1
number of units note	-
product functions diagnostics	
product function	
• port diagnostics	Yes
standards, specifications, approvals	
standard	
• for EMC	2004/108/EC
• for safety from CSA and UL	cULus, UL 60950-1, CSA22.2
• for emitted interference	EN 61000-6-3, EN 61000-6-4
• for interference immunity	EN 61000-6-1, EN 61000-6-2
certificate of suitability	
• CE marking	Yes
• C-Tick	Yes

Overview

- PASCAL-type high-level language
- Optimized for programming PLCs
- With PLCopen Base Level certificate
- For use in SIMATIC S7-300 (recommended for CPU 314 and CPU 312C), S7-400, C7 and WinAC

**Licensing**

- S7-SCL is an integral part of the STEP 7 Professional software package or is available as a stand-alone software product.
- S7-SCL V5.7 is delivered with a floating license. The floating license allows installation of the software on any number of computers. This means one user per license can use the software independently of the computer used and without being tied to a specific workstation. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- An upgrade to version 5.7 is available for users of the previous versions as of V5.3.
- A separate update service can be purchased for S7 SCL.
- A trial license valid for 21 days is available for download via the Industry Online Support under <https://support.industry.siemens.com/cs/ww/en/view/109795037>.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data**Article No.****SIMATIC S7-SCL, Version 5.7**

Task:
High-level language programming
Target system:
SIMATIC S7-300 (CPU 314 or higher),
SIMATIC S7-400,
SIMATIC C7
Requirement:
STEP 7 as of V5.7;
Windows 10 Professional/Enterprise,
Windows Server 2016,
Windows Server 2019
Type of delivery:
On CD; English, German, French,
Spanish, Italian;
license key on USB flash drive,
with electronic documentation

Floating license **6ES7811-1CC08-0YA5**

Software Update Service (requires current software version)¹⁾ **6ES7811-1CA01-0YX2**

Upgrade floating from V5.3 to V5.7 **6ES7811-1CC08-0YE5**

SIMATIC Manual Collection **6ES7998-8XC01-8YE0**

Electronic manuals on DVD, multilingual:
All manuals for
S7-1200/1500/200/300/400,
LOGO!, SIMATIC DP, PC, PG,
STEP 7, Engineering SW,
Runtime SW, SIMATIC HMI,
SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year **6ES7998-8XC01-8YE2**

Current Manual Collection DVD and the three subsequent updates

¹⁾ For more information on the Software Update Service, see page 12/2.

Software for SIMATIC Controllers

STEP 7 V5.x

Basic software and editors


S7-SCL

Technical specifications

Engineering tool	S7-SCL
Current version	V5.3
Software class	7
Application areas	
Can be used for	Text-based high-level language programming of simple and complex calculations, CASE, loop, jump, and comparison functions
Marketing message	Programming of algorithms and calculations made easy!
Advantages	<ul style="list-style-type: none"> • Clear and easy-to-read programs • Functional, module-based programming • CASE statement replaces a large number of jump and comparison functions • Easily understood by PLC programmers, as the programming philosophy of LAD/FBD/STL is retained • Easy switchover to PLC programming for PC programmers • Exchangeability (porting) of subroutines in accordance with IEC 61131-3 • Less time required for engineering compared to LAD/FBD/STL: Up to 20% for simple programs; at least 50% for demanding program structures
Sectors	<ul style="list-style-type: none"> • Labeling machines • Chemical plants (e.g. oxygen extraction, evaluation of measured values) • Rubber and plastics processing machines • Woodworking machines • Storage and logistics systems • Paper and printing machinery • Punching and cutting machines • Water industry • Coilers
Target systems	
Can be used in	S7-300 (CPU 313 or higher and CPU 312C or higher recommended) S7-400 C7 (C7-626 or higher recommended) WinAC
System requirements	
Operating system	Windows 10 Windows Server 2016/2019
Required hard drive memory in the PG/PC	50 MB

Engineering tool	S7-SCL
Properties	
Monitoring tags	Yes
Controlling tags	Yes
Single-step processing	Yes
Integration in CFC	Yes
Program runtimes	
with S7-300 (typical)	Similar to LAD/FBD/STL
with S7-400 (typical)	Similar to LAD/FBD/STL
Diagnostics	
Integration of diagnostic data in ProAgent	-
Integration of diagnostic data in ProTool/Pro	-
Integration of diagnostic data in WinCC	-
Supported standards	
IEC 61131-3	PLCopen certification <ul style="list-style-type: none"> • Base level ST available • Reusability Level ST available
Available versions/licenses	
Floating license	CD-ROM with <ul style="list-style-type: none"> • Tool • Electronic manual • Getting Started guide • Examples License on USB flash drive Certificate of License Product information
Upgrade (floating license)	CD-ROM with <ul style="list-style-type: none"> • Tool • Electronic manual • Getting Started guide • Examples License on USB flash drive Certificate of License Product information
Software Update Service (SUS)	
Also a component of	
STEP 7 Professional	Yes
S7 Trainer Package	Yes
PCS 7	Yes
D7-SYS	-

Overview

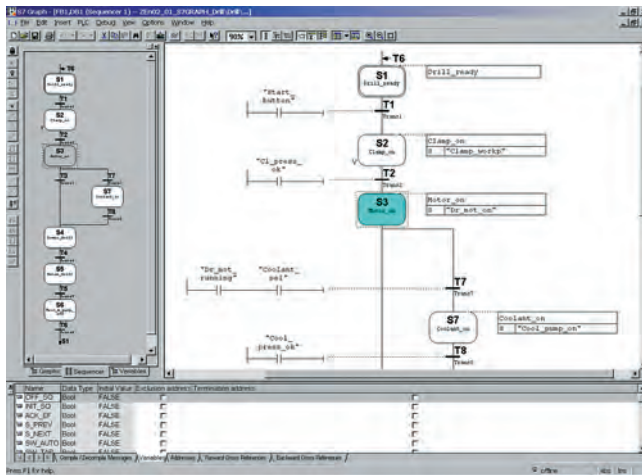

- For configuring and programming sequential processes using sequencers
- Standardized representation to EN 1131-3
- Clearly comprehensible program thanks to structuring of the process into separate steps
- With extensive diagnostic functions, integrated in the SIMATIC diagnostics concept
- With PLCopen Base Level certificate
- For use in SIMATIC S7-300 (recommended for CPU 315 and CPU 312C or higher), S7-400, C7 and WinAC



Licensing

- S7 GRAPH is an integral part of the STEP 7 Professional software package or is available as a stand-alone software product.
- S7-Graph V5.7 is supplied with a floating license. The floating license allows installation of the software on any number of computers. This means one user per license can use the software independently of the computer used and without being tied to a specific workstation. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- An upgrade to version 5.7 is available for users of previous versions as of V5.3.
- A separate update service can be purchased for S7-GRAPH.
- A trial license valid for 21 days is available for download via the Industry Online Support under <https://support.industry.siemens.com/cs/ww/en/view/109795038>.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

SIMATIC S7-GRAPH, Version 5.7

Task:
Configuring and programming of sequences
Target system:
SIMATIC S7-300, SIMATIC S7-400, SIMATIC C7
Requirement:
STEP 7 V5.7;
Windows 10 Professional/Enterprise, Windows Server 2016, Windows Server 2019
Type of delivery:
on CD; German, English, French, Spanish, Italian;
including license key on USB flash drive, with electronic documentation

Floating license

6ES7811-0CC08-0YA5

Software Update Service (requires current software version)¹⁾

6ES7811-0CA01-0YX2

Upgrade floating license from V5.3 to V5.7

6ES7811-0CC08-0YE5

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multilingual:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

¹⁾ For more information on the Software Update Service, see page 12/2.

Software for SIMATIC Controllers

STEP 7 V5.x

Basic software and editors


S7-GRAPH

Technical specifications

Engineering tool	S7-GRAPH
Current version	V5.7
Software class	A
Application areas	
Can be used for	Graphical programming of sequential controls and sequencers
Marketing message	Fast, elegant way to program sequential processes easily and transparently!
Advantages	<ul style="list-style-type: none"> • Can be used to optimum effect even during the design phase • Less configuration effort thanks to graphical structuring and programming • Quick and easy familiarization • Precise fault localization thanks to integrated diagnostics in combination with ProAgent for ProTool/Pro and WinCC • Less time required for engineering compared to LAD/FBD/STL: approx. 40 to 70%
Sectors	<ul style="list-style-type: none"> • Automotive industry (e.g. body-in-white, final assembly) • Electrical equipment manufacture • Rubber and plastics processing machines • Pick-and-place machines • Woodworking machines • Metalworking machines • Paper and printing machinery • Testing machines • Rolling mills • Coilers • Leisure and entertainment facilities
Target systems	
Can be used in	S7-300 (CPU 314 or higher and CPU 312C or higher recommended) S7-400 C7 (C7-626 or higher recommended) WinAC
System requirements	
Operating system	Windows 10 Windows Server 2016/2019
Required hard drive memory in the PG/PC	50 MB
Required software	STEP 7 V5.7

Engineering tool	S7-GRAPH
Properties	
Monitoring tags	Yes
Controlling tags	Yes
Single-step processing	Yes
Integration in CFC	-
Program runtimes	
with S7-300 (typical)	3 ms per block + 1 ms per active step
with S7-400 (typical)	0.4 ms per block + 0.06 ms per active step
Diagnostics	
Integration of diagnostic data in ProAgent	Yes
Integration of diagnostic data in ProTool/Pro	Via ProAgent
Integration of diagnostic data in WinCC	Via ProAgent
Supported standards	
IEC 61131-3	PLCopen certification • Base Level SFC available
Status of PLCopen activities	-
Available versions/licenses	
Floating license	CD-ROM with <ul style="list-style-type: none"> • Tool • Electronic manual • Getting Started guide • Examples License key on USB flash drive Certificate of License Product information
Upgrade (floating license)	CD-ROM with <ul style="list-style-type: none"> • Tool • Electronic manual • Getting Started guide • Examples License key on USB flash drive Certificate of License Product information
Software Update Service (SUS)	
Also a component of	
STEP 7 Professional	Yes
S7 Trainer Package	Yes
PCS 7	-
D7-SYS	-

Overview

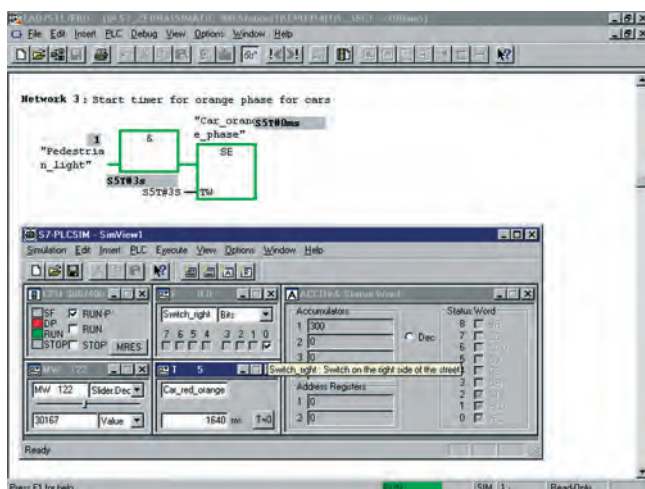

- For functional testing of the generated SIMATIC S7 user blocks on a programming device or PC, independent of the availability of the target hardware
- Shifts the detection and correction of programming errors to an early stage of development
- Enables an accelerated and cost-effective initial commissioning and enhances the program quality
- Can be used for LAD, FBD, STL, S7-GRAPH, S7-HiGraph, S7-SCL, CFC, S7-PDIAG, WinCC (local installation)

Licensing

- S7-PLCSIM is an integral part of the STEP 7 Professional software package or is available as a stand-alone software product
- S7-PLCSIM V5.4 is delivered with a floating license. The floating license allows installation of the software on any number of computers. This means one user per license can use the software independently of the computer used and without being tied to a specific workstation. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- An upgrade to version 5.4 is offered for users of the previous versions.
- A separate update service can be purchased for S7-PLCSIM.
- A trial license valid for 14 days is available for download via the Industry Online Support under <https://support.industry.siemens.com/cs/ww/en/view/109750064>.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

S7-PLCSIM, Version 5.4

Task:
Functional testing of SIMATIC S7 user blocks on programming device/PC

Target system:
SIMATIC S7-300, SIMATIC S7-400, SIMATIC C7

Requirement:
STEP 7 V5.4 or higher incl. SP4/SP5 or STEP 7 > V5.5

Type of delivery:
on CD; English, German, French, Spanish, Italian;
license key on USB flash drive, with electronic documentation

Floating license

6ES7841-0CC05-0YA5

Software Update Service (requires current software version)¹⁾

6ES7841-0CA01-0YX2

Floating license upgrade to V5.4

6ES7841-0CC05-0YE5

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multilingual:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

¹⁾ For more information on the Software Update Service, see page 12/2.

Technical specifications

Engineering tool	S7-PLCSIM
Type of license	Floating license
Software class	A
Current version	V5.4
Target system (recommended)	SIMATIC S7-300 SIMATIC S7-400 SIMATIC C7
Operating system	Windows XP Professional Windows 7 Professional Windows 7 Ultimate
Required software packages	STEP 7 V5.4 with SP4 or SP5 or STEP 7 > V5.5
Disk space required in programming device/PC	5 MB


Software for SIMATIC Controllers

STEP 7 V5.x

Options for programming and design

CFC

Overview

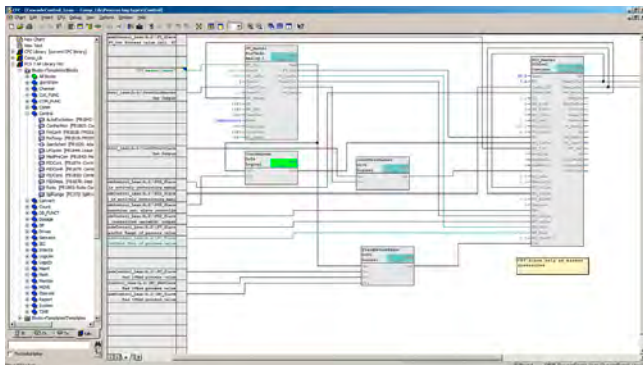

- For the generation of automation programs by drawing a technology chart
- With extensive libraries of ready-made software blocks to which user-created blocks can be added
- Minimized outlay and reduced error susceptibility due to the interconnection of ready-made blocks
- Optimized integration in the world of automation, for example, through guaranteed compatibility with all STEP 7 tools
- Can be used for SIMATIC S7-300 (recommended for CPU 316 or CPU 314C or higher), SIMATIC S7-400, SIMATIC WinAC and D7-SYS

Licensing

- SIMATIC CFC V9.0 is supplied with a floating license. The floating license allows installation of the software on any number of computers. This means one user per license can use the software independently of the computer used and without being tied to a specific workstation. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- An upgrade to version 9.0 is available for users of the previous 8.x versions.
- For SIMATIC CFC, the Software Update Service is available with the Standard, Compact and Download types of delivery.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

SIMATIC CFC, Version 9.0

Task:
Graphic configuring and programming of automation applications in the form of technology charts
Target system:
SIMATIC S7-300/400,
SIMATIC WinAC, D7-SYS
Requirements:
STEP 7 V5.6 or higher
Type of delivery:
Engineering software and electronic documentation on CD-ROM, license key on USB flash drive, Certificate of License

Floating license	6ES7658-1EX58-0YA5
Floating license for download. Email address required for delivery ²⁾	6ES7658-1EX58-0YH5
Floating license upgrade from V8.x to V9.0	6ES7658-1EX58-0YE5
Floating license upgrade from V8.x to V9.0 for download. Email address required for delivery ²⁾	6ES7658-1EX58-0YK5
Software Update Service (requires current software version) ¹⁾	6ES7658-1EX00-2YL8
Software Update Service for multiple orders (requires current software version); the delivery items are combined. For multiple contracts, only 1 package (1 data storage medium set and the corresponding number of licenses) will be supplied. Can be ordered with 5 or more contracts ¹⁾	6ES7658-1EX00-2YM8
Delivery items to be combined must be ordered as one item.	
Software Update Service (requires current software version) ¹⁾ Email address required for delivery	6ES7658-1EX00-2YV8

SIMATIC Manual Collection

Electronic manuals on DVD, multilingual:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

Current Manual Collection DVD and the three subsequent updates

¹⁾ For more information on the Software Update Service, see page 12/2.

²⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Technical specifications

EngineeringTool	CFC
Current version	V9.0
Software class	A
Application areas	
Can be used for	Graphical creation, interconnection and parameterization of (preconfigured) blocks and functions
Marketing message	Simply interconnect and configure instead of programming!
Advantages	<ul style="list-style-type: none"> • Can be used to optimum effect even during the design phase • Reduced configuration effort thanks to graphical interconnection • High degree of reusability of diagrams that have already been created • Quick and easy familiarization • Quick and transparent interconnection of ready-made functions • Technological creation of the program as a whole • Clear representation of control loop structures • Short commissioning time • High plant availability • Less time required for engineering compared to LAD/FBD/STL: up to 50%
Sectors	<ul style="list-style-type: none"> • Automotive industry (e.g. thermostats, tire production processes) • Chemicals • Power engineering and supply • Rubber and plastics processing machines • Metalworking machines • Food and beverage machines • Petrochemicals • Rolling mills • Water industry • Coilers
Target systems	
Can be used in	S7-300 S7-400 F/H systems WinAC
System requirements	
Operating system	MS Windows 7 Professional with SP1 (64-bit) MS Windows 7 Ultimate with SP1 (64-bit) MS Windows 7 Enterprise with SP1 (64-bit) MS Windows 10 Pro (64-bit) MS Windows 10 Enterprise 2015 LTSB (64-bit) MS Windows Server 2008 R2 Standard Edition with SP1 (64-bit) MS Windows Server 2012 R2 Update Standard Edition (64-bit)
Required hard drive memory in the PG/PC	approx. 80 MB
Required software	STEP 7 V5.6 or higher

EngineeringTool	CFC
Properties	
Monitoring tags	Yes
Controlling tags	Yes
Single-step processing	-
Integration in CFC	Yes
Program runtimes	
with S7-300 (typical)	Depending on the interconnected blocks
with S7-400 (typical)	Depending on the interconnected blocks
Diagnostics	
Integration of diagnostic data in ProAgent	-
Integration of diagnostic data in ProTool/Pro	-
Integration of diagnostic data in WinCC	-
Supported standards	
IEC 61131-3	based on the IEC standard
Status of PLCopen activities	-
Available versions/licenses	
Floating license	<ul style="list-style-type: none"> • 1 CD • 1 license key memory stick • 1 Certificate of License
Upgrade (floating license)	<ul style="list-style-type: none"> • 1 CD • 1 license key memory stick • 1 Certificate of License
Software Update Service (SUS)	
Also a component of	
STEP 7 Professional	-
S7 Trainer Package	-
PCS 7	Yes
D7-SYS	Yes

Software for SIMATIC Controllers

STEP 7 V5.x

Options for programming and design

S7 Distributed Safety

Overview

- For creating safety-related automation applications with SIMATIC S7 in LAD or FBD (STEP 7 required)
- Implementation of safety functions by simply connecting function blocks
- With prefabricated block library
- Custom block creation possible
- Optimal embedding in the automation world thanks to total integration in the STEP 7 tools
- Scope of supply:
 - Distributed Safety Editor
 - Code generator
 - Debugger
 - Standard block libraries

Licensing

- SIMATIC S7 Distributed Safety is delivered with a floating license. The floating license allows installation of the software on any number of computers. This means one user per license can use the software independently of the computer used and without being tied to a specific workstation. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- An upgrade to version 5.4 is offered for users of the previous versions 5.x.
- A trial license valid for 14 days is available for download via the Industry Online Support under <https://support.industry.siemens.com/cs/document/109749360>.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under this

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

S7 Distributed Safety V5.4 SP5 Update 2 programming tool

Task:

Configuration software for configuring fail-safe user programs for SIMATIC S7-300F, S7-400F, WinAC RTX F, ET 200S, ET 200M, ET 200iSP, ET 200pro, ET 200eco, ET 200SP

Requirement:

Windows 7 SP1 (64-bit)

Windows 10 Professional/Enterprise (64-bit)

Windows Server 2008 R2 SP1 (64-bit)

Windows Server 2012 R2 (64-bit),

Windows Server 2016 (64-bit)

STEP 7 from V5.5 SP1

Please also consider the operating systems that have been released for the STEP 7 version used

Floating license for 1 user, software and documentation on DVD; license key on USB flash drive

6ES7833-1FC02-0YA5

Floating license for 1 user, software, documentation and license key for download¹⁾;

Email address required for delivery

6ES7833-1FC02-0YH5

S7 Distributed Safety upgrade

From V5.x to V5.4;

floating license for 1 user, software and documentation on DVD; license key on USB flash drive

6ES7833-1FC02-0YE5

¹⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.


Overview



Safety Integrated for Process Automation is the comprehensive range of products and services from Siemens for safe, fault-tolerant applications in the process industry. This is characterized by:

- Safety-related F/FH automation systems of the S7-400 series (see "Automation Systems" section)
- Safe communication with the PROFIsafe profile via PROFIBUS (see section "Industrial Communication, PROFIBUS") or PROFINET (see section "Industrial Communication, PROFINET")
- Fail-safe transmitters (SITRANS P DS III) on the PROFIBUS PA with PROFIsafe (see Catalog FI 01, Field devices for process automation)
- ET 200SP HA, ET 200iSP, ET 200M, ET 200S and ET 200pro distributed I/O systems with safety-oriented F-I/O modules/submodules (see "Process I/O" section)
- Fail-safe process instruments/devices for connection to ET 200 distributed I/O systems (see Catalog FI 01, Field Instruments for Process Automation)
- SIMATIC Safety Integrated software for implementation and operation of safety applications, with additional components for the Engineering System and the operator stations: SIMATIC S7 F-systems, SIMATIC S7 Safety Matrix
- Special applications, for example, Partial Stroke Test
- Safety lifecycle management with support by highly qualified solution partners: services for all phases in the lifecycle of a safety instrumented system (analysis, implementation, and operation)

Design

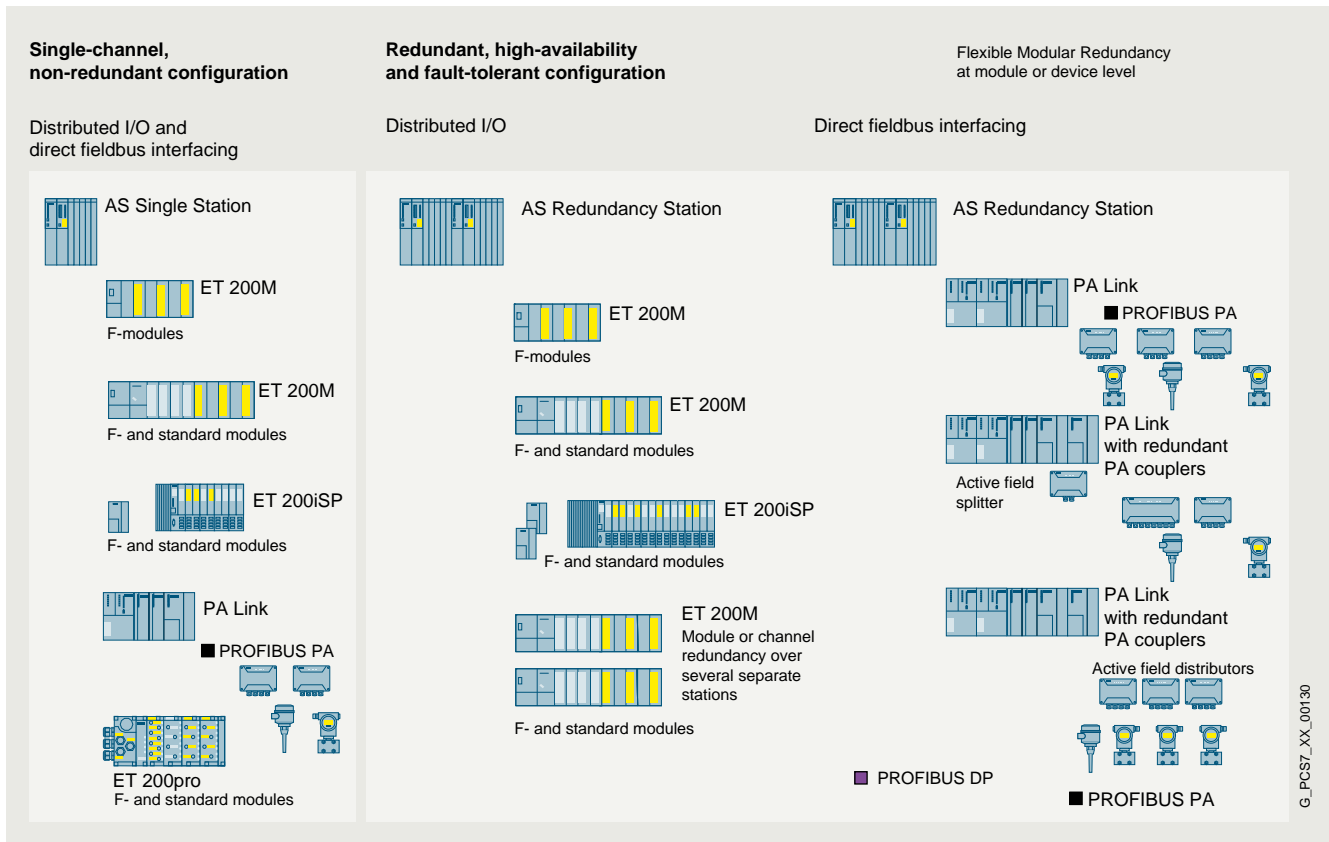

Safety-related design versions with PROFIBUS

Software for SIMATIC Controllers

STEP 7 V5.x

Options for programming and design

Safety Integrated for Process Automation

Design

The PROFIsafe profile allows safety-related communication between the automation system (controller) and the process I/O via either PROFIBUS or PROFINET. The decision for choosing either PROFINET IO or the PROFIBUS DP/PA fieldbuses has a significant influence on the architecture of the safety-related system.

Safety-related design versions with PROFIBUS

In the case of a safety-related system with PROFIBUS communication integrated into SIMATIC PCS 7, a distinction is made across all architecture levels between two design versions:

- Single-channel, non-redundant design
- Redundant, fault-tolerant design


Both design versions are extremely variable, and offer a large scope for different customer requirements. Standard automation (basic process control) and safety-related functions can be combined flexibly, not only in the area of distributed I/O. Even at the controller level, they can be combined in one system or separated. In addition, there are numerous possibilities arising from the use of flexible modular redundancy.

At the individual architectural levels (controller, fieldbus, I/O), you have the configuration alternatives shown in the figure in line with the I/O used (ET 200SP HA, ET 200iSP, ET 200M and ET 200pro remote I/O stations or PROFIBUS PA devices with PA profile 3.0 or higher).

Safety-related design versions with PROFINET


Safety-related AS single stations (F systems) and AS redundancy stations (FH systems) from the S7-400 range can be networked simply and effectively with ET 200M remote I/O stations via PROFINET IO. For this purpose, the PN/IE interface integrated in the CPU and the corresponding PROFINET interface module in the remote I/O stations (e.g. IM 155-6 PN HA for ET 200SP HA) are available on the automation system side.

The availability of the I/O devices on an AS Single Station (F-system) can be increased by a ring topology with media redundancy. If the transmission link in the ring is interrupted at one point, for example, due to a break in the ring cable or the failure of a station, the redundancy manager then immediately activates the alternative communication path.

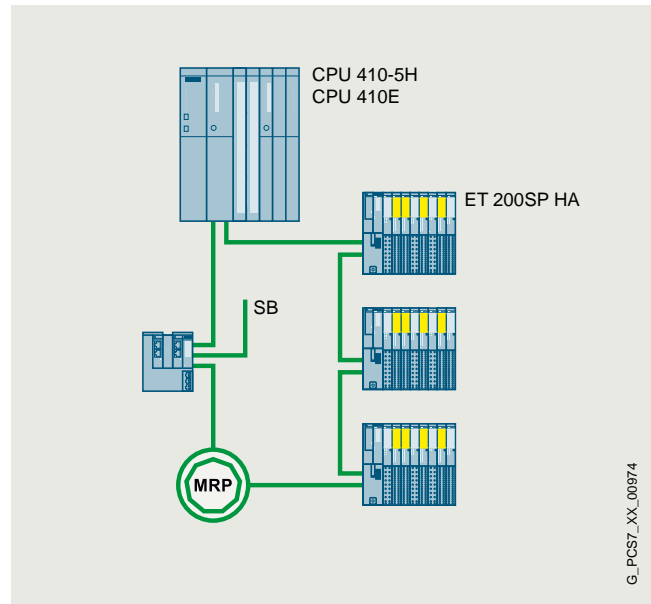


Safety-related PROFINET IO communication with media redundancy

The maximum availability with minimum error handling times is achieved by the AS Redundancy Station (FH system) in conjunction with the redundant PROFINET configuration R1. From the CPUs of the H system onwards, the R1 devices are connected via two separate line structures. In order to increase availability, we recommend reverse cabling (as shown in the blueprint). In contrast to the single-sided I/O device connection to only one CPU, failure of a CPU in this case does not automatically lead to failure of the connected I/O devices.

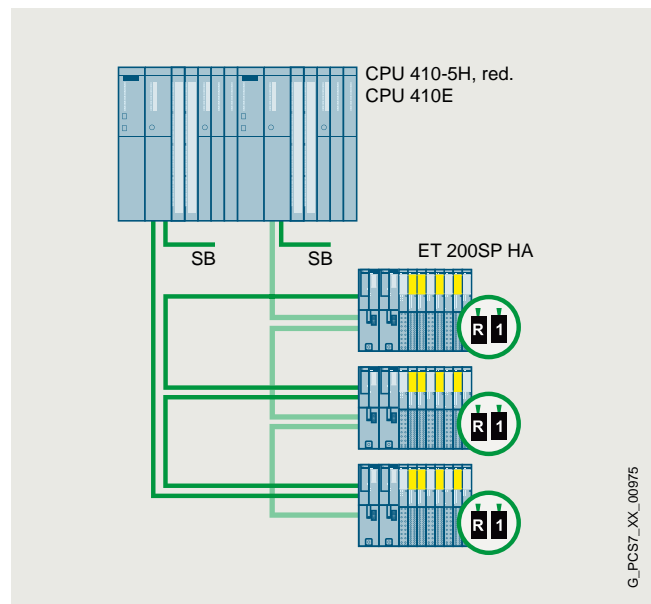

Safety-related PROFINET IO communication with system redundancy

Overview

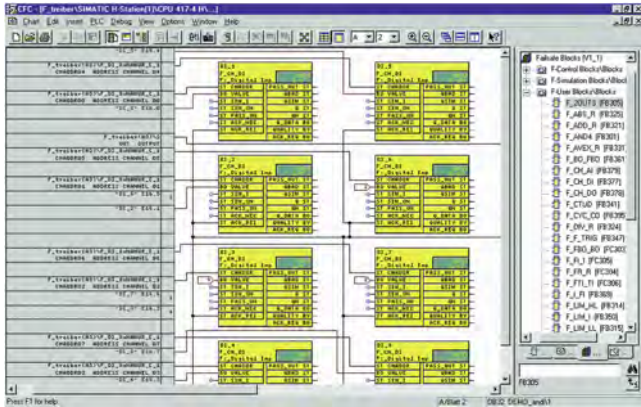

The SIMATIC S7 F Systems engineering tool for configuration of safety-related SIMATIC PCS 7 automation systems and safety-related F-modules from the ET 200 range is integrated in the SIMATIC Manager. SIMATIC S7 F Systems are based on pre-configured and German Technical Inspectorate certified blocks. The following functions are then available:

- Parameterization of CPU and F signal modules
- Creation of safety-related applications in the CFC

Ordering data

Article No.

Article No.

SIMATIC S7 F Systems

SIMATIC S7 F Systems V6.4

Programming and configuration environment for creating and using safety-oriented STEP 7 programs
2 languages (English, German), software class A

Runs on the following operating systems

- Windows 10 Enterprise 2015 LTSC (64-bit),
Windows 10 Enterprise 2019 LTSC 64-bit,
Windows Server 2016 Standard Edition 64-bit,
Windows Server 2016 Datacenter Edition 64-bit,
Windows Server 2019 Standard Edition 64-bit,
Windows Server 2019 Datacenter Edition 64-bit

Floating license for 1 user, without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive and Certificate of License, bundled with 1 x SIMATIC S7 F Systems Software Media Package per order item
- Online delivery
License key download and online Certificate of License combined with SIMATIC S7 F Systems Software Media Package (software download and online Certificate of License)
Note:
Email address required

6ES7833-1CC46-0YA5

6ES7833-1CC46-0YH5

SIMATIC S7 F Systems Software Media Package

SIMATIC S7 F Systems Software Media Package V6.4

Installation software without license
2 languages (English, German), software class A

Runs on the following operating systems:

- Windows 10 Enterprise 2015 LTSC 64-bit,
Windows 10 Enterprise 2019 LTSC 64-bit,
Windows Server 2016 Standard Edition 64-bit,
Windows Server 2016 Datacenter Edition 64-bit,
Windows Server 2019 Standard Edition 64-bit,
Windows Server 2019 Datacenter Edition 64-bit

Without SIMATIC PCS 7 Software Media Package

Note:
Can only be used in conjunction with a valid license.

- Goods delivery
Software on DVD and Certificate of License
- Online delivery
Software download and online Certificate of License

Note:
Email address required!

6ES7833-4CC46-0YT8

6ES7833-4CC46-0YG8

Upgrades for SIMATIC S7 F Systems

See "Upgrades for Safety Integrated for Process Automation" in section "Update/upgrade packages", "Updates/upgrades asynchronous to the PCS 7 version".

Note:
With a SIMATIC S7 F Systems Upgrade from V5.x to V6.x, the type of SIMATIC S7 F Systems License changes from single license to floating license.


Software for SIMATIC Controllers

STEP 7 V5.x

Options for programming and design

Safety Integrated for Process Automation > SIMATIC S7 Safety Matrix

Overview

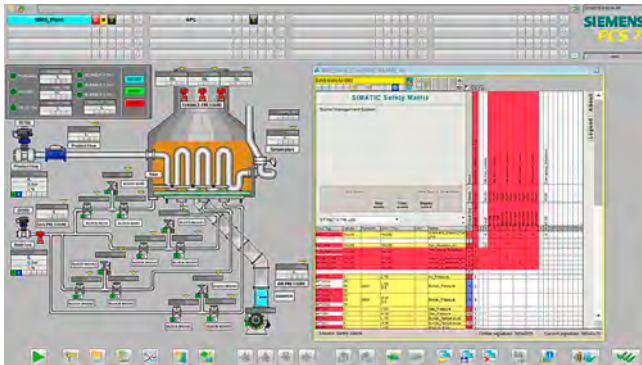

Process image of an operator station with the SIMATIC S7 Safety Matrix Viewer displayed

The SIMATIC S7 Safety Matrix, which can be used in addition to the CFC, is an innovative safety lifecycle tool from Siemens that can be used not only for user-friendly configuration of safety applications, but also for their operation and service. The tool, which is based on the proven principle of a cause & effect matrix, is ideally suited to processes where defined states require specific safety reactions.

The SIMATIC S7 Safety Matrix means that programming of the safety logic is not only significantly simpler and more convenient, but also much faster than conventional processes. During the risk analysis of a plant, the configuration engineer can assign precisely defined reactions (effects) to events (causes) which may occur during a process.

Ordering data

Article No.

Article No.

SIMATIC S7 Safety Matrix

Runs with the following operating systems (see SIMATIC S7 Safety Matrix V6.3 Readme for the latest information):

- On engineering station under:
 - MS Windows 7 SP1 (64-bit) (Ultimate, Enterprise, Professional)
 - MS Windows 10 Enterprise 2015 LTSC
 - MS Windows 10 Enterprise 2019 LTSC
 - MS Windows Server 2008 R2 SP1
 - MS Windows Server 2012 R2 Standard
 - MS Windows Server 2016 Standard
 - MS Windows Server 2019 Standard
- On operator station (for Safety Matrix Viewer) under:
 - MS Windows 7 Ultimate SP1 (32-bit)
 - MS Windows 7 SP1 (64-bit) (Ultimate, Enterprise, Professional)
 - MS Windows 10 Enterprise 2015 LTSC
 - MS Windows 10 Enterprise 2019 LTSC
 - MS Windows Server 2008 R2 SP1
 - MS Windows Server 2012 R2 Standard
 - MS Windows Server 2016 Standard
 - MS Windows Server 2019 Standard

SIMATIC S7 Safety Matrix Tool V6.3

Creation, configuration, compilation and loading of the SIMATIC S7 Safety Matrix as well as operator control and monitoring in a SIMATIC PCS 7 environment

2 languages (German, English), software class A, floating license for 1 user

Without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive and Certificate of License, bundled with 1 x SIMATIC S7 Safety Matrix Software Media Package per order item
- Online delivery
License key download and online Certificate of License, combined with SIMATIC S7 Safety Matrix Software Media Package (software download and online Certificate of License)
Note:
Email address required; installation software also available separately as SIMATIC S7 Safety Matrix Software Media Package.

6ES7833-1SM03-0YA5

6ES7833-1SM03-0YH5

Ordering data	Article No.	Article No.
SIMATIC S7 Safety Matrix Viewer V6.3 For operator control and monitoring of the SIMATIC S7 Safety Matrix via OS Single Station/OS Client Runtime software, 2 languages (German, English), software class A, floating license for 1 user Without SIMATIC PCS 7 Software Media Package <ul style="list-style-type: none"> • Goods delivery License key on USB flash drive and Certificate of License, bundled with 1 × SIMATIC S7 Safety Matrix Software Media Package per order item • Online delivery License key download and online Certificate of License, combined with SIMATIC S7 Safety Matrix Software Media Package (software download and online Certificate of License) <u>Note:</u> Email address required; installation software also available separately as SIMATIC S7 Safety Matrix Software Media Package. 	6ES7833-1SM63-0YA5	SIMATIC S7 Safety Matrix Software Media Package SIMATIC S7 Safety Matrix Software Media Package V6.3 (incl. SP) Installation software without license, 2 languages (German, English), software class A Without SIMATIC PCS 7 Software Media Package <u>Note:</u> Can only be used in conjunction with a valid license. <ul style="list-style-type: none"> • Goods delivery Software on DVD and Certificate of License • Online delivery Software download and online Certificate of License <u>Note:</u> Email address required!
	6ES7833-1SM63-0YH5	6ES7833-4SM36-0YT8
		6ES7833-4SM36-0YG8
		Upgrades for SIMATIC S7 Safety Matrix Tool and SIMATIC S7 Safety Matrix Viewer See "Safety Integrated Upgrades for Process Automation", chapter "Update/upgrade packages", section "Updates/upgrades asynchronous to the PCS 7 version"

Technical specifications

	Safety lifecycle support	Operating modes	Hardware requirements	Software requirements
SIMATIC S7 Safety Matrix Tool V6.3	Complete lifecycle: <ul style="list-style-type: none"> • Analysis phase • Implementation phase • Operation and maintenance phase 	Offline, online	SIMATIC PCS 7 with safety-related automation systems (SIMATIC S7 F Systems RT license integrated) Installation basis: SIMATIC PCS 7 Engineering Station	<ul style="list-style-type: none"> • Microsoft Windows operating system (in line with the software requirements of the SIMATIC PCS 7 version) • For offline testing: S7-PLCSIM or SIMIT • SIMATIC S7 F Systems V6.1 SP2 and higher
SIMATIC S7 Safety Matrix Viewer V6.3	Operating phase (operator control and monitoring)	Online	SIMATIC PCS 7 with safety-related automation systems (SIMATIC S7 F Systems RT license integrated) Installation basis: SIMATIC PCS 7 Operator Station, single station or client version	Microsoft Windows operating system (in line with the software requirements of the SIMATIC PCS 7 version)

System requirements for SIMATIC S7 Safety Matrix


Software for SIMATIC Controllers

STEP 7 V5.x

Options for programming and design

Software redundancy

Overview

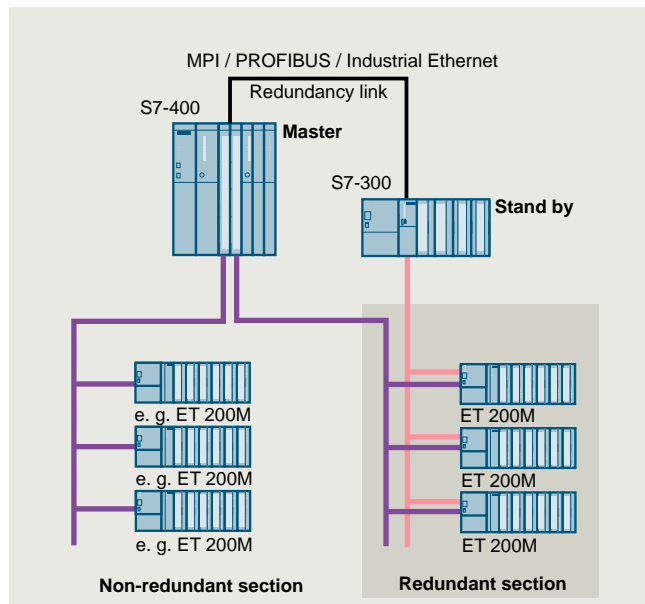

- Software package for assembling fault-tolerant control systems based on software
- Designed for control systems with single-channel distributed I/O
- For use in applications with low demands on changeover speed, such as the control of hydroelectric power plants, cooling circuits, traffic flows, level control, measured data acquisition
- Inexpensive thanks to the use of standard S7-300 and S7-400 components
- I/O linking with PROFIBUS DP in redundant configuration
- Optional control via WinCC operator station

Ordering data

Article No.

Program package software redundancy V1.2

Task:
Configuring a redundant control.
Target system:
SIMATIC S7-300, S7-400
Requirement:
STEP 7 V5.2,
NCM S7 for PROFIBUS
Type of delivery:
incl. electronic documentation
(English, German, French, Spanish,
Italian), 4 application examples and
faceplate for WinCC on CD-ROM

Single license (for 2 CPUs)

6ES7862-0AC01-0YA0

Single license, without software and documentation

6ES7862-0AC01-0YA1

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals
on DVD, multi-language:
All manuals for
S7-1200/1500/200/300/400,
LOGO!, SIMATIC DP, PC, PG,
STEP 7, Engineering SW,
Runtime SW, SIMATIC HMI,
SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year


6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

Technical specifications

Technical specifications	
Hardware requirements	
CPU	S7-300: CPU 313C-2 DP, 314C-2 DP, 315-2 DP, 316-2 DP, 318-2 DP S7-400: all CPUs
Redundancy link of the CPUs	MPI, PROFIBUS, Industrial Ethernet; existing connections can also be used
Usable modules for ET 200M	IM 153-2; all DI/O, AI/O for ET 200M; FM 350-1 counter module; CP 341
Software requirements	
Configuration/programming	STEP 7 V4.0
Communication configuration for redundant PROFIBUS DP	NCM S7 for PROFIBUS

Overview

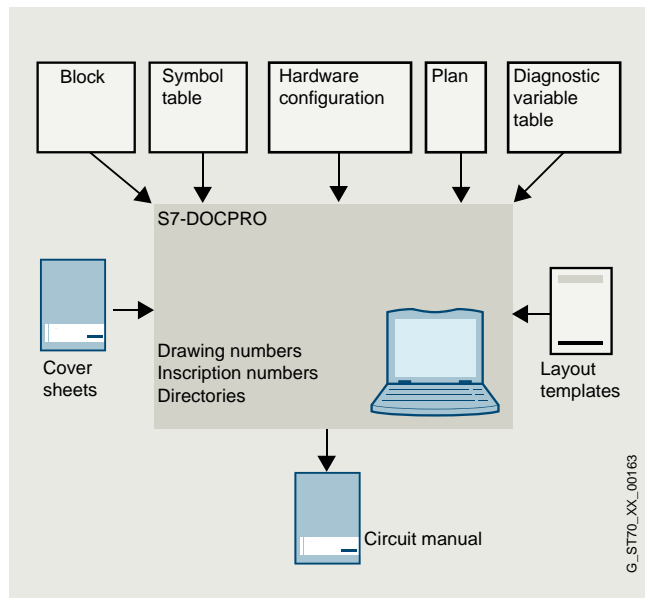

- For creating and managing plant documentation
- Permits structuring of project data, preparation in the form of wiring manuals, and uniform printouts
- For use in SIMATIC S7-300, S7-400 and C7

Licensing

- SIMATIC S7 DOCPRO is supplied with a floating license. The floating license allows installation of the software on any number of computers. This means one user per license can use the software independently of the computer used and without being tied to a specific workstation. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- A separate S7-DOCPRO update service is available for ordering.
- An upgrade to version 5.4 is available for users of previous versions.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under <http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

DOCPRO, Version 5.4

Task:
Creation of circuit manuals for plant documentation management

Target system:
SIMATIC S7-300, SIMATIC S7-400, SIMATIC C7

Requirement:
STEP 7 V5.4 or higher

Type of delivery:
on CD; German, English, French, Spanish, Italian;
incl. authorization diskette, with electronic documentation

Floating license

6ES7803-0CC03-0YA5

Software Update Service (requires current software version)¹⁾

6ES7803-0CA01-0YX2

Floating license upgrade to V5.4

6ES7803-0CC03-0YE5

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multilingual:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

¹⁾ For more information on the Software Update Service, see page 12/2.

Technical specifications

Engineering tool	DOCPRO
Type of license	Floating license
Software class	A
Current version	V5.4
Target system (recommended)	SIMATIC S7-300/400 SIMATIC C7
Operating system	Windows XP Professional Windows 7 Ultimate/Professional from DOCPRO V5.4 SP1
Required software packages	STEP 7, V5.4 and higher; for operation under Windows 7 STEP 7, V5.5 and higher
Disk space required in programming device/PC	5 MB


Software for SIMATIC Controllers

STEP 7 V5.x

Options for diagnostics and service

S7-PDIAG

Overview

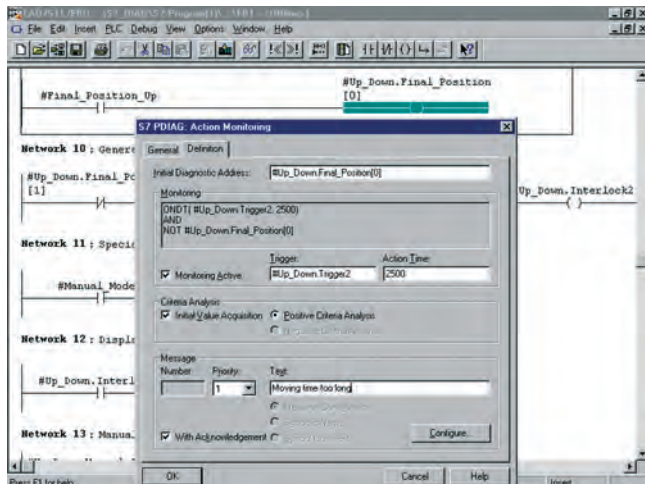

- For configuration of process diagnostics with SIMATIC S7
- Increases the availability of machines and production plants and provides supports with fault analysis and elimination on-site
- For use on the SIMATIC S7-300, S7-400

Licensing

- S7-PDIAG V5.7 is delivered with a floating license. The floating license allows installation of the software on any number of computers. This means one user per license can use the software independently of the computer used and without being tied to a specific workstation. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- An upgrade to version 5.7 is available for users of previous versions.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

S7-PDIAG, Version 5.7

Task:
Configuring of process diagnostics for LAD/FBD/STL

Target system:
SIMATIC S7-300
(CPU 314 and higher);
SIMATIC S7-400

Requirement:
From STEP 7 V5.7;
under Windows Server 2016,
Windows Server 2019,
Windows 10 Professional,
Windows 10 Enterprise

Type of delivery:
on CD; German, English, French,
Spanish, Italian;
incl. authorization diskette,
with electronic documentation

Floating license

6ES7840-0CC08-0YA5

Software Update Service (requires current software version)¹⁾

6ES7840-0CA01-0YX2

Upgrade to V5.7

6ES7840-0CC08-0YE5

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals
on DVD, multilingual:
All manuals for
S7-1200/1500/200/300/400,
LOGO!, SIMATIC DP, PC, PG,
STEP 7, Engineering SW,
Runtime SW, SIMATIC HMI,
SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2


Current Manual Collection DVD and
the three subsequent updates

¹⁾ For more information on the Software Update Service, see page 12/2.

Technical specifications

Engineering tool	S7-PDIAG
Type of license	Floating license
Software class	A
Current version	V5.7
Target system (recommended)	SIMATIC S7-300 (CPU 314 or higher) SIMATIC S7-400
Operating system	Windows Server 2016, Windows Server 2019, Windows 10 Professional, Windows 10 Enterprise
Required software packages	STEP 7 V5.7 or higher
Disk space required in programming device/PC	26 MB

Overview

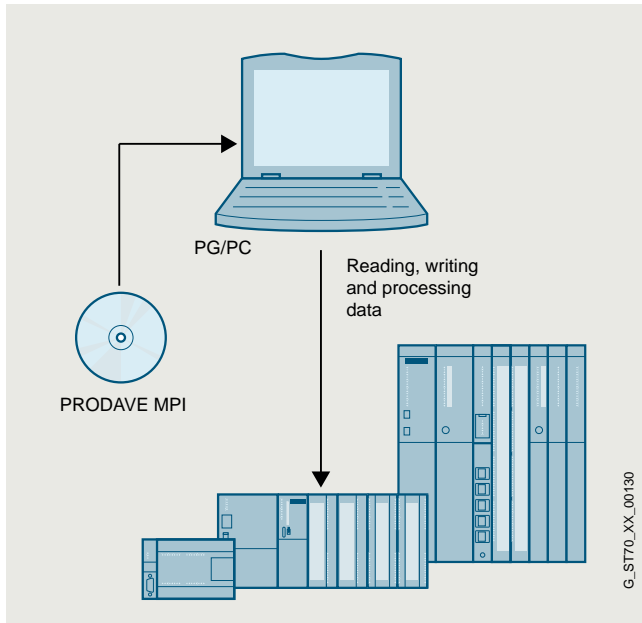

- The toolbox for exchange of process data between SIMATIC S7, SIMATIC C7 and a PG/PC
- For autonomous handling of data traffic over MPI/PPI, PROFIBUS and Industrial Ethernet

Licensing

- PRODAVE is supplied with a single license. The single license permits the software to be installed on just one computer.
- It is possible to acquire a single license without software and documentation for installation on more than one computer.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Technical specifications

Runtime software	
Parameterization software	PRODAVE
Type of license	Simple license, copy license
Software class	A
Current version	V6.2
Target system	SIMATIC S7-200 SIMATIC S7-300 SIMATIC S7-400 SIMATIC C7
Operating system	Windows XP Professional, Windows 7 Professional and Ultimate (32 and 64-bit in each case)
Required software packages	-
Main memory configuration in target system	8 MB on PG/PC
Disk space required in PG/PC	2 MB
Standard FBs	
Required libraries	-

Ordering data

Article No.

PRODAVE MPI/IE V6.2 for Windows XP Professional, Windows 7 Professional and Ultimate (32 and 64-bit in each case)

Task:

Data link between PG/PC and SIMATIC S7/C7 via MPI (S7-200 via PPI) or Industrial Ethernet

Requirements:

Windows XP Professional, Windows 7 Professional and Ultimate (32 and 64-bit in each case); CP 5611, integrated MPI or PC adapter

Type of delivery:

CD incl. electr. documentation (German, English)

Single license

6ES7807-4BA03-0YA0

Copy license, without software and documentation

6ES7807-4BA03-0YA1

PRODAVE MPI Mini V6.0 for Windows 95/98/ME/NT 4.0/2000 Prof./XP Prof.

Task:

Data link between PG/PC and SIMATIC S7/C7 over MPI (S7-200 over PPI); with reduced functional scope

Requirement:

Windows 95/98/ME/NT 4.0/2000 Prof./XP Prof.; CP 5611, integrated MPI or PC adapter

Type of delivery:

CD incl. electr. documentation (German, English)

Single license

6ES7807-3BA01-0YA0

Copy license, without software and documentation

6ES7807-3BA01-0YA1

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language: All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates


Software for SIMATIC Controllers

STEP 7 V5.x

Options for technology and drive systems

Loadable function blocks > Standard PID Control

Overview

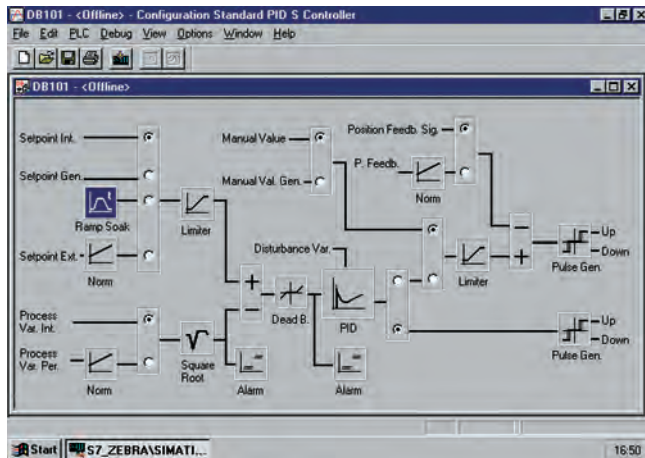

- For integrating continuous PID controllers, pulse controllers and step controllers in the application program
- Reduces engineering costs thanks to time-saving parameterization and optimization of the controller
- For use in SIMATIC S7-300 (CPU 313 or higher), S7-400 and WinAC

Licensing

- The Standard PID Control consists of a parameterization tool (engineering software) and function blocks (runtime software).
- The engineering software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- Function blocks may be copied as often as required onto any programming devices/PCs. However, one license is always required for each CPU on which they are used.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

Standard PID Control parameterization tool, V5.2

Task:
Parameter assignment tool for standard controllers
Requirement:
STEP 7 V5.6 or higher
Type of delivery:
With electronic manual/Getting Started English, German; incl. authorization diskette

Floating license

6ES7830-2AA22-0YX0

Standard function blocks for Standard PID Control, V5.2

Task:
Standard FBs for standard controllers
Target system:
SIMATIC S7-300 (CPU 313 or higher), S7-400

Type of delivery:
With electronic manual/Getting Started English, German

Single license

6ES7860-2AA21-0YX0

Single license without software and documentation

6ES7860-2AA21-0YX1

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

Technical specifications

Parameterization software	Standard PID Control					
Type of license	Single license					
Software class	A					
Current version	V5.2 SP4					
Target system	SIMATIC S7-300 (CPU 313 or higher) SIMATIC S7-400 SIMATIC C7					
Required software packages	STEP 7 V5.6 or higher					
Main memory configuration in PG/PC	16 MB					
Disk space required in PG/PC	1.85 MB					
Standard function blocks	PID_CP (FB 1)		PID_ES (FB 2)		LP_SCHED (FC 1)	
Storage space requirements	Load memory	Work memory	Load memory	Work memory	Load memory	Work memory
• FB length in the memory	8956 bytes	7796 bytes	9104 bytes	7982 bytes	1064 bytes	976 bytes
• DB length in the memory	1168 bytes	510 bytes	1124 bytes	484 bytes	184 bytes ²⁾	100 bytes ²⁾
Runtimes						
• In S7-300 ¹⁾	0.18 - 4.4 ms		0.2 - 5.1 ms		0.03 - 0.3 ms	
• In S7-400 ¹⁾	0.13 - 0.35 ms		0.16 - 0.35 ms		0.03 - 0.08 ms	
Required libraries	Standard PID Control FBs					
Licensing forms	Simple license and 1 runtime license; 1 runtime license					
Software class	A					
Current version	V5.2 SP3					
Target system	SIMATIC S7-300 (CPU 313 or higher) SIMATIC S7-400 SIMATIC C7					
Required software packages	STEP 7 V5.6 or higher					
Main memory configuration in PG/PC	16 MB					
Disk space required in PG/PC	1.85 MB					

¹⁾ Depending on the CPU

²⁾ With 5 control loops


Software for SIMATIC Controllers

STEP 7 V5.x

Options for technology and drive systems

Loadable function blocks > Modular PID Control

Overview

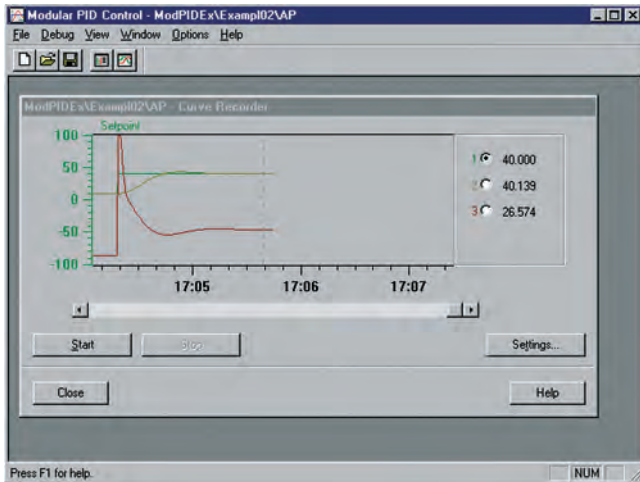

- For creating complex closed-loop control structures
- Preferred for implementation in closed-loop control equipment in mid-range and high-end applications and in process engineering
- For use in SIMATIC S7-300 (CPU 313 or higher), S7-400 and WinAC

Licensing

- The Modular PID Control consists of a parameterization tool (engineering software) and function blocks (runtime software).
- The engineering software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- Function blocks may be copied as often as required onto any programming devices/PCs. However, one license is always required for each CPU on which they are used.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

Modular PID Control commissioning tool, V5.1 for SIMATIC S7 and WinAC

Task:
Commissioning tool for modular PID controllers
Requirement:
STEP 7 V5.6 or higher
Type of delivery:
With electronic manual, English, German;
incl. authorization diskette

Floating license

6ES7830-1AA11-0YX0

Standard function blocks for Modular PID Control, V5.1

Task:
Standard FBs for modular PID controllers
Target system:
SIMATIC S7-300 (CPU 313 or higher), S7-400, WinAC
Type of delivery:
English, German;
with electronic manual

Single license

6ES7860-1AA10-0YX0

Single license, without software and documentation

6ES7860-1AA10-0YX1

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

6ES7998-8XC01-8YE2

Current Manual Collection DVD and the three subsequent updates

Technical specifications

Parameterization software	Modular PID Control
Type of license	Single license
Software class	A
Current version	V5.1 SP4
Target system	SIMATIC S7-300 (CPU 313 or higher) SIMATIC S7-400 SIMATIC C7
Required software packages	STEP 7 V5.6 or higher
Main memory configuration in PG/PC	16 MB
Disk space required in PG/PC	1.85 MB
Processor, at least	486
Windows swap area, approx.	20 MB (max. possible)

Technical specifications

Standard function blocks	A_DEAD_B		CRP_IN		CPR_OUT	
Storage space requirements	Load memory	Work memory	Load memory	Work memory	Load memory	Work memory
• FB length in the memory	898 bytes	692 bytes	182 bytes	70 bytes	206 bytes	96 bytes
• DB length in the memory	186 bytes	44 bytes	122 bytes	20 bytes	114 bytes	14 bytes
Runtimes in S7-300	0.13 to 0.17 ms		0.06 ms		0.18 to 0.22 ms	
Runtimes in S7-400	0.01 to 0.03 ms		0.01 to 0.02 m		0.01 to 0.04 ms	
Target system	SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC	

Standard function blocks	DEAD_T		DEAD_BAND		DIF	
Storage space requirements	Load memory	Work memory	Load memory	Work memory	Load memory	Work memory
• FB length in the memory	532 bytes	394 bytes	232 bytes	120 bytes	410 bytes	268 bytes
• DB length in the memory	142 bytes	22 bytes	114 bytes	16 bytes	158 bytes	30 bytes
Runtimes in S7-300	0.26 to 0.33 ms		0.16 to 0.21 ms		0.55 to 0.71 ms	
Runtimes in S7-400	0.02 to 0.06 m		0.01 to 0.03 ms		0.03 to 0.09 ms	
Target system	SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC	

Standard function blocks	ERR_MON		INTEG		LAG1ST	
Storage space requirements	Load memory	Work memory	Load memory	Work memory	Load memory	Work memory
• FB length in the memory	558 bytes	360 bytes	488 bytes	314 bytes	534 bytes	368 bytes
• DB length in the memory	206 bytes	52 bytes	168 bytes	36 bytes	156 bytes	30 bytes
Runtimes in S7-300	0.27 to 0.35 ms		0.40 to 0.51 ms		0.52 to 0.67 ms	
Runtimes in S7-400	0.01 to 0.05 ms		0.02 to 0.07 ms		0.03 to 0.09 ms	
Target system	SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC	

Standard function blocks	LAG2ND		LIMALARM		LIMITER	
Storage space requirements	Load memory	Work memory	Load memory	Work memory	Load memory	Work memory
• FB length in the memory	690 bytes	516 bytes	390 bytes	240 bytes	262 bytes	140 bytes
• DB length in the memory	190 bytes	46 bytes	152 bytes	28 bytes	124 bytes	20 bytes
Runtimes in S7-300	0.88 to 1.14 ms		0.47 to 0.61 ms		0.14 to 0.17 ms	
Runtimes in S7-400	0.04 to 0.16 ms		0.02 to 0.07 ms		0.03 to 0.01 ms	
Target system	SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC	

Standard function blocks	LMNGEN_C		LMNGEN_S		NONLIN	
Storage space requirements	Load memory	Work memory	Load memory	Work memory	Load memory	Work memory
• FB length in the memory	1576 bytes	1280 bytes	2578 bytes	2152 bytes	826 bytes	672 bytes
• DB length in the memory	276 bytes	80 bytes	360 bytes	110 bytes	138 bytes	18 bytes
Runtimes in S7-300	0.32 to 0.41 ms		1.16 to 1.47 ms		0.32 to 0.41 ms	
Runtimes in S7-400	0.02 to 0.06 ms		0.06 to 0.18 ms		0.02 to 0.07 ms	
Target system	SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC	

Software for SIMATIC Controllers

STEP 7 V5.x

Options for technology and drive systems

Loadable function blocks > Modular PID Control

Technical specifications

Standard function blocks	NORM		OVERRIDE		PARA_CTL	
Storage space requirements	Load memory	Work memory	Load memory	Work memory	Load memory	Work memory
• FB length in the memory	234 bytes	122 bytes	362 bytes	214 bytes	406 bytes	232 bytes
• DB length in the memory	130 bytes	24 bytes	146 bytes	28 bytes	234 bytes	82 bytes
Runtimes in S7-300	0.33 to 0.43 ms		0.15 to 0.18 ms		0.12 to 0.15 ms	
Runtimes in S7-400	0.02 to 0.07 ms		0.01 to 0.04 ms		0.01 to 0.03 ms	
Target system	SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC	

Standard function blocks	PID		PULSEGEN		RMP_SOAK	
Storage space requirements	Load memory	Work memory	Load memory	Work memory	Load memory	Work memory
• FB length in the memory	1560 bytes	1242 bytes	1110 bytes	872 bytes	1706 bytes	1500 bytes
• DB length in the memory	340 bytes	98 bytes	190 bytes	34 bytes	212 bytes	62 bytes
Runtimes in S7-300	1.15 to 1.46 ms		0.17 to 0.20 ms		0.16 to 0.20 ms	
Runtimes in S7-400	0.06 to 0.18 ms		0.01 to 0.05 ms		0.01 to 0.04 ms	
Target system	SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC	

Standard function blocks	ROC_LIM		SCALE		SP_GEN	
Storage space requirements	Load memory	Work memory	Load memory	Work memory	Load memory	Work memory
• FB length in the memory	1242 bytes	980 bytes	136 bytes	32 bytes	658 bytes	484 bytes
• DB length in the memory	222 bytes	50 bytes	114 bytes	16 bytes	164 bytes	40 bytes
Runtimes in S7-300	0.53 to 0.68 ms		0.10 to 0.13 ms		0.27 to 0.35 ms	
Runtimes in S7-400	0.02 to 0.09 ms		0.01 to 0.02 ms		0.02 to 0.06 ms	
Target system	SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC	

Standard function blocks	SPLT_RAN		SWITCH		LP_SCHED	
Storage space requirements	Load memory	Work memory	Load memory	Work memory	Load memory	Work memory
• FB length in the memory	304 bytes	180 bytes	238 bytes	116 bytes	1104 bytes	972 bytes ¹⁾
• DB length in the memory	138 bytes	28 bytes	118 bytes	18 bytes	234 bytes	64 bytes ¹⁾
Runtimes in S7-300	0.09 to 0.11 ms		0.07 to 0.09 ms		0.28 to 0.34 ms	
Runtimes in S7-400	0.01 to 0.02 ms		0.01 to 0.03 ms		0.03 to 0.08 ms	
Target system	SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC		SIMATIC S7-300 (CPU 313 and higher), S7-400, WinAC	

¹⁾ With 5 control loops

Standard FBs in general	
Required libraries	Modular PID Control FBs
Licensing forms	Simple license and 1 runtime license; 1 runtime license
Software class	A
Current version	V5.1 SP3
Required software packages	STEP 7 V5.6 or higher
Main memory configuration in PG/PC	16 MB
Disk space required in PG/PC	1.85 MB

Overview

- PID Self-Tuner: For expanding existing PID controllers to create self-tuning PI or PID controllers.
- Optimization of PI or PID controllers with 3-step action (HEATING – OFF – COOLING)
- Convenient online initial setting and online adaptation during operation
- Ideally applicable to temperature controllers, but also suitable for level and flow controllers
- Can be used with SIMATIC S7-300 (CPU 313 or higher), SIMATIC S7-400 and WinAC; in combination with PID Control (integrated in STEP 7), Standard PID Control, Modular PID Control, FM 355, FM 455 as well as with any PID algorithm

Licensing

- The PID Self-Tuner complements the Standard PID Control or Modular PID Control software packages.
- Function blocks may be copied as often as required onto any programming devices/PCs. However, one license is always required for each CPU on which they are used.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your software licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>.

Ordering data**Article No.****PID Self-Tuner V5.1**

Task:
Online tuning for PID controller
Target system:
SIMATIC S7-300 (CPU 313 or higher),
S7-400, WinAC
Type of delivery:
Standard function blocks, electronic
manual and Getting Started
English/German

Single license

6ES7860-4AA01-0YX0

Single license, without software and
documentation

6ES7860-4AA01-0YX1

SIMATIC Manual Collection

6ES7998-8XC01-8YE0

Electronic manuals
on DVD, multi-language:
All manuals for
S7-1200/1500/200/300/400,
LOGO!, SIMATIC DP, PC, PG,
STEP 7, Engineering SW,
Runtime SW, SIMATIC HMI,
SIMATIC NET, SIMATIC IDENT

**SIMATIC Manual Collection
update service for 1 year**

6ES7998-8XC01-8YE2

Current Manual Collection DVD and
the three subsequent updates

Technical specifications

Parameterization software	PID Self-Tuner			
Type of license	-			
Software class	-			
Current version	-			
Target system	-			
Operating system	-			
Required software packages	-			
Main memory configuration in PG/PC	-			
Disk space required in PG/PC	-			
Standard FBs	-			
PID Self-Tuner	TUN_EC		TUN_ES	
Storage space requirements • FB length in the memory • DB length in the memory	Load memory approx. 6542 bytes 644 bytes	Work memory approx. 5956 bytes 294 bytes	Load memory 6332 bytes 638 bytes	Work memory 5714 bytes 288 bytes
Runtimes • In S7-300 • In S7-400	1.0 ms to 1.5 ms ¹⁾ 0.06 ms to 0.19 ms ¹⁾		1.0 ms to 1.5 ms ¹⁾ 0.06 ms to 0.19 ms ¹⁾	
Required libraries	PID Self-Tuner FBs V5.1			
Licensing forms	-			
Software class	A			
Current version	V5.1 SP3			
Target system	SIMATIC S7-300 (CPU 313 or higher) SIMATIC S7-400 SIMATIC C7-620			
Required software packages	STEP 7 V5.6 or higher			
Main memory configuration in PG/PC	-			
Disk space required in PG/PC	-			

¹⁾ Depending on the CPU selected

Software for SIMATIC Controllers

STEP 7 V5.x

Options for technology and drive systems

S7-Technology

Overview

- Option package for creating Motion Control applications for CPU 31xT and CPU 317TF
- Optimal embedding in the automation world thanks to total integration in the STEP 7 tools
- Programming in the standard SIMATIC programming languages LAD, FBD and STL
- Additional engineering tools such as S7-SCL or S7-GRAPH can be used

Licensing

- The engineering software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

S7 Technology V4.2

Task:

Option package for configuring and programming technology tasks with SIMATIC S7 CPU 31xT and SIMATIC S7 CPU 317TF

Requirement:

STEP 7 V5.6 and higher

Type of delivery:

On DVD

Incl. documentation for CPU 31xT, CPU 317TF (included on DVD)

Floating license

Floating license for 1 user, license key download without software or documentation¹⁾; Email address required for delivery

6ES7864-1CC42-0YA5

6ES7864-1CC42-0XH5

¹⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Overview



- Low-priced package for simple, controlled positioning and simple geared synchronous motion
- For use with any standard variable-speed drive, such as frequency converter or servo drive
- For incremental and absolute encoders

Licensing

- The engineering interface for STEP 7 up to V5.5 is included in Easy Motion Control V2.1 and can be installed without license.
- The function blocks of Easy Motion Control require one runtime license for each CPU onto which they are loaded. Easy Motion Control V2.1 includes a Runtime single license; other licenses can be ordered separately.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Note of product versions

Easy Motion Control is an option for STEP 7 V5.x or STEP 7 Professional 2010/17 for controllers of the SIMATIC S7-300/S7-400 series and WinAC. When using STEP 7 (TIA Portal) to program these controllers, you require the optional package Easy Motion Control (TIA Portal)

Ordering data

Article No.

Easy Motion Control V2.1

6ES7864-0AC01-0YX0

Requirement:
STEP 7 V5.3 SP2 up to V5.5
Type of delivery:
Software and documentation in
2 languages (English, German)
on CD and CoL for one runtime
single license

Easy Motion Control Runtime License

6ES7864-0AF01-0YX0

Type of delivery:
CoL for one runtime single
license (valid for Easy Motion
Control V2.x and V11 or higher),
without software or documentation

Technical specifications

Supported hardware:

Easy Motion Control is runnable on the following CPUs:

- S7-300.
- S7-400.
- WinAC.
- ET 200S.
- ET 200pro.

Supported modules for the measuring of actual values:

- CPU 314C (FW version 2.0 of the CPU or higher).
- ET 200S 1 Count 5V/500 kHz.
- ET 200S 1 Count 24V/100kHz.
- ET 200S 1SSI.
- SM 338.
- FM 350-1, FM 450-1.
- SIMODRIVE Sensor with PROFIBUS DP.
- IM 174.
- Other modules for measuring actual values (using free driver).

Supported modules for setpoint output:

- ET 200S 2AO U.
- SM 332.
- SM 432.
- IM 174.
- Other modules for setpoint output (using free driver).

Supported drives using PROFIBUS DP:

- Micromaster 4.
- SINAMICS G120.
- SINAMICS S120.

Storage space requirements

Required work memory in bytes		
Block	Required work memory per block	Additional work memory required per instance
MC_Init	1086	-
MC_MoveAbsolute	3924	112
MC_MoveRelative	2982	110
MC_MoveJog	3110	110
MC_Home	2886	104
MC_StopMotion	1114	70
MC_Control	1756	58
MC_Simulation	410	64
MC_GearIn	3476	128
Input driver	1416 ... 2654	76 ... 128
Output driver	384 ... 1242	52 ... 68
Axis data block	-	294


Software for SIMATIC Controllers

STEP 7 V5.x

Options for technology and drive systems

D7-SYS

Overview

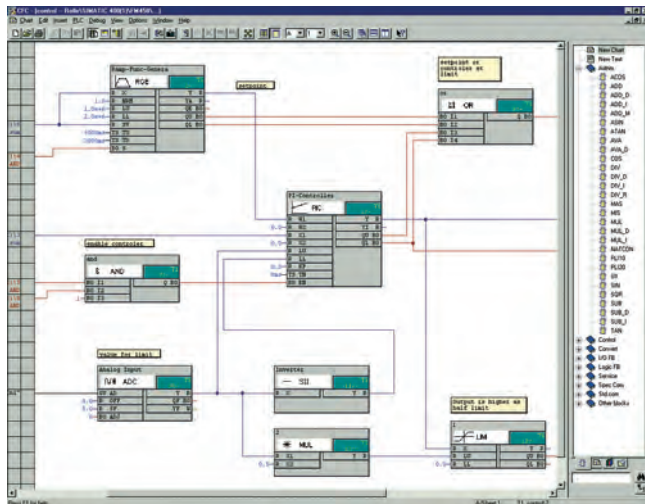

- Optional package for STEP 7 V5.6 SP2 or STEP 7 V5.7 for configuring closed-loop control and automation tasks with SIMATIC TDC and FM 458-1 DP
- Extensive block library
- Generation of user libraries in ANSI C with D7-FB-GEN function block generator

Licensing

- D7-SYS is delivered with a floating license. The floating license allows installation of the software on any number of computers. This means one user per license can use the software independently of the computer used and without being tied to a specific workstation. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- An upgrade to version 9.1 is available for users of previous versions from V8.1.
- A separate Software Update Service can be purchased for D7-SYS.
- As of version 8.1, the D7-FB-GEN block generator that was previously sold separately is included in the D7-SYS scope of delivery.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

SIMATIC D7-SYS V9.1

Reference hardware:

SIMATIC TDC, FM 458-1 DP

Requirement:

MS Windows 10 Pro and Enterprise

(64 bit);

MS Windows Server 2016 Standard

Edition (64 bit);

MS Windows Server 2019 Standard

Edition (64 bit);

STEP 7 V5.6 SP2 or STEP 7 V5.7

Type of delivery:

On DVD, en, de, with electronic

documentation

Floating license

Upgrade license from V8.1 to V9.1

Software Update Service¹⁾


6ES7852-0CC07-0YA5

6ES7852-0CC07-0YE5

6ES7852-0CC01-0YL5

¹⁾ For more information on the Software Update Service, see page 12/2.

Overview

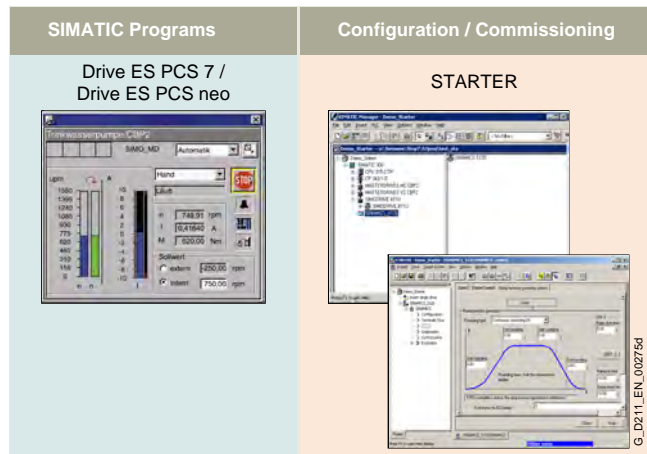

Drive ES/STARTER is the engineering system used to integrate the communication, configuration and data management functions of Siemens drive technology into the SIMATIC automation world easily, efficiently and cost-effectively.

The following software packages are available for selection:

- STARTER
- Drive ES PCS 7 / Drive ES PCS neo

The Drive ES (**Drive Engineering Software**) fully integrates drives from Siemens into the world of Totally Integrated Automation (STEP 7 V5.x).

Ordering data

Article No.

Article No.

Drive ES PCS 7 V9.0 SPx ¹⁾

Block library for PCS 7 for the integration of drives in Classic Style (as predecessor)

Requirement:
PCS 7 V9.0 or higher

Type of delivery:
DVD-ROM

Languages:
en, de, fr, it, es

With electronic documentation

- Single-user license incl. 1 runtime license
- Runtime license (without data storage medium)
- Update service for single-user license
- Upgrade from V6.x/V7.x/V8.x/V9.x to V9.0 SPx ¹⁾

6SW1700-1JD00-0AA0

6SW1700-5JD00-1AC0

6SW1700-0JD00-0AB2

6SW1700-1JD00-0AA4

Drive ES PCS 7 V9.1 SPx ¹⁾

Block library for PCS 7 for the integration of drives in Classic Style (as predecessor)

Requirement:
PCS 7 V9.1 or higher

Type of delivery:
DVD-ROM

Languages:
en, de, fr, it, es

With electronic documentation

- Single-user license incl. 1 runtime license
- Runtime license (without data storage medium)
- Update service for single-user license
- Upgrade from V6.x/V7.x/V8.x/V9.x to V9.1 SPx ¹⁾

6SW1700-2JD00-0AA0

6SW1700-5JD00-1AC0

6SW1700-0JD00-0AB2

6SW1700-2JD00-0AA4

Drive ES PCS 7 APL V9.0 SPx ¹⁾

Block library for PCS 7 for the integration of drives in APL Style (Advanced Process Library)

Requirement:
PCS 7 V9.0 or higher

Type of delivery:
DVD-ROM

Languages:
en, de, fr, it, es

With electronic documentation

- Single-user license incl. 1 runtime license
- Runtime license (without data storage medium)
- Update service for single-user license
- Upgrade of APL V8.x, V9.x to V9.0 SPx ¹⁾ or Drive ES PCS 7 V6.x, V7.x, V8.x, V9.x classic to Drive ES PCS 7 APL V9.0 SPx ¹⁾

6SW1700-1JD01-0AA0

6SW1700-5JD01-1AC0

6SW1700-0JD01-0AB2

6SW1700-1JD01-0AA4

Drive ES PCS 7 APL V9.1 SPx ¹⁾

Block library for PCS 7 for the integration of drives in APL Style (Advanced Process Library)

Requirement:
PCS 7 V9.1 or higher

Type of delivery:
DVD-ROM

Languages:
en, de, fr, it, es

With electronic documentation

- Single-user license incl. 1 runtime license
- Runtime license (without data storage medium)
- Update service for single-user license
- Upgrade of APL V8.x, V9.x to V9.1 SPx ¹⁾ or Drive ES PCS 7 V6.x, V7.x, V8.x, V9.x classic to Drive ES PCS 7 APL V9.1 SPx ¹⁾

6SW1700-2JD01-0AA0

6SW1700-5JD01-1AC0

6SW1700-0JD01-0AB2

6SW1700-2JD01-0AA4

¹⁾ Orders are automatically supplied with the latest Service Pack (SP).


Software for SIMATIC Controllers

STEP 7 V5.x

Options for technology and drive systems

Drive ES engineering software

Ordering data	Article No.		Article No.
<p>Drive ES PCS neo V3.0 / V3.1 / V4.0</p> <p>Block library for SIMATIC PCS neo for the integration of SINAMICS drives</p> <p>Requirement: PCS neo V3.0 or higher</p> <p>Type of delivery at V3.0: The SINAMICS library is a component of the SIMATIC PCS neo V3.0 product.</p> <p>Type of delivery at V3.1 / V4.0: Integration via the import of a SINAMICS device type file (product support).</p> <p>License reference for the license code and the Certificate of License for the Drive ES PCS neo SINAMICS library via OSD</p> <p>Languages: de, en</p>		<p><u>License for the Drive ES PCS neo SINAMICS library (engineering and runtime software)</u></p> <p>Floating license for 1 engineering user on the engineering server</p> <p>A runtime license for a PCS neo Controller (single license for 1 installation)</p>	6SW1700-1JE01-0AH0
		<p><u>Runtime license Drive ES PCS neo SINAMICS library</u></p> <p>To execute the function blocks for a SIMATIC PCS neo Controller</p> <p>Language-neutral, single license for 1 installation</p> <p>Type of delivery: Electronic Certificate of License (OSD)</p>	6SW1700-1JE00-1AH0

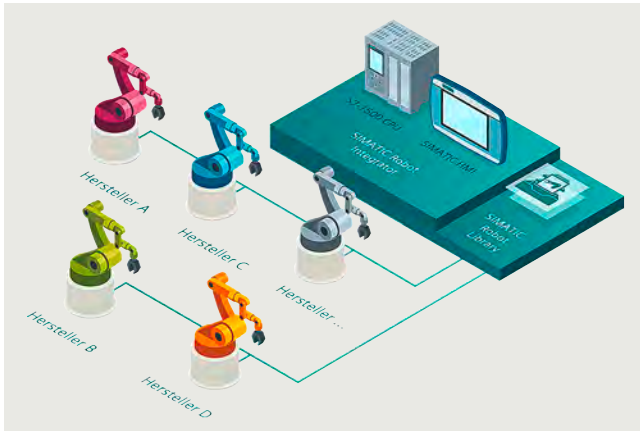Overview


With the SIMATIC Robot Library, robot arms of different robot manufacturers can be programmed consistently in the Totally Integrated Automation Portal (TIA Portal).

The SIMATIC Robot Library concept moves the command sets of a robot control to the TIA Portal, thus enabling manufacturer-independent and consistent programming of industry robots (incl. cobots) in the TIA Portal for the first time. The programs can be run on a SIMATIC S7-1500 Controllers. Additional programming on the robot control is not necessary.

Note:

The SIMATIC Robot Library can be supplemented by the free application example SIMATIC Robot Integrator. This offers a comprehensive user interface for industry robots incl. configuration, teaching, jog mode and diagnostics for SIMATIC HMI.

System requirements

- SIMATIC STEP 7 (TIA Portal) as of V16.
- Interpreter software from the respective robot manufacturer on the robot control required.
- Executable on SIMATIC S7-1500 as of firmware V2.8 and on SIMATIC S7-1500S as of firmware V20.8.

Licensing

- A Single Runtime License is required for each controlled robot arm.
- The licenses can only be obtained via Online Software Delivery (OSD). The download contains the software and a license certificate for a robot arm. For information on activating the license, please read the Readme file included in the download.
- The SIMATIC Robot Library V1.1 can also be requested as trial version via the Siemens Industry Online Support or Technical Support and can then be used free of charge for 8 hours.
- The Interpreter software for the respective robot control is made available by the respective robot manufacturer. Siemens has no influence on the Interpreter license model of the robot manufacturer. Therefore, please contact the relevant robot manufacturer directly (if you wish, Siemens can assist you with finding a contact person).

Ordering data
SIMATIC Robot Library V1.1

STEP 7 (TIA Portal) runtime option for consistent programming of robot arms of various robot manufacturers in the Totally Integrated Automation Portal (TIA Portal).

Requirement:
SIMATIC STEP 7 (TIA Portal) as of V16;
Interpreter software from the respective robot manufacturer on the robot control required.

Executable on:
SIMATIC S7-1500 Controller family as of firmware V2.8
SIMATIC S7-1500S Controller family as of firmware V20.8

Single Runtime License Download¹⁾ contains license certificate for 1 robot alarm

Consignee email address required for delivery

Article No.
6ES7823-0RE00-3AA0


¹⁾ Up-to-date information and download availability can be found under <http://www.siemens.com/tia-online-software-delivery>.

Software for SIMATIC Controllers

Software for robotics

SIMATIC Cartesian Portal

Overview

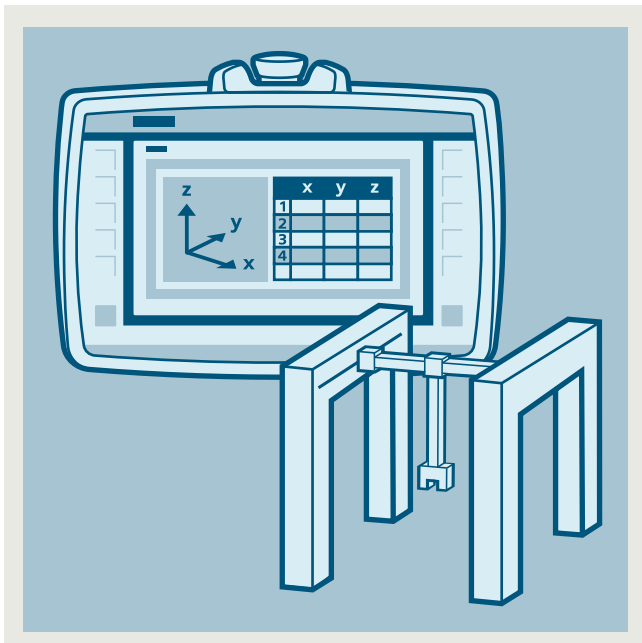

With the SIMATIC Cartesian Portal, kinematics can be configured, programmed and operated with up to 6 positioning axes with synchronous point-to-point control (sPTP). The Plug & Play solution comprises a convenient user interface for programming, diagnostics and operation of the kinematics via the HMI.

The SIMATIC Cartesian Portal V1.0 software solution consists of a TIA Portal project and a library project for the TIA Portal V17 and V18.

SIMATIC Cartesian Portal V1.0 contains the following HMI configuration functions:

- Channel-granular configuration of the kinematics and additional axes;
Per channel, up to 6 axes and additionally up to 25 further axes are available for multi-axis positioning with sPTP. The number of channels is only limited by the performance and the memory of the PLC.
- Axis configuration;
The dynamic parameters, the axis limits and the homing of the different axes can be configured.
- Tag and I/O configuration;
Bool and Real tags can be created. Logical step enabling conditions consisting of multiple inputs and tags can be combined into one Boolean tag. Digital inputs and outputs can be configured via the I/O address.
- Points table;
By means of input or teaching of axis positions, path points can be defined that can be used for programming the kinematics.
- Zone configuration;
Multiple restricted zones can be created in the workspace as protection zones. These are checked cyclically against both the target coordinates and the current axis values. A violation leads to a stop response of the axes.

The program editor offers the following functions:

- Synchronous point-to-point commands;
All axes are traversed synchronously with multi-axis positioning. The destination is specified either using the points table or by direct input with optional blending.
- Single axis commands;
The additional axes can be homed, positioned, torque-limited or speed-controlled.
- Wait functions;
Step enabling conditions, based on a digital input, a Bool tag or a wait time, can be programmed.
- Calculate tags and assign values;
Digital outputs can be set via an input mask. In addition, floating point tags can be calculated, incremented or assigned absolute values.
- Program control structures;
Labels, branches, loops and parallel sequences allow flexible program design.

SIMATIC Cartesian Portal V1.0 is executable on SIMATIC S7-1511T for V17 and SIMATIC S7-1511 for V18. Details on scalability and quantity structures can be found in the https://support.industry.siemens.com/cs/attachments/109815631/109815631_SIMATIC_Cartesian_Portal_V1.0_en.pdf.

System requirements

- SIMATIC STEP 7 Professional (TIA Portal) as of V17
- SIMATIC WinCC Advanced ES as of V17

Licensing

- SIMATIC Cartesian Portal is available as Runtime option for TIA Portal. A license is required for each CPU on which SIMATIC Cartesian Portal runs.
- The product can only be ordered via Online Software Delivery (OSD). The download contains the license certificate and the software.
- The following additional licenses are required to use SIMATIC Cartesian Portal:
 - SIMATIC STEP 7 Professional (TIA Portal) as of V17
 - SIMATIC WinCC Advanced ES as of V17

Ordering data

Article No.

SIMATIC Cartesian Portal V1.0

Single Runtime license download includes license certificate; programming and control of multi-axis kinematics with sPTP for 2-6 positioning axes; executable on SIMATIC S7-1500(F) from SIMATIC S7-1511 upwards, including user operating concept Consignee email address required for delivery

6ES7823-0GE01-1AA0

Overview


SIMATIC Robot Pick AI (robot capability) is a pre-trained, Deep Learning-based image processing software for advanced robotics applications that provides out-of-the-box cognitive performance for selecting rugged pick points (6-DOF gripping poses) for arbitrary "unknown" items in boxes at runtime. It is a generic capability for arbitrary objects. Specific training through CAD models is not required. Suitable, for example, for robotic solutions for unit load removal in intralogistics.

Ordering data
SIMATIC Robot Pick AI V1.1

AI vision software for pick-by-robot applications with TIA Portal integration, single license, product download includes: Certificate of License (CoL), AI Vision software package, STEP 7 (TIA Portal) FBs and documentation¹⁾.

Tested industrial PCs:

SIMATIC IPC BX-39A,
SIMATIC S7-1500 TM MFP.

Supported 3D cameras:

IDS Ensenso N-series, Zivid 2 L100,
Intel RealSense D400.

License is activated via the responsible sales contact.

Article No.
6ES7865-0AD10-1AA0

¹⁾ Up-to-date information and download availability can be found at <https://www.siemens.com/tia-online-software-delivery>.

Software for SIMATIC Controllers

Software for common tasks

For network planning/commissioning

SINETPLAN 2.0 network planning

Overview



SINETPLAN topology view

The SINETPLAN Siemens Network Planner

- supports planners of automation systems based on PROFINET and
- facilitates the professional and proactive simulation of a plant/system network.

Licenses

- The engineering software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

Siemens Network Planner SINETPLAN V2.0

Software for simulating PROFINET networks; 3 languages en/de/zh, executable under Windows 7 and Windows 10 (64-bit each)

- Floating license; software and documentation on DVD, license key on USB flash drive
- Floating license; software download incl. license key¹⁾ Email address required for delivery

6ES7853-0AA01-0YA5

6ES7853-0AE01-0YA5

Siemens Network Planner SINETPLAN Upgrade V2.0

Software for simulating PROFINET networks; upgrade from V1.x to V2.0; 3 languages en/de/zh, executable under Windows 7 and Windows 10 (64-bit each)

- Floating license; software and documentation on DVD, license key on USB flash drive
- Floating license; software download incl. license key¹⁾ Email address required for delivery

6ES7853-0AA01-0YE5

6ES7853-0AE01-0YE5

¹⁾ Up-to-date information and download availability can be found under <https://support.industry.siemens.com/cs/ww/en/view/109763136>.


Technical specifications

SINETPLAN V2.0 can be used on the following operating systems (64-bit each):

- Microsoft Windows 7 Professional SP1
- Microsoft Windows 7 Enterprise SP1
- Microsoft Windows 7 Ultimate SP1
- Microsoft Windows 10 Home Version 1809
- Microsoft Windows 10 Pro Version 1809
- Microsoft Windows 10 Enterprise Version 1809

PROFINET Asset Management PRONETA Professional

Overview

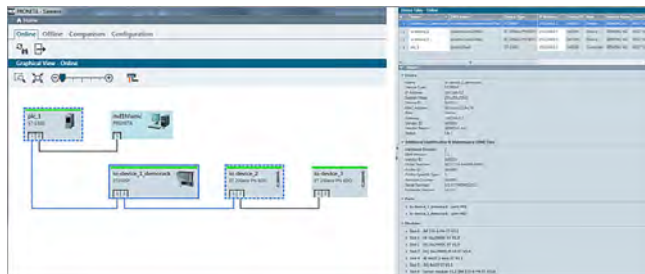

PRONETA Professional

Asset management and diagnostics with PRONETA Professional

With PRONETA Professional, the network can be scanned automatically at regular intervals and the real plant configuration can thereby be documented transparently. This allows for new opportunities and for better planning of maintenance and servicing which, in turn, optimizes plant operation. This prevents undesired situations, such as a missing, compatible spare part, during maintenance and service. This increases production availability.

In addition, with PROFlenergy diagnostics, device statuses can be recognized or the mode can be changed. The measured values can also be displayed for devices with the PROFlenergy metering function. Furthermore, the data record wizard provides the option of sending PROFINET data records to PROFINET devices via acyclic communication.

Licenses

- The software can be installed on one computer (single license).

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<https://www.siemens.com/simatic-licenses>.

Ordering data

Article No.

PRONETA Professional V1.1

Software for asset management with API, PROFlenergy diagnostics, data record wizard; 2 languages en/de, can be run under Windows 7 (32-bit and 64-bit) and Windows 10 (64-bit)

Single license; software, documentation and license for download

6ES7853-2BE01-0YA0

Single license upgrade from V1.0 to V1.1; software, documentation and license for download

6ES7853-2BE01-0YE0

Technical specifications

PRONETA Professional V1.1 can be used on the following operating systems:


- Microsoft Windows 7 (32-bit and 64-bit)
 - Microsoft Windows 7 Professional SP1
 - Microsoft Windows 7 Enterprise SP1
 - Microsoft Windows 7 Ultimate SP1
- Microsoft Windows 10 (64-bit):
 - Microsoft Windows 10 Home Version 1809
 - Microsoft Windows 10 Pro Version 1809
 - Microsoft Windows 10 Enterprise Version 1809

Software for SIMATIC Controllers

Software for common tasks
For maintenance

SIMATIC Automation Tool

Overview

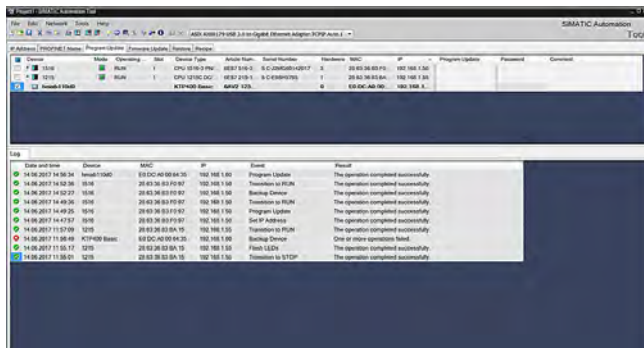

- To support commissioning and service activities independent of the engineering framework
- For configuration, operation, maintenance and documentation of automation networks
- Rapid overview of the status of the SIMATIC automation system
- Time savings thanks to parallel operations (license required)
- Optimum upgrade support for the devices used and their versions through the display of article numbers, firmware versions and HW versions
- Simple traceability of performed operations and resulting changes in the system through the optional, automatic storage of event log entries in a file
- Automated processes for optimum API-based workflows (license required)

Supported products:

- SIMATIC ET 200
 - ET 200AL IM
 - ET 200AL SM and IO-Link
 - ET 200eco
 - ET 200M IM
 - ET 200MP IM
 - ET 200S IM
 - ET 200pro IM
 - ET 200pro IO-Link and RFID
 - ET 200SP CPU
 - ET 200SP IM and server modules
 - ET 200SP SM, AS-i, CM, CP, TM, IO-Link, motor starters
- SIMATIC S7-1200
 - S7-1200 CPU
 - S7-1200 SM and CM
- SIMATIC S7-1500
 - S7-1500 CPU
 - S7-1500 SM and other modules
- SIMATIC HMI
 - HMI Basic 2nd Generation
 - HMI Comfort
 - HMI Mobile
- SITOP power supplies
- RFID and MOBY
- SCALANCE

Licenses

- The software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- The following license types are provided:
 - 21-day trial license (without license key); download as a registered customer from <https://support.industry.siemens.com/cs/ww/en/view/98161300>.
 - SIMATIC Automation Tool – Basic scope of functions
 - SIMATIC Automation Tool Advanced – extended scope of functions, including:
 - Scheduler for planning device operations at a specific time and with selectable frequency
 - Card browser for working with files and folders on SIMATIC Memory Cards in CPUs
 - Extended options for handling SIMATIC Automation Tool projects - Archiving of SAT projects and associated file data
 - Support of devices downstream from a NAT router
 - Possibility to insert multiple devices in one operation
 - Support of CPUs connected via a CM (communications module) or CP (communications processor)
 - Firmware installation in 2 sequences - Option to download the firmware update files to devices and activate the new firmware at a later time.
 - SIMATIC Automation Tool Advanced PowerPack V3/V4 upgrade to Advanced V4 - License key upgrade for activating the extended V4 functions based on an available V3/V4 license key.

You can find more information on the Software Update Service, license types, Online Software Delivery and handling your SW licenses with the Automation License Manager under

<http://www.siemens.com/simatic-licenses>.

Ordering data	Article No.	Article No.	
SIMATIC Automation Tool Basic V5.0, floating license download Software for commissioning and service of machines and plants; software, documentation and license key for downloading; Conformance Class A; 6 languages: en, de, fr, es, it, zh; Executable under Windows 10 and Windows 11 (64-bit) Consignee email address required for delivery	6ES7853-1AE05-0YA5	SIMATIC Automation Tool SDK V5.0 API software and documentation for creating customer applications for commissioning and servicing machines and plants; Software and documentation for downloading ¹⁾ ; Conformance Class A; 6 languages: en, de, fr, es, it, zh; Executable under Windows 10 and Windows 11 (64-bit) Consignee email address required for delivery	6ES7853-1AE05-0AG8
SIMATIC Automation Tool Advanced V5.0 floating license download Commissioning and service software for machines and extended scope of functions (e.g. scheduler, support for devices downstream from a NAT router, archiving function for SAT projects and associated file data); Software, documentation and license key for downloading ¹⁾ ; Conformance Class A; 6 languages: en, de, fr, es, it, zh; Executable under Windows 10 and Windows 11 (64 bit); Consignee email address required for delivery	6ES7853-1AE15-0YA5	SIMATIC Automation Tool SDK V5.0 API software and documentation for creating customer applications for commissioning and servicing machines and plants; Software and documentation for downloading ¹⁾ ; Conformance Class A; 6 languages: en, de, fr, es, it, zh; Executable under Debian 11, Ubuntu 20, 22 and Industrial OS 3.3 Consignee email address required for delivery	6ES7853-1LE05-0AG8
SIMATIC Automation Tool Advanced V5; PowerPack SIMATIC Automation Tool Basic -> SIMATIC Automation Tool Advanced Floating license download; software for commissioning and servicing machines and plants; Conformance Class A; Software, documentation and license key for downloading ¹⁾ ; 6 languages: en, de, fr, es, it, zh; Windows 10 and 11 (64-bit); Consignee email address required for delivery	6ES7853-1AE05-0YC5	SIMATIC Transfer Tool V3 Linux X86 Single license for 1 server ¹⁾ Consignee email address required for delivery	6AV6676-6LT00-3YA5
		SIMATIC Transfer Tool V3 Linux X86 Volume license, unlimited number of servers ¹⁾ Consignee email address required for delivery	6AV6676-6LT00-3AG8
		SIMATIC Transfer Tool V4 Linux X86 Single license for 1 server ¹⁾ Consignee email address required for delivery	6AV6676-6LT00-4YA5
		SIMATIC Transfer Tool V4 Linux X86 Volume license, unlimited number of servers ¹⁾ Consignee email address required for delivery	6AV6676-6LT00-4AG8

¹⁾ Up-to-date information and download availability can be found at <https://support.industry.siemens.com/cs/ww/en/view/98161300>.

Technical specifications

The SIMATIC Automation Tool can be used on the following operating systems (64-bit only):


- Windows 7 Home Premium SP1 (only V3.1)
- Windows 7 Professional SP1 (only V3.1)
- Windows 7 Enterprise SP1 (only V3.1)
- Windows 7 Ultimate SP1 (only V3.1)
- Windows 10 Home
- Windows 10 Pro
- Windows 10 Enterprise
- Windows 10 IoT Enterprise

Software for SIMATIC Controllers

Software for common tasks
For maintenance

SIMATIC PDM

Overview

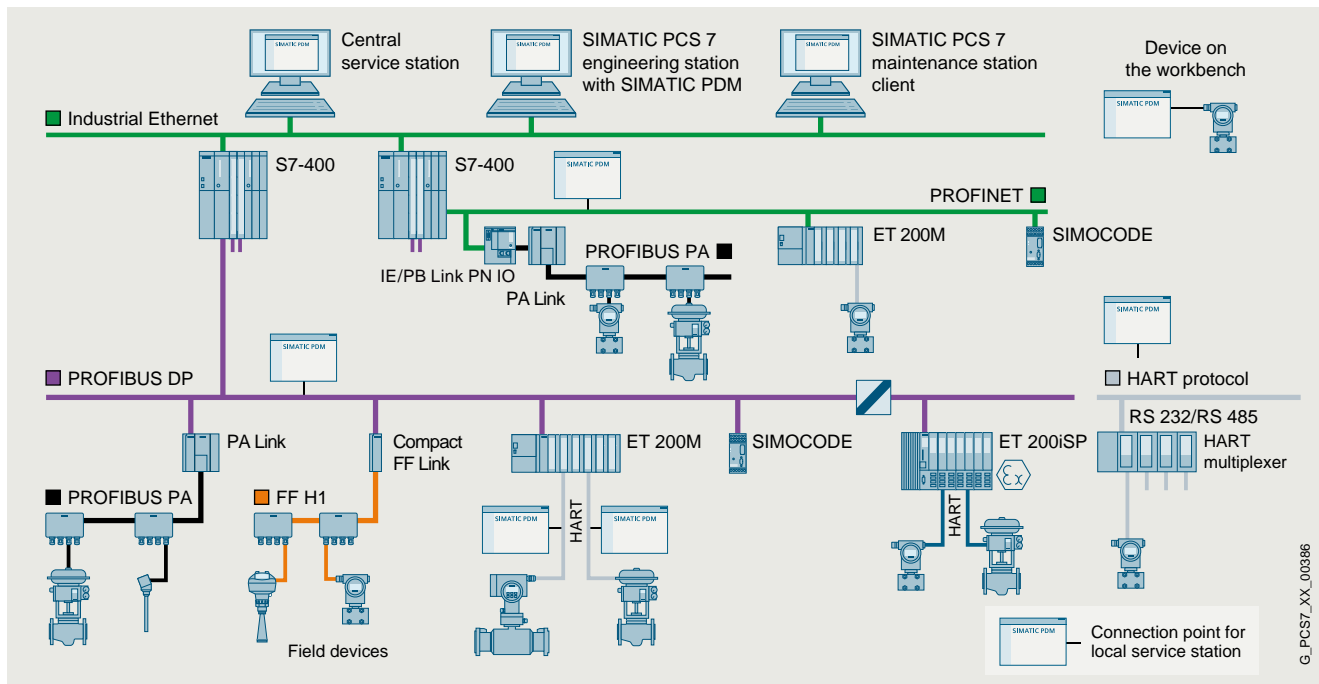

Configuration options with SIMATIC PDM

SIMATIC PDM (Process Device Manager) is a universal, vendor-independent tool for the configuration, parameter assignment, commissioning, diagnostics and servicing of intelligent field devices (sensors and actuators) and field components (remote I/Os, multiplexers, control room devices, compact controllers, compact modules), which in the following sections will be referred to simply as devices.

With *onesoftware* product, SIMATIC PDM enables users to work with over 4 500 devices and device variants of Siemens and over 200 other manufacturers worldwide on a *single*homogeneous user interface.

The user interface satisfies the requirements of the VDI/VDE GMA 2187 and IEC 65/349/CD directives. Parameters and functions for all supported devices are displayed in a consistent and uniform fashion independent of their communications interface. Even complex devices with several hundred parameters can be represented clearly and processed quickly. Using SIMATIC PDM it is very easy to navigate in highly complex stations such as remote I/Os and even connected field devices.

From the viewpoint of device integration, SIMATIC PDM is the most powerful open process device manager on the global market. Devices not previously supported can be integrated in SIMATIC PDM by importing their device description packages (either EDD or FDI). This provides security for your investment and saves you investment costs, training expenses and follow-up costs.

SIMATIC PDM supports the operative system management in particular through:

- Uniform representation and operation of devices
- Uniform representation of diagnostics information
- Indicators for preventive maintenance and servicing
- Detection of changes in the project and device
- Increasing the operational reliability
- Reducing the investment, operating and maintenance costs
- Quantity options for
 - Transfer of parameters between devices
 - Transfer of parameter sets to the devices
 - Export and import functions
 - Diagnostics update

SIMATIC PDM can be used extremely flexibly and tailored to a specific task for field device service:

- Single-point station for point-to-point connection to field devices
- Local service and parameter assignment station with connection to fieldbus segments
- Central service and parameter assignment station with connection to plant bus
- Central HART service and parameter assignment station for HART multiplexers and WirelessHART field devices
- Integrated into the stand-alone SIMATIC PDM Maintenance Station
- Integrated into the SIMATIC PCS 7 process control system

G_PCST7_XX_00386

Overview

Maintenance personnel can assign field device parameters at mobile and stationary workstations with SIMATIC PDM. Practically every workstation integrated in the production plant can be used for configuration. Service personnel are thus able to work directly at the location of the field device, while data is stored centrally in the engineering station or maintenance station. This leads to a significant shortening of maintenance and travel times. Additional device-independent system functions support higher-level maintenance stations for creating progress lists for work and servicing.

When a maintenance station is configured in the SIMATIC PCS 7 process control system, SIMATIC PDM is integrated into it and transmits parameter data, diagnostic information and processing information. You can switch directly to the SIMATIC PDM views from the diagnostics faceplates in the maintenance station to perform diagnostics and work on the device in more detail.

A SIMATIC PDM user administration system based on SIMATIC Logon is used to assign various roles with defined function privileges to users. These function privileges refer to SIMATIC PDM system functions, e.g. writing to the device.

For all devices integrated with device description packages, SIMATIC PDM provides a range of information for display and further processing on the maintenance station, for example:

- Device type information (electronic rating plate)
- Detailed diagnostics information (manufacturer information, information on error diagnostics and troubleshooting, further documentation)
- Results of internal condition monitoring functions
- Status information (for example local configuration changes), device test completed
- Information on changes (Audit Trail report)
- Parameter information

Ordering data

SIMATIC PDM Stand alone product packages

Minimum configuration

SIMATIC PDM Single Point V9.2 including 1 TAG; product package for operation and configuration of one field device; communication via PROFIBUS DP/PA, HART (modem, RS 232, PROFIBUS/PROFINET), Modbus, Ethernet or PROFINET

Additional functions or SIMATIC PDM TAGs are not possible

6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information), floating license for 1 user

Without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive and Certificate of License, bundle with 1 × SIMATIC PDM Software Media Package per order item
- Online delivery
License key download and online Certificate of License combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download)
Note:
Email address required!

6ES7658-3HA78-0YA5

6ES7658-3HA78-0YH5

Article No.

Article No.

Basic configuration for individual product packages

SIMATIC PDM Basic V9.2

including 4 TAGs; product package for operation and configuration of field devices and components; communication via PROFIBUS DP/PA, HART (modem, RS 232, PROFIBUS/PROFINET), Modbus, Ethernet or PROFINET

6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information), floating license for 1 user

Without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive and Certificate of License, bundle with 1 × SIMATIC PDM Software Media Package per order item
- Online delivery
License key download and online Certificate of License combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download)
Note:
Email address required!

6ES7658-3AB78-0YA5

6ES7658-3AB78-0YH5

Software for SIMATIC Controllers

Software for common tasks

For maintenance

SIMATIC PDM

Ordering data

Article No.

Article No.

Configuration for a local service and parameter assignment station

SIMATIC PDM Service V9.2

Product package for service and measuring circuit tests on a local service station, with

- SIMATIC PDM Basic incl. 4 TAGs
- 50 TAGs

6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information), floating license for 1 user

Without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive and Certificate of License, bundle with 1 × SIMATIC PDM Software Media Package per order item
- Online delivery
License key download and online Certificate of License combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download)
Note: Email address required!

6ES7658-3JD78-0YA5

6ES7658-3JD78-0YH5

Configuration for a central service and parameter assignment station

SIMATIC PDM Stand-alone Server V9.2

Product package for service and device management in plant units, with

- SIMATIC PDM Basic incl. 4 TAGs
- SIMATIC PDM Extended
- SIMATIC PDM Server
- 2 × SIMATIC PDM 1 Client
- 100 TAGs

6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information), single license for 1 installation

Without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive and Certificate of License, bundle with 1 × SIMATIC PDM Software Media Package per order item
- Online delivery
License key download and online Certificate of License combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download)
Note: Email address required!

6ES7658-3TX78-0YA5

6ES7658-3TX78-0YH5

SIMATIC PDM system-integrated product packages

Configuration for integration in SIMATIC S7 configuration environment

SIMATIC PDM S7 V9.2

Product package for use in a SIMATIC S7 configuration environment, with

- SIMATIC PDM Basic incl. 4 TAGs
- SIMATIC PDM Extended
- SIMATIC PDM Integration in STEP 7/PCS 7
- 100 TAGs

6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information), floating license for 1 user

Without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive and Certificate of License, bundle with 1 × SIMATIC PDM Software Media Package per order item
- Online delivery
License key download and online Certificate of License combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download)
Note: Email address required!

6ES7658-3KD78-0YA5

6ES7658-3KD78-0YH5

Configuration for integration in SIMATIC PCS 7 configuration environment

SIMATIC PDM PCS 7 V9.2

Product package for use in a SIMATIC PCS 7 configuration environment

6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information)

Floating license for 1 user, with

- SIMATIC PDM Basic incl. 4 TAGs
- SIMATIC PDM Extended
- SIMATIC PDM Integration in STEP 7/PCS 7
- SIMATIC PDM Routing
- 100 TAGs

Without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive and Certificate of License, bundle with 1 × SIMATIC PDM Software Media Package per order item
- Online delivery
License key download and online Certificate of License combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download)
Note: Email address required!

6ES7658-3LD78-0YA5

6ES7658-3LD78-0YH5

Ordering data	Article No.	Article No.
<p>SIMATIC PDM PCS 7-FF V9.2 Product package for use in a SIMATIC PCS 7 configuration environment, including FOUNDATION Fieldbus H1 communication</p> <p>6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information)</p> <p>Floating license for 1 user, with</p> <ul style="list-style-type: none"> - SIMATIC PDM Basic incl. 4 TAGs - SIMATIC PDM Extended - SIMATIC PDM Integration in STEP 7/PCS 7 - SIMATIC PDM Routing - SIMATIC PDM Communication FOUNDATION Fieldbus - 100 TAGs <p>Without SIMATIC PCS 7 Software Media Package</p> <ul style="list-style-type: none"> • Goods delivery License key on USB flash drive and Certificate of License, bundle with 1 × SIMATIC PDM Software Media Package per order item • Online delivery License key download and online Certificate of License combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required! 	<p>6ES7658-3MD78-0YA5</p> <p>6ES7658-3MD78-0YH5</p>	<p>Optional product components for SIMATIC PDM</p> <p>SIMATIC PDM Extended V9.2 For enabling additional system functions</p> <p>6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information), floating license for 1 user</p> <p>Without SIMATIC PCS 7/SIMATIC PDM Software Media Package</p> <ul style="list-style-type: none"> • Goods delivery License key on USB flash drive and Certificate of License • Online delivery (without SIMATIC PCS 7/ SIMATIC PDM Software Media Package) License key download and online Certificate of License Note: Email address required! <p>SIMATIC PDM Integration in STEP 7/SIMATIC PCS 7 V9.2 For integration in a SIMATIC S7/SIMATIC PCS 7 configuration environment</p> <p>6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information), floating license for 1 user</p> <p>Without SIMATIC PCS 7/SIMATIC PDM Software Media Package</p> <ul style="list-style-type: none"> • Goods delivery License key on USB flash drive and Certificate of License • Online delivery License key download and online Certificate of License Note: Email address required!
<p>SIMATIC PDM PCS 7 Server V9.2 Product package for use in a SIMATIC PCS 7 configuration environment, including server functionality</p> <p>6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information)</p> <p>Single license for 1 installation, with</p> <ul style="list-style-type: none"> - SIMATIC PDM Basic incl. 4 TAGs - SIMATIC PDM Extended - SIMATIC PDM Integration in STEP 7/PCS 7 - SIMATIC PDM Routing - SIMATIC PDM Server - 100 TAGs <p>Without SIMATIC PCS 7 Software Media Package</p> <ul style="list-style-type: none"> • Goods delivery License key on USB flash drive and Certificate of License, bundle with 1 × SIMATIC PDM Software Media Package per order item • Online delivery License key download and online Certificate of License combined with SIMATIC PDM Software Media Package (SIMATIC PDM and device library software download) Note: Email address required! 	<p>6ES7658-3TD78-0YA5</p> <p>6ES7658-3TD78-0YH5</p>	<p>SIMATIC PDM Routing V9.2 For plant-wide navigation to field devices</p> <p>6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information), floating license for 1 user</p> <p>Without SIMATIC PCS 7/SIMATIC PDM Software Media Package</p> <ul style="list-style-type: none"> • Goods delivery License key on USB flash drive and Certificate of License • Online delivery License key download, online Certificate of License Note: Email address required!

Software for SIMATIC Controllers

Software for common tasks

For maintenance

SIMATIC PDM

Ordering data

SIMATIC PDM Server V9.2

For activating the server functionality

6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information), single license for 1 installation

Without SIMATIC PCS 7/SIMATIC PDM Software Media Package

- Goods delivery
License key on USB flash drive, Certificate of License
- Online delivery
License key download and online Certificate of License
Note:
Email address required!

6ES7658-3TX78-2YB5

6ES7658-3TX78-2YH5

SIMATIC PDM Communication FOUNDATION Fieldbus V9.2

For communication with field devices on FOUNDATION Fieldbus H1

6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information), floating license for 1 user

Without SIMATIC PCS 7/SIMATIC PDM Software Media Package

- Goods delivery
License key on USB flash drive and Certificate of License
- Online delivery
License key download and online Certificate of License
Note:
Email address required!

6ES7658-3QX78-2YB5

6ES7658-3QX78-2YH5

SIMATIC PDM HART Server V9.2

For using HART multiplexers as well as for configuration of WirelessHART field devices

6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information), floating license for 1 user

Without SIMATIC PCS 7/SIMATIC PDM Software Media Package

- Goods delivery
License key on USB flash drive and Certificate of License
- Online delivery
License key download and online Certificate of License
Note:
Email address required!

6ES7658-3EX78-2YB5

6ES7658-3EX78-2YH5

SIMATIC PDM Command Interface V9.2

Use of remote control of SIMATIC PDM with 1 x SIMATIC PDM 1 Client

Note:
Special conditions of purchase and supply

- Goods delivery
(without SIMATIC PCS 7/ SIMATIC PDM Software Media Package)
License key on USB flash drive and Certificate of License

6ES7658-3SX78-2YB5

SIMATIC PDM 1 Client

Cumulative client license for SIMATIC PDM configurations with SIMATIC PDM Server, software class A, single license for 1 installation

- Goods delivery
License key on USB flash drive and Certificate of License
- Online delivery
License key download and online Certificate of License
Note:
Email address required!

6ES7658-3UA00-2YB5

6ES7658-3UA00-2YH5

SIMATIC PDM TAGs

TAG licenses for expanding the available TAG volume, cumulative, software class A, floating license for 1 user

- Goods delivery
License key on USB flash drive and Certificate of License
 - 10 TAGs
 - 100 TAGs
 - 1 000 TAGs
- Online delivery
License key download and online Certificate of License
Note:
Email address required!
 - 10 TAGs
 - 100 TAGs
 - 1 000 TAGs

6ES7658-3XC00-2YB5

6ES7658-3XD00-2YB5

6ES7658-3XE00-2YB5

6ES7658-3XC00-2YH5

6ES7658-3XD00-2YH5

6ES7658-3XE00-2YH5

SIMATIC PDM Software Media Package

SIMATIC PDM Software Media Package V9.2

Installation software without license, 6 languages (English, German, French, Italian, Spanish, Chinese), software class A, runs with Windows 10 Professional 64-bit, Windows 10 Enterprise 2019 LTSC 64-bit, for operation within the product family SIMATIC PCS 7 the specifications there take precedence, (see SIMATIC PDM V9.2 Readme for the latest information)

Without SIMATIC PCS 7 Software Media Package

Note:
Can only be used in conjunction with a valid license or in demo mode!

- Goods delivery
SIMATIC PDM and device library software on DVD
- Online delivery
SIMATIC PDM and device library software download
Note:
Email address required!

6ES7658-3GX78-0YT8

6ES7658-3GX78-0YG8

Technical specifications**SIMATIC PDM V9.2**

Hardware	<ul style="list-style-type: none">• PG/PC/notebook with processor corresponding to operating system requirements
Operating system (alternatives)	<ul style="list-style-type: none">• Windows 10 Professional• Windows 10 Enterprise 2019 LTSC• When integrated, specifications for SIMATIC PCS 7 take precedence
Integration in STEP 7/PCS 7	<ul style="list-style-type: none">• SIMATIC PCS 7 V8.1/V8.2 (without Communication FOUNDATION Fieldbus)• SIMATIC PCS 7 V9.x
SIMATIC PDM Client	<ul style="list-style-type: none">• Microsoft Internet Explorer 10 or 11• Google Chrome

Software for SIMATIC Controllers

Software for common tasks
For administration

Central user management (UMC)

Overview

The User Management Component (UMC) provides the possibility of central user management. Through the connection to the TIA Portal, users and user groups can be defined and managed across projects. Connection to a Microsoft Active Directory is also possible.

Licensing

- Central user management (UMC) is supplied with the TIA Portal.
- The license model depends on the number of user accounts per UMC domain.
- Up to ten user accounts can be used without a license.
- For additional user accounts, 365-day rental licenses are available to accumulate the required number of centrally managed users.

Ordering data

Central user management (UMC)

Software component to implement central user management, included in the scope of supply of the respective products (e.g. TIA Portal).

The license model depends on the number of user accounts per UMC domain. Use of max. 10 user accounts possible without a license.

6 languages: en, de, fr, es, it, zh; executable under Windows 7 (64-bit), Windows 10 (64-bit), Windows Server 2012R2 (64-bit), Windows Server 2016/2019 (64-bit)


- Rental license 365 days with license certificate for 100 user accounts
- Rental license 365 days with license certificate for 4 000 user accounts

Article No.

6ES7823-1UE30-0YA0

6ES7823-1UE10-0YA0

Overview

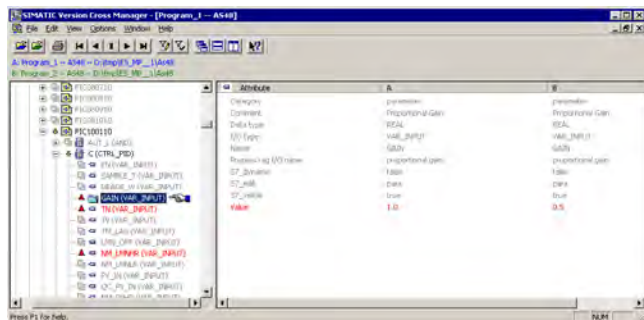

The SIMATIC Version Cross Manager is a user-friendly tool for determining the differences between various versions of individual projects or multiprojects by:

- Tracing missing, additional or differing objects by comparing hardware configuration, communication, plant hierarchy, CFC/SFC charts, SFC details, block types, messages, global tags, signals and run sequences
- Graphic display of comparison results in a combination of tree and tabular formats
- Clear hierarchical structuring according to the technological hierarchy of the plant
- Color-coded identification of the differences

Note:

As the function "Control module adjustment" is based on a basic functionality of the Version Cross Manager (VXM), you need a VXM license to use this function. In the absence of a license, a message appears telling you to install Version Cross Manager. This is not actually necessary, all you need to install is a valid VXM license that will enable the relevant functionality on the engineering station.

Ordering data

Article No.

SIMATIC Version Cross Manager V9.0

6 languages (English, German, French, Italian, Spanish, Chinese), software class A

Runs with the following operating systems (see VXM Readme in the Siemens Industry Online Support for the latest information)

- Windows 7 Ultimate 64-bit
- Windows 10 Enterprise 2015 LTS 64-bit
- Windows Server 2012 R2 Standard Edition 64-bit
- Windows Server 2016 Standard Edition 64-bit

Floating license for 1 user, without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive and Certificate of License as well as TIA Engineering Toolset CD

6ES7658-1CX58-2YA5

- Online delivery
License key download, online Certificate of License and TIA Engineering Toolset (software download)
Note:
Email address required!

6ES7658-1CX58-2YH5

Upgrade package (only for TIA applications)**SIMATIC Version Cross Manager upgrade from V7.1/V8.2 to V9.0**

6 languages (English, German, French, Italian, Spanish, Chinese), software class A, for operating systems see above

Floating license for 1 user, without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive, Certificate of License and TIA Engineering Toolset CD

6ES7658-1CX58-2YE5

- Online delivery
License key download, online Certificate of License and TIA Engineering Toolset (software download)
Note:
Email address required!


6ES7658-1CX58-2YK5

Software for SIMATIC Controllers

Software for common tasks
For administration

Version Trail

Overview

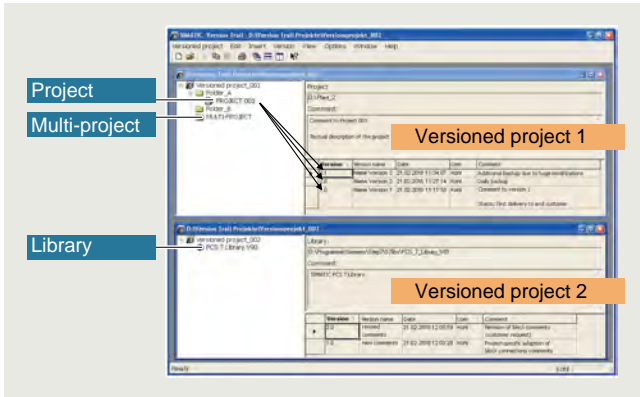

SIMATIC Version Trail is a software option for engineering which, together with the SIMATIC Logon central user administration, can assign a version history to libraries, projects and multiprojects.

Ordering data

Article No.

SIMATIC Version Trail V9.0

6 languages (English, German, French, Italian, Spanish, Chinese), software class A

Runs with the following operating systems (see VT Readme in the Siemens Industry Online Support for the latest information)

- Windows 7 Ultimate 64-bit
- Windows 10 Enterprise 2015 LTS 64-bit
- Windows Server 2012 R2 Standard Edition 64-bit
- Windows Server 2016 Standard Edition 64-bit

Floating license for 1 user, without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive, Certificate of License and TIA Engineering Toolset CD
- Online delivery
License key download, online Certificate of License and TIA Engineering Toolset (software download)
Note:
Email address required!

6ES7658-1FX58-2YA5

6ES7658-1FX58-2YH5

Upgrade package (only for TIA applications)

SIMATIC Version Trail Upgrade V8.x to V9.0

6 languages (English, German, French, Italian, Spanish, Chinese), software class A, for operating systems see above

Floating license for 1 user, without SIMATIC PCS 7 Software Media Package

- Goods delivery
License key on USB flash drive, Certificate of License
- Online delivery
License key download, online Certificate of License and TIA Engineering Toolset (software download)
Note:
Email address required!

6ES7658-1FX58-2YE5

6ES7658-1FX58-2YK5

SIMATIC programming devices



13/2

Programming devices

13/2

Field PG M6

13/7

Accessories

13/7

External prommer

13/8

Communications software

13/8

SOFTNET for Industrial Ethernet

13/10

SOFTNET for PROFIBUS

SIMATIC programming devices

Programming devices

Field PG M6

Overview



- The mobile, industry-standard programming device for automation engineers with a powerful, eighth-generation Intel® Core™ i processor (Coffee Lake) and high-speed RAM (DDR4 RAM)
- Elegant, robust enclosure made of light-weight stable injection-molded magnesium with rubber-protected corners and retractable carry-handle
- Can optimally be used both for engineering in the office and for the commissioning, service or maintenance of automation systems
- Industrial notebook with all commonly used interfaces for industrial applications
- Can be used immediately thanks to pre-installed SIMATIC engineering software

Ordering data

Article No.

Article No.

Field PG M6 Comfort programming device

6ES7718- 0 ■ ■ 0 ■ - ■ ■ 2

Intel i5-8400H processor (8 MB Smart Cache, 2.5 to 4.2 GHz, 4 cores + Hyper-Threading), 15.6" display, Full HD (1920x1280), DVD+-RW drive, UHD graphics 630, WLAN 802.11ac, Bluetooth v5.0; without SIMATIC S5 interface, without SIMATIC S5 EPROMMER

RAM

- 1 x 8 GB DDR4 SDRAM SO-DIMM **A**
- 1 x 16 GB DDR4 SDRAM SO-DIMM **B**
- 1 x 32 GB DDR4 SDRAM SO-DIMM **C**
- 2 x 32 GB DDR4 SDRAM SO-DIMM **D**

Hard disk

- 256 GB SSD SATA (2.5") **A**
- 512 GB SSD SATA (2.5") **B**
- 2 TB SSD SATA (2.5") **C**

Keyboard and power cable (essential)

- Keyboard: QWERTY (& German); power supply cable: Germany, France, the Netherlands, Spain, Belgium, Austria, Sweden, Finland **0**
- Keyboard: AZERTY (France); power supply cable: Germany, France, the Netherlands, Spain, Belgium, Austria, Sweden, Finland **1**
- Keyboard: QWERTY (& German); power supply cable: Italy **2**
- Keyboard: QWERTY (& German); power supply cable: Switzerland **3**
- Keyboard: QWERTY (& German); power supply cable: USA **4**
- Keyboard: QWERTY (& German); power supply cable: United Kingdom **5**
- Keyboard: QWERTY (& German); power supply cable: China; approval for China (CCC) **6**
- Keyboard: QWERTY (& German); without power supply cable **7**
- Keyboard: QWERTY (& German); power supply cable: India **8**

M.2 NVME hard drive

- Without M.2 hard drive **0**
- 512 GB SSD NVME (M.2) **1**
- 1 TB SSD NVME M.2 **2**

Field PG M6 Comfort programming device

6ES7718- 0 ■ ■ 0 ■ - ■ ■ 2

Operating system

- Windows 10 Enterprise, 64-bit **A**
- Windows 10 Enterprise LTSC 2019, 64-bit **B**
- Without operating system **N**

SIMATIC Software licenses

- Trial license: STEP 7 Professional Combo (STEP 7 Prof. V16 and STEP 7 Prof. 2017 SR1), WinCC Advanced Combo (WinCC V16 and WinCC flexible 2008 SP5), Safety Advanced Combo (Safety Adv. V16 and Distributed Safety V5.4 SP5) **A**

- License: STEP 7 & WinCC & Safety in the TIA Portal: STEP 7 Prof. V16, WinCC Adv. V16, Safety Advanced V16 **B**

- License: STEP 7 & WinCC & Safety Combo: STEP 7 Professional Combo (STEP 7 Prof. V16 and STEP 7 Prof. 2017 SR1), WinCC Advanced Combo (WinCC V16 and WinCC flexible 2008 SP5), Safety Advanced Combo (Safety Adv. V16 and Distributed Safety V5.4 SP5) **C**

13

Ordering data	Article No.	Article No.	
<p>Field PG M6 Advanced programming device</p> <p>Intel i7-8850H processor (9 MB Smart Cache, 2.6 to 4.3 GHz, 6 cores + Hyper-Threading), 15.6" display, full HD (1920x1280), DVD+-RW drive, UHD graphics 630, WLAN 802.11ac, Bluetooth v5.0</p> <p>RAM</p> <ul style="list-style-type: none"> • 1 x 8 GB DDR4 SDRAM SO-DIMM • 1 x 16 GB DDR4 SDRAM SO-DIMM • 1 x 32 GB DDR4 SDRAM SO-DIMM • 2 x 32 GB DDR4 SDRAM SO-DIMM <p>Hard disk</p> <ul style="list-style-type: none"> • 256 GB HDD SATA • 512 GB SSD SATA • 2 TB SSD SATA <p>SIMATIC S5 interface</p> <ul style="list-style-type: none"> • Without S5 interface, without S5 EPROMMER • With S5 interface, with S5 EPROMMER; incl. STEP 5 license, S5 PLC cable and EPROM adapter <p>Keyboard and power cable (essential)</p> <ul style="list-style-type: none"> • Keyboard: QWERTY (& German); power supply cable: Germany, France, the Netherlands, Spain, Belgium, Austria, Sweden, Finland • Keyboard: AZERTY (France); power supply cable: Germany, France, the Netherlands, Spain, Belgium, Austria, Sweden, Finland • Keyboard: QWERTY (& German); power supply cable: Italy • Keyboard: QWERTY (& German); power supply cable: Switzerland • Keyboard: QWERTY (& German); power supply cable: USA • Keyboard: QWERTY (& German); power supply cable: United Kingdom • Keyboard: QWERTY (& German); power supply cable: China; approval for China (CCC) • Keyboard: QWERTY (& German); without power supply cable • Keyboard: QWERTY (& German); power supply cable: India 	<p>6ES7718- 1 - 2</p> <p>A B C D</p> <p>A B C</p> <p>0 1</p> <p>0 1 2 3 4 5 6 7 8</p>	<p>Field PG M6 Advanced programming device</p> <p>M.2 NVME hard drive</p> <ul style="list-style-type: none"> • Without M.2 hard drive • 512 GB SSD NVME (M.2) • 1 TB SSD NVME M.2 <p>Operating system</p> <ul style="list-style-type: none"> • Windows 10 Enterprise, 64-bit • Windows 10 Enterprise LTSC 2019, 64-bit • Without operating system <p>SIMATIC Software licenses</p> <ul style="list-style-type: none"> • Trial license: STEP 7 Professional Combo (STEP 7 Prof. V16 and STEP 7 Prof. 2017 SR1), WinCC Advanced Combo (WinCC V16 and WinCC flexible 2008 SP5), Safety Advanced Combo (Safety Adv. V16 and Distributed Safety V5.4 SP5) • License: <u>STEP 7 & WinCC & Safety in the TIA Portal:</u> STEP 7 Prof. V16, WinCC Adv. V16, Safety Advanced V16 • License: <u>STEP 7 & WinCC & Safety Combo:</u> STEP 7 Professional Combo (STEP 7 Prof. V16 and STEP 7 Prof. 2017 SR1), WinCC Advanced Combo (WinCC V16 and WinCC flexible 2008 SP5), Safety Advanced Combo (Safety Adv. V16 and Distributed Safety V5.4 SP5) 	<p>6ES7718- 1 - 2</p> <p>0 1 2</p> <p>A B N</p> <p>A B C</p>

SIMATIC programming devices

Programming devices

Field PG M6

Ordering data

Ordering data	Article No.	Ordering data	Article No.
Accessories		Backpack for Field PG M4/M5/M6	6ES7798-0DA02-0XA0
Memory expansion		SIMATIC IPC Image & Partition Creator V3.6	6ES7648-6AA13-6YA0
8 GB RAM	6ES7648-3AK00-0PA0	Software tool for very easy preventive data backup and efficient partition management on SIMATIC IPCs	
16 GB RAM	6ES7648-3AK10-0PA0		
32 GB RAM	6ES7648-3AK20-0PA0		
AC/DC external power supply unit	6ES7798-0GA05-0XA0	Software Update Service (Standard Edition)²⁾	
For Field PG M6 only; spare part, included in the scope of supply of the Field PG M6		The delivery is implemented according to the number of ordered SUS products (e.g. 10 upgrade packages with 10 DVDs, 10 USB flash drives, etc.)	
Power cable (length 3 m)		• STEP 7 Professional V1x	6ES7822-1AA00-0YL5
For Field PG M2/M4/M5/M6 only		• STEP 7 Professional Combo (STEP 7 Prof. V1x (TIA Portal) and STEP 7 Prof.)	6ES7810-5CC04-0YE2
For Germany, France, the Netherlands, Spain, Belgium, Austria, Sweden, Finland	6ES7900-5AA00-0XA0	• SIMATIC WinCC Advanced	6AV6613-0AA00-0AL0
For Great Britain	6ES7900-5BA00-0XA0	• SIMATIC STEP 7 Safety Advanced	6ES7833-1FC00-0YX2
For Switzerland	6ES7900-5CA00-0XA0		
For USA	6ES7900-5DA00-0XA0	Software Update Service (download)²⁾	
For Italy	6ES7900-5EA00-0XA0	Upgrades and Service Packs are available for downloading. Email address required for delivery	
For China	6ES7900-5FA00-0XA0	• STEP 7 Professional V1x	6ES7822-1AE00-0YY0
For India	6ES7900-5GA00-0XA0	• STEP 7 Professional Combo (STEP 7 Prof. V1x (TIA Portal) and STEP 7 Prof.)	6ES7810-5CC04-0YY2
Spare battery (lithium ion, 8.25 Ah)¹⁾	6ES7798-0AA10-0XA0	• SIMATIC WinCC Advanced	6AV6613-0AA00-0AY0
For Field PG M6 only; spare part, included in the scope of supply of the Field PG M6		• SIMATIC STEP 7 Safety Advanced	6ES7833-1FC00-0YY0
MPI cable	6ES7901-0BF00-0AA0		
For connecting a PG and SIMATIC S7 via MPI; 5 m			
S5 EPROM programming adapter	6ES7798-0CA00-0XA0		
For SIMATIC S5 EPROM programming using the Field PG			
Replaceable SSD kit			
Replaceable SSD 512 GB serial ATA; with protective pocket and torx screwdriver; for Field PG M5/M6	6ES7791-2BA22-0AA0		
Replaceable SSD 2 TB serial ATA; with protective pocket and torx screwdriver; for Field PG M6	6ES7791-2BA25-0AA0		

¹⁾ The capacity of the battery decreases for technological reasons with each charging/discharging cycle and also as a result of being stored at excessively high or low temperatures. The running time per charge decreases therefore over the course of time. With normal use, the battery can be charged and discharged over a period of six months from when the Field PG is purchased. Capacitance loss is not covered by the warranty. For the battery's operation we grant a warranty of six months. We recommend replacing the battery with an original Siemens battery at the end of these six months if there is a significant drop in performance.

²⁾ For more information on the Software Update Service, see page 12/2.

Technical specifications

Article number	6ES7718-.....-.... SIMATIC Field PG M6
General information	
Design of the programming device	Notebook
Display	
Design of display	15.6" full HD display in 16:9 format
Resolution (pixels)	
• Horizontal image resolution	1 920 pixel
• Vertical image resolution	1 080 pixel
General features	
• Non-reflecting	Yes
• Luminance	300 cd/m ²
Backlighting	
• Type of backlighting	LED
Control elements	
Keyboard fonts	
• Design	QWERTZ/QWERTY or AZERTY (French); 87 keys
Touch operation	
• Integrated touch pad	Yes; Clickpad
Supply voltage	
Design of the power supply	External wide-range power supply; 3-pole
Line frequency	
• permissible range, lower limit	47 Hz
• permissible range, upper limit	63 Hz
Processor	
Processor type	Intel Core i5-8400H (2.5 to 4.2 GHz, 4 cores and hyper-threading, 8 MB Smart Cache) or i7-8850H (2.6 to 4.3 GHz 6 cores and hyper-threading, 9 MB Smart Cache)
Chipset	Intel CM246
Hyper-threading	Yes
Turbo Boost Technology 2.0	Yes
Graphic	
Graphics controller	Intel® UHD Graphics 630
Drives	
DVD-RW	Yes
SSD	Yes; Easy to replace
• Memory capacity	256 Gbyte; Up to 2 TB SSD
TPM Security Chip	Yes; 2.0 (version for China without TPM)
Memory	
Type of memory	DDR4 SO-DIMM
Work memory	
• Number of slots	2; can be equipped with 1x 8 GB, 1x 16 GB, 1x 32 GB or 2x32 GB
Accumulator	
Replaceable	Yes; Lithium-ion battery
Capacity	8.25 A-h

Article number	6ES7718-.....-.... SIMATIC Field PG M6
Interfaces	
Number of interfaces PROFIBUS DP	1; 1x PROFIBUS DP / MPI; 9-pin Sub-D socket; 9.6 kBAud to 12 Mbaud
Number of RS 232 interfaces	1; 25-pin socket
Number of USB interfaces	4
• Type A	3; 1x USB port incl. integrated charging function for USB devices (e.g. smartphone) - also with device switched off
• Type C	1; USB 3.1 Gen. 2
Number of chip-card readers	1; Smart Card Reader (ISO/IEC 7816)
Bluetooth radio standard	Yes; V5.0
Multimedia card/SD card slot	2 in 1 (SDHC UHS-II, MMC)
Card reader for SIMATIC memory cards	SIMATIC memory cards (for S7-300/400), SMC (for S7-1x00), SIMATIC micro memory card (for S7-300/C7/ET 200) - including programming interfaces
Universal Audio Jack	Yes; Audio socket for 3.5 mm jack
Video interfaces	
• analog video signal (VGA)	Yes; via adapter from DVI to VGA
• DVI-I	Yes; 1x
• DisplayPort	Yes; 1x
Industrial Ethernet	
• Industrial Ethernet interface	2x Ethernet (RJ45)
- 100 Mbps	Yes
- 1000 Mbps	Yes; Gigabit Ethernet; 2x RJ45 with 2 independent MAC/IP addresses
• Wake on LAN	Yes
• IAMT (Intel Active Management Technology)	Yes
WLAN	
• Type	802.11ac
Interrupts/diagnostics/status information	
LED status display	Battery status, device status, access to HDD/DVD, access to SD/MMC, MPI/DP, S5 and S7 modules / Card Reader (except Smart Card Reader), Num Lock, Caps Lock, WLAN active
EMC	
Interference immunity against discharge of static electricity	
• Interference immunity against discharge of static electricity acc. to IEC 61000-4-2	Yes; ±4 kV contact discharge acc. to IEC 61000-4-2, ESD; ±8 kV air discharge acc. to IEC 61000-4-2, ESD
Interference immunity to cable-borne interference	
• Interference immunity on supply cables	±2 kV (according to IEC 61000-4-4, burst); ±1 kV (according to IEC 61000-4-5, surge pulse/line to line); ±2 kV (according to IEC 61000-4-5, surge pulse/line to ground)
• Interference immunity on signal cables	±1 kV (according to IEC 61000-4-4, burst, length < 30 m); ±2 kV (according to IEC 61000-4-4, burst, length > 30 m); ±2 kV (according to IEC 61000-4-5, surge sym./line to ground, length > 30 m)

SIMATIC programming devices

Programming devices

Field PG M6

Technical specifications

Article number	6ES7718-.....-.... SIMATIC Field PG M6
Standards, approvals, certificates	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
DIN/ISO 9001	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	5 °C; Max. 10 °C/h (no condensation)
• max.	40 °C; Max. 10 °C/h (no condensation)
Operating systems	
Local language of operating system	Multi-Language User Interface (MUI): 6 languages (English, German, French, Spanish, Italian, Chinese)
pre-installed operating system	
• Windows 10	Yes; Windows 10 Enterprise 64-bit
Software	
Preinstalled	
• STEP 7 Professional (TIA Portal)	Yes; software version: V16
• STEP 7	Yes; Professional 2017 SR2
• WinCC flexible Advanced 2008	Yes; Software version: SP5
• WinCC Advanced (TIA Portal)	Yes; software version: V16
• STEP 5	Yes; Optional; software version: STEP 5 V7.23 HF2 (incl. GRAPH 5/II V7.15)
Mechanics/material	
Material of housing	metal
Handle	Yes; retractable
Socket for Kensington lock	Yes
rubber corner guards	Yes

Article number	6ES7718-.....-.... SIMATIC Field PG M6
Dimensions	
Width	385 mm
Height	53 mm
Depth	275 mm
Weights	
Weight, approx.	3.4 kg; incl. rechargeable battery
Scope of supply	
Accumulator	Yes
Power supply	Yes
Backpack	Yes
SIMATIC Software	Yes
Recovery media	Yes; Restore & Recovery

Overview


- External EPROM programming device
- For programming SIMATIC Memory Cards, SIMATIC Micro Memory Cards as well as SIMATIC EPROM and EEPROM modules
- For connection to the PC via the USB interface

Ordering data
Article No.
**EPROM programming device,
USB Prommer**
6ES7792-0AA00-0XA0

 For programming SIMATIC Memory
Cards and EPROM modules

Technical specifications

Article number	6ES7792-0AA00-0XA0 USB Prommer
General information	
Design of the programming device	Desktop device
Display	
Design of display	without
Supply voltage	
Design of the power supply	12 V DC, 1.25 A (via power supply included 100 - 240 V / 50 - 60 Hz / 400 - 200 mA)
Ambient conditions	
Ambient temperature during operation	
• min.	5 °C
• max.	40 °C
Dimensions	
Width	172 mm
Height	40 mm
Depth	121 mm
Weights	
Weight, approx.	400 g


SIMATIC programming devices

Accessories

Communications software

SOFTNET for Industrial Ethernet

Overview

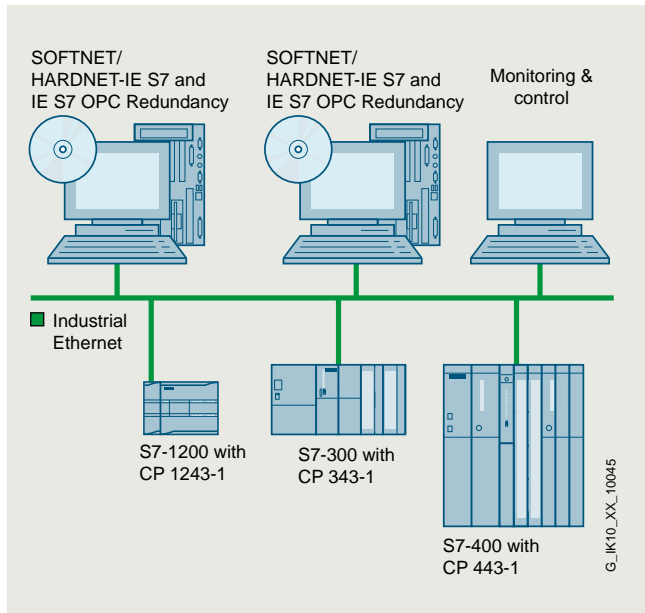

System configuration SOFTNET for Industrial Ethernet

ISO	TCP/UDP	PN	MRP	OPC	PG/OP	S7/S5	IT
●	●			●	●	●	

G_IK10_XX_10185

- Software for coupling PGs/PCs/workstations to automation systems
- Communications services:
 - PG/OP communication
 - S7 communication
 - Open communication (SEND/RECEIVE)
- Can be used with
 - Layer 2 Ethernet card (PCI/PCIe)
 - Integrated Industrial Ethernet interface
 - Modem/ISDN (Remote Access Service RAS)
- Complete protocol stack as a software package

Ordering data

Article No.

Article No.

SOFTNET-S7 for Industrial Ethernet

Software for S7 and open communication, incl. OPC server, PG/OP communication, and NCM PC/STEP 7 Professional, runtime software, software and electronic manual on DVD, license key on USB flash drive, Class A

SOFTNET-IE S7 V19

- For 64-bit:
- Windows 10 Professional/Enterprise
 - Windows 11 Professional/Enterprise
 - Windows 10 (IoT) Enterprise 2019 LTSC
 - Windows 10 (IoT) Enterprise 2021 LTSC
 - Windows Server 2019
 - Windows Server 2022

English/German/Chinese; up to 64 connections; floating license for one installation

- On DVD
- Download ¹⁾

6GK1704-1CW23-0AA0
6GK1704-1CW23-0AK0

SOFTNET-IE S7 Software Update Service

For one year with automatic extension
Requirement: current software version

- On DVD
- Download ¹⁾

6GK1704-1CW00-3AL0
6GK1704-1CW00-3AP0

SOFTNET-IE S7 Upgrade

As of Edition 2006 to current version

- On DVD
- Download ¹⁾

6GK1704-1CW00-3AE0
6GK1704-1CW00-3AK0

SOFTNET-IE S7 Extended V19

Software for S7-, S5-comp.-comm. OPC; PG/OP comm., up to 255 connections (S7) or 512 connections (S7-1200/S7-1500)

For 64-bit:

- Windows 10 Professional/Enterprise
- Windows 11 Professional/Enterprise
- Windows 10 (IoT) Enterprise 2019 LTSC
- Windows 10 (IoT) Enterprise 2021 LTSC
- Windows Server 2019
- Windows Server 2022

English/German/Chinese; up to 512 connections; floating license for one installation

- On DVD
- Download ¹⁾

6GK1704-1BW23-0AA0
6GK1704-1BW23-0AK0

SOFTNET-IE S7 Power Pack V19

Extends SOFTNET-IE S7 Lean V19 to SOFTNET-IE S7 V19

for 64-bit:

- Windows 10 Professional/Enterprise
- Windows 11 Professional/Enterprise
- Windows 10 (IoT) Enterprise 2019 LTSC
- Windows 10 (IoT) Enterprise 2021 LTSC
- Windows Server 2019
- Windows Server 2022

English/German/Chinese; up to 64 connections; floating license for one installation

- On DVD
- Download ¹⁾

6GK1704-1CW23-0AC0
6GK1704-1CW23-0AK1

¹⁾ For more details of Online Software Delivery, visit: <http://www.siemens.com/tia-online-software-delivery> under Ordering data.

Ordering data	Article No.	Technical specifications	
<p>SOFTNET-IE S7 REDCONNECT V19</p> <p>Software for fail-safe S7 communication via redundant networks, incl. S7 OPC server, runtime software, software and electronic manual on DVD, license key on USB flash drive, Class A</p> <p>For 64-bit:</p> <ul style="list-style-type: none"> • Windows 10 Professional/Enterprise • Windows 11 Professional/Enterprise • Windows 10 (IoT) Enterprise 2019 LTSC • Windows 10 (IoT) Enterprise 2021 LTSC • Windows Server 2019 • Windows Server 2022 <p>English/German/Chinese; floating license for one installation</p> <ul style="list-style-type: none"> • On DVD • Download ¹⁾ 	<p>6GK1704-0HB23-0AA0 6GK1704-0HB23-0AK0</p>	<p>Performance data</p> <p>S7 and PG/OP communication (number of operable connections)</p> <ul style="list-style-type: none"> • SOFTNET-IE S7 Extended Max. 255 (S7-300 / S7-400) Max. 512 (S7-1200 / S7-1500) • SOFTNET-IE S7 Max. 64 • SOFTNET-IE S7 Lean Max. 8 	
<p>SOFTNET-IE S7 Lean Edition V19</p> <p>For 64-bit:</p> <ul style="list-style-type: none"> • Windows 10 Professional/Enterprise • Windows 11 Professional/Enterprise • Windows 10 (IoT) Enterprise 2019 LTSC • Windows 10 (IoT) Enterprise 2021 LTSC • Windows Server 2019 • Windows Server 2022 <p>Up to eight connections; English/German/Chinese; floating license for one installation</p> <ul style="list-style-type: none"> • On DVD • Download ¹⁾ 	<p>6GK1704-1LW23-0AA0 6GK1704-1LW23-0AK0</p>		
<p>SOFTNET-IE S7 Lean Software Update Service</p> <p>For one year with automatic extension Requirement: current software version</p> <ul style="list-style-type: none"> • On DVD • Download ¹⁾ 	<p>6GK1704-1LW00-3AL0 6GK1704-1LW00-3AP0</p>		
<p>SOFTNET-IE S7 Lean Upgrade</p> <p>As of Edition 2006 to current version</p> <ul style="list-style-type: none"> • On DVD • Download ¹⁾ 	<p>6GK1704-1LW00-3AE0 6GK1704-1LW00-3AK0</p>		

¹⁾ For more details of Online Software Delivery, visit:
<http://www.siemens.com/tia-online-software-delivery> under Ordering data.


SIMATIC programming devices

Accessories

Communications software

SOFTNET for PROFIBUS

Overview

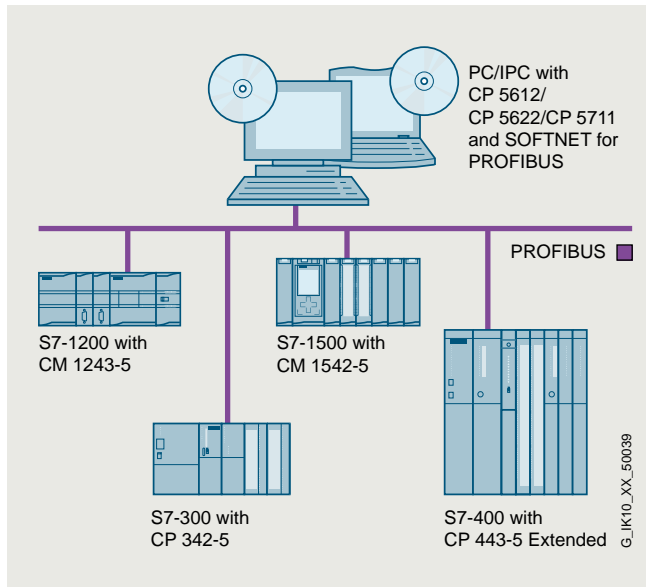

DP-M	DP-S	FMS	OPC	PG/OP	S7/S5
●	●		●	●	●

G_IK10_XX_10186

- Software for connecting PCs/PGs and notebooks to automation systems
- Communications services:
 - PROFIBUS DP master Class 1 and 2 with acyclic expansions
 - PROFIBUS DP slave
 - PG/OP communication
 - S7 communication
 - Open communication (SEND/RECEIVE) based on the FDL interface
- The appropriate OPC servers and configuration tools are included in the scope of supply of the respective communications software

Ordering data

Article No.

Article No.

SOFTNET-PB S7

Software for S7 communication, including FDL protocol with OPC server and configuration tool, runtime software, software and electronic manual on DVD or by download, license key on USB flash drive or by download, Class A; for CP 5612, CP 5622, CP 5711

SOFTNET-PB S7 V19

For 64-bit:

- Windows 10 Professional/Enterprise
- Windows 11 Professional/Enterprise
- Windows 10 (IoT) Enterprise 2019 LTSC
- Windows 10 (IoT) Enterprise 2021 LTSC
- Windows Server 2019
- Windows Server 2022

English/German/Chinese; floating license for one installation

- On DVD
- Download ¹⁾

6GK1704-5CW23-0AA0
6GK1704-5CW23-0AK0

SOFTNET-PB S7 Software Update Service

For one year with automatic extension
Requirement: current software version

- On DVD
- Download ¹⁾

6GK1704-5CW00-3AL0
6GK1704-5CW00-3AP0

SOFTNET-PB S7 Upgrade

As of Edition 2006 to current version

- On DVD
- Download ¹⁾

6GK1704-5CW00-3AE0
6GK1704-5CW00-3AK0

SOFTNET-PB DP

Software for DP protocol (Master Class 1 and 2), including FDL protocol with OPC server and configuration tool; runtime software, software and electronic manual on DVD or by download, license key on USB flash drive or by download; for CP 5612, CP 5622, CP 5711

SOFTNET-PB DP V19

For 64-bit:

- Windows 10 Professional/Enterprise
- Windows 11 Professional/Enterprise
- Windows 10 (IoT) Enterprise 2019 LTSC
- Windows 10 (IoT) Enterprise 2021 LTSC
- Windows Server 2019
- Windows Server 2022

English/German/Chinese; floating license for one installation

- On DVD
- Download ¹⁾

6GK1704-5DW23-0AA0
6GK1704-5DW23-0AK0

SOFTNET-PB DP Software Update Service

For one year with automatic extension
Requirement: current software version

- On DVD
- Download ¹⁾

6GK1704-5DW00-3AL0
6GK1704-5DW00-3AP0

SOFTNET-PB DP Upgrade

As of Edition 2006 to current version

- On DVD
- Download ¹⁾

6GK1704-5DW00-3AE0
6GK1704-5DW00-3AK0

Ordering data	Article No.	Technical specifications	
SOFTNET-PB DP Slave Software for DP slave, with OPC server and configuration tool, single license for one installation, runtime software, software and electronic manual on DVD or by download, license key on USB flash drive or by download, Class A; for CP 5612, CP 5622, CP 5711		Performance data CP 5612/CP 5622/CP 5711	
SOFTNET-PB DP Slave V19 For 64-bit: <ul style="list-style-type: none"> • Windows 10 Professional/Enterprise • Windows 11 Professional/Enterprise • Windows 10 (IoT) Enterprise 2019 LTSC • Windows 10 (IoT) Enterprise 2021 LTSC • Windows Server 2019 • Windows Server 2022 English/German/Chinese; floating license for one installation <ul style="list-style-type: none"> • On DVD • Download ¹⁾ 	6GK1704-5SW23-0AA0 6GK1704-5SW23-0AK0	Mono-protocol operation	
SOFTNET-PB DP Slave Software Update Service For one year with automatic extension Requirement: current software version <ul style="list-style-type: none"> • On DVD 	6GK1704-5SW00-3AL0	Number of connectable DP slaves Max. 60	
SOFTNET-PB DP Slave Upgrade As of Edition 2006 to current version <ul style="list-style-type: none"> • On DVD • Download ¹⁾ 	6GK1704-5SW00-3AE0 6GK1704-5SW00-3AK0	Number of FDL tasks simultaneously waiting Max. 50	
		Number of PG/OP and S7 connections Max. 8 <ul style="list-style-type: none"> • DP master DP-V0, DP-V1 with SOFTNET-PB DP • DP slave DP-V0, DP-V1 with SOFTNET-PB DP slave 	

¹⁾ For more details of Online Software Delivery, visit: <http://www.siemens.com/tia-online-software-delivery> under Ordering data.

SIMATIC programming devices

Notes

13

Products for specific requirements

**14/2 Telecontrol systems for comprehensive applications**

- 14/3 [SIPLUS RIC for IEC protocol](#)
- 14/4 SIPLUS RIC libraries for S7-1500 (R/H), ET 200SP and Software Controllers
- 14/5 SIPLUS RIC libraries for ET 200S
- 14/6 SIPLUS RIC libraries for S7-300
- 14/7 SIPLUS RIC libraries for S7-400/S7-400H
- 14/8 SIPLUS RIC libraries for WinAC

14/9 Automatic door controls

- 14/10 [Automatic door controls for elevators](#)
- 14/11 Control devices
 - SIDOOR AT40 elevator door drive
 - SIDOOR ATE500E elevator door drive
- 14/14 Power supplies
 - Power supply unit
 - Switched-mode power supply
- 14/17 Additional units
- 14/17 - Software kit
- 14/21 - SIDOOR LINK and SIDOOR SUPPORT App
- 14/22 Geared motors
- 14/24 Direct drives
- 14/25 Accessories
- 14/29 [Automatic door controls for industrial applications](#)
- 14/30 Control devices
 - SIDOOR ATD401W
 - SIDOOR ATD420W
 - SIDOOR ATD430W
- 14/34 Power supplies
 - 3-phase, 36 V DC
- 14/37 Additional units
 - Software kit
 - SIDOOR LINK and SIDOOR SUPPORT App
- 14/41 Geared motors
- 14/42 Accessories

14/48 [Automatic door controls for railway applications](#)

- 14/49 Control devices
 - Platform screen door drive
 - Control device for gap fillers
 - Interior railway door drives
- 14/52 Additional units
 - Software kit
- 14/56 Geared motors
- 14/57 Direct drives
- 14/59 Accessories

14/63 Condition monitoring systems

- 14/63 [SIPLUS CMS1200 Condition Monitoring System](#)
- 14/64 SIPLUS CMS1200 SM 1281 Condition Monitoring
- 14/66 Accessories

Products for specific requirements

Telecontrol systems for comprehensive applications

Telecontrol systems for comprehensive applications

Overview

Telecontrol systems for controlling and monitoring widely distributed plants usually consist of a supervisory control system (telecontrol center) and one or more outstations connected over large distances for the automation of distributed plant sections.

SIPLUS RIC is a versatile telecontrol system that uses the internationally standardized telecontrol protocols:


- Serial transmission IEC 60870-5-101
- Ethernet (TCP/IP) IEC 60870-5-104
- Connection of protection devices IEC 60870-5-103

It provides secure communication with reduced data volume for reliable operation in the Wide Area Network (WAN) thanks to event-driven, time-stamped transmission and monitored output of commands.

Application

SIPLUS RIC offers maximum functionality and modularity to meet the requirements made upon the monitoring and control of spatially distributed systems, even under extreme environmental

conditions. It is therefore suitable for sectors such as Oil, Gas, Water, Wastewater, Power Generation/Distribution, and Transportation.

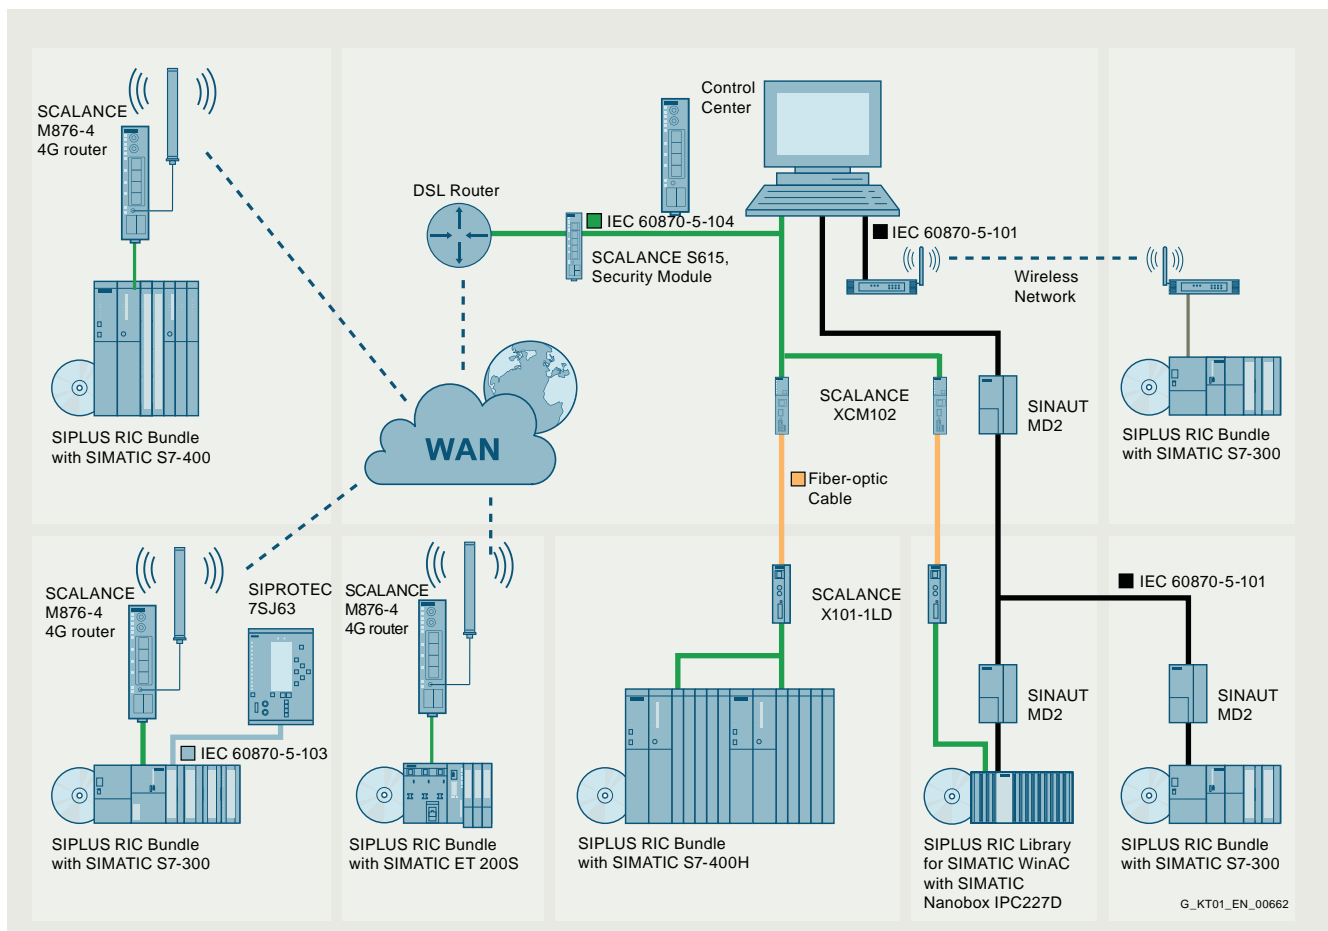

Overview

IEC 60870-5-101, -103, -104 are standardized, vendor-independent protocols. With SIPLUS RIC, they can be parameterized with the SIMATIC Manager or TIA Portal without the need for additional installations.

The IEC 60870-5-101 protocol supports classical WAN connections via dedicated lines,

The coupling is made

- directly
- via media converters (e.g. modems) or
- via the serial interfaces (RS232 or RS485) of the communications modules, e.g. 1SI, CP 341, CP 441 or CM PtP/PTP

The IEC 60870-5-103 protocol permits serial communication with protection devices, e.g. SIPROTEC. The link is made similar to IEC 60870-5-101 via serial communications modules.

The IEC 60870-5-104 protocol supports TCP/IP-based WAN connections such as internet/DSL or GPRS/UMTS/LTE. Either the PN interfaces of the CPUs or the Industrial Ethernet communications modules, e.g. CP 343, CP 443 and CM/CP 154x, are used as interfaces. Redundancy groups and substitute routes (combinations of serial and Ethernet transmission paths) are both possible and enabled via the interfaces.

Security requirements for IEC 104 communication can be achieved with:

- external components (firewall/VPN gateways such as SCALANCE S)
- integrated security features (e.g. firewall/VPN of Advanced CPs)

TLS can be used within the mechanisms (and limitations) provided by SIMATIC for the encryption of IEC 60870-5-104 communication.

The libraries for the IEC 60870-5-101 and -104 protocols are supplied as master (SCADA/Control Center/Controlling Station (control system)) and slave (substation/RTU/Controlled Station) including activation for PN-CPU and CP interface.

The IEC 60870-5-103 library is only available as master.

SIMATIC Controllers can also communicate with third-party products by means of the IEC protocols and exchange data from the SIMATIC Controller.

By combining the different library variants (within a CPU), information from lower-level stations and also protection devices can be forwarded to the control stations (node or gateway functionality). Reversed direction signal paths are also supported.

The modular concept in connection with presets enables a fast configuration of stations with basic functionality. Specific requirements (e.g. individual addresses, transfer of external time stamps) can also be parameterized and programmed individually. Example projects are available to make starting easier. They can be used as a basis for one's own projects or initial tests.

Libraries including the example projects and documentation can be downloaded from Siemens Online Support as trial versions and used without a valid license (activation code) in demo mode (15 minutes of full functionality after each CPU restart).

Products for specific requirements

Telecontrol systems for comprehensive applications
SIPLUS RIC for IEC protocol

SIPLUS RIC libraries for S7-1500 (R/H), ET 200SP and Software Controllers

Overview



If a system based on SIMATIC S7-1500, S7-1500R/H, ET 200SP or Software Controller is to communicate with a Siemens control center, e.g. SIMATIC PCS 7 TeleControl, WinCC TeleControl, WinCC OA, or a control center of a third-party supplier using the IEC 60870-5 telecontrol standard, the IEC 60870-5-101 (serial), -103 (protection) or -104 (TCP/IP) telecontrol protocols can be used in the SIMATIC automation systems.

SIPLUS RIC libraries offer an integrated, scalable system based on SIMATIC S7-1500/ET 200SP functionalities for the following data volumes:

- 200 data points, for use with CPU 1510SP-1 PN¹⁾, CPU 1511-1 PN and CPU 1511C-1 PN
- 800 data points, for use with CPU 1512SP-1 PN and CPU 1512C-1 PN
- 1000 data points, for use with CPU 1513-1 PN
- 2000 data points, for use with CPU 1515-2 PN
- 4000 data points, for use with CPU 1516-3 PN/DP
- 5000 data points, for use with CPU 1517-3 PN/DP and with CPU 1518-4 PN/DP

The work memory for data is used for buffering the message frames. Longer communication failure times can thus be bridged. The SIPLUS RIC software libraries are based on the standard TIA Portal and can be used on various, mutually compatible types of SIMATIC S7 devices, thus saving hardware costs and programming overhead.

The libraries and licenses are delivered digitally or as a download (OSD, Online Software Delivery). Three variants are available for selection:

- 50 data points ("tags")
- 500 data points
- Unlimited number of data points

Only information objects in monitoring direction (e.g. messages, measured values) are counted.

A license certificate is supplied with the order, which can be used to request activation codes for permanent use of the purchased protocols on the employed hardware (linked to serial number). For more information on this, see

<https://support.industry.siemens.com/cs/www/en/view/109803457>.

The license certificate required for the activation of all telecontrol protocols IEC 60870-5-101 (serial), -103 (protection) or -104 (TCP/IP) is available for download in SiePortal after purchase.

¹⁾ CPU 1510SP-1 PN is only suitable for small installations due to the small amount of work memory. If the CPU is used for other tasks besides the IEC protocol, it is absolutely necessary to check the work memory load beforehand.

Ordering data

Article No.

SIPLUS RIC libraries for SIMATIC S7-1500/S7-1500 RH/ ET 200SP/Software Controllers

Runtime license, software download, incl. license key¹⁾

Consignee email address required for delivery

Max. 50 tags (information objects in the monitoring direction)

6AG6003-7CF01-0LE0

Max. 500 tags (information objects in the monitoring direction)

6AG6003-7CF01-0LFO

Unlimited number of tags (information objects in the monitoring direction)

6AG6003-7CF01-0LPO

¹⁾ Up-to-date information and download availability can be found under <https://www.siemens.com/tia-online-software-delivery>.

Products for specific requirements

Telecontrol systems for comprehensive applications
SIPLUS RIC for IEC protocol

SIPLUS RIC libraries for ET 200S

Overview



If a SIMATIC ET 200S-based system is to communicate with a Siemens control center, e.g. SIMATIC PCS 7 TeleControl, WinCC TeleControl, WinCC OA, or a control center of a third-party supplier using the IEC 60870-5 telecontrol standard, the IEC 60870-5-101 (serial), -103 (protection) or -104 (TCP/IP) telecontrol protocols can be used in the SIMATIC automation systems.

SIPLUS RIC libraries offer an integrated, scalable system based on SIMATIC ET 200S functionalities, for data volumes up to 200 information points.

The non-retain memory can also be used for buffering message frames. Longer communication failure times can thus be bridged. The SIPLUS RIC software libraries are based on the standard SIMATIC Manager or TIA Portal and can be used on various, mutually compatible types of SIMATIC S7 devices – this saves hardware costs and programming overhead.

The libraries and licenses are delivered digitally or as a download (OSD, Online Software Delivery). A license certificate is supplied with the order, which can be used to request activation codes for permanent use of the purchased protocols on the employed hardware (linked to serial number). For more information on this, see <https://support.industry.siemens.com/cs/ww/en/view/109803457>.

The license certificate required for the activation of all telecontrol protocols IEC 60870-5-101 (serial), -103 (protection) or -104 (TCP/IP) is available for download in SiePortal after purchase.

Ordering data

Article No.

SIPLUS RIC libraries for SIMATIC ET 200S

Runtime license, software download, incl. license key¹⁾
Consignee email address required for delivery

6AG6003-5CF01-0DA0

¹⁾ Up-to-date information and download availability can be found under <https://www.siemens.com/tia-online-software-delivery>.

Products for specific requirements

Telecontrol systems for comprehensive applications
SIPLUS RIC for IEC protocol

SIPLUS RIC libraries for S7-300

Overview



If a SIMATIC S7-300-based system is to communicate with a Siemens control center, e.g. SIMATIC PCS 7 TeleControl, WinCC TeleControl, WinCC OA, or a control center of a third-party supplier using the IEC 60870-5 telecontrol standard, the IEC 60870-5-101 (serial), -103 (protection) or -104 (TCP/IP) telecontrol protocols can be used in the SIMATIC automation systems.

SIPLUS RIC libraries offer an integrated, scalable system based on SIMATIC S7-300 functionalities, for the following data volumes:

- 200 information points, for use with CPU 314
- 1000 information points, for use with CPU 315
- 2000 information points, for use with CPU 317
- 5000 information points, for use with CPU 319

The non-retain memory can also be used for buffering message frames. Longer communication failure times can thus be bridged. The SIPLUS RIC software libraries are based on the standard SIMATIC Manager or TIA Portal and can be used on various, mutually compatible types of SIMATIC S7 devices – this saves hardware costs and programming overhead.

The libraries and licenses are delivered digitally or as a download (OSD, Online Software Delivery). A license certificate is supplied with the order, which can be used to request activation codes for permanent use of the purchased protocols on the employed hardware (linked to serial number). For more information on this, see <https://support.industry.siemens.com/cs/ww/en/view/109803457>.

The license certificate required for the activation of all telecontrol protocols IEC 60870-5-101 (serial), -103 (protection) or -104 (TCP/IP) is available for download in SiePortal after purchase.

Ordering data

Article No.

SIPLUS RIC libraries for SIMATIC S7-300

Runtime license, software download, incl. license key¹⁾
Consignee email address required for delivery

6AG6003-1CF01-0DA0

¹⁾ Up-to-date information and download availability can be found under <https://www.siemens.com/tia-online-software-delivery>.

Products for specific requirements

Telecontrol systems for comprehensive applications
SIPLUS RIC for IEC protocol

SIPLUS RIC libraries for S7-400/S7-400H

Overview



If a SIMATIC S7-400/S7-400H-based system is to communicate with a Siemens control center, e.g. SIMATIC PCS 7 TeleControl, WinCC TeleControl, WinCC OA, or a control center of a third-party supplier using the IEC 60870-5 telecontrol standard, the IEC 60870-5-101 (serial), -103 (protection) or -104 (TCP/IP) telecontrol protocols can be used in the SIMATIC automation systems.

SIPLUS RIC libraries offer an integrated, scalable system based on SIMATIC S7-400/S7-400H functionalities for the following data volumes:

- 1000 information points, for use with CPU 412 or CPU 412H
- 2000 information points, for use with CPU 414 or CPU 414H
- 5000 information points, for use with CPU 410H, CPU 416/CPU 416H or CPU 417/CPU 417H

The data memory, which is limited to 256 MB in the CPU 410H for data blocks generated online, is used for buffering the frames. Longer communication failure times can thus be bridged. The SIPLUS RIC software libraries are based on the standard SIMATIC Manager or TIA Portal and can be used on various, mutually compatible types of SIMATIC S7 devices – this saves hardware costs and programming overhead.

The libraries and licenses are delivered digitally or as a download (OSD, Online Software Delivery). A license certificate is supplied with the order, which can be used to request activation codes for permanent use of the purchased protocols on the employed hardware (linked to serial number). For more information on this, see <https://support.industry.siemens.com/cs/ww/en/view/109803457>.

The license certificate required for the activation of all telecontrol protocols IEC 60870-5-101 (serial), -103 (protection) or -104 (TCP/IP) is available for download in SiePortal after purchase.

Ordering data

SIPLUS RIC libraries for SIMATIC S7-400

Runtime license for SIMATIC S7-400 from firmware version 4.x; software download, incl. license key¹⁾

Consignee email address required for delivery

Note:
If used in S7-400H systems, a license will be required for both CPUs.

¹⁾ Up-to-date information and download availability can be found under <https://www.siemens.com/tia-online-software-delivery>.

Article No.

6AG6003-3CF01-0AA0

Products for specific requirements

Telecontrol systems for comprehensive applications
SIPLUS RIC for IEC protocol

SIPLUS RIC libraries for WinAC

Overview



If a system based on SIMATIC WinAC RTX is to communicate with a Siemens control center, e.g. SIMATIC PCS 7 TeleControl, WinCC TeleControl, WinCC OA, or a control center of a third-party supplier, using the IEC 60870-5 telecontrol standard, the IEC 60870-5-101 (serial), -103 (protection) or -104 (TCP/IP) telecontrol protocols can be used in the SIMATIC automation systems.

The SIPLUS RIC software libraries are based on the standard SIMATIC Manager (WinAC) or TIA Portal and can be used on various, mutually compatible types of SIMATIC S7 devices – this saves hardware costs and programming overhead.

The libraries and licenses are delivered digitally or as a download (OSD, Online Software Delivery).

A license certificate is supplied with the order, which can be used to request activation codes for permanent use of the purchased protocols on the employed hardware (linked to serial number). For more information on this, see <https://support.industry.siemens.com/cs/ww/en/view/109803457>.

The license certificate required for the activation of all telecontrol protocols IEC 60870-5-101 (serial), -103 (protection) or -104 (TCP/IP) is available for download in SiePortal after purchase.

Ordering data

Article No.

SIPLUS RIC libraries for WinAC

Runtime license, software download, incl. license key¹⁾

Consignee email address required for delivery

6AG6003-0CF01-0AA0

¹⁾ Up-to-date information and download availability can be found under <https://www.siemens.com/tia-online-software-delivery>.

Design



SIDOOR automatic door control systems

Door control system is the general term for a controller of an access system.

The SIDOOR product family is primarily intended for the operation of sliding doors, whereby these doors can be operated both horizontally and vertically.


Door control systems are characterized by the fact that there are always two defined states for the open and closed position of the door.

The door is always controlled, regulated and moved between these two positions in accordance with the guidelines of the respective application.

In a defined learn run via "single-button operation", the door system independently determines the values for the door width, the dynamic door weight and the drive direction of the geared motor and stores these data in a non-volatile memory.

The optimum drive characteristics at the door are automatically calculated and are consistently adhered to.

The travel curve transitions are rounded off so that the door movement is smooth and jerk-free.

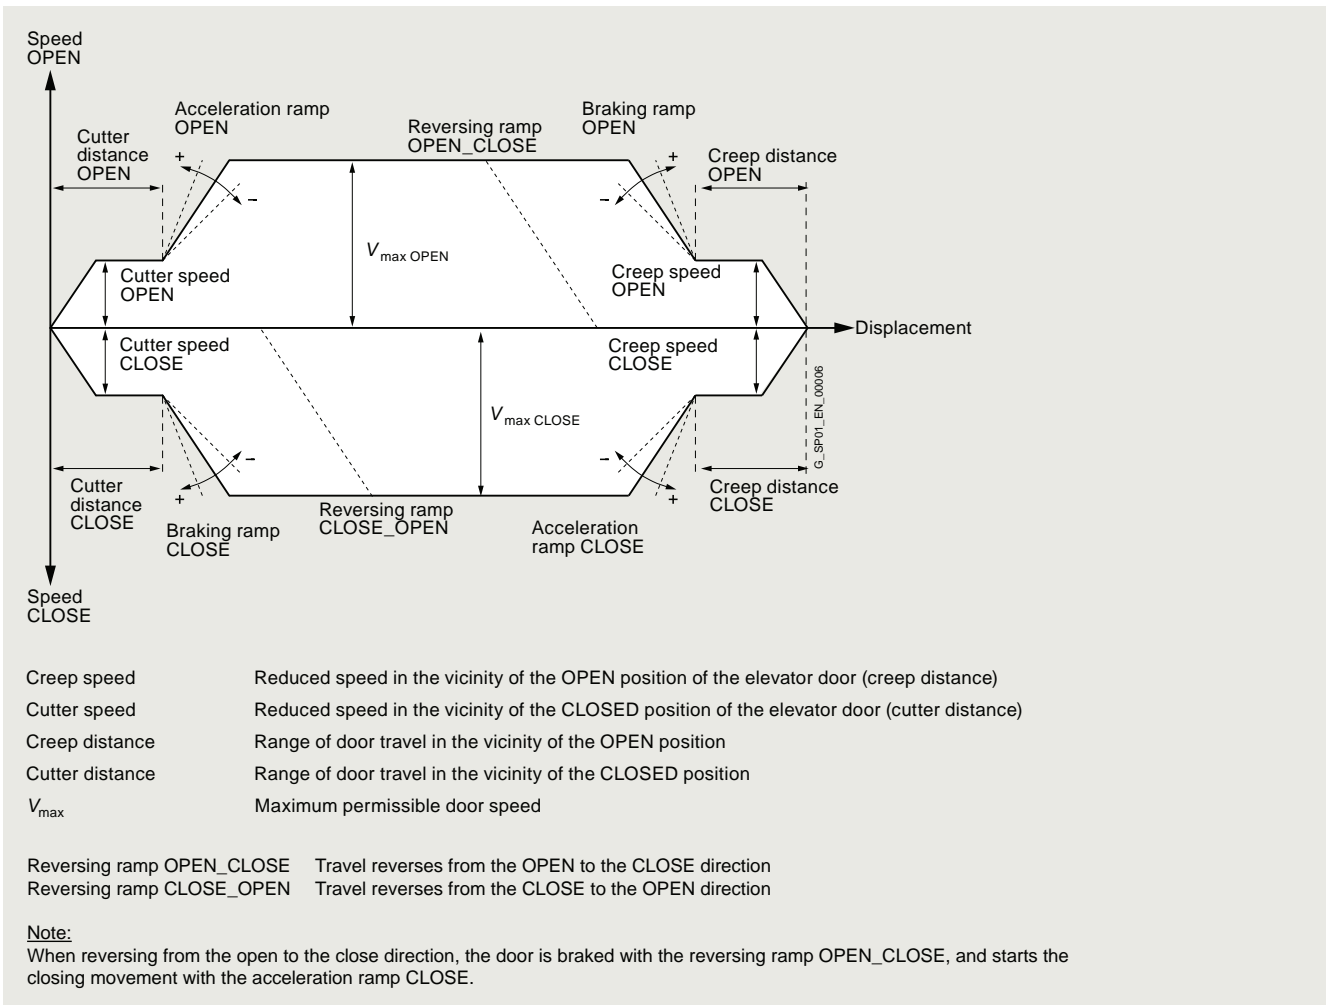

Travel curve

Products for specific requirements

Automatic door controls

for elevators

Application

The elevator door drive is comprised of a controller and the maintenance-free drive unit, geared motor or gearless EC technology direct drive motor.

Control devices are electronic controllers connected to the power supply via an external power supply unit (SIDOOR NT40 or SIDOOR Transformer). They are generally connected to the higher-level controller via digital or fieldbus interfaces, and can be configured via a user interface.

The SIDOOR AT40 and SIDOOR ATE500E control devices can be used to operate horizontally operated cabin and shaft doors as well as vertical doors for lifting or rolling doors at adjustable speeds and accelerations.

Geared motors form the maintenance-free drive unit in the door drive. The geared motors feature DC motors with non-self-locking gearing, and are speed-controlled. The set force and speed limits are not exceeded. The gearless motor (direct drive) is the maintenance-free drive unit of the door drive.

Operation of the named door drives does not require limit switches. The door width and the "OPEN"/"CLOSE" positions are determined automatically.


The power is transmitted by a toothed belt. The toothed belt passes over a deflector pulley and can be fitted with 2 door clutch holders. This enables it to drive both one-sided and centrally-opening doors. The accessories are not included in the scope of supply, see "Accessories", page 14/25.

Design

The product-specific property of the elevator door controllers is based on the fact that the closing weights/closing springs integrated in the shaft doors are also taken into account.

These weights/springs are integrated in the shaft doors so that open doors close automatically if the cabin is not at the relevant floor.

They must also be moved by the elevator door drive in their opening direction and support it in the closing movement.

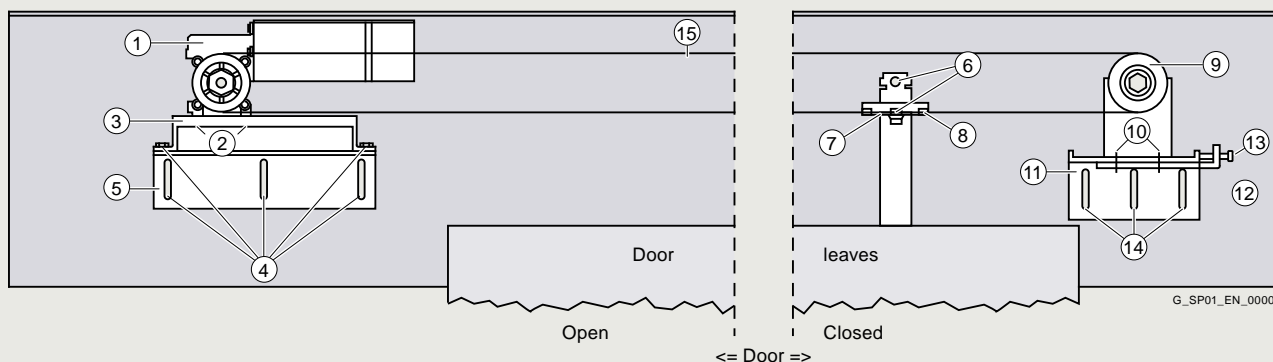

Complete motor mounting

- ① Geared motor
- ② 4 x locking hexagonal safety bolts M5 x 10
- ③ Rubber-metal anti-vibration mount
- ④ 10 x locking hexagonal safety bolts M6 x 16
- ⑤ Mounting bracket for the motor mounting

Mounting material for door clutch holder

- ⑥ 2 x locking hexagonal safety bolts M6 x 12
- ⑦ Door clutch holder
- ⑧ Clamping plate


Deflector unit and clamping device

- ⑨ Deflector unit
- ⑩ 2 x locking hexagonal safety bolts M6 x 12
- ⑪ Mounting bracket for the deflector unit and tensioning device
- ⑫ Tensioning lug for the deflector unit and tensioning device
- ⑬ Tensioning screw M6 x 30
- ⑭ 10 x locking hexagonal safety bolts M6 x 16
- ⑮ Toothed belt (length 4 m)

Mounting suggestion for door control systems

G_SP01_EN_00007

Overview

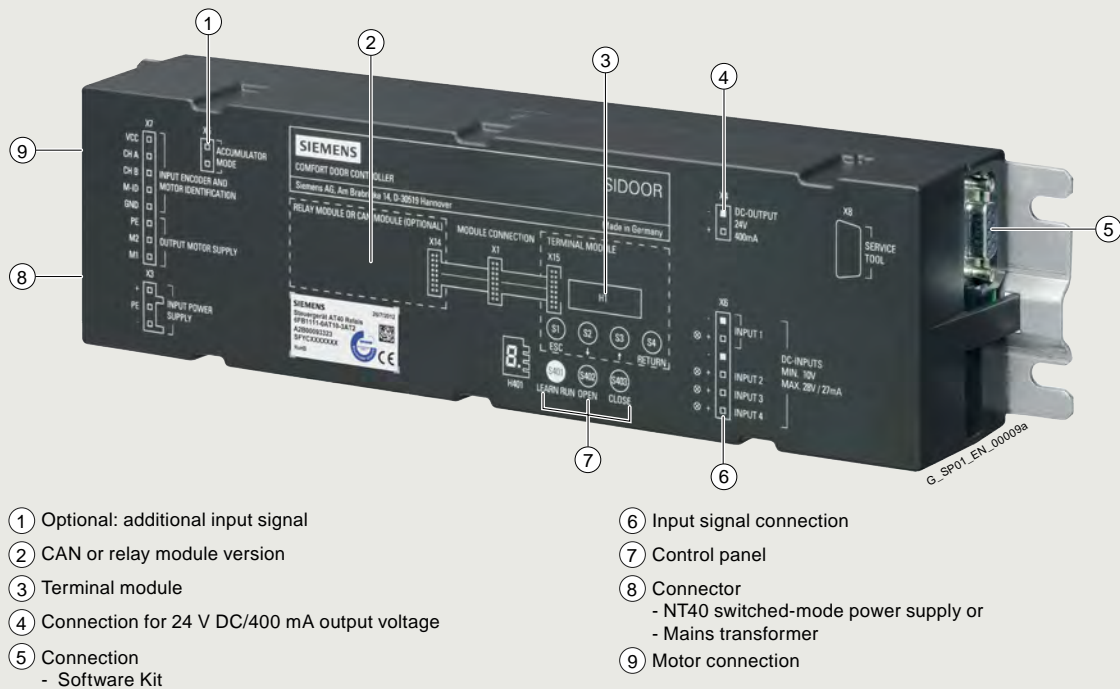

SIDOOR AT40 elevator door drive (relay module version)

SIDOOR AT40 – SIDOOR enables the quick, easy and versatile installation, configuration and operation of a wide range of elevator door systems.

- Version:
- RELAY (including relay and terminal module)
- CAN (including CAN and terminal module), two controllers are available: SIDOOR AT40 CAN and CAN ADV.
 - Certified by CiA (CiA 301 / CiA 417).
 - The door system can be visualized and parameterized by the elevator controller using the "Virtual Terminal" function.
 - With the SIDOOR AT40 CAN ADV controller, parameters for evaluating mechanical wear can be provided at the door. These parameters can be accessed from the CAN-BUS via the elevator controller or other bus nodes and can be evaluated floor-dependently by an external evaluation logic. It includes, e.g. event counters, maximum current values in the slow end distance of the door, traversing times and energy values of the opening and closing cycles, as well as other performance values.
 - The evaluation can affect the maintenance cycles of the elevator system.

- For dynamic door weights up to 600 kg, depending on motor variant
- Automatic door weight detection
- 4 to 8 kg maximum counterweight (depending on motor version)
- Operating temperature -20 to +50 °C
- Flexible motor management (four different motor types), automatic detection
- Opening width 0.3 to 5 m
- Auxiliary power output 24 V DC \pm 15 %; 0.4 A (short-circuit-proof)
- Output stage short-circuit-proof
- Supports power-optimized operation in the elevator cabin
- Vandal-proof
- IP54 degree of protection for 180 to 600 kg motor versions, gear unit IP40 (SIDOOR M5: entirely IP54)
- The current operating states are indicated via a 7-segment display or a terminal module directly in the elevator door drive or externally. The SIDOOR SOFTWARE KIT or the SIDOOR LINK with the SIDOOR SUPPORT App are used for this, see [Additional units](#), page 14/20.

Ordering data

Article No.

SIDOOR AT40 elevator door drive

- horizontal, up to 600 kg door weight

Control device with RELAY

(including relay and terminal module)

6FB1111-0AT10-3AT2

Article No.

Control device with CAN

(including CAN and terminal module),

Control device with CAN module and maintenance data via CANopen

6FB1111-1AT10-3AT3

6FB1111-1AT11-3AT3

Products for specific requirements

Automatic door controls
for elevators

Control devices > SIDOOR AT40 elevator door drive

Technical specifications

Article number	6FB1111-0AT10-3AT2 SIDOOR AT40 RELAY	6FB1111-1AT10-3AT3 SIDOOR AT40 CAN	6FB1111-1AT11-3AT3 SIDOOR AT40 CAN ADV
General information			
Product type designation	AT40 RELAY	AT40 CAN	AT40 CAN ADV
Supply voltage			
Design of the power supply	via SIDOOR TRANSFORMER / NT40		
Input current			
Current consumption, max.	10 A		
I ² t, min.	30 A ² ·s		
Encoder supply			
Output voltage (DC)	24 V; Ensure correct polarity! CAUTION: Do not supply with external voltage!		
short-circuit proof	Yes		
24 V encoder supply			
• Output current, max.	400 mA		
Power			
Active power input	80 W		
Active power input, max.	540 W		
Active power input (standby mode)	5 W	6 W	
Digital inputs			
Control inputs isolated	Yes		
Control inputs p-switching	Yes		
Input voltage			
• for signal *0*, min.	-3 V		
• for signal *0*, max.	5 V		
• for signal *1*, min.	10 V		
• for signal *1*, max.	28 V		
Input current			
• for signal *0*, max. (permissible quiescent current)	0.5 mA		
• for signal *1*, min.	9 mA		
• for signal *1*, max.	27 mA		
Digital outputs			
Relay outputs			
Switching capacity of contacts			
- at 30 V DC, min.	0.01 A		
- at 30 V DC, max.	1 A		0.5 A
- at 50 V DC, min.	0.01 A; Switching voltage 50 V DC		
- at 50 V DC, max.	1 A; Switching voltage 50 V DC		
- at 230 V AC, min.	0.01 A		
- at 230 V AC, max.	1 A		
Mechanical data			
Opening width of door, min.	0.3 m		
Opening width of door, max.	5 m		
Weight of door, max.	600 kg		
Operating cycle frequency of door, max.	180 1/h		
Counterforce, max.	80 N		
Kinetic energy, max.	100 J		
Counterweight			
• with SIDOOR M2 geared motor, max.	4 kg		
• with SIDOOR M3 geared motor, max.	6 kg		
• with SIDOOR M4 geared motor, max.	8 kg		
• with SIDOOR M5 geared motor, max.	8 kg		

Technical specifications


Article number	6FB1111-0AT10-3AT2 SIDOOR AT40 RELAY	6FB1111-1AT10-3AT3 SIDOOR AT40 CAN	6FB1111-1AT11-3AT3 SIDOOR AT40 CAN ADV
Interfaces			
Interfaces/bus type	without	CANopen, CiA standard 301, profile 417	
Number of bus nodes		32	
Standards, approvals, certificates			
Certificate of suitability according to EN 81	Yes		
CE mark	Yes		
UL approval	No		
EAC (formerly Gost-R)	Yes		
TÜV Inspectorate approval	Yes		
TÜV prototype tested	Yes		
China RoHS compliance	Yes		
Standard for safety	EN 61010-1 / EN 61010-2-201 / EN 81-20		
Ambient conditions			
Ambient temperature during operation			
• min.	-20 °C		
• max.	50 °C		
Ambient temperature during storage/transportation			
• Storage, min.	-40 °C		
• Storage, max.	50 °C		
Altitude during operation relating to sea level			
• Installation altitude above sea level, max.	2 000 m		
Relative humidity			
• No condensation, min.	10 %		
• No condensation, max.	93 %		
Dimensions			
Width	320 mm		
Height	60 mm		
Depth	80 mm		

Products for specific requirements

Automatic door controls
for elevators

Control devices > SIDOOR ATE500E elevator door drive

Overview

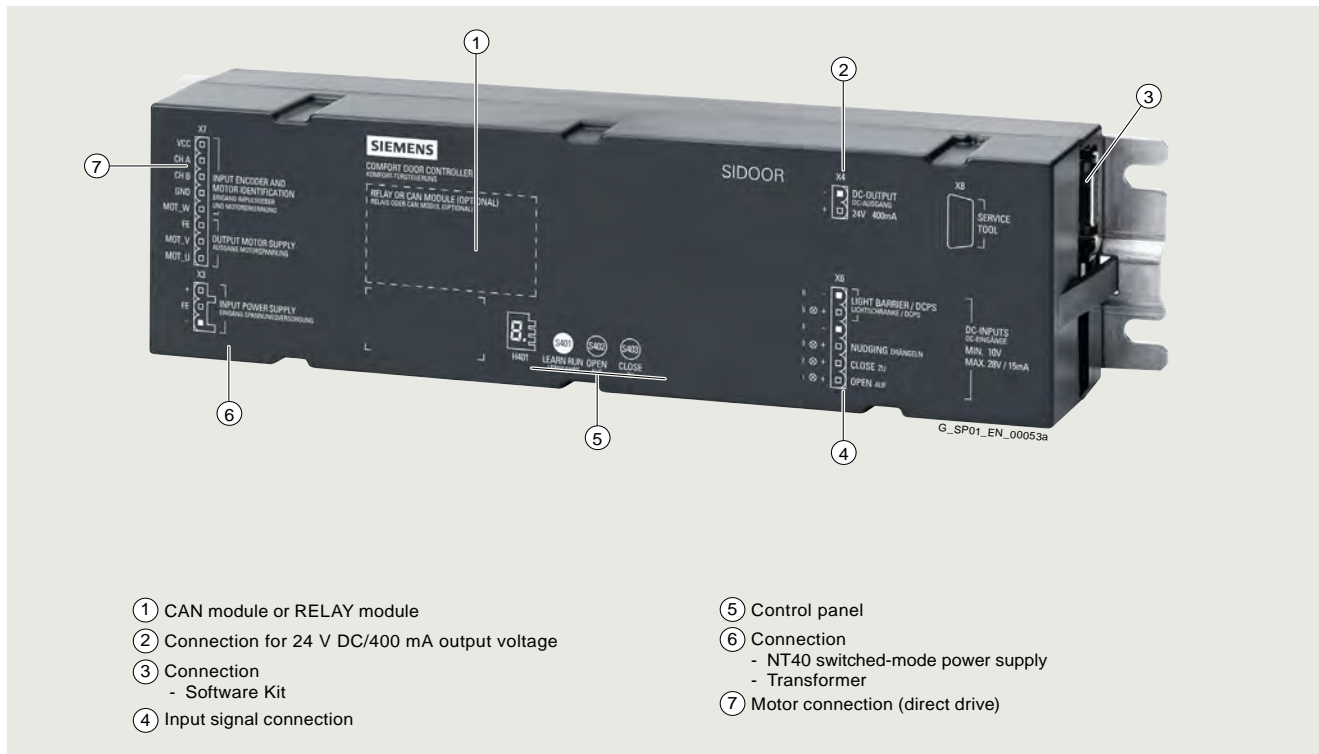

SIDOOR ATE500E elevator door drive

The SIDOOR ATE500E elevator door drive enables the quick, easy and versatile installation, configuration and operation of EC technology gearless elevator door systems.

- Design:
 - Relay module
 - CAN module
- For dynamic door weights up to 280 kg
- High control performance and optimized drive characteristic transitions
- Automatic door weight detection (single-button commissioning)
- 6 kg maximum counterweight of the coupled floor door
- Operating temperature -25 to +50 °C without restrictions

- Automatic identification of the connected motor
- Opening width 0.3 to 5 m
- Auxiliary voltage output 24 V DC \pm 15%; 0.4 A (short-circuit-proof)
- Output stage short-circuit-proof
- Optimized energy consumption during cabin operation (DCPS)
- Vandal-proof
- IP20 degree of protection
- The current operating states are indicated via a 7-segment display directly in the elevator door drive or externally using the Software Kit, see "Additional units", page 14/20.

Ordering data

Article No.

SIDOOR ATE500E elevator door drive

Control device with relay module

6FB1211-5AT10-7AT2

Control device with CAN module

6FB1211-1AT10-7AT3

Technical specifications

Article number	6FB1211-5AT10-7AT2 SIDOOR ATE500E RELAY	6FB1211-1AT10-7AT3 SIDOOR ATE500E CAN
General information		
Mean time between failures (MTBF)	19 y	
Installation type/mounting		
Installation and mounting instructions	no direct solar radiation, final application-specific requirements must be observed; installation outside a control cabinet only in horizontal mounting position NFPA elevator environment: must be installed in a fire protection enclosure	
Supply voltage		
Design of the power supply	Via SIDOOR TRANSFORMER / NT40 or via DC	
Rated value (DC)	36 V; with MED280: At 24 V DC max. door speed of 500 mm/s; at 28.8 V DC max. door speed of 800 mm/s	
Input current		
I ² t, min.	30 A ² ·s	
Encoder supply		
Output voltage (DC)	24 V; Ensure correct polarity! CAUTION: Do not supply with external voltage!	
short-circuit proof	Yes	
Overload-proof	Yes	
24 V encoder supply		
• Output current, max.	400 mA	
Power		
Active power input	85 W	
Active power input, max.	540 W	
Active power input (standby mode)	5 W	6 W
Digital inputs		
Control inputs isolated	Yes	
Control inputs p-switching	Yes	
Input voltage		
• for signal *0*, min.	-3 V	
• for signal *0*, max.	5 V	
• for signal *1*, min.	10 V	
• for signal *1*, max.	28 V	
Input current		
• for signal *1*, min.	3 mA	
• for signal *1*, max.	15 mA	
Digital outputs		
Relay outputs		
Switching capacity of contacts		
- at 30 V DC, min.	0.01 A	
- at 30 V DC, max.	1 A	0.5 A
- at 50 V DC, min.	0.01 A; 50 V DC switching voltage not released for NFPA-relevant countries	
- at 50 V DC, max.	1 A; 50 V DC switching voltage not released for NFPA-relevant countries	
- at 230 V AC, min.	0.01 A	
- at 230 V AC, max.	1 A	
Mechanical data		
Opening width of door, min.	0.3 m	
Opening width of door, max.	5 m	
Weight of door, max.	280 kg	
Operating cycle frequency of door, max.	180 1/h	
Kinetic energy, max.	75 J	
Counterweight		
• with SIDOOR MED280 direct drive, max.	6 kg	
Interfaces		
Interfaces/bus type	without	CANopen, CiA standard 301, profile 417
Number of bus nodes		32

Products for specific requirements

Automatic door controls
for elevators

Control devices > SIDOOR ATE500E elevator door drive

Technical specifications

Article number	6FB1211-5AT10-7AT2	6FB1211-1AT10-7AT3
	SIDOOR ATE500E RELAY	SIDOOR ATE500E CAN
Standards, approvals, certificates		
Certificate of suitability according to EN 81	Yes	
CE mark	Yes	
UL approval	Yes	
EAC (formerly Gost-R)	Yes	
TÜV Inspectorate approval	Yes	
TÜV prototype tested	Yes	
China RoHS compliance	Yes	
Standard for safety	EN 61010-1 / EN 61010-2-201 / UL 61010-1 / UL 61010-2-201 / EN 81-20 / EN ISO 13849-1 Cat. 2 PL d / IEC 62061: SIL 2	
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C	
• max.	50 °C	
• Remark	Bolt the controller onto a metal mounting surface so that thermal conductivity is ensured	
Ambient temperature during storage/transportation		
• Storage, min.	-40 °C	
• Storage, max.	85 °C	
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	2 000 m	
Relative humidity		
• No condensation, min.	10 %	
• No condensation, max.	93 %	
Dimensions		
Width	320 mm	
Height	60 mm	
Depth	80 mm	

Overview



SIDOOR Transformer

The SIDOOR TRANSFORMER and SIDOOR TRANSFORMER UL are standard power supply units operated with 220-240 V AC, 50/60 Hz, from the SIDOOR product range. They can be used for controllers capable of controlling masses of up to 400 kg.

Ordering data

Article No.

SIDOOR Transformer power supply	6FB1112-0AT20-2TR0
SIDOOR Transformer power supply with UL approval	6FB1112-0AT21-2TR0

Technical specifications

Article number	6FB1112-0AT20-2TR0	6FB1112-0AT21-2TR0
	SIDOOR TRANSFORMER	SIDOOR TRANSFORMER UL
Installation type/mounting		
Mounting type	Hexagon head bolt M6, L > 70 mm	
Supply voltage		
relative symmetrical tolerance of the supply voltage	10 %	
Line frequency		
• permissible range, lower limit	50 Hz	
• permissible range, upper limit	60 Hz	
Mains filter		
• integrated	Yes	
Input current		
Current consumption, max.	1.6 A	
Operational current of fuse protection at input, min.	6 A	
Operational current of fuse protection at input, max.	10 A	
Tripping characteristic class of fuse protection at input	D6, C10	
Output voltage		
RMS value (pulsating DC voltage at full load)	17.3 V; at 230 V AC	
RMS value (pulsating DC voltage at full load), min.	16.5 V	
RMS value (pulsating DC voltage at full load), max.	18 V	
RMS value (pulsating DC voltage at 0.7 mA peak current), max.	27 V; At 264 V AC	
Output current		
Current output (rated value)	14.3 A; t on 2 s / t off 8 s	
Power		
Emitted active power, max.	115 W; Average value above 10 s	

Products for specific requirements

Automatic door controls
for elevators


Power supplies > Power supply unit

Technical specifications

Article number	6FB1112-0AT20-2TR0	6FB1112-0AT21-2TR0
	SIDOOR TRANSFORMER	SIDOOR TRANSFORMER UL
Standards, approvals, certificates		
CE mark	Yes	
EAC (formerly Gost-R)	Yes	
RoHS conformity	Yes	
China RoHS compliance	Yes	
Standard for EMC	EN 12015 / EN 12016 / EN 61000-6-2 / EN 61000-6-3 / EN 61000-3-2 / EN 61000-3-3	
Standard for safety	Low Voltage Directive (LVD) 2014/35/EU	UL 61010-1, CSA C22.2 No. 61010-1-12, Low Voltage Directive (LVD) 2014/35/EU
Ambient conditions		
Ambient temperature during operation		
• min.	-20 °C	
• max.	55 °C	
• Remark	No direct exposure to the sun	
Ambient temperature during storage/transportation		
• Storage, min.	-20 °C	
• Storage, max.	70 °C	
• Transportation, min.	-40 °C	
• Transportation, max.	70 °C	
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	2 000 m	
Relative humidity		
• No condensation, min.	10 %	
• No condensation, max.	93 %	
Cables		
Cable length		
• Input side	2 m	
• Output side	1.5 m	
Connection method		
Design of electrical connection at input	SCHUKO connector DIN 49.441, CEE7/VII	equipped with ferrules
Dimensions		
Width	145 mm	
Height	65 mm	
Depth	126 mm	

Power supplies > Switched-mode power supply

Overview

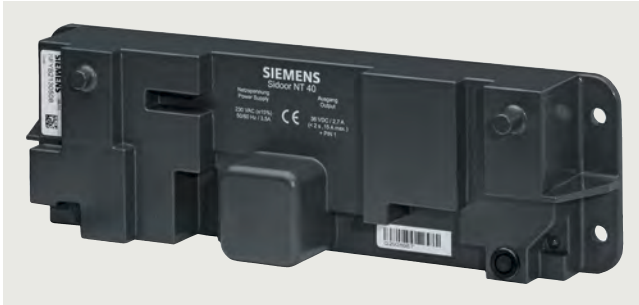

The SIDOOR NT40 switched-mode power supply unit is operated with 230 V AC ($\pm 15\%$), 50/60 Hz, to power the elevator door controllers.

It is especially suitable for door systems with high door weights.

On the output side, the power supply unit delivers a voltage of 36 V DC ($\pm 3\%$) SELV at a rated output power of < 100 W.

In order to enable fast acceleration/deceleration of the doors by the controller, the device can briefly (< 2 s) deliver a current of 15 A (corresponds to a short-time power output of 540 W).

Ordering data

Article No.

SIDOOR NT40
switched-mode power supply

6FB1112-0AT20-3PS0

Technical specifications

Article number	6FB1112-0AT20-3PS0 SIDOOR NT40
Installation type/mounting	
Mounting type	Four 5 mm screws
Supply voltage	
Rated value (AC)	230 V
relative symmetrical tolerance of the supply voltage	15 %
Line frequency	
• permissible range, lower limit	50 Hz
• permissible range, upper limit	60 Hz
Input current	
Current consumption for 2 s, max.	3.5 A
Rated value at 230 V AC	0.7 A
Operational current of fuse protection at input, min.	6 A
Operational current of fuse protection at input, max.	10 A
Tripping characteristic class of fuse protection at input	B
Output voltage	
Rated value (DC)	36 V; SELV
Relative symmetrical tolerance of the output voltage	3 %

Article number	6FB1112-0AT20-3PS0 SIDOOR NT40
Output current	
Current output (rated value)	2.5 A
Temporary overload current (for 2 s maximum)	15 A
Power	
Active power input, max.	100 W
Emitted active power, max.	100 W
Emitted active power (restricted to 2 s)	540 W
Efficiency at 230 V AC (with 100 W emitted active power)	90 %
Active apparent power, max.	650 V·A
Standards, approvals, certificates	
CE mark	Yes
EAC (formerly Gost-R)	Yes
TÜV Inspectorate approval	Yes
China RoHS compliance	Yes
Standard for EMC	EMC Directive 2004/108/EC, EN 12015, EN 12016
Standard for safety	EN 61010-1 / EN 61010-2-201
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	55 °C
• Remark	No direct exposure to the sun
Ambient temperature during storage/transportation	
• Storage, min.	-20 °C
• Storage, max.	70 °C
• Transportation, min.	-40 °C
• Transportation, max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
Relative humidity	
• No condensation, min.	10 %
• No condensation, max.	93 %
Cables	
Cable length	
• Input side	2 m
• Output side	1.5 m
Connection method	
Design of electrical connection at input	SCHUKO connector DIN 49.441, CEE7/VII
Dimensions	
Width	270 mm
Height	55 mm
Depth	80 mm

Products for specific requirements

Automatic door controls
for elevators

Additional units > Software kit

Overview



SIDOOR Software Kit

The scope of delivery of the SIDOOR Software Kit includes an installation CD.

The CD includes the following functionalities:

SIDOOR User Software	The component that enables the door control system to be configured, parameters to be assigned, and analyzed.
Siemens HCS12 Firmware Loader	This component is used to update the operating software of the door controller.
SIDOOR USB to UART Bridge Driver	This driver is essential for operation of the USB adapter.

Note:

Some firmware updates are offered as free downloads in the Siemens Industry Online Support. For information on the availability and acquisition of more firmware, please contact Technical Support.

Ordering data

SIDOOR Software Kit

Article No.

6FB1105-0AT01-6SW0

Overview



SIDOOR LINK


Ordering data

**SIDOOR LINK,
SIDOOR Service adapter**

For commissioning and maintaining
the SIDOOR controllers via
SIDOOR SUPPORT (app)

Article No.

6FB1305-0AT00-0AS4

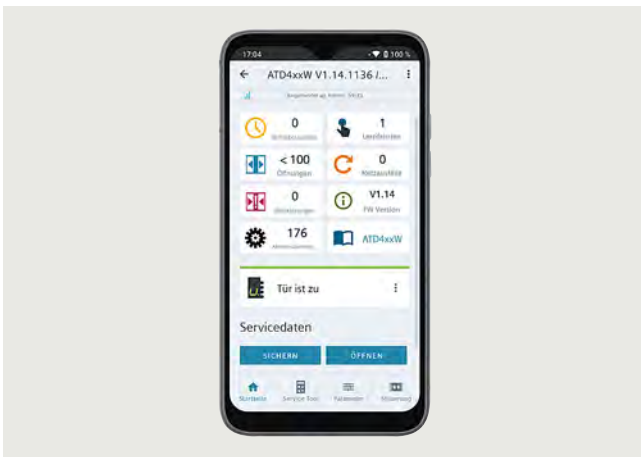

SIDOOR SUPPORT App

A Bluetooth LE 5.0 connection can be established via the SIDOOR LINK to a smartphone or tablet with the SIDOOR SUPPORT app installed.

The SIDOOR SUPPORT app enables easy commissioning and maintenance of a door system with a SIDOOR controller, is suitable for smartphones or tablets as of Android version 9 and is available from the Google Play store.

The SIDOOR LINK is connected to the SIDOOR controller via the respective cable.

You do not need to open the cover of the controller to do this.

Note:

If the SIDOOR SUPPORT (app) is in the "Quick adjustment" or "Total adjustment" menu, the drive commands of the controller are blocked via the command inputs.

Products for specific requirements

Automatic door controls
for elevators

Geared motors

Overview

SIDOOR geared motors are a combination of gear unit, motor and sensor. They are easy to connect to the controller via the interface provided and are automatically detected during commissioning.

The maintenance-free, variable speed drive unit comprises a DC motor with non-self-locking gearing.

The geared motors must be selected according to the mass to be moved. Two different versions are available for each of the SIDOOR M2 to SIDOOR M5 geared motors, with gear output on the left or on the right: The gear outlet direction is defined as left or right when viewing the gear unit from the front.

- SIDOOR M2 geared motors (max. door weight 120 kg)
 - SIDOOR M2 L (pinion left) 6FB1103-0AT10-5MA0
 - SIDOOR M2 R (pinion right) 6FB1103-0AT11-5MA0
- SIDOOR M3 geared motors (max. door weight 180 kg)
 - SIDOOR M3 L (pinion left) 6FB1103-0AT10-4MB0
 - SIDOOR M3 R (pinion right) 6FB1103-0AT11-4MB0
- SIDOOR M4 geared motors (max. door weight 400 kg)
 - SIDOOR M4 L (pinion left) 6FB1103-0AT10-3MC0
 - SIDOOR M4 R (pinion right) 6FB1103-0AT11-3MC0
- SIDOOR M5 geared motors (max. door weight 600 kg)
 - SIDOOR M5 L (pinion left) 6FB1103-0AT10-3MD0
 - SIDOOR M5 R (pinion right) 6FB1103-0AT11-3MD0



Geared motors:
SIDOOR M2 L 6FB1103-0AT10-5MA0 (version with pinion left),
SIDOOR M3 L 6FB1103-0AT10-4MB0 (version with pinion left),
SIDOOR M4 L 6FB1103-0AT10-3MC0 (version with pinion left),
SIDOOR M5 L 6FB1103-0AT10-3MD0 (version with pinion left)
(Images are shown in the order from bottom to top)

Ordering data

SIDOOR M2 geared motors

M2 L	6FB1103-0AT10-5MA0
M2 R	6FB1103-0AT11-5MA0

SIDOOR M3 geared motors

M3 L	6FB1103-0AT10-4MB0
M3 R	6FB1103-0AT11-4MB0

SIDOOR M4 geared motors

M4 L	6FB1103-0AT10-3MC0
M4 R	6FB1103-0AT11-3MC0

SIDOOR M5 geared motors

M5 L	6FB1103-0AT10-3MD0
M5 R	6FB1103-0AT11-3MD0

Technical specifications

Article number	6FB1103-0AT10-5MA0	6FB1103-0AT11-5MA0	6FB1103-0AT10-4MB0	6FB1103-0AT11-4MB0	6FB1103-0AT10-3MC0	6FB1103-0AT11-3MC0	6FB1103-0AT10-3MD0	6FB1103-0AT11-3MD0
	SIDOOR M2 L	SIDOOR M2 R	SIDOOR M3 L	SIDOOR M3 R	SIDOOR M4 L	SIDOOR M4 R	SIDOOR M5 L	SIDOOR M5 R
Supply voltage								
Rated value (DC)	24 V		30 V					
Input current								
Operational current (rated value)	1.8 A		4 A				7.5 A	
Power								
Active power input	43 W		120 W				225 W	
Mechanical data								
Torque of the rotary operating mechanism (rated value)	1.05 N·m		3 N·m				6.8 N·m	
Speed, max.	0.5 m/s		0.65 m/s		0.75 m/s		0.5 m/s	
Gear ratio	15							
Number of pulses per revolution, max.	100							
Weight of door, max.	120 kg		180 kg		400 kg		600 kg	

Technical specifications

Article number	6FB1103-0AT10-5MA0	6FB1103-0AT11-5MA0	6FB1103-0AT10-4MB0	6FB1103-0AT11-4MB0	6FB1103-0AT10-3MC0	6FB1103-0AT11-3MC0	6FB1103-0AT10-3MD0	6FB1103-0AT11-3MD0
	SIDOOR M2 L	SIDOOR M2 R	SIDOOR M3 L	SIDOOR M3 R	SIDOOR M4 L	SIDOOR M4 R	SIDOOR M5 L	SIDOOR M5 R
Standards, approvals, certificates								
CE mark	Yes							
UL approval	No		Yes					
EAC (formerly Gost-R)	Yes							
TÜV Inspectorate approval	Yes							
China RoHS compliance	Yes							
Ambient conditions								
Ambient temperature during operation								
• min.	-20 °C							
• max.	50 °C							
Ambient temperature during storage/transportation								
• Storage, min.	-40 °C							
• Storage, max.	85 °C							
Dimensions								
Height of motor	90 mm		98 mm		115 mm		124 mm	
Length of motor	207 mm		236 mm		275 mm		344 mm	
Diameter of motor	48 mm		63 mm				80 mm	
Width of gear unit, including drive pinion	90 mm		85 mm		105 mm		111 mm	

Products for specific requirements

Automatic door controls
for elevators

Direct drives

Overview



SIDOOR MED280 direct drive

SIDOOR direct drives are a combination of motor and sensor. They are easy to connect to the controller via the interface provided and are automatically detected during commissioning.

The maintenance-free drive unit consists of a gearless, speed-controlled, electronically commutated motor with non-self-locking gearing.

Direct drives are designed for certain masses and can control both drive directions.

- SIDOOR MED280 direct drive for max. 280 kg (6FB1203-0AT12-7DA0)

Ordering data

Article No.

SIDOOR MED280 direct drive
Motor for door control, for max.
dynamic door weights of 280 kg

6FB1203-0AT12-7DA0

Technical specifications

Article number	6FB1203-0AT12-7DA0 SIDOOR MED280
Supply voltage	
Rated value (DC)	24 V
Input current	
Operational current (rated value)	9.7 A
Power	
Active power input	233 W
Mechanical data	
Torque of the rotary operating mechanism (rated value)	4.7 N·m
Speed, max.	0.8 m/s
Number of pulses per revolution, max.	1 024
Weight of door, max.	280 kg
Standards, approvals, certificates	
CE mark	Yes
UL approval	Yes
EAC (formerly Gost-R)	Yes
TÜV Inspectorate approval	Yes
China RoHS compliance	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C
• max.	70 °C
Ambient temperature during storage/transportation	
• Storage, min.	-40 °C
• Storage, max.	85 °C
Dimensions	
Width of motor	160 mm
Height of motor	140 mm
Length of motor	56 mm
• including drive pinion	91 mm

Overview***A range of accessories is available for SIDOOR elevator door drive systems with geared motors:***

This is necessary to ensure low-noise operation of the door leaves by the controller. The geared motors can be optimally integrated into the respective door drive system.


Rubber-metal anti-vibration mounts for geared motors

To ensure low-noise door operation, SIDOOR geared motors are integrated in the door system using rubber-metal anti-vibration mounts.

- Rubber-metal anti-vibration mount 6FB1104-0AT02-0AD0 for SIDOOR M2 and SIDOOR M3 geared motors.
- Rubber-metal anti-vibration mount 6FB1104-0AT01-0AD0 for SIDOOR M4 and SIDOOR M5 geared motors.



Rubber-metal anti-vibration mount 6FB1104-0AT02-0AD0

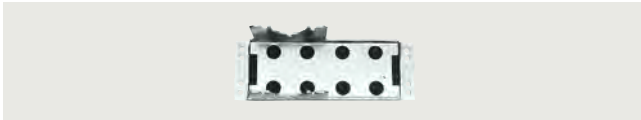

Rubber-metal anti-vibration mount 6FB1104-0AT01-0AD0

Mounting brackets

Two different mounting brackets are available with elongated holes:

- Mounting bracket 6FB1104-0AT01-0AS0 for the geared motors for flexible accommodation of the rubber-bonded metal
- Mounting bracket 6FB1104-0AT02-0AS0 for the deflector unit. For setting the toothed belt to the required belt tension.



Mounting bracket 6FB1104-0AT01-0AS0 for mounting the geared motor



Mounting bracket 6FB1104-0AT02-0AS0 for the deflector unit

Door clutch holder

The door clutch holder serves to connect the respective door leaf by means of a toothed belt while also functioning as a toothed-belt lock. One door clutch holder per door leaf is required. The toothed-belt lock can accommodate both open ends of the toothed belt.

A door clutch holder is available for each toothed belt width:

- Width 12 mm: 6FB1104-0AT01-0CP0
- Width 14 mm: 6FB1104-0AT02-0CP0



Door clutch holder 6FB1104-0AT01-0CP0 (packaging size = 1 unit)

Deflector unit

The deflector unit 6FB1104-0AT03-0AS0 contains an embedded belt pulley which can be mounted on the door system.

The STS toothed belt is redirected via this deflector unit (toothed belt width 12 mm or 14 mm).



Deflector unit 6FB1104-0AT03-0AS0

Products for specific requirements

Automatic door controls
for elevators

Accessories

Overview

STS toothed belt

The door system is moved between the end positions of the door using the STS toothed belts. Two different toothed belt lengths can be ordered for each toothed belt width.

Toothed belt width 12 mm:

- Length 4 m: 6FB1104-0AT01-0AB0
- Length 45 m: 6FB1104-0AT02-0AB0

Toothed belt width 14 mm:

- Length 4 m: 6FB1104-0AT03-0AB0
- Length 55 m: 6FB1104-0AT04-0AB0




Toothed belt 6FB1104-0AT01-0AB0, length 4 m



Toothed belt 6FB1104-0AT02-0AB0, length 45 m

A range of accessories is available for SIDOOR elevator door systems with EC technology:

Motor holder 6FB1104-0AT03-0AD0 for accommodation of the SIDOOR MED280 direct drive.

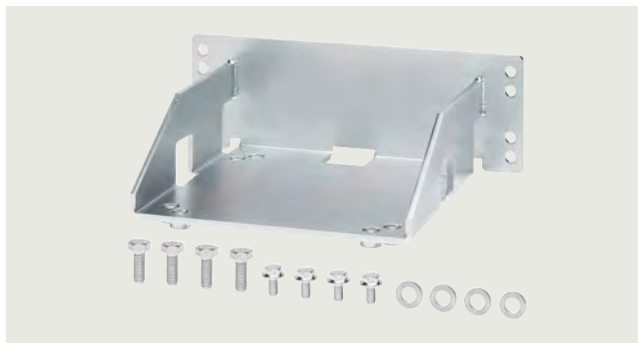

Mounting bracket:

- For mounting the SIDOOR motor holder 6FB1104-0AT01-0AS0



- With tensioning device for mounting the deflector unit and setting the toothed belt to the required tension (large) 6FB1104-0AT05-0AS4



SIDOOR mounting bracket, large

- With tensioning device for mounting the deflector unit and setting the toothed belt to the required tension (small) 6FB1104-0AT05-0AS5



SIDOOR mounting bracket, small

OverviewDoor clutch holder

- For attaching both ends of the toothed belt and connecting the respective door leaf to the toothed belt, width 20 mm 6FB1104-0AT05-0AS1



SIDOOR door clutch holder

Deflector unit:

For attaching the SIDOOR toothed belt and fixing to the door 6FB1104-0AT07-0AS0



SIDOOR deflector unit

STD toothed belt

As a connection between the door system and the end positions of the door

Toothed belt width 20 mm. Length 4 m 6FB1104-0AT05-0AB0



SIDOOR toothed belt, small

Toothed belt width 20 mm. Length 45 m 6FB1104-0AT06-0AB1



SIDOOR toothed belt, large

Products for specific requirements

Automatic door controls
for elevators

Accessories

Ordering data	Article No.	Ordering data	Article No.
Elevator door systems with geared motors		Elevator door systems with EC technology	
Rubber-metal anti-vibration mounts for geared motors		Motor holder for SIDOOR MED280 direct drive	6FB1104-0AT03-0AD0
<ul style="list-style-type: none"> SIDOOR rubber-metal anti-vibration mount for SIDOOR M2 and SIDOOR M3 geared motors 	6FB1104-0AT02-0AD0	Mounting bracket for mounting the motor holder	6FB1104-0AT01-0AS0
<ul style="list-style-type: none"> SIDOOR rubber-metal anti-vibration mount for SIDOOR M4 and SIDOOR M5 geared motors 	6FB1104-0AT01-0AD0	Mounting bracket with tensioning device for mounting the deflector unit	
Mounting bracket		<ul style="list-style-type: none"> Large Small 	6FB1104-0AT05-0AS4 6FB1104-0AT05-0AS5
<ul style="list-style-type: none"> SIDOOR mounting bracket for geared motor 	6FB1104-0AT01-0AS0	SIDOOR door clutch holder	6FB1104-0AT05-0AS1
<ul style="list-style-type: none"> SIDOOR mounting bracket with tensioning device for deflector pulley 	6FB1104-0AT02-0AS0	For toothed belt, width 20 mm	
SIDOOR door clutch holder		SIDOOR deflector unit	6FB1104-0AT07-0AS0
<ul style="list-style-type: none"> For toothed belt, width 12 mm For toothed belt, width 14 mm 	6FB1104-0AT01-0CP0 6FB1104-0AT02-0CP0	SIDOOR STD toothed belt	
SIDOOR deflector unit	6FB1104-0AT03-0AS0	Width 20 mm	
SIDOOR deflector roller for the STS toothed belt	6FB1104-0AT04-0AS2	<ul style="list-style-type: none"> 4 m 55 m 	6FB1104-0AT05-0AB0 6FB1104-0AT06-0AB1
SIDOOR STS toothed belt			
Width 12 mm			
<ul style="list-style-type: none"> 4 m 45 m 	6FB1104-0AT01-0AB0 6FB1104-0AT02-0AB0		
SIDOOR STS toothed belt			
Width 14 mm			
<ul style="list-style-type: none"> 4 m 55 m 	6FB1104-0AT03-0AB0 6FB1104-0AT04-0AB0		

Application

The door drive system consists of a controller and a maintenance-free drive unit, the geared motors.

Control devices are electronic controllers connected to the power supply via an external power supply unit. They are generally connected to the higher-level controller via digital or fieldbus interfaces, and can be configured via a user interface.

These controllers are available for selection for industrial applications:

- SIDOOR ATD401W, digital I/O, masses of up to 700 kg
- SIDOOR ATD420W, connected to the higher-level controller via PROFIBUS interface, masses of up to 700 kg
- SIDOOR ATD430W, connected to the higher-level controller via PROFINET interface, masses of up to 700 kg

The safe functions – force limitation, energy limitation and end position detection – fulfill the requirements according to EN ISO 13849-1 for Category 2 and Performance Level d. The drives are suitable for power-operated guards according to EN ISO 14120

Geared motors form the maintenance-free drive unit in the door drive. The geared motors are DC motors with non-self-locking gearing, and are speed-controlled. The set force and speed limits are not exceeded.

Operation of the named door drives does not require limit switches. The door width and the "OPEN"/"CLOSE" positions are determined automatically.


The power is transmitted by a toothed belt. The toothed belt passes over a deflector pulley and can be fitted with 2 door clutch holders. This enables it to drive both one-sided and centrally-opening doors. The accessories are not included in the scope of supply, see "Accessories", page 14/45.

Products for specific requirements

Automatic door controls
for industrial applications

Control devices > SIDOOR ATD401W

Overview

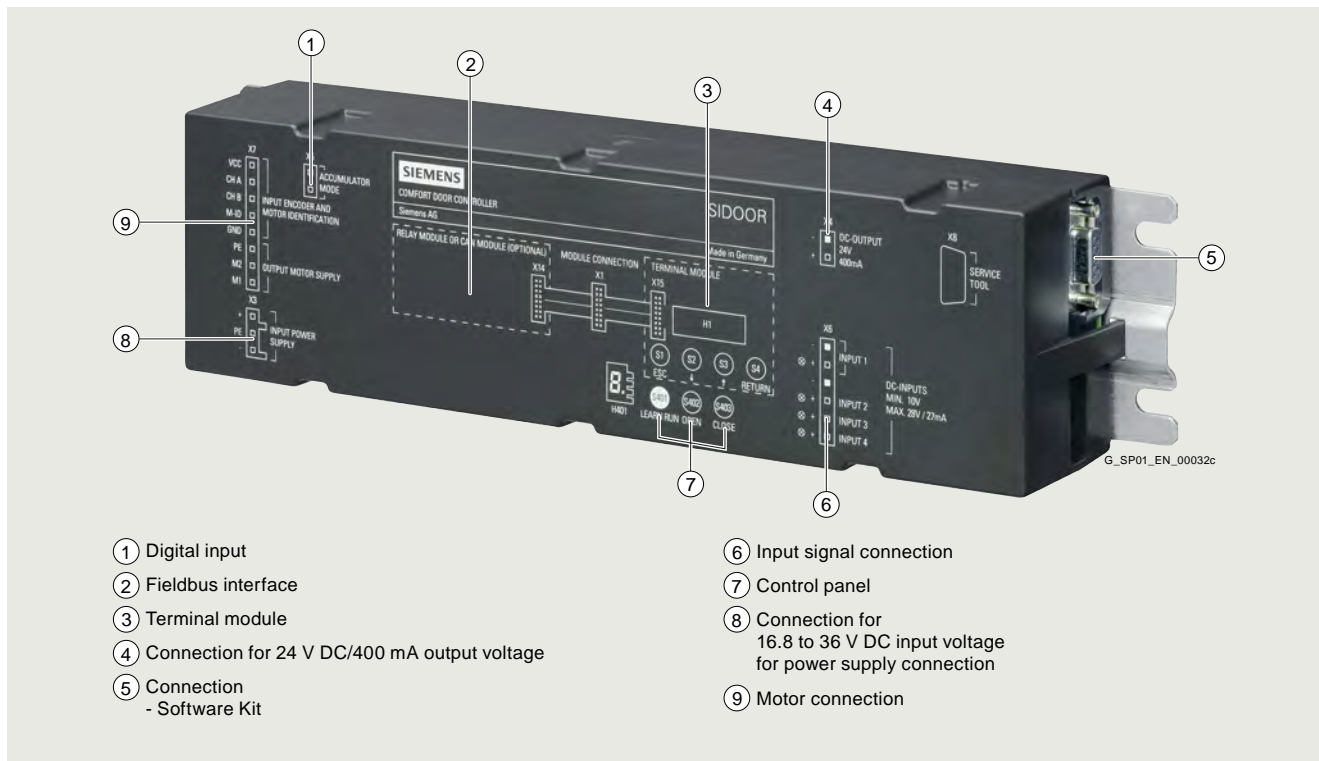

SIDOOR ATD401W

The SIDOOR ATD401W enables the quick, easy and versatile installation, configuration and operation of a wide range of industrial door drive systems.

- Relay module design
- Masses of up to 700 kg
- Automatic determination of the door weight and friction during the learn run
- Digital inputs, for example for direct connection of a light barrier as type 2 ESPE (electro-sensitive protective equipment) according to EN 61496-1
- 3 relay outputs for position feedback and reversing feedback

- Operating temperature -20 to +50 °C
- Flexible motor management, automatic recognition of the geared motor
- Opening width 0.3 to 5 m
- Auxiliary voltage output 24 V DC \pm 15%; 0.4 A (short-circuit-proof)
- Output stage for the motor control is short-circuit-proof
- Indicates the current operating states on a 7-segment display directly on the controller or using the Software Kit or the SIDOOR LINK with the SIDOOR SUPPORT App

Ordering data

Article No.

SIDOOR ATD401W

6FB1141-1AT11-3WE2

Control device,
relay module design

Technical specifications

Article number	6FB1141-1AT11-3WE2 SIDOOR ATD401W
Installation type/mounting	
Installation and mounting instructions	No direct solar radiation, final application-specific requirements must be observed. Installation outside a control cabinet only in horizontal mounting position
Supply voltage	
Design of the power supply	Via SIDOOR TRANSFORMER / SIDOOR TRANSFORMER UL / NT40 / SITOP PSU8200 13 A, 36 V or via DC
Rated value (DC)	36 V
Input current	
I _{pt} , min.	30 A ² ·s
Encoder supply	
Output voltage (DC)	24 V; Ensure correct polarity! CAUTION: Do not supply with external voltage!
short-circuit proof	Yes
Overload-proof	Yes
24 V encoder supply	
• Output current, max.	400 mA
Power	
Active power input	145 W
Active power input, max.	540 W
Active power input (standby mode)	5 W
Digital inputs	
Control inputs isolated	Yes
Control inputs p-switching	Yes
Input voltage	
• for signal *0*, min.	-3 V
• for signal *0*, max.	5 V
• for signal *1*, min.	10 V
• for signal *1*, max.	28 V
Input current	
• for signal *1*, min.	9 mA
• for signal *1*, max.	27 mA
Digital outputs	
Relay outputs	
Switching capacity of contacts	
- at 30 V DC, min.	0.01 A
- at 30 V DC, max.	1 A


Article number	6FB1141-1AT11-3WE2 SIDOOR ATD401W
Mechanical data	
Opening width of door, min.	0.3 m
Opening width of door, max.	5 m
Weight of door, max.	600 kg
Operating cycle frequency of door, max.	180 1/h
Counterforce, max.	75 N
Kinetic energy, max.	100 J
Interfaces	
Interfaces/bus type	without
Standards, approvals, certificates	
Certificate of suitability according to EN 81	No
CE mark	Yes
UL approval	Yes
EAC (formerly Gost-R)	Yes
TÜV Inspectorate approval	Yes
China RoHS compliance	Yes
Standard for safety	EN 61010-1 / EN 61010-2-201 / UL 61010-1 / UL 61010-2-201 / EN ISO 13849-1 Cat. 2 PL d
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	50 °C
Ambient temperature during storage/transportation	
• Storage, min.	-40 °C
• Storage, max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
Relative humidity	
• No condensation, min.	10 %
• No condensation, max.	93 %
Dimensions	
Width	320 mm
Height	60 mm
Depth	80 mm

Products for specific requirements

Automatic door controls
for industrial applications

Control devices > SIDOOR ATD420W

Overview

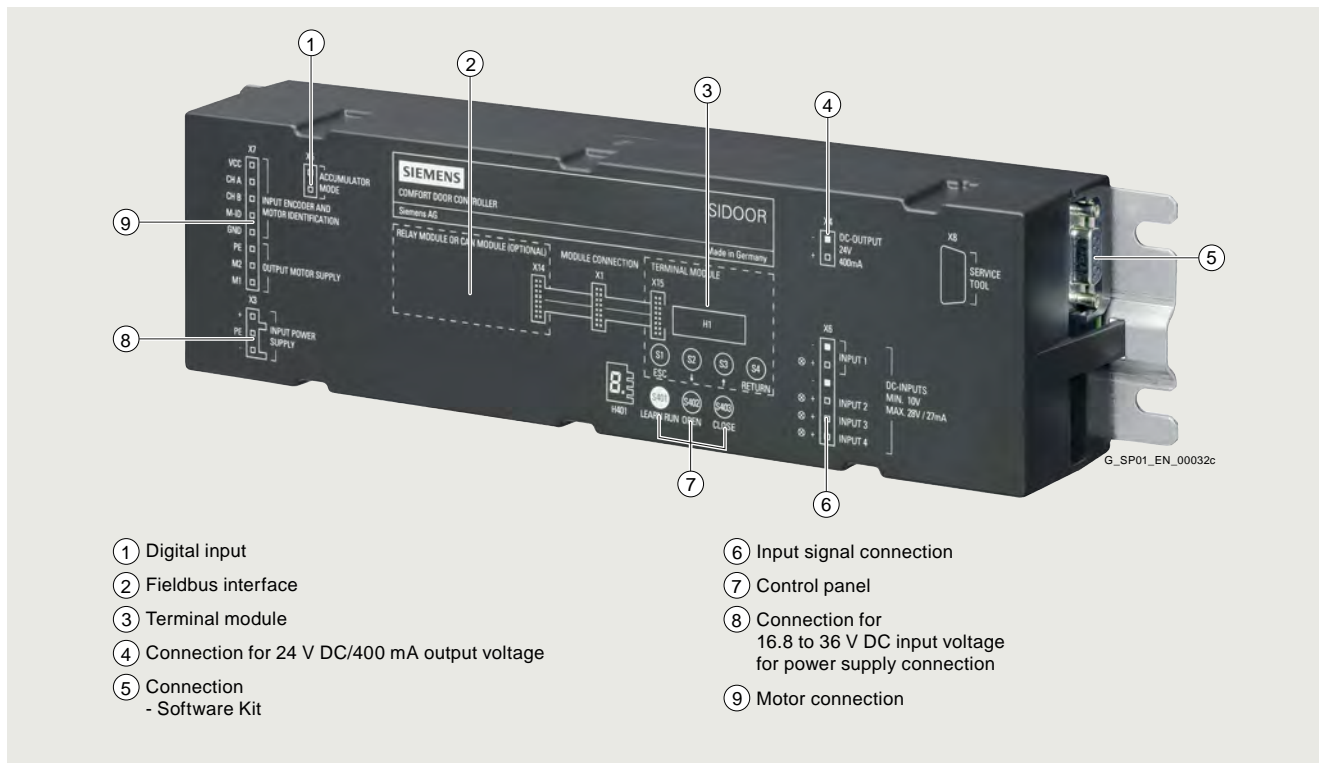

SIDOOR ATD420W

The SIDOOR ATD420W can be used to operate horizontal sliding doors. The drive system has been specially designed for use in a very wide range of machine tools. The communication-capable ATD420W controller offers complete flexibility for integration with a machine tool via PROFIBUS

- Masses of up to 700 kg
- Integrated PROFIBUS interface
- 5 freely parameterizable digital inputs for signal acquisition, of which one input is optionally parameterizable for:
 - Connection of a light barrier as type 2 ESPE (electro-sensitive protective equipment) according to EN 61496-1
 - Connection of a pressure-sensitive edge according to ISO 13856-2
- 2 relay contacts for additional position signals
- Automatic determination of the door weight and friction during the learn run
- Parameter assignment and analysis of the door parameters via PROFIdrive

- Operating temperature -20 to +50 °C
- Flexible motor management, i.e. automatic recognition of the geared motor
- Assisted drive (motor-assisted movement of the door)
- Impulse stop (door stopped automatically by applying light force)
- Impulse drive (automatic door movement after applying light force)
- Opening width 0.3 to 5 m
- Auxiliary power output 24 V DC $\pm 15\%$ and 0.4 A (short-circuit-proof)
- Output stage for the motor control is short-circuit proof
- Indicates the current operating states on a 7-segment display directly on the controller or using the Software Kit or the SIDOOR LINK with the SIDOOR SUPPORT App

Ordering data

Article No.

SIDOOR ATD420W

6FB1141-2AT10-3WE2

Control device, integrated
PROFIBUS interface

Technical specifications

Article number	6FB1141-2AT10-3WE2 SIDOOR ATD420W
Installation type/mounting	
Installation and mounting instructions	No direct solar radiation, final application-specific requirements must be observed. Installation outside a control cabinet only in horizontal mounting position
Supply voltage	
Design of the power supply	Via SIDOOR TRANSFORMER / SIDOOR TRANSFORMER UL / NT40 / SITOP PSU8200 13 A, 36 V or via DC
Rated value (DC)	36 V
Input current	
I _q , min.	30 A ² ·s
Encoder supply	
Output voltage (DC)	24 V; Ensure correct polarity! CAUTION: Do not supply with external voltage!
short-circuit proof	Yes
Overload-proof	Yes
24 V encoder supply	
• Output current, max.	400 mA
Power	
Active power input	145 W
Active power input, max.	540 W
Active power input (standby mode)	5 W
Digital inputs	
Control inputs isolated	Yes
Control inputs p-switching	Yes
Input voltage	
• for signal *0*, min.	-3 V
• for signal *0*, max.	5 V
• for signal *1*, min.	10 V
• for signal *1*, max.	28 V
Input current	
• for signal *1*, min.	9 mA
• for signal *1*, max.	27 mA
Digital outputs	
Relay outputs	
Switching capacity of contacts	
- at 30 V DC, min.	0.01 A
- at 30 V DC, max.	0.5 A


Article number	6FB1141-2AT10-3WE2 SIDOOR ATD420W
Mechanical data	
Opening width of door, min.	0.3 m
Opening width of door, max.	5 m
Weight of door, max.	600 kg
Operating cycle frequency of door, max.	180 1/h
Counterforce, max.	75 N
Kinetic energy, max.	100 J
Interfaces	
Interfaces/bus type	PROFIBUS according to IEC 61784-3
Number of bus nodes	32
Standards, approvals, certificates	
Certificate of suitability according to EN 81	No
CE mark	Yes
UL approval	Yes
EAC (formerly Gost-R)	Yes
TÜV Inspectorate approval	Yes
PNO certificate	Yes
China RoHS compliance	Yes
Standard for safety	EN 61010-1 / EN 61010-2-201 / UL 61010-1 / UL 61010-2-201 / EN ISO 13849-1 Cat. 2 PL d
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	50 °C
Ambient temperature during storage/transportation	
• Storage, min.	-40 °C
• Storage, max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
Relative humidity	
• No condensation, min.	10 %
• No condensation, max.	93 %
Dimensions	
Width	320 mm
Height	60 mm
Depth	80 mm

Products for specific requirements

Automatic door controls
for industrial applications

Control devices > SIDOOR ATD430W

Overview

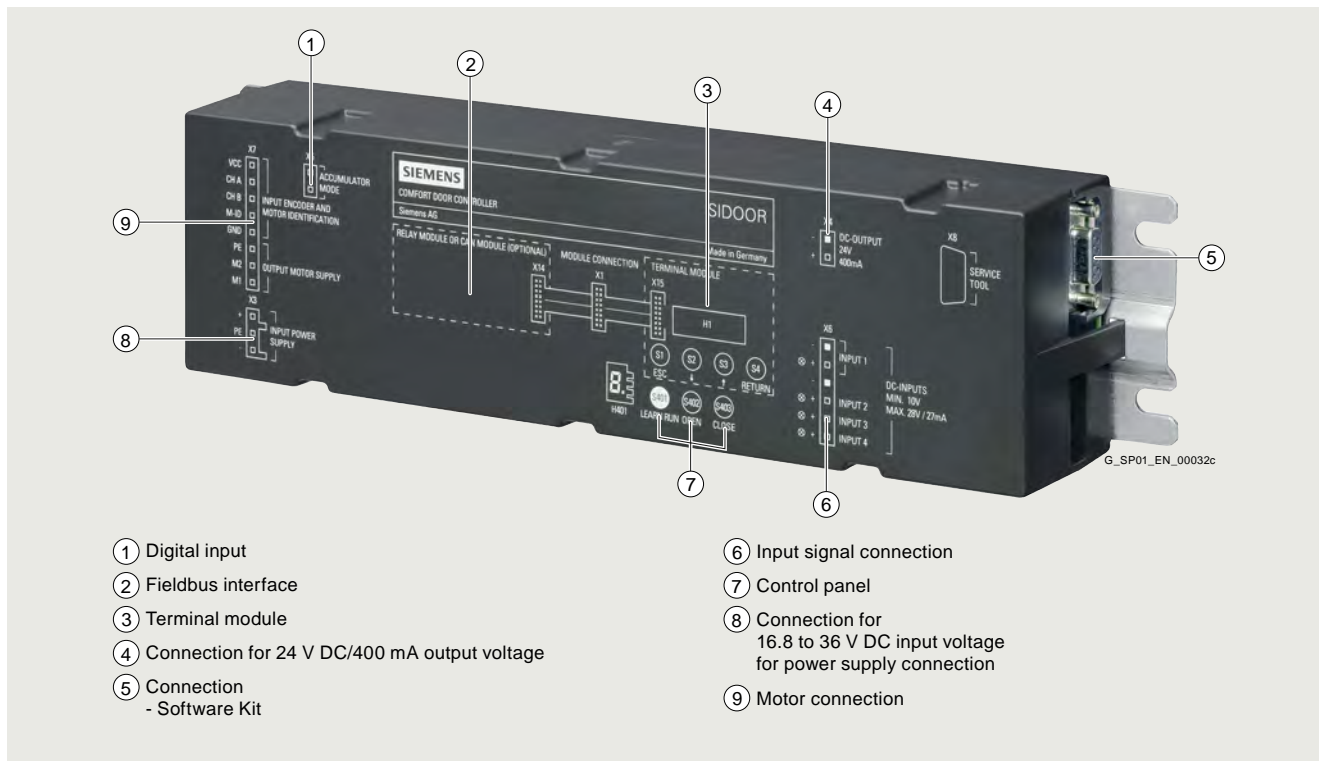

SIDOOR ATD430W

The SIDOOR ATD430W machine tool door drive can be used to operate horizontal sliding doors. The drive system has been specially designed for use in a very wide range of machine tools. The communication-capable ATD430W controller offers complete flexibility for integration into a machine tool via PROFINET.

- Masses of up to 700 kg
- Integrated PROFINET interface (2 RJ45 ports)
- 5 freely parameterizable digital inputs for signal acquisition, of which one input is optionally parameterizable for:
 - Connection of a light barrier as type 2 ESPE (electro-sensitive protective equipment) according to EN 61496-1
 - Connecting a pressure-sensitive edge according to ISO 13856-22, relay contacts for additional position signals
- 2 relay contacts for additional position signals
- Automatic determination of the door weight and friction during the learn run

- Parameter assignment and analysis of the door parameters
- Operating temperature -20 to +50 °C
- Flexible motor management, i.e. automatic recognition of the geared motor
- Assisted drive (motor-assisted movement of the door)
- Impulse stop (door stopped automatically by applying light force)
- Impulse drive (automatic door movement after applying light force)
- Opening width 0.3 to 5 m
- Auxiliary power output 24 V DC $\pm 15\%$ and 0.4 A (short-circuit-proof)
- Output stage for the motor control is short-circuit-proof
- Indicates the current operating states on a 7-segment display directly on the controller or using the Software Kit or the SIDOOR LINK with the SIDOOR SUPPORT App

Ordering data

Article No.

SIDOOR ATD430W

Control device, integrated PROFINET interface (2 RJ45 ports)

6FB1141-3AT10-3WE2

Technical specifications

Article number	6FB1141-3AT10-3WE2 SIDOOR ATD430W
Installation type/mounting	
Installation and mounting instructions	No direct solar radiation, final application-specific requirements must be observed. Installation outside a control cabinet only in horizontal mounting position
Supply voltage	
Design of the power supply	Via SIDOOR TRANSFORMER / SIDOOR TRANSFORMER UL / NT40 / SITOP PSU8200 13 A, 36 V or via DC
Rated value (DC)	36 V
Input current	
I _{pt} , min.	30 A ² ·s
Encoder supply	
Output voltage (DC)	24 V; Ensure correct polarity! CAUTION: Do not supply with external voltage!
short-circuit proof	Yes
Overload-proof	Yes
24 V encoder supply	
• Output current, max.	400 mA
Power	
Active power input	145 W
Active power input, max.	540 W
Active power input (standby mode)	5 W
Digital inputs	
Control inputs isolated	Yes
Control inputs p-switching	Yes
Input voltage	
• for signal *0*, min.	-3 V
• for signal *0*, max.	5 V
• for signal *1*, min.	10 V
• for signal *1*, max.	28 V
Input current	
• for signal *1*, min.	9 mA
• for signal *1*, max.	27 mA
Digital outputs	
Relay outputs	
Switching capacity of contacts	
- at 30 V DC, min.	0.01 A
- at 30 V DC, max.	0.5 A
Mechanical data	
Opening width of door, min.	0.3 m
Opening width of door, max.	5 m
Weight of door, max.	600 kg
Operating cycle frequency of door, max.	180 1/h
Counterforce, max.	75 N
Kinetic energy, max.	100 J

Article number	6FB1141-3AT10-3WE2 SIDOOR ATD430W
Interfaces	
Interfaces/bus type	PROFINET IO according to Conformance Class C
Standards, approvals, certificates	
Certificate of suitability according to EN 81	No
CE mark	Yes
UL approval	Yes
EAC (formerly Gost-R)	Yes
TÜV Inspectorate approval	Yes
PNO certificate	Yes
China RoHS compliance	Yes
Standard for safety	EN 61010-1 / EN 61010-2-201 / UL 61010-1 / UL 61010-2-201 / EN ISO 13849-1 Cat. 2 PL d
Ambient conditions	
Ambient temperature during operation	
• min.	-20 °C
• max.	50 °C
• Remark	Screw control device thermally conductive onto a metallic mounting surface or standard rail mounting, otherwise the maximum operating temperature is only 40 °C
Ambient temperature during storage/transportation	
• Storage, min.	-40 °C
• Storage, max.	70 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
Relative humidity	
• No condensation, min.	10 %
• No condensation, max.	93 %
Dimensions	
Width	320 mm
Height	60 mm
Depth	80 mm

Products for specific requirements

Automatic door controls
for industrial applications

Power supplies

Overview

The power supplies can be used for the various SIDOOR controllers:

SIDOOR Transformer and Transformer UL power supply units:
For masses of up to 400 kg and moderate performance.

- SIDOOR AT40 and ATE500E elevator door drives
- SIDOOR ATD4xxW machine tool door drives
- SIDOOR ATE53xS platform screen door drives

SIDOOR NT40 switched mode power supply:
For masses of up to 600 kg and maximum performance.

- SIDOOR AT40 and ATE500E elevator door drives
- SIDOOR ATD4xxW machine tool door drives

SITOP PSU8200 3-phase stabilized power supply,
36 V DC/13 A:

For masses of up to 700 kg and maximum performance.

- SIDOOR ATD4xxW machine tool door drives

Overview Power supply unit



SIDOOR Transformer

The SIDOOR TRANSFORMER and SIDOOR TRANSFORMER UL are standard power supply units operated with 220-240 V AC, 50/60 Hz, from the SIDOOR product range. They can be used for controllers capable of controlling masses of up to 400 kg.

For further information see page 14/17.

Overview Switched-mode power supply



The SIDOOR NT40 switched-mode power supply unit is operated with 230 V AC ($\pm 15\%$), 50/60 Hz, to power the elevator door controllers.

It is especially suitable for door systems with high door weights.

On the output side, the power supply unit delivers a voltage of 36 V DC ($\pm 3\%$) SELV at a rated output power of < 100 W.

In order to enable fast acceleration/deceleration of the doors by the controller, the device can briefly (< 2 s) deliver a current of 15 A (corresponds to a short-time power output of 540 W).

For further information see page 14/19.

Overview



The 3-phase SITOP PSU8200 are technology power supplies for challenging solutions. The wide-range input allows a connection to almost any electricity supply network worldwide and ensures a high degree of safety even if there are large voltage fluctuations.

To further increase 36 V availability, SITOP power supplies can be combined with redundancy modules.

Product highlights

- 3-phase, 36 V DC / 13 A
- Input voltage 320 ... 575 V AC
- Up to 94% efficiency
- cULus, cCSAus, ABS and DNV GL certifications

Ordering data**Article No.**

SITOP PSU8200 3-phase, 36 V DC/13 A	6EP3446-8SB10-0AY0
Stabilized power supply Input: 400 ... 500 V 3 AC Output: 36 V DC/13 A	
Accessories	
SITOP RED1200 redundancy modules	For more information, visit: www.siemens.com/sitop-redundancy/mall
Device identification labels	3RT2900-1SB20

Technical specifications

Article number	6EP3446-8SB10-0AY0
product brand name	SITOP PSU8200
type of current supply	36 V/13 A
input	
type of the power supply network	3-phase AC
supply voltage at AC minimum rated value	400 ... 500 V
supply voltage at AC maximum rated value	
supply voltage at AC	320 ... 575 V
wide range input	Yes
buffering time for rated value of the output current in the event of power failure minimum	15 ms
operating condition of the mains buffering	at Vin = 400 V
line frequency	50 Hz/60 Hz
line frequency	47 ... 63 Hz
input current	
• at rated input voltage 400 V	1.2 A
• at rated input voltage 500 V	1 A
current limitation of inrush current at 25 °C maximum	16 A
I ² t value maximum	0.8 A ² ·s
fuse protection type	none
fuse protection type in the feeder	Required: 3-pole connected miniature circuit breaker 6 ... 16 A characteristic C or circuit breaker 3RV2011-1DA10 (setting 3 A) or 3RV2711-1DD10 (UL 489)
output	
voltage curve at output	Controlled, isolated DC voltage
output voltage at DC rated value	36 V
output voltage	
• at output 1 at DC rated value	36 V 36 V
output voltage adjustable	Yes; via potentiometer
adjustable output voltage	36 ... 42 V; max. 480 W
relative overall tolerance of the voltage	3 %
relative control precision of the output voltage	
• on slow fluctuation of input voltage	0.1 %
• on slow fluctuation of ohm loading	0.2 %
residual ripple	
• maximum	100 mV
voltage peak	
• maximum	200 mV
display version for normal operation	Green LED for 36 V OK
type of signal at output	Relay contact (NO contact, rating 60 V DC/ 0.3 A) for 36 V OK
behavior of the output voltage when switching on	No overshoot of Vout (soft start)
response delay maximum	2.5 s

Products for specific requirements

Automatic door controls
for industrial applications

Power supplies > 3-phase, 36 V DC

Technical specifications

Article number	6EP3446-8SB10-0AY0
product brand name	SITOP PSU8200
type of current supply	36 V/13 A
voltage increase time of the output voltage	
• maximum	500 ms
output current	
• rated value	13 A
• rated range	0 ... 13 A; +60 ... +70 °C: Derating 2%/K 10.1 ... 19.9 A
supplied active power typical	468 W
short-term overload current	
• at short-circuit during operation typical	39 A
duration of overloading capability for excess current	
• at short-circuit during operation	25 ms
constant overload current	
• on short-circuiting during the start-up typical	14 A
bridging of equipment	Yes; switchable characteristic
number of parallel-switched equipment resources	2
efficiency in percent	94 %
power loss [W]	
• at rated output voltage for rated value of the output current typical	30 W
closed-loop control	
relative control precision of the output voltage with rapid fluctuation of the input voltage by +/- 15% typical	0.1 %
relative control precision of the output voltage load step of resistive load 50/100/50 % typical	1 %
setting time	
• load step 50 to 100% typical	0.2 ms
• load step 100 to 50% typical	0.2 ms
relative control precision of the output voltage at load step of resistive load 10/90/10 % typical	2 %
setting time	
• load step 10 to 90% typical	0.2 ms
• load step 90 to 10% typical	0.2 ms
• maximum	10 ms

Article number	6EP3446-8SB10-0AY0
product brand name	SITOP PSU8200
type of current supply	36 V/13 A
protection and monitoring	
design of the overvoltage protection	< 48 V
property of the output short-circuit proof	Yes
design of short-circuit protection	Alternatively, constant current characteristic approx. 14 A or latching shutdown
• typical	14 A
overcurrent overload capability	
• in normal operation	overload capability 150 % I _{out} rated up to 5 s/min
enduring short circuit current RMS value	
• typical	14 A
display version for overload and short circuit	LED yellow for "overload", LED red for "latching shutdown"
safety	
galvanic isolation between input and output	Yes
galvanic isolation	Safety extra low output voltage V _{out} according to EN 60950-1
operating resource protection class	Class I
leakage current	
• maximum	3.5 mA
• typical	0.9 mA
protection class IP standard	IP20
• for emitted interference	EN 55022 Class B
• for mains harmonics limitation	EN 61000-3-2
• for interference immunity	EN 61000-6-2
standards, specifications, approvals	
certificate of suitability	
• CE marking	Yes
• UL approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cCSAus (CSA C22.2 No. 60950-1, UL 60950-1)
• CSA approval	Yes; cULus-Listed (UL 508, CSA C22.2 No. 107.1), File E197259; cCSAus (CSA C22.2 No. 60950-1, UL 60950-1)
• EAC approval	Yes
• Regulatory Compliance Mark (RCM)	Yes
• NEC Class 2	No
• SEMI F47	Yes
type of certification	
• CB-certificate	Yes

Technical specifications

Article number	6EP3446-8SB10-0AY0
product brand name	SITOP PSU8200
type of current supply	36 V/13 A
standards, specifications, approvals hazardous environments	
certificate of suitability	
• IECEX	No
• ATEX	No
• ULhazloc approval	No
• cCSAus, Class 1, Division 2	No
• FM registration	No
standards, specifications, approvals marine classification	
shipbuilding approval	Yes
Marine classification association	
• American Bureau of Shipping Europe Ltd. (ABS)	No
• French marine classification society (BV)	No
• Det Norske Veritas (DNV)	Yes
• Lloyds Register of Shipping (LRS)	No
standards, specifications, approvals Environmental Product Declaration	
Environmental Product Declaration	Yes
Global Warming Potential [CO ₂ eq]	
• total	958.4 kg
• during manufacturing	18.9 kg
• during operation	939 kg
• after end of life	0.27 kg
ambient conditions	
ambient temperature	
• during operation	-25 ... +70 °C; with natural convection
• during transport	-40 ... +85 °C
• during storage	-40 ... +85 °C
environmental category according to IEC 60721	Climate class 3K3, 5 ... 95% no condensation
connection method	
type of electrical connection	screw terminal
• at input	L1, L2, L3, PE: 1 screw terminal each for 0.2 ... 4 mm ² single-core/finely stranded
• at output	+, -: 2 screw terminals each for 0.2 ... 4 mm ²
• for auxiliary contacts	13, 14 (alarm signal): 1 screw terminal each for 0.14 ... 1.5 mm ² ; 15, 16 (Remote): 1 screw terminal each for 0.14 ... 1.5 mm ²

Article number	6EP3446-8SB10-0AY0
product brand name	SITOP PSU8200
type of current supply	36 V/13 A
mechanical data	
width × height × depth of the enclosure	70 mm × 125 mm × 125 mm
installation width × mounting height	70 mm × 225 mm
required spacing	
• top	50 mm
• bottom	50 mm
• left	0 mm
• right	0 mm
fastening method	Snaps onto DIN rail EN 60715 35x7.5/15
• standard rail mounting	Yes
• S7 rail mounting	No
• wall mounting	No
housing can be lined up	Yes
net weight	1.2 kg
accessories	
mechanical accessories	Device identification label 20 mm × 7 mm, TI-grey 3RT2900-1SB20
further information internet links	
internet link	
• to web page: selection aid TIA Selection Tool	https://siemens.com/tst
• to website: Industrial communication	http://www.siemens.com/simatic-net
• to website: CAx-Download-Manager	http://www.siemens.com/cax
additional information	
other information	Specifications at rated input voltage and ambient temperature +25 °C (unless otherwise specified)

Products for specific requirements

Automatic door controls
for industrial applications

Additional units > Software kit

Overview



SIDOOR Software Kit

The scope of delivery of the SIDOOR Software Kit includes an installation CD.

The CD includes the following functionalities:

SIDOOR User Software	The component that enables the door control system to be configured, parameters to be assigned, and analyzed.
Siemens HCS12 Firmware Loader	This component is used to update the operating software of the door controller.
SIDOOR USB to UART Bridge Driver	This driver is essential for operation of the USB adapter.

Note:

Some firmware updates are offered as free downloads in the Siemens Industry Online Support. For information on the availability and acquisition of more firmware, please contact Technical Support.

Ordering data

SIDOOR Software Kit

Article No.

6FB1105-0AT01-6SW0

Products for specific requirements


Automatic door controls
for industrial applications

Additional units > SIDOOR LINK and SIDOOR SUPPORT App

Overview



SIDOOR LINK

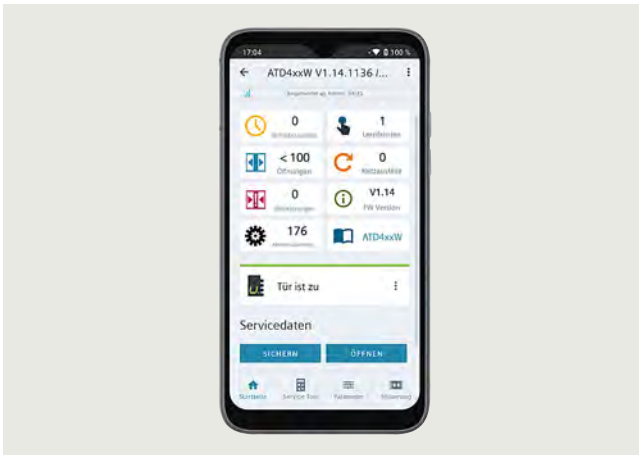

SIDOOR SUPPORT App

A Bluetooth LE 5.0 connection can be established via the SIDOOR LINK to a smartphone or tablet with the SIDOOR SUPPORT app installed.

The SIDOOR SUPPORT app enables easy commissioning and maintenance of a door system with a SIDOOR controller, is suitable for smartphones or tablets as of Android version 9 and is available from the Google Play store.

The SIDOOR LINK is connected to the SIDOOR controller via the respective cable.

You do not need to open the cover of the controller to do this.

Note:

If the SIDOOR SUPPORT (app) is in the "Quick adjustment" or "Total adjustment" menu, the drive commands of the controller are blocked via the command inputs.

Ordering data

SIDOOR LINK, SIDOOR Service adapter

For commissioning and maintaining
the SIDOOR controllers via
SIDOOR SUPPORT (app)

Article No.

6FB1305-0AT00-0AS4

Products for specific requirements

Automatic door controls
for industrial applications

Geared motors

Overview

The SIDOOR geared motor is a combination of a gear unit, motor and incremental encoder matched to the complete system. It is easy to connect to the controller via the interface provided, and is automatically detected during commissioning.

The maintenance-free, variable speed drive unit comprises a DC motor with non-self-locking gearing. All geared motors are available with the output shaft on the left or right. The view is toward the front of the gear unit.

The "mass to be moved" has to be taken into account when selecting the geared motor:

The weight to be moved is calculated from the sum of the mass equivalent of the moment of inertia of the motor rotor, the moved door weight and the moved door mechanism weight. The weight of the door to be moved and the moved weight of the door mechanism depend on the application. You can find additional information in the system manual.

The **output shaft** is appropriately prepared for the mechanical coupling of the door.

- SIDOOR M3, M4 and M5 Basic motors: Output gear with 56 mm effective diameter for the use of a S8M toothed belt (see Accessories).
- Advanced motors: Gearbox output shaft with groove and feather key A 5x5 according to DIN 6885; the output gear design and effective diameter can be freely configured between 28 mm and 122 mm. Advanced motors are recommended, among other things, for a mechanical coupling to the door via gear rack or chain.

Advanced motors:

SIDOOR MDG3 L	6FB1103-0AT14-4MB1
SIDOOR MDG3 R	6FB1103-0AT13-4MB1
SIDOOR MDG4 L	6FB1103-0AT14-3MC2
SIDOOR MDG4 R	6FB1103-0AT13-3MC2
SIDOOR MDG5 L	6FB1103-0AT14-3MG2
SIDOOR MDG5 R	6FB1103-0AT13-3MG2

Version	Advanced motors			Basic motors		
SIDOOR designation	MDG3	MDG4	MDG5	M3	M4	M5
Maximum mass to be moved	180 kg	400 kg	700 kg	180 kg	400 kg	600 kg
Connection to door controller	via SIDOOR MDG CABLE (see Accessories)			Connecting cable permanently integrated with the geared motor, cable length 1.5 m		
Degree of protection	IP56			IP40		IP54
Design of output shaft	Gearbox output shaft with groove and feather key, optional output gear for S8M toothed belt available (see Accessories)			Fixed, pressed-on output gear for S8M toothed belt (see Accessories)		



SIDOOR M3 L to SIDOOR M5 L geared motors for automatic door control



SIDOOR MDG3 L, MDG4 L and MDG5 L

Ordering data	Article No.	Article No.	
SIDOOR M3 geared motors		SIDOOR MDG3 geared motors	
M3 L	6FB1103-0AT10-4MB0	MDG3 L	6FB1103-0AT14-4MB1
M3 R	6FB1103-0AT11-4MB0	MDG3 R	6FB1103-0AT13-4MB1
SIDOOR M4 geared motors		SIDOOR MDG4 geared motor	
M4 L	6FB1103-0AT10-3MC0	MDG4 L	6FB1103-0AT14-3MC2
M4 R	6FB1103-0AT11-3MC0	MDG4 R	6FB1103-0AT13-3MC2
SIDOOR M5 geared motors		SIDOOR MDG5 geared motor	
M5 L	6FB1103-0AT10-3MD0	MDG5 L	6FB1103-0AT14-3MG2
M5 R	6FB1103-0AT11-3MD0	MDG5 R	6FB1103-0AT13-3MG2

Technical specifications

Article number	6FB1103-0AT10-4MB0	6FB1103-0AT11-4MB0	6FB1103-0AT10-3MC0	6FB1103-0AT11-3MC0	6FB1103-0AT10-3MD0	6FB1103-0AT11-3MD0
	SIDOOR M3 L	SIDOOR M3 R	SIDOOR M4 L	SIDOOR M4 R	SIDOOR M5 L	SIDOOR M5 R
Supply voltage						
Rated value (DC)	30 V					
Input current						
Operational current (rated value)	4 A			7.5 A		
Power						
Active power input	120 W			225 W		
Mechanical data						
Torque of the rotary operating mechanism (rated value)	3 N·m			6.8 N·m		
Speed, max.	0.65 m/s		0.75 m/s		0.5 m/s	
Gear ratio	15					
Number of pulses per revolution, max.	100					
Weight of door, max.	180 kg			400 kg		600 kg
Standards, approvals, certificates						
CE mark	Yes					
UL approval	Yes					
EAC (formerly Gost-R)	Yes					
TÜV Inspectorate approval	Yes					
China RoHS compliance	Yes					
Ambient conditions						
Ambient temperature during operation						
• min.	-20 °C					
• max.	50 °C					
Ambient temperature during storage/transportation						
• Storage, min.	-40 °C					
• Storage, max.	85 °C					
Dimensions						
Height of motor	98 mm		115 mm		124 mm	
Length of motor	236 mm		275 mm		344 mm	
Diameter of motor	63 mm					
Width of gear unit, including drive pinion	85 mm			105 mm		111 mm

Products for specific requirements

Automatic door controls
for industrial applications

Geared motors

Technical specifications

Article number	6FB1103-0AT14-4MB1	6FB1103-0AT13-4MB1	6FB1103-0AT14-3MC2	6FB1103-0AT13-3MC2	6FB1103-0AT14-3MG2	6FB1103-0AT13-3MG2
	SIDOOR MDG3 L	SIDOOR MDG3 R	SIDOOR MDG4 L	SIDOOR MDG4 R	SIDOOR MDG5 L	SIDOOR MDG5 R
General information						
Product type designation	MDG3 L	MDG3 R	MDG4 L	MDG4 R	MDG5 L	MDG5 R
Supply voltage						
Rated value (DC)	30 V					
Input current						
Operational current (rated value)	4 A				7.5 A	
Power						
Active power input	120 W				225 W	
Mechanical data						
Torque of the rotary operating mechanism (rated value)	3 N·m				6 N·m	
Speed, max.	0.65 m/s		0.75 m/s		0.5 m/s	
Mass to be moved, max.	180 kg		400 kg		700 kg	
Gear unit	Yes					
Gear ratio	15					
Number of pulses per revolution, max.	100					
Fixed output gear	No					
Standards, approvals, certificates						
CE mark	Yes					
UL approval	Yes					
EAC (formerly Gost-R)	Yes					
China RoHS compliance	Yes					
Ambient conditions						
Ambient temperature during operation						
• min.	-20 °C					
• max.	50 °C					
Ambient temperature during storage/transportation						
• Storage, min.	-40 °C					
• Storage, max.	85 °C					
Cables						
Fixed connecting cable	No					
Dimensions						
Diameter of output gear, min.	28 mm					
Diameter of output gear, max.	122 mm					
Height of motor	98 mm		115 mm		124 mm	
Length of motor	264 mm		303 mm		348 mm	
Diameter of motor	63 mm				80 mm	
Width of gearbox	85 mm		106 mm		109 mm	

Overview

An extensive range of accessories is available for the door control drives.

This is necessary to ensure low-noise operation of the door leaves by the motor. The geared motors can be optimally integrated into the respective door drive system.


Accessories for all controllers for industrial applicationsRubber-metal anti-vibration mounts for geared motors

To ensure low-noise door operation, SIDOOR geared motors are integrated in the door system using rubber-metal anti-vibration mounts.

- Rubber-metal anti-vibration mount 6FB1104-0AT02-0AD0 for SIDOOR M3 and SIDOOR MDG3 geared motors
- Rubber-metal anti-vibration mount 6FB1104-0AT01-0AD0 for SIDOOR M4 and MDG4 as well as SIDOOR M5 and MDG5 geared motors



Rubber-metal anti-vibration mount 6FB1104-0AT02-0AD0 for geared motors with masses to be moved of up to 180 kg

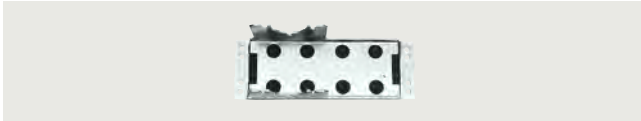

Rubber-metal anti-vibration mount 6FB1104-0AT01-0AD0 for geared motors with masses of up to 700 kg

Mounting bracket

Two different mounting brackets are available with elongated holes:

- Mounting bracket 6FB1104-0AT01-0AS0 for mounting SIDOOR geared motors, for flexible accommodation of the rubber-bonded metal
- Mounting bracket 6FB1104-0AT02-0AS0 for the deflector unit. For setting the toothed belt to the required belt tension.



Mounting bracket 6FB1104-0AT01-0AS0 for mounting the geared motor



Mounting bracket 6FB1104-0AT02-0AS0 for the deflector unit

Mounting rail holder

The standard mounting rail holder 6FB1144-0AT00-3SA0 is available for mounting controllers on the TH 35 standard mounting rail according to IEC 60715.

Door clutch holder

The door clutch holder serves to connect the respective door leaf by means of a toothed belt while also functioning as a toothed-belt lock. One door clutch holder per door leaf is required. The toothed-belt lock can accommodate both open ends of the toothed belt.

A door clutch holder is available for each toothed belt width:

- Width 12 mm: 6FB1104-0AT01-0CP0
- Width 14 mm: 6FB1104-0AT02-0CP0



Door clutch holder 6FB1104-0AT01-0CP0 (packaging size = 1 unit)

Deflector unit

The deflector unit 6FB1104-0AT03-0AS0 contains an embedded belt pulley which can be mounted on the door system. The STS toothed belt is redirected via this deflector unit.



Deflector unit 6FB1104-0AT03-0AS0

Products for specific requirements

Automatic door controls
for industrial applications


Accessories

Overview

STS toothed belt

The door system is moved between the end positions of the door using the STS toothed belts. Two different toothed belt lengths can be ordered for each toothed belt width.

- Toothed belt width 12 mm:
 - Length 4 m: 6FB1104-0AT01-0AB0
 - Length 45 m: 6FB1104-0AT02-0AB0
- Toothed belt width 14 mm:
 - Length 4 m: 6FB1104-0AT03-0AB0
 - Length 55 m: 6FB1104-0AT04-0AB0

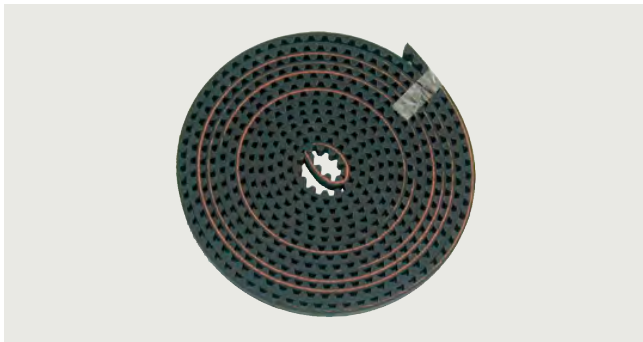

Toothed belt 6FB1104-0AT01-0AB0 (width 12 mm, length 4 m)




Toothed belt 6FB1104-0AT02-0AB0 (width 12 mm, length 45 m)


MDG-PULLEY belt pulley

This belt pulley is used for DC geared motors with the S8M toothed belt with an effective diameter of 56 mm.

- for SIDOOR MDG4, MDG5 DC geared motors: 6FB1104-0AT14-0AS1
- for SIDOOR MDG3 DC geared motors: 6FB1104-0AT10-0AS1

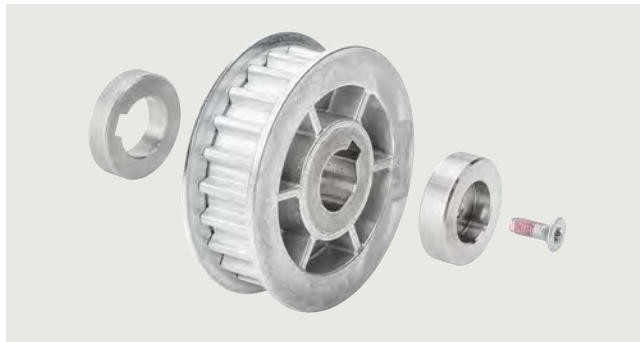

SIDOOR MDG-PULLEY 14-S8M-56, 6FB1104-0AT14-0AS1

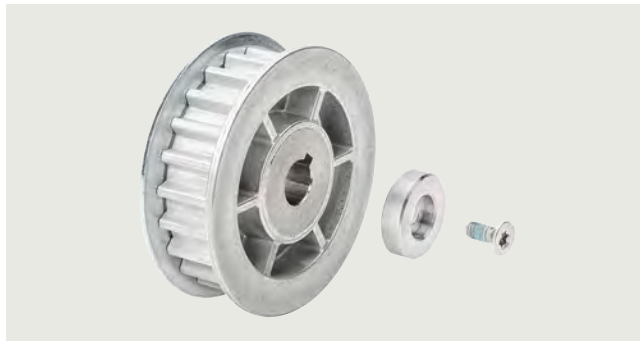

SIDOOR MDG-PULLEY 10-S8M-56, 6FB1104-0AT10-0AS1

Accessories for machine tool door drives only

SIDOOR MDG-CABLE cable set

This cable set connects the ATD4xxW door controller to the SIDOOR MDG3, MDG 4 and MDG 5 geared motors. Various lengths are available.

- Length 5 m: 6FB1104-0AT05-0CB2
- Length 10 m: 6FB1104-0AT10-0CB2
- Length 15 m: 6FB1104-0AT15-0CB2
- Length 20 m: 6FB1104-0AT20-0CB2

Products for specific requirements

Automatic door controls
for industrial applications

Accessories

Ordering data	Article No.	Ordering data	Article No.
Rubber-metal anti-vibration mounts for geared motors <ul style="list-style-type: none"> SIDOOR rubber-metal anti-vibration mount for geared motors with masses of up to 180 kg SIDOOR rubber-metal anti-vibration mount for geared motors with masses of up to 700 kg 	6FB1104-0AT02-0AD0 6FB1104-0AT01-0AD0	SIDOOR STS toothed belt Width 14 mm <ul style="list-style-type: none"> 4 m 55 m 	6FB1104-0AT03-0AB0 6FB1104-0AT04-0AB0
Mounting bracket <ul style="list-style-type: none"> SIDOOR mounting bracket for geared motor SIDOOR mounting bracket with tensioning device for deflector pulley 	6FB1104-0AT01-0AS0 6FB1104-0AT02-0AS0	For industrial applications only SIDOOR MDG-CABLE cable set <ul style="list-style-type: none"> 5 m 10 m 15 m 20 m 	6FB1104-0AT05-0CB2 6FB1104-0AT10-0CB2 6FB1104-0AT15-0CB2 6FB1104-0AT20-0CB2
DIN rail holder For mounting controllers on the standard DIN rail TH 35	6FB1144-0AT00-3AS0	SIDOOR door clutch holder <ul style="list-style-type: none"> For toothed belt, width 14 mm 	6FB1104-0AT02-0CP0
SIDOOR door clutch holder <ul style="list-style-type: none"> For toothed belt width of 12 mm 	6FB1104-0AT01-0CP0	SIDOOR MDG-PULLEY <ul style="list-style-type: none"> SIDOOR MDG-PULLEY 14-S8M-56 belt pulley for MDG4 and MDG5 DC geared motors and S8M toothed belt, effective diameter 56 mm SIDOOR MDG-PULLEY 10-S8M-56, belt pulley for MDG3 DC geared motor and S8M toothed belt, effective diameter 56 mm 	6FB1104-0AT14-0AS1 6FB1104-0AT10-0AS1
SIDOOR deflector unit	6FB1104-0AT03-0AS0		
SIDOOR STS toothed belt Width 12 mm <ul style="list-style-type: none"> 4 m 45 m 	6FB1104-0AT01-0AB0 6FB1104-0AT02-0AB0		

Products for specific requirements

Automatic door controls

for railway applications


Overview

The product-specific application/requirement lies in complying with the special railway requirements concerning functional safety.

Interior railway doors have a closing spring which must always bring the door into the "CLOSED" position. This applies to either side, even when a train car is inclined at 10°.

These specific operating states are handled by the door controller.

Overview

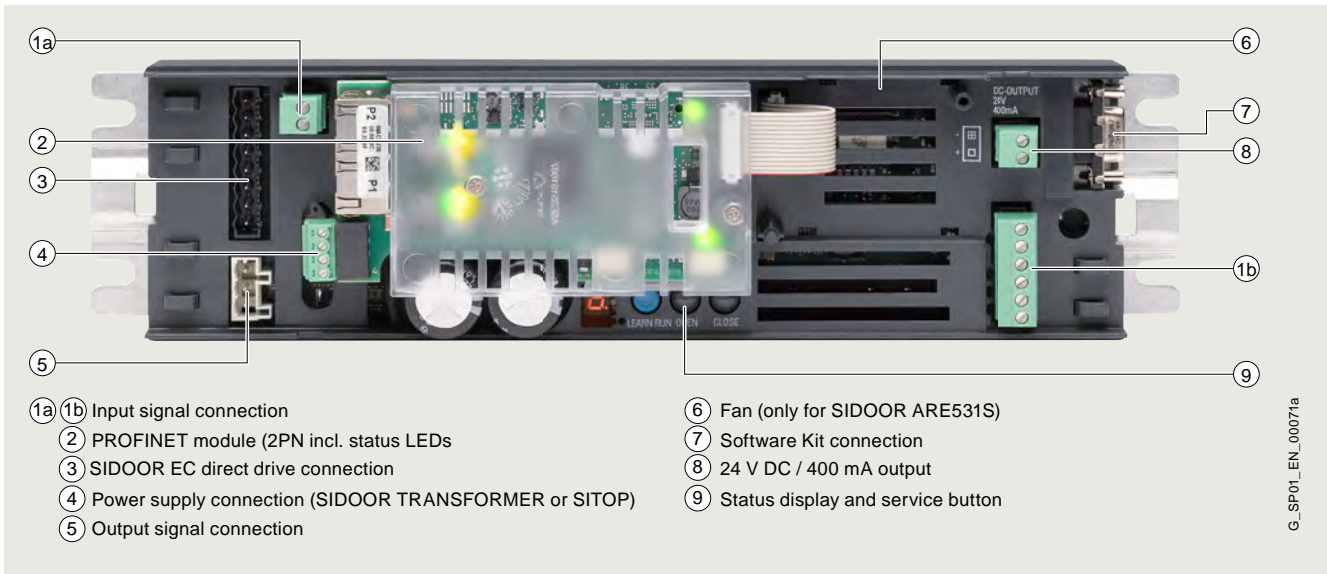

SIDOOR ATE530S/531S wiring diagram

The SIDOOR ATE53xS door controller is an “intelligent” door drive which can be used for safety-oriented operation of platform screen doors (PSD) according to individual requirements. Siemens has once again shown just how easy integration can be with the innovative SIDOOR ATE53xS platform screen door drive in conjunction with SIDOOR MED280 or MEG251 motors. The PROFINET module integrated in the SIDOOR ATE53xS enables standardized, certified connection to PROFINET IO systems.

- Use of standard automation components
- Full integration into TIA Portal and STEP 7 thanks to PROFINET connection
- Parameter assignment and monitoring of door control parameters via the PROFINET interface (function blocks available as example applications in SIOS).

- Application example:
Synchronization of two-panel and independent platform screen doors with SIDOOR ATE530S PROFINET EC door drive and S7-1500 CPU via TIA Portal
<https://support.industry.siemens.com/cs/ww/en/view/109480495>
- Application example:
Safety-oriented automation of platform screen doors with SIDOOR ATE530S PROFINET EC door drive and S7-1500 CPU via TIA Portal
<https://support.industry.siemens.com/cs/ww/en/view/109477186>
- Read-in of two safe signals (two-channel, antivalent)
- High level of system safety thanks to safe torque off (e.g. self-release in the event of a fault)
- Firmware update for all SIDOOR controllers on an entire platform possible centrally via TCP/IP
- SIL 2 according to IEC 62061

Ordering data

Article No.

SIDOOR ATE530S
Platform screen door driveSIDOOR ATE530S coated,
version with protective coating**6FB1231-3BM12-7AT0****SIDOOR ATE531S**
Platform screen door driveSIDOOR ATE531S,
version with protective coating
and extended temperature range

Article No.

6FB1231-3BM11-7AT0

Products for specific requirements

Automatic door controls
for railway applications

Control devices > Platform screen door drive

Technical specifications

Article number	6FB1231-3BM12-7AT0 SIDOOR ATE530S COATED	6FB1231-3BM11-7AT0 SIDOOR ATE531S
General information		
Product type designation	ATE531S	
Mean time between failures (MTBF)	13 y	
Installation type/mounting		
Installation and mounting instructions	No direct exposure to the sun	
Supply voltage		
Design of the power supply	Via SIDOOR TRANSFORMER or via DC	
Rated value (DC)	36 V; with MED280: at 24 V DC max. door speed of 500 mm/s, at 28.8 V DC max. door speed of 800 mm/s. With MEG251: at 24 V DC max. door speed of 500 mm/s, at 28.8 V DC max. door speed of 750 mm/s	
Encoder supply		
Output voltage (DC)	24 V; Ensure correct polarity! CAUTION: Do not supply with external voltage!	
short-circuit proof	Yes	
Overload-proof	Yes	
24 V encoder supply		
• Output current, max.	400 mA	
Power		
Active power input	80 W	
Active power input, max.	540 W	
Active power input (standby mode)	7 W	
Digital inputs		
Control inputs isolated	Yes	
Control inputs p-switching	Yes	
Input voltage		
• for signal *0*, min.	-3 V	
• for signal *0*, max.	5 V	
• for signal *1*, min.	10 V	
• for signal *1*, max.	28 V	
Input current		
• for signal *1*, min.	3 mA	
• for signal *1*, max.	15 mA	
Digital outputs		
Relay outputs		
Switching capacity of contacts		
- at 30 V DC, min.	0.01 A	
- at 30 V DC, max.	0.5 A	
Mechanical data		
Opening width of door, min.	0.35 m	
Opening width of door, max.	5 m	
Weight of door, max.	280 kg	
Operating cycle frequency of door, max.	180 1/h	
Kinetic energy, max.	75 J	
Interfaces		
Interfaces/bus type	PROFINET according to Conformance Class A, B, C; integrated switch for linear and ring structure	

Technical specifications


Article number	6FB1231-3BM12-7AT0	6FB1231-3BM11-7AT0
	SIDOOR ATE530S COATED	SIDOOR ATE531S
Standards, approvals, certificates		
CE mark	Yes	No
UL approval	No	
China RoHS compliance	Yes	
Standard for safety	EN 61010-1 / EN 61010-2-201 / EN 14752 / EN ISO 13849-1 Cat. 2 PL d / IEC 62061: SIL 2	
Ambient conditions		
Ambient temperature during operation		
• min.	-25 °C	70 °C
• max.	50 °C	
• Remark	Screw control device thermally conductive onto a metallic mounting surface or standard rail mounting, otherwise the maximum operating temperature is only 40 °C	to ensure compliance with MTBF value, ensure that the ambient temperature is less than 50 °C for 90 % of operating time and screw the control unit onto a metallic mounting surface in a manner that ensures thermal conductivity or use standard rail mounting. At operating temperatures above 50 °C, the maximum output current of the 24 V DC output is a maximum of 0.1 A and the maximum number of cycles is 60/h
Ambient temperature during storage/transportation		
• Storage, min.	-40 °C	
• Storage, max.	85 °C	
Altitude during operation relating to sea level		
• Installation altitude above sea level, max.	2 000 m	
Relative humidity		
• No condensation, min.	10 %	
• No condensation, max.	93 %	
Dimensions		
Width	320 mm	
Height	60 mm	
Depth	80 mm	

Products for specific requirements

Automatic door controls
for railway applications

Control devices > Control device for gap fillers

Overview

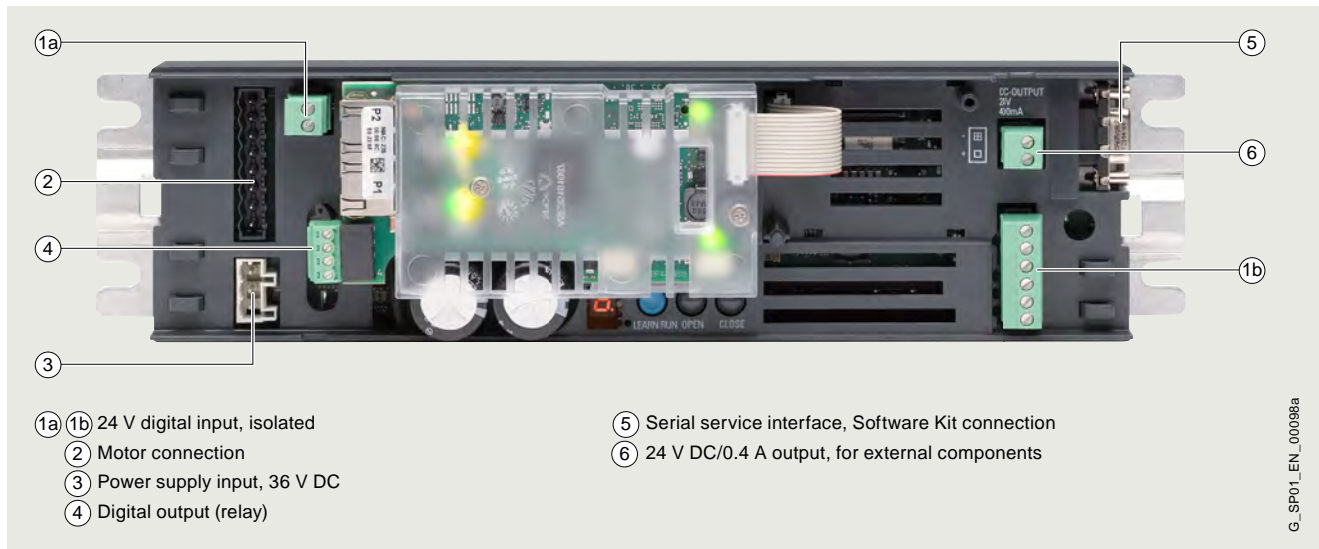

SIDOOR ATE530G

The SIDOOR ATE530G drive control is designed for controlling gap fillers between external train doors and the platform edge. The gap filler facilitates easy access for passengers. The innovative SIDOOR ATE530G drive solution enables operation of a gap filler with adjustable speed, acceleration and motor currents.

A project-specific motor is used depending on the application. The SIDOOR ATE530G controller is activated by digital signals from a higher-level door control, and reports information about its current state via digital signals back to the door control.

The following drive functions are supported:

- System start-up after power failure
- "Extend", "Retract" command
- Gap filler is moved by a travel curve profile
- Obstruction detection
- Ice-breaker function
Icing can be shifted broken by repeated extension and retraction of the gap filler with increased force.
- Reversing at the platform edge

The SIDOOR ATE530G controller fulfills Basic Integrity in accordance with EN 50657:2017

Ordering data

Article No.

**SIDOOR ATE530G
control device for gap fillers**

SIDOOR ATE530G coated

For controlling gap fillers between external train doors and the platform edge.

6FB1221-5SM10-7BP0

Technical specifications

Article number	6FB1221-5SM10-7BP0 SIDOOR ATE530G COATED
General information	
Product type designation	ATE530G COATED
Mean time between failures (MTBF)	13 y
Installation type/mounting	
Installation and mounting instructions	No direct exposure to the sun
Supply voltage	
Design of the power supply	Via SIDOOR TRANSFORMER or via DC
Rated value (DC)	36 V
Encoder supply	
Output voltage (DC)	24 V; Ensure correct polarity! CAUTION: Do not supply with external voltage!
short-circuit proof	Yes
Overload-proof	Yes
24 V encoder supply	
• Output current, max.	400 mA
Power	
Active power input	80 W
Active power input, max.	540 W
Active power input (standby mode)	7 W
Digital inputs	
Control inputs isolated	Yes
Control inputs p-switching	Yes
Input voltage	
• for signal *0*, min.	-3 V
• for signal *0*, max.	5 V
• for signal *1*, min.	10 V
• for signal *1*, max.	28 V
Input current	
• for signal *1*, min.	3 mA
• for signal *1*, max.	15 mA
Digital outputs	
Relay outputs	
Switching capacity of contacts	
- at 30 V DC, min.	0.01 A
- at 30 V DC, max.	0.5 A


Article number	6FB1221-5SM10-7BP0 SIDOOR ATE530G COATED
Standards, approvals, certificates	
CE mark	Yes
EAC (formerly Gost-R)	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C
• max.	50 °C
• Remark	Screw control device thermally conductive onto a metallic mounting surface or standard rail mounting, otherwise the maximum operating temperature is only 40 °C
Ambient temperature during storage/transportation	
• Storage, min.	-40 °C
• Storage, max.	85 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
Relative humidity	
• No condensation, min.	10 %
• No condensation, max.	93 %
Dimensions	
Width	320 mm
Height	60 mm
Depth	80 mm

Products for specific requirements

Automatic door controls
for railway applications

Control devices > Interior railway door drives

Overview

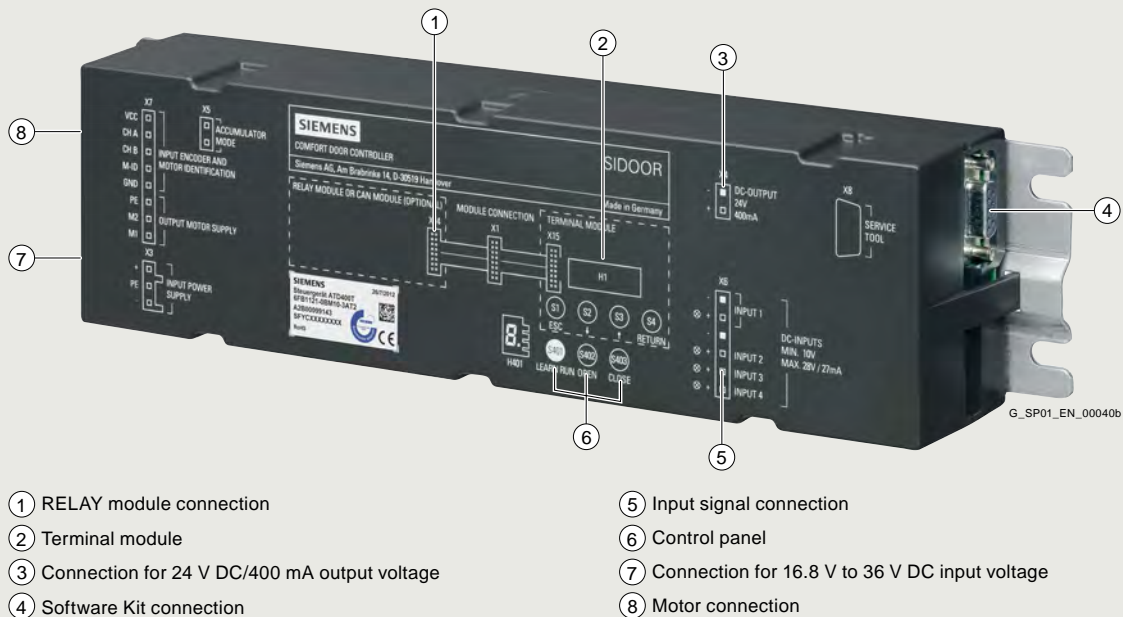

SIDOOR ATD400T interior railway door drive

The SIDOOR ATD400T interior railway door drive is an "intelligent" door drive which enables interior and gangway doors to be opened and closed at adjustable speeds and accelerations.

- Relay module design
- For dynamic door weights up to 180 kg
- Automatic door weight detection
- Operating temperature -20 to +70 °C ¹⁾
- Flexible motor management (two different motor types), automatic detection
- Opening width 0.25 to 4 m
- Door can be operated with and without closing springs (60 to 80 N)
- With two identical door leaves, can be used up to a train inclination of 0 to 10%
- Forces and energies are limited in accordance with EN 14752
- EMC according to EN 50121-3-2
- Fulfills HL3 according to fire protection standard EN 45545-2 (Railway applications – Fire protection on rail vehicles)
- Vandal-proof

1) Note:

- Maximum output current at 24 V DC:
 - 0.4 A at ≤ 55 °C ambient temperature during operation
 - 0.1 A from 55 °C to 70 °C ambient temperature during operation, with restrictions at operating temperatures > 55 °C
- Maximum ambient temperature during operation:
 - 55 °C
 - 70 °C with restrictions at operating temperatures > 55 °C
- Restrictions at operating temperatures > 55 °C:
 - Use the 24 V output voltage only for operating the control inputs (max. 0.1 A)
 - Use a sufficiently large (at least 350 x 350 mm), unpainted metal mounting plate
 - The maximum drive parameters are restricted to the default values
 - If temperature class T3 according to EN 50155 is used, the maximum air temperature of 85 °C must not be exceeded near the printed-circuit board

Ordering data

Article No.

SIDOOR ATD400T

Control device for interior railway doors, relay module design

6FB1121-0BM13-3AT2

Technical specifications

Article number	6FB1121-0BM13-3AT2 SIDOOR ATD400T RELAY
General information	
Product type designation	ATD400T relay
Installation type/mounting	
Installation and mounting instructions	At operating temperatures > 55 °C a sufficiently large (at least 350 mm x 350 mm), unpainted, metal mounting plate must be used
Supply voltage	
Design of the power supply	DC
Rated value (DC)	24 V
Input current	
Current consumption, max.	15 A
Encoder supply	
Output voltage (DC)	24 V; Ensure correct polarity! CAUTION: Do not supply with external voltage!
short-circuit proof	Yes
Overload-proof	Yes
24 V encoder supply	
• Output current, max.	400 mA
• output current at 55 °C to 70 °C, max.	100 mA
Power	
Active power input	80 W
Active power input, max.	540 W
Digital inputs	
Control inputs isolated	Yes
Control inputs p-switching	Yes
Input voltage	
• for signal *0*, min.	-3 V
• for signal *0*, max.	5 V
• for signal *1*, min.	10 V
• for signal *1*, max.	28 V
Input current	
• for signal *1*, min.	9 mA
• for signal *1*, max.	27 mA
Digital outputs	
Relay outputs	
Switching capacity of contacts	
- at 50 V DC, min.	0.01 A; 50 V DC switching voltage not released for NFPA-relevant countries
- at 50 V DC, max.	1 A; 50 V DC switching voltage not released for NFPA-relevant countries
- at 230 V AC, min.	0.01 A
- at 230 V AC, max.	1 A

Article number	6FB1121-0BM13-3AT2 SIDOOR ATD400T RELAY
Mechanical data	
Opening width of door, min.	0.25 m
Opening width of door, max.	4 m
Weight of door, max.	180 kg
Operating cycle frequency of door, max.	180 1/h
Counterforce, max.	80 N
Counterweight	
• with SIDOOR M3 geared motor, max.	6 kg
Interfaces	
Interfaces/bus type	without
Standards, approvals, certificates	
CE mark	Yes
UL approval	No
China RoHS compliance	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C
• max.	70 °C; At operating temperatures > 55 °C the operating parameters are limited to default values
• Remark	At operating temperatures > 55 °C, the maximum air temperature of 85 °C must not be exceeded near the printed-circuit board if temperature class T3 according to EN 50155 is used
Ambient temperature during storage/transportation	
• Storage, min.	-40 °C
• Storage, max.	50 °C
Altitude during operation relating to sea level	
• Installation altitude above sea level, max.	2 000 m
Relative humidity	
• No condensation, min.	10 %
• No condensation, max.	93 %
Fire resistance	
• Behavior in fire	complies with EN 45545-2 Hazard Level HL3
Dimensions	
Width	320 mm
Height	60 mm
Depth	80 mm

Products for specific requirements

Automatic door controls
for railway applications

Additional units > Software kit

Overview



SIDOOR Software Kit

The scope of delivery of the SIDOOR Software Kit includes an installation CD.

The CD includes the following functionalities:

SIDOOR User Software	The component that enables the door control system to be configured, parameters to be assigned, and analyzed.
Siemens HCS12 Firmware Loader	This component is used to update the operating software of the door controller.
SIDOOR USB to UART Bridge Driver	This driver is essential for operation of the USB adapter.

Note:

Some firmware updates are offered as free downloads in the Siemens Industry Online Support. For information on the availability and acquisition of more firmware, please contact Technical Support.

Ordering data

SIDOOR Software Kit

Article No.

6FB1105-0AT01-6SW0

Overview

SIDOOR motors are speed controlled, taking set force and speed limits into account. The gear outlet direction is defined as left or right when viewing the gear unit from the front. The power is transmitted by a toothed belt. The toothed belt passes over a deflector pulley and can be fitted with 2 door clutch holders. This enables it to drive both one-sided and centrally-opening doors.

SIDOOR geared motors are available in two technological versions.

- 1. DC technology in version
(area of application: interior railway doors)
 - DC geared motor
SIDOOR geared motors are a combination of gear unit, motor, and encoder. They are easy to connect to the controller via the interface provided and are automatically detected during commissioning. The variable speed drive unit comprises a speed-controlled DC motor with non-self-locking gearing.
- 2. EC technology in version
(area of application: platform screen doors)
 - EC direct drive
SIDOOR direct drives are a combination of motor and sensor. They are easy to connect to the controller via the interface provided and are automatically detected during commissioning. The maintenance-free drive unit consists of a gearless, speed-controlled, electronically commutated motor. The EC direct drive can be fitted in various mounting orientations, facilitating reduced inventory management and minimizing assets.
 - EC geared motors
EC geared motors are electronically commutated DC motors with non-self-locking gearing and are speed-controlled. They are easy to connect to the controller via the interface provided and are automatically detected during commissioning. Due to the brushless drive technology, EC geared motors are subject to less abrasion compared with DC geared motors and thus have a longer service life. On account of the brushless drive technology, no commutation noises come from this motor, so it generates less noise than the DC geared motors.

Motors for interior railway door drives

The following **DC geared motors** are available for interior railway door drives. They should be selected according to the dynamic door weight.

- SIDOOR MDG180 geared motors, compliance with fire protection standard EN 45545-2 (max. door weight 180 kg)
 - SIDOOR MDG180 L EN 45545-2 (pinion left) 6FB1103-0AT16-4MB0
 - SIDOOR MDG180 R EN 45545-2 (pinion right) 6FB1103-0AT15-4MB0
- SIDOOR M3 geared motors (max. door weight 180 kg)
 - SIDOOR M3 L (pinion left) 6FB1103-0AT10-4MB0
 - SIDOOR M3 R (pinion right) 6FB1103-0AT11-4MB0

Motors for platform screen door drives**EC technology:**

- SIDOOR MEG251 geared motors (max. door weight 250 kg)
 - SIDOOR MEG251 L (pinion left), 6FB1203-5AT00-7MP0
 - SIDOOR MEG251 R (pinion right), 6FB1203-5AT01-7MP0



Photo: DC geared motor SIDOOR M3 L, 6FB1103-0AT10-4MB0 or SIDOOR MDG180 L, 6FB1103-0AT16-4MB0. (version with pinion left)



Photo: EC geared motor SIDOOR MEG251 R, 6FB1203-5AT01-7MP0. (version with pinion right)

Products for specific requirements

Automatic door controls
for railway applications

Geared motors

Ordering data

Motors for interior railway door drives

SIDOOR MDG180 geared motors

- MDG180 L, EN 45545-2
- MDG180 R, EN 45545-2

SIDOOR M3 geared motors

- M3 L
- M3 R

Article No.

6FB1103-0AT16-4MB0

6FB1103-0AT15-4MB0

6FB1103-0AT10-4MB0

6FB1103-0AT11-4MB0

Article No.

Motors for platform screen doors

SIDOOR MEG251 EC technology geared motor

- MEG251 L
- MEG251 R

6FB1203-5AT00-7MP0

6FB1203-5AT01-7MP0

Technical specifications

Article number	6FB1103-0AT16-4MB0	6FB1103-0AT15-4MB0	6FB1103-0AT10-4MB0	6FB1103-0AT11-4MB0	6FB1203-5AT00-7MP0	6FB1203-5AT01-7MP0
	SIDOOR MDG180 L EN 45545-2	SIDOOR MDG180 R EN 45545-2	SIDOOR M3 L	SIDOOR M3 R	SIDOOR MEG251 L	SIDOOR MEG251 R
Supply voltage					24 V	
Rated value (DC)	30 V					
Input current					6.8 A	
Operational current (rated value)	4 A					
Power					163 W	
Active power input	120 W					
Mechanical data					4.1 N·m	
Torque of the rotary operating mechanism (rated value)	3 N·m					
Speed, max.	0.65 m/s				0.75 m/s	
Gear ratio	15					
Number of pulses per revolution, max.	100					
Weight of door, max.	180 kg				250 kg	
Breakaway force, max.					50 N	
Standards, approvals, certificates						
CE mark	Yes					
UL approval	No				Yes	No
EAC (formerly Gost-R)	Yes					
TÜV Inspectorate approval					Yes	
China RoHS compliance	Yes					
Ambient conditions						
Ambient temperature during operation						
• min.	-20 °C					
• max.	50 °C				70 °C	
Ambient temperature during storage/transportation						
• Storage, min.	-40 °C					
• Storage, max.	85 °C					
Fire resistance						
• Behavior in fire	complies with EN 45545-2 Hazard Level HL3					
Dimensions						
Height of motor	98 mm				100 mm	
Length of motor	236 mm				249 mm	
Diameter of motor	63 mm				62 mm	
Width of gear unit, including drive pinion	85 mm				86 mm	

Overview



SIDOOR MED280 direct drive

SIDOOR direct drives are a combination of motor and sensor. They are easy to connect to the controller via the interface provided and are automatically detected during commissioning.

The maintenance-free drive unit consists of a gearless, speed-controlled, electronically commutated motor with non-self-locking gearing.

Direct drives are designed for certain masses and can control both drive directions.

- SIDOOR MED280 direct drive for max. 280 kg (6FB1203-0AT12-7DA0)

Ordering data

Article No.

SIDOOR MED280 direct drive
Motor for door control, for max. dynamic door weights of 280 kg

6FB1203-0AT12-7DA0

Technical specifications

Article number	6FB1203-0AT12-7DA0 SIDOOR MED280
Supply voltage	
Rated value (DC)	24 V
Input current	
Operational current (rated value)	9.7 A
Power	
Active power input	233 W
Mechanical data	
Torque of the rotary operating mechanism (rated value)	4.7 N·m
Speed, max.	0.8 m/s
Number of pulses per revolution, max.	1 024
Weight of door, max.	280 kg
Standards, approvals, certificates	
CE mark	Yes
UL approval	Yes
EAC (formerly Gost-R)	Yes
TÜV Inspectorate approval	Yes
China RoHS compliance	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C
• max.	70 °C
Ambient temperature during storage/transportation	
• Storage, min.	-40 °C
• Storage, max.	85 °C
Dimensions	
Width of motor	160 mm
Height of motor	140 mm
Length of motor	56 mm
• including drive pinion	91 mm

Products for specific requirements

Automatic door controls
for railway applications

Accessories

Overview

A comprehensive range of accessories is available for the SIDOOR systems. This is necessary to ensure low-noise operation of the door leaves by the controller.

Accessories for SIDOOR DC and EC geared motors


Rubber-metal anti-vibration mount

To ensure low-noise door operation, the SIDOOR geared motors are integrated in the door system using rubber-metal anti-vibration mounts.

- Rubber-metal anti-vibration mount 6FB1104-0AT02-0AD0 for SIDOOR M3 and SIDOOR MDG180 DC geared motors (also for EN 45545-2) and SIDOOR MEG251 EC geared motors (door weights up to 250 kg)
- Rubber-metal anti-vibration mount 6FB1104-0AT01-0AD0 for SIDOOR M4 DC geared motors (door weights up to 400 kg)



Rubber-metal anti-vibration mount 6FB1104-0AT02-0AD0

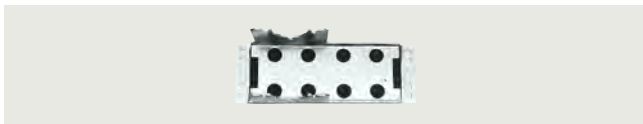

Rubber-metal anti-vibration mount 6FB1104-0AT01-0AD0

Mounting bracket

Two different mounting brackets are available with elongated holes:

- Mounting bracket 6FB1104-0AT01-0AS0 for SIDOOR M3 and SIDOOR MDG180 DC geared motors (also for EN 45545-2) and SIDOOR MEG251 EC geared motors for flexible accommodation of the rubber-bonded metal.
- Mounting bracket 6FB1104-0AT02-0AS0 for the deflector unit, this enables the toothed belt to be set to the required belt tension.



Mounting bracket 6FB1104-0AT01-0AS0 for mounting the geared motor



Mounting bracket 6FB1104-0AT02-0AS0 for the deflector unit

Door clutch holder

The door clutch holder 6FB1104-0AT01-0CP0 serves to connect the respective door leaf by means of a toothed belt while also functioning as a toothed-belt lock. One door clutch holder per door leaf is required. The toothed-belt lock can accommodate both open ends of the toothed belt.



Door clutch holder 6FB1104-0AT01-0CP0 (packaging size = 1 unit)

Deflector unit

The deflector unit 6FB1104-0AT03-0AS0 contains an embedded belt pulley which can be mounted on the door system.


The STS toothed belt is redirected via this deflector unit.



Deflector unit 6FB1104-0AT03-0AS0

STS toothed belt

The door system is moved between the end positions of the door using the STS toothed belt 6FB1104-0AT0.-0AB0. Two different toothed belt lengths are available.

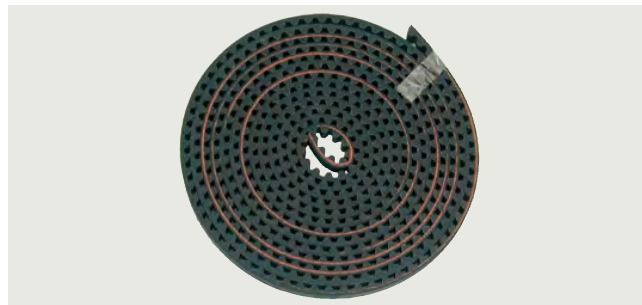


Toothed belt 6FB1104-0AT01-0AB0, length 4 m



Toothed belt 6FB1104-0AT02-0AB0, length 45 m

Overview**Accessories for the SIDOOR MED280 EC direct drive, for the controller for the SIDOOR ATE530S/ATE531S platform screen door drive**Motor holder

- Motor holder 6FB1104-0AT03-0AD0 for accommodation of the SIDOOR MED280 direct drive.

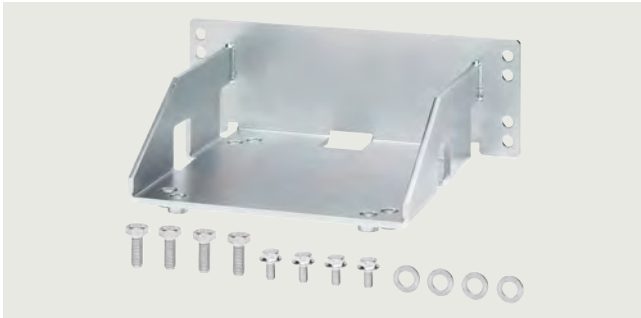

SIDOOR motor holder

Mounting bracket

- For mounting the SIDOOR motor holder 6FB1104-0AT01-0AS0. Identical to the mounting bracket 6FB1104-0AT01-0AS0 for DC geared motors.



Mounting bracket for geared motor

- With tensioning device for mounting the deflector unit and setting the toothed belt to the required tension (large) 6FB1104-0AT05-0AS4



SIDOOR mounting bracket, large

- With tensioning device for mounting the deflector unit and setting the toothed belt to the required tension (small) 6FB1104-0AT05-0AS5



SIDOOR mounting bracket, small

Door clutch holder

- For attaching both ends of the toothed belt and connecting the respective door panel to the toothed belt, width 20 mm, 6FB1104-0AT05-0AS1



SIDOOR door clutch holder

Deflector unit

- For attaching the SIDOOR toothed belt and fixing to the door 6FB1104-0AT07-0AS0



SIDOOR deflector unit

STD toothed belt

- As a connection between the door system and the end positions of the door, toothed belt width 20 mm. Length 4 m, 6FB1104-0AT05-0AB0



SIDOOR toothed belt, small

- Toothed belt width 20 mm. Length 45 m 6FB1104-0AT06-0AB1



SIDOOR toothed belt, large

Products for specific requirements

Automatic door controls
for railway applications

Accessories

Ordering data	Article No.		Article No.
Accessories for the SIDOOR MED280 EC direct drive, for the control device for the SIDOOR ATE530S/ATE531S platform screen door drive		Accessories for SIDOOR DC and EC geared motors	
Motor holder for SIDOOR MED280 direct drive	6FB1104-0AT03-0AD0	Rubber-metal anti-vibration mounts for geared motors	
Mounting bracket for mounting the motor holder	6FB1104-0AT01-0AS0	<ul style="list-style-type: none"> SIDOOR rubber-metal anti-vibration mount for geared motors for door weights up to 300 kg 	6FB1104-0AT02-0AD0
Mounting bracket with tensioning device for mounting the deflector unit		<ul style="list-style-type: none"> SIDOOR rubber-metal anti-vibration mount for geared motors for door weights from 300 kg 	6FB1104-0AT01-0AD0
<ul style="list-style-type: none"> Large Small 	6FB1104-0AT05-0AS4 6FB1104-0AT05-0AS5	Mounting bracket	
SIDOOR door clutch holder		<ul style="list-style-type: none"> SIDOOR mounting bracket for geared motor 	6FB1104-0AT01-0AS0
<ul style="list-style-type: none"> For toothed belt, width 20 mm 	6FB1104-0AT05-0AS1	<ul style="list-style-type: none"> SIDOOR mounting bracket with tensioning device for deflector pulley 	6FB1104-0AT02-0AS0
SIDOOR deflector unit	6FB1104-0AT07-0AS0	SIDOOR door clutch holder	
SIDOOR STD toothed belt		<ul style="list-style-type: none"> For toothed belt, width 12 mm 	6FB1104-0AT01-0CP0
Width 20 mm		SIDOOR deflector unit	6FB1104-0AT03-0AS0
<ul style="list-style-type: none"> 4 m 45 m 	6FB1104-0AT05-0AB0 6FB1104-0AT06-0AB1	SIDOOR STS toothed belt	
		Width 12 mm	
		<ul style="list-style-type: none"> 4 m 45 m 	6FB1104-0AT01-0AB0 6FB1104-0AT02-0AB0

Overview



With the Condition Monitoring System from Siemens you can constantly monitor your machines and plants. Maintenance procedures can be planned better and only performed when they are actually necessary – predictive maintenance.

Overview SIPLUS CMS1200 Condition Monitoring System



The SIPLUS CMS1200 Condition Monitoring System is part of SIMATIC S7-1200 and is designed for the early detection of mechanical damage.

It provides the following benefits:

- vRMS machine monitoring in acc. with ISO 10816-3
- aRMS machine monitoring
- Detailed identification of damage with frequency-selective diagnostics
- Raw data recording and export for SIPLUS CMS X-Tools
- Trend recording and analysis
- Signaling of limit violations
- Permanent monitoring to protect the machines
- Effective monitoring of important processes and systems
- Early detection of damage
- Scheduled maintenance instead of spontaneous repair
- Reduction in maintenance costs
- Increase in system availability
- Optimum utilization of the service life of the units

Products for specific requirements

Condition monitoring systems

SIPLUS CMS1200 Condition Monitoring System

SIPLUS CMS1200 SM 1281 Condition Monitoring

Overview



SIPLUS CMS1200 SM 1281 Condition Monitoring forms part of SIMATIC S7-1200 and is used for the:

- Monitoring of motors, generators, pumps, fans, wind mills or other mechanical components
- Recording and analysis of vibrations
- Expansion capability of up to 7 modules

Ordering data

SIPLUS CMS1200 SM 1281 Condition Monitoring

Module for SIMATIC S7-1200 for monitoring vibrations in mechanical components based on characteristic values and frequency-selective analysis functions.

Article No.

6AT8007-1AA10-0AA0

SIPLUS CMS1200 Ready to use Bundle

Consisting of:

- SM1281 Condition Monitoring
- SM1281 Shield clamp set
- S7-1214C CPU
- S7-1200 Battery Board
- Memory card with TIA project

6AT8007-1AA30-0AA0

Accessories

SIPLUS CMS1200 SM 1281 Shield clamp set

For EMC-compliant connection of signal and encoder cables to SIPLUS CMS1200 SM 1281 Condition Monitoring.

6AT8007-1AA20-0AA0

Article No.

SIPLUS CMS VIB-SENSOR

Piezoelectric sensor for connection to SIPLUS CMS1200 SM 1281 Condition Monitoring.

- SIPLUS CMS VIB-Sensor S01, frequency range 0,5 Hz to 15 kHz; measuring range 50G; sensitivity 100 mV/G (+/-10 %); MIL connector on top
- SIPLUS CMS VIB-Sensor S02, frequency range 1 Hz to 15 kHz; measuring range 500G; sensitivity 10 mV/G (+/-10 %); MIL connector on top
- SIPLUS CMS VIB-Sensor S03, frequency range 0,2 Hz to 3 kHz; measuring range 10G; sensitivity 500 mV/G (+/-10 %); MIL connector on top

6AT8002-4AB00

6AT8008-2AA00-0AA0

6AT8008-2AA02-0AA0

SIPLUS CMS CABLE-MIL

For connection of VIB-SENSOR S01, S02 and S03 vibration sensor to SIPLUS CMS1200 SM 1281 Condition Monitoring.

- SIPLUS CMS CABLE-MIL-300; length 3 m
- SIPLUS CMS CABLE-MIL-1000; length 10 m
- SIPLUS CMS CABLE-MIL-3000; length 30 m

6AT8002-4AC03

6AT8002-4AC10

6AT8008-2BA12-0AA0

Products for specific requirements

Condition monitoring systems

SIPLUS CMS1200 Condition Monitoring System

SIPLUS CMS1200 SM 1281 Condition Monitoring

Technical specifications

Article number	6AT8007-1AA10-0AA0 SM1281_Condition_Monitoring
General information	
Product type designation	SM1281
Product description	S7-1200 module for the monitoring of vibrations on mechanical components based on parameters and frequency-selective analysis functions
Installation type/mounting	
Mounting type	Rail or wall mounting
Mounting position	Horizontal, vertical
Recommended mounting position	Horizontal
Supply voltage	
Rated value (DC)	24 V
Input current	
Current consumption, typ.	200 mA
Current consumption, max.	250 mA
from backplane bus 5 V DC, typ.	80 mA
from backplane bus 5 V DC, max.	85 mA
Memory	
Total memory capacity	1 Gbyte
Hardware configuration	
Design of hardware configuration	Modular, up to 7 modules per CPU
Digital inputs	
Number of speed inputs	1
Input voltage	
• Rated value (DC)	24 V
Sensor input	
Number of IEPE sensor inputs	4
Sampling frequency, max.	46 875 Hz
Interfaces	
Type of data transmission	Export of raw data as WAV file for further analysis (e.g. using CMS X-Tools) can be downloaded via browser/FTP, online data transfer to CMS X-Tools
Ethernet interface	Yes
Protocols	
Bus communication	Yes
OPC UA	Yes; OPC UA Server
Web server	
• HTTP	Yes

Article number	6AT8007-1AA10-0AA0 SM1281_Condition_Monitoring
Interrupts/diagnostics/status information	
Alarms	
• Diagnostic alarm	Yes
Diagnostics indication LED	
• for status of the inputs	Yes
• for maintenance	Yes
• Status indicator digital input (green)	No
Integrated Functions	
Monitoring functions	
• Monitoring of the sensor inputs	Yes; Cable break and short-circuit
• Vibration characteristic monitoring via RMS value of the vibration speed	Yes
• Vibration characteristic monitoring via RMS value of the vibration acceleration	Yes
• Vibration characteristic monitoring via diagnostic characteristic value	Yes
• Frequency-selective monitoring via vibration speed spectrum	Yes
• Frequency-selective monitoring via vibration acceleration spectrum	Yes
• Frequency-selective monitoring via envelope curve analysis	Yes
Measuring functions	
• Physical measuring principle	Vibration acceleration
Measuring range	
- Measurement range vibration frequency, min.	0.1 Hz
- Measurement range vibration frequency, max.	23 000 Hz
Standards, approvals, certificates	
Certificate of suitability	CE
CE mark	Yes
China RoHS compliance	Yes
Software	
Browser software required	Web browser Mozilla Firefox (ESR31) or Microsoft Internet Explorer (10/11)
connection method	
required front connector	Yes
Design of electrical connection	Screw connection
Mechanics/material	
Material of housing	Plastic: polycarbonate, abbreviation: PC- GF 10 FR
Dimensions	
Width	70 mm
Height	112 mm
Depth	75 mm
Weights	
Weight, approx.	260 g

Products for specific requirements


Condition monitoring systems

SIPLUS CMS1200 Condition Monitoring System

Accessories

Overview

SIPLUS CMS1200 SM 1281 shield clamp set

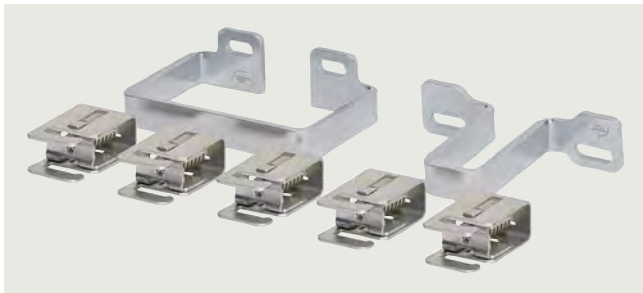

CMS1200 accessories

SIPLUS CMS1200 SM 1281 shield clamp set,
6AT8007-1AA20-0AA0

An additional shield clamp set must be ordered for the EMC-compliant connection of cables to the SIPLUS CMS1200 SM 1281 Condition Monitoring.

The shield clamp set comprises two shield clamps and five terminal clamps. One shield clamp is screwed on above and one below the module. The sensor cable shields are connected to the shield clamps by means of the terminal clamps.

VIB-SENSOR vibration sensors



VIB-SENSOR S01 vibration sensor

- VIB-SENSOR S01 vibration sensor, 6AT8002-4AB00
- VIB-SENSOR S02 vibration sensor, 6AT8008-2AA00-0AA0
- VIB-SENSOR S03 vibration sensor, 6AT8008-2AA02-0AA0

The VIB-SENSOR vibration sensor with IEPE (integrated electronics piezo-electric) interface can be directly connected to the CMS1200 SM1281 Condition Monitoring module.

The sensor detects vibration accelerations.

A threaded screw with an M8 male thread for mounting to the measuring point is included in the scope of delivery. The connecting cable is connected to the vibration sensor via the MIL connector.

SIPLUS CABLE-MIL connecting cables



SIPLUS CABLE-MIL connecting cables

- SIPLUS CABLE-MIL connecting cables 6AT8002-4AC03, 6AT8002-4AC10 and 6AT8008-2BA12-0AA0

The VIB-SENSOR vibration sensor is connected to the SIPLUS CMS1200 SM1281 Condition Monitoring module by means of the SIPLUS CMS CABLE-MIL connecting cable.

This high-quality industrial cable is made of black polyurethane and is pre-assembled on one end with a MIL connector (MIL-C5015). The open cable end of the shielded two-wire cable is connected directly to the screw terminals of the basic unit.

The connecting cable is available in lengths of 3 m, 10 m and 30 m.

Products for specific requirements

Condition monitoring systems

SIPLUS CMS1200 Condition Monitoring System

Accessories

Ordering data	Article No.	Article No.
SIPLUS CMS1200 SM 1281 Shield clamp set For EMC-compliant connection of signal and encoder cables to SIPLUS CMS1200 SM 1281 Condition Monitoring.	6AT8007-1AA20-0AA0	
VIB-SENSOR S01, S02 and S03 vibration sensors Piezoelectric sensor for connection to SIPLUS CMS1200 SM 1281 Condition Monitoring.		
<ul style="list-style-type: none"> SIPLUS CMS VIB sensor S01, frequency range 0.5 Hz to 15 kHz; measuring range 50G; sensitivity 100 mV/G (+/-10 %); MIL connector on top 	6AT8002-4AB00	6AT8002-4AC03
<ul style="list-style-type: none"> SIPLUS CMS VIB sensor S02, frequency range 1 Hz to 15 kHz; measuring range 500G; sensitivity 10 mV/G (+/-10 %); MIL connector on top 	6AT8008-2AA00-0AA0	6AT8002-4AC10
<ul style="list-style-type: none"> SIPLUS CMS VIB sensor S03, frequency range 0.2 Hz to 3 kHz; measuring range 10G; sensitivity 500 mV/G (+/-10 %); MIL connector on top 	6AT8008-2AA02-0AA0	6AT8008-2BA12-0AA0
		SIPLUS CABLE-MIL For connection of VIB-SENSOR S01 vibration sensor to SIPLUS CMS1200 SM 1281 Condition Monitoring.
		<ul style="list-style-type: none"> SIPLUS CABLE-MIL-300; length 3 m SIPLUS CABLE-MIL-1000; length 10 m SIPLUS CABLE-MIL-3000; length 30 m

Technical specifications

Article number	6AT8007-1AA20-0AA0	Article number	6AT8007-1AA20-0AA0
	SM 1281 shield clamp set		SM 1281 shield clamp set
General information		Installation type/mounting	
Product type designation	Shield clamp set for SM1281	Mounting type	Wall mount
Product description	For the EMC-compliant connection of cables to the SIPLUS CMS1200 SM 1281 Condition Monitoring Module	connection method / header	
		Number of signal cables connectable to the shield support	5
Article number	6AT8002-4AB00	6AT8008-2AA00-0AA0	6AT8008-2AA02-0AA0
	SIPLUS CMS2000 VIB-SENSOR S01	SIPLUS CMS VIB-SENSOR S02	SIPLUS CMS VIB-SENSOR S03
General information			
Product type designation	VIB sensor S01	VIB-Sensor S02	VIB-Sensor S03
Product description	piezoelectric sensor for connection to the SIPLUS CMS2000 Basic Unit VIB or the SIPLUS CMS2000 VIB-MUX expansion module	piezoelectric sensor for connection to SIPLUS CMS1200 or SIPLUS CMS2000	
Installation type/mounting	incl. mounting bolts UNF1/4-28 on M6 and M8		
Input current			
Type of power supply	IEPE 2 to 10 mA		
Encoder			
Encoder signals, IEPE			
• Signal voltage (DC), min.	10 V		
• Signal voltage (DC), max.	14 V		
Integrated Functions			
Measuring functions	Piezo-quartz recorder with integrated evaluation electronics		
• Operating range of sensor at +/- 3 dB, min.	0.5 Hz	1 Hz	0.2 Hz
• Operating range of sensor at +/- 3 dB, max.	15 000 Hz		3 000 Hz
• Resonance frequency	23 kHz		16 kHz

Products for specific requirements

Condition monitoring systems

SIPLUS CMS1200 Condition Monitoring System

Accessories

Technical specifications

Article number	6AT8002-4AB00 SIPLUS CMS2000 VIB-SENSOR S01	6AT8008-2AA00-0AA0 SIPLUS CMS VIB-SENSOR S02	6AT8008-2AA02-0AA0 SIPLUS CMS VIB-SENSOR S03
Measuring range			
- Measurement range vibration acceleration, max.	50 gn	500 gn	10 gn
- Sensitivity, typ.	100 mV/gn	10 mV/gn	500 mV/gn
Degree and class of protection	IP65		
Ambient conditions			
Ambient temperature during operation			
• min.	-50 °C		
• max.	120 °C	121 °C	
Cables			
Cable length, max.	30 m		
connection method / header			
Type of connection	MIL-C5015		
Mechanics/material	Stainless steel		
Article number	6AT8002-4AC03 SIPLUS CMS2000 CABLE 3m	6AT8002-4AC10 SIPLUS CMS2000 CABLE 10m	6AT8008-2BA12-0AA0 SIPLUS CMS CABLE 30m
General information			
Product type designation	Cable MIL-300	Cable MIL-1000	Cable-MIL-3000
Product description	For connection of the VIB-SENSOR S01 vibration sensor to the SIPLUS CMS2000 Basic Unit VIB or the SIPLUS CMS2000 VIB-MUX expansion module		for connection of VIB-Sensor vibration sensor to SIPLUS CMS1200 or SIPLUS CMS2000
Ambient conditions			
Ambient temperature during operation			
• min.	-25 °C		
• max.	122 °C		121 °C
Cables			
Type of insulation	black polyurethane		
Design of shield	Braided shielding with stranded drain wire		
Cable length	3 m	10 m	30 m
connection method / header			
Type of connection	MIL-C5015 / open cable end		

Overviews



15/2	SIMATIC HMI
15/4	PC-based Automation
15/5	SIMATIC PCS 7
15/8	Industrial communication
15/10	Industrial Identification and Locating
15/10	Introduction
15/11	SIMATIC Ident
15/13	SIMATIC RTLS

Overviews

SIMATIC HMI

Introduction

Overview



SIMATIC HMI operator control and monitoring systems – efficient machine-level operator control and monitoring

Equipment for monitoring and operator control is needed wherever people have to work with or on machinery and plants performing diverse tasks from cylinder driers to waste compactors. It is not difficult to find the right device for your specific task. The challenge is to find a solution that is future-proof and flexible, that can be integrated into higher-level networks, and that can also meet the ever-increasing demands for transparency and data provision. SIMATIC HMI Panels have proven their value in a variety of different applications in all industrial sectors over many years. The range of the systems in use is just as wide as that of the applications and technologies in the respective plants.

SIMATIC HMI stands for highly efficient machine-level operator control and monitoring and has some unique advantages:

- Efficient engineering
Visualization can be created more quickly and easily than ever before.
- Innovative design and operation
Visualization becomes the outstanding feature of the machine.
- Brilliant HMI operator panels
The right HMI device for every application.
- Backup – with security
Protection for investments and know-how, secure operation.
- Commissioning in the fast lane
Lose no time with testing and servicing.
- Openness with PC-based
For flexible, independent applications

More information is available at
<http://www.siemens.com/hmi>

SIMATIC WinCC Unified system – unlimited visualization for every application

SIMATIC WinCC Unified is a totally new visualization system for meeting the challenges of digitalization in machine and plant construction.

State-of-the-art hardware and software technologies make this possible now and in the future. Tried and tested engineering in the TIA Portal, the latest web technology and great reserves of performance for the coming years combined with the freedom to implement your ideas as you imagine them.

More information is available at
<http://www.siemens.com/wincc-unified>

SIMATIC HMI software – a lot more than just visualization software

With the SIMATIC WinCC (TIA Portal), SIMATIC WinCC and SIMATIC WinCC Open Architecture product families, SIMATIC HMI covers the entire engineering and visualization software spectrum for the human machine interface.

- Almost the entire range of SIMATIC HMI devices can be configured with SIMATIC WinCC (TIA Portal), the successor to SIMATIC WinCC flexible.
The functionality covers both visualization tasks at machine level and SCADA applications on PC-based multi-user systems.
- The current version 7.5 of SIMATIC WinCC is available for extremely complex process visualization tasks and SCADA applications, e.g. taking account of redundant solutions and vertical integration all the way to plant intelligence solutions.
- Ultimately, SIMATIC WinCC Open Architecture addresses applications that require extensive customer-specific adaptations or manage large and/or complex applications, as well as projects that demand special system requirements and functions.

More information is available at
<http://www.siemens.com/hmi-software>

SIMATIC WinCC Unified visualization software

SIMATIC WinCC Unified software enables access to open interfaces, modern web technologies and consistent integration in order to implement modern visualization concepts simply and easily in the TIA Portal.

More information is available at
<http://www.siemens.com/wincc-unified-software>

SIMATIC HMI – brilliant and rugged HMI devices

Basic HMI – for the entry level

- Key Panels
Pre-assembled and ready for installation, for conventional operator panels. No configuration required with WinCC!

More information is available at
<http://www.siemens.com/key-panels>

- Basic Panels
The entry level series for simple HMI applications.

More information is available at
<http://www.siemens.com/basic-panels>

Advanced HMI Panel-based - for higher requirements

- New: SIMATIC HMI Unified Comfort Panels
High-end performance and state-of-the-art technology for the future of visualization.

More information is available at
<http://www.siemens.com/wincc-unified-hardware>

- Comfort Panels
High-end functionality for demanding indoor and outdoor HMI applications.

More information is available at
<http://www.siemens.com/comfort-panels>


- Mobile Panels
Portable HMI devices for mobile deployment on site.

More information is available at
<http://www.siemens.com/mobile-panels>

Individual HMI devices in customized versions

More information is available at
<http://www.siemens.com/customized-automation>

Overview

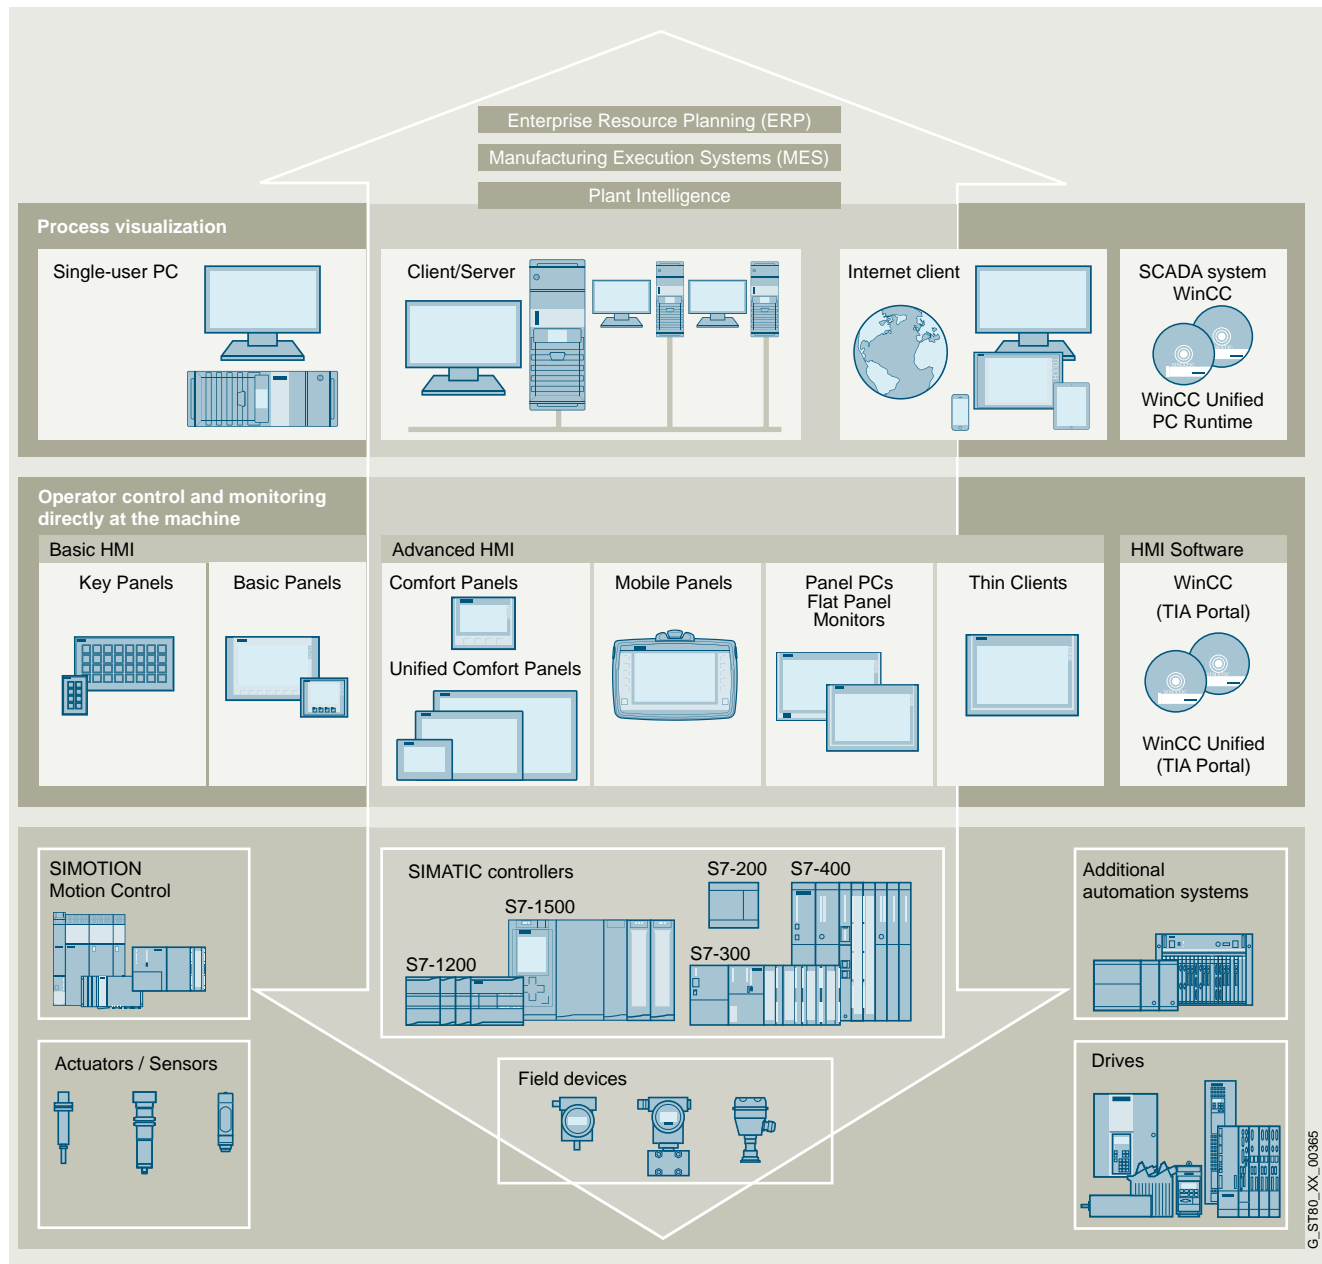


Overviews

PC-based Automation

Introduction

Overview

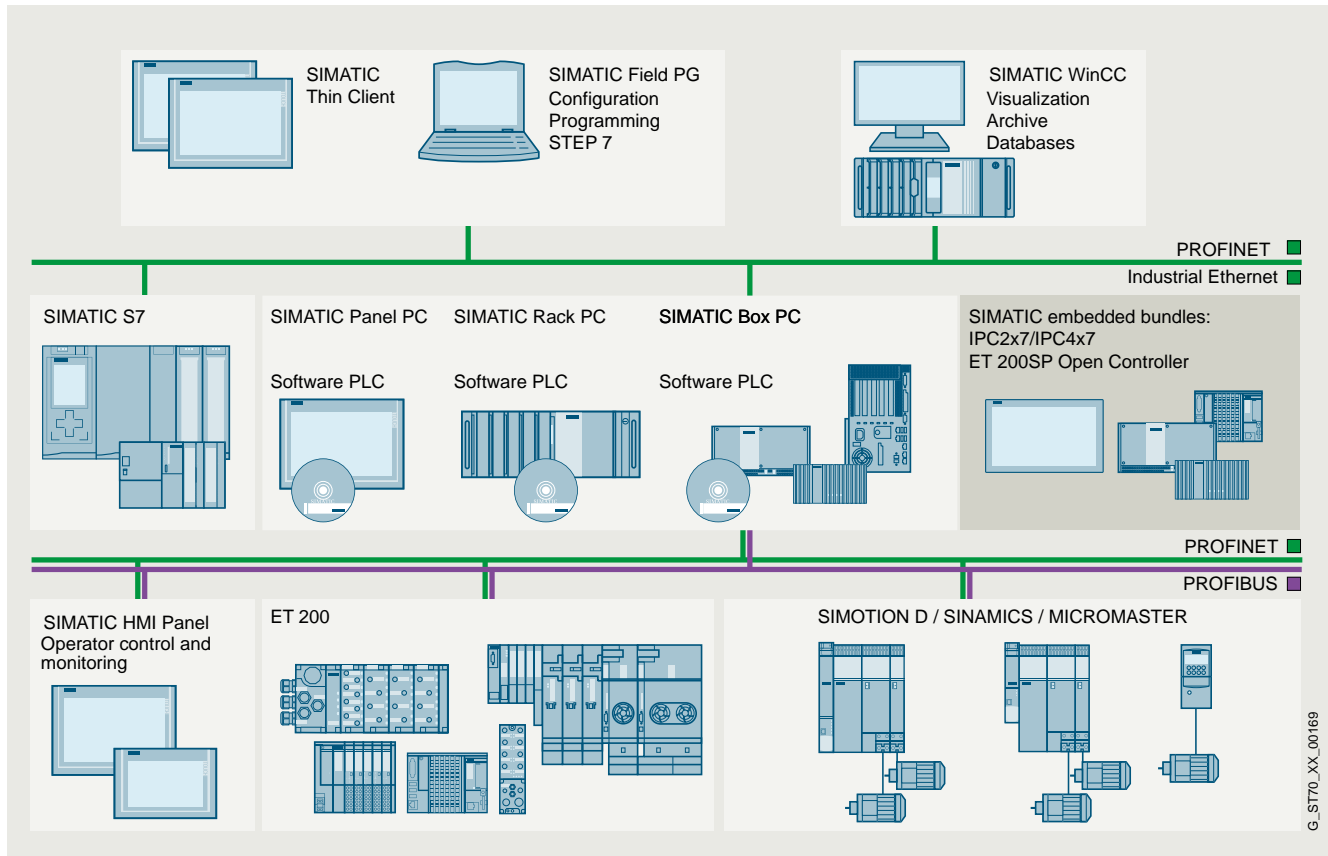

SIMATIC PC-based Automation

More information is available at <https://www.siemens.com/pc-based>.

Industrial IoT Gateway - SIMATIC IOT2000

An intelligent gateway which harmonizes communication between the various sources of data before analyzing it and forwarding it to the corresponding recipients. An easy-to-implement solution.

More information is available at <https://www.siemens.com/global/en/products/automation/pc-based/iot-gateways.html>.

Industrial PCs

Our reliable and innovative industrial PCs are the optimal PC hardware platform for PC-based Automation from Siemens.

- Rack PC
- Box PC
- Panel PC
- Tablet PC
- Industrial monitors and Thin Clients
- Devices for special requirements
 - Devices with fully-enclosed IP65 degree of protection
 - Devices with stainless steel fronts
 - Devices for Ex areas
- IPC software
- Embedded bundles/software packages

More information is available at <https://www.siemens.com/pc-based>
<http://www.siemens.com/simatic-ipc>

Software Controller

The SIMATIC S7-1500 Software Controller implements a SIMATIC S7-1500 Controller on SIMATIC IPC. It is particularly suitable for control solutions in special-purpose machine manufacturing which involve a high-performance implementation of complex control tasks, the integration of PC applications, or the realization of multiple tasks on a single device.

More information is available at <https://www.siemens.com/software-controller>

PC-based Controllers

PC-based Controllers combine the functions of a PC-based Software Controller with visualization, PC applications and central I/Os (inputs/outputs) in a single, compact device. The SIMATIC ET 200SP Open Controller is an industrial PC with the design of the ET 200SP I/O system and a preinstalled S7-1500 Software Controller.

More information is available at <https://www.siemens.com/distributed-controller>

Application examples and references

You can find an overview of the references and application examples at the Reference Center and on the <https://www.siemens.com/global/en/company/stories/industry/factory-automation.html>.

G_ST170_XX_00169

Overview


SIMATIC PCS 7

***Distributed Control System SIMATIC PCS 7:
Room for new perspectives***

In process engineering plants, the process control system is the starting point for optimal value added: All procedures and processes can be operated, monitored and influenced with the process control system.

The more powerful the process control system, the more effectively this potential can be used. For this reason, performance is in the foreground with SIMATIC PCS 7, alongside scalability, flexibility, and integration. Starting with planning and engineering, the process control system offers powerful tools, functions and features for cost-effective and efficient plant operation through all phases of the plant life cycle.

Performance through integration

Integration is one of the special strengths of SIMATIC PCS 7. This has many aspects:

- Horizontal integration into TIA
- Vertical integration into hierarchical communication
- System-integrated tools for engineering tasks
- Integration of the field level, including drives, switchgear, etc.
- Integrated functions, e.g. for batch process automation, route control, process safety, energy management, telecontrol tasks, etc.

Horizontal integration

A system for integrated automation of the entire process chain, from incoming raw materials to outgoing goods – this is one of the decisive advantages resulting from the seamless integration of SIMATIC PCS 7 into Totally Integrated Automation.

The process control system is mainly responsible for automating the primary processes here, but it can do much more: All auxiliary facilities, as well as the electrical infrastructure in the form of low-voltage or medium-voltage switchgear and the building management system, can also be integrated into the system.

Integration of selected SIMATIC standard components – automation systems, industrial PCs, network components, or distributed process I/O – into the process control system guarantees optimum interaction of individual components, and secures economic benefits such as simple selection, reduced stock keeping, and global support.

Vertical integration

The hierarchical communication of a company encompasses the field level, the control level, and the process level, up to management and enterprise resource planning (ERP). Thanks to standardized interfaces – based on international industry standards as well as internal interfaces – SIMATIC PCS 7 is able to provide process data for analysis, planning, coordination, and optimization of plant sequences or production and business processes – in real time, and at any location in the company.

Overviews

SIMATIC PCS 7

Introduction

Overview

Central engineering

SIMATIC PCS 7 convinces with graded functional diversity, consistent operator control philosophy, and uniformly structured engineering and management tools. A central engineering system with a coordinated range of tools for integrated system engineering and configuring of batch automation, safety functions, material transport or telecontrol systems creates value added over the entire life cycle. Reductions in configuring and training costs result in minimization of total cost of ownership (TCO) over the entire plant life cycle.

Functional diversity

Depending on the typical process automation or customer-specific requirements, SIMATIC PCS 7 can be functionally expanded for the following, for example:

- Batch process automation (SIMATIC BATCH)
- Functional safety and protection functions (Safety Integrated for Process Automation)
- Route control for material transport (SIMATIC Route Control)
- Telecontrol of remote units (SIMATIC PCS 7 TeleControl)
- Automation of electrical switchgear (SIMATIC PCS 7 PowerControl)

Custom automation

The unique scalable system architecture makes SIMATIC PCS 7 the ideal basis for cost-effective implementation of individual automation solutions and a cost effective operation of process plants.

SIMATIC PCS 7 users receive sustainable benefits from the modular system platform, based on SIMATIC standard components. Its uniformity enables flexible scaling of hardware and software, as well as perfect interaction, both within the system and beyond system limits. The architecture of the process control system SIMATIC PCS 7 is designed in such a way that the control technology can be used for the project planning according to the customer's requirements, optimally adapted to the dimensions of the plant. The control technology allows retrofit

or reconfiguration for capacity expansion or technological changes at any time. If the plant grows, then SIMATIC PCS 7 simply grows along with it – making expensive reserve capacities unnecessary!

Use the opportunities offered by the object-oriented type and instance concept of SIMATIC PCS 7. The technological connections, variant formation and bidirectional comparison of the types with the instances make the control module types (CMT) even more powerful compared to the original function block templates. The technological connections of a Control Module such as parameters, signals or messages can be provided with attributes and used via drag and drop, e.g. on an SFC plan. In turn, options and variants can be used to extend the core function of the CMT with specific modules or functions, which can be activated individually for each instance. This minimizes the number of types required and thus reduces the effort for maintenance and service. For the technological content of the CM types, the future-oriented Advanced Process Library (APL) is included in the standard of SIMATIC PCS 7. Another major advantage resulting from the comprehensive type and instance concept is the seamless integration into other tools like SIMATIC PCS 7 Plant Automation Accelerator or SIMIT.

Flexibility and performance in engineering

The workflow in the engineering of process plants is and remains a challenge: Numerous participants, many different data formats and multiple interfaces frequently result in transmission errors and system discontinuity and thus in greater time input and costs. Information generally gets lost or needs to be corrected manually when data is exchanged between multiple disciplines.

For the first time, a fully integrated solution is now available for planning and documenting plant projects: the SIMATIC PCS 7 Plant Automation Accelerator. Customers benefit in particular from consistent engineering without system discontinuities between automation planning and the control system.

The object-oriented approach of the SIMATIC PCS 7 Plant Automation Accelerator makes it possible to work on a central data platform, thus ensuring completely integrated planning – from plant engineering through to automation – based on an electronic workflow. This workflow ranges from planning, the preparation of bids – including bills of material – and the automatic generation of control data from the electrical plans of the SIMATIC PCS 7 process control system, through to controlled mass data engineering and direct as-is documentation of the plant.

This modular engineering approach enhances overall project efficiency and minimizes risks. A high level of standardization and simple configuration additionally save engineering time and costs during the implementation phase. Simple synchronization between planning and engineering avoids duplicate input and interface losses and reduces project runtimes.

Flexibility in operation

Process control also becomes more complex due to the multi-layer nature of automation engineering and the increased merging with information technology. Intuitive and fault-free operation is therefore more important than ever with regard to efficient working and the minimization of downtimes and servicing requirements. Using effective Advanced Process Control (APC) functions and an excellent operator system, SIMATIC PCS 7 supports optimization as well as user-friendly and safe control of the process. Monitoring of product quality and performance indicators additionally allows the process to be operated more economically. At the same time, SIMATIC PCS 7 convinces with high flexibility, plant availability, and investment security.

Process control and maintenance

SIMATIC PCS 7's operator system is used to monitor process operation using various views, and permits interventions when necessary. Its architecture is flexible and scalable – from single-user systems up to multi-user systems with a redundant client/server architecture. The operator interface takes account of the current specifications of NAMUR (user association of automation technology in the process industries) and PI (Profibus International) and offers a high level of user-friendliness for simple, intuitive interaction with the plant. Ergonomic symbols, task-oriented faceplates, uniform representation of status information, and optimized alarm functions allow safe process control.

Overview

The alarm management function integrated in SIMATIC PCS 7 is able to focus on essential alarms and to specifically guide the operator in exceptional circumstances. In this way, it systematically reduces the workload of operating staff.

Preventive and predictive maintenance strategies reduce total cost of ownership. With the SIMATIC PCS 7 Maintenance Station, maintenance personnel always have a watchful eye on critical production equipment such as pumps, valves, distillation columns or motors, and can carry out the relevant maintenance measures in good time before servicing is required – independent of the maintenance plan and without the risk of an unplanned plant standstill.

Process optimization

SIMATIC PCS 7 supports process optimization in many different manners, including:

- Control Performance Monitoring
- Advanced Process Control
- Process Historian

The Control Performance Monitoring function monitors and signals the control quality of the closed-loop control block. If the performance declines, the controller can be optimized in good time or specific maintenance measures can be initiated.

The integrated I&C libraries of SIMATIC PCS 7 also provide higher quality closed-loop control functions with which cost-effective Advanced Process Control applications can be implemented: multi-variable control, predictive control, or override control. It is thus possible to effectively improve profitability, product quality, safety, and environmental protection in small and medium-sized plants.

Current and historic process data form the basis of all optimization. Secure and user-friendly real-time data storage and analysis is handled using the Process Historian. The process values, messages, and batch data managed in the database of the Process Historian can be called extremely rapidly. User-specific processing and visualization of this historic data are supported by the information server, which is a reporting system based on the Microsoft Reporting Services.

SIMATIC PCS 7 system and technology components

With the rugged, high-performance SIMATIC PCS 7 system components from Catalog ST PCS 7, you already have a versatile platform for cost-effective implementation and economical operation of your process control systems. Perfect interplay of these system components makes it possible for you to sustain high-quality production and to establish new products significantly faster on the market.

With SIMATIC PCS 7 technology components from Catalog ST PCS 7 T that can be seamlessly integrated into the process control system, you can expand the functional scope of the system components in a carefully targeted manner for specific automation tasks.

This covers a wide spectrum, for example:

- Telecontrol for monitoring and controlling remote plant units
- Automation technology for electrical low-voltage or medium-voltage switchgear
- Industry-specific automation systems for the cement and mining industries, as well as for laboratory and training facilities
- Graphical objects for task-oriented optimization of process visualization
- Block libraries for technological functions, package unit and panel integration, monitoring and analyzing mechanical assets, as well as for building automation systems (heating, ventilation, air-conditioning – FMCS/HVAC)
- Editors and function blocks for the efficient configuration of small or medium-sized automation systems with simple parameter control and materials management
- Process analytical technology for quality assurance through optimization of development and production processes based on up-to-date measurements, and critical quality and performance attributes
- Simulation system for testing and commissioning of plant-specific application software
- Flexible, high-performance Manufacturing Execution System (MES)
- System expansion for operator systems for the integration of third-party controllers, programmable logic controllers and package units
- Products for migration of the process control systems TELEPERM M, APACS+/QUADLOG or Bailey INFI 90/NET 90 with SIMATIC PCS 7

Additional functionality can be integrated using add-on products

Modularity, flexibility, scalability, and the openness of SIMATIC PCS 7 offer optimal prerequisites for integrating supplementary components and solutions in the process control system in an applicative manner and thus extend and round off its functionality.

Many supplementary add-on products for SIMATIC PCS 7 have been developed by Siemens as well as by external partners (see Catalog ST PCS 7 AO, Add-ons for the SIMATIC PCS 7 Process Control System). These software packages and hardware components authorized by the system manufacturer enable cost-effective implementation of SIMATIC PCS 7 for special automation tasks.


Overviews

Industrial communication

Introduction

Overview

Industrial communication – the backbone of automation

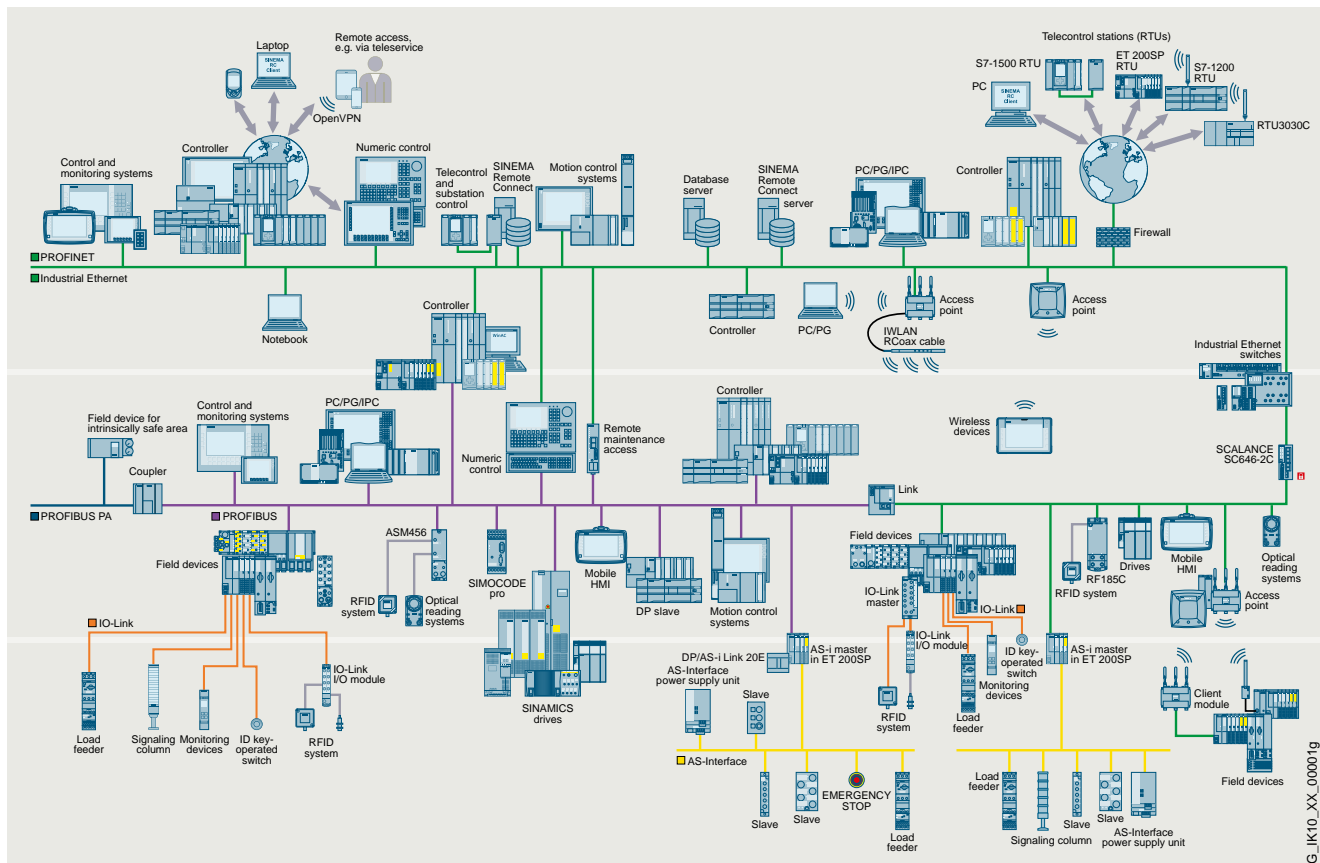

Powerful and open communication systems ensure trouble-free communication for automation systems, covering

- data communication or
- process or field communication.

Openness and flexibility of the individual communication systems in different topologies enable linking of a wide variety of systems and their subsequent expansions. By using standardized communication systems, it is possible to connect standardized components from different suppliers without any problems. This ensures maximum protection of investment, as existing networks can be extended without any adverse effects.

Overview


In the area of industrial communication, Siemens provides components for an integrated overall solution beyond the network's limits.

These include:

- Passive network components, e.g. FastConnect cabling systems
- Active network components, e.g. SCALANCE X Industrial Ethernet switches as well as RUGGEDCOM devices for harsh ambient conditions.
- Interfaces for connecting programmable controllers to the communication systems:
 - Integrated interfaces
 - Communications processors
- Components for wireless networks, e.g. Industrial Wireless LAN, SCALANCE W Access Points, and Client Modules (incl. latest Wi-Fi 6 devices) as well as first 5G components
- Components for industrial security, e.g. network security with Industrial Security Appliances SCALANCE S
- Remote monitoring and control with solutions for both telecontrol systems and units.
- Simple remote access for TeleService and remote maintenance with SCALANCE M and SINEMA Remote Connect
- Network transitions, e.g. IE/PB LINK PN IO
- Components for AS interface
- SINEC software family for efficient network management

More information


- Internet:
www.siemens.com/industrial-communication

Overviews

Industrial Identification and Locating

Introduction

Overview

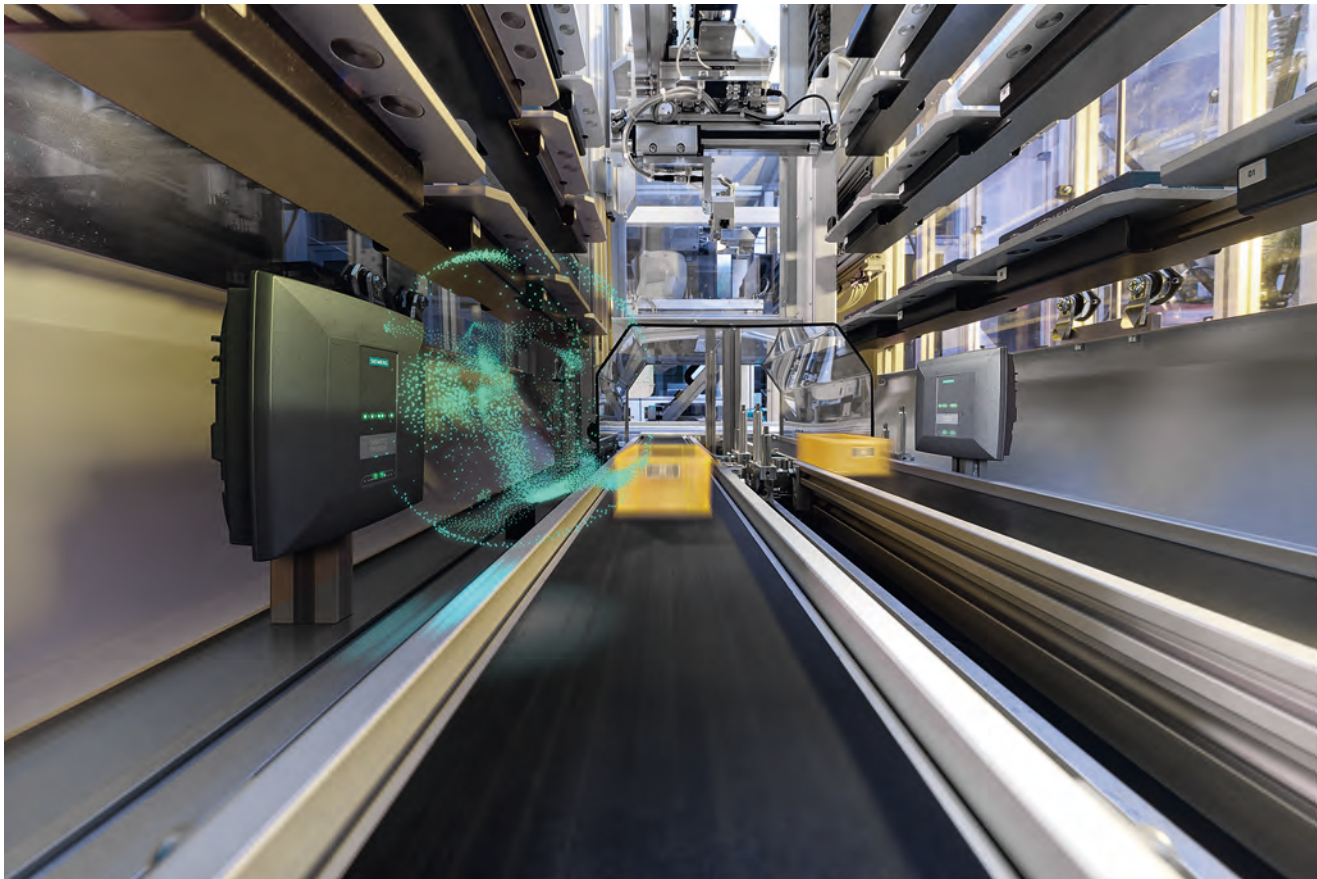

SIMATIC Ident and SIMATIC RTLS for cross-company data intelligence

Industrial processes in the digital enterprise require full transparency and a high degree of customization. Our solutions close the gap between the real and the digital world – and thus open up new added value potential throughout the production and supply chain. Today, we already offer the industry of tomorrow a unique, comprehensive and integrated range of identification and locating systems for customized applications. The connection to TIA enables products to be seamlessly integrated into automation solutions in the process. The connection to cloud applications ensures maximum flexibility and makes manufacturing future-proof. Plant availability, the degree of utilization and energy saving potential become transparent. For competitiveness and a flexible future.

More information

- Internet:
www.siemens.com/simatic-ident

Overview

Let the data journey begin.
SIMATIC Ident: Industrial Identification for company-wide data intelligence


Small batch sizes, a wide range of increasingly complex products, an extremely high degree of customization and complicated processes present major challenges for industry.

For all these challenges Siemens offers SIMATIC Ident, a unique integrated and scalable range of RFID and optical identification systems. These enable virtual data flows from IT systems to be synchronized with the actual flow of goods – throughout the value chain. This provides the necessary clarity and answers the question: When is which product in which location and what is its status? Because data transparency is becoming an increasingly central factor of success, especially in the industrial environment.

With SIMATIC Ident, quality requirements can be reliably met, production can be more flexibly structured, the number of manual operations reduced, and potential sources of faults identified and removed immediately. This means greater efficiency in logistics, material management, production, and service. For competitiveness and for a flexible future.

In addition, SIMATIC Ident supplies production data to cloud applications, e.g. MindSphere – the cloud-based, open IoT operating system from Siemens.

This makes SIMATIC Ident a key technology for the digital enterprise. Our solutions close the gap between the real and the digital world – and open up new added value potential for our customers.

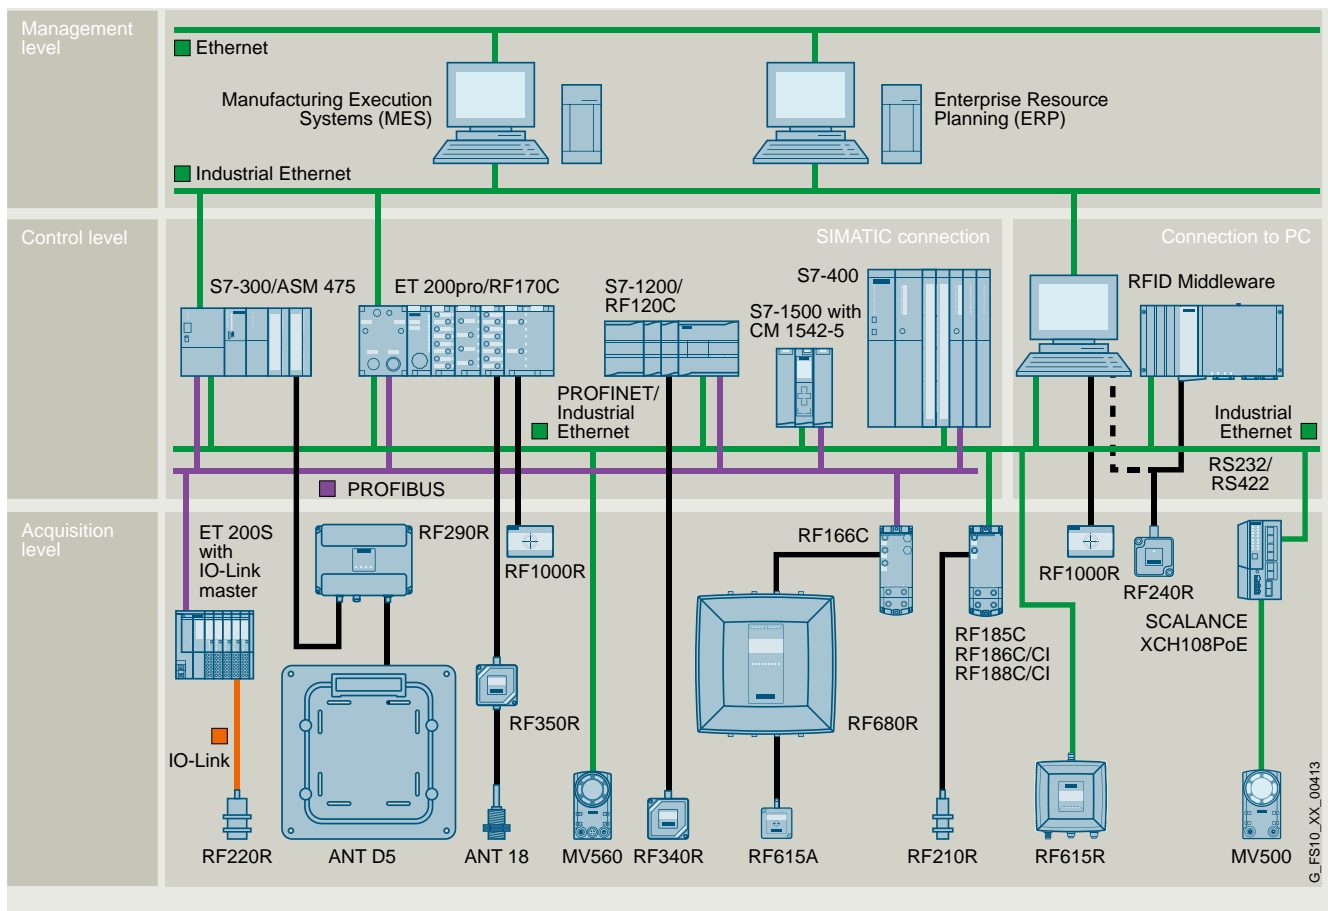

Overviews

Industrial Identification and Locating

SIMATIC Ident

Overview

RFID systems



Openness and flexibility of the individual communication systems in different topologies enable linking of a wide variety of systems and their subsequent expansions. By using standardized communication systems, it is possible to connect standardized components from different suppliers without any problems. This ensures maximum protection of investment, as existing networks can be extended without any adverse effects.

Line of sight between the write/read device and the transponder is not necessary. Rugged, compact readers in a high degree of protection with either integrated or external antennas are available for interference-free data communication. Cost-efficient, maintenance-free, passive labels and passive transponders in various designs and with various memory capacities are likewise available, as are powerful antennas.

Optical identification systems



The SIMATIC MV optical readers are powerful, intelligent reading devices for both standard, high-contrast 1D/2D codes as well as difficult-to-read DPM codes applied straight onto the different product surfaces. The optical readers also permit text recognition, object recognition, and inspection of marking quality. The readers of the SIMATIC MV family boast powerful image acquisition capabilities for different resolutions and integrated lighting, allowing them to be used in a range of applications. device configuration via web-based management and system integration via the TIA Portal ensure easy handling.

More information

- Internet:
www.siemens.com/rfid
www.siemens.com/codereader

Overview



Precision for automation. Driven by data.


Knowing what is located where at all times: SIMATIC RTLS enables optimized and transparent processes for production and logistics thanks to data-based, real-time locating to the nearest centimeter of all relevant objects. Material flows can be navigated, mobile transport systems controlled, the use of components monitored and the assembly of the end product documented in full. This makes SIMATIC RTLS an essential component of the digital infrastructure of the factory of tomorrow.

The scalable RTLS system supplements the digital twin of all production processes – from supply all the way through further processing to the final assembly. To do this, all relevant objects in the factory or warehouse (workpieces, containers, transport units, persons, etc.) are equipped with a transponder. Gateways bundle the transponder signals and make them available to the higher-level System Locating Manager. The positions calculated here are then forwarded to intelligent automation systems and production units.

Ultra-wide band technology (UWB) ensures the utmost accuracy and reliability: A large frequency range (3-7 GHz) with a bandwidth of at least 500 MHz is used for close range radio communication to transmit relatively weak radio signals. This prevents other systems from being disrupted. The result is accurate and safe locating of objects to within a few centimeters. Search times are reduced, material flows optimized, and bottlenecks are detected in time. More transparency, fact-based decision-making and increased quality can be established thanks to digital processes which are optimally matched to each other.

More information

- Internet: www.siemens.com/rtls

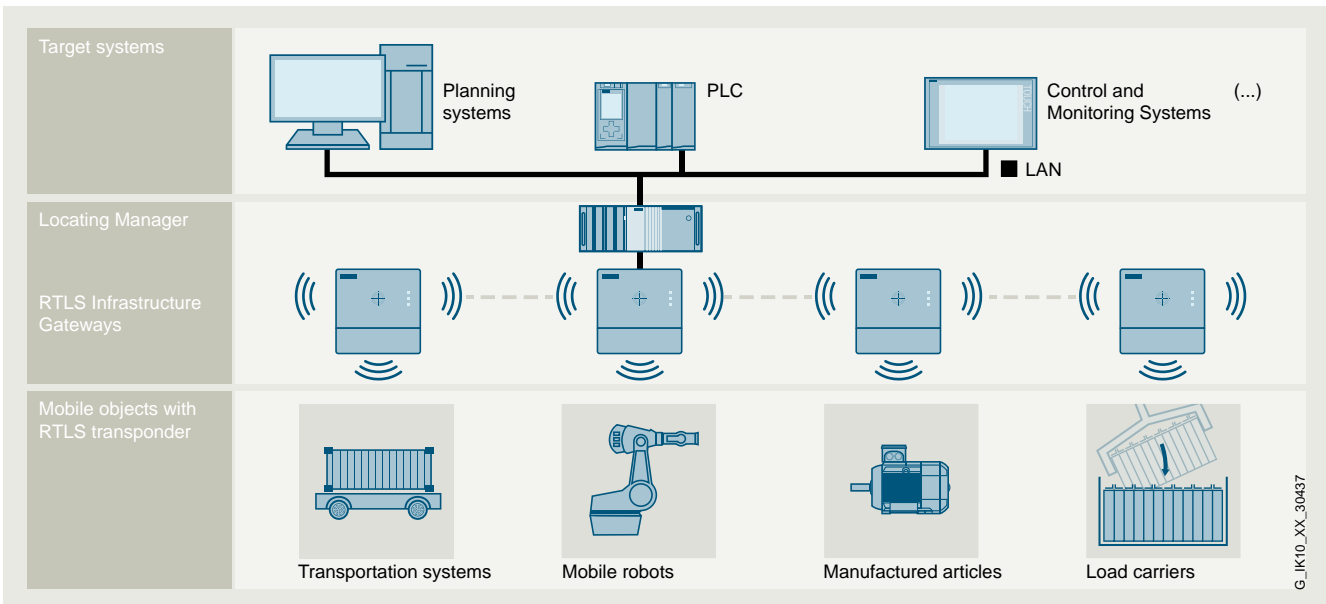

System architecture of RTLS applications

G_IK10_XX_30437

Overviews

Notes

Supplementary components



16/2	Drive systems
16/2	SINAMICS drive system
16/14	SIMATIC MICRO-DRIVE drive system
16/15	Overvoltage protection
16/15	SICROWBAR overvoltage protection
16/16	Timing, coupling and monitoring relays
16/16	SIRIUS relays
16/18	Measuring systems
16/18	Motion Control Encoder measuring systems
16/19	Automation systems
16/19	SIMOTION Motion Control System
16/20	SINUMERIK CNC automation systems
16/20	- SINUMERIK 828D
16/21	- SINUMERIK ONE
16/22	- SINUMERIK MC
16/23	System cabling
16/23	MOTION-CONNECT connection systems

Supplementary components

Drive systems

SINAMICS drive system

Overview

The SINAMICS converter family



- Totally integrated converter family for any application and every industry
- Wide range of power ratings from 0.05 kW to 30 MW
- Broad functional scope, from simple U/f control through to highly dynamic servo control
- Designed for problem-free interaction with other Siemens automation components
- Shared platform concept with uniform functionality, engineering, commissioning, operation as well as a uniform diagnostics concept and communication mechanisms

Low voltage											Direct voltage
Standard performance frequency converters		Distributed frequency converters	Industry-specific frequency converters		Servo converters			High performance frequency converters			DC converters
SINAMICS V20 G120C G120	SINAMICS G130 G150	SINAMICS G115D G120D SIMATIC ET 200pro FC-2	SINAMICS G120X	SINAMICS G180	SINAMICS V90 S200	SINAMICS S110	SINAMICS S210 S210 (New)	SINAMICS G220	SINAMICS S120 S120M	SINAMICS S150	SINAMICS DCM DCP ¹⁾
0.12 kW to 250 kW	75 kW to 2700 kW	0.37 kW to 7.5 kW	0.75 kW to 630 kW	2.2 kW to 6600 kW	0.05 kW to 7 kW	0.55 kW to 132 kW	0.05 kW to 7 kW	0.55 kW to 55 kW	0.55 kW to 5700 kW	75 kW to 1200 kW	6 kW to 30 MW
Pumps, fans, compressors, conveyor belts, mixers, mills, spinning machines, textile machines, refrigerated display counters, fitness equipment, ventilation systems, single-axis positioning applications in machine and plant engineering	Pumps, fans, compressors, conveyor belts, mixers, mills, extruders	Conveyor technology, single-axis positioning applications (G120D)	Pumps, fans, compressors, building management systems, process industry, HVAC, water/waste water industries	Pumps, fans, compressors, conveyor belts, extruders, mixers, mills, kneaders, centrifuges, separators	Handling machines, packaging machines, automatic assembly machines, metal forming machines, printing machines, winding and unwinding units	Single-axis positioning applications in machine and plant engineering	Packaging machines, handling equipment, feed and withdrawal devices, stacking units, automatic assembly machines, laboratory automation, wood, glass and ceramics industry, digital printing machines	Pumps, fans, compressors, conveyor belts, mixers, mills, spinning machines, textile machines, refrigerated display counters, fitness equipment, ventilation systems, single-axis positioning applications in machine and plant engineering	Production machines (packaging, textile and printing machines, paper machines, plastic processing machines), machine tools, process lines and rolling mills, marine drives, test bays	Test bays, cross cutters, centrifuges	Rolling mill drives, wire-drawing machines, extruders and kneaders, cableways and lifts, test bay drives
Catalog D 31.1	Catalog D 11	Catalog D 31.2	Catalog D 31.5	Catalog D 18.1	Catalog D 33 D 37.1	Catalog D 31.1	Catalog D 32	Catalog D 36.1	Catalogs D 21.3, D 21.4 NC 62	Catalog D 21.3	Catalog D 23.1, SiePortal

Engineering tools (e.g. Siemens Product Configurator, TIA Selection Tool, DriveSim Designer/Engineer, STARTER and SINAMICS Startdrive)

¹⁾ DC/DC controllers, see SiePortal.

Overview
SINAMICS V20 –
The perfect solution for basic applications


- Power range from 0.12 kW to 30 kW
- Voltage:
 - 230 V 1 AC: 200 V to 240 V 1 AC (-15 % to +10 %)
 - 400 V 3 AC: 380 V to 480 V 3 AC (-15 % to +10 %)
- Integrated USS and Modbus RTU interfaces
- Integrated braking module for 7.5 kW to 30 kW
- Parameter readout and cloning without power supply
- Integrated connection and application macros
- ECO mode for U/f , U^2/f
- Integrated hibernation mode in idle state
- Wireless commissioning, operation and diagnostics via mobile device or laptop thanks to optional SINAMICS V20 Smart Access web server module
- Expansion of 400 V converters with two digital inputs and two digital outputs (relay outputs) thanks to optional SINAMICS V20 I/O Extension Module

More information

- Catalog D 31.1
- Internet:
 - <http://www.siemens.com/sinamics-v20>
 - <http://www.siemens.com/d31-1>
 - <https://sieportal.siemens.com>

SINAMICS V90 –
The performance-optimized, easy-to-operate basic servo drive system


- SINAMICS V90 and SIMOTICS S-1FL6 form an optimized servo drive system for positioning as well as speed and torque control. Thanks to the optimized design, the system permits enhanced servo performance combined with a high level of ruggedness in a simple, low-cost way.
- SINAMICS V90 is designed for all-purpose servo applications while taking into consideration the challenges for machine builders and system integrators in terms of costs and time-to-market.
- The SINAMICS V90 system can essentially be commissioned effortlessly by means of a simple plug-and-play procedure. The SINAMICS V90 drive offers optimum servo performance, can be integrated quickly into SIMATIC PLCs and provides a high level of reliability. The connection can be made via PROFINET, by means of a pulse-direction interface or via analog inputs/outputs. A seamless drive system can be created by combining the SINAMICS V90 servo drive with our SIMOTICS S-1FL6 servomotor.
- SINAMICS V90 offers internal positioning, positioning with pulse sequence, and speed and torque control.
- With integral auto-tuning in real time and automatic suppression of machine resonances, the system automatically optimizes itself to achieve a highly dynamic performance and smooth operation. In addition, it makes it easier for the pulse sequence input to achieve excellent positioning accuracy on the basis of its high frequency limit of up to 1 MHz.

More information

- Catalog D 33
- Internet:
 - <http://www.siemens.com/sinamics-v90>
 - <http://www.siemens.com/d33>
 - <https://sieportal.siemens.com>

Supplementary components

Drive systems

SINAMICS drive system

Overview

SINAMICS G220 – The variable frequency converter for all industries



SINAMICS G220 is the new high-performance variable frequency converter designed to meet current and future challenges in every industry. Thanks to improved hardware and software, SINAMICS G220 takes digital drive technology to a new level, making applications more efficient, secure and future-proof.

More information

- Catalog D 36.1
- Internet:
<http://www.siemens.com/sinamics-g220>
<http://www.siemens.com/d36-1>
<https://sieportal.siemens.com>

SINAMICS G120P – The specialist for pumps, fans, and compressors



- Power range from 0.37 kW to 630 kW
- Automatic switchover to line operation at rated speed
- Variety of functions for pumps, fans and compressors, e. g. energy-saving mode, Pt1000/LG-Ni1000/DIN-Ni1000 temperature sensor interface, cascade connection, programmable time switches, bypass mode, multi-zone control
- Communication: RS 485, USS, Modbus RTU, BACnet MS/TP, FLN P1, PROFINET, EtherNet/IP, PROFIBUS DP
- Integrated in the TIA Portal with SINAMICS Startdrive
- Energy efficient through minimal apparent power losses, automatic adaptation of the motor current to the actual load conditions with ECO mode

More information

- Catalog D 35
- Internet:
<http://www.siemens.com/sinamics-g120p>
<http://www.siemens.com/d35>
<https://sieportal.siemens.com>

SINAMICS G120X – The infrastructure converter for HVAC/water/wastewater



- Power range from 0.75 kW to 630 kW
- The specialist for pump, fan and compressor applications
- Thanks to the integrated DC link reactor with a maximum output of 250 kW and optional resistance to harmful gases up to environmental class 3C3, the rugged and dependable design ensures reliable, stable and largely robust operation.
- Variety of functions relevant for pumps, fans and compressors, e.g. deragging or pipe fill mode, automatic restart, flying restart, flux reduction, cascade connection, hibernation mode and real-time clock
- Functions especially for building technology as well as heating/air conditioning/ventilation applications, e.g. four integrated PID controllers, essential service mode, bypass mode and programmable time switches
- Communication: PROFINET, EtherNet/IP, PROFIBUS DP, USS, Modbus RTU, BACnet MS/TP
- Innovative hardware and software functions for saving energy, e.g. for controlling synchronous reluctance drive systems

More information

- Catalog D 31.5
- Internet:
<http://www.siemens.com/sinamics-g120x>
<http://www.siemens.com/d31-5>
<https://sieportal.siemens.com>

Overview
**SINAMICS G120C –
 The compact and versatile frequency converter with
 optimum functionality**


- Compact unit
- Highest power density in its class
- Power range from 0.55 kW to 132 kW
- Easy commissioning and maintenance
- With BOP-2 or IOP-2 operator panel
- Safety Integrated: STO
- Available communication: PROFIBUS DP, USS, Modbus RTU, PROFINET, EtherNet/IP
- Wireless commissioning, operation and diagnostics via mobile device or laptop thanks to optional SINAMICS G120 Smart Access web server module
- Integrated in the TIA Portal with SINAMICS Startdrive

More information

- Catalog D 31.1
- Internet:
<http://www.siemens.com/sinamics-g120c>
<http://www.siemens.com/d31-1>
<https://sieportal.siemens.com>

**SINAMICS G120 –
 The modular single-motor drive for low to medium power
 ratings**


- Power range from 0.37 kW to 250 kW
- Safety Integrated: STO, SS1, SBC, SLS, SDI and SSM encoderless
- Communication via PROFIBUS, PROFINET, EtherNet/IP, RS485, USS, Modbus RTU, CANopen, BACnet MS/TP
- Energy efficient thanks to regenerative feedback and low line harmonic distortion
- Parameter copy function for standard commissioning
- Wireless commissioning, operation and diagnostics via mobile device or laptop thanks to optional SINAMICS G120 Smart Access web server module
- Integrated in the TIA Portal with SINAMICS Startdrive

More information

- Catalog D 31.1
- Internet:
<http://www.siemens.com/sinamics-g120>
<http://www.siemens.com/d31-1>
<https://sieportal.siemens.com>

Supplementary components

Drive systems

SINAMICS drive system

Overview

SINAMICS G115D – The distributed drive system



The SINAMICS G115D distributed drive system meets all the requirements that system manufacturers place on drives for applications in conveyor technology with a focus on the intralogistics and airport industries as well as for simple, horizontal applications in the automotive and food and beverage industries. The converter is supplied with degree of protection up to IP66 and sets standards in terms of efficiency – from the installation phase to commissioning and all the way to handling. The SINAMICS G115D drive system is the first choice for users who want to move conveyed material quickly and efficiently.

Integration via PROFINET communication with PROFIsafe, AS-Interface, EtherNet/IP into a higher-level control system is very easy thanks to full TIA Portal integration, which provides a tool as well as an operating and data management concept. In addition, an optional web server module is available with the web server module SINAMICS G120 Smart Access (SAM) – a WLAN-based web server solution for simple and fast wireless setup with tablets or smartphones during commissioning and for diagnostics.

More information

- Catalog D 31.2
- Internet:
<http://www.siemens.com/sinamics-g115d>
<http://www.siemens.com/d31-2>
<https://sieportal.siemens.com>

SINAMICS G120D – The distributed single drive for high-performance solutions



- Positioning capability
- Power range from 0.75 kW to 7.5 kW
- Energy-efficient due to regenerative feedback and low line harmonic distortion
- Safety Integrated: STO, SS1, SDI, SSM and SLS encoderless
- Thanks to the modular design, electronics stocks are minimal
- Interchangeable memory card
- Communication via PROFIBUS DP, PROFINET, EtherNet/IP
- Integrated in the TIA Portal with SINAMICS Startdrive

More information

- Catalog D 31.2
- Internet:
<http://www.siemens.com/sinamics-g120d>
<http://www.siemens.com/d31-2>
<https://sieportal.siemens.com>

Overview
**SINAMICS G130/SINAMICS G150 –
 The universal frequency converters for high-performance
 single drives**


- Available as a standardized control cabinet or built-in units
- Output range from 75 kW to 800 kW or 2700 kW with parallel switching
- Specially for drives with quadratic and constant load characteristics, medium performance requirements, but no regenerative feedback capability
- Service-friendly thanks to easy-to-access device modules
- Communication via PROFIBUS DP, PROFINET, EtherNet/IP
- Energy-efficient due to variable-speed operation
- Sensorless vector control
- Safety Integrated: STO, SBC, SS1 with SBR/SAM, SS2, SLS, SOS, SSM, SDI, SLA, SBT
- Simple commissioning and parameterization via the AOP30 Advanced Operator Panel or PC-supported using the STARTER and SINAMICS Startdrive commissioning tools

More information

- Catalog D 11
- Internet:
<http://www.siemens.com/sinamics-g130>
<http://www.siemens.com/sinamics-g150>
<http://www.siemens.com/d11>
<https://sieportal.siemens.com>

Supplementary components

Drive systems

SINAMICS drive system


Overview

SINAMICS G180 – The specific converter for the oil & gas, chemical and process industries



The LOHER DYNAVERT T frequency converter integrated as SINAMICS G180 into the SINAMICS range has been deployed for over forty years for applications where maximum reliability and availability of the drive are of paramount importance.

SINAMICS G180 converters can be supplied for standard voltages 400, 500 and 690 V in the power range up to 6.6 MW. They are available as a compact unit, a cabinet system or a cabinet unit, with air cooling, for operation with synchronous and asynchronous motors.

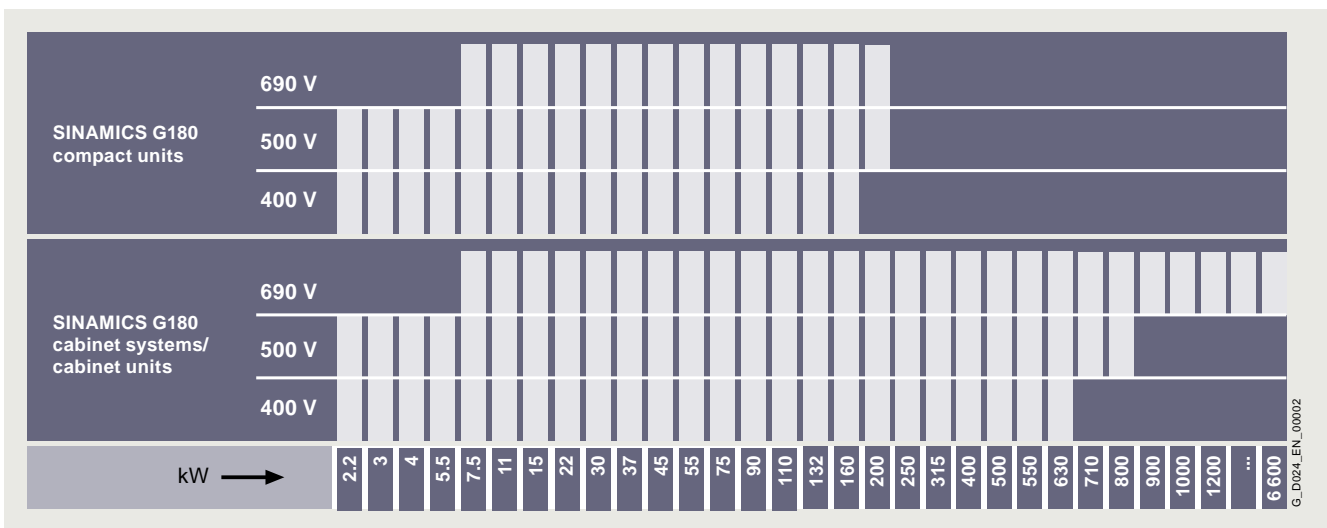

- A wide range of add-on electrical components allow the drive system to be optimized for specific requirements
- Simplified configuring and shortened commissioning due to predefined interfaces and pre-parameterized factory settings
- Sensorless vector control without additional speed actual value encoder (encoder evaluation units are available if required)
- Can be flexibly integrated in all automation concepts
- Communication: Apart from the standard converter interface (compliant with Namur NE37), PROFINET, PROFIBUS DP, Modbus RTU, Modbus TCP, CANopen can also be used optionally

Optionally available peripheral boards can be selected to add the following inputs/outputs to the converter:

- Digital and analog inputs and outputs
- 2 PTC thermistor inputs for ATEX-certified motor temperature monitoring for motors in hazardous zones (prewarning/trip)

More information

- Catalog D 18.1
- Internet:
<http://www.siemens.com/sinamics-g180>
<http://www.siemens.com/d18-1>
<https://sieportal.siemens.com>

Overview
**SINAMICS S200 –
 The single axis AC/AC servo drive system in standard servo
 motion market**


Example: SINAMICS S200 servo drive system consisting of a SINAMICS S200 servo converter, 200 ... 240 V 1 AC / 3 AC, PROFINET, frame size FSB, a SIMOTICS S-1FL2 servomotor, shaft height 30, metal hybrid connector, outlet direction drive end (DE) and MOTION-CONNECT 350 dual cables for power and communication

The SINAMICS S200 servo drive system is a single axis AC/AC servo drive system with compact design, high dynamic performance, ease of use and high reliability for motion control applications in standard servo motion market. It comprises SINAMICS S200 servo converters, SIMOTICS S-1FL2 servomotors, MOTION-CONNECT 350 and 380 connection systems and engineering tools.

System components
SINAMICS S200 servo converters

The SINAMICS S200 servo converters consist of a basic version and a standard version with pulse train input position control (PTI) or PROFINET RT/IRT (PN) to meet various needs of applications and works perfectly together with SIMATIC controllers.

- SINAMICS S200 Basic servo converters, power range 0.1 to 1 kW at 200 ... 240 V 1 AC / 3 AC
- SINAMICS S200 servo converters, power range 0.1 to 1 kW at 200 ... 240 V 1 AC / 3 AC and 0.2 to 7 kW at 380 ... 480 V 3 AC

SIMOTICS S-1FL2 servomotors

With flexible encoder options, including absolute encoder 17-bit singleturn, 21-bit singleturn and 21-bit singleturn + 12-bit multeturn, the system provides precise and accurate performance. The encoders can be used without a battery, making it easy to operate and maintenance.

- Low Inertia for high dynamic performance
- Medium Inertia for dynamic and smooth operational performance
- High Inertia for smooth operational performance

MOTION-CONNECT 350 and 380 connection systems

The cables are available in lengths of up to 30 m and one step further optimized in easy and secure installation with "one-push-lock" motor connecting solution for motor shaft heights 20, 30 and 40.

- MOTION-CONNECT 350 cables, which provide a connection solution for fixed installation applications
- MOTION-CONNECT 380 cables, which provide a connection solution for drag chain installation applications that require a high number of bending cycles

More information

- Catalog D 37.1
- Internet:
<http://www.siemens.com/sinamics-s200>
<http://www.siemens.com/d37-1>
<https://sieportal.siemens.com>

Supplementary components

Drive systems

SINAMICS drive system

Overview

SINAMICS S210 – The single-axis servo drive for highly dynamic applications



The servo drive system comprises a SINAMICS S210 servo converter, a SIMOTICS S-1FK2, S-1FT2 or S-1FS2 servomotor and a matching One Cable Connection (OCC) for connecting the motor to the converter. SINAMICS S210 is a single-axis AC/AC servo converter system with high performance and dynamic response for mid-range Motion Control applications.

SINAMICS S210 servo converters are available for the following line voltages:

- 200 V to 240 V 1 AC (1 AC series)
- 200 V to 480 V 3 AC (3 AC series)

The high performance of the SINAMICS S210 servo drive system in conjunction with the SIMOTICS S-1FK2, S-1FT2 or S-1FS2 servomotor derives from the following features:

- Low moment of inertia and high overload capability of the motor
- High-resolution encoder with fast scanning
- Current controller clock cycle of 62.5 μ s and a pulse frequency of 8 kHz of the servo converter

This enables short cycle times on the machine even with complex motion control.

More information

- Catalog D 32
- Internet:
<http://www.siemens.com/sinamics-s210>
<http://www.siemens.com/d32>
<https://sieportal.siemens.com>

SINAMICS S110 – The specialist for simple positioning tasks



- Servo control
- Power range from 0.55 kW to 132 kW
- Safety Integrated
- Integrated positioning functions
- Straightforward system interface with higher-level controllers (e.g. PLC) with PROFIBUS DP or PROFINET

More information

- Catalog D 31.1
- Internet:
<http://www.siemens.com/sinamics-s110>
<http://www.siemens.com/d31-1>
<https://sieportal.siemens.com>

Overview

SINAMICS S120 –
The flexible, modular drive system for demanding
single-axis and multi-axis applications from the low-end to
the high-end performance range



- Modular drive system for single-axis and multi-axis applications in all areas of machine and plant manufacturing
- Servo/vector control, U/f control
- Power range from 0.12 kW to 5700 kW
- Various types of construction for different application areas
- Highly flexible due to, for example, modular system architecture, different cooling methods, support for a wide range of motors/encoders, easy expansion
- High degree of scalability with regard to performance, number of axes, functionality
- Integrated safety functions
- Comprehensive motion control functionality
- High availability and efficiency, even in unstable networks
- Automatic parameterization and easy drive commissioning/optimization

More information

- Catalogs D 21.3, D 21.4
- Internet:
<http://www.siemens.com/sinamics-s120>
<http://www.siemens.com/d21-3>
<http://www.siemens.com/d21-4>
<https://sieportal.siemens.com>

Supplementary components

Drive systems

SINAMICS drive system

Overview

SINAMICS S150 –

The sophisticated drive solution for single drives in the medium to top performance ranges



- Particularly suitable for applications with high requirements regarding precision and dynamic response in the mid to upper performance range, as well as for frequent braking cycles with high braking energies and four-quadrant operation
- Ready-to-operate control cabinet
- Power range from 75 kW to 1200 kW
- Straightforward configuring and commissioning provided by the SIZER for Siemens Drives, SINAMICS Startdrive and STARTER engineering tools
- High availability and efficiency, even in unstable networks
- Efficient operation through standard energy recovery
- Line-friendly operation thanks to Clean Power Filter (line feedback < 1 %)
- Reactive power compensation possible
- Equipped as standard with PROFINET or PROFIBUS DP interface for connection to higher-level controls

More information

- Catalog D 21.3
- Internet:
<http://www.siemens.com/sinamics-s150>
<http://www.siemens.com/d21-3>
<https://sieportal.siemens.com>

SINAMICS DCP –

The compact DC-DC Converter for industrial applications



With the SINAMICS DCP (DC Power Converter), Siemens extends its portfolio of Compact DC-DC Converters.

In these, Siemens is combining its expertise in DC technology with the advantages of the well-proven SINAMICS family. SINAMICS DCP is setting new standards when it comes to quality, reliability and technical functionality.

The SINAMICS DCP is suitable for industrial drive train applications. As a bidirectional boost and buck converter on both sides with scalable power rating, it combines multiple functions in one single device. With variable voltage levels, current can flow in both directions. This makes the SINAMICS DCP ideal for charging and discharging batteries and supercapacitors.

The high internal switching frequency makes a compact design and low weight possible. As a result, it can be installed in electrical cabinets in a space-saving way.

PROFIBUS is used as the standard communications interface. Optionally, either PROFINET, EtherNet/IP or Modbus TCP can be retrofitted as an additional interface via the CBE20 interface card. The BOP20 Basic Operator Panel is available for status displays and local operator control.

Overview
Special features

- Bidirectional boost and buck converter in one unit (on both sides of the device)
- High efficiency
- High switching frequency
- Compact: The reactor, power unit and control station form one unit
- Temperature-controlled fans (only for DCP 120 kW/DCP 250 kW)
- Incorporated MPPT (Maximum Power Point Tracker)
- No-load voltage limitation of a PV field
- Battery charging characteristic
- Communications interfaces: PROFIBUS (standard), optional EtherNet/IP or Modbus TCP

The functionality can be expanded with other SINAMICS components such as Active Line Modules.

Software feature

- Voltage and current regulation
- 3 overload profiles
- Stable voltage in the DC link

Power rating

The SINAMICS DCP is available with a power rating of 30 kW, 120 kW and 250 kW.

More information

- Internet:
<http://www.siemens.com/dc-dc-converter>
<https://sieportal.siemens.com>

SINAMICS DCM –
The scalable drive system for basic and sophisticated DC drive applications


- Power range 6 kW to 30 MW
- For machinery and plants in industry
 - Steel/aluminum
 - Plastic
 - Printing
 - Paper
 - Hoisting gear
 - Mining
 - Oil and gas
 - Static excitation units
 - Heating applications
 - Magnet applications
- New systems and retrofit business
- Communication as standard via PROFIBUS DP, RS485 or USS, and optionally via PROFINET, EtherNet/IP or Modbus RTU
- Safety Integrated: STO, SS1 acc. to IEC 61508 SIL 3 as well as EN ISO 13849-1 PL e
- Control unit variance
- Field power supply in line with requirements
- Electronics power supply for connection to 24 V DC
- Power unit isolated to ground (isolated voltage sensing)
- Free function blocks and Drive Control Chart (DCC)
- Expandable functionality using SINAMICS components
- Single-phase operation possible
- Coated modules and nickel-plated copper busbars
- Wide temperature range
- High overload capability
- Low torque ripple at low speeds
- Very compact design

More information

- Catalog D 23.1
- Internet:
<http://www.siemens.com/sinamics-dcm>
<http://www.siemens.com/d23-1>
<https://sieportal.siemens.com>

Supplementary components

Drive systems

SIMATIC MICRO-DRIVE drive system

Overview



The SIMATIC MICRO-DRIVE servo drive system is comprised of the main components

- PDC Drives
- TM Drives
- Motor or geared motor
- Plug-in cables

In addition, other system components are also available, e.g. a brake control module (available soon) or shielding bracket sets.

Component selection and dimensioning of the right components based on physical key data, travel profiles and/or load profiles can be done directly in the "download" file of the TIA Selection Tool:

<https://www.siemens.com/tst>

Properties

- DC supply voltage for logic (24 V DC) and power (up to 48 V DC)
- Different performance classes from 100 W to 1000 W for servo converters/PDC drive controllers, and 280 W for F-TM ServoDrive
- Communication via PROFINET with PROFIdrive profiles
- Failsafe communication via PROFIsafe for the failsafe variants (e.g. PDC100F)
- Extended Safety drive functions (e.g. SLS or SLT ¹⁾) for the failsafe variants already possible with the encoders integrated in the motors)
- 24/48 V DC EC motors/geared motors (brushless) from multiple Siemens Product Partners, can also be partially ordered directly via Siemens
- 24/48 V DC DC motors (with brushes) can also be operated with PDC100 and PDC100F
- Pre-assembled plug-in cables from multiple Siemens Product Partners, also can be partially ordered directly via Siemens


¹⁾ Only for PDC100F.

More information

- Catalog D 34
- Internet
 - <https://www.siemens.com/micro-drive>
 - <https://www.siemens.com/d34>
 - <https://sieportal.siemens.com>

Overview


SICROWBAR AC

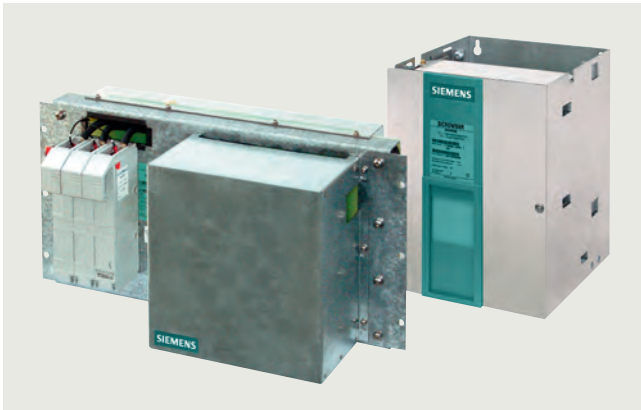

SICROWBAR AC is used to protect power semiconductors in converters (thyristors and diodes) against overvoltage that occurs between the phases of a three-phase network. The range of applications is not restricted to protecting DC drive converters, but also comprises infeed/regenerative feedback units of the AC drive technology that are equipped with thyristors.

Overvoltage that occurs on the AC side of converters is mainly caused by switching operations when disconnecting from the line supply at the transformer's primary side. This applies both to operational switching operations (shutdown at no-load) as well as in the case of a fault (shutdown under load).

The overvoltage protection is mainly used in the following configuration:

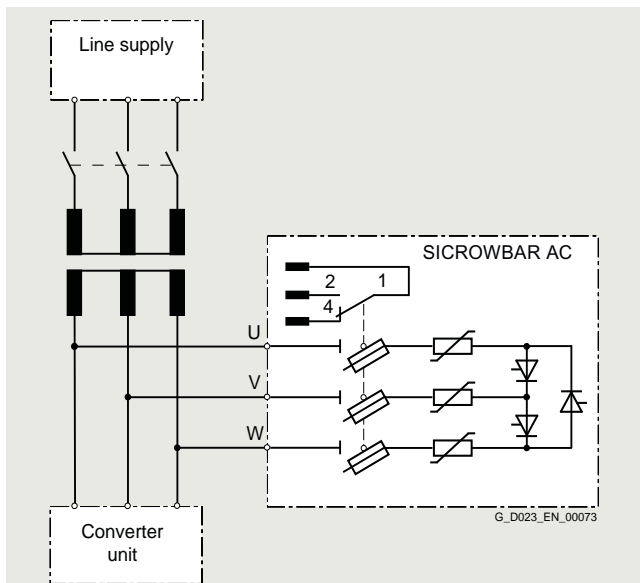

More information


- Catalog D 23.1
- Internet:
<http://www.siemens.com/d23-1>
<https://sieportal.siemens.com>

SICROWBAR DC



SICROWBAR DC protects coils and converters against overvoltage conditions when they are used to supply large inductances, for instance, the excitation coils of synchronous machine motors, DC machine motors or hoisting solenoids. An appropriate de-excitation/discharge resistor must be provided. A thermostatic switch can be ordered as an option for the resistor from the manufacturer.

The fast de-excitation option G11 (module 7VV3003-7FG00) makes it possible to initiate fast de-excitation, triggered by a higher-level signal, for the 7VV3003-5... units.

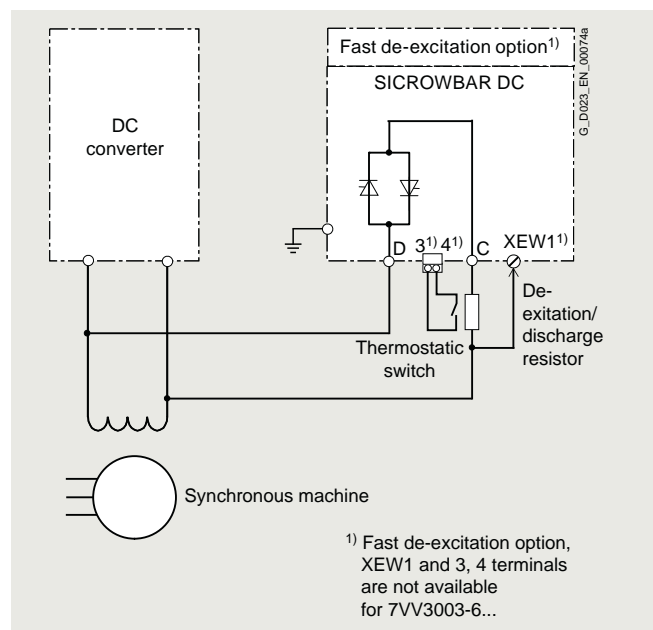

More information


- Catalog D 23.1
- Internet:
<http://www.siemens.com/d23-1>
<https://sieportal.siemens.com>

Supplementary components

Timing, coupling and monitoring relays

SIRIUS relays

Overview

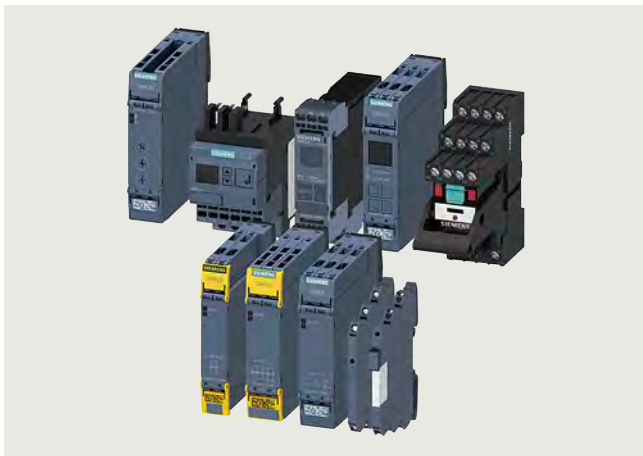

More information

Homepage see <https://www.siemens.com/sirius-monitor>

SiePortal see <https://www.siemens.com/sirius-sieportal>

TIA Selection Tool Cloud (TST Cloud) see <https://www.siemens.com/tstcloud/?node=SIRIUSRelais>

Conversion tool see <https://www.siemens.com/conversion-tool>

Catalog IC 10 see <https://www.siemens.com/ic10>

Brochure "SIRIUS relays" see <https://support.industry.siemens.com/cs/ww/en/view/109766469>

SIRIUS relays – one range for every application

Our range of SIRIUS relays offers you everything you need for a motor feeder application. Easy and convenient – and all from one source. Whether you require compact timing relays or reliable monitoring relays, particularly narrow coupling relays, plug-in relays, low-noise power relays or signal converters – it will not be easy to find a more complete and comprehensive range of relays anywhere. Quite simply, there is one for every possible need. What is more: all SIRIUS relays are particularly easy to use. So take a closer look at our range and convince yourself – you will be surprised.

SIRIUS 3UG, 3RR, 3RN, 3RS monitoring relays – Reliable monitoring and protection

SIRIUS relays from Siemens offer maximum protection for machines and plants, and they communicate with the control level thanks to IO-Link. The SIRIUS relays for IO-Link reliably monitor network quality, power values, voltages, speeds and temperatures and at the same time they open up an even wider field of applications for you.

3UG monitoring relays are used to monitor electric and non-electric variables which cannot (or should not) be directly recorded by an automation system.

- Monitoring of networks for overvoltage or undervoltage, direction of rotation, frequency, or asymmetry
- Monitoring of loads using Cos-phi, power or current measurement
- Monitoring for insulation faults and fault currents
- Monitoring of levels or speeds of rotation

The 3RR current monitoring relays are suitable not only for monitoring motors or other loads, but are also well suited to monitoring multiphase currents of the entire plant or the driven process. In this way, for example, an idling pump or an overload is promptly detected and reported in good time. The 3RR2 monitoring relays can be set up individually or integrated directly into the load feeder.

3RN thermistor motor protection devices monitor the winding temperature of motors fitted with a PTC sensor.

- Compliance with the ATEX directive 2014/34/EC through conformity with EN 50495 and EN 60947-8 standards.
- Compliance with the safety requirements for PL c according to ISO 13849 or SIL 1 according to IEC 61508
- Fast fault diagnostics through display of open-circuit and short-circuit.
- Solid-state compatible output due to hard gold-plated contacts.

The **3RS2 temperature monitoring relays** can be used to measure temperatures in solid, liquid and gas media. The temperature is acquired by means of sensors in the medium, evaluated by the device and monitored for overshoot, undershoot or location within a specified range (window function).

The family comprises an analog multi-function device which can be set using DIP switches and potentiometers, and digital devices which can be parameterized via an intuitive LCD display. The digital device is also available as a version with IO-Link.

All 3RS26 digital devices, including the 3RS28 versions with IO-Link, have safety certification according to IEC 61508/IEC 62061 or ISO 13849 up to SIL 1/PL c as well as EN 14597 for heat generating systems and EN 50156 for burners.

Furthermore, the functionality of the 3RS26/3RS28 digital devices can be expanded using a 3RS29 sensor expansion module with two additional resistance sensors, e.g. for monitoring three-phase motors or transformers.

The 3RS29 sensor expansion module also features an additional relay for outputting the sensor status, and an additional analog input 4 to 20 mA. This analog input also allows ATEX applications to be implemented when using an appropriate temperature sensor. The 3RS29 is connected wirelessly via a SIL 1-certified infrared communication interface.

Notes:

The SIRIUS 3RS2 temperature monitoring relays fully replace the 3RS1 predecessor.

SIRIUS speaks IO-Link

With the SIRIUS monitoring relay for IO-Link you are opting for maximum flexibility: As well as the autonomous monitoring function that is still available, measured values and data can also be transferred directly to the controller via IO-Link. Parameters can also be assigned locally or via IO-Link. This means that the SIRIUS relays for IO-Link are fully integrated into Totally Integrated Automation, our open system architecture for integrated automation. You also profit from significantly simplified device replacement – thanks to data matching and automatic re-parameterization via a parameter server.

Overview

SIRIUS 3RP, 7PV timing relays

Electronic timing relays are used for all delayed switching operations in open-loop control, starting, protection and closed-loop control circuits.

Thanks to their sophisticated and compact design, the 3RP timing relays are ideal timer modules for control cabinet, switchgear and controller manufacturers from the industry. Due to their narrower design, the 7PV timing relays are particularly suitable for use in heating, ventilation and air-conditioning systems and compressors.

SIRIUS 3RA28 function modules and solid-state time-delayed auxiliary switch blocks

The 3RA28.1. function modules permit the construction of starters and contactor combinations for direct and star-delta starting. They include the essential control functions that are needed for the respective feeder – for example, timing and electrical interlocking functions. Function modules that function as timing relays can easily and quickly be fitted to SIRIUS contactors – without any significant wiring effort. They permit both ON-delay and OFF-delay switching of contactors.

The 3RA28.3. solid-state time-delayed auxiliary switch blocks can be connected to contactors and are designed for contactor coil voltages in the 24 to 240 V AC/DC wide voltage range. Auxiliary switches for control and alarm signals are used specially for switching the smallest signals for electronics applications. They are used, for example, for allowing a pump or fan to run on, in a similar way to an OFF-delay time relay or for the delayed activation of a gate drive. Simply by snapping and locking it into place, both the electrical and mechanical connection is made. To attenuate switching overvoltages of the contactor coil, a varistor is integrated in the time-delayed auxiliary switch.

SIRIUS 3RQt to 3RQ3, 3TG10 and LZS coupling relays

The SIRIUS coupling relays are ideally suitable for coupling to and from controllers and are thus the perfect partner for SIMATIC controllers. They can be used for electrical isolation, for voltage conversion, for signal amplification and for overvoltage and EMC protection.

The force-guided **3RQ1 coupling relays** (up to SIL 3/PL e) are available in widths of 17.5 mm and 22.5 mm. Due to the forced guidance according to IEC 60947-5-1 (IEC 61810-3), the contacts of the installed relays are mechanically connected to each other in such a way that NO and NC contacts are never closed simultaneously. As a result, an opening failure can be reliably detected and maximum safety can be ensured. 3RQ1 coupling relays serve to reliably couple safe controllers, also for safety applications up to SIL 3/PL e.

The **3RQ2 coupling relays** for universal use set standards: With a wide voltage range from 24 V to 240 V AC/DC they are the star attraction on the coupler market. The reduced variety of components simplifies product selection and standardization. In this series, we offer you devices in the field-proven 22.5 mm industrial enclosure with one, two or three changeover contacts and with screw-type or spring-loaded connections (push-in technology). The versions with hard gold-plated contacts ensure an especially high contact reliability even at low currents. Thanks to the well-proven industrial enclosure, you can enjoy the benefits of user-friendly connection systems with permanent wiring, just the same as with our timing relays.

The **3RQ3 coupling relays** are now available in a new uniform enclosure design. With their narrow width of 6.2 mm and low installation depth/height, they are ideal for space-optimized use in control cabinets with short gaps between tiers, and in flat control boxes. All versions are available with screw-type or spring-loaded terminals (push-in technology). Wiring time is reduced because conductors are inserted and clamped from the front.

3RQ3 coupling relays are available as:

- Coupling relay with relay output (not plug-in)
- Coupling relay with plug-in relay
- Coupling relay with semiconductor output (not plug-in)

3TG10 power relays/miniature contactors prove their worth wherever small, low-noise relays or contactors are required at a reasonable price. This makes them ideal for simple controllers, especially for use in large-series manufactured devices and controllers. For applications that do not require an overload relay and need only one auxiliary switch – and which therefore need more switching power, higher switching voltage, and a longer service life.

LZS coupling relays with plug-in relays are available as complete devices or as individual modules for self-assembly or spare parts requirements, into designs RT and PT.

- Can be used for contact multiplication, adaptation of potential, or for switching small loads.
- Max. 4 changeover contacts in one device:
 - Wide-voltage versions with or without hard gold-plated contacts.
 - With screw-type or push-in spring-loaded terminals.

SIRIUS 3RS70 signal converters

The 3RS70 signal converters share the enclosure concept with the 3RQ3 coupling relays. They are used mainly for the electrical isolation and conversion of analog signals. Sensors/actuators and controllers usually have different potentials and therefore require electrical isolation in the signal circuit. This is done either in the controller or by means of signal converters.

The conversion of one signal into another is required if, for example, a voltage signal has to be converted into a current signal for transmission over a longer distance, or if the output of a sensor and the input of a controller do not match.

The implemented frequency outputs offer another application. The input signal is converted to a proportional frequency here. This means that analog signals can be processed with digital inputs.

This is important if a controller offers no possibility for an analog input, or if all analog inputs are already occupied, for example, in the case of retrofits.





Supplementary components

Measuring systems

Motion Control Encoder measuring systems

Overview

Motion Control Encoder measuring systems

Encoder type	Incremental encoders			Absolute encoders				
								
Interface	sin/cos 1 V _{pp}	RS422 (TTL)	HTL	DRIVE-CLiQ	SSI	EnDat 2.1	PROFIBUS DP-V2	PROFINET IO with RT/IRT
Resolution	1000 S/R 1024 S/R 2500 S/R	500 S/R 1000 S/R 1024 S/R 1250 S/R 1500 S/R 2000 S/R 2048 S/R 2500 S/R 3600 S/R 5000 S/R	100 S/R 500 S/R 1000 S/R 2500 S/R	Single-turn 24-bit Multiturn 36-bit (2 ²⁴ steps × 4096 revolutions)	Single-turn 13-bit (8192 steps) Multi-turn 25-bit (8192 steps × 4096 revolutions)	Single-turn 13-bit (8192 steps) Multi-turn 25-bit (8192 steps × 4096 revolutions)	Single-turn 13-bit (8192 steps) Multi-turn 27-bit (8192 steps × 16384 revolutions)	Single-turn 13-bit/16 bit (8192/65536 steps) Multi-turn 27-bit/30 bit (8192/65536 steps × 16384 revolutions)
Catalog	D 21.4							

Motion control encoders are optoelectronic built-on encoders that detect the traversing distances, angles of rotation, speeds or positions of machine axes. Motion control encoders are direct measuring systems that are built-on to shafts, axes or motors. They can be used in conjunction with numerical and programmable logic controllers, drives and position displays. Motion Control Encoders are system-tested, certified components that have been harmonized for use with the following systems:

- SINUMERIK CNC controls
- SIMOTION Motion Control Systems
- SIMATIC programmable logic controllers
- SINAMICS drive systems

Motion control encoders are used with machine tools and production machines as additional external measuring systems. They are available as incremental or absolute encoders.

- In the case of incremental encoders, the machine must travel to a reference point after each power-off state, as the position is not usually stored in the controller, and movements of the machine while the power is off are not recorded.
- Absolute encoders, on the other hand, also record movements while the power is off and return the actual position after power on. Travel to a reference point is not necessary.

All motion control encoders are available as Synchro flange and clamp flange versions. The absolute encoders are also available with a hollow shaft and torque arm.

The motion control encoders are driven via a plug-in coupling or spring disk coupling. Alternatively, pulleys can also be used.

The motor control encoder supply voltage is 5 V DC or alternatively 10 V to 30 V DC. The 10 V to 30 V DC version supports longer cable lengths. Most control systems supply the voltage directly at the measuring circuit connector. With SINAMICS, the measuring systems are provided with power via the converters or the Sensor Modules.

For motion control encoders with cables, the cable length including the connector is 1 m.

The following bending radii must be observed for the cable to the built-on encoder:

- One-time bending: ≥ 20 mm
- Continuous bending: ≥ 75 mm

More information

- Internet:
<http://www.siemens.com/sensor-systems>
<https://sieportal.siemens.com>

Overview



SIMOTION system

The well-proven, modular and scalable SIMOTION Motion Control System with high-end functions for motion control is the ideal solution for applications in mechanical engineering, in which modularity, maximum precision and speed are vital.

SIMOTION ensures a high level of flexibility at low engineering outlay with the modular technology object approach. Object-oriented programming and a programming model with units and libraries enable the creation of reusable software modules and the effective implementation of large quantity structures.

SIMOTION simplifies the development and integration of standard modules in an executable project with libraries for industry-specific applications and the SIMOTION easyProject project generator.

The SIMOTION system is made up of three components:

Engineering system

The SCOUT engineering system enables Motion Control, PLC and technology functions to be incorporated in one comprehensive, integrated system and provides all the necessary tools:

From programming and parameterization through testing and commissioning, to diagnostics.

SCOUT can be used in SIMATIC STEP 7, either with standardized data management and configuring procedures, or as a stand-alone engineering tool (SCOUT Stand-Alone). SCOUT TIA (SIMOTION in the TIA Portal) is available as an optional package for TIA Portal V13 and above and is included in the scope of supply of SCOUT.

The following options, for example, are available in the engineering system for programming:

- Graphic programming with Motion Control Chart (MCC)
- Ladder Diagram (LAD)/Function Block Diagram (FBD)
- High-level language Structured Text (ST), including object-oriented programming

Runtime system

The runtime system offers a high-performance execution system for cyclic and sequential tasks. The runtime software modules make the different PLC, Motion Control and technology functions available. By selecting the appropriate modules, the overall functionality of the system can be flexibly adapted to the machine.

Hardware platform SIMOTION D

The hardware platform SIMOTION D represents the basis for the SIMOTION Motion Control System. The scalable SIMOTION hardware supports centralized, distributed and mixed topologies for all machine designs with up to 128 axes per controller.

SIMOTION D – Compact and integrated in the drive

- The complete machine automation with drive control, PLC, Motion Control and technology functionality in one compact unit of SINAMICS S120 design.
- Particularly fast response
- Versatile networking options via PROFINET, PROFIBUS or Ethernet
- Scalable since multiple performance versions available
- SIMOTION D is available in two configurations:
 - As a single-axis system SIMOTION D410-2 with multi-axis option (blocksize configuration). The Control Units are available in D410-2 DP and D410-2 DP/PN versions and are snapped onto the SINAMICS S120 PM240-2 Power Modules in blocksize format.
 - As a multi-axis system SIMOTION D4x5-2 in four performance variants for as many as 128 axes (booksize format)
- Ideal for:
 - Compact machines
 - Distributed automation concepts, e.g. on machines with a large number of axes
 - Modular machines
 - Time-critical demands on the axis couplings

More information

- Internet:
 - <http://www.siemens.com/simotion>
 - <https://sieportal.siemens.com>

Supplementary components

Automation systems

SINUMERIK CNC automation systems

SINUMERIK 828D

Overview



SINUMERIK 828D – the powerhouse among the compact CNCs

With their unique CNC performance, SINUMERIK 828D CNCs set productivity benchmarks when it comes to milling and turning on standard machines as well as functions for easy automation of grinding machines.

Rugged and maintenance-free

Their die-cast magnesium operator panel fronts, the panel-based CNC design with minimal interfaces, as well as a high degree of protection, make SINUMERIK 828D CNCs reliable partners even in harsh environments.

Designed without a fan or hard disk, with NVRAM memory technology and no back-up battery, SINUMERIK 828D CNCs are completely maintenance-free.

User-friendly

The SINUMERIK 828D CNCs are very easy to operate thanks to a full QWERTY CNC keyboard with short-stroke keys and a high-resolution 10.4" TFT color display or 15.6" touch display.

CNC data are quickly and easily transferred via USB, CF card (for 10.4") and RJ45 interfaces on the operator panel front.

Optimum scalability

Based on the three CNC performance versions SW24x, SW26x and SW28x of the SINUMERIK 828D CNCs, favorably-priced compact as well as more complex machines with additional axes/spindles and 2 machining channels and 2 handling channels can be implemented.

Preconfigured technology for use in standard turning and milling machines

SINUMERIK 828D is perfectly adapted for use in standard machines and provides optimum support for turning and milling technologies. With two preconfigured system software variants for machining technology, the SINUMERIK 828D CNC systems are ready for use in turning and milling machines on dispatch from the factory.

The ideal basis for implementing a compact grinding machine

The G-Tech technology variant provides grinding machine manufacturers with a perfect platform for designing grinding machines – both cylindrical and surface grinding machines are supported.

Since grinding machine manufacturers want to fully incorporate their specific process know-how so that it is even reflected in the operating philosophy of the CNC, the G-Tech variant of the SINUMERIK 828D offers a number of sophisticated grinding and dressing cycles. Additionally, SINUMERIK Run MyScreens and Run MyHMI /3GL provide manufacturers with the option of designing their own HMI.

More information

- Internet:
<https://sieportal.siemens.com>
<https://www.siemens.com/sinumerik>
<https://www.siemens.com/nc82>
- For full details of SINUMERIK 828, please refer to the market-specific solutions in SiePortal:
<https://mall.industry.siemens.com/mall/ww/en/Catalog/Products/10078797>

Overview




SINUMERIK ONE: the next level CNC in the premium class

SINUMERIK ONE – the digital native CNC with the pioneering CNC system for highly productive machine tools. Thanks to its digital twin, the key element in digital transformation, SINUMERIK ONE helps to simulate and test work processes completely virtually - saving time, resources and costs.

Boosting productivity with SINUMERIK and digitalization solutions

Shorter product introduction times and increasing individualization of products influence production with machine tools. High productivity is more important than ever for machine manufacturers and users. The key factor is optimum interaction of automation and CNC solutions and sophisticated technology – and the effective integration of digital solutions. This applies to all areas: from design and construction of a machine to operation and service. SINUMERIK connects automation, competence in technology, and digitalization to form a single solution offering for more productivity. SINUMERIK CNC systems are the optimum solution for the production of individual parts or series production, for simple or complex workpieces.

Benefits

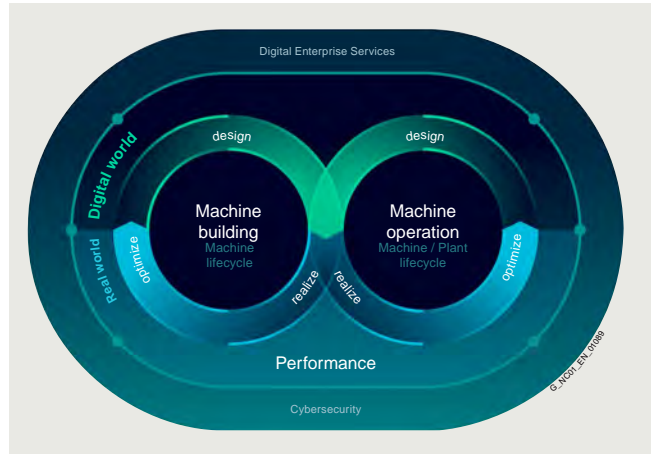

Merging the real world with the virtual world

The new SINUMERIK ONE is specifically designed for smart manufacturing.

- The digital twin is an integral part of the CNC system; virtual and real CNC merge and complement each other
- Significant reduction in product development and market launch times thanks to the **digital first** strategy
- Improved networking and data communication capabilities
- Significant reduction in the duration of real commissioning thanks to virtual commissioning preparation
- Significantly increased CNC performance
- Significantly shorter downtimes and complete integration into the TIA Portal thanks to the integrated SIMATIC S7-1500F PLC

This means that the SINUMERIK ONE can be seamlessly integrated into digital solutions and workflows.

More information

- Internet:
<https://sieportal.siemens.com>
<https://www.siemens.com/sinumerik-one>
<https://www.siemens.com/nc63>
- For full details of SINUMERIK ONE, please refer to the market-specific solutions in SiePortal:
<https://mall.industry.siemens.com/mall/ww/en/Catalog/Products/10028455>

Supplementary components

Automation systems

SINUMERIK CNC automation systems

SINUMERIK MC

Overview



SINUMERIK MC – the universal and open CNC which can be easily integrated into existing machine solutions

Thanks to its integrated SINUMERIK CNC, SIMATIC controller and Windows 10 operating system, the SINUMERIK MC is the ideal solution for machine tools with customized user interfaces.

The areas of application range from machining wood, stone and glass and adhesive application to simple grinding applications and special machine tool technologies such as sheet metal cutting, laser and water jet cutting, as well as additive manufacturing.


- The integrated Windows operating system allows the user interface to be designed simply and matched to customer requirements. The **open operating concept** and extensive interfaces make the SINUMERIK MC an integrated and open control system.
- The proven SINUMERIK CNC technology enables maximum precision in motion control and – thanks to **G code programming** – freedom and flexibility in machine control.
- Shorter response times of the latest SIMATIC S7-1500F PLC enable **increased processing speed** and significantly boost automation performance.
- Symbolic programming, modern programming languages and extensive toolboxes for implementing standard applications make **engineering in the TIA Portal** simple and efficient.
- SINUMERIK MC offers **Safety Integrated** as a uniform Siemens industry safety standard and implements the multi-level defense-in-depth concept for IT security.
- **Attractive option packages** offer the best possible adaptation to individual machine requirements.

More information

- Internet:
<https://sieportal.siemens.com>
<https://www.siemens.com/sinumerik>
<https://www.siemens.com/nc64>
- For full details of SINUMERIK MC, please refer to the market-specific solutions in SiePortal:
<https://mall.industry.siemens.com/mall/ww/en/Catalog/Products/10367270>

Overview

MOTION-CONNECT includes connection systems and components which are optimally tailored to individual areas of application. MOTION-CONNECT cables feature state-of-the-art connection systems to ensure fast, reliable connection of different components, and offer maximum quality as well as system-tested reliability.

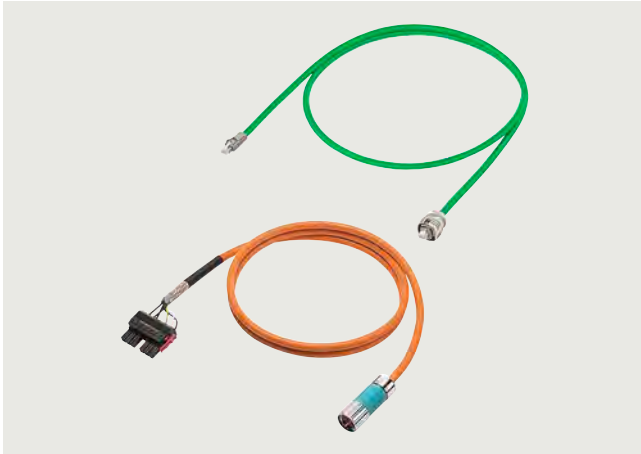

MOTION-CONNECT power cable and signal cable

MOTION-CONNECT cables are available as fully-assembled power and signal cables or sold by the meter. The pre-assembled cables can be ordered in length units of 10 cm (3.94 in) and can be extended, if necessary.

Whatever your machine requirements, MOTION-CONNECT offers the solution.

- **Robust, high-performance and easy to use** thanks to pre-assembled cables with a rugged metal connector in degree of protection IP67 and reliable SPEED-CONNECT quick-release lock
- **Outstanding and proven quality** achieved by consistent quality management and system-tested cables

Cables are available in two different qualities – MOTION-CONNECT 500 and MOTION-CONNECT 800PLUS.

MOTION-CONNECT 500	MOTION-CONNECT 800PLUS
<ul style="list-style-type: none"> • Cost-effective solution for predominantly fixed installation • Tested for travel distances up to 5 m (16.4 ft) 	<ul style="list-style-type: none"> • Meets requirements for use in cable carriers • Oil-resistant • Tested for travel distances of up to 50 m (164 ft)

More information

- Internet:
<https://www.siemens.com/motion-connect>
<https://sieportal.siemens.com>

Supplementary components

Notes

Appendix



17/2	Training Services – SITRAIN
17/4 17/4	Additional documentation SIMATIC Manual Collection
17/5 17/5 17/6	Standards and approbations CE marking Certificates
17/6	Quality management
17/7 17/7	Siemens Automation Cooperates with Education (SCE) Teaching made easy - Comprehensive support on the way to Industry 4.0
17/10 17/10 17/11	Partners Siemens Partner Program Partners at Siemens
17/12 17/14	Industry Services Online Support
17/15	Software licenses
17/17	Conditions of sale and delivery

Appendix

Training Services SITRAIN

Introduction

Learn the way you like it – with SITRAIN

SITRAIN imparts a wide range of technical knowledge for all industries and applications. Our offering is oriented toward the needs of learners and the demands of innovative companies. Get pleasure out of learning - thanks to innovative learning methods, personal support, and knowledge that will help you in your work and further development. For successful, flexible, and continuous learning.

Education and training directly from the manufacturer

SITRAIN provides you with training from the industrial product and solution portfolio from Siemens and benefits from 30 years of expertise in technical training. Take a look at the many options for expanding your knowledge with SITRAIN and find the course that meets your needs! The following training and further education units are available to you for your individual knowledge building:



Industrial Automation Systems SIMATIC

Training available for: SIMATIC S7-1500, TIA Portal, SIMATIC S7-300/400, SIMATIC S7-1200



Drive Technology

Training available for: SINAMICS S120 and SINAMICS G120 low-voltage converters, SINAMICS G130 / G150 / G180 / S150



SINUMERIK CNC automation system

Training available for: SINUMERIK 840D, SINUMERIK 840D sl and SINUMERIK ONE



Process Control Systems

Training available for: SIMATIC PCS 7, SIMATIC PCS neo



Digital Enterprise

Training available for: Openness, SIMIT, OPC UA, Industrial Edge, Virtual commissioning



Industrial Communications

Training available for: PROFINET, SCALANCE, RUGGEDCOM, Industrial Ethernet, Fieldbus communication, Industrial Security, Remote communication



Identification and Locating

Training available for: RFID, RTLS-Systems



Operator Control and Monitoring Systems

Training available for: SIMATIC WinCC Unified in TIA Portal, SIMATIC WinCC in TIA Portal, SIMATIC WinCC V7x



Motion Control System SIMOTION

Training available for: SIMOTION (Programming, Commissioning, Diagnostics, Service)



Smart Infrastructure

Training available for: SIRIUS, SENTRON, SIVACON, ALPHA, SIMOCODE, Circuit breakers



Process Analytics & Instrumentation

Training is available for process analytics and instrumentation, explosion protection, process gas chromatographs



Additional training offer

SIMOVE with Automated Guided Vehicles (AGV), SIPLUS CMS, Guidelines and standards for control cabinets

Introduction

Different learning formats and methods for maximum learning success

With our SITRAIN training formats, you learn in the way that best suits your preferences and routine. You decide whether you would rather take online training or face-to-face training. It is up to you whether you would like to study on demand or at fixed times.

With a personal learning consultant, in the team, or on your own – you can explore all the possibilities.

Discover our three learning formats:



Learning Event

SITRAIN Learning Events are the perfect choice when you want to achieve a defined learning goal in the shortest possible time. You learn in a protected learning environment outside of the daily work routine under the guidance of a learning consultant - virtually, in the training center, or at your company.



**Learning Membership
SITRAIN Access**

With SITRAIN access, you enter a world of extensive and constantly expanding self-study units on our digital learning platform for industry. With SITRAIN access, you can implement a modern learning culture in your team or company with independent and continuous learning.



Learning Journey

The Learning Journey is the perfect combination of units taken live and self-study units for sustainable learning success. The modular approach enables simple integration into your daily work. This also includes one-year membership for using the SITRAIN access digital learning platform.

<p>Live</p>	<p>Self-reliant</p>	<p>On demand</p>	<p>Individual</p>
<p>Learn together with others, simultaneously and guided by a learning consultant. Online, in the SITRAIN training center or at your company.</p>	<p>Expand your knowledge self-determined with industry learning and work on your learning units at your own pace and according to your own schedule.</p>	<p>Get the knowledge you need, exactly when you need it. Be it to answer a current question or to work on a special topic.</p>	<p>Talk directly with the learning consultant, clarify detailed questions and get personal coaching for transferring the learned topics to your own application.</p>



Training cases catalog

<https://www.siemens.com/sitrain-catalog-training-cases>

www.siemens.com/sitrain

Find your local offer here



Appendix

Additional documentation

SIMATIC Manual Collection

Overview

The SIMATIC manual collection brings together the manuals of Totally Integrated Automation in the smallest possible package. It is eminently suitable for startup and service, replaces the space-consuming paper version in the office and provides fast access to the information.

The manual collection contains manuals in 5 languages for

- S7-1200
- S7-1500
- S7-200
- S7-300
- S7-400
- LOGO!
- SIMATIC DP
- SIMATIC PC
- SIMATIC PG
- STEP 7
- Engineering software
- Runtime software
- SIMATIC HMI
- SIMATIC NET
- SIMATIC IDENT

Manuals that are not yet available in all 5 languages will at least be included in English and German.

There is an update contract for the SIMATIC Manual Collection that encompasses supply of the up-to-date collection and three subsequent updates which is valid for one year. If the update contract is not cancelled, it is automatically extended and the list price will be charged to the customer.

Ordering data

SIMATIC Manual Collection

Electronic manuals on DVD, multi-language:
All manuals for S7-1200/1500/200/300/400, LOGO!, SIMATIC DP, PC, PG, STEP 7, Engineering SW, Runtime SW, SIMATIC HMI, SIMATIC NET, SIMATIC IDENT

SIMATIC Manual Collection update service for 1 year

Current "Manual Collection" DVD and the three subsequent updates

Article No.

6ES7998-8XC01-8YE0

6ES7998-8XC01-8YE2

Overview

The electronic products described in this catalog comply with the requirements and protection objectives of the following EU directives insofar as they relate to the product concerned. They also comply with the corresponding harmonized European standards (EN) published for these products in the Official Journals of the European Community.

- 2014/35/EU "Electrical equipment designed for use within certain voltage limits" (Low Voltage Directive)
- 2014/30/EU "Electromagnetic Compatibility" (EMC Directive)
- 2014/34/EU "Equipment and protective systems intended for use in potentially explosive atmospheres" (Explosion Protection Directive)
- 2011/65/EU "Restriction of the use of certain hazardous substances in electrical and electronic equipment" (RoHS Directive)
- For F-modules, the following also applies: 2006/42/EC "Machinery Directive"

The originals of the declarations of conformity are kept available by us for the responsible supervisory authorities.

They are also available for download on the Siemens Industry Online Support website (<https://sieportal.siemens.com>), keyword "Declaration of Conformity".

Note on the EMC Directive:

In terms of their interference emissions, SIMATIC products are designed for industrial applications.

If individual products deviate from this specification, it is noted in the catalog with the products.

The installation instructions in the manuals must be adhered to when installing and operating the products described in this catalog. These contain, for example, important information on installation in cabinets and on the use of shielded cables.

Notes for machine manufacturers

The SIMATIC automation system is not a machine within the context of the EU machine guidelines. Therefore a declaration of conformity with regard to the EU machine directive 89/392/EEC or 2006/42/EU (new edition, applicable from end of 2009) may not be provided for SIMATIC.

The EU machine directive regulates the requirements placed on a machine or a part thereof. A machine is understood for the purposes of this guideline to be a combination of interconnected parts or mechanisms (see also EN 292-1, Paragraph 3.1).

SIMATIC is part of the electrical equipment of a machine, and must therefore be integrated into the evaluation of the complete machine by the machine manufacturer.

As electrical equipment, SIMATIC is subject to the low-voltage directive which, as a "total safety directive", covers all dangers just like the machine directive.

The EN 60204-1 standard (safety of machines, general requirements for the electrical equipment of machines) is applicable to the electrical equipment of machines.

The following table will help you in the provision of your declaration of conformity, and shows which criteria according to EN 60204-1 (2006-06) apply to SIMATIC. You can obtain further information from the enclosed declaration of conformity according to the low-voltage and EMC directives (with list of included standards).

EN 60204-1	Topic/criterion	Notes
Paragraph 4	General requirements	The requirements are met when the equipment is assembled/ installed in accordance with the installation guidelines. Please note the relevant information in the manuals.
Paragraph 11.2	Digital input/output interfaces	The requirements are met
Paragraph 12.3	Programmable equipment	The requirements are met when the equipment is installed in lockable cabinets to protect against alteration of the memory contents by unauthorized persons
Paragraph 20.4	Voltage tests	The requirements are met

Appendix

Standards and approbations, quality management


Certificates, authorizations, approbations, declarations of conformity

An overview of the certificates available for SIMATIC products (CE, UL, CSA, FM, shipping authorizations) can be found in the internet at


<http://www.siemens.com/simatic/certificates>

The lists are continuously updated. The data for products which have not yet been included in the overview is continuously collected and prepared for the subsequent edition.

You can also find certificates, approbations, verification certificates or characteristic curves under Product support "Entry list"

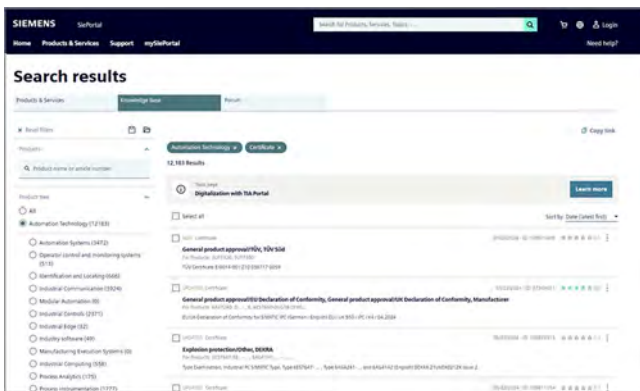

or by going directly to the Link Box:

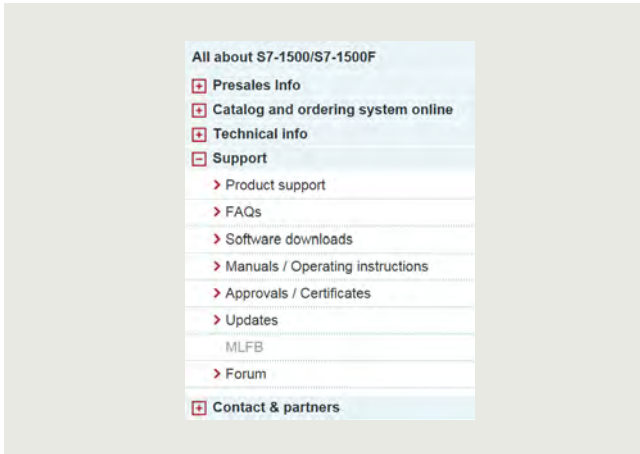

Quality management

The quality management system of the Siemens Operating Company Digital Industries, Business Unit Factory Automation, complies with the international standard ISO 9001.

The products and systems described in this catalog are sold under application of a quality management system certified by DQS in accordance with DIN EN ISO 9001.

The DQS certificate is recognized in all IQ Net countries.

DQS Registered Certificate No.:

Siemens AG

- DI FA
Reg.-Nr.: 001323 QM15

Knowledge & technology – the keystones to success in digitalization



Digitalization is quickly and radically changing our world. What does this mean for education?

In the world of Industry 4.0, companies can expect a host of new opportunities and challenges. New systems are verified on the spot through simulations. Automated mass production processes can make every product on the conveyor belt a unique product.

New products are now market-ready much faster. Siemens is shaping this transformation as a technology leader in the field of automation and process lifecycle management (PLM).

These new digitalization processes are changing the know-how requirements for employees. Many educational institutions are facing the challenge of conveying Industry 4.0 know-how as part of their teaching and training. The Siemens Automation Cooperates with Education (SCE) program is supporting educators on the way to Industry 4.0.

The SCE digitalization concept for educators

The SCE digitalization concept presented here shows how digitalization can be implemented in educational institutions – from vocational schools to universities.

Digitalization (or Industry 4.0) know-how is now introduced through computer aided technology, Industrial Edge and IIoT as well as Cloud technologies. It is founded on the basics of automation, such as digital technologies, PLC and information technologies, and on advanced automation and industrial communication technologies.

The level of digitalization knowledge can be weighted, depending on the vocational field or branch of study – e.g. mechanical engineering, automation engineering or computer science.



Appendix

Siemens Automation Cooperates with Education (SCE)

Teaching made easy - Comprehensive support on the way to Industry 4.0

The SCE digitalization concept for educators (continued)



As part of their project work, students at Vocational School 2 in Wolfsburg, Germany, have implemented the three levels of the SCE Industry 4.0 concept. A virtual twin created with the Siemens NX Mechatronics Designer (MCD) CAD software was used for the design and virtual commissioning. This enables fast and efficient assembly of the real automation system, e.g. with SIMATIC S7-1500/ET 200SP/RFID, for use in classes. Production data, such as the number of bottles filled, production date and system parameters, are uploaded to a cloud using SIMATIC IOT2000.

new.siemens.com/global/en/company/sustainability/education/sce/iot2000.html

siemens.com/nx

The SCE offers



Learning and training documents

More than 100 didactically prepared learning and training documents are available through SCE and incorporate the digitalization concept. They are designed for use in classes, but can also be customized or used for individual study. These documents are available for free download, most of them in 7 languages.

siemens.com/sce/documents

Educator courses

Excellent teaching content is needed to introduce students to digitalization. For this purpose, SCE holds educator courses in certain regions. Based on our learning and training documents and through practical exercises, educators acquire the latest Industry 4.0 know-how.

siemens.com/sce/courses



Trainer packages

The 90 SCE trainer packages help educators teaching and implementing the SCE digitalization concept. Trainer packages comprise specially compiled, genuine Siemens hardware and software products. The trainer packages are based on the learning and training documents and are offered to schools, colleges and universities at special terms.

siemens.com/sce/tp

Support for your projects / textbooks

We support you on selected projects with advice and assistance from SCE contact partners.

As a special service, we support textbook authors. We maintain a list of textbooks on the SCE website.

siemens.com/sce/contact

siemens.com/sce/books

Partnerships for proliferation of Industry 4.0 in education

**Partnership with WorldSkills**

As a technology powerhouse, we support vocational training of students around the world. Since 2010, we have partnered with WorldSkills as a Global Industry Partner in order to amplify this cause.

WorldSkills is an international organization whose mission is to raise the profile and recognition of skilled people, and show how important vocational skills are in achieving economic growth and personal success. Every two years, WorldSkills hosts the world championships of skills.

Siemens provides the competitors with automation products, such as SIMATIC S7-1500 and LOGO!, for the disciplines: industrial control, electrical installations, Polymechanics/Automation and manufacturing technology.

Additionally, we support selected continental and regional competitions.

siemens.com/worldskills

Partnerships with educators

We provide support to educators and educational organizations in the form of one-on-one advice through SCE contact partners and Siemens experts as well as long-term cooperation.

siemens.com/sce/contact

Partnerships with producers of learning systems

For practical training in classrooms and labs, numerous producers of learning systems offer a wide range of complete didactic solutions based on SCE trainer packages.

siemens.com/sce/learningsystems

Information portal



To facilitate your teaching assignment and/or for selfstudy, we offer educators and students a comprehensive SCE information portal. At this portal you have quick access to all SCE offers, e.g. learning and training documents including projects, Getting Started information, videos, manuals, trial software and newsletters.

siemens.com/sce



Appendix

Partners

Siemens Partner Program

Overview

Siemens Solution and Approved Partner – Partners for your success



Highest competence in automation and drive technology

Siemens works closely together with selected partner companies around the world in order to ensure that customer requirements for all aspects of automation and drives are fulfilled as best as possible – wherever you are, and whatever the time.

We place great value on our customers acting in accordance with the same ideals which characterize Siemens as a whole: Competence, professionalism and quality. That is why continuous development through qualification and certification measures in line with global standards is a central aspect of our Partner Program. This means that with our partners, you benefit from the same high quality standards all over the world. The partner emblem is the symbol for tried and tested quality.

The partner network for industry

The Siemens Partner Program offers you expertise and experience close at hand.


Within our global network, we distinguish between Solution Partners and Approved Partners. We currently work with more than 1,500 Solution Partners around the world. Our network of over 150 Approved Partners continues to grow. In more than 80 countries worldwide.

Siemens Solution Partner – Automation Drives



At present we are working with more than 1,500 Solution Partners worldwide. They are characterized by extensive application, system and sector knowledge, as well as proven project experience, and are able to implement future-proof tailored solutions of the highest quality, based on our product and system portfolio.

Siemens Approved Partner – Value Added Reseller



With their detailed technical knowledge, Siemens Approved Partners – Value Added Resellers offer a combination of products and services that range from specialist technologies and customized modifications to the provision of high-quality system and product packages. They also provide qualified technical support and assistance.


Siemens Approved Partner – Industry Services



Siemens Approved Partner – Industry Services put their unique expertise entirely at the service of enhancing your productivity and can be instrumental in ensuring the availability of your plants.

Partner Finder

The ideal partner for your task is just a mouse click away!

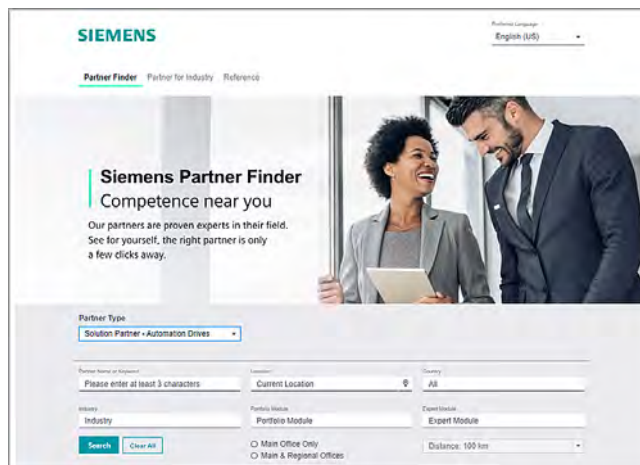

In the Siemens global Solution Partner Program, customers are certain to find the optimum partner for their specific requirements – with no great effort. The Partner Finder is basically a comprehensive database that showcases the profiles of all our partners.

Easy selection:

Set filters in the search screen form according to the criteria that are relevant to you. You can also directly enter the name of an existing partner.

Skills at a glance:

Gain a quick insight into the specific competencies of any particular partner with the reference reports.

Direct contact option:


Use our electronic query form:

www.siemens.com/partnerfinder

Additional information of the Siemens Partners for industry is available online at:

www.siemens.com/partnerprogram

Overview

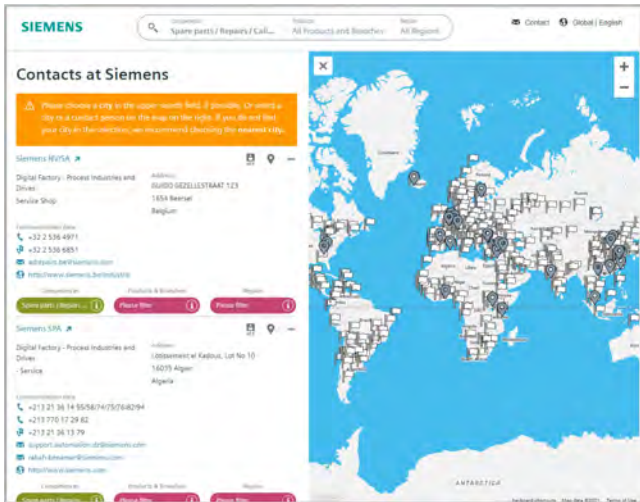

At your service locally, around the globe for consulting, sales, training, service, support, spare parts on the entire portfolio of Siemens.

Your partner can be found in our Personal Contacts Database at: www.siemens.com/automation-contact

You start by selecting


- the required competence,
- products and branches,
- a country and a city

or by a location search or free text search.

Appendix

Industry Services

Overview

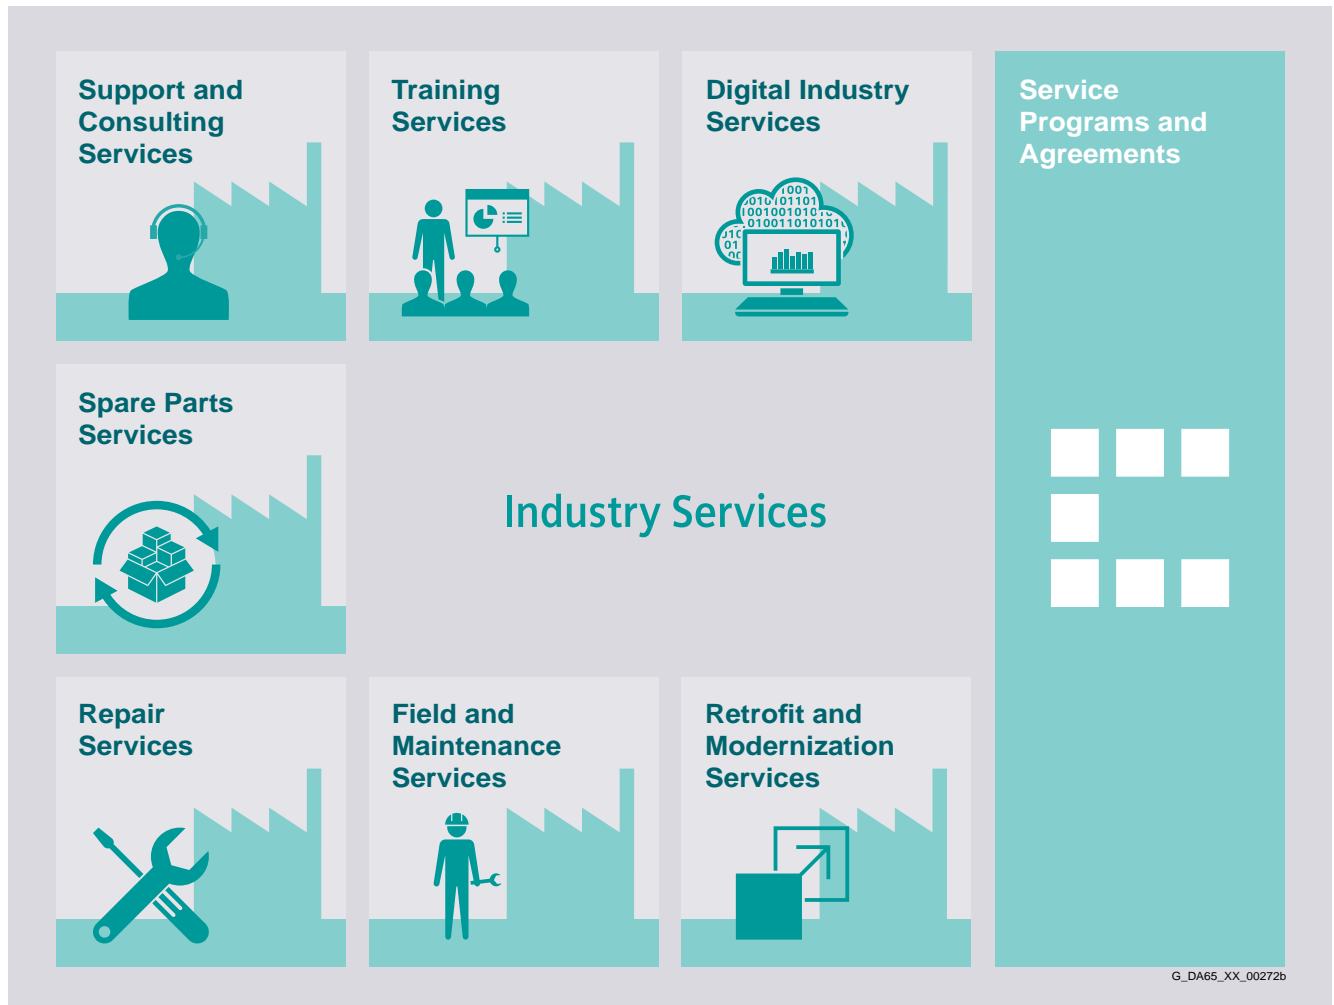

Keep your business running and shaping your digital future – with Industry Services

Optimizing the productivity of your equipment and operations can be a challenge, especially with constantly changing market conditions. Working with our service experts makes it easier. We understand your industry's unique processes and provide the services needed so that you can better achieve your business goals.

You can count on us to maximize your uptime and minimize your downtime, increasing your operations' productivity and reliability. When your operations have to be changed quickly to meet a new demand or business opportunity, our services give you the flexibility to adapt. Of course, we take care that your production is protected against cyber threats. We assist in keeping your operations as energy and resource efficient as possible and reducing your total cost of ownership. As a trendsetter, we ensure that you can capitalize on the opportunities of digitalization and by applying data analytics to enhance decision making. You can be sure that your plant reaches its full potential and retains this over the longer lifespan.

You can rely on our highly dedicated team of engineers, technicians and specialists to deliver the services you need – safely, professionally and in compliance with all regulations. We are there for you, where you need us, when you need us.

www.siemens.com/digital-enterprise-services

Overview




Digital Industry Services

Digital Industry Services make your industrial processes transparent to gain improvements in productivity, asset availability, and energy efficiency.

Production data is generated, filtered and translated with intelligent analytics to enhance decision-making.

This is done whilst taking data security into consideration and with continuous protection against cyber-attack threats.

www.siemens.com/digital-enterprise-services




Training Services

From the basics and advanced to specialist skills, SITRAIN courses provide expertise right from the manufacturer – and encompass the entire spectrum of Siemens products and systems for the industry.

Worldwide, SITRAIN courses are available wherever you need a training course in more than 170 locations in over 60 countries.

<https://support.industry.siemens.com/cs/ww/en/sc/2226>



Support and Consulting Services

Industry Online Support site for comprehensive information, application examples, FAQs and support requests.

Technical and Engineering Support for advice and answers for all inquiries about functionality, handling, and fault clearance. The Service Card as prepaid support for value added services such as Priority Call Back or Extended Support offers the clear advantage of quick and easy purchasing.

Information & Consulting Services, e.g. SIMATIC System Audit; clarity about the state and service capability of your automation system or Lifecycle Information Services; transparency on the lifecycle of the products in your plants.

<https://support.industry.siemens.com/cs/ww/en/sc/2235>



Spare Parts

Spare Parts Services are available worldwide for smooth and fast supply of spare parts – and thus optimal plant availability. Genuine spare parts are available for up to ten years. Logistic experts take care of procurement, transport, custom clearance, storage and order management.

Reliable logistics processes ensure that components reach their destination as needed.

Since not all spare parts can be kept in stock at all times, Siemens offers a preventive measure for spare parts provisioning on the customer's premises with optimized **Spare Parts Packages** for individual products, custom-assembled drive components and entire integrated drive trains – including risk consulting.

Asset Optimization Services help you design a strategy for parts supply where your investment and carrying costs are reduced and the risk of obsolescence is avoided.

<https://support.industry.siemens.com/cs/ww/en/sc/2110>



Repair Services

Repair Services are offered on-site and in regional repair centers for fast restoration of faulty devices' functionality.

Also available are extended repair services, which include additional diagnostic and repair measures, as well as emergency services.

<https://support.industry.siemens.com/cs/ww/en/sc/2154>



Field and Maintenance Services

Siemens specialists are available globally to provide expert field and maintenance services, including commissioning, functional testing, preventive maintenance and fault clearance.

All services can be included in customized service agreements with defined reaction times or fixed maintenance intervals.

<https://support.industry.siemens.com/cs/ww/en/sc/2265>



Retrofit and Modernization Services

Provide a cost-effective solution for the expansion of entire plants, optimization of systems or upgrading existing products to the latest technology and software, e.g. migration services for automation systems.

Service experts support projects from planning through commissioning and, if desired over the entire extended lifespan, e.g. Retrofit for Integrated Drive Systems for an extended lifetime of your machines and plants.

<https://support.industry.siemens.com/cs/ww/en/sc/2286>



Service Programs and Agreements

A technical Service Program or Agreement enables you to easily bundle a wide range of services into a single annual or multi-year agreement.

You pick the services you need to match your unique requirements or fill gaps in your organization's maintenance capabilities.

Programs and agreements can be customized as KPI-based and/or performance-based contracts.

<https://support.industry.siemens.com/cs/ww/en/sc/2275>

Appendix Industry Services

Online Support

Overview

Online Support – fast, intuitive, whenever you want, wherever you need

Web

www.siemens.com/online-support

App

Scan the QR code for information on our Online Support app.

- FAQ / Application examples**
Information about industrial products, programming and configuration as well as application examples
- Technical information**
Videos, documentation, manuals, updates, product notes, compatibility tool, certificates, planning data such as dimensional drawings, product data, 3D models
- Forum**
Exchange information and experience with other users and experts

Online Support for Siemens Industry Products

Siemens Industry and Online Support with some 1.7 million visitors per month is one of the most popular web services provided by Siemens. It is the central access point for comprehensive technical know-how about products, systems and services for automation and drives applications as well as for process industries.

In connection with the challenges and opportunities related to digitalization you can look forward to continued support with innovative offerings.

Overview**Software types**

Software requiring a license is categorized into types. The following software types have been defined:

- Engineering software
- Runtime software

Engineering software

This includes all software products for creating (engineering) user software, e.g. for configuring, programming, parameterizing, testing, commissioning or servicing.

Data generated with engineering software and executable programs can be duplicated for your own use or for use by third-parties free-of-charge.

Runtime software

This includes all software products required for plant/machine operation, e.g. operating system, basic system, system expansions, drivers, etc.

The duplication of the runtime software and executable programs created with the runtime software for your own use or for use by third-parties is subject to a charge.

You can find information about license fees according to use in the ordering data (e.g. in the catalog). Examples of categories of use include per CPU, per installation, per channel, per instance, per axis, per control loop, per variable, etc.

Information about extended rights of use for parameterization/configuration tools supplied as integral components of the scope of supply can be found in the readme file supplied with the relevant product(s).

License types

Siemens Digital Industries and Smart Infrastructure offers various types of software license:

- Floating license
- Single license
- Rental license
- Rental floating license
- Trial license
- Demo license
- Demo floating license

Floating license

The software may be installed for internal use on any number of devices by the licensee. Only the concurrent user is licensed. The concurrent user is the person using the program. Use begins when the software is started. A license is required for each concurrent user.

Single license

Unlike the floating license, a single license permits only one installation of the software per license.

The type of use licensed is specified in the ordering data and in the Certificate of License (CoL). Types of use include for example per instance, per axis, per channel, etc.

One single license is required for each type of use defined.

Rental license

A rental license supports the "sporadic use" of engineering software. Once the license key has been installed, the software can be used for a specific period of time (the operating hours do not have to be consecutive).

One license is required for each installation of the software.

Rental floating license

The rental floating license corresponds to the rental license, except that a license is not required for each installation of the software. Rather, one license is required per object (for example, user or device).

Trial license

A trial license supports "short-term use" of the software in a non-productive context, e.g. for testing and evaluation purposes. It can be transferred to another license.

Demo license

The demo license support the "sporadic use" of engineering software in a non-productive context, for example, use for testing and evaluation purposes. It can be transferred to another license. After the installation of the license key, the software can be operated for a specific period of time, whereby usage can be interrupted as often as required.

One license is required per installation of the software.

Demo floating license

The demo floating license corresponds to the demo license, except that a license is not required for each installation of the software. Rather, one license is required per object (for example, user or device).

Certificate of License (CoL)

The CoL is the licensee's proof that the use of the software has been licensed by Siemens. A CoL is required for every type of use and must be kept in a safe place.

Downgrading

The licensee is permitted to use the software or an earlier version/release of the software, provided that the licensee owns such a version/release and its use is technically feasible.

Delivery versions

Software is constantly being updated. The following delivery versions

- PowerPack
- Upgrade

can be used to access updates.

Existing bug fixes are supplied with the ServicePack version.

PowerPack

PowerPacks can be used to upgrade to more powerful software. The licensee receives a new license agreement and CoL (Certificate of License) with the PowerPack. This CoL, together with the CoL for the original product, proves that the new software is licensed.

A separate PowerPack must be purchased for each original license of the software to be replaced.

Upgrade

An upgrade permits the use of a new version of the software on the condition that a license for a previous version of the product is already held.

The licensee receives a new license agreement and CoL with the upgrade. This CoL, together with the CoL for the previous product, proves that the new version is licensed.

A separate upgrade must be purchased for each original license of the software to be upgraded.

Appendix

Software licenses

Overview

ServicePack

ServicePacks are used to debug existing products. ServicePacks may be duplicated for use as prescribed according to the number of existing original licenses.

License key

Siemens Digital Industries and Smart Infrastructure supplies software products with and without license keys.

The license key serves as an electronic license stamp and is also the "switch" for activating the software (floating license, rental license, etc.).

The complete installation of software products requiring license keys includes the program to be licensed (the software) and the license key (which represents the license).

Software Update Service (SUS)

As part of the SUS contract, all software updates for the respective product are made available to you free of charge for a period of one year from the invoice date. The contract will automatically be extended for one year if it is not canceled three months before it expires.

The possession of the current version of the respective software is a basic condition for entering into an SUS contract.

You can download explanations concerning license conditions from https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf

1. General Provisions

By using this catalog you can purchase hard- and software products as well as services (together hereinafter referred to as "products") described therein from Siemens Aktiengesellschaft subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as "T&C"). Note, for products purchased from any Siemens entity having a registered office outside of Germany, the respective terms and conditions of sale and delivery of the respective Siemens entity apply exclusively. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

1.1 For customers with a seat or registered office in European Union

For customers with a seat or registered office in European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the text of the product description, these specific terms and conditions shall apply and subordinate thereto,,
- for stand-alone software products and software products forming a part of a product or project, the "General Conditions for Software Products for Infrastructure & Industry Business (German law)"¹⁾ and/or
- for consulting services the "Allgemeine Geschäftsbedingungen für Beratungsleistungen für Infrastructure & Industry Geschäft (Deutsches Recht)"¹⁾ (available only in German) and/or
- for other services, the „Supplementary Terms and Conditions for Services for Infrastructure & Industry Business (German Law) ("BL")"¹⁾ and/or
- for other products the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"¹⁾.
In case such products should contain Open Source Software, the conditions of which shall prevail over the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"¹⁾, the Product will be given a note as to which special conditions apply to this open source software. This shall apply mutatis mutandis for notices referring to other third-party software components.

1.2 For customers with a seat or registered office outside European Union

For customers with a seat or registered office outside European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for consulting services the "Standard Terms and Conditions for Consulting Services for Infrastructure & Industry Business (Swiss Law)"¹⁾ and/or
- for other services the "International Terms & Conditions for Services"¹⁾ supplemented by "Software Licensing Conditions"¹⁾ and/or
- for other products the "International Terms & Conditions for Products"¹⁾ supplemented by "Software Licensing Conditions"¹⁾

1.3 For customers with master or framework agreement

To the extent products offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

2. Prices

The prices are in € (Euro) ex point of delivery, exclusive of packaging.

The sales tax (value added tax) is not included in the prices. It shall be charged separately at the respective rate according to the applicable statutory legal regulations.

Prices are subject to change without prior notice. We will charge the prices valid at the time of delivery.

To compensate for variations in the price of raw materials (e.g. silver, copper, aluminum, lead, gold, dysprosium and neodym), surcharges are calculated on a daily basis using the so-called metal factor for products containing these raw materials.

A surcharge for the respective raw material is calculated as a supplement to the price of a product if the basic official price of the raw material in question is exceeded.

The metal factor of a product indicates the basic official price (for those raw materials concerned) as of which the surcharges on the price of the product are applied, and with what method of calculation. The metal factor, provided it is relevant, can be found in the respective product description.

An exact explanation of the metal factor can be downloaded at: https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf

To calculate the surcharge (except in the cases of copper, dysprosium and neodym), the official price from the day prior to that on which the order was received or the release order was effected is used.

To calculate the surcharge applicable to copper, the official price from two days prior to that on which the order was received or the release order was effected is used.

To calculate the surcharge applicable to dysprosium and neodym ("rare earths"), the corresponding three-month basic average price in the quarter prior to that in which the order was received or the release order was effected is used with a one-month buffer (details on the calculation can be found in the explanation of the metal factor).

3. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog – especially with regard to data, dimensions and weights given – these are subject to change without prior notice.

¹⁾ The text of the Terms and Conditions of Siemens AG can be downloaded at https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf

Appendix

Conditions of sale and delivery

4. Export Control and Sanctions Compliance

4.1 General

Customer shall comply with all applicable sanctions, embargoes and (re-)export control laws and regulations, and, in any event, with those of the European Union, the United States of America and any locally applicable jurisdiction (collectively "Export Regulations").

4.2 Checks for Products

Prior to any transaction by customer concerning products (including hardware, documentation and technology) delivered by Siemens, or products (including maintenance and technical support) performed by Siemens with a third party, customer shall check and certify by appropriate measures that

- (i) the customer's use, transfer, or distribution of such products, the brokering of contracts or the provision of other economic resources in connection with products will not be in violation of any Export Regulations, also taking into account any prohibitions to circumvent these (e.g., by undue diversion)
- (ii) the products are not intended or provided for prohibited or unauthorized non-civilian purposes (e.g. armaments, nuclear technology, weapons, or any other usage in the field of defense and military);
- (iii) customer has screened all direct and indirect parties involved in the receipt, use, transfer, or distribution of the products against all applicable restricted party lists of the Export Regulations concerning trading with entities, persons and organizations listed therein and
- (iv) products within the scope of items-related restrictions, as specified in the respective annexes to the Export Regulations, will not, unless permitted by the Export Regulations, be
 - (a) exported, directly or indirectly (e.g., via Eurasian Economic Union (EAEU) countries), to Russia or Belarus, or
 - (b) resold to any third party business partner that does not take a prior commitment not to export such products to Russia or Belarus.

4.3 Non-Acceptable Use of Software and Cloud Services

Customer shall not, unless permitted by the Export Regulations or respective governmental licenses or approvals,

- (i) download, install, access or use the products from or in any location prohibited by or subject to comprehensive sanctions or subject or to license requirements according to the Export Regulations;
 - (ii) grant access to, transfer, (re-)export (including any "deemed (re-)exports"), or otherwise make available the products to any entity, person, or organization identified on a restricted party list of the Export Regulations;
 - (iii) use the products for any purpose prohibited by the Export Regulations (e.g. use in connection with armaments, nuclear technology or weapons);
 - (iv) upload to a products platform any customer content unless it is non-controlled (e.g. in the EU: AL = N; in the U.S.: ECCN = N or EAR99);
 - (v) facilitate any of the afore mentioned activities by any user.
- Customer shall provide all users with all information necessary to ensure compliance with the Export Regulations.

4.4 Semiconductor Development

Customer will not, without advance written authorization from Siemens, use offerings for the development or production of integrated circuits at any semiconductor fabrication facility located in China meeting the criteria specified in the U.S. Export Administration Regulations, 15 C.F.R. 744.23.

4.5 Information

Upon request by Siemens, customer shall promptly provide Siemens with all information pertaining to users, the intended use and the location of use or the final destination (in the case of hardware, documentation and technology) of the products. Customer will notify Siemens prior to customer disclosing any information to Siemens that is defense-related or requires controlled or special data handling pursuant to applicable government regulations, and will use the disclosure tools and methods specified by Siemens.


4.6 Reservation

Siemens shall not be obligated to fulfill this agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes or other sanctions. Customer acknowledges that Siemens may be obliged under the Export Regulations to limit or suspend access by customer and/or users to products.

5. Miscellaneous

Errors excepted and subject to change without prior notice.

Selection and ordering at Siemens SiePortal – Ordering products and downloading catalogs

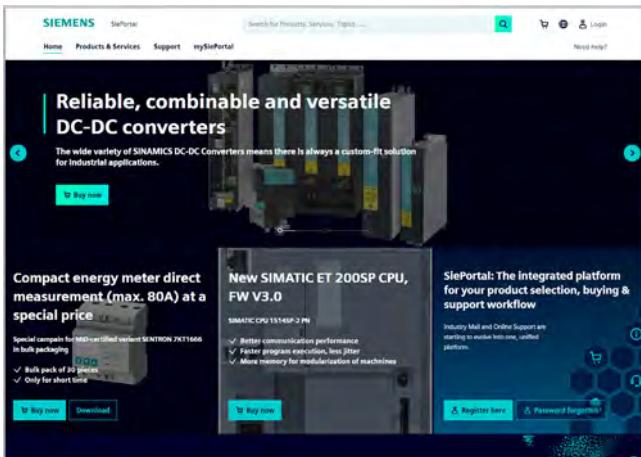

Easy product selection and ordering with SiePortal


SiePortal > Products & Services

The internet ordering platform of Siemens AG is located in SiePortal. It provides you with online access to a comprehensive product spectrum that is presented in an informative, well-organized way.

Powerful search functions help you select the required products, while configurators enable you to configure complex product and system components quickly and easily. CAX data are also available for you to use.

Data transfer allows the entire procedure, from selection through ordering to tracking and tracing, to be carried out online. Availability checks, individual customer discounting, and quotation preparation are also possible.

<https://sieportal.siemens.com>

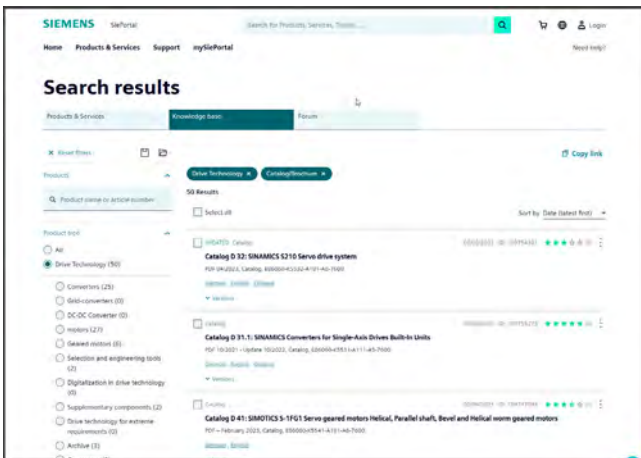

Downloading catalogs

SiePortal > Support > Knowledge base

You can download catalogs and brochures in PDF format from Siemens Industry Online Support without having to register.

The filter box makes it possible to perform targeted searches.

<https://sieportal.siemens.com>

Cybersecurity information

Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial cybersecurity measures that may be implemented, please visit www.siemens.com/cybersecurity-industry

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under

www.siemens.com/cert

Published by
Siemens AG

Digital Industries
Factory Automation
P.O. Box 48 48
90026 Nürnberg, Germany

For the U.S. published by
Siemens Industry Inc.

100 Technology Drive
Alpharetta, GA 30005
United States

PDF (E86060-K4670-A101-C1-7600)
KG 0624 PDF 1942 En
Produced in Germany

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or product names of Siemens AG or other companies whose use by third parties for their own purposes could violate the rights of the owners.